CONTRACT N40085-25-B-0010

NAVFAC SPECIFICATION
NO. 05-25-0010

REPAIRS G702

AT THE

MARINE CORPS BASE, CAMP GEIGER, NORTH CAROLINA

DESIGN BY:

MBF ARCHITECTS, P.A.
317-C POLLOCK ST.
NEW BERN, NC 28560

A/E Contract: N40085-22-D-0002

SPECIFICATION PREPARED BY:
Darden J. Eure, III
MBF Architects, PA

Date: 29 May 2026

DARDEN J. EURE, III
REGISTERED ARCHITECT
8640
NORTH CAROLINA
NEW BERN NC
29 May 2026

SPECIFICATION APPROVED BY:

MAAS.CHRISTOPHER.JETT.1588040727
Digitally signed by MAAS.CHRISTOPHER.JETT.1588040727
DN: CN=MAAS.CHRISTOPHER.JETT.1588040727, OU=USMC, OU=PKI, OU=DoD, O=U.S. Government, C=US
Date: 2026.06.17 16:25:05-04'00'

Christopher J. Maas, PE, Director
Design Branch, Public Works Division

Jonathan D. McGuire, Commander, CEC, U.S. Navy
for Commander, Naval Facilities Engineering Command

052510

THIS PAGE INTENTIONALLY LEFT BLANK

PROJECT TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

01 11 00	08/25	SUMMARY OF WORK
01 14 00	04/22	WORK RESTRICTIONS (MCBL)
01 20 00	11/20, CHG 3: 02/23	PRICE AND PAYMENT PROCEDURES
01 30 00	08/25	ADMINISTRATIVE REQUIREMENTS
01 31 23.13 20	05/17, CHG 7: 11/21	ELECTRONIC CONSTRUCTION AND FACILITY SUPPORT CONTRACT MANAGEMENT SYSTEM
01 31 50	04/22	TRANSFER AND ACCEPTANCE OF MILITARY REAL PROPERTY
01 32 16.00 20	08/18, CHG 1: 08/20	SMALL PROJECT CONSTRUCTION PROGRESS SCHEDULES
01 33 00	04/22	SUBMITTAL PROCEDURES
		SUBMITTAL REGISTER
01 33 29	02/21	SUSTAINABILITY REQUIREMENTS AND REPORTING
01 35 26	11/20, CHG 3: 02/22	GOVERNMENTAL SAFETY REQUIREMENTS
01 42 00	02/19	SOURCES FOR REFERENCE PUBLICATIONS
01 45 00	08/23	QUALITY CONTROL
		SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS
01 50 00	12/21	TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS
01 57 19	09/25	TEMPORARY ENVIRONMENTAL CONTROLS
01 74 19	02/19, CHG 3: 11/21	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
01 78 00	04/22	CLOSEOUT SUBMITTALS
01 78 23	04/22	OPERATION AND MAINTENANCE DATA
01 78 24.00 20	03/23	FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI)
01 78 30.00 22	5/22	GIS DATA DELIVERABLES

DIVISION 02 - EXISTING CONDITIONS

02 41 00	08/22	DEMOLITION
02 41 01	08/22	BUILDING DECONSTRUCTION

DIVISION 03 - CONCRETE

03 30 00	02/19, CHG 10: 08/25	CAST-IN-PLACE CONCRETE
03 30 53	05/14	MISCELLANEOUS CAST-IN-PLACE CONCRETE (SIDEWALKS)

DIVISION 04 - MASONRY

04 20 01	11/15, CHG 2: 05/19	MASONRY INFILL AND PATCHING

DIVISION 05 - METALS

05 30 00	05/15, CHG 2: 08/18	STEEL DECKS
05 40 00	05/15, CHG 1: 08/18	COLD-FORMED METAL FRAMING
05 50 13	08/24, CHG 1: 08/25	MISCELLANEOUS METAL FABRICATIONS
05 51 33	02/16, CHG 2: 02/18	METAL LADDERS
05 52 01	02/18, CHG 1: 02/20	ALUMINUM RAILINGS

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

06 10 00	08/16, CHG 3: 05/25	ROUGH CARPENTRY
06 41 16.00 10	08/10, CHG 1: 11/18	PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

06 61 16 08/20 SOLID SURFACING FABRICATIONS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 19 00 05/11, CHG 1: 08/17 WATER REPELLENTS
07 21 13 08/23, CHG 1: 08/25 BOARD AND BLOCK INSULATION
07 21 16 11/11, CHG 4: 08/18 MINERAL FIBER BLANKET INSULATION
07 22 00 08/23 ROOF AND DECK INSULATION
07 27 19.01 08/23, CHG 1: 08/24 SELF-ADHERING AIR BARRIERS
07 27 26 08/23 FLUID-APPLIED MEMBRANE AIR BARRIERS
07 27 36 08/23 SPRAY FOAM AIR BARRIERS
07 60 00 08/23, CHG 1: 05/25 FLASHING AND SHEET METAL
07 61 15.00 20 08 March 2021 CL ALUMINUM STANDING SEAM ROOFING
07 84 00 05/10, CHG 1: 08/13 FIRESTOPPING
07 92 00 08/23 JOINT SEALANTS

DIVISION 08 - OPENINGS

08 11 13 08/20 STEEL DOORS AND FRAMES
08 31 00 05/17, CHG 1: 08/18 ACCESS DOORS AND PANELS
08 33 13 05/09, CHG 2: 11/12 COILING COUNTER DOORS
08 33 24 08/20, CHG 1: 02/22 ALUMINUM OVERHEAD COILING DOORS
08 33 25 08/20, CHG 1: 02/22 STAINLESS STEEL OVERHEAD COILING DOORS
08 51 13 05/19 ALUMINUM WINDOWS
08 71 00 02/16, CHG 4: 02/22 DOOR HARDWARE
08 81 00 05/19 GLAZING
08 91 00 06/24 MCBCL ALUMINUM WALL LOUVERS

DIVISION 09 - FINISHES

09 03 00 03/22 LOW PRESSURE BUILDING CLEANING
09 22 00 02/10, CHG 2: 08/18 SUPPORTS FOR GYPSUM BOARD
09 29 00 08/16, CHG 4: 02/20 GYPSUM BOARD
09 30 10 08/20 CERAMIC, QUARRY, AND GLASS TILING
09 67 23.13 11/19 STANDARD RESINOUS FLOORING
09 90 00 02/21 PAINTS AND COATINGS

DIVISION 10 - SPECIALTIES

10 14 00.10 08/17, CHG 1: 11/18 EXTERIOR SIGNAGE
10 14 00.20 08/20 INTERIOR SIGNAGE
10 21 13 08/20 TOILET COMPARTMENTS
10 26 00 08/20 WALL AND DOOR PROTECTION
10 28 13 08/20 TOILET ACCESSORIES
10 44 16 11/19 FIRE EXTINGUISHERS
10 50 00 02/16 MISCELLANEOUS SPECIALTIES

DIVISION 11 - EQUIPMENT

11 24 24 08/20 PERMANENT HORIZONTAL FALL PROTECTION, METAL ROOFING

DIVISION 12 - FURNISHINGS

12 24 13 08/20 ROLLER WINDOW SHADES

DIVISION 21 - FIRE SUPPRESSION

21 13 13 08/20 WET PIPE SPRINKLER SYSTEMS, FIRE

PROTECTION

DIVISION 22 - PLUMBING

22 00 00	05/24, CHG 1: 11/24	PLUMBING, GENERAL PURPOSE

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

23 03 00.00 20	08/24 MCBCL	BASIC MECHANICAL MATERIALS AND METHODS
23 05 15	05/22, CHG 1: 02/24	COMMON PIPING FOR HVAC
23 05 48.19	05/18	BRACING FOR HVAC
23 05 93	11/15	TESTING, ADJUSTING, AND BALANCING FOR HVAC
23 07 00	08/24	THERMAL INSULATION FOR MECHANICAL SYSTEMS
23 09 00	02/25 MCBCL	INSTRUMENTATION AND CONTROL FOR HVAC
23 09 13	02/25 MCBCL	INSTRUMENTATION AND CONTROL DEVICES FOR HVAC
23 09 23.02	02/25 MCBCL	BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS
23 21 13.00 20	04/06, CHG 2: 11/19	LOW TEMPERATURE WATER (LTW) HEATING SYSTEM
23 23 00	08/21	REFRIGERANT PIPING
23 24 00	08/10	HYDRONIC PIPE CLEANING AND FLUSHING PROCEDURES
23 25 00	05/21	CHEMICAL TREATMENT OF WATER FOR MECHANICAL SYSTEMS
23 30 00	02/25	HVAC AIR DISTRIBUTION
23 52 43.00 20	05/15, CHG 2: 08/18	LOW PRESSURE WATER HEATING BOILERS (UNDER 800,000 BTU/HR OUTPUT)
23 64 10	05/25	WATER CHILLERS, VAPOR COMPRESSION TYPE
23 64 26	08/09, CHG 5: 11/19	CHILLED WATER PIPING SYSTEMS
23 81 00	05/24	DECENTRALIZED UNITARY HVAC EQUIPMENT

DIVISION 25 - INTEGRATED AUTOMATION

25 05 11.00	09/22	CYBERSECURITY FOR FACILITY-RELATED CONTROL SYSTEMS - ISOLATED SYSTEMS

DIVISION 26 - ELECTRICAL

26 05 73	08/23	POWER SYSTEM STUDIES
26 08 00	11/22	APPARATUS INSPECTION AND TESTING
26 12 19	05/24	PAD-MOUNTED, LIQUID-FILLED, MEDIUM-VOLTAGE TRANSFORMERS
26 20 00	05/25, CHG 1: 08/25	INTERIOR DISTRIBUTION SYSTEM
26 24 13	08/21	SWITCHBOARDS
26 27 14.00 20	02/21, CHG 1: 05/21	ELECTRICITY METERING
26 41 00	08/23	LIGHTNING PROTECTION SYSTEM
26 51 00	05/20, CHG 2: 11/21	INTERIOR LIGHTING
26 56 00	08/21	EXTERIOR LIGHTING

DIVISION 27 - COMMUNICATIONS

27 10 00	04/22	BUILDING TELECOMMUNICATIONS CABLING SYSTEM (MCBCL)

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

28 31 76	08/20	INTERIOR FIRE ALARM AND MASS NOTIFICATION SYSTEM, ADDRESSABLE

DIVISION 31 - EARTHWORK

31 00 00	08/23	EARTHWORK
31 11 00	11/18	CLEARING AND GRUBBING
31 31 16.13	08/22, CHG 1: 11/23	CHEMICAL TERMITE CONTROL

DIVISION 32 - EXTERIOR IMPROVEMENTS

32 05 33	08/17	LANDSCAPE ESTABLISHMENT
32 11 23	05/22	AGGREGATE BASE COURSE
32 11 26	05/20	HOT-MIX BITUMINOUS BASE COURSE FOR ROADS AND STREETS
32 17 23.16	11/24	ROAD AND PARKING LOT PAVEMENT MARKINGS
32 31 14	11/21	HIGH-SECURITY FENCES (ORNAMENTAL) AND GATES
32 92 23	04/06, CHG 1: 08/21	SODDING
32 93 00	08/17, CHG 1: 08/21	EXTERIOR PLANTS

DIVISION 33 - UTILITIES

33 11 00	08/24	WATER UTILITY DISTRIBUTION PIPING
33 30 00	05/18	SANITARY SEWERAGE
33 40 00	11/21	STORMWATER UTILITIES
33 61 14	02/10	EXTERIOR BURIED PREINSULATED WATER PIPING
33 71 01	02/26	OVERHEAD TRANSMISSION AND DISTRIBUTION
33 71 02	08/21	UNDERGROUND ELECTRICAL DISTRIBUTION
33 82 00	08/22	TELECOMMUNICATIONS OUTSIDE PLANT (OSP)

APPENDIX

HAZARDOUS MATERIALS SURVEY

-- End of Project Table of Contents --

LIST OF DRAWINGS

Contract drawings are as follows:

NAVFAC NO	SHEET NO	SHEET TITLE
G	GENERAL	
60043217	G-001	TITLE SHEET AND INDEX OF DRAWINGS
GI	LIFE SAFETY	
60043218	GI001	LIFE SAFETY GENERAL NOTES AND LEGEND
60043219	GI002	CODE COMPLIANCE SITE PLAN
60043220	GI101	LIFE SAFETY FIRST FLOOR PLAN - CONSTRUCTION
60043221	GI102	LIFE SAFETY SECOND FLOOR PLAN - CONSTRUCTION
60043222	GI103	LIFE SAFETY THIRD FLOOR PLAN - CONSTRUCTION
C	CIVIL	
60043223	C-001	CIVIL NOTES, LEGEND AND ABBREVIATIONS
60043224	C-100	OVERALL SITE PLAN
60043225	CD101	SITE PLAN-EXISTING CONDITIONS AND DEMOLITION
60043226	CS101	SITE PLAN-NEW WORK
60043227	CG101	GUTTER LEADER SYSTEM
60043228	CG102	SITE GRADING PLAN
60043229	CG103	SITE GRADING PLAN - SWP 23
60043230	CG104	SITE GRADING PLAN - SWP 107
60043231	CG301	DETAILS - SWP23
60043232	CG302	DETAILS - SWP107
60043233	CU101	SITE UTILITY PLAN
60043234	CU102	ENLARGED SITE UTILITY PLAN
60043235	CS501	DETAILS
60043236	CS502	DETAILS
60043237	CG501	DETAILS
60043238	CG502	DETAILS
60043239	CU501	DETAILS
60043240	L-701	SITE LANDSCAPE PLAN
60043241	L-702	DETAILS
S	STRUCTURAL	
60043242	S-101	GENERAL NOTES
60043243	S-102	CONCRETE REPAIR PLAN
60043244	S-103	CATWALK FRAMING PLAN
60043245	S-104	MECHANICAL EQUIPMENT BUILDING - CONSTRUCTION
60043246	S-201	MECHANICAL EQUIPMENT BUILDING SECTIONS
60043247	S-501	TYPICAL CONSTRUCTION DETAILS
A	ARCHITECTURAL	
60043248	A-001	SYMBOL LEGEND AND ABBREVIATIONS
60043249	AD101	FIRST FLOOR PLAN - EXISTING/DEMOLITION
60043250	AD102	SECOND FLOOR PLAN - EXISTING/DEMOLITION
60043251	AD103	THIRD FLOOR PLAN - EXISTING/DEMOLITION
60043252	AD104	ATTIC PLAN - EXISTING/DEMOLITION
60043253	AD105	ROOF PLAN - EXISTING/DEMOLITION
60043254	AD106	FIRST FLOOR PLAN - SLAB DEMOLTION
60043255	AD110	FIRST FLOOR REFLECTED CEILING PLAN - EXISTING/DEMOLITION
60043256	AD111	SECOND FLOOR REFLECTED CEILING PLAN - EXISTING/DEMOLITION
60043257	AD112	THIRD FLOOR REFLECTED CEILING PLAN - EXISTING/DEMOLITION
60043258	AD201	EXTERIOR ELEVATIONS - EXISTING/DEMOLITION
60043259	AD202	EXTERIOR ELEVATIONS - EXISTING/DEMOLITION

NAVFAC NO	SHEET NO	SHEET TITLE
60043260	AD203	EXTERIOR ELEVATIONS - EXISTING/DEMOLITION
60043261	AD401	ENLARGED PLANS - EXISTING/DEMOLITION
60043262	A-101	FIRST FLOOR PLAN - CONSTRUCTION
60043263	A-102	SECOND FLOOR PLAN - CONSTRUCTION
60043264	A-103	THIRD FLOOR PLAN - CONSTRUCTION
60043265	A-104	ATTIC PLAN - CONSTRUCTION
60043266	A-105	ROOF PLAN - CONSTRUCTION
60043267	A-110	FIRST FLOOR REFLECTED CEILING PLAN - CONSTRUCTION
60043268	A-111	SECOND FLOOR REFLECTED CEILING PLAN - CONSTRUCTION
60043269	A-112	THIRD FLOOR REFLECTED CEILING PLAN - CONSTRUCTION
60043270	A-120	MECHANICAL EQUIPMENT BUILDING - CONSTRUCTION
60043271	A-121	MECHANICAL EQUIPMENT BUILDING - EXTERIOR ELEVATIONS/BUILDING SECTION
60043272	A-201	EXTERIOR ELEVATIONS - CONSTRUCTION
60043273	A-202	EXTERIOR ELEVATIONS - CONSTRUCTION
60043274	A-203	EXTERIOR ELEVATIONS - CONSTRUCTION
60043275	A-301	BUILDING SECTIONS
60043276	A-310	WALL SECTIONS
60043277	A-401	ENLARGED PLANS - CONSTRUCTION
60043278	A-402	ENLARGED PLANS - CONSTRUCTION
60043279	A-403	ENLARGED PLANS - CONSTRUCTION
60043280	A-404	ENLARGED PLANS - CONSTRUCTION
60043281	A-501	ASSEMBLIES
60043282	A-502	DETAILS
60043283	A-503	DETAILS
60043284	A-504	DETAILS
60043285	A-601	DOOR AND FRAME SCHEDULE
60043286	A-602	DOOR AND FRAME DETAILS
60043287	A-603	WINDOW TYPES AND DETAILS
AI	ARCHITECTURAL INTERIOR	
60043288	AI101	FIRST FLOOR FINISH PLAN
60043289	AI102	SECOND FLOOR FINISH PLAN
60043290	AI103	THIRD FLOOR FINISH PLAN
I	INTERIOR DESIGN	
60043291	I-101	FIRST FLOOR FINISH PLAN
60043292	I-102	SECOND FLOOR FINISH PLAN
60043293	I-103	THIRD FLOOR FINISH PLAN
60043294	I-111	FIRST FLOOR SIGNAGE PLAN
60043295	I-112	SECOND FLOOR SIGNAGE PLAN
60043296	I-113	THIRD FLOOR SIGNAGE PLAN
60043297	I-201	INTERIOR ELEVATIONS
60043298	I-202	INTERIOR ELEVATIONS
60043299	I-301	CASEWORK SECTIONS
60043300	I-401	ENLARGED PLANS
60043301	I-501	SIGNAGE DETAILS
60043302	I-502	INTERIOR DETAILS
60043303	I-601	SCHEDULES & LEGENDS
60043304	I-602	SCHEDULES & LEGENDS
F	FIRE PROTECTION	
60043305	FD001	FIRE PROTECTION DEMOLITION GENERAL NOTES AND LEGEND
60043306	FD101	FIRE PROTECTION FIRST FLOOR PLAN - DEMOLITION
60043307	FD102	FIRE PROTECTION SECOND FLOOR PLAN - DEMOLITION
60043308	FD103	FIRE PROTECTION THIRD FLOOR PLAN - DEMOLITION
60043309	FA001	FIRE ALARM GENERAL NOTES AND LEGEND

NAVFAC NO	SHEET NO	SHEET TITLE
60043310	FA101	FIRE ALARM FIRST FLOOR PLAN - CONSTRUCTION
60043311	FA102	FIRE ALARM SECOND FLOOR PLAN - CONSTRUCTION
60043312	FA103	FIRE ALARM THIRD FLOOR PLAN - CONSTRUCTION
60043313	FA501	FIRE ALARM DETAILS
60043314	FA502	FIRE ALARM DETAILS
60043315	FX001	FIRE SUPPRESSION GENERAL NOTES AND LEGEND
60043316	FX101	FIRE SUPPRESSION FIRST FLOOR PLAN - CONSTRUCTION
60043317	FX102	FIRE SUPPRESSION SECOND FLOOR PLAN - CONSTRUCTION
60043318	FX103	FIRE SUPPRESSION THIRD FLOOR PLAN - CONSTRUCTION
60043319	FX501	FIRE SUPPRESSION DETAILS
P	PLUMBING	
60043320	P-001	PLUMBING COVER SHEET
60043321	PD101	FIRST FLOOR PLAN- EXISTING/DEMOLITION - PLUMBING
60043322	PD102	SECOND FLOOR PLAN - EXISTING/DEMOLITION - PLUMBING
60043323	PD103	THIRD FLOOR PLAN - EXISTING/DEMOLITION - PLUMBING
60043324	P-101	FIRST FLOOR PLAN - WASTE AND VENT
60043325	P-102	SECOND FLOOR PLAN - WASTE AND VENT
60043326	P-103	THIRD FLOOR PLAN - WASTE AND VENT
60043327	P-104	FIRST FLOOR PLAN - WATER
60043328	P-105	SECOND FLOOR PLAN - WATER
60043329	P-106	THIRD FLOOR PLAN - WATER
60043330	P-401	FIRST FLOOR ENLARGED PLANS - WASTE AND VENT
60043331	P-402	SECOND AND THIRD FLOOR ENLARGED PLANS - WASTE AND VENT
60043332	P-403	FIRST FLOOR ENLARGED PLANS - WATER
60043333	P-404	SECOND AND THIRD FLOOR ENLARGED PLANS - WATER
60043334	P-501	PLUMBING DETAILS
60043335	P-601	PLUMBING SCHEDULES
60043336	P-701	RISER DIAGRAMS-WASTE AND VENT
60043337	P-702	RISER DIAGRAMS-WATER
M	MECHANICAL	
60043338	M-001	MECHANICAL NOTES, LEGEND & ABBREVIATIONS
60043339	MD101	OVERALL FIRST FLOOR PLAN - MECHANICAL DEMOLITION
60043340	MD102	OVERALL SECOND FLOOR PLAN - MECHANICAL DEMOLITION
60043341	MD103	OVERALL THIRD FLOOR PLAN - MECHANICAL DEMOLITION
60043342	MD104	OVERALL ATTIC FLOOR PLAN - MECHANICAL DEMOLITION
60043343	MD105	ENLARGED FIRST FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL DEMOLITION
60043344	MD106	ENLARGED FIRST FLOOR PLAN - CENTRAL CORE - MECHANICAL DEMOLITION
60043345	MD107	ENLARGED SECOND FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL DEMOLITION
60043346	MD108	ENLARGED SECOND FLOOR PLAN - CENTRAL CORE - MECHANICAL DEMOLITION
60043347	MD109	ENLARGED THIRD FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL DEMOLITION
60043348	MD110	ENLARGED THIRD FLOOR PLAN - CENTRAL CORE - MECHANICAL DEMOLITION
60043349	MD111	SITE PLAN - MECHANICAL DEMOLITION
60043350	MD112	ENLARGED MECHANICAL BUILDINGS - MECHANICAL DEMOLITION
60043351	MD301	MECHANICAL SECTION VIEWS
60043352	M-101	OVERALL FIRST FLOOR PLAN - MECHANICAL
60043353	M-102	OVERALL SECOND FLOOR PLAN - MECHANICAL
60043354	M-103	OVERALL THIRD FLOOR PLAN - MECHANICAL
60043355	M-104	OVERALL ATTIC FLOOR PLAN - MECHANICAL
60043356	M-105	ENLARGED FIRST FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL

NAVFAC NO	SHEET NO	SHEET TITLE
60043357	M-106	ENLARGED FIRST FLOOR PLAN - CENTRAL CORE - MECHANICAL
M	MECHANICAL	
60043358	M-107	ENLARGED SECOND FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL
60043359	M-108	ENLARGED SECOND FLOOR PLAN - CENTRAL CORE - MECHANICAL
60043360	M-109	ENLARGED THIRD FLOOR PLAN - MECHANICAL ROOMS - MECHANICAL
60043361	M-110	ENLARGED THIRD FLOOR PLAN - CENTRAL CORE - MECHANICAL
60043362	M-111	SITE PLAN - MECHANICAL
60043363	M-112	ENLARGED MECHANICAL BUILDING - MECHANICAL
60043364	M-301	MECHANICAL SECTION VIEWS
60043365	M-302	MECHANICAL SECTION VIEWS
60043366	M-501	MECHANICAL DETAILS
60043367	M-502	MECHANICAL DETAILS
60043368	M-503	MECHANICAL DETAILS
60043369	M-504	MECHANICAL DETAILS
60043370	M-505	MECHANICAL DETAILS
60043371	M-506	MECHANICAL DETAILS
60043372	M-507	MECHANICAL DETAILS
60043373	M-601	MECHANICAL SCHEDULES
60043374	M-602	MECHANICAL SCHEDULES
60043375	M-603	MECHANICAL SCHEDULES
60043376	M-701	MECHANICAL CONTROLS
60043377	M-702	MECHANICAL CONTROLS
60043378	M-703	MECHANICAL CONTROLS
60043379	M-704	MECHANICAL CONTROLS
60043380	M-705	MECHANICAL CONTROLS
60043381	M-706	MECHANICAL CONTROLS
60043382	M-707	MECHANICAL CONTROLS
60043383	M-801	EXISTING DUAL TEMPERATURE WATER SYSTEM DIAGRAM
60043384	M-802	CHILLED WATER SYSTEM DIAGRAM
60043385	M-803	HOT WATER SYSTEM DIAGRAM
60043386	M-901	3D ISOMETRIC VIEWS - MECHANICAL
E	ELECTRICAL	
60043387	E-001	ELECTRICAL NOTES AND LEGENDS
60043388	ES101	SITE PLAN - ELECTRICAL
60043389	ES501	SITE ELECTRICAL DETAILS
60043390	ES502	SITE ELECTRICAL DETAILS
60043391	ES503	SITE ELECTRICAL DETAILS
60043392	ED101	FIRST FLOOR PLAN - POWER DEMOLITION
60043393	ED102	SECOND FLOOR PLAN - POWER DEMOLITION
60043394	ED103	THIRD FLOOR PLAN - POWER DEMOLITION
60043395	ED104	FIRST FLOOR PLAN - LIGHTING DEMOLITION
60043396	ED105	SECOND FLOOR PLAN - LIGHTING DEMOLITION
60043397	ED106	THIRD FLOOR PLAN - LIGHTING DEMOLITION
60043398	E-101	FIRST FLOOR PLAN - POWER
60043399	E-102	SECOND FLOOR PLAN - POWER
60043400	E-103	THIRD FLOOR PLAN - POWER
60043401	E-104	ATTIC PLAN - ELECTRICAL
60043402	E-105	FIRST FLOOR PLAN - EQUIPMENT CONNECTIONS
60043403	E-106	SECOND FLOOR PLAN - EQUIPMENT CONNECTIONS
60043404	E-107	THIRD FLOOR PLAN - EQUIPMENT CONNECTIONS
60043405	E-108	FIRST FLOOR PLAN - LIGHTING
60043406	E-109	SECOND FLOOR PLAN - LIGHTING
60043407	E-110	THIRD FLOOR PLAN - LIGHTING
60043408	E-111	ROOF PLANS - LIGHTNING PROTECTION
60043409	E-112	MECHANICAL BUILDING PLAN - ELECTRICAL

NAVFAC NO	SHEET NO	SHEET TITLE
60043410	E-501	ELECTRICAL DETAILS
60043411	E-502	ELECTRICAL DETAILS
60043412	E-503	ELECTRICAL DETAILS
60043413	E-601	ELECTRICAL SCHEDULES
60043414	E-602	ELECTRICAL SCHEDULES
60043415	E-603	ELECTRICAL SCHEDULES
60043416	E-604	ELECTRICAL SCHEDULES
60043417	E-605	ELECTRICAL SCHEDULES
60043418	E-701	ELECTRICAL RISER DIAGRAM

T TELECOMMUNICATIONS

60043419	T-001	TELECOMMUNICATIONS NOTES AND LEGEND
60043420	T-101	FIRST FLOOR PLAN - TELECOMMUNICATIONS
60043421	T-102	SECOND FLOOR PLAN - TELECOMMUNICATIONS
60043422	T-103	THIRD FLOOR PLAN - TELECOMMUNICATIONS
60043423	T-501	TELECOMMUNICATIONS DETAILS
60043424	T-502	TELECOMMUNICATIONS DETAILS

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 11 00

SUMMARY OF WORK

08/25

PART 1 GENERAL

1.1 WORK COVERED BY CONTRACT DOCUMENTS

1.1.1 Project Description

The work includes the repair and renovation of building G702. It also includes the construction of a new mechanical building adjacent to Building G702, construction of a new trash dumpster enclosure and incidental related work.

1.1.2 Location

The work shall be located at the Marine Corps Base Camp Lejeune, North Carolina, at the building and/or area as described in the project description above. The exact location will be indicated by the Contracting Officer.

1.2 PHASED CONSTRUCTION SCHEDULE

Within the overall project schedule, commence and complete the work in phases as described in the project description above.

1.3 EXISTING WORK

In addition to "FAR 52.236-9, Protection of Existing Vegetation, Structures, Equipment, Utilities, and Improvements":

a. Remove or alter existing work in such a manner as to prevent injury or damage to any portions of the existing work which remain.

b. Repair or replace portions of existing work which have been altered during construction operations to match existing or adjoining work, as approved by the Contracting Officer. At the completion of operations, existing work shall be in a condition equal to or better than that which existed before new work started.

1.4 LOCATION OF UNDERGROUND FACILITIES

The Contractor will be responsible for obtaining the services of a professional utility locator to scan the construction site with electromagnetic or sonic equipment, and mark the surface of the ground where existing underground utilities are discovered. If the underground utility cannot be confirmed, the contractor shall pot-hole area until piping location is verified. Dowsing or any other type of divination method is not considered an acceptable practice for locating utilities on board MCB Camp Lejeune. Verify the elevations of existing piping, utilities, and any type of underground obstruction not indicated or specified to be removed but indicated or discovered during scanning in locations to be traversed by piping, ducts, and other work to be

installed. Verify elevations before installing new work closer than nearest manhole or other structure at which an adjustment in grade can be made.

1.4.1 Notification Prior to Excavation

Notify the Contracting Officer's Representative (COR) 48 hours prior to starting excavation work.

1.5 GOVERNMENT-FURNISHED MATERIAL AND EQUIPMENT

Government furnished material and equipment will be indicated on drawings and in scope of work if applicable.

1.6 MARINE CORPS ENTERPRISE NETWORK (MCEN) COORDINATION REQUIREMENTS

1.6.1 BaseTel Access

Allow BaseTel access to the facility towards the end of construction (finishes 90 percent complete, rough-in 100 percent complete, Inside Plant (ISP)/Outside Plant (OSP) infrastructure in place) to provide equipment in the telecommunications rooms and make final connections. Coordinate efforts with BaseTel to facilitate joint use of building spaces during the final phases of construction. After the Contracting Officer Representative has facilitated coordination meetings between the two contractors, within one week, incorporate the effort of additional coordination with BaseTel into the construction schedule to demonstrate a plan for maintaining the Contract duration.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

SECTION 01 14 00

WORK RESTRICTIONS (MCBL)
04/22

PART 1 GENERAL

1.1 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

List of Contact Personnel

1.2 SPECIAL SCHEDULING REQUIREMENTS

a. The Contractor shall comply with all special scheduling requirements as described in the attached project description, and as noted on the drawings.

d. Permission to interrrupt any Station roads, railroads, and/or utility service shall be requested in writing a minimum of 15 calendar days prior to the desired date of interruption.

1.3 CONTRACTOR ACCESS AND USE OF PREMISES

1.3.1 Activity Regulations

Ensure that Contractor personnel employed on the Activity become familiar with and obey Activity regulations including safety, fire, traffic and security regulations. Keep within the limits of the work and avenues of ingress and egress. Wear appropriate personal protective equipment (PPE) in designated areas. Do not enter any restricted areas unless required to do so and until cleared for such entry. Ensure all Contractor equipment, include delivery vehicles, are clearly identified with their company name.

1.3.1.1 Subcontractors and Personnel Contacts

Provide a list of contact personnel of the Contractor and subcontractors including addresses and telephone numbers for use in the event of an emergency. As changes occur and additional information becomes available, correct and change the information contained in previous lists.

1.3.1.2 Installation Access

Obtain access to Navy installations through participation in the Defense Biometrics Identification System (DBIDS). Requirements for Contractor employee registration, and transition for employees currently under Navy Commercial Access Control System (NCACS), are available at https://www.cnic.navy.mil/om/dbids.html. No fees are associated with obtaining a DBIDS credential.

Participation in the DBIDS is not mandatory, and Contractor personnel may apply for One-Day Passes at the Base Visitor Control Office to access an installation.

The following are specific details regarding contractor personnel requirements. For the most up-to-date information regarding Base Access please visit https://www.lejeune.marines.mil/Base-Access/.

1.3.1.2.1 Registration for DBIDS

Registration for DBIDS is available at https://www.cnic.navy.mil/om/dbids.html. Procedure includes:

a. Present a letter or official award document (i.e. DD Form 1155 or SF 1442) from the Contracting Officer, that provides the purpose for access, to the base Visitor Control Center representative.

b. Present valid identification, such as a passport or Real ID Act-compliant state driver's license.

c. Provide completed SECNAV FORM 5512/1 to the base Visitor Control Center representative to obtain a background check. This form is available for download at https://www.cnic.navy.mil/om/dbids.html.

d. Upon successful completion of the background check, the Government will complete the DBIDS enrollment process, which includes Contractor employee photo, fingerprints, base restriction and several other assessments.

e. Upon successful completion of the enrollment process, the Contractor employee will be issued a DBIDS credential, and will be allowed to proceed to worksite.

1.3.1.2.2 DBIDS Eligibility Requirements

Throughout the length of the contract, the Contractor employee must continue to meet background screen standards. Periodic background screenings are conducted to verify continued DBIDS participation and installation access privileges. DBIDS access privileges will be immediately suspended or revoked if at any time a Contractor employee becomes ineligible.

An adjudication process may be initiated when a background screen failure results in disqualification from participation in the DBIDS, and Contractor employee does not agree with the reason for disqualification. The Government is the final authority.

1.3.1.2.3 DBIDS Notification Requirements

a. Immediately report instances of lost or stolen badges to the Contracting Officer.

b. Immediately collect DBIDS credentials and notify the Contracting Officer in writing under the following circumstances:

(1) An employee has departed the company without having properly returned or surrendered their DBIDS credentials.

(2) There is a reasonable basis to conclude that an employee, or former employee, might pose a risk, compromise, or threat to the safety or security of the Installation or anyone therein.

1.3.1.2.4 One-Day Passes

Personnel applying for One-Day passes at the Base Visitor Control Office are subject to daily mandatory vehicle inspection, and will have limited access to the installation. The Government is not responsible for any cost or lost time associated with obtaining daily passes or added vehicle inspections incurred by non-participants in the DBIDS.

1.3.2 No Smoking Policy

Smoking is prohibited within and outside of all buildings on installation, except in designated smoking areas. This applies to existing buildings, buildings under construction and buildings under renovation. Discarding tobacco materials other than into designated tobacco receptacles is considered littering and is subject to fines. The Contracting Officer will identify designated smoking areas.

1.3.3 Working Hours

Regular working hours shall be 0730-1600, Monday through Friday, excluding Government holidays.

1.3.4 Work Outside Regular Hours

Work outside regular working hours requires COR approval. Provide written request at least 15 calendar days prior to such work to allow arrangements to be made by the Government for inspecting the work in progress. During periods of darkness, the different parts of the work shall be lighted in a manner approved by the COR.

1.3.5 Occupied Building and Existing Buildings

The Contractor shall be working in portions of an existing building which is occupied. The existing building and its contents shall be kept secure at all times.

1.3.6 Utility Cutovers and Interruptions

a. The Contractor shall coordinate a minimum of 14 calendar days prior to any planned utility cutover / interruption. Make utility cutovers and interruptions OUTSIDE normal working hours. Working hours are indicated on the drawings.

b. Ensure that new utility lines are complete, except for the connection, before interrupting existing service.

c. Interruption to water, sanitary sewer, storm sewer, telephone service, electric service, air conditioning, heating, fire alarm, and compressed air shall be considered utility cutovers. This time limit includes time for deactivation and reactivation.

d. Operation of Station Utilities: The Contractor shall not operate nor disturb the setting of control devices in the station utilities system, including water, sewer, electrical, and steam services. The Government will operate the control devices as required for normal conduct of the work. The Contractor shall notify the Contracting Officer at least 15 days prior to such operation.

1.4 SECURITY REQUIREMENTS

Contract Clause "FAR 52.204-2, Security Requirements and Alternate II," "FAC 5252.236-9301, Special Working Conditions and Entry to Work Area," apply.

1.5 EMERGENCY UNEXPLODED ORDNANCE (UXO) RESPONSE

In the event that UXO, as defined in 40 CFR 260 is encountered during the construction activities that is deemed to be a threat to human health or the environment, Camp Lejeune Military Police and EOD professionals shall be immediately contacted to conduct an emergency response. Additionally, immediately contact the Contracting Officer if UXO is encountered. An evaluation of this scenario and procedures, with contract numbers, shall be included in the Health and Safety Plan (HASP) for the fieldwork.

1.5.1 3R TRAINING

All Contractor personnel performing ground disturbing activities must complete contractor awareness training related to recognizing UXO. This training (3R TRAINING) is available online at: http://www.lejeune.marines.mil/OfficesStaff/EnvironmentalMgmt/TrainingVideo.aspx

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

Not Used

-- End of Section --

SECTION 01 20 00

PRICE AND PAYMENT PROCEDURES
11/20, CHG 3: 02/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. ARMY CORPS OF ENGINEERS (USACE)

EP 1110-1-8	(2021) Engineering and Design -- Construction Equipment Ownership and Operating Expense Schedule

1.2 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Schedule of Prices; G

1.3 SCHEDULE OF PRICES

1.3.1 Data Required

Within 15 calendar days of notice of award, prepare and deliver to COR a schedule of prices (construction contract). Schedule of Prices must have cost summarized and totals provided for each construction category. Provide a detailed breakdown of the Contract price, giving quantities for each of the various kinds of work, unit prices and extended prices. Schedule of prices shall be separated by individual building numbers with subtotals for each building. Contractor overhead and profit including salaries for field office personnel, if applicable, must be proportionately spread over all pay items and not included as individual pay items.

1.3.2 Payment Schedule Instructions

Payments will not be made until the Schedule of Prices has been submitted to and accepted by the Contracting Officer.

Additionally, the Schedule of Prices must be separated as follows:

a. Primary Facilities Cost Breakdown:

Defined as work on the primary facilities out to the 5 foot line. Work out to the 5 foot line includes construction encompassed within a theoretical line 5 foot from the face of exterior walls and includes attendant construction, such as pad mounted HVAC cooling equipment, cooling towers, and transformers placed beyond the 5 foot line.

b. Supporting Facilities Cost Breakdown:

Defined as site work, including incidental work, outside the 5 foot line.

1.4 CONTRACT MODIFICATIONS

In conjunction with the Contract Clause DFARS 252.236-7000 Modification Proposals-Price Breakdown, and where actual ownership and operating costs of construction equipment cannot be determined from Contractor accounting records, base equipment use rates upon the applicable provisions of the EP 1110-1-8.

1.5 CONTRACTOR'S INVOICE AND CONTRACT PERFORMANCE STATEMENT

1.5.1 Content of Invoice

Requests for payment will be processed in accordance with the Contract Clause FAR 52.232-27 Prompt Payment for Construction Contracts and FAR 52.232-5 Payments Under Fixed-Price Construction Contracts. Invoices not completed in accordance with contract requirements will be returned to the Contractor for correction of the deficiencies. The requests for payment shall include the documents listed below.

a. The Contractor's invoice, on NAVFAC Form 7300/30 furnished by the Government, showing in summary form, the basis for arriving at the amount of the invoice. Form 7300/30 must include certification by Quality Control (QC) Manager as required by the Contract.

b. The Estimate for Voucher/ Contract Performance Statement on NAVFAC Form 4330/54 furnished by the Government. Use NAVFAC Form 4330, unless otherwise directed by the Contracting Officer, on NAVFAC Contracts when a Monthly Estimate for Voucher is required.

c. Contractor's Monthly Estimate for Voucher and Contractors Certification (NAVFAC Form 4330) with Subcontractor and supplier payment certification. Other documents, including but not limited to, that need to be received prior to processing payment include the following submittals as required. These items are still required monthly even when a pay voucher is not submitted.

d. Monthly Work-hour report.

e. Updated Construction Progress Schedule and tabular reports required by the contract.

f. Contractor Safety Self Evaluation Checklist.

g. Updated submittal register.

h. Solid Waste Disposal Report.

i. Certified payrolls.

j. Updated testing logs.

k. Other supporting documents as requested.

1.5.2 Submission of Invoices

If DFARS Clause 252.232-7006 Wide Area WorkFlow Payment Instructions is included in the Contract, provide the documents listed in above paragraph CONTENT OF INVOICE in their entirety as attachments in Wide Area Work Flow (WAWF) for each invoice submitted. The maximum size of each WAWF attachment is two megabytes, but there are no limits on the number of attachments. If a document cannot be attached in WAWF due to system or size restriction, provide it as instructed by the Contracting Officer.

Monthly invoices and supporting forms for work performed through the anniversary award date of the Contract must be submitted to the Contracting Officer within 5 calendar days of the date of invoice. For example, if Contract award date is the 7th of the month, the date of each monthly invoice must be the 7th and the invoice must be submitted by the 12th of the month.

1.5.3 Final Invoice

a. A final invoice must be accompanied by the certification required by DFARS 252.247.7023 Transportation of Supplies by Sea, and the Contractor's Final Release. If the Contractor is incorporated, the Final Release must contain the corporate seal. An officer of the corporation must sign and the corporate secretary must certify the Final Release.

b. For final invoices being submitted via WAWF, the original Contractor's Final Release Form and required certification of Transportation of Supplies by Sea must be provided directly to the respective Contracting Officer prior to submission of the final invoice. Once receipt of the original Final Release Form and required certification of Transportation of Supplies by Sea has been confirmed by the Contracting Officer, the Contractor must then submit final invoice and attach a copy of the Final Release Form and required certification of Transportation of Supplies by Sea in WAWF.

c. Final invoices not accompanied by the Contractor's Final Release and required certification of Transportation of Supplies by Sea will be considered incomplete and will be returned to the Contractor.

1.6 PAYMENTS TO THE CONTRACTOR

Payments will be made on submission of itemized requests by the Contractor which comply with the requirements of this section, and will be subject to reduction for overpayments or increase for underpayments made on previous payments to the Contractor.

1.6.1 Obligation of Government Payments

The obligation of the Government to make payments required under the provisions of this Contract will, at the discretion of the Contracting Officer, be subject to reductions and suspensions permitted under the FAR and agency regulations including the following in accordance with FAR 32.103 Progress Payments Under Construction Contracts:

a. Reasonable deductions due to defects in material or workmanship;

b. Claims which the Government may have against the Contractor under or in connection with this Contract;

c. Unless otherwise adjusted, repayment to the Government upon demand for overpayments made to the Contractor; and

d. Failure to maintain accurate "as-built" or record drawings in accordance with FAR 52.236.21.

1.6.2 Payment for Onsite and Offsite Materials

Progress payments may be made to the Contractor for materials delivered on the site, for materials stored off construction sites, or materials that are in transit to the construction sites under the following conditions:

a. FAR 52.232-5(b) Payments Under Fixed Price Construction Contracts.

b. Materials delivered on the site but not installed, including completed preparatory work, and off-site materials to be considered for progress payment must be major high cost, long lead, special order, or specialty items, not susceptible to deterioration or physical damage in storage or in transit to the construction site. Examples of materials acceptable for payment consideration include, but are not limited to, structural steel, non-magnetic steel, non-magnetic aggregate, equipment, machinery, large pipe and fittings, precast/prestressed concrete products, plastic lumber (e.g., fender piles/curbs), and high-voltage electrical cable. Materials not acceptable for payment include consumable materials such as nails, fasteners, conduits, gypsum board, glass, insulation, and wall coverings.

c. Materials to be considered for progress payment prior to installation must be specifically and separately identified in the Contractor's estimates of work submitted for the Contracting Officer's approval in accordance with Schedule of Prices requirement of this Contract. Requests for progress payment consideration for such items must be supported by documents establishing their value and that the title requirements of the clause at FAR 52.232-5 Payments Under Fixed-Price Construction Contracts have been met.

d. Materials are adequately insured and protected from theft and exposure.

e. Provide a written consent from the surety company with each payment request for offsite materials.

f. Materials to be considered for progress payments prior to installation must be stored either in Hawaii, Guam, Puerto Rico, or the Continental United States. Other locations are subject to written approval by the Contracting Officer.

g. Materials in transit to the job site or storage site are not acceptable for payment.

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

Not Used

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 30 00

ADMINISTRATIVE REQUIREMENTS
08/25

PART 1 GENERAL

1.1 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

View Location Map

Progress and Completion Pictures

1.2 VIEW LOCATION MAP

Submit, prior to or with the first digital photograph submittals, a sketch or drawing indicating the required photographic locations. Update as required if the locations are moved.

1.3 PROGRESS AND COMPLETION PICTURES

Photographically document site conditions prior to start of construction operations. Provide monthly, and within one month of the completion of work, digital photographs, 1600x1200x24 bit true color minimum resolution in JPEG file format showing the sequence and progress of work. Take a minimum of 20 digital photographs each week throughout the entire project from a minimum of ten different viewpoints selected by the Contractor unless otherwise directed by the Contracting Officer. Submit with the monthly invoice one set of digital photographs in the agency construction management system of record, cumulative of all photos to date. Indicate photographs demonstrating environmental procedures. Provide photographs for each month in a separate monthly directory and name each file to indicate its location on the view location sketch. Also provide the view location sketch with the submission in the agency construction management system of record as a digital file. Include a date designator in file names. Photographs provided are for unrestricted use by the Government.

1.4 MINIMUM INSURANCE REQUIREMENTS

Provide the minimum insurance coverage required by FAR 28.307-2 Liability, during the entire period of performance under this contract. Provide other insurance coverage as required by State law.

1.5 SUPERVISION

1.5.1 Superintendent Qualifications

The Contractor shall provide a full-time, on-site Superintendent with a minimum of five (5) years of experience managing field construction operations of similar size, scope, and complexity. The Superintendent shall hold a valid OSHA 30-hour Construction certificate and demonstrate experience coordinating subcontractors, materials, equipment, and project schedules.

For projects where the superintendent is permitted to also serve as the Quality Control (QC) Manager as established in Section 01 45 00 QUALITY CONTROL,(one person, three hats) the superintendent must have qualifications in accordance with that section.

1.5.2 Minimum Communication Requirements

Have at least one qualified superintendent, or competent alternate, capable of reading, writing, and conversing fluently in the English language, on the job-site at all times during the performance of Contract work. In addition, if a Quality Control (QC) representative is required on the Contract, then that individual must also have fluent English communication skills.

1.5.3 Duties

The project superintendent is primarily responsible for managing subcontractors and coordinating day-to-day production and schedule adherence on the project. The superintendent is required to attend Red Zone meetings, partnering meetings, and quality control meetings. The superintendent or qualified alternative must be on-site at all times during the performance of this contract until the work is completed and accepted.

1.5.4 Non-Compliance Actions

The Project Superintendent is subject to removal by the Contracting Officer for non-compliance with requirements specified in the contract and for failure to manage the project to ensure timely completion. Furthermore, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders is acceptable as the subject of claim for extension of time or excess costs or damages by the Contractor.

1.6 PRECONSTRUCTION MEETING

Immediately after award, prior to commencing any work at the site, coordinate with the Contracting Officer a time and place to meet for the Preconstruction Meeting. The meeting must take place within 35 calendar days after award of the contract, but prior to commencement of any work at the site. The purpose of this meeting is to discuss and develop a mutual understanding of the administrative requirements of the Contract including but not limited to: daily reporting, invoicing, value engineering, safety, base-access, outage requests, hot work permits, schedule requirements, quality control, schedule of prices or earned value report, shop drawings, submittals, cybersecurity, prosecution of the work, government acceptance, final inspections and contract close-out. Contractor must present and discuss their basic approach to scheduling the construction work and any required phasing.

1.6.1 Attendees

Contractor attendees must include the Project Manager, Superintendent, Site Safety and Health Officer (SSHO), Quality Control Manager. Major subcontractors are encouraged but not required to attend.

1.7 FACILITY TURNOVER PLANNING MEETINGS (Red Zone Meetings)

Meet with the Government to identify strategies to ensure the project is carried to expeditious closure and turnover to the Client. Start planning the turnover process at the Pre-Construction Conference meeting with a discussion of the Red Zone process and convene at regularly scheduled Red Zone Meetings beginning at approximately 75 percent of project completion. Include the following in the facility Turnover effort:

1.7.1 Red Zone Checklist

a. Contracting Officer's Technical Representative (COTR) will provide the Contractor a copy of the Red Zone Checklist template.

b. Prior to 75 percent completion, modify the Red Zone Checklist template by adding or deleting critical activities applicable to the project and assign planned completion dates for each activity. Submit the modified Red Zone Checklist to the Contracting Officer. The Contracting Officer may request additional activities be added to the Red Zone Checklist at any time as necessary.

1.7.2 Meetings

a. Conduct regular Red Zone Meetings beginning at approximately 75 percent project completion, or three to six months prior to Beneficial Occupancy Date (BOD), whichever comes first.

b. The Contracting Officer will establish the frequency of the meetings, which is expected to increase as the project completion draws nearer. At the beginning, Red Zone meetings may be every two weeks then increase to weekly towards the final month of the project.

c. Using the Red Zone Checklist as a Plan of Action and Milestones (POAM) and basis for discussion, review upcoming critical activities and strategies to ensure work is completed on time.

d. During the Red Zone Meetings discuss with the COTR any upcoming activities that require Government involvement.

e. The monthly Progress Schedule updates and Red Zone completion dates should reflect matching dates, data, and milestones. Prevent conflicting information between Red Zone Updates and Monthly CPM updates.

1.8 PARTNERING

Host the partnering session within 45 calendar days of contract award. To most effectively accomplish this Contract, the Contractor and Government must form a cohesive partnership with the common goal of drawing on the strength of each organization in an effort to achieve a successful project without safety mishaps, conforming to the Contract, within budget and on schedule. The partnering team must consist of personnel from both the Government and Contractor including project level and corporate level leadership positions. Key Personnel from the supported command, end user, NAVFAC, PWD, ROICC, Contractor, key subcontractors and the Designer of Record (DOR) (regardless of whether the contract is a design-build or a design-bid-build) are required to participate in the Partnering process.

1.8.1 Team-Led (Informal) Partnering

a. The Contracting Officer will coordinate the initial Team-Led (Informal) Partnering Session with key personnel of the project team, including Contractor and Government personnel. The Partnering Session will be co-led by the Government Construction Manager and Contractor's Project Manager.

b. The Initial Team-led Partnering session may be held concurrently with the Pre-Construction meeting. Partnering sessions will be held at a location mutually agreed to by the Contracting Officer and the Contractor, typically at a conference room on-base or at the Contractor's temporary trailer.

c. The Initial Team-Led Partnering Session will be conducted and facilitated using electronic media (a video and accompanying forms) provided by Contracting Officer.

d. The Partners will determine the frequency of the follow-on sessions.

e. Participants will bear their own costs for meals, lodging and transportation associated with Partnering.

1.9 MOBILIZATION

Mobilize to the jobsite within 60 calendar days after contract award. Mobilize is defined as having equipment AND having a physical presence of at least one person from the contractor's team on the jobsite. All pre-construction submittals are to be complete prior to mobilization.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

SECTION 01 31 23.13 20

ELECTRONIC CONSTRUCTION AND FACILITY SUPPORT CONTRACT MANAGEMENT SYSTEM
05/17, CHG 7: 11/21

PART 1 GENERAL

1.1 CONTRACT ADMINISTRATION

Utilize the Naval Facilities Engineering Command's (NAVFAC's) Electronic Construction and Facility Support Contract Management System (eCMS) for the transfer, sharing, and management of electronic technical submittals and documents. The web-based eCMS is the designated means of transferring technical documents between the Contractor and the Government. Paper media or e-mail submission, including originals or copies, of the documents identified in Table 1 are not permitted, except where eCMS is unavailable, non-functional, or specifically requested in addition to electronic submission.

1.1.1 Format Naming Convention for Files Uploaded Into eCMS

Include the identification number of the document, the type of document, the name/subject or title, and for daily reports, the date (day of work) with format YYYY/MM/DD in the filename. For example, for RFI's, 0011_RFI_Roof_Leaking.doc; for submittals, 0032a_Submittals_Light_Fixture.pdf; for Daily Reports, 0132_Daily_Report_20190504.xls. Contact the Contracting Officer's Representative (COR) regarding availability of eCMS training and reference materials.

1.1.2 Uploading Documents Processed Outside of eCMS

When specifically requested to provide documents outside of eCMS, upload all final project documentation (e.g., documents that are signed and/or adjudicated by the Government) mentioned in Table 1 into eCMS by creating a record in the module associated with that document type and uploading the document(s). Subject/title of the record should include the type of record i.e., RFI/Submittal/Other, the identification number(s), and the statement "Processed Outside of eCMS". For example, "RFI 001-012 Processed Outside of eCMS".

1.2 USER PRIVILEGES

The Contractor will be provided access to eCMS. All technical submittals and documents must be transmitted to the Government via the COR. Project roles and system roles will be established to control each user's menu, application, and software privileges, including the ability to create, edit, or delete objects.

1.3 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

List of Contractor's Personnel

1.4 SYSTEM REQUIREMENTS AND CONNECTIVITY

1.4.1 General

The eCMS requires a web-browser (platform-neutral) and Internet connection. Obtain from an approved vendor an External Certification Authority (ECA), Primary Key Infrastructure (PKI) certificate, or other similar digital identification to support two-factor authentication and access to eCMS. Provide and maintain computer hardware and software for the eCMS access throughout the duration of the contract for all Contractor-designated users. Provide connectivity, speed, bandwidth, and access to the Internet to ensure adequate functionality. 70 mbps download speed recommended, 40 mbps minimum for loading large files. Neither upgrading of the Contractor's computer system nor delays associated from the usage of the eCMS will be justification or grounds for a time extension or cost adjustment to the Contract.

1.4.2 Contractor Personnel List

Within 20 calendar days of contract award, provide to the Contracting Officer a list of Contractor's personnel who will have the responsibility for the transfer, sharing and management of electronic technical submittals and documents and will require access to the eCMS. Project personnel roles to be filled in the eCMS include the Contractor's Project Manager, Superintendent, Quality Control (QC) Manager, and Site Safety and Health Officer (SSHO). Personnel must be capable of electronic document management. Notify the COR immediately of any personnel changes to the project. The Contracting Officer reserves the right to perform a security check on all potential users. Provide the following information:

First Name
Last Name
E-mail Address
Office Address
Project Role (e.g. Project Manager, QC Manager, Superintendent)

1.5 SECURITY CLASSIFICATION

In accordance with Department of Navy guidance, all military construction contract data are unclassified, unless specified otherwise by a properly designated Original Classification Authority (OCA) and in accordance with an established Security Classification Guide (SCG). Refer to the project's OCA when questions arise about the proper classification of information.

The eCMS and tablet computer must only be used for the transaction of unclassified information associated with construction projects. In conformance with the Freedom of Information Act (FOIA), DoD INSTRUCTION 5200.48 CONTROLLED UNCLASSIFIED INFORMATION (CUI), and DoD requirements, any unclassified project documentation uploaded into the eCMS must be designated either "U - UNCLASSIFIED" (U) or "CUI - CONTROLLED UNCLASSIFIED INFORMATION"
(CUI).

1.6 ECMS UTILIZATION

Establish, maintain, and update data and documentation in the eCMS throughout the duration of the contract.

Personally Identifiable Information (PII) transmittal is not permitted in the eCMS.

1.6.1 Information Security Classification/Identification

The eCMS must be used for the transmittal of the following documents. This requirement supersedes conflicting requirements in other sections, however, submittal review times in Section 01 33 00 SUBMITTAL PROCEDURES remain applicable. Table 1 - Project Documentation Types provides the appropriate U and CUI designations for various types of project documents. Construction documents requiring CUI status must be marked accordingly. Apply the appropriate markings before any document is uploaded into eCMS. Markings are not required on U documents.

Table 1 also identifies which eCMS application is to be used in the transmittal of data (these are subject to change based on the latest software configuration). If a designated application is not functional within 4 hours of initial attempt, defer to the Submittal application and submit the required data as an uploaded portable document (e.g. PDF), word processor, spreadsheet, drawing, or other appropriate format. Hard copy or e-mail submission of these items is acceptable only if eCMS is documented to be not available or not functional or specifically requested in addition to electronic submission. After uploading documents to the Submittal application, transmit the submittals and attachments to the COR via the Transmittal application. For Submittals, select the following:

Preparation by = Contractor personnel assigned to prepare the submittal
Approval by = Contracting Officer Representative (COR)
Returned by = Design Lead/Manager
Forwarded to = Contractor project manager

Table 1 - Project Documentation Types

SUBJECT/NAME	DESIG	REMARKS	ECMS APPLICATION
As-Built Drawings	U	Locations of sensitive areas must be labeled as either "Controlled Area" or "Restricted Area" and may be shown on unclassified documents with the approval from Site Security Manager	Submittals and Transmittals
Building Information Modeling (BIM)	U	1. Locations of sensitive areas must be labeled as either "Controlled Area" or "Restricted Area" and may be shown on unclassified documents with the approval from Site Security Manager 2. Design reviews will be performed in existing "Dr Checks"	Submittals and Transmittals
Construction Permits	U	Refer to rules of the issuing activity, state or jurisdiction	Submittals and Transmittals

SUBJECT/NAME	DESIG	REMARKS	ECMS APPLICATION
Construction Schedules (Activities and Milestones)	U	After the schedule submittal is approved by the COR, import the schedule file into the scheduling application, and select "Approve" to establish a new schedule baseline	Submittals, Transmittals and Scheduling App
Construction Schedules (Cost-Loaded)	CUI	After the schedule submittal is approved by the COR, import the schedule file into the scheduling application, and select "Approve" to establish a new schedule baseline	Submittals, Transmittals and Scheduling App
Construction Schedules (3-Week Lookahead)	U	Import the schedule file into the scheduling application, and select "Approve" to establish a new schedule baseline	Scheduling App
DD 1354 Transfer of Real Property	U		Submittals and Transmittals
Daily Production Reports	CUI	Provide weather conditions, crew size, man-hours, equipment, and materials information	Daily Report
Daily Quality Control (QC) Reports	CUI	Provide QC Phase, Definable Features of Work Identify visitors	Daily Report
Designs and Specifications	U	1. Locations of sensitive areas must be labeled as either "Controlled Area" or "Restricted Area" and may be shown on unclassified documents with the approval from Site Security Manager 2. Design reviews will be performed in existing "Dr Checks"	Submittals and Transmittals
Environmental Notice of Violation (NOV), Corrective Action Plan	U	Refer to rules of the issuing activity, state or jurisdiction	Submittals and Transmittals
Environmental Protection Plan (EPP)	CUI		Submittals and Transmittals

SUBJECT/NAME	DESIG	REMARKS	ECMS APPLICATION
Invoice (Supporting Documentation)	CUI	Applies to supporting documentation only. Invoices are submitted in Wide-Area Workflow (WAWF)	Submittals and Transmittals
Jobsite Documentation, Bulletin Board, Labor Laws, SDS	U		Submittals and Transmittals
Meeting Minutes	CUI		Meeting Minutes
Modification Documents	CUI	Provide final modification documents for the project. Upload into "Modifications - RFPs	Document Management
Operations & Maintenance Support Information (OMSI/eOMSI), Facility Data Worksheet	U	1. Locations of sensitive areas must be labeled as either "Controlled Area" or "Restricted Area" and may be shown on unclassified documents with the approval from Site Security Manager 2. Design reviews will be performed in existing "Dr Checks"	Submittals and Transmittals
Photographs	U	Subject to base/installation restrictions	Submittals and Transmittals
QCM Initial Phase Checklists	CUI		Checklists (Site Management)
QCM Preparatory Phase Checklists	CUI		Checklists (Site Management)
Quality Control Plans	CUI		Submittals and Transmittals
QC Certifications	U		Submittals and Transmittals
QC Punch List	U		Punch Lists (Testing Logs)
Red-Zone Checklist	U		Checklists (Site Management)
Rework Items List	CUI		Punch Lists (Testing Logs)

SUBJECT/NAME	DESIG	REMARKS	ECMS APPLICATION
Request for Information (RFI) Post-Award	CUI		RFIs
Safety Plan	CUI		Daily Report
Safety - Activity Hazard Analyses (AHA)	CUI		Daily Report
Safety - Mishap Reports	CUI		Daily Report
SCIF/SAPF Accreditation Support Documents	CUI	Note: Some Construction Security plans may be classified as Secret. Classified information must not be uploaded into eCMS. Refer to the Site Security Manager, as applicable.	Submittals and Transmittals
Shop Drawings	U	Locations of sensitive areas must be labeled as either "Controlled Area" or "Restricted Area" and may be shown on unclassified documents with the approval from Site Security Manager	Submittals and Transmittals
Storm Water Pollution Prevention (Notice of Intent - Notice of Termination)	U	Refer to rules of the issuing activity, state or jurisdiction	Submittals and Transmittals
Submittals and Submittal Log	U		Submittals and Transmittals
Testing Plans, Logs, and Reports	CUI		Submittals and Transmittals
Training/Reference Materials	U		Submittals and Transmittals
Training Records (Personnel)	CUI		Submittals and Transmittals
Utility Outage/Tie-In Request/Approval	CUI		Submittals and Transmittals
Warranties/BOD Letter	CUI		Submittals and Transmittals

SUBJECT/NAME	DESIG	REMARKS	ECMS APPLICATION
Quality Assurance Reports	CUI		Checklists (Government initiated)
Non-Compliance Notices	CUI		Non-Compliance Notices (Government initiated)
Other Government-prepared documents	CUI		GOV ONLY
All Othere Documents	CUI	Refer to FOIA guidelines and contact the FOIA official to determine whether exemptions exist	As applicable

1.6.2 Markings on CUI documents

a. Only CUI documents being electronically uploaded into the eCMS (.docx, .xlsx, .ppt and others as appropriate), and associated paper documents described in the paragraph CONTRACT ADMINISTRATION require CUI markings as indicated in the subparagraphs below.

b. CUI documents that are originally created within the eCMS application using the web-based forms (RFIs, Daily Reports, and others as appropriate) will be automatically watermarked by the eCMS software, and these do not require additional markings.

c. CUI documents must be marked "CONTROLLED UNCLASSIFIED INFORMATION" at the bottom of the outside of the front cover (if there is one), the title page, the first page, and the outside of the back cover (if there is one).

d. CUI documents must be marked on the internal pages of the document as "CONTROLLED UNCLASSIFIED INFORMATION" at top and bottom.

e. Where Installations require digital photographs to be designated CUI, place the markings on the face of the photograph.

f. For visual documentation, other than photographs and audio documentation, mark with either visual or audio statements as appropriate at both the beginning and end of the file.

1.7 QUALITY ASSURANCE

Requested Government response dates on Transmittals and Submittals must be in accordance with the terms and conditions of the Contract. Requesting response dates earlier than the required review and response time, without concurrence by the Government COR, may be cause for rejection.

Incomplete submittals will be rejected without further review and must be resubmitted. Required Government response dates for resubmittals must reflect the date of resubmittal, not the original submittal date.

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

-- End of Section --

SECTION 01 31 50

TRANSFER AND ACCEPTANCE OF MILITARY REAL PROPERTY

04/22

PART 1 GENERAL

1.1 SUBMITTALS

The following shall be submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-11 Closeout Submittals

Interim DD-1354, Transfer & Acceptance of Military Real Property

1.2 Interim DD-1354, Transfer & Acceptance of Military Real Property

Submit Interim DD-1354 thirty (30) days prior to beneficial occupancy date (draft copy attached).

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 32 16.00 20

SMALL PROJECT CONSTRUCTION PROGRESS SCHEDULES
08/18, CHG 1: 08/20

PART 1 GENERAL

1.1 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Baseline Construction Schedule; G

SD-07 Certificates

Monthly Updates

1.2 PRE-CONSTRUCTION SCHEDULE REQUIREMENT

Within 30 calendar days after contract award prior to the start of work, prepare and submit to the Contracting Officer a Baseline Construction Schedule in accordance with the terms in Contract Clause FAR 52.236-15 Schedules for Construction Contracts, except as modified in this contract. The approval of a Baseline Construction Schedule is a condition precedent to:

a. The Contractor starting demolition work or construction stage(s) of the contract.

b. Processing Contractor's invoice(s) for construction activities/items of work.

c. Review of any schedule updates.

Submittal of the Baseline Construction Schedule, and subsequent schedule updates, is understood to be the Contractor's certification that the submitted schedule meets the requirements of the Contract Documents, represents the Contractor's plan on how the work will be accomplished, and accurately reflects the work that has been accomplished and how it was sequenced (as-built logic).

1.3 SCHEDULE FORMAT

1.3.1 Schedule Submittals and Procedures

Submit Schedules and updates in hard copy and on electronic media that is acceptable to the Contracting Officer. Submit an electronic back-up of the project schedule in an import format compatible with the Government's scheduling program (Primavera P6).

1.4 SCHEDULE MONTHLY UPDATES

Update the Construction Schedule at monthly intervals or when the schedule has been revised. Keep the updated schedule current, reflecting actual activity progress and plan for completing the remaining work. Submit

copies of purchase orders and confirmation of delivery dates as directed by the Contracting Officer.

a. Narrative Report: Identify and justify the following:

(1) Progress made in each area of the project;

(2) Longest Path: Include printed copy on 11 by 17 inch paper, landscape setting;

(3) Date/time constraint(s), other than those required by the contract;

(4) Listing of changes made between the previous schedule and current updated schedule including: added or removed activities, original and remaining durations for activities that have not started, logic (sequence, constraint, lag/lead), milestones, planned sequence of operations, longest path, calendars or calendar assignments, and cost loading.

(5) Any decrease in previously reported activity Earned Amount;

(6) Pending items and status thereof, including permits, changes orders, and time extensions;

(7) Status of Contract Completion Date and interim milestones;

(8) Current and anticipated delays (describe cause of delay and corrective actions(s) and mitigation measures to minimize);

(9) Description of current and future schedule problem areas.

For each entry in the narrative report, cite the respective Activity ID and Activity Name, the date and reason for the change, and description of the change.

1.5 3-WEEK LOOK AHEAD SCHEDULE

Prepare and issue a 3-Week Look Ahead schedule to provide a more detailed day-to-day plan of upcoming work identified on the Construction Schedule. Key the work plans to activity numbers when a NAS is required and update each week to show the planned work for the current and following two-week period. Additionally, include upcoming outages, closures, preparatory meetings, and initial meetings. Identify critical path activities on the Three-Week Look Ahead Schedule. The detail work plans are to be bar chart type schedules, maintained separately from the Construction Schedule on an electronic spreadsheet program and printed on 8-1/2 by 11 inch sheets as directed by the Contracting Officer. Activities must not exceed 5 working days in duration and have sufficient level of detail to assign crews, tools and equipment required to complete the work. Deliver three hard copies and one electronic file of the 3-Week Look Ahead Schedule to the Contracting Officer no later than 8 a.m. each Monday, and review during the weekly CQC Coordination or Production Meeting.

1.6 CORRESPONDENCE AND TEST REPORTS:

Correspondence (e.g., letters, Requests for Information (RFIs), e-mails, meeting minute items, Production and QC Daily Reports, material delivery tickets, photographs) must reference Schedule Activities that are being addressed. Test reports (e.g., concrete, soil compaction, weld, pressure)

must reference Schedule Activities that are being addressed.

1.7 ADDITIONAL SCHEDULING REQUIREMENTS

Any references to additional scheduling requirements, including systems to be inspected, tested and commissioned, that are located throughout the remainder of the Contract Documents, are subject to all requirements of this section.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 00

SUBMITTAL PROCEDURES

04/22

PART 1 GENERAL

1.1 SUMMARY

1.1.1 Government-Furnished Information

Submittal register will be delivered to the contractor in hard copy format. Register will have the following fields completed, to the extent that will be required by the Government during subsequent usage.

Column (c): Lists specification section in which submittal is required.

Column (d): Lists each submittal description (SD No. and type, e.g. SD-04 Drawings) required in each specification section.

Column (e): Lists one principal paragraph in specification section where a material or product is specified. This listing is only to facilitate locating submitted requirements. Do not consider entries in column (e) as limiting project requirements.

Column (f): Indicate approving authority for each submittal. The Contracting Officer is approving authority for all submittals.

1.2 DEFINITIONS

1.2.1 Submittal

Shop drawings, product data, samples, and administrative submittals presented for review and approval. Contract Clauses "FAR 52.236-5, Material and Workmanship," paragraph (b) and "FAR 52.236-21, Specifications and Drawings for Construction," paragraphs (d), (e), and (f) apply to all "submittals."

1.2.2 Types of Submittals

All submittals are classified as indicated in paragraph "Submittal Descriptions (SD)". Submittals also are grouped as follows:

a. Shop drawings: As used in this section, drawings, schedules, diagrams, and other data prepared specifically for this contract, by contractor or through contractor by way of subcontractor, manufacturer, supplier, distributor, or other lower tier contractor, to illustrate portion of work.

b. Product data: Preprinted material such as illustrations, standard schedules, performance charts, instructions, brochures, diagrams, manufacturer's descriptive literature, catalog data, and other data to illustrate portion of work, but not prepared exclusively

for this contract.

c. Samples: Physical examples of products, materials, equipment, assemblies, or workmanship that are physically identical to portion of work, illustrating portion of work or establishing standards for evaluating appearance of finished work or both.

d. Administrative submittals: Data presented for reviews and approval to ensure that administrative requirements of project are adequately met but not to ensure directly that work is in accordance with design concept and in compliance with contract documents.

1.2.3 Submittal Descriptions (SD)

SD-01 Preconstruction Submittals

Submittals that are required prior to or commencing with the start of work on site.

Preconstruction Submittals include schedules and a tabular list of locations, features, and other pertinent information regarding products, materials, equipment, or components to be used in the work.

Certificates Of Insurance

Surety Bonds

List Of Proposed Subcontractors

List Of Proposed Products

Baseline Network Analysis Schedule (NAS)

Submittal Register

Schedule Of Prices Or Earned Value Report

Accident Prevention Plan

Work Plan

Quality Control (QC) plan

Environmental Protection Plan

SD-02 Shop Drawings

Drawings, diagrams and schedules specifically prepared to illustrate some portion of the work.

Diagrams and instructions from a manufacturer or fabricator for use in producing the product and as aids to the contractor for integrating the product or system into the project.

Drawings prepared by or for the contractor to show how multiple systems and interdisciplinary work will be coordinated.

SD-03 Product Data

Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions and brochures illustrating size, physical appearance and other characteristics of materials or equipment for some portion of the work.

Samples of warranty language when the contract requires extended product warranties.

SD-04 Samples

Physical examples of materials, equipment or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged.

Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project.

Field samples and mock-ups constructed on the project site establish standards by which the ensuring work can be judged. Includes assemblies or portions of assemblies which are to be incorporated into the project and those which will be removed at conclusion of the work.

SD-05 Design Data

Calculations, mix designs, analyses or other data pertaining to a part of work.

SD-06 Test Reports

Report signed by authorized official of testing laboratory that a material, product or system identical to the material, product or system to be provided has been tested in accord with specified requirements. Unless specified in another section, testing must have been within three years of date of contract award for the project.

Report that includes findings of a test required to be performed on an actual portion of the work or prototype prepared for the project before shipment to job site.

Report that includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

Investigation reports

Daily logs and checklists

Final acceptance test and operational test procedure

SD-07 Certificates

Statements signed by responsible officials of manufacturer of product, system or material attesting that product, system or material meets specification requirements. Must be dated after award of project contract and clearly name the project.

Document required of Contractor, or of a supplier, installer or

subcontractor through Contractor, the purpose of which is to further quality of orderly progression of a portion of the work by documenting procedures, acceptability of methods or personnel qualifications.

Confined space entry permits.

Text of posted operating instructions

SD-08 Manufacturer's Instructions

Preprinted material describing installation of a product, system or material, including special notices and (SDS)concerning impedances, hazards and safety precautions.

SD-09 Manufacturer's Field Reports

Documentation of the testing and verification actions taken by manufacturer's representative at the job site, in the vicinity of the job site, or on a sample taken from the job site, on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must be signed by an authorized official of a testing laboratory or agency and state the test results; and indicate whether the material, product, or system has passed or failed the test.

Factory test reports.

SD-10 Operation and Maintenance Data

Data provided by the manufacturer, or the system provider, including manufacturer's help and product line documentation, necessary to maintain and install equipment, for operating and maintenance use by facility personnel.

Data required by operating and maintenance personnel for the safe and efficient operation, maintenance and repair of the item.

Data incorporated in an operations and maintenance manual or control system.

SD-11 Closeout Submittals

Documentation to record compliance with technical or administrative requirements or to establish an administrative mechanism.

Submittals required for Guiding Principle Validation (GPV) or Third Party Certification (TPC).

Special requirements necessary to properly close out a construction contract. For example, Record Drawings, as-built drawings and training plan. Also, submittal requirements necessary to properly close out a major phase of construction on a multi-phase contract.

1.2.4 Approving Authority

Office or designated person authorized to approve the submittal.

1.2.5 Work

As used in this section, on-site and off-site construction required by contract documents, including labor necessary to produce submittals, construction, materials, products, equipment, and systems incorporated or to be incorporated in such construction. In exception, excludes work to produce SD-01 submittals.

1.3 SUBMITTALS

Submit the following in accordance with the requirements of this section.

SD-11 Closeout Submittals

Submittal register

Complete Submittal Package 2 CD/DVD's

1.4 USE OF SUBMITTAL REGISTER

Prepare and maintain submittal register, as the work progresses. Use the hard copy submittal register furnished by the Government or other approved format. Do not change data which is output in columns (c), (d), (e), and (f) as delivered by government; retain data which is output in columns (a), (g), (h), and (i) as approved.

1.4.1 Submittal Register

Submit submittal register as a hard copy. Submit with quality control plan and project schedule required by Section 01 45 00 QUALITY CONTROL. Do not change data in columns (c), (d), (e), and (f) as delivered by the government. Verify that all submittals required for project are listed and add missing submittals. Complete the following on the register:

Column (a) Activity Number: Activity number from the project schedule.

Column (g) Contractor Submit Date: Scheduled date for approving authority to receive submittals.

Column (h) Contractor Approval Date: Date contractor needs approval of submittal.

Column (i) Contractor Material: Date that contractor needs material delivered to contractor control.

1.4.2 Contractor Use of Submittal Register

Update the following fields in the government-furnished submittal register.

Column (b) Transmittal Number: Contractor assigned list of consecutive numbers.

Column (j) Action Code (k): Date of action used to record contractor's review when forwarding submittals to QC.

Column (l) List date of submittal transmission.

Column (q) List date approval received.

1.4.3 Approving Authority Use of Submittal Register

Update the following fields in the government-furnished submittal register.

Column (b).

Column (l) List date of submittal receipt.

Column (m) through (p).

Column (q) List date returned to contractor.

1.4.4 Contractor Action Code and Action Code

Entries used will be as follows (others may be prescribed by Transmittal Form):

NR - Not Received

AN - Approved as noted

A - Approved

RR - Disapproved, Revise, and Resubmit

1.4.5 Copies Delivered to the Government

Deliver one copy of submitted register updated by contractor to government with each invoice request.

1.4.6 Submittals reserved for Marine Corps North Carolina IPT approval

a. Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEM: All submittals. Provide an information copy of all submittals to Base Telephone through the Contracting Officer. Base Telephone will coordinate their review and approval through the Marine Corps North Carolina IPT.

b. Section 33 82 00 TELECOMMUNICATIONS OUTSIDE PLANT (OSP): All submittals. Provide an information copy of all submittals to Base Telephone through the Contracting Officer. Base Telephone will coordinate their review and approval through the Marine Corps North Carolina IPT.

1.5 PROCEDURES FOR SUBMITTALS

1.5.1 Reviewing, Certifying, Approving Authority

QC organization shall be responsible for reviewing and certifying that submittals are in compliance with contract requirements. The Contracting Officer is the approving authority for all submittals.

1.5.2 Constraints

a. Submittals listed or specified in this contract shall conform to provisions of this section, unless explicitly stated otherwise.

b. Submittals shall be complete for each definable feature of work; components of definable feature interrelated as a system shall be

submitted at same time.

c. When acceptability of a submittal is dependent on conditions, items, or materials included in separate subsequent submittals, submittal will be returned without review.

d. Approval of a separate material, product, or component does not imply approval of assembly in which item functions.

1.5.3 Scheduling

a. Coordinate scheduling, sequencing, preparing and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow for potential requirements to resubmit.

b. Except as specified otherwise, allow review period, beginning with receipt by approving authority, that includes at least 15 working days for submittals for QC manager approval and 20 working days for submittals for contracting officer approval. Period of review for submittals with contracting officer approval begins when Government receives submittal from QC organization. Period of review for each resubmittal is the same as for initial submittal.

c. For submittals requiring review by fire protection engineer, allow review period, beginning when government receives submittal from QC organization, of 45 working days for return of submittal to the contractor. Period of review for each resubmittal is the same as for initial submittal.

1.5.4 Variations

Variations from contract requirements require Government approval pursuant to contract Clause entitled "FAR 52.236-21, Specifications and Drawings for Construction" and will be considered where advantageous to government.

1.5.4.1 Considering Variations

Discussion with contracting officer prior to submission, will help ensure functional and quality requirements are met and minimize rejections and resubmittals. When contemplating a variation which results in lower cost, consider submission of the variation as a Value Engineering Change Proposal (VECP).

1.5.4.2 Proposing Variations

When proposing variation, deliver written request to the contracting officer, with documentation of the nature and features of the variation and why the variation is desirable and beneficial to government. If lower cost is a benefit, also include an estimate of the cost saving. In addition to documentation required for variation, include the submittals required for the item. Clearly mark the proposed variation in all documentation.

1.5.4.3 Warranting That Variation Are Compatible

When delivering a variation for approval, contractor warrants that this contract has been reviewed to establish that the variation, if

incorporated, will be compatible with other elements of work.

1.5.4.4 Review Schedule Is Modified

In addition to normal submittal review period, a period of 10 working days will be allowed for consideration by the Government of submittals with variations.

1.5.5 Contractor's Responsibilities

a. Determine and verify field measurements, materials, field construction criteria; review each submittal; and check and coordinate each submittal with requirements of the work and contract documents.

b. Transmit submittals to QC organization in accordance with schedule on approved Submittal Register, and to prevent delays in the work, delays to government, or delays to separate contractors.

c. Advise contracting officer of variation, as required by paragraph entitled "Variations."

d. Correct and resubmit submittal as directed by approving authority. When resubmitting disapproved transmittals or transmittals noted for resubmittal, the contractor shall provide copy of that previously submitted transmittal including all reviewer comments for use by approving authority. Direct specific attention in writing or on resubmitted submittal, to revisions not requested by approving authority on previous submissions.

e. Furnish additional copies of submittal when requested by contracting officer, to a limit of 20 copies per submittal.

f. Complete work which must be accomplished as basis of a submittal in time to allow submittal to occur as scheduled.

g. Ensure no work has begun until submittals for that work have been returned as "approved," or "approved as noted", except to the extent that a portion of work must be accomplished as basis of submittal.

1.5.6 QC Organization Responsibilities

a. Note date on which submittal was received from contractor on each submittal.

b. Review each submittal; and check and coordinate each submittal with requirements of work and contract documents.

c. Review submittals for conformance with project design concepts and compliance with contract documents.

d. Act on submittals, determining appropriate action based on QC organization's review of submittal.

(1) When QC manager is approving authority, take appropriate action on submittal from the possible actions defined in paragraph entitled, "Actions Possible."

(2) When contracting officer is approving authority or when variation has been proposed, forward submittal to Government with certifying statement or return submittal marked "not reviewed" or "revise and resubmit" as appropriate. The QC organization's review of submittal determines appropriate action.

e. Ensure that material is clearly legible.

f. Stamp each sheet of each submittal with QC certifying statement or approving statement, except that data submitted in bound volume or on one sheet printed on two sides may be stamped on the front of the first sheet only.

(1) When approving authority is contracting officer, QC organization will certify submittals forwarded to contracting officer with the following certifying statement:

"I hereby certify that the (equipment) (material) (article) shown and marked in this submittal is that proposed to be incorporated with contract Number N40085- -B- , is in compliance with the contract drawings and specification, can be installed in the allocated spaces, and is submitted for Government approval.

Certified by Submittal Reviewer _____, Date _____
(Signature when applicable)

Certified by QC manager _____, Date _____"
(Signature)

g. Sign certifying statement or approval statement. The person signing certifying statements shall be QC organization member designated in the approved QC plan. The signatures shall be in original ink. Stamped signatures are not acceptable.

h. Update submittal register as submittal actions occur and maintain the submittal register at project site until final acceptance of all work by contracting officer.

i. Retain a copy of approved submittals at project site, including contractor's copy of approved samples.

1.5.7 Government's Responsibilities

When approving authority is contracting Officer, the Government will:

a. Note date on which submittal was received from QC manager, on each submittal for which the contracting officer is approving authority.

b. Review submittals for approval within scheduling period specified and only for conformance with project design concepts and compliance with contract documents.

c. Identify returned submittals with one of the actions defined in paragraph entitled "Actions Possible" and with markings appropriate for action indicated.

1.5.8 Actions Possible

Submittals will be returned with one of the following notations:

a. Submittals marked "not reviewed" will indicate submittal has been previously reviewed and approved, is not required , does not have evidence of being reviewed and approved by contractor, or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals returned for lack of review by contractor or for being incomplete, with appropriate action, coordination, or change.

b. Submittals marked "approved" "approved as submitted" authorize contractor to proceed with work covered.

c. Submittals marked "approved as noted" authorize contractor to proceed with work as noted provided contractor takes no exception to the notations.

d. Submittals marked "revise and resubmit" or "disapproved" indicate submittal is incomplete or does not comply with design concept or requirements of the contract documents and shall be resubmitted with appropriate changes. No work shall proceed for this item until resubmittal is approved.

1.6 FORMAT OF SUBMITTALS

1.6.1 Complete Submittal Package

Contractor shall make electronic copies of all submittals, including the approved transmittal sheets, and provide two (2) CD/DVD's containing all submittals for the project.

The CD/DVD's shall be marked "Complete Submittal Package - Contract # _____"

1.6.2 Transmittal Form

Transmit each submittal, except sample installations and sample panels, to office of approving authority. Transmit submittals with transmittal form prescribed by contracting officer and standard for project. The transmittal form shall identify contractor, indicate date of submittal, and include information prescribed by transmittal form and required in paragraph entitled "Identifying Submittals." Process transmittal forms to record actions regarding sample panels and sample installations.

1.6.3 Identifying Submittals

Identify submittals, except sample panel and sample installation, with the following information permanently adhered to or noted on each separate component of each submittal and noted on transmittal form. Mark each copy of each submittal identically, with the following:

a. Project title and location.

b. Construction contract number.

c. Section number of the specification section by which submittal is required.

d. Submittal description (SD) number of each component of submittal.

e. When a resubmission, alphabetic suffix on submittal description, for example, SD-10A, to indicate resubmission.

f. Name, address, and telephone number of subcontractor, supplier, manufacturer and any other second tier contractor associated with submittal.

g. Product identification and location in project.

1.6.4 Format for Product Data

a. Present product data submittals for each section as a complete, bound volume. Include table of contents, listing page and catalog item numbers for product data.

b. Indicate, by prominent notation, each product which is being submitted; indicate specification section number and paragraph number to which it pertains.

c. Supplement product data with material prepared for project to satisfy submittal requirements for which product data does not exist. Identify this material as developed specifically for project.

1.6.5 Format for Shop Drawings

a. Shop drawings shall not be less than 8 1/2 by 11 inches nor more than 30 by 42 inches.

b. Present 8 1/2 by 11 inches sized shop drawings as part of the bound volume for submittals required by section. Present larger drawings in sets.

c. Include on each drawing the drawing title, number, date, and revision numbers and dates, in addition to information required in paragraph entitled "Identifying Submittals."

d. Dimension drawings, except diagrams and schematic drawings; prepare drawings demonstrating interface with other trades to scale. Shop drawing dimensions shall be the same unit of measure as indicated on the contract drawings. Identify materials and products for work shown.

1.6.6 Format of Samples

a. Furnish samples in sizes below, unless otherwise specified or unless the manufacturer has prepackaged samples of approximately same size as specified:

(1) Sample of Equipment or Device: Full size.

(2) Sample of Materials Less Than 2 by 3 inches: Built up to 8 1/2 by 11 inches.

(3) Sample of Materials Exceeding 8 1/2 by 11 inches: Cut down to 8 1/2 by 11 inches and adequate to indicate color, texture, and material variations.

(4) Sample of Linear Devices or Materials: 10 inch length or

length to be supplied, if less than 10 inches. Examples of linear devices or materials are conduit and handrails.

(5) Sample of Non-Solid Materials: Pint. Examples of non-solid materials are sand and paint.

(6) Color Selection Samples: 2 by 4 inches.

(7) Sample Panel: 4 by 4 feet.

(8) Sample Installation: 100 square feet.

b. Samples Showing Range of Variation: Where variations are unavoidable due to nature of the materials, submit sets of samples of not less than three units showing extremes and middle of range.

c. Reusable Samples: Incorporate returned samples into work only if so specified or indicated. Incorporated samples shall be in undamaged condition at time of use.

d. Recording of Sample Installation: Note and preserve the notation of area constituting sample installation but remove notation at final clean up of project.

e. When color, texture or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.

1.6.7 Format of Administrative Submittals

a. When submittal includes a document which is to be used in project or become part of project record, other than as a submittal, do not apply contractor's approval stamp to document, but to a separate sheet accompanying document.

b. Operation and Maintenance Manual Data: Submit in accordance with Section 01 78 23, "Operation and Maintenance Data." Include components required in that section and the various technical sections.

1.7 QUANTITY OF SUBMITTALS

1.7.1 Number of Copies of Product Data

a. Submit five copies of submittals of product data requiring review and approval only by the Contracting Officer. Submit three copies of submittals of product data for operation and maintenance manuals.

1.7.2 Number of Copies of Shop Drawings

Submit shop drawings in compliance with quantity requirements specified for product data.

1.7.3 Number of Samples

a. Submit two samples, or two sets of samples showing range of variation, of each required item. One approved sample or set of samples will be retained by approving authority and one will be returned to contractor.

b. Submit one sample panel. Include components listed in technical section or as directed.

c. Submit one sample installation, where directed.

d. Submit one sample of non-solid materials.

1.7.4 Number of Copies of Administrative Submittals

a. Unless otherwise specified, submit administrative submittals compliance with quantity requirements specified for product data.

b. Submit administrative submittals required under "SD-19 Operation and Maintenance Manuals" to conform to Section 01 78 23, "Operation and Maintenance Data."

1.8 FORWARDING SUBMITTALS

1.8.1 Samples and Submittals

Except as otherwise noted, submit samples and submittals to:
ROICC/OICC
Jacksonville, North Carolina Area
1005 Michael Road
Camp Lejeune, NC 28542-2521

--FOR:--
Samples required for Mechanical, Plumbing, Electrical or Telecomm:
Send to:
Crenshaw Conlsulting Engineers, 3516 Bush St, Raleigh, NC 27609;

Samples required for Interior Design:
Send to:
Within Interior Design, 1008 Granby St, Norfolk, VA 23510;

Samples required for Architectural
Send to:
MBF Architects PA, New Bern, NC 28560;

except samples requiring **any exterior color selection**, send to:
ROICC at the Camp Lejeune address noted above.

1.8.1.1 Administrative Submittals

Submit administrative submittals for asbestos/lead removal and environmental protection plan to the Resident Officer in Charge of Construction (ROICC/OICC).

1.8.1.2 Fire Protection and Fire Alarm System Submittals

Submit fire protection and fire alarm system submittals to ROICC/OICC.

1.8.1.3 TAB Submittals

Submit to ROICC/OICC for all projects.

1.8.2 Shop Drawings, Product Data, and O&M Data

As soon as practicable after award of the contract, and before procurement or fabrication, submit shop drawings, product data and O&M Data required in the technical sections of this specification.

1.9 APPROVED SUBMITTALS

The Contracting Officer's approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.

Approval or acceptance by the Government for a submittal does not relieve the Contractor of the responsibility for meeting the contract requirements or for any error that may exist, because under the Quality Control (QC) requirements of this contract, the Contractor is responsible for ensuring information contained with in each submittal accurately conforms with the requirements of the contract documents.

After submittals have been approved or accepted by the Contracting Officer, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

1.10 APPROVED SAMPLES

Approval of a sample is only for the characteristics or use named in such approval and is not be construed to change or modify any contract requirements. Before submitting samples, provide assurance that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.

Match the approved samples for materials and equipment incorporated in the work. If requested, approved samples, including those that may be damaged in testing, will be returned to the Contractor, at its expense, upon completion of the contract. Unapproved samples will also be returned to the Contractor at its expense, if so requested.

Failure of any materials to pass the specified tests will be sufficient cause for refusal to consider, under this contract, any further samples of the same brand or make as that material. The Government reserves the right to disapprove any material or equipment that has previously proved unsatisfactory in service.

Samples of various materials or equipment delivered on the site or in place may be taken by the Contracting Officer for testing. Samples failing to meet contract requirements will automatically void previous approvals. Replace such materials or equipment to meet contract requirements.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 14 00	SD-01 Preconstruction Submittals															
			List of Contact Personnel	1.3.1.1														
		01 20 00	SD-01 Preconstruction Submittals															
			Schedule of Prices	1.3	G													
		01 30 00	SD-01 Preconstruction Submittals															
			View Location Map	1.2														
			Progress and Completion	1.3														
			Pictures															
		01 31 23.13 20	SD-01 Preconstruction Submittals															
			List of Contractor's Personnel	1.4.2														
		01 31 50	SD-11 Closeout Submittals															
			Interim DD-1354, Transfer &	1.2														
			Acceptance of Military Real															
			Property															
		01 32 16.00 20	SD-01 Preconstruction Submittals															
			Baseline Construction Schedule	1.2	G													
			SD-07 Certificates															
			Monthly Updates	1.4														
		01 33 00	SD-11 Closeout Submittals															
			Submittal register	1.4.1														
			Complete Submittal Package	1.6.1														
		01 33 29	SD-01 Preconstruction Submittals															
			Sustainability Action Plan	1.4.1	G													
			Preliminary Sustainability	1.5.2.2	G													
			eNotebook															
			SD-11 Closeout Submittals															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION		DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION		DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 33 29	Final Sustainability eNotebook	1.5.2.2	G													
			Amended Final Sustainability	1.5.2.2	G													
			eNotebook															
		01 35 26	SD-01 Preconstruction Submittals															
			APP - Construction	1.8.1	G													
			Dive Operations Plan	1.17	G													
			Accident Prevention Plan (APP)	1.8	G													
			SD-06 Test Reports															
			Monthly Exposure Reports	1.4														
			Notifications and Reports	1.13														
			Accident Reports	1.13.2	G													
			LHE Inspection Reports	1.13.3														
			SD-07 Certificates															
			Contractor Safety Self-Evaluation	1.5														
			Checklist															
			Crane Operators/Riggers	1.7.1.5														
			Standard Lift Plan	1.8.3.2	G													
			Critical Lift Plan	1.8.3.3	G													
			Naval Architecture Analysis	1.8.3.4	G													
			Activity Hazard Analysis (AHA)	1.9														
			Confined Space Entry Permit	1.10.1														
			Hot Work Permit	1.10.1														
			Certificate of Compliance	1.13.4														
			Third Party Certification of	1.13.5														
			Floating Cranes and															
			Barge-Mounted Mobile Cranes															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 35 26	License Certificates	1.15														
			Radiography Operation Planning	1.15.1	G													
			Work Sheet															
			Portable Gauge Operations	1.15.1	G													
			Planning Worksheet															
		01 45 00	SD-01 Preconstruction Submittals															
			Contractor Quality Control (CQC)	1.5.2	G													
			Plan															
			SD-06 Test Reports															
			Verification Statement	1.12.3														
		01 50 00	SD-01 Preconstruction Submittals															
			Traffic Control Plan	3.4.1														
			SD-03 Product Data															
			Backflow Preventers	1.3														
			SD-06 Test Reports															
			Backflow Preventer Tests	3.5														
			SD-07 Certificates															
			Backflow Tester	1.3.1														
			Backflow Preventers	1.3														
		01 57 19	SD-01 Preconstruction Submittals															
			Environmental Protection Plan	1.7.1														
			SD-06 Test Reports															
			Abrasive blasting	3.7.1														
			SD-11 Closeout Submittals															
			Solid waste disposal permit	1.4.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 57 19	Disposal permit for hazardous	1.4.2														
			waste															
			Environmental training	1.2														
			documentation															
			Permit to transport hazardous	1.4.3														
			waste															
			Hazardous waste certification	1.4.4														
			Environmental Plan Review	1.7.3														
			Annual Report of Products	2.1														
			Containing Recovered Materials															
		01 74 19	SD-01 Preconstruction Submittals															
			Construction Waste Management	1.7	G													
			Plan															
			SD-11 Closeout Submittals															
			Final Construction Waste	1.9	S													
			Diversion Report															
		01 78 00	SD-03 Product Data															
			Warranty Management Plan	1.6.1														
			Warranty Tags	1.6.4														
			Final Cleaning	3.4														
			Spare Parts Data	1.5														
			SD-08 Manufacturer's Instructions															
			Instructions	1.6.1														
			SD-10 Operation and Maintenance															
			Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 78 00	Operation and Maintenance	3.3														
			Manuals															
			SD-11 Closeout Submittals															
			As-Built Drawings	3.1														
			Record Drawings	3.2														
			As-Built Record of Equipment	1.6.1														
			and Materials															
			Final Approved Shop Drawings	3.6														
			Construction Contract	3.1														
			Specifications															
			Certification of EPA Designated	2.1														
			Items															
			Certification Of USDA Designated	2.2														
			Items															
			Interim DD FORM 1354	3.5														
			Checklist for DD FORM 1354	3.5														
			High Performance and	3.5														
			Sustainable Building (HPSB)															
			Checklist															
		01 78 23	SD-10 Operation and Maintenance															
			Data															
			O&M Database	1.4														
			Training Plan	3.1.1														
			Training Outline	3.1.3														
			Training Content	3.1.2														
			SD-11 Closeout Submittals															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 78 23	Training Video Recording	3.1.4														
			Validation of Training Completion	3.1.6														
		01 78 24.00 20	SD-11 Closeout Submittals															
			eOMSI, Progress Submittal	1.4.1	G													
			eOMSI, Prefinal Submittal	1.4.2	G													
			eOMSI, Final Submittal	1.4.3	G													
		01 78 30.00 22	SD-11 Closeout Submittals															
			GIS Data Deliverables	1.3.9														
		02 41 00	SD-01 Preconstruction Submittals															
			Demolition Plan	1.2.2	G													
			Existing Conditions	1.9														
			SD-07 Certificates															
			Notification	1.6	G													
			SD-11 Closeout Submittals															
			Receipts	3.3.3														
		02 41 01	SD-01 Preconstruction Submittals															
			Deconstruction Plan	1.2.2	G													
			Existing Conditions	1.8														
			SD-07 Certificates															
			Notification	1.6	G													
			SD-11 Closeout Submittals															
			Receipts	3.2.4														
		03 30 00	SD-01 Preconstruction Submittals															
			Quality Control Program	1.6.4	G													
			Quality Control Personnel	1.6.5	G													
			Certifications															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		03 30 00	Quality Control Organizational	1.6.5														
			Chart															
			Laboratory Accreditation	1.6.7	G													
			SD-02 Shop Drawings															
			Reinforcing Steel	1.6.2.1	G													
			SD-03 Product Data															
			Joint Sealants	2.4.4	S													
			Joint Filler	2.4.3	S													
			Formwork Materials	2.1														
			Recycled Aggregate Materials	2.3.3.2	S													
			Cementitious Materials	2.3.1	S													
			Vapor Retarder	2.4.5														
			Concrete Curing Materials	2.4.1														
			Reinforcement	2.6	S													
			Admixtures	2.3.4														
			Mechanical Reinforcing Bar	2.6.2														
			Connectors															
			Biodegradable Form Release	2.2.2														
			Agent															
			Nonshrink Grout	2.4.2														
			SD-05 Design Data															
			Construction and Movement	2.2.4	G													
			Joints Locations and Details															
			Concrete Mix Design	1.6.1.1	G													
			SD-06 Test Reports															
			Concrete Mix Design	1.6.1.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		03 30 00	Fly Ash	1.6.3.1	G													
			Pozzolan	1.6.3.1	G													
			Slag Cement	1.6.3.2	G													
			Aggregates	1.6.3.3	G													
			Portland Cement	2.3.1.1	G													
			Tolerance Report	3.8.2.1														
			Compressive Strength Tests	3.11.3.3	G													
			Unit Weight of Structural	3.11.3.5														
			Concrete															
			Air Content	3.11.3.4														
			Slump Tests	3.11.3.1														
			Water	2.3.2														
			SD-07 Certificates															
			Reinforcing Bars	2.6.1														
			Welder Qualifications	1.8														
			Field Testing Technician and	1.6.5.2														
			Testing Agency															
			SD-08 Manufacturer's Instructions															
			Joint Sealants	2.4.4	S													
			Curing Compound	2.4.1														
		03 30 53	SD-03 Product Data															
			Air-Entraining Admixture	2.2.3.1														
			Water-Reducing or Retarding	2.2.3.2														
			Admixture															
			Curing Materials	2.2.10														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		03 30 53	Expansion Joint Filler Strips,	2.2.6														
			Premolded															
			Conveying and Placing Concrete	3.2														
			Formwork	2.2.7														
			Mix Design Data	2.3	G													
			Ready-Mix Concrete	2.3														
			Mechanical Reinforcing Bar	2.2.5														
			Connectors															
			SD-06 Test Reports															
			Aggregates	2.2.2														
			Concrete Mixture Proportions	2.1.3	G													
			Compressive Strength Testing	3.8.3	G													
			Slump	3.8.3	G													
			Air Content	3.8.3														
			Water	2.2.4														
			SD-07 Certificates															
			Cementitious Materials	2.2.1														
			Pozzolan	2.2.1.2														
			Aggregates	2.2.2														
			Delivery Tickets	2.3														
		04 20 01	SD-03 Product Data															
			Hot Weather Procedures	1.5.1	G													
			Cold Weather Procedures	1.5.2	G													
			Clay or Shale Brick	2.2.2	G													
			Cementitious Materials	2.4.1.1	G													
			SD-04 Samples															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		04 20 01	Mock-Up Panel	1.3.1.1	G													
			Clay or Shale Brick	2.2.2	G													
			Concrete Masonry Units (CMU)	2.2.3.2	G													
			Admixtures for Masonry Mortar	2.4.1.4	G													
			Anchors, Ties, and Bar	2.6.2	G													
			Positioners															
			Joint Reinforcement	2.6.3	G													
			SD-05 Design Data															
			Fire-Rated Concrete Masonry	2.2.3.3														
			Units															
			SD-06 Test Reports															
			Efflorescence Test	2.2.2.1.5														
			Fire-Rated Concrete Masonry	2.2.3.3														
			Units															
			SD-07 Certificates															
			Clay or Shale Brick	2.2.2														
			Concrete Masonry Units (CMU)	2.2.3.2														
			Cementitious Materials	2.4.1.1														
			Admixtures for Masonry Mortar	2.4.1.4														
			Admixtures for Grout	2.4.2.2														
			Anchors, Ties, and Bar	2.6.2														
			Positioners															
			Joint Reinforcement	2.6.3														
			SD-08 Manufacturer's Instructions															
			Admixtures for Masonry Mortar	2.4.1.4														
			Admixtures for Grout	2.4.2.2														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		04 20 01	SD-11 Closeout Submittals															
			Clay Units	2.2.2.1.4	S													
			Recycled Content	2.2.3.2.1	S													
		05 30 00	SD-02 Shop Drawings															
			Fabrication Drawings	1.3.5	G													
			SD-03 Product Data															
			Accessories	2.2														
			Deck Units	2.1														
			Galvanizing Repair Paint	2.1.3														
			Touch-Up Paint	2.1.3														
			Welding Equipment	1.3.3														
			Welding Rods and Accessories	1.3.3														
			Recycled Content of Steel	2.1	S													
			Products															
			SD-04 Samples															
			Metal Roof Deck Units	2.1.1														
			Flexible Closure Strips	2.2.4														
			SD-05 Design Data															
			Deck Units	2.1	G													
			SD-07 Certificates															
			Powder-Actuated Tool Operator	1.3.2														
			Welder Qualifications	1.3.3														
			Welding Procedures	1.3.3														
			Fire Safety	1.3.4.1														
			Wind Storm Resistance	1.3.4.2														
			Manufacturer's Certificate	1.3.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		05 40 00	SD-02 Shop Drawings															
			Framing Components	1.5.1	G													
			SD-03 Product Data															
			Studs, Joists	2.1														
			Recycled Content of Steel	2.1	S													
			Products															
			SD-05 Design Data															
			Metal Framing Calculations	1.5.2	G													
			SD-07 Certificates															
			Welds	3.2.1														
		05 50 13	SD-02 Shop Drawings															
			Installation Drawings	2.6	G													
			Bollards/Pipe Guards	2.4	G													
			Retrofit Treads	2.7	G													
			Angles and Plates	2.6	G													
			SD-03 Product Data															
			Retrofit Treads	2.7	G													
			Recycled Content	2.1.1	S													
		05 51 33	SD-02 Shop Drawings															
			Ladders	2.3														
			SD-03 Product Data															
			Ladders	2.3														
			Ladder Safety Devices	2.3.2														
			SD-07 Certificates															
			Fabricator Certification for Ladder	1.3														
			Assembly															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		05 52 01	SD-02 Shop Drawings															
			Hardware	3.2	G													
			Shapes, Plates, Bars and Strips	3.2	G													
			Masonry Anchorage Devices	2.2.1	G													
			Aluminum Railings and Handrails	2.2.3	G													
			SD-07 Certificates															
			Welding Procedures	1.3.1	G													
			Welder Qualification	1.3.2	G													
		06 10 00	SD-06 Test Reports															
			Preservative-treated	1.4.3														
			SD-07 Certificates															
			Certificates of Grade	1.8.1														
			Preservative Treatment	1.7														
		06 41 16.00 10	SD-02 Shop Drawings															
			Shop Drawings	2.8														
			Installation	3.1														
			SD-03 Product Data															
			Wood Materials	2.1														
			Finish Schedule	2.8.7.3														
			Certification	1.5.2														
			SD-04 Samples															
			Plastic Laminates	2.2														
			Cabinet Hardware	2.4														
			SD-07 Certificates															
			Quality Assurance	1.5														
			Laminate Clad Casework	3.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		06 61 16	SD-02 Shop Drawings															
			Detail Fabrication Drawings	2.1	G													
			Installation	3.1	G													
			Shower Wall Panel And Pan	2.3.7														
			System															
			Shower Wall Panel And Pan	2.3.7														
			System															
			SD-03 Product Data															
			Solid Polymer	2.1.1	G													
			Indoor air quality for solid surface	2.2.2	S													
			seam and sealant products															
			Shower Wall Panel And Pan	2.3.7														
			System															
			Shower Wall Panel And Pan	2.3.7														
			System															
			SD-04 Samples															
			Material	2.1	G													
			Counter Tops	2.3.5	G													
			SD-06 Test Reports															
			Test Report Results	2.1.1														
			SD-07 Certificates															
			Qualifications	1.4.1														
			Indoor Air Quality for solid	2.1.1	S													
			surface fabrication products															
			SD-10 Operation and Maintenance															
			Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		06 61 16	Solid Polymer	2.1.1	G													
		07 19 00	SD-03 Product Data															
			Water Repellents	2.2														
			SD-06 Test Reports															
			Water Absorption	1.3.2														
			Accelerated Weathering	2.3.1														
			Resistance to Chloride Ion	2.3.1														
			Penetration															
			Moisture Vapor Transmission	1.3.2														
			Moisture Vapor Transmission	2.3.1														
			Scaling Resistance	2.3.1														
			Water Penetration and Leakage	1.3.2														
			SD-07 Certificates															
			Manufacturer's Qualifications	1.3.1														
			Applicator's Qualifications	1.3.1														
			Evidence of Acceptable Variation	1.3.3														
			Warranty	1.12														
			SD-08 Manufacturer’s Instructions															
			Application	3.4														
			Safety Data Sheets	1.7.1														
		07 21 13	SD-02 Shop Drawings															
			Manufacturer's Standard Details	1.3	G													
			SD-03 Product Data															
			Environmental Data for Materials	1.4	G													
			Block or Board Insulation	2.1	G													
			Vapor Retarder	2.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 21 13	Pressure Sensitive Tape	2.3	G													
			Accessories	2.4	G													
			Recycled Content for Block or	2.1.4	S													
			Board Insulation															
			SD-07 Certificates															
			Indoor Air Quality For Block Or	2.1.5	S													
			Board Insulation															
			SD-08 Manufacturer’s Instructions															
			Insulation Installation and	3.3.1														
			Handling															
			Adhesive	2.4.1														
			SD-11 Closeout Submittals															
			Draft Guarantee	1.7.1	G													
			Final Guarantee	1.7.1	G													
			Draft Warranty	1.7.2	G													
			Final Warranty	1.7.2	G													
		07 21 16	SD-03 Product Data															
			Blanket Insulation	2.1														
			Accessories	2.2														
			SD-07 Certificates															
			Indoor Air Quality for Insulation	2.1.3	S													
			Materials															
			SD-08 Manufacturer’s Instructions															
			Insulation	3.1.1														
		07 22 00	SD-02 Shop Drawings															
			Insulation Board Layout	1.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 22 00	Verification of Prevailing	1.3	G													
			Conditions															
			SD-03 Product Data															
			Insulation	2.1	G													
			Recycled Content For Insulation	2.1.2	S													
			SD-05 Design Data															
			Wind Resistance	1.7	G													
			SD-06 Test Reports															
			Flame Spread Rating	1.8.1	G													
			SD-07 Certificates															
			Installer Qualifications	1.6	G													
			Indoor Air Quality For Insulation	2.1.3	S													
			Acceptable Foam Blowing Agents	2.1.4	S													
			SD-08 Manufacturer's Instructions															
			Insulation	2.1	G													
		07 27 19.01	SD-01 Preconstruction Submittals															
			Qualifications of Manufacturer	1.6.1	G													
			Qualifications of Installer	1.6.2	G													
			SD-02 Shop Drawings															
			Self-adhering Air Barrier Shop	1.4.1	G													
			Drawings															
			SD-03 Product Data															
			Self-adhering Air Barrier	2.1	G													
			Primers, Adhesives, and Mastics	2.2	G													
			Safety Data Sheets	1.4.2	G													
			SD-06 Test Reports															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 27 19.01	Field Peel Adhesion Test	1.6.3	G													
			Flame Propagation of Wall	1.4.3	G													
			Assemblies															
			Site Inspections and Testing	3.4.1	G													
			SD-08 Manufacturer’s Instructions															
			Self-adhering Air Barrier	1.4.2	G													
			Manufacturer's Printed Instructions															
			Primers, Adhesives, and Mastics	2.2	G													
		07 27 26	SD-01 Preconstruction Submittals															
			Qualifications of Manufacturer	1.8.1	G													
			Qualifications of Installer	1.8.2	G													
			SD-02 Shop Drawings															
			Fluid-Applied Membrane Air	1.4.1	G													
			Barrier Shop Drawings															
			SD-03 Product Data															
			Fluid-Applied Membrane Air	1.4	G													
			Barrier															
			Transition Membrane	2.3	G													
			Primers, Adhesives, and Mastics	2.2	G													
			Reinforcement	2.6	G													
			Safety Data Sheets	1.4.2	G													
			SD-06 Test Reports															
			Capillary Moisture Test	1.6	G													
			Field Peel Adhesion Test	1.4.3	G													
			Flame Propagation of Wall	1.4.3	G													
			Assemblies															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 27 26	Site Inspections	3.4.1	G													
			SD-08 Manufacturer’s Instructions															
			Fluid-Applied Membrane Air	1.4.2	G													
			Barrier Manufacturer's Printed															
			Instructions															
			Primers, Adhesives, and Mastics	1.4.2	G													
			Printed Manufacturer's Instructions															
		07 27 36	SD-01 Preconstruction Submittals															
			Qualification of Manufacturer	1.9.1	G													
			Qualification of Installer	1.9.2	G													
			Quality Control Plan	1.10	G													
			Safety Plan	1.10	G													
			Fire Prevention Plan	1.8.1	G													
			Respiratory Protection Plan	1.8.2	G													
			SD-02 Shop Drawings															
			Spray Foam Air Barrier System	1.5.1														
			Shop Drawings															
			SD-03 Product Data															
			Blowing Agents	2.1.5	G													
			Closed Cell	2.1.2	G													
			Transition Membrane	2.2	G													
			Primers, Adhesives, and Mastics	2.3	G													
			Sealants	2.5	G													
			Safety Data Sheets	1.5.2	G													
			Ignition Barrier Coatings	2.1.1	G													
			Accessories	2.1.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 27 36	Recycled Content for Closed Cell	2.1.2	S													
			Spray Foam Air Barrier															
			SD-06 Test Reports															
			Peel Adhesion Test	1.5.3	G													
			Thermographic Test	3.4.5.1	G													
			Fire-Ratings Of Ignition Barrier	1.5.3	G													
			Materials															
			Flame Spread and Smoke	1.5.3	G													
			Developed Index Ratings of SPF															
			Products															
			Flame Propagation of Wall	1.5.3	G													
			Assemblies															
			Site Inspections	3.4.1	G													
			SD-07 Certificates															
			Indoor Air Quality for Spray Foam	2.1.5	S													
			Air Barrier															
			SD-08 Manufacturer’s Instructions															
			SPF Handling, Storage, and	1.6.1	G													
			Spray Procedures															
			Substrate Preparation	3.2.1	G													
			Ignition Barrier	1.5.2	G													
			Transition Membrane	3.3.3	G													
			Manufacturer's Installation															
			Instructions															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 27 36	Manufacturer's Printed	1.5.2	G													
			Installation Instructions for															
			Primers, Adhesives, and Mastics															
			SD-09 Manufacturer’s Field															
			Reports															
			Core Samples	1.10														
			Daily Work Record	3.3.4														
			Visual Inspection and Thermal	3.4.5														
			Scanning															
		07 60 00	SD-02 Shop Drawings															
			Exposed Sheet Metal	2.2.1	G													
			Gutters	3.1.12	G													
			Downspouts	3.1.13	G													
			fascia	2.2.1	G													
			Flashing at Roof Penetrations	3.1.16	G													
			and Equipment Supports															
			Drip Edges	3.1.11	G													
			Recycled Content	2.1	S													
			SD-04 Samples															
			Finish Samples	1.4.2	G													
			SD-07 Certificates															
			Warranty on Finishes	2.2.10.4	G													
			SD-08 Manufacturer’s Instructions															
			Instructions for Installation	1.4.3	G													
			Quality Control Plan	3.5	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 60 00	SD-10 Operation and Maintenance															
			Data															
			Cleaning and Maintenance	1.4.3	G													
		07 61 15.00 20	SD-02 Shop Drawings															
			Roofing panels	2.1	G													
			Gutters	2.4	G													
			Downspouts	2.4	G													
			SD-03 Product Data															
			Roofing panels	2.1	G													
			Attachment clips	2.3	G													
			Closures	2.4.1														
			Accessories	2.4														
			Fasteners	2.4.2														
			warranty	1.8	G													
			SD-04 Samples															
			Roofing panels	2.1														
			INTERMEDIATE SUPPORT	2.2														
			Accessories	2.4														
			SD-05 Design Data															
			Load calculations	1.5	G													
			SD-06 Test Reports															
			Panel Finish	2.5	G													
			Leakage Test Report	1.3.2.8														
			Wind Uplift Test Report	1.3.2.9														
			Finish	2.1.1.2														
			Manufacturer's field inspection	3.5	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 61 15.00 20	SD-07 Certificates															
			Technical representative	1.6.2														
			Qualification of Installer	1.6.3														
			Coil stock	2.1.1.5														
			Qualification of Manufacturer	1.6.5														
			SD-08 Manufacturer’s Instructions															
			Sealant	2.4.3														
			Installation	3.3														
			SD-11 Closeout Submittals															
			Information card	3.7														
		07 84 00	SD-02 Shop Drawings															
			Firestopping System	2.1	G													
			SD-03 Product Data															
			Firestopping Materials	2.2	G													
			SD-06 Test Reports															
			Inspection Form	3.3	G													
			Inspection Report	3.3.2	G													
			SD-07 Certificates															
			Inspector Qualifications	1.5.2	G													
			Firestopping Materials	2.2														
			Installer Qualifications	1.5.1	G													
		07 92 00	SD-03 Product Data															
			Sealants	2.1	G													
			Primers	2.2	G													
			Bond Breakers	2.3	G													
			Backstops	2.4	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07 92 00	Cleaning Solvents	2.5	G													
			SD-06 Test Reports															
			Field Adhesion	3.1	G													
			SD-07 Certificates															
			Indoor Air Quality For Interior	2.1.1	S													
			Sealants															
			Indoor Air Quality For Interior	2.1.3	S													
			Floor Joint Sealants															
		08 11 13	SD-02 Shop Drawings															
			Doors	2.1	G													
			Doors	2.1	G													
			Frames	2.4	G													
			Frames	2.4	G													
			Accessories	2.2														
			SD-03 Product Data															
			Doors	2.1	G													
			Recycled Content for Steel Door	2.1	S													
			Product															
			Frames	2.4	G													
			Recycled Content for Steel Frame	2.4	S													
			Product															
			Accessories	2.2														
		08 31 00	SD-02 Shop Drawings															
			Access Doors And Panels	1.3	G													
			SD-03 Product Data															
			Access Doors And Panels	1.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 31 00	Hardware	1.3.2	G													
			Accessories	2.2.8	G													
			Recycled Content	2.1	S													
			SD-04 Samples															
			Finishes	2.5	G													
			SD-06 Test Reports															
			Fire-rating(s) of Assemblies	1.3.1	G													
		08 33 13	SD-02 Shop Drawings															
			Detail Drawings	1.3	G													
			SD-03 Product Data															
			Warranty	1.5														
			Rolling Counter Doors	2.1														
			Installation	3.1														
			Cleaning	3.3														
			SD-11 Closeout Submittals															
			Rolling Counter Door (20 Minute	2.3														
			Smoke Rated)															
		08 33 24	SD-02 Shop Drawings															
			Overhead Coiling Doors	2.2.1	G													
			Counterbalancing Mechanism	2.2.3	G													
			Electric Door Operators	2.2.4	G													
			Guides	2.1.1.1	G													
			Mounting Brackets	2.2.3.1	G													
			Hood	2.2.2.2	G													
			Installation Drawings	2.1.1.1	G													
			SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 33 24	Overhead Coiling Doors	2.2.1	G													
			Hardware	2.2.2	G													
			Counterbalancing Mechanism	2.2.3	G													
			Recycled content for aluminum	2.2.1.1	S													
			curtain slats															
			SD-05 Design Data															
			Overhead Coiling Doors	2.2.1	G													
			Hardware	2.2.2	G													
			Counterbalancing Mechanism	2.2.3	G													
			Wind Loading	2.1.2.1														
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	1.3.2	G													
			Manuals															
			SD-11 Closeout Submittals															
			Warranty	1.3.1	G													
		08 33 25	SD-02 Shop Drawings															
			Overhead Coiling Doors	2.2.1	G													
			Counterbalancing Mechanism	2.2.3	G													
			Electric Door Operators	2.2.4	G													
			Guides	2.1.1.1	G													
			Mounting Brackets	2.2.3.1	G													
			Hood	2.2.2.2	G													
			Installation Drawings	2.1.1.1	G													
			SD-03 Product Data															
			Overhead Coiling Doors	2.2.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 33 25	Hardware	2.2.2	G													
			Counterbalancing Mechanism	2.2.3	G													
			Electric Door Operators	2.2.4	G													
			Recycled content for stainless	2.2.1.1	S													
			steel curtain slats															
			SD-05 Design Data															
			Overhead Coiling Doors	2.2.1	G													
			Hardware	2.2.2	G													
			Counterbalancing Mechanism	2.2.3	G													
			Electric Door Operators	2.2.4	G													
			Wind Loading	2.1.2.1														
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	1.3.2	G													
			Manuals															
			SD-11 Closeout Submittals															
			Warranty	1.3.1	G													
		08 51 13	SD-02 Shop Drawings															
			Windows	2.1	G													
			Fabrication Drawings	1.6														
			SD-03 Product Data															
			Windows	2.1	G													
			Recycled Content of Aluminum	2.1	S													
			Windows															
			Hardware	2.2.8.1	G													
			Fasteners	2.2.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 51 13	Window Performance	1.7	G													
			Thermal-Barrier Windows	2.3	G													
			Mullions	2.4	G													
			Screens	2.2.10	G													
			Weatherstripping	2.1.5	G													
			Accessories	2.2.8	G													
			Adhesives	2.2.4														
			Thermal Performance	1.7.4	G													
			SD-04 Samples															
			Finish Sample	1.3.3.1														
			Window Sample	1.3.3.2														
			SD-05 Design Data															
			Structural Calculations for	2.1	G													
			Deflection															
			Design Analysis	1.3.4	G													
			SD-06 Test Reports															
			Minimum Condensation	1.3.5														
			Resistance Factor															
			Windborne-Debris-Impact	1.7.6														
			Performance															
			SD-07 Certificates															
			Engineer's Qualifications	1.3.4														
			SD-10 Operation and Maintenance															
			Data															
			Windows	2.1	G													
		08 71 00	SD-02 Shop Drawings															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 71 00	Manufacturer's Detail Drawings	1.3	G													
			Verification of Existing Conditions	1.3	G													
			Hardware Schedule	1.5	G													
			Keying System	2.3.5	G													
			SD-03 Product Data															
			Hardware Items	2.3	G													
			SD-08 Manufacturer’s Instructions															
			Installation	3.1														
			SD-10 Operation and Maintenance															
			Data															
			Hardware Schedule	1.5	G													
			SD-11 Closeout Submittals															
			Key Bitting	1.6.1														
		08 81 00	SD-03 Product Data															
			Insulating Glass	2.2														
			Glazing Accessories	1.3														
			Sealants	2.3.1.1														
			Joint Backer	2.3.2														
			Rated Glazing	2.1.3														
			SD-04 Samples															
			Insulating Glass	2.2														
			Tape	2.3.4														
			Sealing Tapes	2.3.4														
			SD-08 Manufacturer’s Instructions															
			Setting and Sealing Materials	2.3														
			Glass Setting	3.2														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08 81 00	SD-11 Closeout Submittals															
			Insulated Glass Units	1.7.1														
		08 91 00	SD-02 Shop Drawings															
			Wall Louvers	1.4	G													
			SD-03 Product Data															
			Metal Wall Louvers	2.2	G													
			SD-04 Samples															
			Wall Louver Samples	1.5	G													
		09 03 00	SD-02 Shop Drawings															
			Work Plan	1.3														
			SD-03 Product Data															
			Cleaning Solution	2.1														
		09 22 00	SD-03 Product Data															
			Metal Support Systems	2.1														
			Recycled Content for Metal	2.1	S													
			Support Systems															
		09 29 00	SD-03 Product Data															
			Abuse Resistant Gypsum Board	2.1.2														
			Accessories	2.1.5														
			Gypsum Board	2.1.1														
			Recycled Content for Gypsum	2.1.1	S													
			Board															
			Recycled Content for Paper	2.1.1	S													
			Facing and Gypsum Cores															
			VOC Content of Joint Compound	2.1.3	S													
			SD-07 Certificates															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		09 29 00	Asbestos Free Materials	2.1	G													
			Indoor Air Quality for Gypsum	2.1.1	S													
			Board															
			SD-08 Manufacturer's Instructions															
			Safety Data Sheets	2.1														
			SD-10 Operation and Maintenance															
			Data															
			Manufacturer Maintenance	2.1														
			Instructions															
		09 30 10	SD-02 Shop Drawings															
			Detail Drawings	3.2	G													
			SD-03 Product Data															
			Porcelain Tile	2.1.1	G													
			Recycled Content for Porcelain	2.1.1	S													
			Tile															
			Mosaic Tile	2.1.2	G													
			Recycled Content for Mosaic Tile	2.1.2	S													
			Transition Strips	2.1	G													
			Transition Strips	2.6.1	G													
			Metal Strips	2.6.2	G													
			Setting-Bed	2.2	G													
			Mortar, Grout, and Adhesive	2.4	G													
			Reinforcing Wire Fabric	2.2.6														
			Cementitious Backer Units	2.5.1	G													
			Waterproof Membrane	2.7	G													
			Crack Isolation Membrane	2.8	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		09 30 10	SD-04 Samples															
			Tile	2.1	G													
			Accessories	2.1	G													
			Transition Strips	2.1	G													
			Transition Strips	2.6.1	G													
			Metal Strips	2.6.2	G													
			Grout	2.4.4	G													
			SD-07 Certificates															
			Indoor Air Quality for Adhesives	2.4	S													
			Indoor Air Quality for Sealants	2.4.8	S													
			Water Absorption Rates	1.3.2														
			SD-08 Manufacturer’s Instructions															
			Manufacturer's Approved	3.8														
			Cleaning Instructions															
			SD-10 Operation and Maintenance															
			Data															
			Porcelain Tile	2.1.1														
			Mosaic Tile	2.1.2	G													
			Transition Strips	2.1	G													
			Transition Strips	2.6.1	G													
			Metal Strips	2.6.2	G													
		09 67 23.13	SD-03 Product Data															
			Manufacturer's Catalog Data	1.2.1	G													
			SD-04 Samples															
			Hardboard Mounted	1.5.2	G													
			SD-05 Design Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		09 67 23.13	Design Mix Data	1.2.2	G													
			SD-07 Certificates															
			Listing of Product Installations	1.5.1	G													
			Referenced Standards	1.5	G													
			Certificates															
			SD-11 Closeout Submittals															
			Warranty	1.6	G													
		09 90 00	SD-02 Shop Drawings															
			Piping Identification	3.10														
			SD-03 Product Data															
			Coating	2.1	G													
			Product Data Sheets	2.1														
			SD-04 Samples															
			Color	2.2	G													
			SD-07 Certificates															
			Indoor Air Quality for Paints and	1.6.4														
			Primers															
			SD-08 Manufacturer’s Instructions															
			Application Instructions	3.2.1														
			Mixing	2.1														
			Manufacturer's Safety Data	1.8.1														
			Sheets															
			SD-10 Operation and Maintenance															
			Data															
			Coatings	2.1	G													
		10 14 00.10	SD-02 Shop Drawings															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		10 14 00.10	Approved Detail Drawings	3.1	G													
			SD-03 Product Data															
			Installation	3.1														
			Exterior Signage	1.2	G													
			Wind Load Requirements	1.2.1														
			SD-04 Samples															
			Exterior Signage	1.2	G													
			SD-10 Operation and Maintenance															
			Data															
			Protection and Cleaning	3.1.2	G													
		10 14 00.20	SD-02 Shop Drawings															
			Detail Drawings	1.4.2	G													
			SD-03 Product Data															
			Installation	3.1	G													
			Warranty	1.6	G													
			SD-04 Samples															
			Interior Signage	1.4.1	G													
			Software	1.3	G													
			SD-10 Operation and Maintenance															
			Data															
			Approved Manufacturer's	3.1	G													
			Instructions															
			Protection and Cleaning	3.1.2	G													
		10 21 13	SD-02 Shop Drawings															
			Fabrication Drawings	2.1														
			Installation Drawings	3.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		10 21 13	SD-03 Product Data															
			Cleaning and Maintenance	2.1														
			Instructions															
			Colors And Finishes	2.7														
			Anchoring Devices and Fasteners	2.2.2														
			Hardware and Fittings	2.2.4														
			Brackets	2.2.3														
			Door Hardware	2.2.5														
			Pilaster Shoes	2.5														
			Finishes	2.2.4.2	G													
			Finishes	2.7.2	G													
			Plastic Identification	2.1.1														
			Toilet Enclosures	2.3.1														
			Urinal Screens	2.3.2														
			SD-04 Samples															
			Colors and Finishes	2.7	G													
			Hardware and Fittings	2.2.4														
			Anchoring Devices and Fasteners	2.2.2														
			SD-07 Certificates															
			Warranty	1.6														
		10 26 00	SD-02 Shop Drawings															
			Corner Guards	2.2	G													
			SD-03 Product Data															
			Corner Guards	2.2	G													
			SD-04 Samples															
			Finish	2.4	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		10 26 00	SD-06 Test Reports															
			Corner Guards	2.2														
			SD-07 Certificates															
			Corner Guards	2.2														
			Indoor air quality for adhesives	2.5	S													
		10 28 13	SD-02 Shop Drawings															
			Product Schedule	2.1	G													
			SD-03 Product Data															
			Recycled content for stainless	2.1	G													
			steel toilet accessories															
			Sanitary Napkin Disposal (SND)	2.1.3	G													
			Item A5109	2.1.4	G													
			Hook, Garment, Security	2.1.5	G													
			Item A5165	2.1.6	G													
			Shower Curtain Rod (SCR)	2.1.7	G													
			Toilet Tissue Dispenser (TTD)	2.1.8	G													
			Mirror (WM)	2.1.9	G													
			Foam Soap Dispenser (SD)	2.1.10	G													
			Semi Recessed Waste	2.1.11	G													
			Receptacle and Paper Towel															
			Dispenser (ITDW)															
			SD-10 Operation and Maintenance															
			Data															
			Sanitary Napkin Disposal (SND)	2.1.3	G													
			Hook, Garment, Security	2.1.5	G													
			Item A5165	2.1.6	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		10 28 13	Shower Curtain Rod (SCR)	2.1.7	G													
			Toilet Tissue Dispenser (TTD)	2.1.8	G													
			Mirror (WM)	2.1.9	G													
			Foam Soap Dispenser (SD)	2.1.10	G													
			Semi Recessed Waste	2.1.11	G													
			Receptacle and Paper Towel															
			Dispenser (ITDW)															
		10 44 16	SD-02 Shop Drawings															
			Wall Brackets	2.1.1	G													
			Schedule	1.3	G													
			SD-03 Product Data															
			Wall Brackets	2.1.1	G													
			Replacement Parts List	3.2.1	G													
			SD-04 Samples															
			Equipment Samples	1.2.1	G													
		10 50 00	SD-02 Shop Drawings															
			Emergency Key Boxes	2.1	G													
			SD-03 Product Data															
			Emergency Key Boxes	2.1	G													
			Accessories	2.2	G													
			SD-10 Operation and Maintenance															
			Data															
			Maintenance	1.3	G													
		12 24 13	SD-02 Shop Drawings															
			Detailed Drawings	3.2	G													
			Location Schedule	2.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		12 24 13	SD-03 Product Data															
			Window Shades	2.1	G													
			Recycled Content for various	2.1	S													
			fiber components															
			SD-04 Samples															
			Window Shades	2.1	G													
			SD-06 Test Reports															
			Flammability Requirements	1.4.2	G													
			SD-07 Certificates															
			Indoor Air Quality for roller	2.1	S													
			window shades															
			Qualifications	1.4.1.1														
			SD-10 Operation and Maintenance															
			Data															
			Window Shades	2.1	G													
		21 13 13	SD-01 Preconstruction Submittals															
			Qualified Fire Protection Engineer	1.2.3	G													
			(QFPE)															
			Sprinkler System Designer	1.4.2.1	G													
			Sprinkler System Installer	1.4.2.2	G													
			SD-02 Shop Drawings															
			Shop Drawing	1.2.1.1	G													
			SD-03 Product Data															
			Pipe	2.2.1.1	G													
			Fittings	2.2.1.2	G													
			Valves	2.2.4	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		21 13 13	Riser Check Valves	2.2.5	G													
			Relief Valves	2.7.5	G													
			Sprinklers	2.6	G													
			Pipe Hangers and Supports	2.2.3	G													
			Sprinkler Alarm Switch	2.3.1	G													
			Valve Supervisory (Tamper)	2.3.2	G													
			Switch															
			Fire Department Connection	2.5	G													
			Backflow Prevention Assembly	2.4	G													
			Air Vent	2.7.6	G													
			Hose Valve	2.4.1	G													
			Nameplates	2.1.2	G													
			SD-05 Design Data															
			Hydraulic Calculations	1.2.1.2	G													
			SD-06 Test Reports															
			Test Procedures	3.6.1	G													
			SD-07 Certificates															
			Verification of Compliant	3.6.2.1	G													
			Installation															
			Request for Government Final	3.6.2.2	G													
			Test															
			SD-10 Operation and Maintenance															
			Data															
			Operating and Maintenance	3.8	G													
			(O&M) Instructions															
			Spare Parts	1.6	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		21 13 13	SD-11 Closeout Submittals															
			As-built drawings	3.8														
		22 00 00	SD-02 Shop Drawings															
			Plumbing System	3.9.1	G													
			SD-03 Product Data															
			Backflow Prevention Assemblies	3.9.1.1	G													
			Recycled Content for Steel Pipe	2.1	S													
			Recycled Content for Cast Iron	2.1	S													
			Pipe															
			Fixtures	2.4														
			Shower Faucets	2.4.7	G													
			Flush Valve Water Closets	2.4.2														
			Flush Valve Urinals	2.4.3														
			Wall Hung Lavatories	2.4.4														
			WaterSense Label for Lavatory	2.4.1	S													
			Faucet															
			Service Sinks	2.4.5														
			Water Heaters	2.10	G													
			Energy Star Label for Gas	2.10.1.1	S													
			Storage Water Heater															
			Pumps	2.11	G													
			Vibration-Absorbing Features	3.4	G													
			Plumbing System	3.9.1														
			Thermostatic Mixing Valves	2.3.8														
			Temperature Controlled Mixing	2.3.9														
			Valve															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		22 00 00	Point-Of-Use Mixing Valve	2.3.10														
			Automatic Temperature And	2.3.11														
			Pressure Compensating Valve															
			Single Supply Line Automatic	2.3.12														
			Temperature Control															
			SD-06 Test Reports															
			Tests, Flushing and Disinfection	3.9														
			Test of Backflow Prevention	3.9.1.1	G													
			Assemblies															
			SD-07 Certificates															
			Materials and Equipment	1.4														
			Bolts	2.1.1														
			SD-10 Operation and Maintenance															
			Data															
			Plumbing System	3.9.1	G													
		23 05 15	SD-01 Preconstruction Submittals															
			Material, Equipment, and Fixture	1.2	G													
			Lists															
			SD-02 Shop Drawings															
			Record Drawings	1.2	G													
			Connection Diagrams	1.2	G													
			Coordination Drawings	1.2	G													
			Fabrication Drawings	1.2	G													
			SD-03 Product Data															
			Miscellaneous Materials	2.2	G													
			Supporting Elements	2.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 05 15	Equipment Foundation Data	1.2	G													
			SD-07 Certificates															
			List of Qualified Permanent	1.4.2	G													
			Service Organizations															
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	3.9	G													
			Manuals															
		23 05 48.19	SD-02 Shop Drawings															
			Coupling and Bracing	3.1														
			Flexible Couplings or Joints	3.3														
			Equipment Restraint	2.2														
			Contractor Designed Bracing	1.2.4	G													
			SD-03 Product Data															
			Coupling and Bracing	3.1	G													
			Flexible Couplings Or Joints	3.3	G													
			Equipment Restraint	2.2	G													
			Contractor Designed Bracing	1.2.4	G													
			Snubbers	2.6														
			Anchor Bolts	3.9														
			Vibration Isolators	2.2.2														
			SD-05 Design Data															
			Design Calculations	1.2.4														
			SD-06 Test Reports															
			Anchor Bolts	3.9	G													
		23 05 93	SD-01 Preconstruction Submittals															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION		DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION		DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 05 93	Records of Existing Conditions	1.3.3	G													
			Independent TAB Agency and	1.5.1	G													
			Personnel Qualifications															
			TAB Design Review Report	1.5.3.1	G													
			SD-02 Shop Drawings															
			TAB Schematic Drawings and	1.3.3	G													
			Report Forms															
			SD-03 Product Data															
			Equipment and Performance	1.3	G													
			Data															
			TAB Related HVAC Submittals	1.5.1.3	G													
			SD-06 Test Reports															
			Completed Pre-Final DALT	3.3.5	G													
			Report															
			Certified Final DALT Report	3.3.8	G													
			Prerequisite HVAC Work	1.5.3.2	G													
			Checkout List															
			Prerequisite HVAC Work	1.5.3.2	G													
			Checkout List															
			Prerequisite HVAC Work	1.5.3.2	G													
			Checkout List															
			Proportional Balancing	3.4.5.1	G													
			Proportional Balancing	3.7	G													
			Season 1	3.4.5.2	G													
			Season 1	3.7	G													
			Season 2	3.4.5.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 05 93	Season 2	3.7	G													
			TAB Design Review Report	1.5.3.1	G													
			SD-07 Certificates															
			Independent TAB Agency and	1.5.1	G													
			Personnel Qualifications															
			DALT and TAB Submittal and	1.5.3.1	G													
			Work Schedule															
			TAB Pre-Field Engineering	1.5.3.2	G													
			Report															
			Instrument Calibration	1.5.5	G													
			Certificates															
			DALT and TAB Procedures	3.7	G													
			Summary															
			Completed Pre-Final DALT Work	3.7	G													
			Checklist															
			Advance Notice of Pre-Final	3.3.2	G													
			DALT Field Work															
			Proportional Balancing	3.4.5.1	G													
			Proportional Balancing	3.7	G													
			Season 1	3.4.5.2	G													
			Season 1	3.7	G													
			Season 2	3.4.5.2	G													
			Season 2	3.7	G													
		23 07 00	SD-02 Shop Drawings															
			MICA Plates	3.2.2.4	G													
			Pipe Insulation Systems	2.3														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 07 00	Pipe Insulation Systems	3.2														
			Duct Insulation Systems	3.3														
			Equipment Insulation Systems	3.4														
			Recycled content for insulation	2.3.1	S													
			materials															
			SD-03 Product Data															
			Pipe Insulation Systems	2.3	G													
			Pipe Insulation Systems	3.2	G													
			Duct Insulation Systems	3.3	G													
			Equipment Insulation Systems	3.4	G													
			SD-04 Samples															
			Thermal Insulation	2.2.1.3	G													
			Display Samples	3.1.1	G													
			SD-07 Certificates															
			Indoor air quality for adhesives	2.2.1	S													
			SD-08 Manufacturer’s Instructions															
			Pipe Insulation Systems	2.3	G													
			Pipe Insulation Systems	3.2	G													
			Duct Insulation Systems	3.3	G													
			Equipment Insulation Systems	3.4	G													
		23 09 00	SD-02 Shop Drawings															
			Control System Drawings Title	3.1.1	G													
			Sheet															
			List Of I/O Points	3.1.2	G													
			Control System Components List	3.1.3	G													
			Control System Schematics	3.1.4	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 09 00	Hvac Equipment Control Ladder	3.1.5	G													
			Diagrams															
			Sequence Of Operations	3.1.6	G													
			Component Wiring Diagrams	3.1.7	G													
			Terminal Strip Diagrams	3.1.8	G													
			Bacnet Communication	3.1.9	G													
			Architecture Schematic (Network															
			Riser)															
			Control Panel Layout	3.1.10	G													
			SD-06 Test Reports															
			Existing Conditions Report	3.3.1	G													
			Control Contractor's Performance	3.8.5	G													
			Verification Testing Plan															
			Equipment Supplier's	3.8.5	G													
			Performance Verification Testing															
			Plan															
			Performance Verification Testing	3.8.14	G													
			Report															
			Trends	3.9	G													
			Bus Waveform Report	3.10.1	G													
			SD-07 Certificates															
			Contractor's Qualifications	1.7.6	G													
			Contractor's Training	1.7.6	G													
			Certifications															
			SD-10 Operation and Maintenance															
			Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 09 00	Controls System Operators	3.7	G													
			Manuals															
			SD-11 Closeout Submittals															
			Training Documentation	3.11.1	G													
			Warranty Information	3.7	G													
		23 09 13	SD-03 Product Data															
			Sensors And Input Hardware	2.3	G													
			Output Hardware	2.4	G													
			Duct Smoke Detectors	2.6.1	G													
			Variable Frequency (Motor)	2.7	G													
			Drives															
			SD-06 Test Reports															
			Vfd Start-Up Test Documentation	2.7.2	G													
			SD-10 Operation and Maintenance															
			Data															
			Vfd Service Manuals	2.7.2	G													
		23 09 23.02	SD-03 Product Data															
			Direct Digital Controllers	2.1.3	G													
			Bacnet Gateways	2.1.3.12	G													
			Notebook Computer	2.1.5	G													
			Notebook Computer Software	2.1.6	G													
			Bacnet Operator Workstation	2.1.6.2	G													
		23 21 13.00 20	SD-02 Shop Drawings															
			Hot water heating system	1.3.1														
			SD-03 Product Data															
			Pumps	2.4.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 21 13.00 20	Expansion tanks	2.4.2														
			Flow measuring equipment	2.4.4														
			External air separation tanks	2.4.3														
			Hot water heating pipe	2.2.1														
			Combination Strainer And Pump	2.2.10.2														
			Suction Diffuser															
			SD-06 Test Reports															
			Hydrostatic test of piping system	3.3.1														
			Auxiliary equipment and	3.3.2														
			accessory tests															
			SD-07 Certificates															
			Backflow preventer certification	1.5.4														
			Report of prior installations	1.5.2.1														
			Welding procedures	1.5.2.2														
			Welder's qualifications	1.5.2.3														
		23 23 00	SD-02 Shop Drawings															
			Refrigerant Piping System	2.2	G													
			SD-03 Product Data															
			Refrigerant Piping System	2.2														
			Qualifications	1.3.1														
			Refrigerant Piping Tests	3.4														
			SD-06 Test Reports															
			Refrigerant Piping Tests	3.4														
			SD-07 Certificates															
			Service Organization	2.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 23 00	SD-10 Operation and Maintenance															
			Data															
			Maintenance	1.5	G													
			Operation and Maintenance	3.3	G													
			Manuals															
		23 24 00	SD-03 Product Data															
			Detergent	2.1														
			Water Treatment	2.1														
		23 25 00	SD-03 Product Data															
			Water Analysis	2.1.3	G													
			Spare Parts	1.3														
			Field Instructions	3.4.1														
			Tests	3.3.1	G													
			Training Course	3.4.1	G													
		23 30 00	SD-02 Shop Drawings															
			Detail Drawings	1.4.4	G													
			SD-03 Product Data															
			Insulated Nonmetallic Flexible	2.11.1.1														
			Duct Runouts															
			Duct Connectors	2.11.1.1														
			Duct Access Doors	2.11.2	G													
			Fire Dampers	2.11.3	G													
			Manual Balancing Dampers	2.11.4	G													
			Gravity Backdraft and Relief	2.11.6	G													
			Dampers															
			Diffusers	2.11.7.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 30 00	Registers and Grilles	2.11.7.3														
			Louvers	2.11.8														
			Air Vents, Penthouses, and	2.11.9														
			Goosenecks															
			In-Line Centrifugal Fans	2.12.1.1														
			Propeller Type Sidewall Fans	2.12.1.2														
			Air Handling Units	2.13	G													
			Energy Recovery Devices	2.14	G													
			Test Procedures	1.4.5														
			Diagrams	1.2.1.2	G													
			Indoor Air Quality for Duct	2.11.1	S													
			Sealants															
			SD-06 Test Reports															
			Performance Tests	3.12	G													
			Damper Acceptance Test	3.10	G													
			SD-07 Certificates															
			Bolts	1.4.1														
			Ozone Depleting Substances	1.4.3														
			Technician Certification															
			SD-08 Manufacturer’s Instructions															
			Manufacturer's Installation	3.2														
			Instructions															
			Operation and Maintenance	3.14.2														
			Training															
			SD-10 Operation and Maintenance															
			Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 30 00	Operation and Maintenance	3.14.1	G													
			Manuals															
			Fire Dampers	2.11.3	G													
			Manual Balancing Dampers	2.11.4	G													
			In-Line Centrifugal Fans	2.12.1.1	G													
			Propeller Type Sidewall Fans	2.12.1.2	G													
			Air Handling Units	2.13	G													
			Energy Recovery Devices	2.14	G													
			SD-11 Closeout Submittals															
			Indoor Air Quality During	3.13	S													
			Construction															
		23 52 43.00 20	SD-02 Shop Drawings															
			Fuel Train	1.3.2.2														
			Wiring Diagram	1.3.2.2														
			SD-03 Product Data															
			Boilers	2.1														
			Boiler Trim and Control	2.2														
			Equipment															
			Stack, Breeching, and Supports	2.2.17														
			SD-06 Test Reports															
			Operational Tests	3.3.1														
			SD-07 Certificates															
			Boilers	2.1														
			Boiler Trim and Control	2.2														
			Equipment															
			SD-08 Manufacturer's Instructions															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 52 43.00 20	Boilers	2.1														
			Feedwater Treatment Feeder	2.2.7														
			SD-10 Operation and Maintenance															
			Data															
			Boilers	2.1														
			SD-11 Closeout Submittals															
			Boilers	2.1														
		23 64 10	SD-03 Product Data															
			Verification of Dimensions	1.6.1														
			System Performance Tests	3.6														
			Demonstrations	3.7														
			Refrigerant	2.5.1														
			Water Chiller - Field Acceptance	3.5.1														
			Test Plan															
			Scroll Type Water Chiller	2.4.1														
			SD-06 Test Reports															
			Field Acceptance Testing	3.5														
			Water Chiller - Field Acceptance	3.5.2														
			Test Report															
			Factory Tests	2.8														
			System Performance Tests	3.6														
			Factory Test Schedule	3.2	G													
			Startup Report	3.3														
			SD-07 Certificates															
			Refrigeration System	3.1.7	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 64 10	Refrigeration Technician	1.3.1														
			Certification															
			SD-08 Manufacturer's Instructions															
			Water Chiller - Installation	3.1	G													
			Instructions															
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	3.7	G													
			Manuals															
			Training Course Schedule	3.7	G													
			SD-11 Closeout Submittals															
			Indoor Air Quality During	3.4	S													
			Construction															
		23 64 26	SD-03 Product Data															
			Calibrated Balancing Valves	2.5.8	G													
			Water Temperature Regulating	2.5.9	G													
			Valves															
			Water Pressure Reducing Valve	2.5.10														
			Pressure Relief Valve	2.5.11														
			Combination Pressure and	2.5.12														
			Temperature Relief Valves															
			Expansion Joints	2.6.9	G													
			Pumps	2.7	G													
			Combination Strainer and Pump	2.6.3														
			Suction Diffuser															
			Expansion Tanks	2.8														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 64 26	Air Separator Tanks	2.9														
			Water Treatment Systems	2.10	G													
			SD-06 Test Reports															
			Piping Welds NDE Report	3.1.1.3														
			Pressure Tests Reports	3.4.2	G													
			SD-07 Certificates															
			Employer's Record Documents	3.1.1.1														
			(For Welding)															
			Welding Procedures and	3.1.1.2														
			Qualifications															
			SD-08 Manufacturer’s Instructions															
			Lesson plan for the Instruction	3.5														
			Course															
			SD-10 Operation and Maintenance															
			Data															
			Water Treatment Systems	2.10														
			Calibrated Balancing Valves	2.5.8														
			Water Temperature Regulating	2.5.9														
			Valves															
			Water Pressure Reducing Valve	2.5.10														
			Pressure Relief Valve	2.5.11														
			Combination Pressure and	2.5.12														
			Temperature Relief Valves															
			Expansion Joints	2.6.9														
			Pumps	2.7														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 64 26	Combination Strainer and Pump	2.6.3														
			Suction Diffuser															
			Expansion Tanks	2.8														
			Air Separator Tanks	2.9														
		23 81 00	SD-03 Product Data															
			Spare Parts	3.7.1														
			Posted Instructions	3.4														
			Coil Corrosion Protection	2.5.1														
			System Performance Tests	3.6														
			Training	3.4	G													
			Inventory	1.5														
			Supplied Products	2.1														
			Manufacturer's Standard Catalog	2.2														
			Data															
			Dehumidifiers	2.3.3														
			SD-06 Test Reports															
			Refrigerant Tests, Charging, and	3.5	G													
			Start-Up															
			System Performance Tests	3.6	G													
			SD-07 Certificates															
			Service Organizations	3.7.2														
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	3.4	G													
			Manuals															
			SD-11 Closeout Submittals															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		23 81 00	Ozone Depleting Substances	2.2.2.3	S													
		25 05 11.00	SD-01 Preconstruction Submittals															
			Qualifications	1.7.1	G													
			Device Account Lock Exception	3.1.2.2	G													
			Request															
			Contractor Computer	1.10.1.4	G													
			Cybersecurity Compliance															
			Statements															
			Contractor Temporary Network	1.10.6	G													
			Cybersecurity Compliance															
			Statements															
			SD-02 Shop Drawings															
			Cybersecurity Riser Diagram	1.8.4	G													
			Control System Inventory Report	1.8.2	G													
			SD-03 Product Data															
			Control System Cybersecurity	1.8.5	G													
			Documentation															
			SD-06 Test Reports															
			Wireless Communication Test	3.1.3.3	G													
			Report															
			SD-07 Certificates															
			Software Licenses	1.9	G													
			SD-11 Closeout Submittals															
			Password Summary Report	3.4.2.2.3	G													
			Software Recovery And	1.8.3	G													
			Reconstitution Images															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		25 05 11.00	Device Audit Record Upload	3.2.2.1	G													
			Software															
		26 05 73	SD-01 Preconstruction Submittals															
			Field Examination Plan	3.1	G													
			Arc Flash Label Formats	3.2.9	G													
			SD-06 Test Reports															
			Field Examination	3.1.1														
			SD-07 Certificates															
			System Analyzer	1.4.1	G													
			SD-11 Closeout Submittals															
			Model Files	3.3	G													
			Load Flow Study	3.2.4	G													
			Fault Current Study	3.2.5	G													
			System Coordination Study	3.2.6	G													
			Arc Flash Hazard Study	3.2.7	G													
		26 08 00	SD-06 Test Reports															
			Acceptance Tests and	3.1	G													
			Inspections															
			SD-07 Certificates															
			Qualifications	1.4.1	G													
			Acceptance Test and Inspections	1.4.3	G													
			Procedure															
		26 12 19	SD-02 Shop Drawings															
			Pad-mounted Transformer	1.5.1	G													
			Drawings															
			SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 12 19	Pad-mounted Transformers	2.2	G													
			SD-06 Test Reports															
			Acceptance Checks and Tests	3.7.1	G													
			SD-07 Certificates															
			Transformer Efficiencies	2.2.2.1	G													
			SD-09 Manufacturer's Field															
			Reports															
			Transformer Test Schedule	2.7.1	G													
			Design Tests	2.7.2	G													
			Routine and Other Tests	2.7.3	G													
			SD-10 Operation and Maintenance															
			Data															
			Transformer(s)	1.6.1	G													
		26 20 00	SD-02 Shop Drawings															
			Panelboards	2.12	G													
			Transformers	2.14	G													
			Cable Trays	2.3	G													
			Load Centers for Housing Units	2.13.2	G													
			SD-03 Product Data															
			Switches	2.9	G													
			Receptacles	2.11	G													
			Circuit Breakers	2.12.3	G													
			Housing Unit Load Center Circuit	2.13.2.2	G													
			Breakers															
			Transformers	2.14	G													
			Manual Motor Starters	2.15	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 20 00	Residential Load Centers	2.13	G													
			Meter Base Only	2.21	G													
			Secondary Bonding Busbar	2.17.1	G													
			Surge Protective Devices	2.22	G													
			Cable Trays	2.3	G													
			SD-06 Test Reports															
			600-volt Wiring Test	3.5.2	G													
			Grounding System Test	3.5.6	G													
			Transformer Tests	3.5.3	G													
			Ground-fault Receptacle Test	3.5.4	G													
			Arc-fault Receptacle Test	3.5.5	G													
			SD-07 Certificates															
			Fuses	2.10	G													
			SD-09 Manufacturer's Field															
			Reports															
			Transformer Factory Tests	2.24.1														
			SD-10 Operation and Maintenance															
			Data															
			Electrical Systems	1.6.1	G													
		26 24 13	SD-02 Shop Drawings															
			Switchboard Drawings	1.5.2	G													
			SD-03 Product Data															
			Switchboard	2.2	G													
			SD-06 Test Reports															
			Switchboard Design Tests	2.5.2	G													
			Switchboard Production Tests	2.5.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 24 13	Acceptance Checks and Tests	3.5.1	G													
			SD-10 Operation and Maintenance															
			Data															
			Switchboard Operation and	1.6.1	G													
			Maintenance															
			SD-11 Closeout Submittals															
			Assembled Operation and	1.6.2	G													
			Maintenance Manuals															
			Equipment Test Schedule	2.5.1	G													
			Required Settings	3.5	G													
			Service Entrance Available Fault	2.8	G													
			Current Label															
		26 27 14.00 20	SD-02 Shop Drawings															
			Installation Drawings	1.3.1	G													
			SD-03 Product Data															
			Electricity Meters	2.1.4	G													
			Current Transformer	2.1.3	G													
			Potential Transformer	2.1.2	G													
			Communications	2.2	G													
			SD-06 Test Reports															
			Acceptance Checks and Tests	3.2.1	G													
			System Functional Verification	3.2.2	G													
			Building Meter Installation Sheet,	3.2.1	G													
			per Building															
			Meter Configuration Template	2.1.1	G													
			Meter Configuration Report	3.2.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 27 14.00 20	SD-10 Operation and Maintenance															
			Data															
			Electricity Meters and	1.4.1	G													
			Accessories															
			SD-11 Closeout Submittals															
			System Functional Verification	3.2.2	G													
		26 41 00	SD-06 Test Reports															
			Lightning Protection and	1.4.2	G													
			Grounding System Test Plan															
			Grounding Systems Testing	3.5.2	G													
			SD-07 Certificates															
			Component UL Listed and	1.4.1	G													
			Labeled															
			Lightning Protection System	1.4.3	G													
			Inspection Certificate															
			Roof Manufacturer's Warranty	3.1.1.1	G													
		26 51 00	SD-02 Shop Drawings															
			Luminaire Drawings	1.5.1	G													
			SD-03 Product Data															
			Luminaires	2.2	G													
			Light Sources	2.3	G													
			LED Drivers	2.4	G													
			Luminaire Warranty	1.6.1	G													
			Lighting Controls Warranty	1.6.2	G													
			Switches	2.5.1.1	G													
			Wall Box Dimmers	2.5.1.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 51 00	Occupancy/Vacancy Sensors	2.5.1.3	G													
			Time Clocks	2.5.1.4	G													
			Power Packs	2.5.1.3.2	G													
			Exit Signs	2.6.1	G													
			Emergency Drivers	2.6.3	G													
			SD-05 Design Data															
			Luminaire Design Data	1.5.2	G													
			SD-06 Test Reports															
			ANSI/IES LM-79 Test Report	1.5.3	G													
			ANSI/IES LM-80 Test Report	1.5.4	G													
			ANSI/IES TM-21 Test Report	1.5.5	G													
			ANSI/IES TM-30 Test Report	1.5.6	G													
			Occupancy/Vacancy Sensor	3.2.1.1	G													
			Verification Test															
			Photosensor Verification Test	3.2.1.1	G													
			SD-07 Certificates															
			LED Driver and Dimming Switch	1.5.7	G													
			Compatibility Certificate															
			SD-10 Operation and Maintenance															
			Data															
			Lighting System	1.7.1	G													
			End-User Training Plan	3.3.1.1	G													
		26 56 00	SD-02 Shop Drawings															
			Luminaire Drawings	1.5.1.1	G													
			SD-03 Product Data															
			Luminaires	2.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		26 56 00	Light Sources	2.3	G													
			LED Drivers	2.4	G													
			Luminaire Warranty	1.7.1	G													
			Lighting Controls Warranty	1.7.2	G													
			Photosensors	2.5.1.2	G													
			Time Clock	2.5.1.1	G													
			Lighting Contactor	2.5.1.3	G													
			SD-05 Design Data															
			Luminaire Design Data	1.5.2	G													
			SD-06 Test Reports															
			ANSI/IES LM-79 Test Report	1.5.3	G													
			ANSI/IES LM-80 Test Report	1.5.4	G													
			ANSI/IES TM-21 Test Report	1.5.5	G													
			SD-10 Operation and Maintenance															
			Data															
			Lighting System	1.8.1	G													
			End-User Training Plan	3.3.1.1	G													
		27 10 00	SD-02 Shop Drawings															
			Telecommunications Drawings	1.6.1.1	G													
			Telecommunications Space	1.6.1.2	G													
			Drawings															
			SD-03 Product Data															
			Telecommunications Cabling	2.3	G													
			Patch Panels	2.4.5	G													
			Telecommunications	2.5	G													
			Outlet/Connector Assemblies															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		27 10 00	Equipment Support Frame	2.4.2	G													
			Connector Blocks	2.4.3	G													
			SD-06 Test Reports															
			Telecommunications Cabling	3.5.1	G													
			Testing															
			SD-07 Certificates															
			Telecommunications Contractor	1.6.2.1	G													
			Key Personnel	1.6.2.2	G													
			Manufacturer Qualifications	1.6.2.3	G													
			Test Plan	1.6.3	G													
			SD-09 Manufacturer's Field															
			Reports															
			Factory Reel Tests	2.11.1	G													
			SD-10 Operation and Maintenance															
			Data															
			Telecommunications Cabling and	1.10.1	G													
			Pathway System															
			SD-11 Closeout Submittals															
			Record Documentation	1.10.2	G													
		28 31 76	SD-01 Preconstruction Submittals															
			Qualified Fire Protection Engineer	1.3.2	G													
			(QFPE)															
			Fire alarm system designer	1.9.2.1	G													
			Supervisor	1.9.2.2	G													
			Technician	1.9.2.3	G													
			Installer	1.9.2.4	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		28 31 76	Test Technician	1.9.2.5	G													
			Fire Alarm System Site-Specific	1.7	G													
			Software Acknowledgement															
			SD-02 Shop Drawings															
			Nameplates	1.9.1.3	G													
			Instructions	2.2.4	G													
			Wiring Diagrams	1.9.1.4	G													
			System Layout	1.9.1.5	G													
			Notification Appliances	1.9.1.6	G													
			Initiating devices	1.9.1.7	G													
			Amplifiers	1.9.1.8	G													
			Battery Power	1.9.1.9	G													
			Voltage Drop Calculations	1.9.1.10	G													
			SD-03 Product Data															
			Fire Alarm and Mass Notification	2.3	G													
			Control Unit (FMCU)															
			Amplifiers	1.9.1.8	G													
			Tone Generators	2.4	G													
			Digitalized voice generators	2.4	G													
			Manual Stations	2.5	G													
			Smoke Detectors	2.6	G													
			Duct Smoke Detectors	2.6.2	G													
			Addressable Interface Devices	2.7	G													
			Addressable Control Modules	2.8	G													
			Notification Appliances	1.9.1.6	G													
			Batteries	2.11.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		28 31 76	Battery Chargers	2.11.2	G													
			Supplemental Notification	2.11.1.1	G													
			Appliance Circuit Panels															
			Auxiliary Power Supply Panels	2.11.1.1	G													
			Surge Protective Devices	2.12	G													
			Alarm Wiring	2.12	G													
			Back Boxes and Conduit	3.3.4	G													
			Ceiling Bridges	3.2.6	G													
			Terminal Cabinets	3.3.2	G													
			Digital Alarm Communicator	2.14.1	G													
			Transmitter (DACT)															
			Environmental Enclosures or	2.16	G													
			Guards															
			Document Storage Cabinet	3.11.3	G													
			SD-06 Test Reports															
			Test Procedures	3.7.1	G													
			SD-07 Certificates															
			Verification of Compliant	3.7.2.1	G													
			Installation															
			Request for Government Final	3.7.2.2	G													
			Test															
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	3.9	G													
			(O&M) Instructions															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		28 31 76	Instruction of Government	3.10	G													
			Employees															
			SD-11 Closeout Submittals															
			As-Built Drawings	1.9.1.13														
			Spare Parts	1.11.1														
		31 00 00	SD-01 Preconstruction Submittals															
			Disposition of Surplus Materials	3.8	G													
			Preconstruction Meeting	1.5.3	G													
			SD-06 Test Reports															
			Dewatering Performance Records	3.1.2.2	G													
			Material Test Report	3.9	G													
			Borrow Site Testing	3.2.2	G													
			Pipe Inspection Report	3.6.1.5	G													
		31 11 00	SD-03 Product Data															
			Tree Wound Paint	2.1.1														
			SD-04 Samples															
			Tree Wound Paint	2.1.1														
		31 31 16.13	SD-01 Preconstruction Submittals															
			Termiticide Application Plan	3.1.5	G													
			SD-03 Product Data															
			Termiticides	2.2.1														
			SD-05 Design Data															
			Mixing Formulation	3.2.2														
			SD-06 Test Reports															
			Soil Moisture	1.6.1														
			Calibration Test	3.2.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		31 31 16.13	SD-07 Certificates															
			Qualifications	1.4.2	G													
			Foundation Exterior	3.1.2														
			Utilities and Vents	3.1.3														
			Crawl and Plenum Air Spaces	3.1.4														
			List of Equipment	3.2.1														
			SD-08 Manufacturer's Instructions															
			Termiticides	2.2.1														
			SD-11 Closeout Submittals															
			Verification of Measurement	3.3.1														
			Warranty	1.7														
			Pest Management Report	3.4														
		32 05 33	SD-01 Preconstruction Submittals															
			Integrated Pest Management	3.3.2	G													
			Plan															
			SD-03 Product Data															
			Fertilizer	2.1	G													
			Mulches Topdressing	2.3														
			Organic Mulch Materials	2.3.2														
			SD-07 Certificates															
			Maintenance Inspection Report	3.5.1														
			SD-10 Operation and Maintenance															
			Data															
			Maintenance	1.6														
		32 11 23	SD-03 Product Data															
			Plant, Equipment, and Tools	2.3	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		32 11 23	SD-06 Test Reports															
			Initial Tests	2.2.1	G													
			In-Place Tests	3.13.1	G													
			Sampling And Testing	1.4	G													
			Field Density	1.4.2.4														
		32 11 26	SD-03 Product Data															
			Sources of Aggregates	1.3.4														
			Job Mix Formula	2.3.2	G													
			SD-06 Test Reports															
			Sources of Aggregates	1.3.4														
			Bituminous Materials	1.3.6														
			Bituminous Materials	2.2														
			Test Section	2.3.2	G													
			Service Record	1.3.4	G													
			SD-09 Manufacturer's Field															
			Reports															
			Batch Tickets	1.3.3														
		32 17 23.16	SD-01 Preconstruction Submittals															
			Quality Control Plan	1.3.1	G													
			Qualifications	1.3.2	G													
			Safety Data Sheets For Each	2.2	G													
			Paint Type															
			Safety Data Sheets For	2.1.1	G													
			Chemicals Used In Surface															
			Preparation															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		32 17 23.16	Data Sheets For Paint Removal	2.1.1	G													
			Equipment															
			Surface Preparation Equipment	2.1	G													
			List															
			Marking Applications Equipment	2.1.2	G													
			List															
			SD-03 Product Data															
			Manufacturer Data Sheets for all	2.2	G													
			Marking Materials															
			SD-06 Test Reports															
			Marking Application Wet Film	3.4.3.1	G													
			Thickness Test															
			Marking Application Wet Film	3.4.3.2	G													
			Thickness Test															
			SD-07 Certificates															
			Manufacturer Certificate of	2.2	G													
			Compliance for Marking Materials															
			Manufacturer Certificate of	1.5.1.3	G													
			Conformance for Volatile Organic															
			Compliance															
			SD-08 Manufacturer's Instructions															
			Marking Materials Storage and	1.4	G													
			Application															
			Chemicals Used in Surface	1.4	G													
			Preparation															
		32 31 14	SD-02 Shop Drawings															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		32 31 14	Fence Installation Drawings	3.2.1	G													
			SD-03 Product Data															
			Posts	2.1.2.1														
			Sleeves	3.2.3.2														
			Latches	2.1.5.1														
			Latches	3.2.4														
			Hinges	2.1.5.1														
			Stops	3.2.4														
			Keepers	3.2.4														
			Ornamental Fence Systems	2.1.1														
			Swing Gates	2.1.5.1														
			SD-07 Certificates															
			Gate Hardware and Accessories	3.2.1														
			Concrete	2.2.1														
		32 92 23	SD-03 Product Data															
			Fertilizer	2.4														
			SD-06 Test Reports															
			Topsoil composition tests	2.2.3														
			SD-07 Certificates															
			sods	2.1														
		32 93 00	SD-01 Preconstruction Submittals															
			State Landscape Contractor's	1.4.3														
			License															
			Time Restrictions and Planting	1.6														
			Conditions															
			SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		32 93 00	Gypsum	2.3.5														
			Mulch	2.7	G													
			Ground Stakes	2.8.1.2														
			Fertilizer	2.5														
			Weed Control Fabric	2.6	G													
			Staking Material	2.8.1														
			SD-06 Test Reports															
			Topsoil Composition Tests	2.2.2														
			SD-07 Certificates															
			Nursery Certifications	2.1.1														
		33 11 00	SD-01 Preconstruction Submittals															
			Connections	3.1.1	G													
			SD-03 Product Data															
			Pipe, Fittings, Joints and	2.1.1	G													
			Couplings															
			Valves	2.1.2	G													
			Valve Boxes	2.1.2.4	G													
			Pipe Restraint	2.2.1	G													
			Backflow Preventer	1.4.2.1.1	G													
			Disinfection Procedures	3.2.3	G													
			Post Indicator	2.2.6														
			SD-06 Test Reports															
			Backflow Preventer Tests	3.3.1.5	G													
			Bacteriological Samples	3.3.1.4	G													
			Leakage Test	3.3.1.3														
			Hydrostatic Test	3.3.1.1														

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		33 11 00	SD-07 Certificates															
			Pipe, Fittings, Joints and	2.1.1														
			Couplings															
			Lining	2.1.1.1.1														
			Lining	2.1.1.1.1														
			Lining for Fittings	2.1.1.2.1.2														
			Valves	2.1.2														
			Backflow Prevention Training	1.4.2.1.1.2														
			Certificate															
			Backflow Tester	1.4.2.1.1.1														
			Backflow Certificate	2.1.3														
			SD-08 Manufacturer’s Instructions															
			Ductile-Iron Piping	2.1.1.1														
			PVC Piping	2.1.1.2.1.1														
		33 30 00	SD-01 Preconstruction Submittals															
			Contractor's License	1.3.1	G													
			SD-02 Shop Drawings															
			Installation Drawings	3.1.1	G													
			SD-03 Product Data															
			Gravity Pipe	2.2.1														
			SD-06 Test Reports															
			Hydrostatic Sewer Test	3.3.1.1	G													
			Low-Pressure Air Tests	3.3.1.2.1	G													
			SD-07 Certificates															
			Portland Cement	2.2.2														
		33 40 00	SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		33 40 00	Pipe	2.1	G													
			SD-07 Certificates															
			Hydrostatic Test on Watertight	2.4.1	G													
			Joints															
			SD-08 Manufacturer’s Instructions															
			Placing Pipe	3.3	G													
		33 61 14	SD-02 Shop Drawings															
			Factory-prefabricated	2.1														
			preinsulated water piping system															
			field joints	3.2														
			SD-03 Product Data															
			Pipe, fittings, and end	2.1														
			connections															
			Factory-prefabricated	2.1														
			preinsulated water piping system															
			SD-07 Certificates															
			Certification of welders'	1.4.1														
			qualifications															
			SD-08 Manufacturer’s Instructions															
			factory-prefabricated preinsulated	2.1														
			water piping system															
		33 71 01	SD-03 Product Data															
			Conductors	2.5	G													
			Insulators	2.4	G													
			Cutouts	2.8	G													
			Surge Arresters	2.7	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		33 71 01	SD-06 Test Reports															
			Wood Crossarm Inspection	1.5.4														
			Report															
			Field Test Plan	1.5.4.1	G													
			Field Quality Control	3.2	G													
			Ground Resistance Test Reports	1.5.3	G													
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	1.6	G													
			Manuals															
			Operation and Maintenance	1.6.1	G													
			Manuals															
		33 71 02	SD-03 Product Data															
			Medium Voltage Cable	2.5	G													
			Medium Voltage Cable Joints	2.7	G													
			Medium Voltage Cable	2.6	G													
			Terminations															
			Live End Caps	2.9	G													
			SD-06 Test Reports															
			Medium Voltage Cable	2.13.2	G													
			Qualification and Production Tests															
			Field Acceptance Checks and	3.16.1	G													
			Tests															
			Arc-proofing Test	2.13.1	G													
			SD-07 Certificates															
			Cable splicer/terminator	1.5.1	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		33 71 02	Cable Installer Qualifications	1.5.2	G													
		33 82 00	SD-02 Shop Drawings															
			Telecommunications Outside	1.6.1.1	G													
			Plant															
			Telecommunications Entrance	1.6.1.2	G													
			Facility Drawings															
			SD-03 Product Data															
			Wire and Cable	2.7	G													
			Cable Splices, and Connectors	2.4	G													
			Closures	2.3	G													
			Building Protector Assemblies	2.2.1	G													
			Protector Modules	2.2.2	G													
			SD-06 Test Reports															
			Pre-installation Tests	3.4.1	G													
			Acceptance Tests	3.4.2	G													
			Outside Plant Test Plan	1.6.3	G													
			SD-07 Certificates															
			Telecommunications Contractor	1.6.2.1	G													
			Key Personnel	1.6.2.2	G													
			Manufacturer's Qualifications	1.6.2.3	G													
			SD-08 Manufacturer’s Instructions															
			Building Protector Assembly	2.2.1	G													
			Installation															
			Cable Tensions	3.1.7.1	G													
			Fiber Optic Splices	3.1.8.2	G													

SUBMITTAL REGISTER

CONTRACT NO.

TITLE AND LOCATION
Repair BEQ G702

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		33 82 00	SD-09 Manufacturer's Field															
			Reports															
			Factory Reel Test Data	2.13.1	G													
			SD-10 Operation and Maintenance															
			Data															
			Telecommunications Outside	1.6.1.1	G													
			Plant (OSP)															
			SD-11 Closeout Submittals															
			Record Documentation	1.8.1	G													

This page is intentionally left blank.

SECTION 01 33 29

SUSTAINABILITY REQUIREMENTS AND REPORTING
02/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

COUNCIL ON ENVIRONMENTAL QUALITY (CEQ) (WHITE HOUSE)

HPSB Guiding Principles	(2016) Guiding Principles for Sustainable Federal Buildings and Determining Compliance with the Guiding Principles for Sustainable Federal Buildings

INTERNATIONAL CODE COUNCIL (ICC)

ICC IgCC	(2018) International Green Construction Code

U.S. DEPARTMENT OF AGRICULTURE (USDA)

FSRIA 9002	Farm Security and Rural Investment Act Section 9002 (USDA BioPreferred Program)

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 1-200-02	(2020; with Change 1, 2020; Change 2, 2022) High Performance and Sustainable Building Requirements
UFC 3-600-01	(2016; with Change 6, 2021) Fire Protection Engineering for Facilities

U.S. DEPARTMENT OF ENERGY (DOE)

Energy Star	Energy Star Energy Efficiency Labeling System (FEMP)

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 247	Comprehensive Procurement Guideline for Products Containing Recovered Materials

1.2 SUMMARY

This section includes requirements for Sustainability documentation and reporting submittals per the federally mandated High Performance and Sustainable Building (HPSB) or HPSB "Guiding Principles" (GP), in accordance with UFC 1-200-02 High Performance and Sustainable Building Requirements, and other identified requirements.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Sustainability Action Plan; G

Preliminary Sustainability eNotebook; G

SD-11 Closeout Submittals

Final Sustainability eNotebook; G

Amended Final Sustainability eNotebook; G

1.4 GUIDING PRINCIPLES VALIDATION (GPV)

Provide the following sustainability activities and documentation to verify achievement of HPSB Guiding Principles Validation (GPV):

a. Analysis of each Guiding Principle Requirement and how project complies.

c. Documentation of all work required to incorporate the applicable HPSB Guiding Principles requirements indicated on the HPSB Checklist and in this contract, including all "S" submittals.

d. Sustainability Action Plan.

e. Construction related documentation for the project Sustainability eNotebook and keep updated with regularly-scheduled Construction Quality Control Meetings. Include construction related documentation containing the following components:

(1) HPSB Checklist(s)

(2) Sustainability Action Plan

(3) Documentation illustrating HPSB Guiding Principles Requirements compliance, including "S" submittals

1.4.1 Sustainability Action Plan

Include the following information in the Sustainability Action Plan:

a. Analysis of each HPSB Guiding Principles Requirement and how project will comply.

b. Name and contact information for: Contractor's Point of Contact (POC) ensuring sustainability goals are accomplished and documentation is assembled.

c. Indoor Air Quality plan.

1.4.2 Calculations

Provide all calculations, product data, labels and product certifications required in this specification to demonstrate compliance with the HPSB Guiding Principles Requirements.

1.5 SUSTAINABILITY SUBMITTALS

Provide documentation in the Sustainability eNotebook to indicate compliance with the sustainability requirements of the project.

1.5.1 "S" Submittals for Sustainability Documentation

"S" submittals are the sustainability documentation requirements cited in the various sections of this contract. Submit the GPV sustainability documentation required in this section as "S" submittals in all affected UFGS Sections.

a. Highlight GPV compliance data in "S" submittal.

b. Add "S" submittals to the Sustainability eNotebook only after submittal approval, and bookmark them as required in paragraph SUSTAINABILITY ENOTEBOOK below.

c. Ensure all approved "S" submittals are included in each Sustainability eNotebook submittal.

1.5.2 Sustainability eNotebook

The Sustainability eNotebook is an electronic organizational file that serves as a repository for all required sustainability submittals. Include all required data in Sustainability eNotebook, to support full compliance with the HPSB Guiding Principles Requirements, including:

a. Sustainability Action Plan

b. Calculations

c. Labels

d. "S" submittals

e. Certifications, assessments, or validations and compliance report

1.5.2.1 Sustainability eNotebook Format

Provide Sustainability eNotebook in the form of an Adobe PDF file; bookmark each HPSB Guiding Principles Requirement and sub-bookmark at each document. Match format to HPSB Guiding Principles numbering system indicated herein. Maintain up-to-date information, such as spreadsheets, templates, with each current submittals.

Contracting Officer may deduct from the monthly progress payment accordingly if Sustainability eNotebook information is not current and on track per project goals.

1.5.2.2 Sustainability eNotebook Submittal Schedule

Provide Sustainability eNotebook Submittals at the following milestones of the project:

a. Preliminary Sustainability eNotebook

Submit preliminary Sustainability eNotebook at the first post award meeting in accordance with Section 01 30 00 ADMINISTRATIVE REQUIREMENTS.

b. Construction Quality Control Meetings.

Provide up-to-date GP documentation in the Sustainability eNotebook for each meeting.

c. Final Sustainability eNotebook

Submit updated Sustainability eNotebook at Beneficial Occupancy Date (BOD). Final progress payment retainage may be held by Contracting Officer until Final Sustainability construction phase documentation is complete.

d. Amended Final Sustainability eNotebook

Amend and resubmit the Amended Final Sustainability eNotebook , to include post-occupancy corrections, updates, and requirements. Final progress payment retainage may be held by Contracting Officer until amended final sustainability documentation is complete. Submit the Amended Final Sustainability eNotebook Submittal on DVDs to the Contracting Officer no later than 30 days after final GP determination.

1.6 DOCUMENTATION REQUIREMENTS

a. Incorporate each of the following HPSB Guiding Principles requirements into project and provide documentation that proves compliance with each listed requirement. Items below are organized by HPSB Guiding Principles. For life-cycle cost analysis requirements, one document with all analyses is acceptable, with Contracting Officer approval.

b. For each of the following paragraphs that require the use of products listed on Government-required websites, provide documentation of the process used to select products, or process used to determine why listed products do not meet project performance requirements.

1.6.1 Energy Efficient Products

Provide only energy-using products that are Energy Star rated or have Federal Energy Management Program (FEMP) recommended efficiency. Where Energy Star or FEMP recommendations have not been established, provide most efficient products that are life-cycle cost-effective. Provide only energy using products that meet FEMP requirements for low standby power consumption. Energy efficient products can be found at: https://www.energy.gov/eere/femp/federal-energy-management-program and http://www.energystar.gov/.

For construction submittal documentation, provide proof that product is

labeled energy efficient and complies with the cited requirements.

1.6.2 Building-level Power Metering

Provide building-level meters for electricity, natural gas, and steam where applicable.

1.6.2.1 Construction Submittal Documentation

Provide manufacturer's data validating compatibility with base-wide system and component advanced meter requirements.

1.6.3 Indoor Water Use

Provide Construction Documentation proof that fixtures are labeled EPA WaterSense, for products available with EPA WaterSense labeling; for all other fixtures, proof they comply with EPA WaterSense efficiency requirements.

1.6.4 Indoor Water Metering

Provide building-level meters for potable water use. Provide the requirements cited in the following paragraphs:

1.6.4.1 Construction Submittal Documentation

Provide manufacturer's data validating compatibility with base-wide system and component advanced meter requirements.

1.6.5 Outdoor Water Use

Where new irrigation is required, provide only non-potable sources. Provide the requirements cited in the following paragraphs:

1.6.5.1 Construction Submittal Documentation

Provide manufacturer's data validating compatibility with base-wide system and component advanced meter requirements.

1.6.6 Outdoor Water Meters

Provide meters for outdoor systems that use potable water. Provide the requirements cited in the following paragraphs:

1.6.6.1 Construction Submittal Documentation

Provide manufacturer's data validating compatibility with base-wide system and component advanced meter requirements.

1.6.7 Moisture Control

Provide the following:

1.6.7.1 Construction Submittal Documentation

Ensure construction materials are separated and protected in accordance with other sections in this contract document, with adequate humidity controls during construction. In accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA, includes plan for ongoing building

moisture control.

Coordinate with the moisture control requirements of Section 01 45 00 QUALITY CONTROL.

1.6.8 Reduce Volatile Organic Compounds (VOC) (Low-Emitting Materials)

Meet the requirements of Table 3-1 at the end of this specification.

For Construction submittal documentation, provide certifications or labels that demonstrate compliance with cited requirements, based on the attached TABLE 3-1.

1.6.9 Indoor Air Quality During Construction

Prior to construction, create indoor air quality plan. Develop and implement an IAQ construction management plan during construction and flush building air before occupancy.

For new construction and for renovation of unoccupied existing buildings, meet the requirements of ICC IgCC 1001.3.1.5 (10.3.1.4) Indoor Air Quality (IAQ) Construction Management.

Provide documentation showing that after construction ends and prior to occupancy, HVAC filters were replaced and building air was flushed out in accordance with the cited standard.

1.6.10 Recycled Content

Comply with 40 CFR 247. Refer to: https://www.epa.gov/smm/comprehensive-procurement-guideline-cpg-program for assistance identifying products cited in 40 CFR 247. Selected products must comply with non-proprietary requirements of the Federal Acquisition Regulation and must meet performance requirements.

1.6.10.1 Construction Submittal Documentation

a. Provide manufacturers' documents stating the recycled content by material, or written justification for claiming one of the exceptions allowed on the cited website.

b. Substitutions: Submit for Government approval for proposed alternative products or systems that provide equivalent performance and appearance and have greater contribution to project recycled content requirements. For all such proposed substitutions, submit with the Sustainability Action Plan accompanied by product data demonstrating equivalence.

c. In order to complete compliance with FAR 52.223-9 Estimate of Percentage of Recovered Material Content for EPA Designated Items, refer to submittal requirement for recycled/recovered material content in Section 01 78 00 CLOSEOUT SUBMITTALS.

1.6.11 Bio-Based Products

Provide products and materials composed of the highest percentage of bio-based materials (including rapidly renewable resources and certified sustainably harvested products), consistent with FSRIA 9002 USDA BioPreferred Program, to the maximum extent possible without jeopardizing

the intended end use or detracting from the overall quality delivered to the end user and when available at a reasonable cost. Use only supplies and materials of a type and quality that conform to applicable specifications and standards.

Comply with FSRIA 9002 USDA BioPreferred Program. Refer to www.biopreferred.gov for the product categories and BioPreferred Catalog. Selected products must comply with non-proprietary requirements of the Federal Acquisition Regulation and must meet performance requirements. Provide the following documentation:

a. USDA BioPreferred label for each product; for bio-based products used on project but not listed with BioPreferred program, provide bio-based content and percentage.

b. In order to complete compliance with FAR 52.223-1 Biobased Product Certification, refer to submittal requirement for biobased products in Section 01 78 00 CLOSEOUT SUBMITTALS, paragraphs CERTIFICATION OF EPA DESIGNATED ITEMS and CERTIFICATION OF USDA DESIGNATED ITEMS.

1.6.12 Waste Material Management (Recycling – Construction)

Divert demolition and construction debris in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 SUSTAINABILITY COORDINATION

Provide sustainability focus and coordination at all meetings to achieve sustainability goals. Coordinate meeting requirements with other UFGS Sections meeting requirements in this project. Ensure the designated sustainability professional responsible for GP documentation participates in these meetings to coordinate documentation completion. Review GP sustainability requirements, Sustainability Action Plan, and completeness status of Sustainability eNotebook at the following meetings:

a. Pre-Construction Conference

b. Construction Quality Control Meetings

c. Facility Turnover Meetings

Conduct review no later than 60 days before final turnover and identify any outstanding issues that affect correct completion of all documentation, and actions that will achieve requirements. Conduct corrective actions prior to turnover, to ensure all requirements are achieved.

3.2 TABLE 3-1 VOLATILE ORGANIC COMPOUNDS (VOC) (LOW EMITTING MATERIALS) REQUIREMENTS

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements

Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)

MATERIAL CATEGORY	EMISSIONS REQUIREMENT		MATERIALS WITH ADDED VOC REQUIREMENT	EMISSIONS REQUIREMENTS
Adhesives and Sealants	**CDPH/EHLB/Standard method V1.1 (California Section 01350)** (Use "office" or "classroom" space limits for all applications)	or	Adhesives (carpet, resilient, wood flooring; base cove; ceramic tile; drywall and panel; primers) Sealants (acoustical; firestop; HVAC Air duct; primers) Caulks	**SCAQMD Rule 1168** (Use "other" category for HVAC duct sealant) (for firestop adhesive, UFC 3-600-01 overrides conflicting requirements)
			Aerosol adhesives	**Section 3 of Green Seal Standard GS-36** (except: cleaners, solvent cements, and primers used with plastic piping and conduit in plumbing, fire suppression, and electrical systems; HVAC air duct sealants when the application space air temp is less than 40 F (4.5 C).

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements

Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)

MATERIAL CATEGORY	EMISSIONS REQUIREMENT		MATERIALS WITH ADDED VOC REQUIREMENT	EMISSIONS REQUIREMENTS
Paints and Coatings	**CDPH/EHLB/Standard method V1.1 (California Section 01350)** (Use "office" or "classroom" space limits for all applications)	or	Flat and nonflat, nonflat high-gloss, specialty, basement specialty, fire-resistive, floor, low-solids, rust preventative, wood, reflective wall coatings; concrete/masonry sealers; primers; sealers; undercoaters; shellacs (clear and opaque); stains; varnishes; conjugated oil varnish; lacquer; clear brushing lacquer	**Green Seal Standard GS-11**

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements

Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)

MATERIAL CATEGORY	EMISSIONS REQUIREMENT		MATERIALS WITH ADDED VOC REQUIREMENT	EMISSIONS REQUIREMENTS
Paints and Coatings	**CDPH/EHLB/Standard method V1.1 (California Section 01350)** (Use "office" or "classroom" space limits for all applications)	or	Concrete curing compounds; dry fog, faux finishing, graphic arts (sign paints), industrial maintenance, mastic texture, metallic pigmented, multicolor, recycled coatings; pretreatment wash primers, reactive penetrating sealers; specialty primers, wood preservatives, and zinc primers	**California Air Resources Board (CARB) Suggested Control Measure for Architectural Coatings** or **SCAQMD Rule 1113r**
Paints and Coatings	**CDPH/EHLB/Standard method V1.1 (California Section 01350)** (Use "office" or "classroom" space limits for all applications)	or	High-temperature coatings; stone consolidants; swimming-pool coatings; tub- and tile-refining coatings; and waterproofing membranes	**California Air Resources Board (CARB) Suggested Control Measure for Architectural Coatings**

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)				
MATERIAL CATEGORY	**EMISSIONS REQUIREMENT**		**MATERIALS WITH ADDED VOC REQUIREMENT**	**EMISSIONS REQUIREMENTS**
Floor Covering Materials	For carpet, all locations: **CDPH/EHLB/Standard Method V1.1 (California Section 01350)** or label for **Section 9** of **CDPH/EHLB/Standard Method V1.1 (California Section 01350)**		none	none
Insulation	**CDPH/EHLB/Standard method V1.1** (California Section 01350) (Use "office" or "classroom" space limits for all applications)		none	none

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements

Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)

MATERIAL CATEGORY	EMISSIONS REQUIREMENT		MATERIALS WITH ADDED VOC REQUIREMENT	EMISSIONS REQUIREMENTS
Composite Wood, Wood Structural Panel, and Agrifiber Products, no added urea-formaldehyde resins including laminating adhesives for composite wood and agrifiber assemblies - particleboard, medium density fiberboard (MDF), wheatboard, strawboard, panel substrates, door cores	Third-party certification (approved by CARB) of **California Air Resource Board's (CARB) regulation**, Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Products	or	none	**CDPH/EHLB/Standard method V1.1** (California Section 01350) (Use "office" or "classroom" space limits for all applications) (except: Structural panel components such as plywood, particle board, wafer board, and oriented strand board identified as "EXPOSURE 1," "EXTERIOR," or "HUD-APPROVED" are considered acceptable for interior use.)
Office Furniture Systems and Seating installed prior to occupancy	**ANSI/BIFMA X7.1 ANSI/BIFMA X7.1:** (95-percent of installed office furniture system workstations and seating units) **Section 7.6.2 of ANSI/BIFMA e3** (50-percent of office furniture system workstations and seating units)		none	none

TABLE 3-1 Volatile Organic Compounds (VOC) (Low Emitting Materials) Requirements Source: ICC IgCC Chapter 8 (Materials) (Interior Applications Only)				
MATERIAL CATEGORY	**EMISSIONS REQUIREMENT**		**MATERIALS WITH ADDED VOC REQUIREMENT**	**EMISSIONS REQUIREMENTS**
Ceiling and Wall assemblies and systems including: acoustical treatments; ceiling panels and tiles; tackable wall panels and coverings; wall coverings; wall and ceiling paneling and planking	**CDPH/EHLB/Standard method V1.1 (California Section 01350)** (Use "office" or "classroom" space limits for all applications)		none	none

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 35 26

GOVERNMENTAL SAFETY REQUIREMENTS
11/20, CHG 3: 02/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B30.3	(2020) Tower Cranes
ASME B30.5	(2021) Mobile and Locomotive Cranes
ASME B30.7	(2021) Winches
ASME B30.8	(2020) Floating Cranes and Floating Derricks
ASME B30.9	(2018) Slings
ASME B30.20	(2018) Below-the-Hook Lifting Devices
ASME B30.22	(2016) Articulating Boom Cranes
ASME B30.23	(2016) Personnel Lifting Systems Safety Standard for Cableways, Cranes, Derricks, Hoists, Hooks, Jacks, and Slings
ASME B30.26	(2015; R 2020) Rigging Hardware

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP A10.22	(2007; R 2017) Safety Requirements for Rope-Guided and Non-Guided Workers' Hoists
ASSP A10.34	(2021) Protection of the Public on or Adjacent to Construction Sites
ASSP A10.44	(2020) Control of Energy Sources (Lockout/Tagout) for Construction and Demolition Operations
ASSP Z244.1	(2016) The Control of Hazardous Energy Lockout, Tagout and Alternative Methods
ASSP Z359.0	(2018) Definitions and Nomenclature Used for Fall Protection and Fall Arrest
ASSP Z359.1	(2020) The Fall Protection Code
ASSP Z359.2	(2017) Minimum Requirements for a Comprehensive Managed Fall Protection

	Program
ASSP Z359.3	(2019) Safety Requirements for Lanyards and Positioning Lanyards
ASSP Z359.4	(2013) Safety Requirements for Assisted-Rescue and Self-Rescue Systems, Subsystems and Components
ASSP Z359.6	(2016) Specifications and Design Requirements for Active Fall Protection Systems
ASSP Z359.7	(2019) Qualification and Verification Testing of Fall Protection Products
ASSP Z359.11	(2014) Safety Requirements for Full Body Harnesses
ASSP Z359.12	(2019) Connecting Components for Personal Fall Arrest Systems
ASSP Z359.13	(2013) Personal Energy Absorbers and Energy Absorbing Lanyards
ASSP Z359.14	(2014) Safety Requirements for Self-Retracting Devices for Personal Fall Arrest and Rescue Systems
ASSP Z359.15	(2014) Safety Requirements for Single Anchor Lifelines and Fall Arresters for Personal Fall Arrest Systems
ASSP Z359.16	(2016) Safety Requirements for Climbing Ladder Fall Arrest Systems
ASSP Z359.18	(2017) Safety Requirements for Anchorage Connectors for Active Fall Protection Systems

ASTM INTERNATIONAL (ASTM)

ASTM F855	(2019) Standard Specifications for Temporary Protective Grounds to Be Used on De-energized Electric Power Lines and Equipment

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 1048	(2016) Guide for Protective Grounding of Power Lines
IEEE C2	(2023) National Electrical Safety Code

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA Z535.2	(2011; R 2017) Environmental and Facility Safety Signs

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 10	(2026) Standard for Portable Fire Extinguishers
NFPA 51B	(2019; TIA 20-1) Standard for Fire Prevention During Welding, Cutting, and Other Hot Work
NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 70E	(2024) Standard for Electrical Safety in the Workplace
NFPA 241	(2022) Standard for Safeguarding Construction, Alteration, and Demolition Operations

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)

TIA-222	(2018H; Add 1 2019) Structural Standard for Antenna Supporting Structures and Antennas and Small Wind Turbine Support Structures
TIA-1019	(2012; R 2016) Standard for Installation, Alteration and Maintenance of Antenna Supporting Structures and Antennas

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

10 CFR 20	Standards for Protection Against Radiation
29 CFR 1910	Occupational Safety and Health Standards
29 CFR 1910.146	Permit-required Confined Spaces
29 CFR 1910.147	The Control of Hazardous Energy (Lock Out/Tag Out)
29 CFR 1910.333	Selection and Use of Work Practices
29 CFR 1915	Confined and Enclosed Spaces and Other Dangerous Atmospheres in Shipyard Employment
29 CFR 1915.89	Control of Hazardous Energy (Lockout/Tags-Plus)
29 CFR 1919	Gear Certification

29 CFR 1926	Safety and Health Regulations for Construction
29 CFR 1926.16	Rules of Construction
29 CFR 1926.450	Scaffolds
29 CFR 1926.500	Fall Protection
29 CFR 1926.552	Material Hoists, Personal Hoists, and Elevators
29 CFR 1926.553	Base-Mounted Drum Hoists
29 CFR 1926.1400	Cranes and Derricks in Construction
49 CFR 173	Shippers - General Requirements for Shipments and Packagings
CPL 02-01-056	(2014) Inspection Procedures for Accessing Communication Towers by Hoist
CPL 2.100	(1995) Application of the Permit-Required Confined Spaces (PRCS) Standards, 29 CFR 1910.146

1.2 DEFINITIONS

1.2.1 Competent Person (CP)

The CP is a person designated in writing, who, through training, knowledge and experience, is capable of identifying, evaluating, and addressing existing and predictable hazards in the working environment or working conditions that are dangerous to personnel, and who has authorization to take prompt corrective measures with regards to such hazards.

1.2.2 Competent Person, Confined Space

The CP, Confined Space, is a person meeting the competent person requirements as defined EM 385-1-1 Appendix Q, with thorough knowledge of OSHA’s Confined Space Standard, 29 CFR 1910.146, and designated in writing to be responsible for the immediate supervision, implementation and monitoring of the confined space program, who through training, knowledge and experience in confined space entry is capable of identifying, evaluating and addressing existing and potential confined space hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

1.2.3 Competent Person, Cranes and Rigging

The CP, Cranes and Rigging, as defined in EM 385-1-1 Appendix Q, is a person meeting the competent person requirements, who has been designated in writing to be responsible for the immediate supervision, implementation and monitoring of the Crane and Rigging Program, who through training, knowledge and experience in crane and rigging is capable of identifying, evaluating and addressing existing and potential hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

1.2.4 Competent Person, Excavation/Trenching

A CP, Excavation/Trenching, is a person meeting the competent person requirements as defined in EM 385-1-1 Appendix Q and 29 CFR 1926, who has been designated in writing to be responsible for the immediate supervision, implementation and monitoring of the excavation/trenching program, who through training, knowledge and experience in excavation/trenching is capable of identifying, evaluating and addressing existing and potential hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

1.2.5 Competent Person, Fall Protection

The CP, Fall Protection, is a person meeting the competent person requirements as defined in EM 385-1-1 Appendix Q and in accordance with ASSP Z359.0, who has been designated in writing by the employer to be responsible for immediate supervising, implementing and monitoring of the fall protection program, who through training, knowledge and experience in fall protection and rescue systems and equipment, is capable of identifying, evaluating and addressing existing and potential fall hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

1.2.6 Competent Person, Scaffolding

The CP, Scaffolding is a person meeting the competent person requirements in EM 385-1-1 Appendix Q, and designated in writing by the employer to be responsible for immediate supervising, implementing and monitoring of the scaffolding program. The CP for Scaffolding has enough training, knowledge and experience in scaffolding to correctly identify, evaluate and address existing and potential hazards and also has the authority to take prompt corrective measures with regard to these hazards. CP qualifications must be documented including experience on the specific scaffolding systems/types being used, assessment of the base material that the scaffold will be erected upon, load calculations for materials and personnel, and erection and dismantling. The CP for scaffolding must have a documented minimum of 8-hours of scaffold training to include training on the specific type of scaffold being used (e.g. mast-climbing, adjustable, tubular frame), in accordance with EM 385-1-1 Section 22.B.02.

1.2.7 Competent Person (CP) Trainer

A competent person trainer as defined in EM 385-1-1 Appendix Q, who is qualified in the training material presented, and who possesses a working knowledge of applicable technical regulations, standards, equipment and systems related to the subject matter on which they are training Competent Persons. A competent person trainer must be familiar with the typical hazards and the equipment used in the industry they are instructing. The training provided by the competent person trainer must be appropriate to that specific industry. The competent person trainer must evaluate the knowledge and skills of the competent persons as part of the training process.

1.2.8 High Risk Activities

High Risk Activities are activities that involve work at heights, crane and rigging, excavations and trenching, scaffolding, electrical work, and confined space entry.

1.2.9 High Visibility Accident

A High Visibility Accident is any mishap which may generate publicity or high visibility.

1.2.10 Load Handling Equipment (LHE)

LHE is a term used to describe cranes, hoists and all other hoisting equipment (hoisting equipment means equipment, including crane, derricks, hoists and power operated equipment used with rigging to raise, lower or horizontally move a load).

1.2.11 Medical Treatment

Medical Treatment is treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even when provided by a physician or registered personnel.

1.2.12 Near Miss

A Near Miss is a mishap resulting in no personal injury and zero property damage, but given a shift in time or position, damage or injury may have occurred (e.g., a worker falls off a scaffold and is not injured; a crane swings around to move the load and narrowly misses a parked vehicle).

1.2.13 Operating Envelope

The Operating Envelope is the area surrounding any crane or load handling equipment. Inside this "envelope" is the crane, the operator, riggers and crane walkers, other personnel involved in the operation, rigging gear between the hook, the load, the crane's supporting structure (i.e. ground or rail), the load's rigging path, the lift and rigging procedure.

1.2.14 Qualified Person (QP)

The QP is a person designated in writing, who, by possession of a recognized degree, certificate, or professional standing, or extensive knowledge, training, and experience, has successfully demonstrated their ability to solve or resolve problems related to the subject matter, the work, or the project.

1.2.15 Qualified Person, Fall Protection (QP for FP)

A QP for FP is a person meeting the definition requirements of EM 385-1-1 Appendix Q, and ASSP Z359.2 standard, having a recognized degree or professional certificate and with extensive knowledge, training and experience in the fall protection and rescue field who is capable of designing, analyzing, and evaluating and specifying fall protection and rescue systems.

1.2.16 Recordable Injuries or Illnesses

Recordable Injuries or Illnesses are any work-related injury or illness that results in:

a. Death, regardless of the time between the injury and death, or the length of the illness;

b. Days away from work (any time lost after day of injury/illness onset);

c. Restricted work;

d. Transfer to another job;

e. Medical treatment beyond first aid;

f. Loss of consciousness; or

g. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (a) through (f) above

1.2.17 Government Property and Equipment

Interpret "USACE" property and equipment specified in USACE EM 385-1-1 as Government property and equipment.

1.2.18 Load Handling Equipment (LHE) Accident or Load Handling Equipment Mishap

A LHE accident occurs when any one or more of the eight elements in the operating envelope fails to perform correctly during operation, including operation during maintenance or testing resulting in personnel injury or death; material or equipment damage; dropped load; derailment; two-blocking; overload; or collision, including unplanned contact between the load, crane, or other objects. A dropped load, derailment, two-blocking, overload and collision are considered accidents, even though no material damage or injury occurs. A component failure (e.g., motor burnout, gear tooth failure, bearing failure) is not considered an accident solely due to material or equipment damage unless the component failure results in damage to other components (e.g., dropped boom, dropped load, or roll over). Document an LHE mishap or accident using the NAVFAC prescribed Navy Crane Center (NCC) accident form.

1.3 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

APP - Construction; G

Dive Operations Plan; G

Accident Prevention Plan (APP); G

SD-06 Test Reports

Monthly Exposure Reports

Notifications and Reports

Accident Reports; G

LHE Inspection Reports

SD-07 Certificates

Contractor Safety Self-Evaluation Checklist

Crane Operators/Riggers

Standard Lift Plan; G

Critical Lift Plan ; G

Naval Architecture Analysis; G

Activity Hazard Analysis (AHA)

Confined Space Entry Permit

Hot Work Permit

Certificate of Compliance

Third Party Certification of Floating Cranes and Barge-Mounted Mobile Cranes

License Certificates

Radiography Operation Planning Work Sheet; G

Portable Gauge Operations Planning Worksheet; G

1.4 MONTHLY EXPOSURE REPORTS

Provide a Monthly Exposure Report and attach to the monthly billing request. This report is a compilation of employee-hours worked each month for all site workers, both Prime and subcontractor. Failure to submit the report may result in retention of up to 10 percent of the voucher.

1.5 CONTRACTOR SAFETY SELF-EVALUATION CHECKLIST

Contracting Officer will provide a "Contractor Safety Self-Evaluation checklist" to the Contractor at the pre-construction meeting. Complete the checklist monthly and submit with each request for payment voucher. An acceptable score of 90 or greater is required. Failure to submit the completed safety self-evaluation checklist or achieve a score of at least 90 may result in retention of up to 10 percent of the voucher. The Contractor Safety Self-Evaluation checklist can be found on the Whole Building Design Guide website at www.wbdg.org/ffc/dod/unified-facilities-guide-specifications-ufgs/ufgs-01-35-26

1.6 REGULATORY REQUIREMENTS

In addition to the detailed requirements included in the provisions of this Contract, comply with the most recent edition of USACE EM 385-1-1, and the following federal, state, and local laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards to the appropriate administrative agency for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern.

1.6.1 Subcontractor Safety Requirements

For this Contract, neither Contractor nor any subcontractor may enter into Contract with any subcontractor that fails to meet the following requirements. The term subcontractor in this and the following paragraphs means any entity holding a Contract with the Contractor or with a subcontractor at any tier.

1.6.1.1 Experience Modification Rate (EMR)

Subcontractors on this Contract must have an effective EMR less than or equal to 1.10, as computed by the National Council on Compensation Insurance (NCCI) or if not available, as computed by the state agency's rating bureau in the state where the subcontractor is registered, when entering into a subcontract agreement with the Prime Contractor or a subcontractor at any tier. The Prime Contractor may submit a written request for additional consideration to the Contracting Officer where the specified acceptable EMR range cannot be achieved. Relaxation of the EMR range will only be considered for approval on a case-by-case basis for special conditions and must not be anticipated as tacit approval. Contractor's Site Safety and Health Officer (SSHO) must collect and maintain the certified EMR ratings for all subcontractors on the project and make them available to the Government at the Government's request.

1.6.1.2 OSHA Days Away from Work, Restricted Duty, or Job Transfer (DART) Rate

Subcontractors on this Contract must have a DART rate, calculated from the most recent, complete calendar year, less than or equal to 3.4 when entering into a subcontract agreement with the Prime Contractor or a subcontractor at any tier. The OSHA Dart Rate is calculated using the following formula:

(N/EH) x 200,000

where:

N = number of injuries and illnesses with days away, restricted work, or job transfer

EH = total hours worked by all employees during most recent, complete calendar year

200,000 = base for 100 full-time equivalent workers (working 40 hours per week, 50 weeks per year)

The Prime Contractor may submit a written request for additional consideration to the Contracting Officer where the specified acceptable OSHA Dart rate range cannot be achieved for a particular subcontractor. Relaxation of the OSHA DART rate range will only be considered for approval on a case-by-case basis for special conditions and must not be anticipated as tacit approval. Contractor's Site Safety and Health Officer (SSHO) must collect and maintain self-certified OSHA DART rates for all subcontractors on the project and make them available to the Government at the Government's request.

1.7 SITE QUALIFICATIONS, DUTIES, AND MEETINGS

1.7.1 Personnel Qualifications

1.7.1.1 Site Safety and Health Officer (SSHO)

Provide an SSHO that meets the requirements of EM 385-1-1 Section 1. The SSHO must ensure that the requirements of 29 CFR 1926.16 are met for the project. Provide a Safety oversight team that includes a minimum of one person at each project site to function as the Site Safety and Health Officer (SSHO). The SSHO or an equally-qualified Alternate SSHO must be at the work site at all times to implement and administer the Contractor's safety program and Government-accepted Accident Prevention Plan. The SSHO and Alternate SSHO must have the required training, experience, and qualifications in accordance with EM 385-1-1 Section 01.A.17, and all associated sub-paragraphs.

If the SSHO is off-site for a period longer than 24 hours, an equally-qualified alternate SSHO must be provided and must fulfill the same roles and responsibilities as the primary SSHO. When the SSHO is temporarily (up to 24 hours) off-site, a Designated Representative (DR), as identified in the AHA may be used in lieu of an Alternate SSHO, and must be on the project site at all times when work is being performed. Note that the DR is a collateral duty safety position, with safety duties in addition to their full time occupation.

1.7.1.2 Competent Person Qualifications

Provide Competent Persons in accordance with EM 385-1-1, Appendix Q and herein. Competent Persons for high risk activities include confined space, cranes and rigging, excavation/trenching, fall protection, and electrical work. The CP for these activities must be designated in writing, and meet the requirements for the specific activity (i.e. competent person, fall protection).

The Competent Person identified in the Contractor's Safety and Health Program and accepted Accident Prevention Plan, must be on-site at all times when the work that presents the hazards associated with their professional expertise is being performed. Provide the credentials of the Competent Persons(s) to the Contracting Officer for information in consultation with the Safety Office.

1.7.1.2.1 Competent Person for Confined Space Entry

Provide a Confined Space (CP) Competent Person who meets the requirements of EM 385-1-1, Appendix Q, and herein. The CP for Confined Space Entry must supervise the entry into each confined space in accordance with EM 385-1-1, Section 34.

When the work involves marine operations that handle combustible or hazardous materials, this qualified person shall be a NFPA certified marine chemist.

1.7.1.2.2 Competent Person for the Health Hazard Control and Respiratory Protection Program

Provide a competent person meeting the requirements of EM 385-1-1 who is:

a. Capable by education, specialized training and/or experience of

anticipating, recognizing, and evaluating employee exposure to hazardous chemical, physical and biological agents in accordance with USACE EM 385-1-1, Section 6.

b. Capable of specifying necessary controls and protective actions to ensure worker health.

1.7.1.2.3 Competent Person for Scaffolding

Provide a Competent Person for Scaffolding who meets the requirements of EM 385-1-1, Section 22.B.02 and herein.

1.7.1.2.4 Competent Person for Fall Protection

Provide a Competent Person for Fall Protection who meets the requirements of EM 385-1-1, Section 21.C.04, 21.B.03, and herein.

1.7.1.3 Qualified Trainer Requirements

Individuals qualified to instruct the 40 hour contract safety awareness course, or portions thereof, must meet the definition of a Competent Person Trainer, and, at a minimum, possess a working knowledge of the following subject areas: EM 385-1-1, Electrical Standards, Lockout/Tagout, Fall Protection, Confined Space Entry for Construction; Excavation, Trenching and Soil Mechanics, and Scaffolds in accordance with 29 CFR 1926.450, Subpart L.

Instructors are required to:

a. Prepare class presentations that cover construction-related safety requirements.

b. Ensure that all attendees attend all sessions by using a class roster signed daily by each attendee. Maintain copies of the roster for at least five years. This is a certification class and must be attended 100 percent. In cases of emergency where an attendee cannot make it to a session, the attendee can make it up in another class session for the same subject.

c. Update training course materials whenever an update of the EM 385-1-1 becomes available.

d. Provide a written exam of at least 50 questions. Students are required to answer 80 percent correctly to pass.

e. Request, review and incorporate student feedback into a continuous course improvement program.

1.7.1.4 Dredging Contract Requirements

1.7.1.4.1 Dredging Safety Personnel Requirements

a. Provide a minimum of one SSHO assigned per project site for the primary working shift.

b. For a project involving multiple work shifts, provide one collateral duty SSHO for each additional shift.

c. For individual dredging projects or sites with a dredge crew and fill

crew on watch of eight employees or less, a CDSO must be appointed, instead of an SSHO. The CDSO assumes the same responsibilities as a full-time SSHO.

d. An example of one dredging project site is reflected in each of the following:

(1) a mechanical dredge, tug(s) and scow(s), scow route, and material placement site; or

(2) a hydraulic pipeline dredge, attendant plant, and material placement site; or,

(3) a hopper dredge (include land-based material placement site - if applicable.)

e. For Hopper Dredges with the U.S. Coast Guard, documented crews may designate an officer as a Collateral Duty Safety Officer (CDSO) instead of having a full-time SSHO onboard if the officer meets the SSHO training and experience requirements.

1.7.1.4.2 SSHO Requirements for Dredging

a. In addition to requirements stated elsewhere in this specification, an individual serving as a SSHO must be present at the project site, located so that they have full mobility and reasonable access to all major work operations, for at least one shift in each 24 hour period when work is being performed. The SSHO must be available during their shift for immediate verbal consultation and notification, either by phone or radio.

b. The SSHO is a full-time, dedicated position, except as noted above, who must report to a senior project (or corporate) official. When the SSHO is permitted to be a collateral duty, the SSHO is not permitted to be in another position requiring continuous mechanical or equipment operations, such as equipment operators.

c. The SSHO must inspect all work areas and operations during initial set-up and at least monthly observe and provide personal oversight on each shift during dredging operations for projects with many work sites, more often for those with less work sites.

1.7.1.4.3 Collateral Duty Safety Officer (CDSO) Requirements for Dredging

a. A CDSO is an individual who is assigned collateral duty safety responsibilities in addition to their full-time occupation, and who supports and supplements the SSHO efforts in managing, implementing and enforcing the Contractor's Safety and Health Program. The assigned CDSO must be an individual(s) with work oversight responsibilities, such as master, mate, fill foreman, or superintendent. A CDSO must not be an employee responsible for continuous mechanical or equipment operations, such as an equipment operator.

b. A CDSO performs safety program tasks as assigned by the SSHO and must report safety findings to the SSHO. The SSHO must document results of safety findings and provide information for inclusion in the CQC reports to the Contracting Officer.

1.7.1.4.4 Safety Personnel Training Requirements for Dredging

A SSHO and a CDSO for dredging Contracts must take either a formal classroom or online OSHA 30-hour Construction Safety Course, or an equivalent 30 hours of formal classroom or online safety and health training covering the subjects of the OSHA 30-hour Course in accordance with EM 385-1-1 Appendix A, paragraph 3.d.(3), applicable to dredging work, and given by qualified instructors. In exception to EM 385-1-1, Section 01.A.17, comply with the following:

a. The SSHO must maintain competency through having taken 8 hours of formal classroom or online safety and health related coursework every year. Hours spent as an instructor in such courses will be considered the same as attending them, but each course only gets credit once (for example, instructing a 1-hour asbestos awareness course five times in a year provides one hour credit for training).

b. The SSHO and a CDSO must have a minimum of three years of experience within the past five years in one of the following:

(1) Supervising/managing dredging activities

(2) Supervising/managing marine construction activities

(3) Supervising/managing land-based construction activities

(4) Work managing safety programs or processes

(5) Conducting hazard analyses and developing controls in activities or environments with similar hazards

1.7.1.5 Crane Operators/Riggers

Provide Operators, Signal Persons, and Riggers meeting the requirements in EM 385-1-1, Section 15.B for Riggers and Section 16.B for Crane Operators and Signal Persons. In addition, for mobile cranes with Original Equipment Manufacturer (OEM) rated capacities of 50,000 pounds or greater, designate crane operators qualified by a source that qualifies crane operators (i.e., union, a Government agency, or an organization that tests and qualifies crane operators). Provide proof of current qualification.

1.7.2 Personnel Duties

1.7.2.1 Duties of the Site Safety and Health Officer (SSHO)

The SSHO must:

a. Conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Attach safety inspection logs to the Contractors' daily production report.

b. Conduct mishap investigations and complete required accident reports. Report mishaps and near misses.

c. Use and maintain OSHA's Form 300 to log work-related injuries and illnesses occurring on the project site for Prime Contractors and subcontractors, and make available to the Contracting Officer upon

request. Post and maintain the Form 300A on the site Safety Bulletin Board.

d. Maintain applicable safety reference material on the job site.

e. Attend the pre-construction meeting, pre-work meetings including preparatory meetings, and periodic in-progress meetings.

f. Review the APP and AHAs for compliance with EM 385-1-1, and approve, sign, implement and enforce them.

g. Establish a Safety and Occupational Health (SOH) Deficiency Tracking System that lists and monitors outstanding deficiencies until resolution.

h. Ensure subcontractor compliance with safety and health requirements.

i. Maintain a list of hazardous chemicals on site and their material Safety Data Sheets (SDS).

j. Maintain a weekly list of high hazard activities involving energy, equipment, excavation, entry into confined space, and elevation, and be prepared to discuss details during QC Meetings.

k. Provide and keep a record of site safety orientation and indoctrination for Contractor employees, subcontractor employees, and site visitors.

Superintendent, QC Manager, and SSHO are subject to dismissal if the above or any other required duties are not being effectively carried out. If either the Superintendent, QC Manager, or SSHO are dismissed, project work will be stopped and will not be allowed to resume until a suitable replacement is approved and the above duties are again being effectively carried out.

1.7.3 Meetings

1.7.3.1 Preconstruction Meeting

a. Contractor representatives who have a responsibility or significant role in accident prevention on the project must attend the preconstruction meeting. This includes the project superintendent, Site Safety and Occupational Health Officer, quality control manager, or any other assigned safety and health professionals who participated in the development of the APP (including the Activity Hazard Analyses (AHAs) and special plans, program and procedures associated with it).

b. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the Contract. This list of proposed AHAs will be reviewed and an agreement will be reached between the Contractor and the Contracting Officer as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, and Government review of AHAs to preclude project delays.

c. Deficiencies in the submitted APP, identified during the Contracting Officer's review, must be corrected, and the APP re-submitted for review prior to the start of construction. Work is not permitted to

begin until an APP is established that is acceptable to the Contracting Officer.

1.7.3.2 Safety Meetings

Conduct safety meetings to review past activities, plan for new or changed operations, review pertinent aspects of appropriate AHA (by trade), establish safe working procedures for anticipated hazards, and provide pertinent Safety and Occupational Health (SOH) training and motivation. Conduct meetings at least once a month for all supervisors at the project location. The SSHO, supervisors, foremen, or CDSOs must conduct meetings at least once a week for the trade workers. Document meeting minutes to include the date, persons in attendance, subjects discussed, and names of individual(s) who conducted the meeting. Maintain documentation on-site and furnish copies to the Contracting Officer on request. Notify the Contracting Officer of all scheduled meetings 7 calendar days in advance.

1.8 ACCIDENT PREVENTION PLAN (APP)

1.8.1 APP - Construction

A qualified person must prepare the written site-specific APP. Prepare the APP in accordance with the format and requirements of EM 385-1-1, Appendix A, and as supplemented herein. Cover all paragraph and subparagraph elements in EM 385-1-1, Appendix A. The APP must be job-specific and address any unusual or unique aspects of the project or activity for which it is written. The APP must interface with the Contractor's overall safety and health program referenced in the APP in the applicable APP element, and made site-specific. Describe the methods to evaluate past safety performance of potential subcontractors in the selection process. Also, describe innovative methods used to ensure and monitor safe work practices of subcontractors. The Government considers the Prime Contractor to be the "controlling authority" for all work site safety and health of the subcontractors. Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the Contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out. The APP must be signed by an officer of the firm (Prime Contractor senior person), the individual preparing the APP, the on-site superintendent, the designated SSHO, the Contractor Quality Control Manager, and any designated Certified Safety Professional (CSP) or Certified Health Physicist (CIH). The SSHO must provide and maintain the APP and a log of signatures by each subcontractor foreman, attesting that they have read and understand the APP, and make the APP and log available on-site to the Contracting Officer. If English is not the foreman's primary language, the Prime Contractor must provide an interpreter.

Submit the APP to the Contracting Officer 15 calendar days prior to the date of the preconstruction meeting for acceptance. Work cannot proceed without an accepted APP. Once reviewed and accepted by the Contracting Officer, the APP and attachments will be enforced as part of the Contract. Disregarding the provisions of this Contract or the accepted APP is cause for stopping of work, at the discretion of the Contracting Officer, until the matter has been rectified. Continuously review and amend the APP, as necessary, throughout the life of the Contract. Changes to the accepted APP must be made with the knowledge and concurrence of the Contracting Officer, project superintendent, SSHO and Quality Control

Manager. Incorporate unusual or high-hazard activities not identified in the original APP as they are discovered. Should any severe hazard exposure (i.e. imminent danger) become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate and remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public (as defined by ASSP A10.34), and the environment.

1.8.2 Names and Qualifications

Provide plans in accordance with the requirements outlined in Appendix A of EM 385-1-1, including the following:

a. Names and qualifications (resumes including education, training, experience and certifications) of site safety and health personnel designated to perform work on this project to include the designated Site Safety and Health Officer and other competent and qualified personnel to be used. Specify the duties of each position.

b. Qualifications of competent and of qualified persons. As a minimum, designate and submit qualifications of competent persons for each of the following major areas: excavation; scaffolding; fall protection; hazardous energy; confined space; health hazard recognition, evaluation and control of chemical, physical and biological agents; and personal protective equipment and clothing to include selection, use and maintenance.

1.8.3 Plans

Provide plans in the APP in accordance with the requirements outlined in Appendix A of EM 385-1-1, including the following:

1.8.3.1 Confined Space Entry Plan

Develop a confined or enclosed space entry plan in accordance with EM 385-1-1, applicable OSHA standards 29 CFR 1910, 29 CFR 1915, and 29 CFR 1926, OSHA Directive CPL 2.100, and any other federal, state and local regulatory requirements identified in this Contract. Identify the qualified person's name and qualifications, training, and experience. Delineate the qualified person's authority to direct work stoppage in the event of hazardous conditions. Include procedure for rescue by Contractor personnel and the coordination with emergency responders. (If there is no confined space work, include a statement that no confined space work exists and none will be created.)

1.8.3.2 Standard Lift Plan (SLP)

Plan lifts to avoid situations where the operator cannot maintain safe control of the lift. Prepare a written SLP in accordance with EM 385-1-1, Section 16.A.03, using Form 16-2 for every lift or series of lifts (if duty cycle or routine lifts are being performed). The SLP must be developed, reviewed and accepted by all personnel involved in the lift in conjunction with the associated AHA. Signature on the AHA constitutes acceptance of the plan. Maintain the SLP on the LHE for the current lift(s) being made. Maintain historical SLPs for a minimum of three months.

1.8.3.3 Critical Lift Plan - Crane or Load Handling Equipment

Provide a Critical Lift Plan as required by EM 385-1-1, Section 16.H.01, using Form 16-3. In addition, Critical Lift Plans are required for the following:

a. Lifts over 50 percent of the capacity of barge mounted mobile crane's hoist.

b. When working around energized power lines where the work will get closer than the minimum clearance distance in EM 385-1-1 Table 16-1.

c. For lifts with anticipated binding conditions.

d. When erecting cranes.

1.8.3.3.1 Critical Lift Plan Planning and Schedule

Critical lifts require detailed planning and additional or unusual safety precautions. Develop and submit a critical lift plan to the Contracting Officer 30 calendar days prior to critical lift. Comply with load testing requirements in accordance with EM 385-1-1, Section 16.F.03.

1.8.3.3.2 Lifts of Personnel

In addition to the requirements of EM 385-1-1, Section 16.H.02, for lifts of personnel, demonstrate compliance with the requirements of 29 CFR 1926.1400 and EM 385-1-1, Section 16.T.

1.8.3.4 Barge Mounted Mobile Crane Lift Plan

Provide a Naval Architecture Analysis and include an LHE Manufacturer's Floating Service Load Chart in accordance with EM 385-1-1, Section 16.L.03.

1.8.3.5 Multi-Purpose Machines, Material Handling Equipment, and Construction Equipment Lift Plan

Multi-purpose machines, material handling equipment, and construction equipment used to lift loads that are suspended by rigging gear, require proof of authorization from the machine OEM that the machine is capable of making lifts of loads suspended by rigging equipment. Written approval from a qualified registered professional engineer, after a safety analysis is performed, is allowed in lieu of the OEM's approval. Demonstrate that the operator is properly trained and that the equipment is properly configured to make such lifts and is equipped with a load chart.

1.8.3.6 Fall Protection and Prevention (FP&P) Plan

The plan must be in accordance with the requirements of EM 385-1-1, Section 21.D and ASSP Z359.2, be site specific, and address all fall hazards in the work place and during different phases of construction. Address how to protect and prevent workers from falling to lower levels when they are exposed to fall hazards above 6 feet. A competent person or qualified person for fall protection must prepare and sign the plan documentation. Include fall protection and prevention systems, equipment and methods employed for every phase of work, roles and responsibilities, assisted rescue, self-rescue and evacuation procedures, training requirements, and monitoring methods. Review and revise, as necessary, the Fall Protection and Prevention Plan documentation as conditions

change, but at a minimum every six months, for lengthy projects, reflecting any changes during the course of construction due to changes in personnel, equipment, systems or work habits. Keep and maintain the accepted Fall Protection and Prevention Plan documentation at the job site for the duration of the project. Include the Fall Protection and Prevention Plan documentation in the Accident Prevention Plan (APP).

1.8.3.7 Rescue and Evacuation Plan

Provide a Rescue and Evacuation Plan in accordance with EM 385-1-1 Section 21.N and ASSP Z359.2, and include in the FP&P Plan and as part of the APP. Include a detailed discussion of the following: methods of rescue; methods of self-rescue; equipment used; training requirement; specialized training for the rescuers; procedures for requesting rescue and medical assistance; and transportation routes to a medical facility.

1.8.3.8 Hazardous Energy Control Program (HECP)

Develop a HECP in accordance with EM 385-1-1 Section 12, 29 CFR 1910.147, 29 CFR 1910.333, 29 CFR 1915.89, ASSP Z244.1, and ASSP A10.44. Submit this HECP as part of the Accident Prevention Plan (APP). Conduct a preparatory meeting and inspection with all effected personnel to coordinate all HECP activities. Document this meeting and inspection in accordance with EM 385-1-1, Section 12.A.02. Ensure that each employee is familiar with and complies with these procedures.

1.8.3.9 Excavation Plan

Identify the safety and health aspects of excavation, and provide and prepare the plan in accordance with EM 385-1-1, Section 25.A and Section 31 00 00 EARTHWORK.

1.8.3.10 Site Demolition Plan

Identify the safety and health aspects, and prepare in accordance with Section 02 41 00 DEMOLITION and referenced sources. Include engineering survey as applicable.

1.9 ACTIVITY HAZARD ANALYSIS (AHA)

Before beginning each activity, task or Definable Feature of Work (DFOW) involving a type of work presenting hazards not experienced in previous project operations, or where a new work crew or subcontractor is to perform the work, the Contractor(s) performing that work activity must prepare an AHA. AHAs must be developed by the Prime Contractor, subcontractor, or supplier performing the work, and provided for Prime Contractor review and approval before submitting to the Contracting Officer. AHAs must be signed by the SSHO, Superintendent, QC Manager and the subcontractor Foreman performing the work. Format the AHA in accordance with EM 385-1-1, Section 1 or as directed by the Contracting Officer. Submit the AHA for review at least 15 working days prior to the start of each activity task, or DFOW. The Government reserves the right to require the Contractor to revise and resubmit the AHA if it fails to effectively identify the work sequences, specific anticipated hazards, site conditions, equipment, materials, personnel and the control measures to be implemented.

AHAs must identify competent persons required for phases involving high risk activities, including confined entry, crane and rigging, excavations,

trenching, electrical work, fall protection, and scaffolding.

1.9.1 AHA Management

Review the AHA list periodically (at least monthly) at the Contractor supervisory safety meeting, and update as necessary when procedures, scheduling, or hazards change. Use the AHA during daily inspections by the SSHO to ensure the implementation and effectiveness of the required safety and health controls for that work activity.

1.9.2 AHA Signature Log

Each employee performing work as part of an activity, task or DFOW must review the AHA for that work and sign a signature log specifically maintained for that AHA prior to starting work on that activity. The SSHO must maintain a signature log on site for every AHA. Provide employees whose primary language is other than English, with an interpreter to ensure a clear understanding of the AHA and its contents.

1.10 DISPLAY OF SAFETY INFORMATION

1.10.1 Safety Bulletin Board

Prior to commencement of work, erect a safety bulletin board at the job site. Where size, duration, or logistics of project do not facilitate a bulletin board, an alternative method, acceptable to the Contracting Officer, that is accessible and includes all mandatory information for employee and visitor review, may be deemed as meeting the requirement for a bulletin board. Include and maintain information on safety bulletin board as required by EM 385-1-1, Section 01.A.07. Additional items required to be posted include:

a. Confined space entry permit.

b. Hot work permit.

1.10.2 Safety and Occupational Health (SOH) Deficiency Tracking System

Establish a SOH deficiency tracking system that lists and monitors the status of SOH deficiencies in chronological order. Use the tracking system to evaluate the effectiveness of the APP. A monthly evaluation of the data must be discussed in the QC or SOH meeting with everyone on the project. The list must be posted on the project bulletin board and updated daily, and provide the following information:

a. Date deficiency identified;

b. Description of deficiency;

c. Name of person responsible for correcting deficiency;

d. Projected resolution date;

e. Date actually resolved.

1.11 SITE SAFETY REFERENCE MATERIALS

Maintain safety-related references applicable to the project, including those listed in paragraph REFERENCES. Maintain applicable equipment

manufacturer's manuals.

1.12 EMERGENCY MEDICAL TREATMENT

Contractors must arrange for their own emergency medical treatment in accordance with EM 385-1-1. Government has no responsibility to provide emergency medical treatment.

1.13 NOTIFICATIONS and REPORTS

1.13.1 Mishap Notification

Notify the Contracting Officer as soon as practical, but no more than twenty-four hours, after any mishaps, including recordable accidents, incidents, and near misses, as defined in EM 385-1-1 Appendix Q, any report of injury, illness, or any property damage. For LHE or rigging mishaps, notify the Contracting Officer as soon as practical but not more than four hours after mishap. The Contractor is responsible for obtaining appropriate medical and emergency assistance and for notifying fire, law enforcement, and regulatory agencies. Immediate reporting is required for electrical mishaps, to include Arc Flash; shock; uncontrolled release of hazardous energy (includes electrical and non-electrical); load handling equipment or rigging; fall from height (any level other than same surface); and underwater diving. These mishaps must be investigated in depth to identify all causes and to recommend hazard control measures.

Within notification include Contractor name; Contractt title; type of Contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (for example, type of construction equipment used and PPE used). Preserve the conditions and evidence on the accident site until the Government investigation team arrives on-site and Government investigation is conducted. Assist and cooperate fully with the Government's investigation(s) of any mishap.

1.13.2 Accident Reports

a. Conduct an accident investigation for recordable injuries and illnesses, property damage, and near misses as defined in EM 385-1-1, to establish the root cause(s) of the accident. Complete the applicable NAVFAC Contractor Incident Reporting System (CIRS), and electronically submit via the NAVFAC Enterprise Safety Applications Management System (ESAMS). Complete and submit an accident investigation report in ESAMS within 5 days for mishaps defined in EM 385-1-1 01.D.03 and 10 days for accidents defined by EM 385-1-1 01.D.05. Complete an investigation report within 30 days for those mishaps defined by EM 385-1-1 01.D.04. Mishaps defined by EM 385-1-1 01.D.04 and 01.D.05 must include a written report submitted as an attachment in ESAMS using the following outline: (1) Mishap summary description to include process, findings and outcomes; (2) Root Cause; (3) Direct Factors; (4) Indirect and Contributing Factors; (5) Corrective Actions; and (6) Recommendations. The Contracting Officer will provide copies of any required or special forms.

b. Near Misses: For Navy Projects, complete the applicable documentation in NAVFAC Contractor Incident Reporting System (CIRS), and electronically submit via the NAVFAC Enterprise Safety Applications Management System (ESAMS). Near miss reports are considered positive

and proactive Contractor safety management actions.

c. Conduct an accident investigation for any load handling equipment accident (including rigging accidents) to establish the root cause(s) of the accident. Complete the LHE Accident Report (Crane and Rigging Accident Report) form and provide the report to the Contracting Officer within 30 calendar days of the accident. Do not proceed with crane operations until cause is determined and corrective actions have been implemented to the satisfaction of the Contracting Officer. The Contracting Officer will provide a blank copy of the accident report form.

1.13.3 LHE Inspection Reports

Submit LHE inspection reports required in accordance with EM 385-1-1 and as specified herein with Daily Reports of Inspections.

1.13.4 Certificate of Compliance and Pre-lift Plan/Checklist for LHE and Rigging

Provide a FORM 16-1 Certificate of Compliance for LHE entering an activity under this Contract and in accordance with EM 385-1-1. Post certifications on the crane.

Develop a Standard Lift Plan (SLP) in accordance with EM 385-1-1, Section 16.H.03 using Form 16-2 Standard Pre-Lift Crane Plan/Checklist for each lift planned. Submit SLP to the Contracting Officer for approval within 15 calendar days in advance of planned lift.

1.13.5 Third Party Certification of Floating Cranes and Barge-Mounted Mobile Cranes

Floating cranes and barge-mounted mobile cranes used to perform work under the terms of this Contract must be certified in accordance with 29 CFR 1919 by an OSHA accredited person prior to submitting the required Lift Plan. Include proof of certification with the initial Lift Plan submission.

1.14 HOT WORK

1.14.1 Permit and Personnel Requirements

Submit and obtain a written permit prior to performing "Hot Work" (i.e. welding or cutting) or operating other flame-producing/spark producing devices, from the Fire Division. A permit is required from the Explosives Safety Office for work in and around where explosives are processed, stored, or handled. CONTRACTORS ARE REQUIRED TO MEET ALL CRITERIA BEFORE A PERMIT IS ISSUED. Provide at least two 20 pound 4A:20 BC rated extinguishers for normal "Hot Work". The extinguishers must be current inspection tagged, and contain an approved safety pin and tamper resistant seal. It is also mandatory to have a designated FIRE WATCH for any "Hot Work" done at this activity. The Fire Watch must be trained in accordance with NFPA 51B and remain on-site for a minimum of one hour after completion of the task or as specified on the hot work permit.

When starting work in the facility, require personnel to familiarize themselves with the location of the nearest fire alarm boxes and place in memory the emergency Fire Division phone number. REPORT ANY FIRE, NO MATTER HOW SMALL, TO THE RESPONSIBLE FIRE DIVISION IMMEDIATELY.

1.14.2 Work Around Flammable Materials

Obtain permit approval from a NFPA Certified Marine Chemist, or Certified Industrial Hygienist for "HOT WORK" within or around flammable materials (such as fuel systems or welding/cutting on fuel pipes) or confined spaces (such as sewer wet wells, manholes, or vaults) that have the potential for flammable or explosive atmospheres.

Whenever these materials, except beryllium and chromium (VI), are encountered in indoor operations, local mechanical exhaust ventilation systems that are sufficient to reduce and maintain personal exposures to within acceptable limits must be used and maintained in accordance with manufacturer's instruction and supplemented by exceptions noted in EM 385-1-1, Section 06.H

1.15 RADIATION SAFETY REQUIREMENTS

Submit License Certificates, employee training records, and Leak Test Reports for radiation materials and equipment to the Contracting Officer and Radiation Safety Office (RSO), and Contracting Oversight Technician (COT) for all specialized and licensed material and equipment proposed for use on the construction project (excludes portable machine sources of ionizing radiation including moisture density and X-Ray Fluorescence (XRF)). Maintain on-site records whenever licensed radiological materials or ionizing equipment are on Government property.

Protect workers from radiation exposure in accordance with 10 CFR 20, ensuring any personnel exposures are maintained As Low As Reasonably Achievable.

1.15.1 Radiography Operation Planning Work Sheet

Submit a Gamma and X-Ray Radiography Operation Planning Work Sheet to Contracting Officer 14 days prior to commencement of operations involving radioactive materials or radiation generating devices. For portable machine sources of ionizing radiation, including moisture density and XRF, use and submit the Portable Gauge Operations Planning Worksheet instead. The Contracting Officer and COT will review the submitted worksheet and provide questions and comments.

Contractors must use primary dosimeters process by a National Voluntary Laboratory Accreditation Program (NVLAP) accredited laboratory.

1.15.2 Site Access and Security

Coordinate site access and security requirements with the Contracting Officer and COT for all radiological materials and equipment containing ionizing radiation that are proposed for use on a government facility. For gamma radiography materials and equipment, a Government escort is required for any travels on the Installation. The Navy COT or Government authorized representative will meet the Contractor at a designated location outside the Installation, ensure safety of the materials being transported, and will escort the Contractor for gamma sources onto the Installation, to the job site, and off the Installation. For portable machine sources of ionizing radiation, including moisture density and XRF, the Navy COT or Government authorized representative will meet the Contractor at the job site.

Provide a copy of all calibration records, and utilization records to the

COT for radiological operations performed on the site.

1.15.3 Loss or Release and Unplanned Personnel Exposure

Loss or release of radioactive materials, and unplanned personnel exposures must be reported immediately to the Contracting Officer, RSO, and Base Security Department Emergency Number.

1.15.4 Site Demarcation and Barricade

Properly demark and barricade an area surrounding radiological operations to preclude personnel entrance, in accordance with EM 385-1-1, Nuclear Regulatory Commission, and Applicable State regulations and license requirements, and in accordance with requirements established in the accepted Radiography Operation Planning Work Sheet.

Do not close or obstruct streets, walks, and other facilities occupied and used by the Government without written permission from the Contracting Officer.

1.15.5 Security of Material and Equipment

Properly secure the radiological material and ionizing radiation equipment at all times, including keeping the devices in a properly marked and locked container, and secondarily locking the container to a secure point in the Contractor's vehicle or other approved storage location during transportation and while not in use. While in use, maintain a continuous visual observation on the radiological material and ionizing radiation equipment. In instances where radiography is scheduled near or adjacent to buildings or areas having limited access or one-way doors, make no assumptions as to building occupancy. Where necessary, the Contracting Officer will direct the Contractor to conduct an actual building entry, search, and alert. Where removal of personnel from such a building cannot be accomplished and it is otherwise safe to proceed with the radiography, position a fully instructed employee inside the building or area to prevent exiting while external radiographic operations are in process.

1.15.6 Transportation of Material

Comply with 49 CFR 173 for Transportation of Regulated Amounts of Radioactive Material. Notify Local Fire authorities and the site Radiation Safety Officer (RSO) of any Radioactive Material use.

1.15.7 Schedule for Exposure or Unshielding

Actual exposure of the radiographic film or unshielding the source must not be initiated until after 5 p.m. on weekdays.

1.15.8 Transmitter Requirements

Adhere to the base policy concerning the use of transmitters, such as radios and cell phones. Obey Emissions control (EMCON) restrictions.

1.16 CONFINED SPACE ENTRY REQUIREMENTS

Confined space entry must comply with Section 34 of EM 385-1-1, OSHA 29 CFR 1926, OSHA 29 CFR 1910, OSHA 29 CFR 1910.146, and OSHA Directive CPL 2.100. Any potential for a hazard in the confined space requires a permit system to be used.

1.16.1 Entry Procedures

Prohibit entry into a confined space by personnel for any purpose, including hot work, until the qualified person has conducted appropriate tests to ensure the confined or enclosed space is safe for the work intended and that all potential hazards are controlled or eliminated and documented. Comply with EM 385-1-1, Section 34 for entry procedures. Hazards pertaining to the space must be reviewed with each employee during review of the AHA.

1.16.2 Forced Air Ventilation

Forced air ventilation is required for all confined space entry operations and the minimum air exchange requirements must be maintained to ensure exposure to any hazardous atmosphere is kept below its action level.

1.16.3 Sewer Wet Wells

Sewer wet wells require continuous atmosphere monitoring with audible alarm for toxic gas detection.

1.16.4 Rescue Procedures and Coordination with Local Emergency Responders

Develop and implement an on-site rescue and recovery plan and procedures. The rescue plan must not rely on local emergency responders for rescue from a confined space.

1.17 DIVE SAFETY REQUIREMENTS

Develop a Dive Operations Plan, AHA, emergency management plan, and personnel list that includes qualifications, for each separate diving operation. Submit these documents to the District Dive Coordinator (DDC) via the Contracting Officer or Government Designated Authority (GDA), for review and approval at least 15 working days prior to commencement of diving operations. These documents must be at the diving location at all times. Provide each of these documents as a part of the project file.

1.18 SEVERE STORM PLAN

In the event of a severe storm warning, the Contractor must comply with the applicable Storm Plan and:

a. Secure outside equipment and materials and place materials that could be damaged in protected areas.

b. Check surrounding area, including roof, for loose material, equipment, debris, and other objects that could be blown away or against existing facilities.

c. Ensure that temporary erosion controls are adequate.

PART 2 PRODUCTS

2.1 CONFINED SPACE SIGNAGE

Provide permanent signs integral to or securely attached to access covers for new permit-required confined spaces. Signs for confined spaces must

comply with NEMA Z535.2. Provide signs with wording: "DANGER--PERMIT-REQUIRED CONFINED SPACE, DO NOT ENTER" in bold letters a minimum of one inch in height and constructed to be clearly legible with all paint removed. The signal word "DANGER" must be red and readable from 5 feet.

PART 3 EXECUTION

3.1 CONSTRUCTION AND OTHER WORK

Comply with EM 385-1-1, NFPA 70, NFPA 70E, NFPA 241, the APP, the AHA, Federal and State OSHA regulations, and other related submittals and activity fire and safety regulations. The most stringent standard prevails.

PPE is governed in all areas by the nature of the work the employee is performing. Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks. Safety glasses must be worn or carried/available on each person. Mandatory PPE includes:

a. Hard Hat

b. Long Pants

c. Appropriate Safety Shoes

d. Appropriate Class Reflective Vests

3.1.1 Worksite Communication

Employees working alone in a remote location or away from other workers must be provided an effective means of emergency communications (i.e., cellular phone, two-way radios, land-line telephones or other acceptable means). The selected communication must be readily available (easily within the immediate reach) of the employee and must be tested prior to the start of work to verify that it effectively operates in the area/environment. Develop an employee check-in/check-out communication procedure to ensure employee safety.

3.1.2 Hazardous Material Use

Each hazardous material must receive approval from the Contracting Office or their designated representative prior to being brought onto the job site or prior to any other use in connection with this Contract. Allow a minimum of 10 working days for processing of the request for use of a hazardous material.

3.1.3 Hazardous Material Exclusions

Notwithstanding any other hazardous material used in this Contract, radioactive materials or instruments capable of producing ionizing/non-ionizing radiation (with the exception of radioactive material and devices used in accordance with EM 385-1-1 such as nuclear density meters for compaction testing and laboratory equipment with radioactive sources) as well as materials which contain asbestos, mercury or polychlorinated biphenyls, di-isocyanates, lead-based paint, and hexavalent chromium, are prohibited. The Contracting Officer, upon written request by the Contractor, may consider exceptions to the use of

any of the above excluded materials. Low mercury lamps used within fluorescent lighting fixtures are allowed as an exception without further Contracting Officer approval. Notify the Radiation Safety Officer (RSO) prior to excepted items of radioactive material and devices being brought on base.

3.1.4 Unforeseen Hazardous Material

Contract documents identify materials such as PCB, lead paint, and friable and non-friable asbestos and other OSHA regulated chemicals (i.e. 29 CFR Part 1910.1000). If material(s) that may be hazardous to human health upon disturbance are encountered during construction operations, stop that portion of work and notify the Contracting Officer immediately. Within 14 calendar days the Government will determine if the material is hazardous. If material is not hazardous or poses no danger, the Government will direct the Contractor to proceed without change. If material is hazardous and handling of the material is necessary to accomplish the work, the Government will issue a modification pursuant to FAR 52.243-4 Changes and FAR 52.236-2 Differing Site Conditions.

3.2 UTILITY OUTAGE REQUIREMENTS

Apply for utility outages at least 30 days in advance. At a minimum, the written request must include the location of the outage, utilities being affected, duration of outage, any necessary sketches, and a description of the means to fulfill energy isolation requirements in accordance with EM 385-1-1, Section 11.A.02 (Isolation). Some examples of energy isolation devices and procedures are highlighted in EM 385-1-1, Section 12.D. In accordance with EM 385-1-1, Section 12.A.01, where outages involve Government or Utility personnel, coordinate with the Government on all activities involving the control of hazardous energy.

These activities include, but are not limited to, a review of HECP and HEC procedures, as well as applicable Activity Hazard Analyses (AHAs). In accordance with EM 385-1-1, Section 11.A.02 and NFPA 70E, work on energized electrical circuits must not be performed without prior Government authorization. Government permission is considered through the permit process and submission of a detailed AHA. Energized work permits are considered only when de-energizing introduces additional or increased hazard or when de-energizing is infeasible.

3.3 OUTAGE COORDINATION MEETING

After the utility outage request is approved and prior to beginning work on the utility system requiring shut-down, conduct a pre-outage coordination meeting in accordance with EM 385-1-1, Section 12.A. This meeting must include the Prime Contractor, the Prime and subcontractors performing the work, the Contracting Officer, and the Public Utilities representative. All parties must fully coordinate HEC activities with one another. During the coordination meeting, all parties must discuss and coordinate on the scope of work, HEC procedures (specifically, the lock-out/tag-out procedures for worker and utility protection), the AHA, assurance of trade personnel qualifications, identification of competent persons, and compliance with HECP training in accordance with EM 385-1-1, Section 12.C. Clarify when personal protective equipment is required during switching operations, inspection, and verification.

3.4 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

Provide and operate a Hazardous Energy Control Program (HECP) in accordance with EM 385-1-1 Section 12, 29 CFR 1910.333, 29 CFR 1915.89, ASSP A10.44, NFPA 70E, and paragraph HAZARDOUS ENERGY CONTROL PROGRAM (HECP).

3.4.1 Safety Preparatory Inspection Coordination Meeting with the Government or Utility

For electrical distribution equipment that is to be operated by Government or Utility personnel, the Prime Contractor and the subcontractor performing the work must attend the safety preparatory inspection coordination meeting, which will also be attended by the Contracting Officer's Representative, and required by EM 385-1-1, Section 12.A.02. The meeting will occur immediately preceding the start of work and following the completion of the outage coordination meeting. Both the safety preparatory inspection coordination meeting and the outage coordination meeting must occur prior to conducting the outage and commencing with lockout/tagout procedures.

3.4.2 Lockout/Tagout Isolation

Where the Government or Utility performs equipment isolation and lockout/tagout, the Contractor must place their own locks and tags on each energy-isolating device and proceed in accordance with the HECP. Before any work begins, both the Contractor and the Government or Utility must perform energy isolation verification testing while wearing required PPE detailed in the Contractor's AHA and required by EM 385-1-1, Sections 05.I and 11.B. Install personal protective grounds, with tags, to eliminate the potential for induced voltage in accordance with EM 385-1-1, Section 12.E.06.

3.4.3 Lockout/Tagout Removal

Upon completion of work, conduct lockout/tagout removal procedure in accordance with the HECP. In accordance with EM 385-1-1, Section 12.E.08, each lock and tag must be removed from each energy isolating device by the authorized individual or systems operator who applied the device. Provide formal notification to the Government (by completing the Government form if provided by Contracting Officer's Representative), confirming that steps of de-energization and lockout/tagout removal procedure have been conducted and certified through inspection and verification. Government or Utility locks and tags used to support the Contractor's work will not be removed until the authorized Government employee receives the formal notification.

3.5 FALL PROTECTION PROGRAM

Establish a fall protection program, for the protection of all employees exposed to fall hazards. Within the program include company policy, identify roles and responsibilities, education and training requirements, fall hazard identification, prevention and control measures, inspection, storage, care and maintenance of fall protection equipment and rescue and evacuation procedures in accordance with ASSP Z359.2 and EM 385-1-1, Sections 21.A and 21.D.

3.5.1 Training

Institute a fall protection training program. As part of the Fall Protection Program, provide training for each employee who might be exposed to fall hazards and using personal fall protection equipment. Provide training by a competent person for fall protection in accordance with EM 385-1-1, Section 21.C. Document training and practical application of the competent person in accordance with EM 385-1-1, Section 21.C.04 and ASSP Z359.2 in the AHA.

3.5.2 Fall Protection Equipment and Systems

Enforce use of personal fall protection equipment and systems designated (to include fall arrest, restraint, and positioning) for each specific work activity in the Site Specific Fall Protection and Prevention Plan and AHA at all times when an employee is exposed to a fall hazard. Protect employees from fall hazards as specified in EM 385-1-1, Section 21.

Provide personal fall protection equipment, systems, subsystems, and components that comply with EM 385-1-1 Section 21.I, 29 CFR 1926.500 Subpart M,ASSP Z359.0, ASSP Z359.1, ASSP Z359.2, ASSP Z359.3, ASSP Z359.4, ASSP Z359.6, ASSP Z359.7, ASSP Z359.11, ASSP Z359.12, ASSP Z359.13, ASSP Z359.14, ASSP Z359.15, ASSP Z359.16 and ASSP Z359.18.

3.5.2.1 Additional Personal Fall Protection Measures

In addition to the required fall protection systems, other protective measures such as safety skiffs, personal floatation devices, and life rings, are required when working above or next to water in accordance with EM 385-1-1, Sections 21.O through 21.O.06. Personal fall protection systems and equipment are required when working from an articulating or extendible boom, swing stages, or suspended platform. In addition, personal fall protection systems are required when operating other equipment such as scissor lifts. The need for tying-off in such equipment is to prevent ejection of the employee from the equipment during raising, lowering, travel, or while performing work.

3.5.2.2 Personal Fall Protection Equipment

Only a full-body harness with a shock-absorbing lanyard or self-retracting lanyard is an acceptable personal fall arrest body support device. The use of body belts is not acceptable. Harnesses must have a fall arrest attachment affixed to the body support (usually a Dorsal D-ring) and specifically designated for attachment to the rest of the system. Snap hooks and carabineers must be self-closing and self-locking, capable of being opened only by at least two consecutive deliberate actions and have a minimum gate strength of 3,600 lbs in all directions. Use webbing, straps, and ropes made of synthetic fiber. The maximum free fall distance when using fall arrest equipment must not exceed 6 feet, unless the proper energy absorbing lanyard is used. Always take into consideration the total fall distance and any swinging of the worker (pendulum-like motion), that can occur during a fall, when attaching a person to a fall arrest system. Equip all full body harnesses with Suspension Trauma Preventers such as stirrups, relief steps, or similar in order to provide short-term relief from the effects of orthostatic intolerance in accordance with EM 385-1-1, Section 21.I.06.

3.5.3 Fall Protection for Roofing Work

Implement fall protection controls based on the type of roof being constructed and work being performed. Evaluate the roof area to be accessed for its structural integrity including weight-bearing capabilities for the projected loading.

a. Low Sloped Roofs:

(1) For work within 6 feet from unprotected edge of a roof having a slope less than or equal to 4:12 (vertical to horizontal), protect personnel from falling by the use of conventional fall protection systems (personal fall arrest/restraint systems, guardrails, or safety nets) in accordance with EM 385-1-1, Section 21 and 29 CFR 1926.500. A safety monitoring system is not adequate fall protection and is not authorized.

(2) For work greater than 6 feet from the unprotected roof edge, addition to the use of conventional fall protection systems the use of a warning line system is also permitted, in accordance with 29 CFR 1926.500 and EM 385-1-1, Section 21.L.

b. Steep-Sloped Roofs: Work on a roof having a slope greater than 4:12 (vertical to horizontal) requires a personal fall arrest system, guardrails with toe-boards, or safety nets. This requirement also applies to residential or housing type construction.

3.5.4 Horizontal Lifelines (HLL)

Provide HLL in accordance with EM 385-1-1, Section 21.I.08.d.2. Commercially manufactured horizontal lifelines (HLL) must be designed, installed, certified and used, under the supervision of a qualified person, for fall protection as part of a complete fall arrest system which maintains a safety factor of 2 (29 CFR 1926.500). The competent person for fall protection may (if deemed appropriate by the qualified person) supervise the assembly, disassembly, use and inspection of the HLL system under the direction of the qualified person. Locally manufactured HLLs are not acceptable unless they are custom designed for limited or site specific applications by a Registered Professional Engineer who is qualified in designing HLL systems.

3.5.5 Guardrails and Safety Nets

Design, install and use guardrails and safety nets in accordance with EM 385-1-1, Section 21.F.01 and 29 CFR 1926 Subpart M.

3.5.6 Rescue and Evacuation Plan and Procedures

When personal fall arrest systems are used, ensure that the mishap victim can self-rescue or can be rescued promptly should a fall occur. Prepare a Rescue and Evacuation Plan and include a detailed discussion of the following: methods of rescue; methods of self-rescue or assisted-rescue; equipment used; training requirement; specialized training for the rescuers; procedures for requesting rescue and medical assistance; and transportation routes to a medical facility. Include the Rescue and Evacuation Plan within the Activity Hazard Analysis (AHA) for the phase of work, in the Fall Protection and Prevention (FP&P) Plan, and the Accident Prevention Plan (APP). The plan must be in accordance with the requirements of EM 385-1-1, ASSP Z359.2, and ASSP Z359.4.

3.6 WORK PLATFORMS

3.6.1 Scaffolding

Provide employees with a safe means of access to the work area on the scaffold. Climbing of any scaffold braces or supports not specifically designed for access is prohibited. Comply with the following requirements:

a. Scaffold platforms greater than 20 feet in height must be accessed by use of a scaffold stair system.

b. Ladders commonly provided by scaffold system manufacturers are prohibited for accessing scaffold platforms greater than 20 feet maximum in height.

c. An adequate gate is required.

d. Employees performing scaffold erection and dismantling must be qualified.

e. Scaffold must be capable of supporting at least four times the maximum intended load, and provide appropriate fall protection as delineated in the accepted fall protection and prevention plan.

f. Stationary scaffolds must be attached to structural building components to safeguard against tipping forward or backward.

g. Special care must be given to ensure scaffold systems are not overloaded.

h. Side brackets used to extend scaffold platforms on self-supported scaffold systems for the storage of material are prohibited. The first tie-in must be at the height equal to 4 times the width of the smallest dimension of the scaffold base.

i. Scaffolding other than suspended types must bear on base plates upon wood mudsills (2 in x 10 in x 8 in minimum) or other adequate firm foundation.

j. Scaffold or work platform erectors must have fall protection during the erection and dismantling of scaffolding or work platforms that are more than 6 feet.

k. Delineate fall protection requirements when working above 6 feet or above dangerous operations in the Fall Protection and Prevention (FP&P) Plan and Activity Hazard Analysis (AHA) for the phase of work.

3.6.2 Elevated Aerial Work Platforms (AWPs)

Workers must be anchored to the basket or bucket in accordance with manufacturer's specifications and instructions (anchoring to the boom may only be used when allowed by the manufacturer and permitted by the CP). Lanyards used must be sufficiently short to prohibit worker from climbing out of basket. The climbing of rails is prohibited. Lanyards with built-in shock absorbers are acceptable. Self-retracting devices are not acceptable. Tying off to an adjacent pole or structure is not permitted unless a safe device for 100 percent tie-off is used for the transfer.

Use of AWPs must be operated, inspected, and maintained as specified in the operating manual for the equipment and delineated in the AHA. Operators of AWPs must be designated as qualified operators by the Prime Contractor. Maintain proof of qualifications on site for review and include in the AHA.

3.7 EQUIPMENT

3.7.1 Material Handling Equipment (MHE)

a. Material handling equipment such as forklifts must not be modified with work platform attachments for supporting employees unless specifically delineated in the manufacturer's printed operating instructions. Material handling equipment fitted with personnel work platform attachments are prohibited from traveling or positioning while personnel are working on the platform.

b. The use of hooks on equipment for lifting of material must be in accordance with manufacturer's printed instructions. Material Handling Equipment Operators must be trained in accordance with OSHA 29 CFR 1910, Subpart N.

c. Operators of forklifts or power industrial trucks must be licensed in accordance with OSHA.

3.7.2 Load Handling Equipment (LHE)

The following requirements apply. In exception, these requirements do not apply to commercial truck mounted and articulating boom cranes used solely to deliver material and supplies (not prefabricated components, structural steel, or components of a systems-engineered metal building) where the lift consists of moving materials and supplies from a truck or trailer to the ground; to cranes installed on mechanics trucks that are used solely in the repair of shore-based equipment; to crane that enter the activity but are not used for lifting; nor to other machines not used to lift loads suspended by rigging equipment. However, LHE accidents occurring during such operations must be reported.

a. Equip cranes and derricks as specified in EM 385-1-1, Section 16.

b. Notify the Contracting Officer 15 working days in advance of any LHE entering the activity, in accordance with EM 385-1-1, Section 16.A.02, so that necessary quality assurance spot checks can be coordinated. Prior to cranes entering federal activities, a Crane Access Permit must be obtained from the Contracting Officer. A copy of the permitting process will be provided at the Preconstruction Meeting. Contractor's operator must remain with the crane during the spot check. Rigging gear must be in accordance with OSHA, ASME B30.9 Standards safety standards.

c. Comply with the LHE manufacturer's specifications and limitations for erection and operation of cranes and hoists used in support of the work. Perform erection under the supervision of a designated person (as defined in ASME B30.5). Perform all testing in accordance with the manufacturer's recommended procedures.

d. Comply with ASME B30.5 for mobile and locomotive cranes, ASME B30.22 for articulating boom cranes, ASME B30.3 for construction tower cranes, ASME B30.8 for floating cranes and floating derricks,

ASME B30.9 for slings, ASME B30.20 for below the hook lifting devices and ASME B30.26 for rigging hardware.

e. When operating in the vicinity of overhead transmission lines, operators and riggers must be alert to this special hazard and follow the requirements of EM 385-1-1 Section 11, and ASME B30.5 or ASME B30.22 as applicable.

f. Do not use crane suspended personnel work platforms (baskets) unless the Contractor proves that using any other access to the work location would provide a greater hazard to the workers or is impossible. Do not lift personnel with a line hoist or friction crane. Additionally, submit a specific AHA for this work to the Contracting Officer. Ensure the activity and AHA are thoroughly reviewed by all involved personnel.

g. Inspect, maintain, and recharge portable fire extinguishers as specified in NFPA 10, Standard for Portable Fire Extinguishers.

h. All employees must keep clear of loads about to be lifted and of suspended loads, except for employees required to handle the load.

i. Use cribbing when performing lifts on outriggers.

j. The crane hook/block must be positioned directly over the load. Side loading of the crane is prohibited.

k. A physical barricade must be positioned to prevent personnel access where accessible areas of the LHE's rotating superstructure poses a risk of striking, pinching or crushing personnel.

l. Maintain inspection records in accordance by EM 385-1-1, Section 16.D, including shift, monthly, and annual inspections, the signature of the person performing the inspection, and the serial number or other identifier of the LHE that was inspected. Records must be available for review by the Contracting Officer.

m. Maintain written reports of operational and load testing in accordance with EM 385-1-1, Section 16.F, listing the load test procedures used along with any repairs or alterations performed on the LHE. Reports must be available for review by the Contracting Officer.

n. Certify that all LHE operators have been trained in proper use of all safety devices (e.g. anti-two block devices).

o. Take steps to ensure that wind speed does not contribute to loss of control of the load during lifting operations. At wind speeds greater than 20 mph, the operator, rigger and lift supervisor must cease all crane operations, evaluate conditions and determine if the lift may proceed. Base the determination to proceed or not on wind calculations per the manufacturer and a reduction in LHE rated capacity if applicable. Include this maximum wind speed determination as part of the activity hazard analysis plan for that operation.

p. On mobile cranes, lifts where the load weight is greater than 90 percent of the equipment's capacity are prohibited.

q. Follow FAA guidelines when required based on project location.

3.7.3 Machinery and Mechanized Equipment

a. Proof of qualifications for operator must be kept on the project site for review.

b. Manufacture specifications or owner's manual for the equipment must be on-site and reviewed for additional safety precautions or requirements that are sometimes not identified by OSHA or USACE EM 385-1-1. Incorporate such additional safety precautions or requirements into the AHAs.

3.7.4 Base Mounted Drum Hoists

a. Operation of base mounted drum hoists must be in accordance with EM 385-1-1 and ASSP A10.22.

b. Rigging gear must be in accordance with applicable ASME/OSHA standards.

c. When used on telecommunication towers, base mounted drum hoists must be in accordance with TIA-1019, TIA-222, ASME B30.7, 29 CFR 1926.552, and 29 CFR 1926.553.

d. When used to hoist personnel, the AHA must include a written standard operating procedure. Operators must have a physical examination in accordance with EM 385-1-1 Section 16.B.05 and trained, at a minimum, in accordance with EM 385-1-1 Section 16.U and 16.T. The base mounted drum hoist must also comply with OSHA Instruction CPL 02-01-056 and ASME B30.23.

e. Material and personnel must not be hoisted simultaneously.

f. Personnel cage must be marked with the capacity (in number of persons) and load limit in pounds.

g. Construction equipment must not be used for hoisting material or personnel or with trolley/tag lines. Construction equipment may be used for towing and assisting with anchoring guy lines.

3.7.5 Use of Explosives

Explosives must not be used or brought to the project site without prior written approval from the Contracting Officer. Such approval does not relieve the Contractor of responsibility for injury to persons or for damage to property due to blasting operations.

Storage of explosives, when permitted on Government property, must be only where directed and in approved storage facilities. These facilities must be kept locked at all times except for inspection, delivery, and withdrawal of explosives.

3.8 EXCAVATIONS

Soil classification must be performed by a competent person in accordance with 29 CFR 1926 and EM 385-1-1.

3.8.1 Utility Locations

Provide a third party, independent, private utility locating company to positively identify underground utilities in the work area in addition to

any station locating service and coordinated with the station utility department.

3.8.2 Utility Location Verification

Physically verify underground utility locations, including utility depth, by hand digging using wood or fiberglass handled tools when any adjacent construction work is expected to come within 3 feet of the underground system.

3.8.3 Utilities Within and Under Concrete, Bituminous Asphalt, and Other Impervious Surfaces

Utilities located within and under concrete slabs or pier structures, bridges, parking areas, and the like, are extremely difficult to identify. Whenever Contract work involves chipping, saw cutting, or core drilling through concrete, bituminous asphalt or other impervious surfaces, the existing utility location must be coordinated with station utility departments in addition to location and depth verification by a third party, independent, private locating company. The third party, independent, private locating company must locate utility depth by use of Ground Penetrating Radar (GPR), X-ray, bore scope, or ultrasound prior to the start of demolition and construction. Outages to isolate utility systems must be used in circumstances where utilities are unable to be positively identified. The use of historical drawings does not alleviate the Contractor from meeting this requirement.

3.9 ELECTRICAL

Perform electrical work in accordance with EM 385-1-1, Sections 11 and 12.

3.9.1 Conduct of Electrical Work

As delineated in EM 385-1-1, electrical work is to be conducted in a de-energized state unless there is no alternative method for accomplishing the work. In those cases obtain an energized work permit from the Contracting Officer. The energized work permit application must be accompanied by the AHA and a summary of why the equipment/circuit needs to be worked energized. Underground electrical spaces must be certified safe for entry before entering to conduct work. Cables that will be cut must be positively identified and de-energized prior to performing each cut. Attach temporary grounds in accordance with ASTM F855 and IEEE 1048. Perform all high voltage cable cutting remotely using hydraulic cutting tool. When racking in or live switching of circuit breakers, no additional person other than the switch operator is allowed in the space during the actual operation. Plan so that work near energized parts is minimized to the fullest extent possible. Use of electrical outages clear of any energized electrical sources is the preferred method.

When working in energized substations, only qualified electrical workers are permitted to enter. When work requires work near energized circuits as defined by NFPA 70, high voltage personnel must use personal protective equipment that includes, as a minimum, electrical hard hat, safety shoes, insulating gloves and electrical arc flash protection for personnel as required by NFPA 70E. Insulating blankets, hearing protection, and switching suits may also be required, depending on the specific job and as delineated in the Contractor's AHA. Ensure that each employee is familiar with and complies with these procedures and 29 CFR 1910.147.

3.9.2 Qualifications

Electrical work must be performed by QP with verifiable credentials who are familiar with applicable code requirements. Verifiable credentials consist of State, National and Local Certifications or Licenses that a Master or Journeyman Electrician may hold, depending on work being performed, and must be identified in the appropriate AHA. Journeyman/Apprentice ratio must be in accordance with State, Local requirements applicable to where work is being performed.

3.9.3 Arc Flash

Conduct a hazard analysis/arc flash hazard analysis whenever work on or near energized parts greater than 50 volts is necessary, in accordance with NFPA 70E.

All personnel entering the identified arc flash protection boundary must be QPs and properly trained in NFPA 70E requirements and procedures. Unless permitted by NFPA 70E, no Unqualified Person is permitted to approach nearer than the Limited Approach Boundary of energized conductors and circuit parts. Training must be administered by an electrically qualified source and documented.

3.9.4 Grounding

Ground electrical circuits, equipment and enclosures in accordance with NFPA 70 and IEEE C2 to provide a permanent, continuous and effective path to ground unless otherwise noted by EM 385-1-1.

Check grounding circuits to ensure that the circuit between the ground and a grounded power conductor has a resistance low enough to permit sufficient current flow to allow the fuse or circuit breaker to interrupt the current.

3.9.5 Testing

Temporary electrical distribution systems and devices must be inspected, tested and found acceptable for Ground-Fault Circuit Interrupter (GFCI) protection, polarity, ground continuity, and ground resistance before initial use, before use after modification and at least monthly. Monthly inspections and tests must be maintained for each temporary electrical distribution system, and signed by the electrical CP or QP.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 42 00

SOURCES FOR REFERENCE PUBLICATIONS
02/19

PART 1 GENERAL

1.1 REFERENCES

Various publications are referenced in other sections of the specifications to establish requirements for the work. These references are identified in each section by document number, date and title. The document number used in the citation is the number assigned by the standards producing organization (e.g., ASTM B564 Standard Specification for Nickel Alloy Forgings). However, when the standards producing organization has not assigned a number to a document, an identifying number has been assigned for reference purposes.

1.2 ORDERING INFORMATION

The addresses of the standards publishing organizations whose documents are referenced in other sections of these specifications are listed below, and if the source of the publications is different from the address of the sponsoring organization, that information is also provided.

ACOUSTICAL SOCIETY OF AMERICA (ASA)
1305 Walt Whitman Road, Suite 300
Melville, NY 11747-4300
Ph: 516-576-2360
Fax: 631-923-2875
E-mail: asa@acousticalsociety.org
Internet: https://acousticalsociety.org/

AIR BARRIER ASSOCIATION OF AMERICA (ABAA)
1600 Boston-Providence Hwy
Walpole, MA 02081
Ph: 1-866-956-5888
Fax: 1-866-956-5819
Internet: https://www.airbarrier.org/

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. (AMCA)
AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)
2111 Wilson Blvd, Suite 400
Arlington, VA 22201
Ph: 703-524-8800
Internet: http://www.ahrinet.org

ALLIANCE FOR TELECOMMUNICATIONS INDUSTRY SOLUTIONS (ATIS)
1200 G Street, NW, Suite 500
Washington, D.C. 20005
Ph: 202-628-6380
E-mail: nbutler@atis.org
Internet: http://www.atis.org

ALUMINUM ASSOCIATION (AA)
1400 Crystal Drive
Suite 430

Arlington, VA 22202
Ph: 703-358-2960
E-Mail: info@aluminum.org
Internet: https://www.aluminum.org/

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)
1900 E Golf Rd, Suite 1250
Schaumburg, IL 60173
Ph: 847-303-5664
E-mail: customerservice@aamanet.org
Internet: https://aamanet.org/

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
444 North Capital Street, NW, Suite 249
Washington, DC 20001
Ph: 202-624-5800
Fax: 202-624-5806
E-Mail: info@aashto.org
Internet: https://www.transportation.org/

AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA)
330 N. Wabash Ave., Suite 2000
Chicago, IL 60611
Ph: 202-367-1155
E-mail: info@americanbearings.org
Internet: https://www.americanbearings.org/

AMERICAN CONCRETE INSTITUTE (ACI)
38800 Country Club Drive
Farmington Hills, MI 48331-3439
Ph: 248-848-3700
Fax: 248-848-3701
Internet: https://www.concrete.org/

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)
1330 Kemper Meadow Drive
Cincinnati, OH 45240
Ph: 513-742-2020
Fax: 513-742-3355
Internet: https://www.acgih.org/

AMERICAN FOREST AND PAPER ASSOCIATION (AF&PA)
American Wood Council
Public Policy Office
1101 K Street NW, Suite 700
Washington, DC 20005
Ph: 800-890-7732 or 202-463-2766
Fax: 412-741-0609
E-mail: publications@awc.org
Internet: https://www.awc.org/

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)
130 East Randolph, Suite 2000
Chicago, IL 60601
Ph: 312-670-5444
Fax: 312-670-5403
Steel Solutions Center: 866-275-2472
E-mail: solutions@aisc.org

Internet: https://www.aisc.org/

AMERICAN IRON AND STEEL INSTITUTE (AISI)
25 Massachusetts Avenue, NW Suite 800
Washington, DC 20001
Ph: 202-452-7100
Internet: https://www.steel.org/

AMERICAN LADDER INSTITUTE (ALI)
330 N. Wabash, Suite 2000
Chicago, IL 60611
Ph: 312-321-6806
Fax: 312-673-6929
E-mail: info@americanladderinstitute.org
Internet: https://www.americanladderinstitute.org

AMERICAN LUMBER STANDARDS COMMITTEE (ALSC)
7470 New Technology Way, Suite F
Frederick, MD 21703
Ph: 301-972-1700
Fax: 301-540-8004
E-mail: alsc@alsc.org
Internet: http://www.alsc.org

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
1899 L Street, NW,11th Floor
Washington, DC 20036
Ph: 202-293-8020
Fax: 202-293-9287
E-mail: storemanager@ansi.org
Internet: https://www.ansi.org/

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)
1801 Alexander Bell Drive
Reston, VA 20191
Ph: 800-548-2723; 703-295-6300
Internet: https://www.asce.org/

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)
1791 Tullie Circle, NE
Atlanta, GA 30329
Ph: 404-636-8400 or 800-527-4723
Fax: 404-321-5478
E-mail: ashrae@ashrae.org
Internet: https://www.ashrae.org/

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)
Two Park Avenue
New York, NY 10016-5990
Ph: 800-843-2763
Fax: 973-882-1717
E-mail: customercare@asme.org
Internet: https://www.asme.org/

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)
520 N. Northwest Highway
Park Ridge, IL 60068
Ph: 847-699-2929

E-mail: customerservice@assp.org
Internet: https://www.assp.org/

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)
18927 Hickory Creek Drive, Suite 220
Mokena, IL 60448
Ph: 708-995-3019
Fax: 708-479-6139
Internet: http://www.asse-plumbing.org

AMERICAN WATER WORKS ASSOCIATION (AWWA)
6666 W. Quincy Avenue
Denver, CO 80235 USA
Ph: 303-794-7711 or 800-926-7337
Fax: 303-347-0804
Internet: https://www.awwa.org/

AMERICAN WELDING SOCIETY (AWS)
8669 NW 36 Street, #130
Miami, FL 33166-6672
Ph: 800-443-9353
Internet: https://www.aws.org/

AMERICAN WOOD COUNCIL (AWC)
222 Catoctin Circle SE, Suite 201
Leesburg, VA 20175
Ph: 800-890-7732
Fax: 412-741-0609
E-mail: publications@awc.org
Internet: https://www.awc.org/

AMERICAN WOOD PROTECTION ASSOCIATION (AWPA)
P.O. Box 361784
Birmingham, AL 35236-1784
Ph: 205-733-4077
Fax: 205-733-4075
Internet: http://www.awpa.com

AmericanHort (AH)
2130 Stella Court
Columbus, OH 43215
Ph: 614-487-1117 OH
Ph: 202-789-2900 DC
Internet: https://www.americanhort.org/

APA - THE ENGINEERED WOOD ASSOCIATION (APA)
7011 South 19th St.
Tacoma, WA 98466-5333
Ph: 253-565-6600
Fax: 253-565-7265
Internet: https://www.apawood.org/

ASPHALT INSTITUTE (AI)
2696 Research Park Drive
Lexington, KY 40511-8480
Ph: 859-288-4960
Fax: 859-288-4999

E-mail: info@asphaltinstitute.org
Internet: http://www.asphaltinstitute.org

ASSOCIATED AIR BALANCE COUNCIL (AABC)
1220 19th St NW, Suite 410
Washington, DC 20036
Ph: 202-737-0202
Fax: 202-315-0285
E-mail: info@aabc.com
Internet: https://www.aabc.com/

ASSOCIATION OF EDISON ILLUMINATING COMPANIES (AEIC)
600 North 18th Street
P.O. Box 2641
Birmingham, AL 35291
Ph: 205-257-3839
Fax: 205-257-2540
Internet: https://aeic.org/

ASTM INTERNATIONAL (ASTM)
100 Barr Harbor Drive, P.O. Box C700
West Conshohocken, PA 19428-2959
Ph: 610-832-9500
Fax: 610-832-9555
E-mail: service@astm.org
Internet: https://www.astm.org/

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)
355 Lexington Avenue, 15th Floor
New York, NY 10017
Ph: 212-297-2122
Fax: 212-370-9047
Internet: https://www.buildershardware.com/

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)
PO Box 997377, MS 0500
Sacramento, CA 95899-7377
Ph: 916-558-1784
Internet: https://www.cdph.ca.gov/

CENTERS FOR DISEASE CONTROL AND PREVENTION (CDC)
1600 Clifton Road
Atlanta, GA 30329-4027
Ph: 800-232-4636
TTY: 888-232-6348
Internet: https://www.cdc.gov

COMPOSITE PANEL ASSOCIATION (CPA)
19465 Deerfield Avenue, Suite 306
Leesburg, VA 20176
Ph: 703-724-1128
Fax: 703-724-1588
Internet: https://www.compositepanel.org/

CONCRETE REINFORCING STEEL INSTITUTE (CRSI)
933 North Plum Grove Road
Schaumburg, IL 60173-4758
Ph: 847-517-1200

Fax: 847-517-1206
Internet: http://www.crsi.org/

CONSUMER ELECTRONICS ASSOCIATION (CEA)
1919 South Eads St.
Arlington, VA 22202
Ph: 703-907-7600
E-mail: CTA@CTA.tech
Internet: https://www.cta.tech/

COPPER DEVELOPMENT ASSOCIATION (CDA)
Internet: https://www.copper.org/

COUNCIL ON ENVIRONMENTAL QUALITY (CEQ) (WHITE HOUSE)
722 Jackson Place
Washington DC 20506
Internet: https://www.whitehouse.gov/administration/eop/ceq

CSA GROUP (CSA)
178 Rexdale Blvd.
Toronto, ON, Canada M9W 1R3
Ph: 416-747-4044
Fax: 416-747-2510
E-mail: member@csagroup.org
Internet: https://www.csagroup.org/

DOOR AND ACCESS SYSTEM MANUFACTURERS ASSOCIATION (DASMA)
1300 Sumner Avenue
Cleveland, OH 44115-2851
Ph: 216-241-7333
Fax: 216-241-0105
Internet: https://www.dasma.com/

ELECTRONIC COMPONENTS INDUSTRY ASSOCIATION (ECIA)
310 Maxwell Road, Suite 200
Alpharetta, GA 30009
Ph: 678-393-9990
Fax: 678-393-9998
E-mail: emikoski@ecianow.org
Internet: https://www.ecianow.org

EUROPEAN UNION (EU)
European Commission
Rue de la Loi 200
1000 Bruxelle
Belgium
Ph: +32 2 299 96 96
Internet: https://ec.europa.eu/info/index_en

EXPANSION JOINT MANUFACTURERS ASSOCIATION (EJMA)
25 North Broadway
Tarrytown, NY 10591
Fax: 914-332-1541
E-mail: inquiries@ejma.org
Internet: http://www.ejma.org

FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA)
615 Chestnut Street
One Independence Mall, Sixth Floor

Philadelphia, PA 19106-4404
Ph: 215-931-5597
E-mail: femar3newsdesk@fema.dhs.gov
Internet: https://www.fema.gov/

FM GLOBAL (FM)
270 Central Avenue
Johnston, RI 02919-4949
Ph: 401-275-3000
Fax: 401-275-3029
Internet: https://www.fmglobal.com/

FOUNDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH (FCCCHR)
USC Foundation Office
Research Annex 219
Los Angeles, CA 90089-7700
Ph: 866-545-6340
Fax: 213-740-8399
E-mail: fccchr@usc.edu
Internet: https://fccchr.usc.edu/

GLASS ASSOCIATION OF NORTH AMERICA (GANA)
National Glass Association
1945 Old Gallows Rd., Suite 750
Vienna, VA 22182
Ph: 866-342-5642
Ph: 703-442-4890
Fax: 703-442-0630
Internet: http://www.glasswebsite.com

GREEN SEAL (GS)
1001 Connecticut Avenue, NW
Suite 827
Washington, DC 20036-5525
Ph: 202-872-6400
Fax: 202-872-4324
E-mail: greenseal@greenseal.org
Internet: https://www.greenseal.org/

GYPSUM ASSOCIATION (GA)
962 Wayne Ave., Suite 620
Silver Spring, MD 20910
Ph: 301-277-8686
Fax: 301-277-8747
E-mail: info@gypsum.org
Internet: https://www.gypsum.org/

HYDRAULIC INSTITUTE (HI)
6 Campus Drive, First Floor North
Parsippany, NJ 07054-4405
Ph: 973-267-9700
Fax: 973-267-9055
Internet: http://www.pumps.org

ICC EVALUATION SERVICE, INC. (ICC-ES)
3060 Saturn Street, Suite 100
Brea, CA 92821
Ph: 800-423-6587

Fax: 562-695-4694
E-mail: es@icc-es.org
Internet: https://icc-es.org/

ILLUMINATING ENGINEERING SOCIETY (IES)
120 Wall Street, Floor 17
New York, NY 10005-4001
Ph: 212-248-5000
Fax: 212-248-5018
E-mail: membership@ies.org
Internet: https://www.ies.org/

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)
445 and 501 Hoes Lane
Piscataway, NJ 08854-4141
Ph: 732-981-0060 or 800-701-4333
Fax: 732-981-9667
E-mail: onlinesupport@ieee.org
Internet: https://www.ieee.org/

INSULATED CABLE ENGINEERS ASSOCIATION (ICEA)
P.O. Box 493
Miamitown, OH 45041-9998
E-mail: info@icea.net
Internet: https://www.icea.net/

INSULATING GLASS MANUFACTURERS ALLIANCE (IGMA)
27 N. Wacker Dr. Suite 365
Chicago, IL 60606-2800
Ph: 613-233-1510
Fax: 613-482-9436
E-mail: enquiries@igmaonline.org
Internet: https://www.igmaonline.org/

INTERNATIONAL CAST POLYMER ASSOCIATION (ICPA)
4949 Old Brownsboro Rd, Ste. 232
Louisville, KY 40222
Ph: 470-219-8139
Internet: https://theicpa.com/

INTERNATIONAL CODE COUNCIL (ICC)
500 New Jersey Avenue, NW
6th Floor, Washington, DC 20001
Ph: 800-786-4452 or 888-422-7233
Fax: 202-783-2348
E-mail: order@iccsafe.org
Internet: https://www.iccsafe.org/

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)
3050 Old Centre Ave. Suite 101
Portage, MI 49024
Ph: 269-488-6382
Fax: 269-488-6383
Internet: https://www.netaworld.org/

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)
3, rue de Varembe, 1st floor
P.O. Box 131
CH-1211 Geneva 20, Switzerland

Ph: 41-22-919-02-11
Fax: 41-22-919-03-00
E-mail: info@iec.ch
Internet: https://www.iec.ch/

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)
ISO Central Secretariat
BIBC II
Chemin de Blandonnet 8
CP 401 - 1214 Vernier, Geneva
Switzerland
Ph: 41-22-749-01-11
E-mail: central@iso.ch
Internet: https://www.iso.org

INTERNATIONAL SAFETY EQUIPMENT ASSOCIATION (ISEA)
1901 North Moore Street
Arlington, VA 22209-1762
Ph: 703-525-1695
Fax: 703-528-2148
Internet: https://safetyequipment.org/

L.H. BAILEY HORTORIUM (LHBH)
Plant Biology Units
The L.H. Bailey Hortorium and Herbarium
440 Mann Library Building
Ithaca, NY 14853
Ph: 607-255-1052
Fax: 607-254-5407
Internet: https://plantbio.cals.cornell.edu/hortorium/

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)
127 Park Street, NE
Vienna, VA 22180-4602
Ph: 703-281-6613
E-mail: info@msshq.org
Internet: http://msshq.org

MARBLE INSTITUTE OF AMERICA (MIA)
Natural Stone Institute
380 E. Lorain Street
Oberlin, OH 44074
Ph: 440-250-9222
Fax: 440-774-9222
E-mail: info@naturalstoneinstitute.org
Internet: https://www.naturalstoneinstitute.org/

MASTER PAINTERS INSTITUTE (MPI)
2800 Ingleton Avenue
Burnaby, BC CANADA V5C 6G7
Ph: 1-888-674-8937
Fax: 1-888-211-8708
E-mail: info@paintinfo.com or techservices@mpi.net
Internet: http://www.mpi.net/

METAL FRAMING MANUFACTURERS ASSOCIATION (MFMA)
330 N. Wabash Avenue
Chicago, IL 60611

Ph: 312-644-6610
E-mail: MFMAstats@smithbucklin.com
Internet: http://www.metalframingmfg.org/

MIDWEST INSULATION CONTRACTORS ASSOCIATION (MICA)
16712 Elm Circle
Omaha, NE 68130
Ph: 402-342-3463 or 800-747-6422
Fax: 402-330-9702
Internet: https://www.micainsulation.org/

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)
800 Roosevelt Road, Bldg C, Suite 312
Glen Ellyn, IL 60137
Ph: 630-942-6591
Fax: 630-790-3095
E-mail: info@naamm.org
Internet: http://www.naamm.org

NATIONAL BOARD OF BOILER AND PRESSURE VESSEL INSPECTORS (NBBI)
1055 Crupper Avenue
Columbus, OH 43229-1183
Ph: 614-888-8320
Fax: 614-888-0750
E-mail: information@nationalboard.org
Internet: https://www.nationalboard.org

NATIONAL ELECTRICAL CONTRACTORS ASSOCIATION (NECA)
3 Bethesda Metro Center, Suite 1100
Bethesda, MD 20814
Ph: 301-657-3110
Fax: 301-215-4500
Internet: https://www.necanet.org/

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)
1300 North 17th Street, Suite 900
Arlington, VA 22209
Ph: 703-841-3200
Internet: https://www.nema.org

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)
8575 Grovemont Circle
Gaithersburg, MD 20877
Ph: 301-977-3698
Fax: 301-977-9589
Internet: http://www.nebb.org

NATIONAL FENESTRATION RATING COUNCIL (NFRC)
6305 Ivy Lane, Suite 140
Greenbelt, MD 20770
Ph: 301-589-1776
Fax: 301-589-3884
E-Mail: info@nfrc.org
Internet: http://www.nfrc.org

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)
1 Batterymarch Park
Quincy, MA 02169-7471

Ph: 800-344-3555
Fax: 800-593-6372
Internet: https://www.nfpa.org

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES (NICET)
1420 King Street
Alexandria, VA 22314-2794
Ph: 888-476-4238 (1-888 IS-NICET)
E-mail: tech@nicet.org
Internet: https://www.nicet.org/

NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)
100 Bureau Drive
Gaithersburg, MD 20899
Ph: 301-975-2000
Internet: https://www.nist.gov/

NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)
10255 West Higgins Road, Suite 600
Rosemont, IL 60018-5607
Ph: 847-299-9070
Fax: 847-299-1183
Internet: http://www.nrca.net

NSF INTERNATIONAL (NSF)
789 North Dixboro Road
P.O. Box 130140
Ann Arbor, MI 48105
Ph: 734-769-8010 or 800-NSF-MARK
Fax: 734-769-0109
E-mail: info@nsf.org
Internet: http://www.nsf.org

ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT (OECD)
2, rue Andre Pascal
75775 Paris Cedex 16, France
Ph: + 33 1 45 24 82 00
Fax: 33 1 45 24 85 00
Internet: http://www.oecd.org
U.S. Contact Center
OECD Washington Center
1776 I Street, NW, Suite 450
Washington, DC 20006
Ph: 202-785-6323
E-mail: washington.contact@oecd.org

PLASTIC PIPE AND FITTINGS ASSOCIATION (PPFA)
800 Roosevelt Road
Building C, Suite 312
Glen Ellyn, IL 60137
Ph: 630-858-6540
Fax: 630-790-3095
Internet: https://www.ppfahome.org/

PLUMBING AND DRAINAGE INSTITUTE (PDI)
800 Turnpike Street, Suite 300
North Andover, MA 01845
Ph: 978-557-0720 or 800-589-8956
E-Mail: pdi@PDIonline.org
Internet: http://www.pdionline.org

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)
2000 Powell Street, Suite 600
Emeryville, CA 94608
Ph: 510-452-8000
Fax: 510-452-8001
E-mail: info@SCSglobalservices.com
Internet: https://www.scsglobalservices.com/

SCREEN MANUFACTURERS ASSOCIATION (SMA)
Ph: 773-636-0672
E-mail: Kathryn@SMAinfo.org
Internet: http://smainfo.org

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)
4201 Lafayette Center Drive
Chantilly, VA 20151-1219
Ph: 703-803-2980
Fax: 703-803-3732
Internet: https://www.smacna.org/

SOCIETY FOR PROTECTIVE COATINGS (SSPC)
800 Trumbull Drive
Pittsburgh, PA 15205
Ph: 877-281-7772 or 412-281-2331
Fax: 412-444-3591
E-mail: customerservice@sspc.org
Internet: http://www.sspc.org

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)
400 Commonwealth Drive
Warrendale, PA 15096
Ph: 877-606-7323 or 724-776-4841
Fax: 724-776-0790
E-mail: customerservice@sae.org
Internet: https://www.sae.org/

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)
21865 Copley Drive
Diamond Bar, CA 91765
Ph: 909-396-2000
E-mail: webinquiry@aqmd.gov
Internet: http://www.aqmd.gov

SOUTHERN PINE INSPECTION BUREAU (SPIB)
P.O. Box 10915
Pensacola, FL 32524-0915
Ph: 850-434-2611 or 800-995-7742
Fax: 850-434-1290
E-mail: spib@spib.org
Internet: https://www.spib.org/

SPRAY POLYURETHANE FOAM ALLIANCE (SPFA)
3927 Old Lee Hwy. #101B
Fairfax, VA 22030
Ph: 800-523-6154
Fax: 703-222-5816
Internet: http://www.sprayfoam.org

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION (NCDOT)
Transportation Bldg
1 S. Wilmington St.
Raleigh, NC 27601
Ph: 877-368-4968
Internet: https://ncdot.gov/

STEEL DECK INSTITUTE (SDI)
P.O. Box 426
Glenshaw, PA 15116
Ph: 412-487-3325
Fax: 412-487-3326
Internet: https://www.sdi.org/

STEEL DOOR INSTITUTE (SDI/DOOR)
30200 Detroit Road
Westlake, OH 44145
Ph: 440-899-0010
Fax: 440-892-1404
E-mail: info@steeldoor.org
Internet: https://www.steeldoor.org/

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)
15 Technology Parkway South, Suite 115
Peachtree Corners, GA 30092
Ph: 800-332-8686 or 770-446-1400
Fax: 770-446-6947
E-mail: memberconnection@tappi.org
Internet: http://www.tappi.org

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)
1320 North Courthouse Rosd, Suite 200
Arlington, VA 22201
Ph: 703-907-7700
Fax: 703-907-7727
E-mail: marketing@tiaonline.org
Internet: https://www.tiaonline.org/

THE MASONRY SOCIETY (TMS)
105 South Sunset Street, Suite Q
Longmont, CO 80501-6172
Ph: 303-939-9700
Fax: 303-541-9215
E-mail: info@masonrysociety.org
https://masonrysociety.org/

TILE COUNCIL OF NORTH AMERICA (TCNA)
100 Clemson Research Boulevard
Anderson, SC 29625
Ph: 864-646-8453
Fax: 864-646-2821

E-mail: info@tileusa.com
Internet: https://www.tcnatile.com/

TREE CARE INDUSTRY ASSOCIATION (TCIA)
136 Harvey Road, Suite 101
Londonderry, NH 03053
Ph: 603-314-5380 or 800-733-2622
Fax: 603-314-5386
Internet: https://tcia.org/

TURFGRASS PRODUCERS INTERNATIONAL (TPI)
444 E. Roosevelt Road
#346
Lombard, IL 60148
Ph: 800-405-8873 or 847-649-5555
Fax: 847-649-5678
E-mail: info@turfgrasssod.org
Internet: http://www.turfgrasssod.org

U.S. AIR FORCE (USAF)
E-mail: usaf.pentagon.saf-aa.mbx.AFDPO-PPL@mail.mil
Internet: https://www.e-publishing.af.mil/

U.S. ARMY CORPS OF ENGINEERS (USACE)
CRD-C DOCUMENTS available on Internet:
http://www.wbdg.org/ffc/army-coe/standards
Order Other Documents from:
Official Publications of the Headquarters, USACE
E-mail: hqpublications@usace.army.mil
Internet: http://www.publications.usace.army.mil/
or
https://www.hnc.usace.army.mil/Missions/Engineering-Directorate/TECHINFO/

U.S. DEFENSE LOGISTICS AGENCY (DLA)
Andrew T. McNamara Building
8725 John J. Kingman Road
Fort Belvoir, VA 22060-6221
Ph: 877-352-2255
E-mail: dlacontactcenter@dla.mil
Internet: http://www.dla.mil

U.S. DEPARTMENT OF AGRICULTURE (USDA)
Order AMS Publications from:
AGRICULTURAL MARKETING SERVICE (AMS)
Seed Regulatory and Testing Branch
801 Summit Crossing Place, Suite C
Gastonia, NC 28054-2193
Ph: 704-810-8884
E-mail: PA@ams.usda.gov
Internet: https://www.ams.usda.gov/
Order Other Publications from:
USDA Rural Development
Rural Utilities Service
STOP 1510, Rm 5135
1400 Independence Avenue SW
Washington, DC 20250-1510
Phone: (202) 720-9540
Internet:

https://www.rd.usda.gov/about-rd/agencies/rural-utilities-service

U.S. DEPARTMENT OF DEFENSE (DOD)
Order DOD Documents from:
Room 3A750-The Pentagon
1400 Defense Pentagon
Washington, DC 20301-1400
Ph: 703-571-3343
Fax: 215-697-1462
E-mail: customerservice@ntis.gov
Internet: https://www.ntis.gov/
Obtain Military Specifications, Standards and Related Publications from:
Acquisition Streamlining and Standardization Information System (ASSIST)
Department of Defense Single Stock Point (DODSSP)
Document Automation and Production Service (DAPS)
Building 4/D
700 Robbins Avenue
Philadelphia, PA 19111-5094
Ph: 215-697-6396 - for account/password issues
Internet: https://assist.dla.mil/online/start/; account registration required
Obtain Unified Facilities Criteria (UFC) from:
Whole Building Design Guide (WBDG)
National Institute of Building Sciences (NIBS)
1090 Vermont Avenue NW, Suite 700
Washington, DC 20005
Ph: 202-289-7800
Fax: 202-289-1092
Internet:
https://www.wbdg.org/ffc/dod/unified-facilities-criteria-ufc

U.S. DEPARTMENT OF ENERGY (DOE)
1000 Independence Avenue Southwest
Washington, D.C. 20585
Ph: 202-586-5000
Fax: 202-586-4403
E-mail: The.Secretary@hq.doe.gov
Internet: https://www.energy.gov/

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)
1200 Pennsylvania Avenue, N.W.
Washington, DC 20004
Ph: 202-564-4700
Internet: https://www.epa.gov
--- Some EPA documents are available only from:
National Technical Information Service (NTIS)
5301 Shawnee Road
Alexandria, VA 22312
Ph: 703-605-6060 or 1-800-363-2068
Fax: 703-605-6880
TDD: 703-487-4639
E-mail: info@ntis.gov
Internet: https://www.ntis.gov/

U.S. FEDERAL COMMUNICATIONS COMMISSION (FCC)
445 12th Street SW
Washington, DC 20554

Ph: 888-225-5322
TTY: 888-835-5322
Fax: 866-418-0232
Internet: https://www.fcc.gov/
Order Publications From:
Superintendent of Documents
U.S. Government Publishing Office (GPO)
732 N. Capitol Street, NW
Washington, DC 20401
Ph: 202-512-1800 or 866-512-1800
Bookstore: 202-512-0132
Internet: https://www.gpo.gov/

U.S. FEDERAL HIGHWAY ADMINISTRATION (FHWA)
1200 New Jersey Ave., SE
Washington, DC 20590
Ph: 202-366-4000
E-mail: ExecSecretariat.FHWA@dot.gov
Internet: https://www.fhwa.dot.gov/
Order from:
Superintendent of Documents
U.S. Government Publishing Office (GPO)
732 N. Capitol Street, NW
Washington, DC 20401
Ph: 202-512-1800 or 866-512-1800
Bookstore: 202-512-0132
Internet: https://www.gpo.gov/

U.S. GENERAL SERVICES ADMINISTRATION (GSA)
General Services Administration
1800 F Street, NW
Washington, DC 20405
Ph: 1-844-472-4111
Internet: https://www.gsaelibrary.gsa.gov/ElibMain/home.do
Obtain documents from:
Acquisition Streamlining and Standardization Information System (ASSIST)
Internet: https://assist.dla.mil/online/start/; account registration required

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)
8601 Adelphi Road
College Park, MD 20740-6001
Ph: 866-272-6272
Internet: https://www.archives.gov/
Order documents from:
Superintendent of Documents
U.S. Government Publishing Office (GPO)
732 N. Capitol Street, NW
Washington, DC 20401
Ph: 202-512-1800 or 866-512-1800
Bookstore: 202-512-0132
Internet: https://www.gpo.gov/

UL ENVIRONMENT (ULE)
2211 Newmarket Parkway, Suite 106
Marietta, GA 30067
Ph: 888-485-4733
E-mail: environment@ul.com

Intertet: https://industries.ul.com/environment/

UNDERWRITERS LABORATORIES (UL)
2600 N.W. Lake Road
Camas, WA 98607-8542
Ph: 877-854-3577 or 360-817-5500
E-mail: CustomerExperienceCenter@ul.com
Internet: https://www.ul.com/
UL Directories available through IHS at https://ihsmarkit.com/

UL SOLUTIONS (UL)
333 Pfingsten Road
Northbrook, IL 60062
Ph: 847-272-8800 or 877-854-3577
Fax: 847-649-5678
Internet: http://www.ul.com

UNI-BELL PVC PIPE ASSOCIATION (UBPPA)
Corporate Headquarters
2711 LBJ Freeway, Suite 1000
Dallas, TX 75234
Ph: 972-243-3902
Fax: 972-243-3907
E-mail: info@uni-bell.org
Internet: https://www.uni-bell.org/

VIBRATION ISOLATION AND SEISMIC CONTROL MANUFACTURERS ASSOCIATION (VISCMA)
994 Old Eagle School Road
Suite 1019
Wayne, PA 19087-1866
Ph: 610-971-4850
E-mail: info@viscma.com
Internet: http://www.viscma.com

WINDOW AND DOOR MANUFACTURERS ASSOCIATION (WDMA)
2025 M Street, NW, Suite 800
Washington, DC 20036-3309
Ph: 202-367-1157
or
330 N Wabash Avenue, Suite 2000
Chicago, IL 60611
Ph: 312-321-6802
E-mail: membersupport@wdma.com
Internet: https://www.wdma.com/

WOODWORK INSTITUTE (WI)
3188 Industrial Blvd.
West Sacramento, CA 95691
Ph: 916-372-9943
Fax: 916-372-9950
E-mail: info@woodinst.com
Internet: https://woodworkinstitute.com

PART 2 PRODUCTS

Not used

PART 3 EXECUTION

Not used

-- End of Section --

SECTION 01 45 00

QUALITY CONTROL
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C1077	(2026) Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation
ASTM D3666	(2016) Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials
ASTM D3740	(2019) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
ASTM E329	(2023) Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
ASTM E543	(2021) Standard Specification for Agencies Performing Non-Destructive Testing

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

1.2 PAYMENT

Separate payment will not be made for providing and maintaining an effective Quality Control program. Include all associated costs in the applicable Bid Schedule item.

1.3 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

SD-01 Preconstruction Submittals

Contractor Quality Control (CQC) Plan; G

SD-06 Test Reports

Verification Statement

1.4 GENERAL REQUIREMENTS

Establish and maintain an effective quality control (QC) system that complies with FAR 52.246-12 Inspection of Construction. QC is comprised of plans, procedures, and organization necessary to produce an end product that complies with the Contract requirements. The QC system covers all construction operations, both onsite and offsite, and must be keyed to the proposed construction sequence. The Quality Control Manager, Superintendent, Site Safety and Health Officer (SSHO), and all on-site supervisors are responsible for the quality of work and are subject to removal by the Contracting Officer for non-compliance with the quality requirements specified in the Contract. The Quality Control Manager must maintain a physical presence at the work site at all times and is the primary individual responsible for all quality control.

1.5 QUALITY CONTROL (QC) PROGRAM REQUIREMENTS

Establish and maintain a QC program as described in this section. The QC program consists of a QC Organization, QC Plan, QC Plan Meeting(s), a Coordination and Mutual Understanding Meeting, QC meetings, three phases of control, submittal review and approval, testing, completion inspections, QC certifications, and documentation necessary to provide materials, equipment, workmanship, fabrication, construction and operations that comply with the requirements of this Contract. The QC program must cover on-site and off-site work and be keyed to the work sequence. No construction work or testing may be performed unless the QC Manager is on the work site. The QC Manager must report to an officer of the firm and not be subordinate to the Project Superintendent or the Project Manager. The QC Manager, Project Superintendent and Project Manager must work together effectively. Although the QC Manager is the primary individual responsible for quality control, all individuals will be held responsible for the quality of work on the job.

1.5.1 Meetings

1.5.1.1 Quality Control Plan Meeting

Prior to submission of the QC Plan, the Contractor may request a meeting with the Contracting Officer to discuss the QC Plan requirements of this Contract.

The purpose of this meeting is to develop a mutual understanding of the QC Plan requirements prior to plan development and submission and to agree on the Contractor's list of Definable Feature of Work (DFOW).

1.5.1.2 Coordination and Mutual Understanding Meeting

After the Preconstruction Conference, before start of construction, and prior to acceptance by the Government of the CQC Plan, meet with the Contracting Officer and discuss the Contractor's quality control system. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CQC operations, control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting will be prepared by the QC Manager and signed by the Contractor and the Government. Provide a copy of the signed minutes to all attendees and

include in the QC Plan. At a minimum the Coordination and Mutual Understanding Meeting must be repeated when a new QC Manager is appointed. There can be other occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

1.5.1.2.1 Purpose

The purpose of this meeting is to develop a mutual understanding of the QC details, including documentation, administration for on-site and off-site work, design intent, environmental requirements and procedures, coordination of activities to be performed, and the coordination of the Contractor's management, production, and QC personnel. At the meeting, the Contractor must explain in detail how three phases of control will be implemented for each DFOW, as well as how each DFOW will be affected by each management plan or requirement as listed below:

a. Waste Management Plan.

b. Procedures for noise and acoustics management.

c. Environmental Protection Plan.

d. Environmental regulatory requirements.

1.5.1.2.2 Coordination of Activities

Coordinate activities included in various sections to assure efficient and orderly installation of each component. Coordinate operations included under different sections that are dependent on each other for proper installation and operation.

1.5.1.2.3 Attendees

As a minimum, the Contractor's personnel required to attend include an officer of the firm, the Project Manager, Project Superintendent, QC Manager, Alternate QC Manager, QC Specialists, Environmental Manager, and subcontractor representatives. Each subcontractor who will be assigned QC responsibilities must have a principal of the firm at the meeting.

1.5.1.3 Quality Control (QC) Meetings

After the start of construction, conduct weekly QC meetings led by the QC Manager at the work site with the Project Superintendent, the QC Specialists, and the other personnel as necessary. The QC Manager is to prepare the minutes of the meeting and provide a copy to the Contracting Officer within 2 working days after the meeting. The Contracting Officer may attend these meetings. As a minimum, accomplish the following at each meeting:

a. Review the minutes of the previous meeting.

b. Review the schedule and the status of work and deficiencies/rework. Review the most current approved schedule (in accordance with schedule specification) and the status of work and deficiencies/rework.

c. Review the status of submittals and Request For Information (RFIs).

d. Review the work to be accomplished in the next 3 weeks as defined by the schedule section paragraph 3-WEEK LOOK AHEAD SCHEDULE in Section 01 32 16.00 20 SMALL PROJECT CONSTRUCTION PROGRESS SCHEDULES and all documentation required for that work.

e. Review Testing Plan and Log including status of tests performed since last QC Meeting.

f. Resolve QC and production problems. Discuss status of pending change orders.

g. Address items that may require revising the QC Plan.

h. Review Accident Prevention Plan (APP) and effectiveness of the safety program.

i. Review environmental requirements and procedures.

j. Review Environmental Management Plan.

k. Review Waste Management Plan.

l. Review the status of training completion.

1.5.2 Contractor Quality Control (CQC) Plan

Submit no later than 30 days after Contract Award, the CQC Plan proposed to implement the requirements FAR 52.246-12 Inspection of Construction. Construction will be permitted to begin only after acceptance of the CQC Plan and other Contract requirements

1.5.2.1 Content of Contractor Quality Control (CQC) Plan

Provide a CQC Plan, prior to start of construction that includes a table of contents, with major sections identified, pages numbered sequentially, and that documents the proposed methods and responsibilities for accomplishing quality control during the construction of the project. The CQC Plan must at a minimum include the following sections:

a. A description of the quality control organization and acknowledgment that the CQC staff will implement the three phase control system for all aspects of the work specified.

b. An organizational chart showing the quality control organization with individual names and job titles and lines of authority up to an executive of the company at the home office.

c. NAMES AND QUALIFICATIONS: Names and qualifications, in resume format, (including position titles and durations for qualifying experiences) for each person in the QC organization. Include the Construction Quality Management (CQM) for Contractors course certifications for the QC personnel as required by the paragraph CONSTRUCTION QUALITY MANAGEMENT TRAINING.

d. DUTIES, RESPONSIBILITY AND AUTHORITY OF QC PERSONNEL: Duties, responsibilities, and authorities of each person in the QC organization.

e. OUTSIDE ORGANIZATIONS: A listing of outside organizations, such as

architectural and consulting engineering firms, that will be employed by the Contractor and a description of the services these firms will provide.

f. APPOINTMENT LETTERS: Letters signed by an officer of the firm appointing the QC Manager and Alternate QC Manager, and stating that they are responsible for implementing and managing the QC program as described in this Contract. Include in this letter the responsibility of the QC Manager and Alternate QC Manager to implement and manage the three phases of control, and their authority to stop work that is not in compliance with the Contract. Letters of direction are to be issued by the QC Manager to all other QC Specialists or quality control representatives outlining their duties, authorities, and responsibilities. Include copies of the letters in the QC Plan.

g. SUBMITTAL PROCEDURES AND INITIAL SUBMITTAL REGISTER: Procedures for reviewing, approving, scheduling, and managing submittals, including those of subcontractors, offsite fabricators, suppliers, and purchasing agents. Provide the name(s) of the person(s) in the QC organization authorized to review and certify submittals prior to approval. Provide the initial submittal of the Submittal Register as specified in Section 01 33 00 SUBMITTAL PROCEDURES.

h. TESTING LABORATORY INFORMATION: Testing laboratory information required by the paragraph ACCREDITATION REQUIREMENTS, as applicable.

i. TESTING PLAN AND LOG: A Testing Plan and Log that includes the tests required, associated feature of work required, referenced by the specification paragraph number requiring the test, the frequency, and the person responsible for each test.

j. Procedures to complete construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected. This phase is performed prior to beginning work on each definable feature of work, after all required plans, documents, materials are approved, and after copies are at the work site.

k. Reporting procedures, including proposed reporting formats.

l. Procedures for submitting and reviewing design changes/variations prior to submission to the Contracting Officer.

m. LIST OF DEFINABLE FEATURES: A Definable Feature of Work (DFOW) is a task that is separate and distinct from other tasks and has control requirements and work crews unique to that task. A DFOW is identified by different trades or disciplines, or it is work by the same trade in a different environment. A DFOW is by definition any item or activity on the construction schedule, and the schedule specification provides direction regarding how the DFOWs are to be structured. Include in the list of DFOWs for all activities on the Construction Schedule. Although each section of the specifications can generally be considered as a definable feature of work, there are frequently more than one definable features under a particular section. Identify the specification section number and schedule activity ID for each DFOW listed. The DFOW list will be reviewed in coordination with the construction schedule and agreed upon during the Coordination of Mutual Understanding Meeting.

n. PROCEDURES FOR PERFORMING AND TRACKING THE THREE PHASES OF CONTROL: Identify procedures used to ensure the three phases of control to manage the quality on this project. For each Definable Feature of Work (DFOW), a Preparatory and Initial phase checklist will be filled out during the Preparatory and Initial phase meetings. Conduct the Preparatory and Initial Phases and meetings with a view towards obtaining quality construction by planning ahead and identifying potential problems for each DFOW.

o. PROCEDURES FOR COMPLETION INSPECTION: Procedures for identifying and documenting the completion inspection process. Include in these procedures the responsible party for punch out inspection, pre-final inspection, and final acceptance inspection.

p. TRAINING PROCEDURES AND TRAINING LOG: Procedures for coordinating and documenting the training of personnel required by the Contract.

q. ORGANIZATION AND PERSONNEL CERTIFICATIONS LOG: Procedures for coordinating, tracking and documenting all certifications required for entities such as subcontractors, testing laboratories, suppliers, and personnel. The QC Manager will ensure that certifications are current, appropriate for the work being performed, and will not lapse during any period of the Contract that the work is being performed.

1.5.3 Acceptance of the Quality Control (QC) Plan

The Contracting Officer's acceptance of the Contractor QC Planis required prior to the start of construction. The Contracting Officer reserves the right to require changes in the QC Plan and operations as necessary, including removal or addition of personnel, to ensure the specified quality of work. The Contracting Officer reserves the right to interview any member of the QC organization at any time to verify the submitted qualifications. All QC organization personnel are subject to acceptance by the Contracting Officer. The Contracting Officer may require the removal of any individual for non-compliance with quality requirements specified in the Contract.

1.5.4 Preliminary Construction Work Authorized Prior to Acceptance

The only construction work that is authorized to proceed prior to the acceptance of the QC Plan is mobilization of storage and office trailers, temporary utilities, and surveying with specific prior approval of the Contracting Officer.

1.5.5 Notification of Changes

Notify the Contracting Officer, in writing, of any proposed changes in the QC Plan or changes to the QC organization personnel. Proposed changes are subject to acceptance by the Contracting Officer.

1.6 QUALITY CONTROL (QC) ORGANIZATION

1.6.1 Quality Control (QC) Manager

1.6.1.1 Duties

Provide a QC Manager at the work site to implement and manage the QC program, and to serve as the Site Safety and Health Officer (SSHO) as detailed in Section 01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS. In addition

to implementing and managing the QC program, the QC Manager may perform the duties of Project Superintendent. The QC Manager must attend the partnering meetings, QC Plan Meetings, Coordination and Mutual Understanding Meeting, conduct the QC meetings, perform the three phases of control except for those phases of control designated to be performed by QC Specialists, perform submittal review and approval, ensure testing is performed and provide QC certifications and documentation required in this Contract. The QC Manager is responsible for managing and coordinating the three phases of control and documentation performed by the QC Specialists, testing laboratory personnel and any other inspection and testing personnel required by this Contract. The QC Manager is the manager of all QC activities.

1.6.1.2 Qualifications

The QC Manager must be an individual with a minimum of 10 years combined experience in the following positions: Project Superintendent, QC Manager, Project Manager, Project Engineer or Construction Manager on similar size and type construction Contracts which included the major trades that are part of this Contract. The individual must have at least 2 years experience as a QC Manager. The individual must be familiar with the requirements of EM 385-1-1 and have experience in the areas of hazard identification, safety compliance, and sustainability.

The QC Manager and all members of the QC organization must be capable of reading, writing, and conversing fluently in the English language.

1.6.1.3 Construction Quality Management Training

In addition to the above experience and education requirements, the QC Manager and all members of the QC team must have completed the CQM for Contractors course. If the QC Manager does not have a current certification, obtain the CQM for Contractors course certification within 90 days of award. This course is periodically offered by the Naval Facilities Engineering Systems Command and the Army Corps of Engineers. Contact the Contracting Officer for information on the next scheduled class.

The Construction Quality Management Training certificate expires after 5 years. If the QC Manager's certificate has expired, retake the course to remain current.

1.6.2 Organizational Changes

Maintain the QC staff with personnel as required by the specification section at all times. When it is necessary to make changes to the QC staff, revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer for acceptance.

1.6.3 Alternate Quality Control (QC) Manager Duties and Qualifications

Designate an alternate for the QC Manager at the work site to serve in the event of the designated QC Manager's absence. The period of absence may not exceed 2 weeks at one time, and not more than 30 workdays during a calendar year. The qualification requirements for the Alternate QC Manager must be the same as for the QC Manager.

1.6.4 Quality Control (QC) Specialists

Provide a separate QC Specialist at the work site for Telecommunications and Fire Protection, who must assist and report to the QC Manager and who may perform production related duties but must be allowed sufficient time to perform their assigned quality control duties. These individuals or specialized technical companies are employees of the Prime or subcontractor.

1.6.4.1 Fire Protection QC Specialist (FPQC)

Provide a Fire Protection Quality Control Specialist (FPQC) within the QC organization to perform quality control related activities as specified herein on fire protection and life safety systems installed under this Contract.

1.6.4.1.1 Qualifications

The FPQC must have the following qualifications:

a. Be a registered Professional Engineer (P.E.) licensed by a Licensing Board in the United States, the District of Columbia, Guam or Puerto Rico, having passed the National Council of Examiners for Engineering and Surveying (NCEES) examination specifically in the discipline of Fire Protection Engineering.

b. Have a minimum of 5 years of Fire Protection Engineering experience on projects of similar relevance and complexity to the fire protection work specified under this Contract.

c. Other than the contractual obligations with the Prime Contractor, the FPQC must have no other business relationship (i.e., employee, owner, partner, operating officer, distributor, salesman, technical representative, family relationship, or financial investment) with the Prime Contractor or subcontractors.

d. Be employed by an independent engineering firm or company. The firm may identify multiple, to a maximum of five, licensed Fire Protection Engineers for the performance of the duties under this Contract but must submit the names and qualifications for Government approval for all individuals identified prior to them performing any work under this Contract. These individuals may not be substituted without prior approval from the Contracting Officer.

1.6.4.1.2 Responsibilities

FPQC duties and responsibilities:

a. Assist in the development of the QC Plan including the Testing Plan and Log and executing the three phases of control for work involving the installation and testing of fire protection and life safety systems as an extension of the QC Manager.

b. Participate in project QC Meetings. Participate in Preparatory and Initial Phase meetings and perform and Follow-up inspections for work involving the installation and testing of fire protection and life safety systems.

c. Review and certify that all submittals pertaining to fire protection and life safety systems are complete and accurate prior to submission

to the Government for approval. The FPQC Specialist is responsible for ensuring submittals are complete and accurate and all corrections have been made prior to submission to the Government. The Government reserves the right to reject any submittal that has not first been reviewed and certified by the FPQC and so marked, in writing, attesting to such review and completeness of the submittal.

d. The Government reserves the right to reject any submittal or construction that is not in compliance to Contract. Government reviews do not relieve the Contractor responsibility for providing adequate quality control measures and do not constitute or imply acceptance of Contract variation.

e. Perform construction surveillance in accordance with the Schedule of Fire Protection System Inspections. Construction surveillance includes but is not limited to performing periodic on-site inspections during construction at specified milestones, performing a pre-final inspection of installed systems and witnessing functional testing; and participating and documenting in an on-site final acceptance inspection of fire protection and life safety systems with the Government FPE.

f. Document inspection results on a FPQC report prepared each day inspections are performed. The report must include a description of the visual inspection or observation performed, a written summary of findings, a conclusion on compliance with the Contract documents, and signature of the FPQC Specialist. In person inspection must be documented via video (.mp4) or photo (.jpeg). Video/photographic documentation must include before and after conditions and physical measurements. Forward the FPQC daily report to the QC Manager who must include the report with the submission of their daily QC Report to the Government each day. Every site visit by the FPQC must be documented on a FPQC daily report.

1.6.4.1.3 Schedule of Fire Protection System Inspections

A schedule, prepared by the Fire Protection DOR, which lists each of the required visual inspections and observations required by the FPQC. The schedule is included at the end of this UFGS section.

1.6.4.2 Telecommunications QC Specialist

Provide a separate QC Specialist at the work site for each of the areas of responsibilities for the following:

Electrical and Telecommunication Systems QC Specialists.

Provide ICC IBC Special Inspection Certification from the following specialist:

Telecommunications Systems Installation Specialist, (10) years minimum experience in Telecommunication Systems Installation.

Area of responsibility:

Telecommunication Systems, all Division 27, Division 28, and Division 33 Outside Plant work.

Frequency of specialists is full time during systems installation and

testing. QC Specialists are required to attend the Coordination and Mutual Understanding Meeting, QC meetings and be physically present at the construction site to perform the three phases of control and prepare documentation for each definable feature of work in their area of responsibility.

1.7 SUBMITTAL AND DELIVERABLES REVIEW AND APPROVAL

Procedures for submission, review and approval of submittals are described in Section 01 33 00 SUBMITTAL PROCEDURES. Procedures must include field verification of relevant dimensions and component characteristics by the QC organization prior to submittal being sent to the Contracting Officer. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the Contract.

1.8 THREE PHASES OF CONTROL

CQC enables the Contractor to ensure that the construction, including that of subcontractors and suppliers, complies with the requirements of the Contract. At least three phases of control must be conducted by the QC Manager to adequately cover both on-site and off-site work for each definable feature of the construction work as follows:

1.8.1 Preparatory Phase

Document the results of the preparatory phase actions by separate minutes prepared by the QC Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required to meet Contract specifications.

Notify the Contracting Officer at least 2 business days in advance of each preparatory phase meeting. The meeting will be conducted by the QC Manager and attended by the QC Specialists, the Project Superintendent,and the foreman responsible for the DFOW. When the DFOW will be accomplished by a subcontractor, that subcontractor's foreman must attend the preparatory phase meeting. This phase is performed prior to beginning work on each definable feature of work, after all required plans/documents/materials are approved/accepted, and after copies are at the work site. Perform the following prior to beginning work on each DFOW:

a. Review each paragraph of the applicable specification sections, reference codes, and standards. Make available during the prepatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.

b. Review the Contract drawings.

c. Verify that field measurements are as indicated on construction or shop drawings or both before confirming product orders, to minimize waste due to excessive materials.

d. Verify that appropriate shop drawings and submittals for materials and equipment have been submitted and approved. Verify receipt of approved factory test results, when required.

e. Review the testing plan and ensure that provisions have been made to provide the required QC testing.

f. Examine the work area to ensure that the required preliminary work has been completed and complies with the Contract and ensure any deficiencies/rework items in the preliminary work have been corrected and confirmed by the Contracting Officer.

g. Review coordination of product/material delivery to designated prepared areas to execute the work.

h. Examine the required materials, equipment and sample work to ensure that they are on hand and conform to the approved shop drawings and submitted data and are properly stored.

i. Check to assure that all materials and equipment have been tested, submitted, and approved.

j. Discuss specific controls to be used, construction methods, construction tolerances, workmanship standards, and the approach that will be used to provide quality construction by planning ahead and identifying potential problems for each DFOW. Ensure any portion of the plan requiring separate Contracting Officer acceptance has been approved.

k. Review the APP and appropriate Activity Hazard Analysis (AHA) to ensure that applicable safety requirements are met, and that required Safety Data Sheets (SDS) are submitted.

1.8.2 Initial Phase

Notify the Contracting Officer at least 2 business days in advance of each initial phase. When construction crews are ready to start work on a DFOW, conduct the initial phase with the QC Specialists, the Project Superintendent, and the foreman responsible for that DFOW. Observe the initial segment of the DFOW to ensure that the work complies with Contract requirements. Document the results of the initial phase in the daily CQC Report and in the Initial Phase Checklist. Repeat the initial phase for each new crew to work on-site when acceptable levels of specified quality are not being met. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with follow-up phases. Perform the following for each DFOW:

a. Check work to ensure that it is in full compliance with Contract requirements. Review minutes of the preparatory meeting.

b. Verify adequacy of controls to ensure full Contract compliance. Verify required control inspection and testing comply with the Contract.

c. Establish level of workmanship and verify that it meets the minimum acceptable workmanship standards. Compare with required sample panels as appropriate.

d. Resolve any workmanship issues.

e. Ensure that testing is performed by the approved laboratory.

f. Check work procedures for compliance with the APP and the appropriate AHA to ensure that applicable safety requirements are met.

g. Review project specific work plans (i.e., HAZMAT Abatement, Stormwater Management) to ensure all preparatory work items have been completed and documented.

1.8.3 Follow-Up Phase

Perform the following for on-going DFOW daily, or more frequently as necessary, until the completion of each DFOW. The Final Follow-Up for any DFOW will clearly note in the daily report the DFOW is completed, and all deficiencies/rework items have been completed in accordance with the paragraph DEFICIENCY/REWORK ITEMS LIST. Each DFOW that has completed the Initial Phase and has not completed the Final Follow-up must be included on each daily report. If no work was performed on that DFOW for the period of that daily report, it must be so noted. Document all Follow-Up activities for DFOWs in the daily CQC Report:

a. Ensure the work including control testing complies with Contract requirements until completion of that particular work feature. Record checks in the CQC documentation.

b. Maintain the quality of workmanship required.

c. Ensure that testing is performed by the approved laboratory.

d. Ensure that deficiencies/rework items are being corrected. Conduct final follow-up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work.

e. Do not build upon nor conceal non-conforming work.

f. Assure manufacturers' representatives have performed necessary inspections if required and perform safety inspections.

1.8.4 Additional Preparatory and Initial Phases

Conduct additional preparatory and initial phases on the same DFOW if the quality of on-going work is unacceptable, if there are changes in the applicable QC organization, if there are changes in the on-site production supervision or work crew, if work on a DFOW has not started within 45 days of the initial preparatory meeting or has resumed after 45 days of inactivity, or if other problems develop.

1.8.5 Notification of Three Phases of Control for Off-Site Work

Notify the Contracting Officer at least 2 weeks prior to the start of the preparatory and initial phases.

1.8.6 Deficiency/Rework Items List

The QC Manager must maintain a list of work that does not comply with the Contract, identifying what items need to be corrected, the activity ID number associated with the item, the date the item was originally discovered, the date the item will be corrected by, and the date the item was corrected.

The list shall be reviewed at each weekly QC Meeting:

a. There is no requirement to report a deficiency/rework item that is

corrected the same day it is discovered.

b. No successor task may be advanced beyond the preparatory phase meeting until all deficiencies/rework items have been cleared by the QC Manager and concurred with by the Contracting Officer. This must be confirmed as part of the Preparatory Phase activities.

c. Attach a copy of the "Deficiency/Rework Items List" to the last daily CQC Report of each month.

d. The Contractor is responsible for including those items identified by the Contracting Officer.

e. All deficiencies/rework items must be confirmed as corrected by the QC Manager, and concurred by the Contracting Officer, prior to commencement of any completion inspections per paragraph COMPLETION INSPECTIONS unless specifically exempted by the Contracting Officer.

f. Non-Compliance with these requirements shall be grounds for removal in accordance with paragraph ACCEPTANCE OF THE QUALITY CONTROL (QC) PLAN.

g. All delays, concurrent or related to failure to manage, monitor, control, and correct deficiencies/rework items are entirely the responsibility of the Contractor and shall not be made the subject, or any component of any request for additional time or compensation.

1.9 TESTING

Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to Contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and acceptance tests when specified. Procure the services of an U.S. Army Corps of Engineers approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:

a. Verify that testing procedures comply with Contract requirements.

b. Verify that facilities and testing equipment are available and comply with testing standards.

c. Check test instrument calibration data against certified standards.

d. Verify that recording forms and test identification control number system, including all test documentation requirements, have been prepared.

e. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the sequential control number identifying the test. If approved by the Contracting Officer, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the Contracting Officer. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this Contract.

1.9.1 Accreditation Requirements

Construction materials testing laboratories must be accredited by a laboratory accreditation authority and must submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (ASTM E329, ASTM C1077, ASTM D3666, ASTM D3740, ASTM E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing must meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the Corporate Office.

1.9.2 Laboratory Accreditation Authorities

Laboratory Accreditation Authorities include the National Voluntary Laboratory Accreditation Program (NVLAP) administered by the National Institute of Standards and Technology at https://www.nist.gov/nvlap, the American Association of State Highway and Transportation Officials (AASHTO) Accreditation Program at http://www.aashtoresource.org/aap/overview, International Accreditation Services, Inc. (IAS) at https://www.iasonline.org/, U.S. Army Corps of Engineers Materials Testing Center (MTC) at https://www.erdc.usace.army.mil/Media/Fact-Sheets/Fact-Sheet-Article-View/Article/476661/materials-testing-center/, the American Association for Laboratory Accreditation (A2LA) program at https://a2la.org/, the Washington Association of Building Officials (WABO) at https://www.wabo.org/ (Approval authority for WABO is limited to projects within Washington State), and the Washington Area Council of Engineering Laboratories (WACEL) at https://www.wacel.org/lab-accreditation-and-inspection-agency-audit-programs/laboratory-accreditation-program/(Approval authority by WACEL is limited to projects within Facilities Engineering Command (FEC) Washington geographical area).

1.9.3 Capability Check

The Contracting Officer retains the right to check laboratory equipment in the proposed laboratory and the laboratory technician's testing procedures, techniques, and other items pertinent to testing, for compliance with the standards set forth in this Contract. Laboratories utilized for testing soils, concrete, asphalt, and steel must meet criteria detailed in ASTM D3740 and ASTM E329.

1.9.4 Test Results

Cite applicable Contract requirements, tests or analytical procedures used. Provide actual results and include a statement that the item tested or analyzed conforms or fails to conform to specified requirements. If the item fails to conform, notify the Contracting Officer immediately. Conspicuously stamp the cover sheet for each report in large red letters "CONFORMS" or "DOES NOT CONFORM" to the specification requirements, whichever is applicable. Test results must be signed by a testing laboratory representative authorized to sign certified test reports. Furnish the signed reports, certifications, and other documentation to the Contracting Officer via the QC Manager. Furnish a summary report of field tests at the end of each month, in accordance with paragraph DOCUMENTATION AND INFORMATION FOR THE CONTRACTING OFFICER.

1.9.5 Test Reports and Monthly Summary Report of Tests

Furnish the signed reports, certifications, and a summary report of field tests at the end of each month to the Contracting Officer. Attach a copy of the summary report to the last daily CQC Report of each month. Provide a copy of the signed test reports and certifications to the Operation and Maintenance Support Information (OMSI) preparer for inclusion into the OMSI documentation, in accordance with Sections 01 78 23 OPERATION AND MAINTENANCE DATA and 01 78 24.00 20 FACILITY DATA WORKBOOK (FDW).

1.10 COMPLETION INSPECTIONS

1.10.1 Punch-Out Inspection

Near the completion of all work or any increment thereof, established by a completion time stated in the Contract Clause entitled "Commencement, Prosecution, and Completion of Work," or stated elsewhere in the specifications, the QC Manager must conduct an inspection of the work and develop a "punch list" of items which do not conform to the approved drawings, specifications, and Contract. Include in the punch list any remaining items on the "Deficiency/Rework Items List", that were not corrected prior to the Punch-Out Inspection as approved by the Contracting Officer in accordance with the paragraph DEFICIENCY/REWORK ITEMS LIST. Include within the punch list the estimated date by which the deficiencies will be corrected. Provide a copy of the punch list to the Contracting Officer.

The QC Manager, or staff, must make follow-on inspections to ascertain that all deficiencies have been corrected. All punch list items must be confirmed as corrected by the QC Manager and concurred by the Contracting Officer. Once this is accomplished, notify the Government that the facility is ready for the Government "Pre-Final Inspection".

1.10.2 Pre-Final Inspection

The Government and QC Manager will perform this inspection to verify that the facility is complete and ready to be occupied. A Government "Pre-Final Punch List" will be documented by the QC Manager as a result of this inspection. The QC Manager will ensure that all items on this list are corrected and concurred by the Contracting Officer prior to notifying the Government that a "Final" inspection with the Client can be scheduled. All items noted on the "Pre-Final" inspection must be corrected and concurred by the Contracting Officer in a timely manner and be accomplished before the Contract completion date for the work, or any increment thereof, if the project is divided into increments by separate completion dates unless exceptions are directed by the Contracting Officer.

1.10.3 Final Acceptance Inspection

Notify the Contracting Officer at least 14 calendar days prior to the date a final acceptance inspection can be held. State within the notice that all items previously identified on the pre-final punch list will be corrected and acceptable, along with any other unfinished Contract work, by the date of the final acceptance inspection. The Contractor must be represented by the QC Manager, the Project Superintendent, and others deemed necessary. Attendees for the Government will include the Contracting Officer, other Government QA personnel, and personnel representing the Client. Failure of the Contractor to have all Contract work acceptably complete for this inspection will be cause for the

Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with the Contract Clause entitled "Inspection of Construction."

1.11 QUALITY CONTROL (QC) CERTIFICATIONS

1.11.1 Contractor Quality Control (CQC) Report Certification

Contain the following statement within the CQC Report: "On behalf of the Contractor, I certify that this report is complete and correct and equipment and material used, and work performed during this reporting period is in compliance with the Contract drawings and specifications to the best of my knowledge, except as noted in this report."

1.11.2 Completion Certification

Upon completion of work under this Contract, the QC Manager must furnish a certificate to the Contracting Officer attesting that "the work has been completed, inspected, tested and is in compliance with the Contract." Provide a copy of this final QC Certification for completion to the preparer of the Operation & Maintenance (O&M) documentation.

1.11.3 Invoice Certification

Furnish a certificate to the Contracting Officer with each payment request, signed by the QC Manager, attesting that as-built drawings are current, coordinated and attesting that the work for which payment is requested, including stored material, complies with Contract requirements.

1.12 DOCUMENTATION AND INFORMATION FOR THE CONTRACTING OFFICER

1.12.1 Construction Documentation

Reports are required for each day that work is performed and must be attached to the Contractor Quality Control Report prepared for the same day. Maintain current and complete records of on-site and off-site QC program operations and activities. Reports are required for each day work is performed. Account for each calendar day throughout the life of the Contract.

The Project Superintendent and the QC Manager must prepare and sign the Contractor Production and CQC Reports, respectively. Every space on the forms must be filled in. Use N/A if nothing can be reported in one of the spaces. The reporting of work must be identified by terminology consistent with the construction schedule. In the "Remarks" sections of the reports, enter pertinent information including directions received, problems encountered during construction, work progress and delays, conflicts or errors in the drawings or specifications, field changes, safety hazards encountered, instructions given and corrective actions taken, delays encountered, a record of visitors to the work site, quality control problem areas, deviations from the QC Plan, construction deficiencies encountered, and meetings held. For each entry in the report(s), identify the Schedule Activity No. that is associated with the entered remark.

1.12.2 Quality Control Activities

CQC and Contractor Production reports will be prepared daily to maintain

current records providing factual evidence that required quality control activities and tests have been performed. Include in these records the work of subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:

a. The name and area of responsibility of the Contractors and any subcontractors.

b. Operating plant/equipment with hours worked, idle, or down for repair.

c. Work performed each day, giving location, description, and by whom. When a Network Analysis Schedule (NAS) is used, identify each item of work performed each day by NAS activity number.

d. Control phase activities performed. Preparatory, and Initial phase Checklists associated with the DFOW referenced to the construction schedule. Follow-up phase activities identified to the DFOW. If testing or specific QC Specialist activities are associated with the Follow-up phase activities for a specific DFOW note this and include those reports.

e. Test and control activities performed with results and references to specifications and drawings requirements. Identify the control phase (Preparatory, Initial, Follow-up). List of deficiencies noted, along with corrective action in accordance with the paragraph DEFICIENCY/REWORK ITEMS LIST.

f. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specifications and drawings requirements.

g. Submittals and deliverables reviewed, with Contract reference, by whom, and action taken.

h. Offsite surveillance activities, including actions taken.

i. Job safety evaluations stating what was checked, results, and instructions or corrective actions.

j. Instructions given/received and conflicts in plans and specifications.

1.12.3 Verification Statement

Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the Contract.

Furnish the original and one copy of these records in report form to the Government by 10:00 AM the next working day after the date covered by the report. As a minimum, prepare and submit one report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the Contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the QC Manager. Include copies of test reports and copies of reports prepared by all subordinate quality control personnel within the QC Manager Report.

1.12.4 Reports from the Quality Control (QC) Specialist(s)

Document inspection results on a QC specialist report prepared each day work is performed in their area of responsibility. The report must include a description of the visual inspection or observation performed, a written summary of findings, a conclusion on compliance with the Contract documents, and signature of the QC Specialist. In person inspections must be documented with Video/photographs. Video/photographic documentation of deficiencies must include before and after conditions and physical measurements, as necessary. Forward the QC daily report to the QC Manager who must include the report with the submission of their daily QC Report to the Government each day. Every site visit by the QC Specialist must be documented on a QC Specialist daily report.

1.12.5 Quality Control Validation

Establish and maintain the following in an electronic folder. Divide folder into a series of tabbed sections as shown below. Ensure folder is updated at each required progress meeting.

a. CQC Meeting minutes in accordance with paragraph QUALITY CONTROL (QC) MEETINGS.

b. All completed Preparatory and Initial Phase Checklists, arranged by specification section, further sorted by DFOW referenced to the construction schedule. Submit each individual Phase Checklist the day the phase event occurs as part of the CQC daily report.

c. All milestone inspections, arranged by Activity Number referenced to the construction schedule.

d. An up-to-date copy of the Testing Plan and Log with supporting field test reports, arranged by specification section referenced to the DFOW to which individual reports results are associated. Individual field test reports will be submitted within 2 working days after the test is performed in accordance with the paragraph QUALITY CONTROL ACTIVITIES. Monthly Summary Report of Tests: Submit the report as an electronic attachment to the CQC Report at the end of each month.

e. Copies of all Contract modifications, arranged in numerical order. Also include documentation that modified work was accomplished.

f. An up-to-date copy of the paragraph DEFICIENCY/REWORK ITEMS LIST.

g. Upon commencement of Completion Inspections of the entire project or any defined portion, maintain up-to-date copies of all punch lists issued by the QC staff to the Contractor and subcontractors and all punch lists issued by the Government in accordance with the paragraph COMPLETION INSPECTIONS.

1.12.6 Testing Plan and Log

As tests are performed, the QC Manager will record on the "Testing Plan and Log" the date the test was performed and the date the test results were forwarded to the Contracting Officer. Attach a copy of the updated "Testing Plan and Log" to the last daily CQC Report of each month. Provide a copy of the final "Testing Plan and Log" to the preparer of the Operation & Maintenance (O&M) documentation.

1.12.7 As-Built Drawings

The QC Manager must ensure the as-built drawings, required by Section 01 78 00 CLOSEOUT SUBMITTALS are kept current on a daily basis and marked to show deviations which have been made from the Contract drawings. The as-built drawings document shall commence with the QC Manager ensuring all amendments, or changes to the Contract prior to Contract award are accurately noted in the initial document set creating the accurate baseline of the Contract prior to any work starting. Ensure each deviation has been identified with the appropriate modifying documentation (e.g., PC No., Modification No., Request for Information No.). The QC Manager or QC Specialist assigned to an area of responsibility must initial each revision. Upon completion of work, the QC Manager will furnish a certificate attesting to the accuracy of the as-built drawings prior to submission to the Contracting Officer.

1.13 NOTIFICATION ON NON-COMPLIANCE

The Contracting Officer will notify the Contractor of any detected non-compliance with the Contract. Take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site, is deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made the subject of a claim for extension of time for excess costs or damages by the Contractor.

1.14 DELIVERY, STORAGE, AND HANDLING

Designate receiving/storage areas for incoming material to be delivered according to installation schedule and to be placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication. Store and handle materials in a manner as to prevent loss from weather and other damage. Keep materials, products, and accessories covered and off the ground, and store in a dry, secure area. Prevent contact with material that may cause corrosion, discoloration, or staining. Protect all materials and installations from damage by the activities of other trades.

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

Not Used

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS BY FPQC SPECIALIST

1. INSTRUCTIONS for FPQC Specialist:

Perform surveillance of fire protection system installation during construction and during pre-final and final acceptance inspections. Surveillance includes either visual inspections or observations performed by the FPQC as indicated in the following Schedule of Fire Protection System Inspections. Check boxes in the schedule indicate the inspections or observations that are applicable to this project, which must be performed and documented by the FPQC.

Surveillance of fire protection system inspections is divided into three phases:

Surveillance During Construction – Includes periodic on-site visits by the FPQC during construction

Pre-Final Acceptance Inspection – FPQC must be onsite during pre-final acceptance inspection

Final Acceptance inspection – FPQC must be onsite during final acceptance inspection

2. INSPECTION TYPE

VISUAL INSPECTION:

Perform on-site visual inspections as indicated in the Schedule of Fire Protection System Inspections as construction progresses to confirm work conforms with the contract requirements including but not limited to verifying proper installation of equipment and materials in accordance with applicable codes. Where work will be covered up by finished walls and ceilings, inspections must be scheduled and performed when work is still visible.

OBSERVATION:

Observe component and system testing in person on-site as indicated in the Schedule of Fire Protection System Inspections. Confirm testing is completed in accordance with applicable codes and that testing was successful.

DOCUMENTATION:

Document all inspections and observations in the FPQC Report in accordance with UFGS 01 45 00. Document any deficiencies and all work observed that has been successfully performed in accordance with the contract documents. Record deficiencies in the rework list.

DESIGNER NOTES (delete this box after reviewing): **Rev 2-14-23**

1. Fire Protection DOR must edit this schedule based on the project scope.
2. Indicate inspection and observation tasks applicable to your project that are to be performed by the FPQC by checking boxes next to each task required. Either delete unchecked sections or leave them in the schedule unchecked.
3. This schedule does NOT need to be printed in color.
4. When finished editing, delete this note box and save this schedule as a PDF and insert into the project specifications immediately following UFGS Section 01 45 00.

SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS BY FPQC SPECIALIST

PERFORM SURVEILLANCE DURING CONSTRUCTION

~ FIRE SUPPRESSION SYSTEM ~

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☐	1. Verify proper installation of underground service main and service; laterals, thrust blocks, tie-rods and connection to above ground piping.	**VISUAL INSPECTION**	✓ Visually inspect materials ✓ Visually inspect installation
☐	2. Verify proper orientation of fire hydrants and fire department access	**VISUAL INSPECTION**	✓ Visually inspect installation and orientation
☐	3. Verify proper installation of interior and exterior attachments, coatings, and vortex plate prior to filling fire protection water tank	**VISUAL INSPECTION**	✓ Visually inspect fire protection water tank installation
☐	4. Hydrostatic/leak test for underground piping	**OBSERVE**	✓ Verify proper test method ✓ Confirm test was successful
☒	5. Hydrostatic/leak test for above ground piping prior to ceiling installation	**OBSERVE**	✓ Verify proper test method ✓ Confirm test was successful
☐	6. Underground system flush prior to connection to the riser	**OBSERVE**	✓ Verify system was properly flushed
☒	7. Forward flow test for Backflow preventer	**OBSERVE**	✓ Verify proper test method ✓ Confirm test was successful
☐	8. Suction pipe flush prior to fire pump startup	**OBSERVE**	✓ Verify system was properly flushed
☐	9. Hydrostatic test fire pump suction and discharge piping	**OBSERVE**	✓ Verify proper test method ✓ Confirm test was successful
☐	10. Fire pump startup	**OBSERVE**	✓ Confirm successful startup
☒	11. Verify proper installation of sprinkler piping prior to wall or ceiling installation	**VISUAL INSPECTION**	✓ Inspect pipe hangars, bracing, sprinkler heads ✓ Inspect for sprinkler obstructions; damaged, painted or covered heads ✓ Verify proper location of control valves, drains, vents, backflow, test header ✓ Verify proper component mounting heights
☒	12. Document inspections and observations in FPQC Report	**DOCUMENT**	✓ Submit report for each day inspections or observations occur ✓ Annotate deficiencies and satisfactory work observed ✓ Record rework items in FPQC report

SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS BY FPQC SPECIALIST

~ SPECIAL FIRE SUPPRESSION SYSTEM ~

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☐	1. Verify proper installation of gaseous fire suppression system	**VISUAL INSPECTION**	✓ Inspect gas cylinders, initiating controls, shutdowns, aborts, and visual warning
☐	2. Verify proper installation of IR hangar detector	**VISUAL INSPECTION**	✓ Inspect detector and nozzle layout ✓ Inspect for obstructions, abort stations ✓ Inspect riser piping
☐	3. Verify proper installation of elevator fire protection	**VISUAL INSPECTION**	✓ Inspect elevator recall functions ✓ Inspect two-way communication
☐	4. Verify proper installation of fire suppression in secure spaces	**VISUAL INSPECTION**	✓ Inspect location of sprinkler piping and sprinklers
☐	5. Document inspections and observations in FPQC Report	**DOCUMENT**	✓ Submit report for each day inspections or observations occur ✓ Document deficiencies and satisfactory work observed in FPQC Report ✓ Record deficiencies in rework list

~ PASSIVE FIRE PROTECTION SYSTEMS ~

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☒	1. Verify proper construction of fire rated assemblies	**VISUAL INSPECTION**	✓ Inspect partitions for proper fire rated construction per design ✓ Inspect doors and door hardware for proper fire rating ✓ Inspect glass for proper fire rating
☐	2. Verify proper installation of fireproofing	**VISUAL INSPECTION**	✓ Inspect for use of proper fireproofing materials ✓ Inspect for cracking, spalling or delaminating ✓ Inspect for proper application thickness
☒	3. Verify proper installation of firestopping	**VISUAL INSPECTION**	✓ Inspect to confirm firestopping system is UL tested or an engineering judgement has been obtained and submitted ✓ Inspect for use of proper firestopping materials ✓ Inspect penetrations through fire rated walls, partitions and ceilings ✓ Inspect construction joints and gaps
☒	4. Document inspections and observations in FPQC Report	**DOCUMENT**	✓ Submit report for each day inspections or observations occur

SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS BY FPQC SPECIALIST

			✓ Document deficiencies and satisfactory work observed in FPQC Report ✓ Record deficiencies in rework list

~ FIRE ALARM SYSTEMS ~

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☒	1. Verify proper installation of fire alarm system after conduit is installed and wiring pulled, but before devices are installed	**VISUAL INSPECTION**	✓ Inspect conduit, wiring, conduit fill, wire type ✓ Inspect installation heights of back boxes
☒	2. Document inspections and observations in FPQC Report	**DOCUMENT**	✓ Submit report for each day inspections or observations occur ✓ Document deficiencies and satisfactory work observed in FPQC Report ✓ Record deficiencies in rework list

~ END OF SURVEILLANCE DURING CONSTRUCTION SECTION

PERFORM DURING PRE-FINAL ACCEPTANCE INSPECTION

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☒	1. Inspect all fire protection systems and all life safety features	**VISUAL INSPECTION**	✓ Verify proper installation of fire protection and life safety systems
☒	2. Witness functional testing of all fire protection and life safety systems	**OBSERVE**	✓ Verify proper testing is performed on fire protection and life safety systems
☒	3. Identify deficiencies that require correction	**VISUAL INSPECTION**	✓ Document deficiencies in FPQC Report and record in rework list
☒	4. Verify rework items have been corrected	**VISUAL INSPECTION**	✓ Record re-inspection results on FPQC Report
☒	5. Document results of pre-final inspection and photograph unsatisfactory conditions	**DOCUMENT**	✓ Document results of pre-final inspection in FPQC Report
☒	6. Certify installation and operation of all fire protection and life safety systems conform to the contract documents	**DOCUMENT**	✓ Provide separate letter certifying conformance with contract requirements

~ END OF PRE-FINAL INSPECTION SECTION

SCHEDULE OF FIRE PROTECTION SYSTEM INSPECTIONS BY FPQC SPECIALIST

PERFORM DURING FINAL ACCEPTANCE INSPECTION

PERFORM TASK IF CHECKED	TASK	INSPECTION TYPE	DESCRIPTION
☒	1. Verify proper installation and operation of all fire protection systems and all life safety features	**VISUAL INSPECTION**	✓
☒	2. Note any deficiencies identified by Government FPE on deficiency list	**DOCUMENT**	✓ Document deficiencies identified by Government FPE on deficiency list
☒	3. Verify all deficiencies have been corrected	**VISUAL INSPECTION**	✓ Inspect rework to confirm all deficiencies have been corrected
☒	4. Certify that all deficiencies have been corrected	**DOCUMENT**	✓ Document inspection results on FPQC Report

~ END OF FINAL ACCEPTANCE INSPECTION SECTION

This page is intentionally left blank.

SECTION 01 50 00

TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS
12/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA C511	(2017; R 2021) Reduced-Pressure Principle Backflow Prevention Assembly

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

1.2 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Traffic Control Plan - if applicable

SD-03 Product Data

Backflow Preventers

SD-06 Test Reports

Backflow Preventer Tests

SD-07 Certificates

Backflow Tester Certification

Backflow Preventers Certificate of Full Approval

1.3 BACKFLOW PREVENTERS CERTIFICATE

Certificate of Full Approval from FCCCHR List, University of Southern California, attesting that the design, size and make of each backflow preventer has satisfactorily passed the complete sequence of performance testing and evaluation for the respective level of approval. Certificate of provisional Approval will not be acceptable.

1.3.1 Backflow Tester Certificate

Prior to testing, submit to the Contracting Officer certification issued

by the State or local regulatory agency attesting that the backflow tester has successfully completed a certification course sponsored by the regulatory agency. Tester must not be affiliated with a company participating in other phases of this Contract.

1.3.2 Backflow Prevention Training Certificate

Submit a certificate recognized by the State or local authority that states the Contractor has completed at least 10 hours of training in backflow preventer installations. The certificate must be current.

1.4 WEATHER PROTECTION

Take necessary precautions to ensure that roof openings and other critical openings in the building are monitored carefully. Take immediate actions required to seal off such openings when rain or other detrimental weather is imminent, and at the end of each workday. Ensure that the openings are completely sealed off to protect materials and equipment in the building from damage.

1.5 DOD CONDITION OF READINESS (COR)

DOD will set the Condition of Readiness (COR) based on the weather forecast for sustained winds 50 knots (60 mph) or greater. Contact the Contracting Officer for the current COR setting.

Monitor weather conditions a minimum of twice a day and take appropriate actions according to the approved Emergency Plan in the accepted Accident Prevention Plan, EM 385-1-1 Section 01 Emergency Planning and the instructions below.

Unless otherwise directed by the Contracting Officer, comply with:

a. Condition FOUR (Sustained winds of 58 mph or greater expected within 72 hours): Normal daily jobsite cleanup and good housekeeping practices. Collect and store in piles or containers scrap lumber, waste material, and rubbish for removal and disposal at the close of each work day. Maintain the construction site including storage areas, free of accumulation of debris. Stack form lumber in neat piles less than 3.3 feet high. Remove all debris, trash, or objects that could become missile hazards. Review requirements pertaining to "Condition THREE" and continue action as necessary to attain "Condition FOUR" readiness. Contact Contracting Officer for weather and COR updates and completion of required actions.

b. Condition THREE (Sustained winds of 58 mph or greater expected within 48 hours): Maintain "Condition FOUR" requirements and commence securing operations necessary for "Condition ONE" which cannot be completed within 18 hours. Cease all routine activities which might interfere with securing operations. Commence securing and stow all gear and portable equipment. Make preparations for securing buildings. Reinforce or remove formwork and scaffolding. Secure machinery, tools, equipment, materials, or remove from the jobsite. Expend every effort to clear all missile hazards and loose equipment from general base areas. Contact Contracting Officer for weather and COR updates and completion of required actions. Review requirements pertaining to "Condition TWO" and continue action as necessary to attain "Condition THREE" readiness.

c. Condition TWO (Sustained winds of 58 mph or greater expected within 24 hours): Secure the jobsite, and leave Government premises.

d. Condition ONE. (Sustained winds of 58 mph or greater expected within 12 hours): Contractor access to the jobsite and Government premises is prohibited.

1.6 TRAILERS OR STORAGE BUILDINGS

Trailers or storage buildings will be permitted, where space is available, subject to the approval of the Contracting Officer. The trailer or building shall be in good condition, free from visible damage, rust, and deterioration, and meet all applicable safety requirements. Trailers shall be roadworthy and comply with all appropriate State and local vehicle requirements. Failure to maintain storage trailers or buildings to these standards shall result in the removal of non-complying units at the Contractor's expense. A sign not smaller than 24 by 24 inches shall be conspicuously placed on the trailer depicting the company name, business phone number, and emergency phone number. Trailers shall be anchored to resist high winds and must meet applicable state and local standards for anchoring mobile trailers.

Trailers that are placed outside of project boundaries will require base site approval and NEPA review. Any temporary trailer utilities outside the project boundary limit also will require base site approval and NEPA review. Allow 30 days for approval processing and NEPA documentation.

1.7 STORAGE AREAS

The Contract Clause entitled "FAR 52.236-10, Operations and Storage Areas" applies.

PART 2 PRODUCTS

2.1 BACKFLOW PREVENTERS

Reduced pressure principle type conforming to the applicable requirements AWWA C511.

PART 3 EXECUTION

3.1 EMPLOYEE PARKING

Construction Contract employees must park privately owned vehicles in an area designated by the Contracting Officer. Employee parking must not interfere with existing and established parking requirements of the Government installation.

3.2 AVAILABILITY AND USE OF UTILITY SERVICES

3.2.1 Temporary Utilities

a. The Contract clause related to utilities applies. Reasonable amounts of water and electricity from the nearest outlet will be provided free of charge for pursuance of work within a facility under this contract. If the nearest available outlet cannot be utilized by the Contractor because of improper voltage, insufficient current, improper pressure, incompatible connectors, etc., it shall be the responsibility of the Contractor to provide temporary utilities as

required.

b. Reasonable amounts of utilities for contractor trailers and storage buildings will be made available to the Contractor, when available. The Contractor shall be responsible for providing transformers, electrical service poles and drops for electrical services, and backflow preventer devices on connections to domestic water lines. Final taps and tie-ins to the Government utility grid will be made by the Contractor after approval by the Contracting Officer. Tap-in cost, if any, shall be the responsibility of the Contractor. Under no circumstances will taps to base fire hydrants be allowed for obtaining domestic water.

c. Any and all utilities outside the established site boundary in support of trailers or temporary facilties will require both a Site Approval and REIR, which can either be routed separately from the trailer approvals or under the same request.

3.2.2 Energy and Utilites Conservation

The Contractor shall carefully conserve utilities furnished without charge. The Contractor, at his own expense and in a manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines and remove the same prior to final acceptance of the construction.

3.2.3 Location of Underground Utilites

Location and Protection of underground utilities shall be the responsibility of the Contractor. Where existing-to-remain piping, utilities, and underground obstructions of any type are indicated in locations to be traversed by new piping, ducts, and other excavations, the elevations of the existing utilities and obstructions shall be determined before the new work is completed.

a. In addition, the Contractor will be responsible for obtaining the services of a professional utility locator prior to digging. Contractor will provide documentation that the site has been surveyed and checked for underground utilities. All utilities must be located, including but not limited to power, water, sewer, storm drains, fiber optics, T.V. cable, telephone, and intrusion detection wiring. A set of known utility drawings will be available in the ROICC office for review to assist the locator.

b. It is mandatory that the Contractor also contact the Base Telephone Office (451-2531) prior to accomplishing any digging at Camp Lejeune. A telephone office representative will assist in locating telephone lines.

c. It is mandatory that the Contractor also contact Charter Communications, cable TV service prior to accomplishing any digging at Camp Lejeune, to ensure that all buried cable lines are identified. Contact Mr. Olin Criswell at 353-8677 for assistance.

d. It is mandatory that the contractor also contact the North Carolina One-Call Center to coordinate the location of underground natural gas infrastructure. North Carolina 811, Inc. can be reached at 811 on a touch-tone phone in the state of North Carolina or toll-free at 1.800.632.4949 if calling from out of state.

3.2.4 Damage to Underground Utilities

Immediate notice shall be delivered to the Contracting Officer of any damage. The Contractor shall make temporary repairs immediately, and shall provide permanent repairs as soon as practicable. For any additional work required by reason of conflict between the new and existing work, an adjustment in contract price will be made in accordance with Contract clause entitled "Differing Site Conditions", if appropriate.

3.2.5 Sanitation

Provide adequate sanitary conveniences of a type approved for the use of persons employed on the work, properly secluded from public observation, and maintained in such a manner as required and approved by the Contracting Officer. Maintain these conveniences at all times without nuisance. Upon completion of the work, remove the conveniences from the premises, leaving the premises clean and free from nuisance. Dispose of sewage through connection to a municipal, district, or station sanitary sewage system. Where such systems are not available, use chemical toilets or comparably effective units, and periodically empty wastes into a municipal, district, or station sanitary sewage system, or remove waste to a commercial facility. Include provisions for pest control and elimination of odors.

3.3 STATION OPERATION AFFECT ON CONTRACTOR OPERATIONS

3.3.1 Restricted Access Areas

Follow guidelines identified on drawings and in scope of work.

3.4 TRAFFIC PROVISIONS

3.4.1 Traffic Control Plan

If during the performance of work, it becomes necessary to modify vehicular traffic patterns at any locations, notify the Contracting Officer at least 15 calendar days prior to the proposed modification date, and provide a Traffic Control Plan detailing the proposed controls to traffic movement for approval. The plans shall be in accordance with State and local regulations and the MUTCD, Part VI. Make all notifications and obtain any permits required for modification to traffic movements outside Station's jurisdiction. Provide cones, signs, barricades, lights, or other traffic control devices and personnel required to control traffic.

3.4.2 Dust Control

Dust control methods and procedures must be approved by the Contracting Officer. Coordinate dust control methods with 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.

3.5 REDUCED PRESSURE BACKFLOW PREVENTERS

Provide an approved reduced pressure backflow prevention assembly at each location where the Contractor taps into the Government potable water supply.

Perform backflow preventer tests using test equipment, procedures, and certification forms conforming to those outlined in the latest edition of the Manual of Cross-Connection Control published by the FCCCHR Manual. Test and tag each reduced pressure backflow preventer upon initial

installation (prior to continued water use). Tag must contain the following information: make, model, serial number, dates of tests, results, maintenance performed, and signature of tester. Record test results on certification forms conforming to requirements cited earlier in this paragraph.

3.6 DUMPSTERS

Equip dumpsters with a secure cover and paint the standard installation color. Keep dumpster closed, except when being loaded with trash and debris. Empty site dumpsters at least once a week, or as needed to keep the site free of debris and trash. If necessary, provide 55 gallon trash containers painted the darker installation color to collect debris in the construction site area. For large demolitions, large dumpsters without lids are acceptable, but must not have debris higher than the sides before emptying.

3.7 CLEANUP

Remove construction debris, waste materials, packaging material and the like from the work site daily. Any dirt or mud which is tracked onto paved or surfaced roadways must be cleaned away. Store all salvageable materials resulting from demolition activities within the fenced area described above or at the supplemental storage area. Neatly stack stored materials not in trailers, whether new or salvaged.

3.8 RESTORATION OF STORAGE AREA

Upon completion of the project remove the bulletin board, signs, barricades, haul roads, and all other temporary products from the site. After removal of trailers, materials, and equipment from within the fenced area, remove the fence. Restore areas used during the performance of the Contract to the original or better condition. Remove gravel used to traverse grassed areas and restore the area to its original condition, including top soil and seeding as necessary.

-- End of Section --

SECTION 01 57 19

TEMPORARY ENVIRONMENTAL CONTROLS

09/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-STD-461	(2015; Rev G) Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910	Occupational Safety and Health Standards
40 CFR 261	Identification and Listing of Hazardous Waste
40 CFR 262	Standards Applicable to Generators of Hazardous Waste
40 CFR 263	Standards Applicable to Transporters of Hazardous Waste
40 CFR 264	Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 265	Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 300	National Oil and Hazardous Substances Pollution Contingency Plan
49 CFR 171	General Information, Regulations, and Definitions
49 CFR 172	Hazardous Materials Table, Special Provisions, Hazardous Materials Communications, Emergency Response Information, and Training Requirements
49 CFR 178	Specifications for Packagings

1.2 Contractor Liabilities for Environmental Protection

Contractors shall complete and provide Environmental Training Documentation for training required by Federal, State, and local regulations.

1.3 DEFINITIONS

1.3.1 Sediment

Soil and other debris that have eroded and have been transported by runoff water or wind.

1.3.2 Solid Waste

Rubbish, debris, garbage, and other discarded solid materials, except recyclables and hazardous waste as defined in paragraph entitled "Hazardous Waste," resulting from industrial, commercial, and agricultural operations and from community activities.

1.3.3 Sanitary Wastes

Wastes characterized as domestic sanitary sewage.

1.3.4 Rubbish

Combustible and noncombustible wastes such as non-recyclable paper and cardboard, crockery, and bones.

Recyclables includes: clean paper, cardboard, glass, plastics (No. 1 & 2), metal, and cans.

Non-recyclable paper and cardboard are defined as material that has become wet or contaminated with food or other residue that render it un-acceptable for recycling.

Treated wood/lumber is defined as wood that has been stained or treated to prevent rot, or composite wood products such as OSB, pressboard furniture, etc.

Untreated wood is defined as lumber, trees, stumps, limbs, tops, and shrubs.

1.3.5 Debris

Combustible and noncombustible wastes such as ashes and waste materials resulting from construction or maintenance and repair work, (excluding organic matter) leaves, pine straw, grass and shrub clippings.

1.3.6 Chemical Wastes

This includes salts, acids, alkalies, herbicides, pesticides, and organic chemicals.

1.3.7 Garbage

Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.3.8 Hazardous Waste

Hazardous substances as defined in 40 CFR 261 or as defined by applicable State and local regulations.

1.3.9 Hazardous Materials

Hazardous materials as defined in 49 CFR 171 and listed in 49 CFR 172.

1.3.10 Landscape Features

Trees, plants, shrubs, and ground cover.

1.3.11 Lead Acid Battery Electrolyte

The electrolyte substance (liquid medium) within a battery cell.

1.3.12 Oily Waste

Petroleum products and bituminous materials.

1.3.13 Class I Ozone Depleting Substance (ODS)

Class I and Class II ODS are defined in Sections 602 (a and b) of The Clean Air Act.

1.4 SUBMITTALS

Submit the following in accordance with Section 01 33 00, "Submittal Procedures."

SD-01 Preconstruction Submittals

Environmental Protection Plan

SD-06 Test Reports

Abrasive blasting

waste materials - if applicable

Submit a copy of an approved laboratory analysis of materials collected as a result from abrasive blasting operations before disposing of waste materials.

SD-11 Closeout Submittals

Solid waste disposal permit

Disposal permit for hazardous waste

Environmental training documentation

Permit to transport hazardous waste

Hazardous waste certification

Environmental Plan Review

Annual Report of Products Containing Recovered Materials

1.4.1 Solid Waste Disposal Permit

Submit one copy of a State permit or license for the solid waste disposal facility. If the contract permits the use of the Base Landfill, request a letter from the Contracting Officer or FSC/Landfill Director authorizing permission to dump on base; submit the letter to the Base Landfill Office. In lieu of the letter a copy of the contract must be delivered to the Landfill Office for review.

1.4.2 Disposal Permit for Hazardous Waste

Submit a copy of the applicable EPA and State permits, manifests, or licenses for transportation, treatment, storage, and disposal of hazardous waste by permitted facilities.

1.4.3 Permit to Transport Hazardous Waste

Submit one copy of the EPA or State permit license, or regulation for the transporter who will ship the hazardous waste to the permitted Treatment, Storage, and Disposal (TSD) facility.

1.4.4 Hazardous Waste Certification

Submit written certification that hazardous waste turned in for disposal was generated on Government property and is identified, packaged, and labeled in accordance with 40 CFR 261, 40 CFR 262, and 40 CFR 263.

1.5 ENVIRONMENTAL PROTECTION REGULATORY REQUIREMENTS

Provide and maintain, during the life of the contract, environmental protection as defined in this Section. Plan for and provide environmental protective measures to control pollution that develops during normal construction practice. Plan for and provide environmental protective measures required to correct conditions that develop during the construction of permanent or temporary environmental features associated with the project. Comply with Federal, State, and local regulations pertaining to the environment, including but not limited to water, air, solid waste, and noise pollution.

1.6 SPECIAL ENIVIRONMENTAL REQUIREMENTS

1.6.1 Removal of Waste from Camp Lejeune

All construction workers must receive “3R” Unexploded Ordnance (UXO) Safety Awareness Training, and maintain documentation on-site for the Contracting Officer to review, as needed. Training can be obtained by watching the MCB CAMLEJ specific video online at:

https://www.lejeune.marines.mil/Offices-Staff/Environmental-Mgmt/Training-Video/Rubbis

Surplus material, and other construction debris shall be taken off-base for disposal, in accordance with RCRA and North Carolina Solid Waste regulations. A minimum 5 day advanced written notice shall be provided to the contracting Office of the Contractor’s intention to dispose of rubbish and debris off-base. Disposal at sites or landfills not holding a valid state of North Carolina permit is specifically prohibited. The prohibition

also applies to sites where a permit may have been applied for but not yet obtained. If construction debris has been disposed off-base at a site without state permits or not in accordance with regulatory requirements, the Contractor is to remove, transport, and relocate the debris to a state-approved site at the Contractor’s expense. Any fines, penalties, or fees related to the illegal disposal of construction debris will be paid for by the Contractor, not the Government. All soil taken off its originating site must be screened for construction debris and other trash prior to transport off the project site.

1.6.2 Surplus Soils Disposal for Camp Lejeune & MCAS New River

Prior to transportation of surplus soil off its originating site, mechanically screen all surplus soil to remove all objects greater than 3 inches and deleterious material. Deleterious material consists of organic debris such as roots, stumps, timber, and construction debris. Construction debris shall include, but is not limited to wood, plastic, glass, concrete, brick, and metal. Dispose of deleterious material and objects larger than 3 inches in accordance with state and federal regulations, and applicable contract requirements. Construction debris, to include hazardous- and non-hazardous waste cannot and shall not be reburied or left on-site, but rather properly disposed in accordance with 42 U.S.C 6901 Resource Conservation and Recovery Act (RCRA) and other federal and state regulations.

a. Mechanical screening of soil is required and means and methods must be included within the Environmental Protection Plan and Waste Management Plan. Spreading material out on the ground in lifts, for example, and manually removing debris larger than 3 inches is an adequate method to visually inspect soil prior to leaving a site. Observing an excavator direct load into a dump truck is not considered an acceptable method of screening soil.

b. Any suspect munitions-related items identified should immediately be called into emergency response (911) or Blackburn (910-451-3064/4449) for proper identification, in accordance with MCO 8020.10. Munitions-related items should be reported to the Contracting Officer, and subsequently to the Explosives Safety Officer (ESO) and Installation's Environmental Management Division (910-451-5003). Base Explosives Ordnance Disposal (EOD) will make the proper notifications to the Explosive Safety Officer (ESO). The Contracting Officer should report the incident to the Installation Environmental Management Division (EMD) as soon as possible to assist in determining if follow-on UXO construction support actions are warranted.

c. Offsite disposal of soil

Soil cannot be disposed off-base without proper waste documentation (i.e., hazardous or non-hazardous waste manifest signed by a Base representative designated in writing by the Commanding General to sign manifests). Under no circumstances shall a contractor sign on behalf of the government on a waste profile or a waste manifest.

Surplus soil must be properly characterized, manifested, and disposed of at a permitted landfill or incinerated, as allowed by State and Federal regulations (minimum of full suite TCLP (VOCs, SVOCs, pesticides/herbicides/PCBs, and metals), ignitability, corrosivity, and reactivity, and TPH-GRO and TPH-DRO in accordance with EPA Method SW-846

for every 1,000 cubic yards. Additional testing requirements may be requested by the receiving facility. All sample results must be reviewed and approved by the contracting officer.

Soil should be reused on its originating construction footprint in accordance with 31 23 00.00 20 Excavation and Fill specification. As there are currently no regulations regarding management and disposal of PFAS-impacted soil, all PFAS-impacted media should be managed so as to minimize the future impacts to the environment, should they become regulated. No known PFAS impacted media (soil or groundwater) is known within the project site; see the project soil and groundwater characterization results collected during the Geotechnical investigation as an Attachment to this specification.

If PFAS-impacted soil needs to leave the originating site, it must be properly characterized, manifested, and disposed of at a permitted subtitle D or C landfill (lined landfill). Waste manifests must clearly indicate that PFAS compounds are present. The Base landfill can additionally accept PFAS-impacted soil, but soil analytical results and waste manifest documentation must also be provided. Testing requirements for PFAS-impacted soil will be dictated by the receiving facility.

RECORD RETENTION: Copies of all waste manifests, including those for soil going to the base landfill, must be retained by the Installation EMD Resource Conservation and Recovery Section, the transporter, and the receiving facility for a minimum of 3 years in accordance with 40 CFR 262.40(a).

If contaminated soils are suspected or confirmed through presence of UXO, odors, or visual staining, or known as identified in the project drawings (i.e., constructing in a known impacted area) affected soils must be properly tested, manifested, and disposed of in accordance with RCRA regulations. Contact Base Environmental Management Division (910) 451-5003, for more information.

POINTS OF CONTACT:

Environmental Management Division (EMD):
EMD Administrative Assistant: (910) 451-5003

Environmental Quality Branch:
Environmental Restoration Program Manager, Thomas Richard: (910)451-9641, Thomas.Richard@usmc.mil

Environmental Conservation Branch:
National Environmental Policy Act (NEPA) Program Manager, Jessi Baker: (910-)451-4542, Jessi.Baker@usmc.mil

1.7 ENVIRONMENTAL PROTECTION PLAN

1.7.1 Contents of Environmental Protection Plan

a. Include any hazardous materials (HM) planned for use on the station shall be included in the station HM Tracking Program maintained by the Safety Department. To assist this effort, submit a list (including quantities) of HM to be brought to the station and copies of the corresponding material safety data sheets (MSDS). Submit this list to the Contracting Officer. At

project completion, remove any hazardous material brought onto the station. Account for the quantity of HM brought to the station, the quantity used or expended during the job, and the leftover quantity which (1) may have additional useful life as a HM and shall be removed by the Contractor, or (2) may be a hazardous waste, which shall then be removed as specified herein.

b. The Environmental Protection Plan shall list and quantify any Hazardous Waste (HW) to be generated during the project.

c. In accordance with station regulations, store HW near the point of generation up to a total quantity of one quart of hazardous waste or 55 gallons of hazardous waste. Move any volume exceeding these quantities to a HW permitted area within 3 days. Prior to generation of HW, contact Contracting Officer for labeling requirements for storage of hazardous wastes.

d. In accordance with station regulations, substitute materials as necessary to reduce the generation of HW and include a statement to that effect in the Environmental Plan.

e. Contact Contracting Officer for conditions in the area of the project which may be subject to special environmental procedures. Include this information in the Preconstruction Survey. Describe in the Environmental Protection Plan any permits required prior to working the area, and contingency plans in case an unexpected environmental condition is discovered.

f. Obtain permits for handling HW, and deliver completed documents to Contracting Officer for review. File the documents with the appropriate agency, and complete disposal with the approval of Contracting Officer. Deliver correspondence with the State concerning the environmental permits and completed permits to Contracting Officer.

1.7.2 Environmental Protection Plan Format

The Environmental Protection Plan shall follow the following format:

ENVIRONMENTAL PROTECTION PLAN

Contractor Organization
Address and Phone Numbers

1. Hazardous materials to be brought onto the station
2. MSDS package
3. Employee training documentation
4. HW storage plan
5. HW to be generated
6. Preconstruction survey results
7. Permitting requirements identified

1.7.3 Environmental Plan Review

Fourteen days after the environmental protection meeting, submit the proposed environmental plan for further discussion, review, and approval.

1.8 ADMINISTRATIVE REQUIREMENTS

1.8.1 Licenses and Permits

Obtain licenses and permits pursuant to "FAR 52.236-7, Permits and Responsibilities" .

For permits obtained by the Contracting Officer, whether or not required by the permit, perform inspections of the work in progress, and submit certifications to the applicable regulatory agency, via the Contracting Officer, that the work conforms to the contract and permit requirements. The inspections and certifications shall be provided through the services of a Professional Engineer, registered in the State where the work is being performed. As a part of the quality control plan, which is required to be submitted for approval by the quality control section, provide a subitem containing the name, P.E. registration number, address, and telephone number of the professional engineer(s) who will be performing the inspections and certifications for each permit listed above.

1.9 GENERAL ENVIRONMENTAL MANAGEMENT SYSTEM AND ENVIRONMENTAL AWARENESS

The Contractor shall familiarize himself with requirements of the attached "Marine Corps Base (MCB), Camp Lejeune, Contractor Environmental Guide."

1.10 CAMP LEJEUNE SANITARY LANDFILL INFORMATION SHEET

a. Contractors may ONLY use the Camp Lejeune Sanitary Landfill for the disposal of asbestos containing materials, building products with tightly adhered lead containing paint, non-contaminated clean dirt, asphalt and clean gravel. The hours of operation are 0730-1530. Concrete with Asbestos Containing Materials and tightly adhered lead containing paint must be delivered in accordance to Marine Corps Camp Lejeune Base Order 11350.1A

b. Delivery of asbestos shall be by appointment only. Appointments made by phone at 910-451-8666 or 910-451-2946. ALL other contractor generated material shall be weighed at their final destination and once the contract is complete, all tickets shall be submitted to the Base Landfill for reporting. Contractors authorized to use the base scales will require a Landfill Use Letter from the FSC/Landfill Director.

c. The Contracting Officer will register the contract via E-mail, with the base landfill. All haul vehicles will maintain a secure vehicle placard as a condition to utilize the scale. E-mail the contract information to the Landfill Clerk, including the name on the Prime Contractor, contract number, job name/description, completion date and whether or not any of the above materials will be delivered to the Landfill.

d. As of May 01 2014 the above supersedes any other statements/specifications pertaining to the delivery of materials to the Base Landfill.

PART 2 PRODUCTS

2.1 ANNUAL REPORT OF PRODUCTS CONTAINING RECOVERED MATERIALS

The Contractor shall submit data annually (by December 1) products used during the previous fiscal year (October 1 - September 30) as required by 6002 of the Solid Waste Disposal Act as amended by Resource Conservation and Recovery Act (RCRA). Report forms is attached to end of this section as "Appendix A."

PART 3 EXECUTION

3.1 PROTECTION OF NATURAL RESOURCES

Preserve the natural resources within the project boundaries and outside the limits of permanent work. Restore to an equivalent or improved condition upon completion of work. Confine construction activities to within the limits of the work indicated or specified. Conform to the state permitting requirements of the Clean Water Act.

3.1.1 Land Resources

Except in areas to be cleared, do not remove, cut, deface, injure, or destroy trees or shrubs without Contracting Officer's permission. Do not fasten or attach ropes, cables, or guys to existing nearby trees for anchorages unless authorized by Contracting Officer. Where such use of attach ropes, cables, or guys is authorized, the Contractor shall be responsible for any resultant damage.

3.1.1.1 Protection of Trees

Protect existing trees which are to remain and which may be injured, bruised, defaced, or otherwise damaged by construction operations. Remove displaced rocks from uncleared areas. By approved excavation, remove trees with 30 percent or more of their root systems destroyed. Removal of trees and the procedure for removal requires approval of the Contracting Officer.

3.1.1.2 Landscape Replacement

Remove trees and other landscape features scarred or damaged by equipment operations, and replace with equivalent, undamaged trees and landscape features. Obtain Contracting Officer's approval before removal or replacement.

3.1.1.3 Temporary Construction

Remove traces of temporary construction facilities such as haul roads, work area, structures, foundations of temporary structures, stockpiles of excess or waste materials, and other signs of construction. Grade temporary roads, parking areas, and similar temporarily used areas to conform with surrounding contours.

3.1.2 Water Resources

3.1.2.1 Stream Crossings

The Contracting Officer's approval is required before any equipment will be permitted to ford live streams.

3.1.2.2 Oily Wastes

Prevent oily or other hazardous substances from entering the ground, drainage areas, or local bodies of water. Surround all temporary fuel oil or petroleum storage tanks with a temporary earth berm of sufficient size and strength to contain the contents of the tanks in the event of leakage or spillage.

3.1.3 Fish and Wildlife Resources

Do not disturb fish and wildlife. Do not alter water flows or otherwise significantly disturb the native habitat adjacent to the project and critical to the survival of fish and wildlife, except as indicated or specified.

3.2 HISTORICAL AND ARCHAEOLOGICAL RESOURCES

Carefully protect in-place and report immediately to the Contracting Officer historical and archaeological items or human skeletal remains discovered in the course of work. Stop work in the immediate area of the discovery until directed by the Contracting Officer to resume work. The Government retains ownership and control over historical and archaeological resources.

3.3 NOISE

Make the maximum use of low-noise emission products, as certified by the EPA. Blasting or use of explosives will not be permitted without written permission from the Contracting Officer, and then only during designated times.

3.4 RESTRICTIONS ON EQUIPMENT

3.4.1 Electromagnetic Interference Suppression

a. Electric motors must comply with MIL-STD-461 relative to radiated and conducted electromagnetic interference. A test for electromagnetic interference will not be required for motors that are identical physically and electrically to those that have previously met the requirements of MIL-STD-461. An electromagnetic interference suppression test will not be required for electric motors without commutation or sliprings having no more than one starting contact and operated at 3,600 revolutions per minute or less.

b. Equipment used by the Contractor shall comply with requirements for internal combustion engines and MIL-STD-461 for devices capable of producing radiated or conducted interference.

c. Conduct tests for electromagnetic interference on electric motors and Contractor's construction equipment in accordance with MIL-STD-461. Test location shall be reasonably free from radiated and conducted interference. Furnish testing equipment, instruments, and personnel for making the tests; a test location; and other necessary facilities.

3.4.2 Radio Transmitter Restrictions

Conform to the restrictions and procedures for the use of radio transmitting equipment, as directed. Do not use transmitters without prior approval.

3.5 CONTROL AND DISPOSAL OF SOLID WASTES

Pick up and separate solid wastes, and place in covered containers which are regularly emptied. Do not prepare or cook food on the project site. Prevent contamination of the site or other areas when handling and disposing of wastes. At project completion, leave the areas clean.

3.5.1 Disposal of Metal Paint Cans

All metal paint cans shall be taken to Building 962 for recycling. The cans shall be empty and completely dry. The cans shall be triple rinsed and stenciled "Triple Rinsed" prior to turn in. The Contractor shall give the Government 72 hours advance notice prior to turn-in. Contractor is responsible for rinsing, stenciling, crushing, and deposting in Government owned receptable, located at Building 962.

3.5.2 Disposal of Rubbish and Debris, Metal and Dirt

Rubbish and debris shall be taken off-base for disposal, unless specifically directed otherwise below:

Metals shall be taken to the Qualified Recycling Program (QRP) located at the Building 982, Base Landfill, as specified.

CATEGORY	CONSTRUCTION DEBRIS DISPOSAL - BASE SANITARY LANDFILL EXAMPLE/GENERAL INFORMATION FOR DEPOSIT IN THE LANDFILL
Recyclable Cardboard	Breakdown corrugated cardboard boxes and deliver to the Base Recycling Center located at Building 982. If base personnel rejects the cardboard, take cardboard for off-base disposal.
Recyclable Wood Pallets	Deliver usable pallets to the Base Recycling Center located at Building 982. If base personnel rejects the pellets, take pallets for off-base disposal.
Organic Matter	Organic matter will not be accepted at the landfill.
*****	Weigh each and every vehicle delivering debris upon entrance and exit. Cover debris.
Metals	Metals will be accepted at the Recycling Center located at the Base Landfill, Bldg 982. Remove metals from each and every category before delivery to landfill. Aluminum, brass, copper, other metal, electrical wiring and cable shall be delivered to the Recycling Center at Building 982, Base Landfill.
Treated & Untreated Wood/Lumber	Treated & untreated wood/lumber will not be accepted at the landfill.
Concrete	Concrete will not be accepted at the landfill.
Construction Material	Construction material should be managed and placed in a designated area. Area shall be kept clean of debris and all material removed at the end of the project.
Solid Waste	Separate each category of solid waste to enhance recycling.
Hazardous Material	This project involves demolition, renovation/repair and/or construction activities; therefore, hazardous material (such as paints, solvents, thinners, adhesives, etc) may be used during the execution of this project. The contractor will be required to appropriately manage the hazardous material and provide secondary containment.

CATEGORY	CONSTRUCTION DEBRIS DISPOSAL - BASE SANITARY LANDFILL EXAMPLE/GENERAL INFORMATION FOR DEPOSIT IN THE LANDFILL
Solid Waste Report	All solid waste generated and recycled will be weighed. Contractor will report the amount of solid wasted disposed and recycled at the end of the project to EMD's Solid Waste Manager or the Pollution Prevention Manager via the OICC. Tonnage information for all materials delivered to the Base Landfill is available at the Landfill Office. Submit a written request to the Landfill Manager, specifying the desired information.
Recycling of Construction Debris	Recyclable material (ex. Scrap metal/aluminum/brass/copper/lead, and other metal) may be recycled through the Qualified Recycling Program. For additional information contact the Base Recyling Coordinator at 910-451-4214
Electrical Equipment	Before demolition or removal of electrical equipment from the Base - Contractor shall contact Base High Voltage Shop Supervisor at (910) 451-2790, to allow for first right of refusal of electrical equipment such as: ATS, transformers, and generators. Electrical equipment will not be accepted at landfill.

3.5.3 Disposal Off-Base

a. Provide 24-hour advance written notice to the Contracting Office of Contractor's intention to dispose of off base.

b. Disposal at sites or landfills not holding a valid State of North Carolina permit is specifically prohibited. The prohibition also applies to sites where a permit may have been applied for but not yet obtained.

c. Off-base disposal of construction debris outside the parameters of this paragraph at site without State permits and/or not in accordance with regulatory requirements shall require the Contractor at his own expense to remove, transport and relocate the debris to a State approved site. The Contractor shall also be required to pay any fines, penalties, or fees related to the illegal disposal of construction debris

3.6 CONTROL AND DISPOSAL OF HAZARDOUS WASTE

3.6.1 Hazardous Waste Generation

Handle generated hazardous waste in accordance with 40 CFR 262.

3.6.2 Hazardous Waste Disposal

Dispose of hazardous waste in accordance with Federal, State, and local regulations, especially 40 CFR 263, 40 CFR 264, and 40 CFR 265. Removal of hazardous waste from Government property shall not occur without prior notification and coordination with the Contracting officer. Transport hazardous waste by a permitted, licensed, or registered hazardous waste transported to a TSD facility. Hazardous waste shall be properly identified, packaged, and labeled in accordance with 49 CFR 172. Provide completed manifest for hazardous waste disposed of off-site to the Contracting Officer within 7 days of disposal. Hazardous waste shall not be brought onto the station.

3.6.3 Hazardous Waste Storage

Store hazardous waste in containers in accordance with 49 CFR 178. Identify hazardous waste in accordance with 40 CFR 261 and 40 CFR 262. Identify hazardous waste generated within the confines of the station by the station's EPA generator identification number.

3.6.4 Spills of Oil and Hazardous Materials

Take precautions to prevent spills of oil and hazardous material. In the event of a spill, immediately notify the Contracting Officer. Spill response shall be in accordance with 40 CFR 300 and applicable State regulations.

3.6.5 Lead-Acid Batteries

Dispose of lead-acid batteries that are not damaged or leaking at a State-approved battery recycle or at a permitted or interim status hazardous waste TSD facility. For lead-acid batteries that are leaking or have cracked casings, dispose of the electrolyte solution using one of the

following alternatives:

a. An industrial waste water treatment plant, if available and approved by the Contracting Officer for disposing of lead-acid battery electrolyte.

b. Dispose of the lead-acid battery electrolyte at a permitted or interim status hazardous waste TSD facility.

The management and disposal of waste lead-acid batteries and electrolyte shall comply with requirements for management and disposal of hazardous wastes.

3.6.6 Mercury Control

Prior to starting work, remove thermostats, switches, and other components that contain mercury. Upon removal, place items containing mercury in doubled polyethylene bags, label, and turn over to the Contracting Officer for disposal.

3.6.7 Petroleum Products

Protect against spills and evaporation during fueling and lubrication of equipment and motor vehicles. Dispose of lubricants to be discarded and excess oil.

3.7 DUST CONTROL

Keep dust down at all times, including nonworking periods. Sprinkle or treat, with dust suppressants, the soil at the site, haul roads, and other areas disturbed by operations. Dry power brooming will not be permitted. Instead, use vacuuming, wet mopping, wet sweeping, or wet power brooming. Air blowing will be permitted only for cleaning nonparticulate debris such as steel reinforcing bars. Only wet cutting will be permitted for cutting concrete blocks, concrete, and bituminous concrete. Do not shake bags of cement, concrete mortar, or plaster unnecessarily.

3.7.1 Abrasive Blasting

3.7.1.1 Blasting Operations

The use of silica sand is prohibited in abrasive blasting.

Provide tarpaulin drop cloths and windscreens to enclose abrasive blasting operations to confine and collect dust, abrasive agent, paint chips, and other debris in accordance with the requirements specified. Perform work involving removal of hazardous material in accordance with 29 CFR 1910.

3.7.1.2 Disposal Requirements

Collect dust, abrasive, paint, and other debris resulting from abrasive blasting operations and store in 55 gallon drums with watertight lids. Take a representative sample of this material, and test for EP toxicity with respect to lead, chromium, and cadmium content. The sampling and testing shall be performed in accordance with 40 CFR 261. Handle debris resulting from the abrasive blasting operations as a hazardous material, and dispose of in accordance with 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265. Transport hazardous material by a transporter licensed and permitted for transportation of hazardous materials. Dispose of hazardous

material in an EPA-approved and permitted facility specifically designated for hazardous waste disposal.

3.8 QUARANTINE FOR IMPORTED FIRE ANT (4/82)

Onslow, Jones, and Cartaret Counties and portions of Duplin and Craven Counties have been declared a generally infested area by the United States Department of Agriculture (USDA) for the imported fire ant. Compliance with the quarantine regulations established by this authority as set forth in USDA Publication 301.81 of 31 December 1992, is required for operations hereunder. Pertinent requirements of the quarantine for materials originating on the Camp Lejeune reservation, the Marine Corps Air Station (Helicopter), New River and the Marine Corps Air Station, Cherry Point, which are to be transported outside Onslow County or adjacent suppression areas, include the following:

a. Certification is required for the following articles and they shall not be moved from the reservation to any point outside Onslow County and adjacent designated areas unless accompanied by a valid inspection certificate issued by an Officer of the Plant Protection and Quarantine Program (PPQ) of the U.S. Department of Agriculture.

   (1) Bulk soil

   (2) Used mechanized soil-moving equipment. (Used mechanized soil-moving equipment is exempt if cleaned of loose noncompacted soil).

   (3) Other products, articles, or means of conveyances, if it is determined by an inspector that they present a hazard of transporting spread of the imported fire ant and the person in possession thereof has been so notified.

b. Authorization for movement of equipment outside the imported fire and regulated area shall be obtained from USDA, Animal and Plant Health Inspection Service (APHIS), Plant Protection and Quarantine (PPQ), Box 28, Goldsboro, North Carolina, 27533-0028, Attn: Mr. William Scroggins or Mr. Frank Best, telephone (919) 735-1941. If Mr. Scroggins or Mr. Best are not available, contact Mr. Jim Kelley at (910) 815-4667, the supervisor's office in Wilmington. Requests for inspection shall be made sufficiently in advance of the date of movement to permit arrangements for the services of authorized inspectors. The equipment shall be prepared and assembled so that it may be readily inspected. Soil on or attached to equipment, supplies, and materials shall be removed by washing with water or such other means as necessary to accomplish complete removal. Resulting spoil shall be wasted as necessary and as directed.

ANNUAL REPORT OF PRODUCTS CONTAINING RECOVERED MATERIALS

Contractor shall submit data annually (By 1 December) for the following products used during the previous fiscal year (1 October - 30 September) as required by 6002 of the Solid Waste Disposal Act as ammended by Resource Conservation and Recovery Act (RCRA):

Contract Number: _____ Fiscal Year: _____

MATERIAL	UNIT	QUANTITY (CRM)	TOTAL QUANTITY
A. Insulation			
1. Loose fill	Ft3		
2. Blanket or batt	Ft2		
3. Board	Ft2		
4. Spray-in-place	m3		
5. Other			
B. Cement and Concrete	yd3		
C. Paper and Paper Products			
1. Copy Paper	Box		
2. Printing/Writing Paper	Box		
3. Corrugated and fiberboard boxes	Box		
4. Folding boxboard and cartons	Box		
5. Stationary, office papers, envelopes, and computer paper	$Amt		
6. Toilet tissue, paper towels, fasial tissue, paper napkins, doilies and industrial wipes	$Amt		
7. Brown papers and coarse papers	Box		
8. Other			

APPENDIX A

MATERIAL	DEFINITION
1. Quantity (CRM)	Quantity used containing recovered materials.
2. Total Quantity	Quantity used containing recovered materials plus quantity used not containing recovered materials.
3. Unit	Ft3 (cubic feet), Ft2 (square feet), m3 (cubic meters), yd3 (cubic yards), box (number of boxes used), $ Amt (dollar value of material used)
4. Loose-Fill Insulation	Includes, but is not limited to..."cellulose fiber, mineral fibers (fiberglass and rock wool), vermiculite, and perlite.
5. Blanket or Batt Insulation	Includes, but is not limited to... "mineral fibers (fiberglass and rock wool)."
6. Board Insulation	This category refers to sheathing, roof decking, and wood panel insulation. It includes, but is not limited to... "cellulose fiber fiberboard, perlite composite board, polyurethane, polyisocyanurate, polystyrene, phenolics, and composites."
7. Spray-in-place Insulation	Includes, but is not limited to... "foam-in-place polyurethane and polyisocyanurate, and spray-on cellulose."
8. Cement or Concrete Containing Recovered Materials, Cement, or Concrete Containing Fly Ash	
9. Copy Paper	This item refers to... "any grade of paper suitable for copying by the xerographic method."
10. Printing & Writing Paper	This item refers to... "paper designed for printing, other than newsprint, such as offset or book paper," and... "paper suitable for pen and ink, pencil, typewriter or printing."

APPENDIX A

MATERIAL	DEFINITION
11. Corrugated & Fiberboard Boxes	Corrugated boxes refer to... "boxes made of corrugated paperboard, which, in turn, is made from a fluted corrugating medium pasted to two flat sheets of paperboard (linerboard)." Fiber or fiberboard boxes refer to... "boxes made from containerboard, either solid fiber or corrugated paperboard (general term); or boxes made from solid paperboard of the same material throughout."
12. Folding Boxes and Cartons	This item refers to... "a paperboard suitable for the manufacture of folding cartons."
13. Stationery, Office Papers, Envelopes, and Manifold Business Forms	This item is considered self-explanatory, however, if questions arise refer to 40 CFR 250.4 for definitions of any of these items.
14. Toilet Tissue, Paper Towels, Facial Tissue, Paper Napkins, Doilies, and Industrial Wipes	This item is considered self-explanatory, however, if questions arise refer to 40 CFR 250.4 for definitions of any of these items.
15. Brown Papers, and Coarse Papers	Brown papers refer to... "papers usually made from unbleached kraft pulp and used for bags, sacks, wrapping paper, and so forth." Coarse papers refer to... "papers used for industrial purposes, as distinguished from those used for cultural or sanitary purposes."
16. Other	Any other type of paper not included in any of the above categories.

APPENDIX A

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 74 19

CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
02/19, CHG 3: 11/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 273	Standards for Universal Waste Management
49 CFR 173	Shippers - General Requirements for Shipments and Packagings
49 CFR 178	Specifications for Packagings

1.2 DEFINITIONS

1.2.1 Co-mingle

The practice of placing unrelated materials together in a single container, usually for benefits of convenience and speed.

1.2.2 Construction Waste

Waste generated by construction activities, such as scrap materials, damaged or spoiled materials, temporary and expendable construction materials, and other waste generated by the workforce during construction activities.

1.2.3 Demolition Debris/Waste

Waste generated from demolition activities, including minor incidental demolition waste materials generated as a result of Intentional dismantling of all or portions of a building, to include clearing of building contents that have been destroyed or damaged.

1.2.4 Disposal

Depositing waste in a solid waste disposal facility, usually a managed landfill or incinerator, regulated in the US under the Resource Conservation and Recovery Act (RCRA).

1.2.5 Diversion

The practice of diverting waste from disposal in a landfill or incinerator, by means of eliminating or minimizing waste, or reuse of materials.

1.2.6 Final Construction Waste Diversion Report

A written assertion by a material recovery facility operator identifying

constituent materials diverted from disposal, usually including summary tabulations of materials, weight in short-ton.

1.2.7 Recycling

The series of activities, including collection, separation, and processing, by which products or other materials are diverted from the solid waste stream for use in the form of raw materials in the manufacture of new products sold or distributed in commerce, or the reuse of such materials as substitutes for goods made of virgin materials, other than fuel.

1.2.8 Reuse

The use of a product or materials again for the same purpose, in its original form or with little enhancement or change.

1.2.9 Salvage

Usable, salable items derived from buildings undergoing demolition or deconstruction, parts from vehicles, machinery, other equipment, or other components.

1.2.10 Source Separation

The practice of administering and implementing a management strategy to identify and segregate unrelated waste at the first opportunity.

1.3 CONSTRUCTION WASTE (INCLUDES DEMOLITION DEBRIS/WASTE)

Divert a minimum of 60 percent by weight of the project construction waste and demolition debris/waste from the landfill or incinerator. Follow applicable industry standards in the management of waste. Apply sound environmental principles in the management of waste. (1) Practice efficient waste management when sizing, cutting, and installing products and materials and (2) use all reasonable means to divert construction waste and demolition debris/waste from landfills and incinerators and to facilitate the recycling or reuse of excess construction materials.

1.4 CONSTRUCTION WASTE MANAGEMENT

Implement a Construction Waste Management Program for the project. Take a pro-active, responsible role in the management of construction construction waste, recycling process, disposal of demolition debris/waste, and require all subcontractors, vendors, and suppliers to participate in the Construction Waste Management Program. Establish a process for clear tracking, and documentation of construction waste and demolition debris/waste.

1.4.1 Implementation of Construction Waste Management Program

Develop and document how the Construction Waste Management Program will be implemented in a Construction Waste Management Plan. Submit a Construction Waste Management Plan to the Contracting Officer for approval. Construction waste and demolition debris/waste materials include un-used construction materials not incorporated in the final work, as well as demolition debris/waste materials from demolition activities or deconstruction activities. In the management of waste, consider the availability of viable markets, the condition of materials, the ability to

provide material in suitable condition and in a quantity acceptable to available markets, and time constraints imposed by internal project completion mandates.

1.4.2 Oversight

The Environmental Manager, as specified in Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS, is responsible for overseeing and documenting results from executing the Construction Waste Management Plan for the project.

1.4.3 Special Programs

Implement special programs involving rebates or similar incentives related to recycling of construction waste and demolition debris/waste materials. Retain revenue or savings from salvaged or recycling, unless otherwise directed. Ensure firms and facilities used for recycling, reuse, and disposal are permitted for the intended use to the extent required by federal, state, and local regulations.

1.4.4 Special Instructions

Provide on-site instruction of appropriate separation, handling, recycling, salvage, reuse, and return methods to be used by all parties at the appropriate stages of the projects. Designation of single source separating or commingling will be clearly marked on the containers.

1.4.5 Waste Streams

Delineate waste streams and characterization, including estimated material types and quantities of waste, in the Construction Waste Management Plan. Manage all waste streams associated with the project. Typical waste streams are listed below. Include additional waste steams not listed:

a. Land Clearing Debris

b. Asphalt

c. Masonry and CMU

d. Concrete

e. Metals (Includes, but is not limited to, banding, stud trim, ductwork, piping, rebar, roofing, other trim, steel, iron, galvanized, stainless steel, aluminum, copper, zinc, bronze.)

f. Wood (nails and staples allowed)

g. Glass

h. Paper

i. Plastics (PET, HDPE,PVC,LDPE,PP,PS, Other)

j. Gypsum

k. Non-hazardous paint and paint cans

l. Carpet

m. Ceiling Tiles

n. Insulation

o. Beverage Containers

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Construction Waste Management Plan; G

SD-11 Closeout Submittals

Final Construction Waste Diversion Report; S

1.6 MEETINGS

Conduct Construction Waste Management meetings. After award of the Contract and prior to commencement of work, schedule and conduct a meeting with the Contracting Officer to discuss the proposed Construction Waste Management Plan and to develop a mutual understanding relative to the management of the Construction Waste Management Program and how waste diversion requirements will be met.

The requirements of this meeting may be fulfilled during the coordination and mutual Understanding meeting outlined in Section 01 45 00 QUALITY CONTROL. At a minimum, discuss and document waste management goals at following meetings:

a. Preconstruction and Pre-demolition meeting.

b. Regular Quality Control meetings.

c. Work safety meeting (if applicable).

1.7 CONSTRUCTION WASTE MANAGEMENT PLAN

Submit Construction Waste Management Plan within 45 calendar days after notice to proceed. Revise and resubmit Construction Waste Management Plan as necessary, in order for construction to begin.. Execute demolition or deconstruction activities in accordance with Section 02 41 00 DEMOLITION. Manage demolition debris/waste or deconstruction materials in accordance with the approved construction waste management plan.

An approved Construction Waste Management Plan will not relieve the Contractor of responsibility for compliance with applicable environmental regulations or meeting project cumulative waste diversion requirement. Ensure all subcontractors receive a copy of the approved Construction Waste Management Plan. The plan demonstrates how to meet the project waste diversion requirement. Also, include the following in the plan:

a. Identify the names of individuals responsible for waste management and waste management tracking, along with roles and responsibilities on

the project..

b. Actions that will be taken to reduce solid waste generation, including coordination with subcontractors to ensure awareness and participation.

c. Description of the regular meetings to be held to address waste management.

d. Description of the specific approaches to be used in recycling/reuse of the various materials generated, including the areas on site and equipment to be used for processing, sorting, and temporary storage of materials.

e. Name of landfill and incinerator to be used.

f. Identification of local and regional re-use programs, including non-profit organizations such as schools, local housing agencies, and organization that accept used materials such as material exchange networks and resale stores. Include the name, location, phone number for each re-use facility identified, and provide a copy of the permit or license for each facility.

g. List of specific materials, by type and quantity, that will be salvaged for resale, salvaged and reused on the current project, salvaged and stored for reuse on a future project, or recycled. Identify the recycling facilities by name, address, and phone number.

h. Identification of materials that cannot be recycled or reused with an explanation or justification, to be approved by the Contracting Officer.

i. Description of the means by which materials identified in item (g) above will be protected from contamination.

j. Description of the means of transportation of the recyclable materials (whether materials will be site-separated and self-hauled to designated centers, or whether mixed materials will be collected by a waste hauler and removed from the site).

k. Copy of training plan for subcontractors and other services to prevent contamination by co-mingling materials identified for diversion and waste materials.

l. Identification of at least 5 construction or demolition material streams for diversion.

m. Facilities or subcontractors offering construction waste transport on-site or off-site must ensure that proper shipping orders, bill of lading, manifests, or other shipping documents containing waste diversion information meet requirements of 40 CFR 273 Universal Waste Management, 49 CFR 173 Shippers - General Requirements for Shipments and Packagings, and 49 CFR 178 Specifications for Packaging. Individuals signing manifests or other shipping documents should meet the minimum training requirements.

n. List each supplier who deliver construction materials, in bulk, or package products in returnable containers or returnable packaging, or have take-back programs. List each program and the applicable material to actively monitor and track to assist in meeting waste

diversion requirements on the project.

Distribute copies of the waste management plan to each subcontractor, Environmental Manager, and the Contracting Officer.

1.8 RECORDS (DOCUMENTATION)

1.8.1 General

Maintain records to document the types and quantities of waste generated and diverted though re-use, recycling and sale to third parties; through disposal to a landfill or incinerator facility. Provide explanations for materials not recycled, reused or sold. Collect and retain manifests, weight tickets, sales receipts, and invoices specifically identifying diverted project waste materials or disposed materials.

1.8.2 Accumulated

Maintain a running record of materials generated and diverted from landfill disposal, including accumulated diversion rates for the project. Make records available to the Contracting Officer during construction or incidental demolition activities. Provide a copy of the diversion records to the Contracting Officer upon completion of the construction, incidental demolitions or minor deconstruction activities.

1.9 FINAL CONSTRUCTION WASTE DIVERSION REPORT

A Final Construction Waste Diversion Report is required at the end of the project. Provide Final Construction Waste Diversion Report 60 days prior to the Beneficial Occupancy Date (BOD). The final Construction Waste Diversion Report must be included in the Sustainability eNotebook in accordance with Section 01 33 29 SUSTAINABILITY REQUIREMENTS AND REPORTING.

1.10 COLLECTION

Collect, store, protect, and handle reusable and recyclable materials at the site in a manner which prevents contamination, and provides protection from the elements to preserve their usefulness and monetary value. Provide receptacles and storage areas designated specifically for recyclable and reusable materials and label them clearly and appropriately to prevent contamination from other waste materials. Keep receptacles or storage areas neat and clean.

Train subcontractors and other service providers to either separate waste streams or use the co-mingling method as described in the Construction Waste Management Plan. Handle hazardous waste and hazardous materials in accordance with applicable regulations and coordinate with Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROL. Separate materials by one of the following methods described herein:

1.10.1 Source Separation Method

Separate waste products and materials that are recyclable from trash and sort as described below into appropriately marked separate containers and then transport to the respective recycling facility for further processing. Deliver materials in accordance with recycling or reuse facility requirements (e.g., free of dirt, adhesives, solvents, petroleum contamination, and other substances deleterious to the recycling

process). Separate materials into the category types as defined in the Construction Waste Management Plan.

1.10.2 Other Methods

Other methods proposed by the Contractor may be used when approved by the Contracting Officer.

1.11 DISPOSAL

Control accumulation of waste materials and trash. Recycle or dispose of collected materials off-site at intervals approved by the Contracting Officer and in compliance with waste management procedures as described in the waste management plan. Except as otherwise specified in other sections of the specifications, dispose of in accordance with the following:

1.11.1 Reuse

Give first consideration to reusing construction and demolition materials as a disposition strategy. Recover for reuse materials, products, and components as described in the approved Construction Waste Management Plan. Coordinate with the Contracting Officer to identify onsite reuse opportunities or material sales or donation available through Government resale or donation programs. Sale of recovered materials is not allowed on the Installation. Consider the use of surplus industrial supply broker services, who match entities with reusable or repurpose industrial materials with entities with need of such materials.

1.11.2 Recycle

Recycle non-hazardous construction and demolition/debris materials that are not suitable for reuse. Track rejection of contaminated recyclable materials by the recycling facility. Rejected recyclables materials will not be counted as a percentage of diversion calculation. Recycle all fluorescent lamps, HID lamps, mercury (Hg) -containing thermostats and ampoules, and PCBs-containing ballasts and electrical components as directed by the Contracting Officer. Do not crush lamps on site as this creates a hazardous waste stream with additional handling requirements.

1.11.3 Waste

Dispose by landfill or incineration only those waste materials with no practical use, economic benefit, or recycling opportunity.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used. -- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 78 00

CLOSEOUT SUBMITTALS
04/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E1971	(2005; R 2011) Standard Guide for Stewardship for the Cleaning of Commercial and Institutional Buildings

GREEN SEAL (GS)

GS-37	(2017) Cleaning Products for Industrial and Institutional Use

U.S. DEPARTMENT OF DEFENSE (DOD)

FC 1-300-09N	(2014; with Change 4) Navy and Marine Corps Design Procedures
UFC 1-300-08	(2009, with Change 2) Criteria for Transfer and Acceptance of DoD Real Property

1.2 DEFINITIONS

1.2.1 As-Built Drawings

As-built drawings are developed and maintained by the Contractor and depict actual conditions, including deviations from the Contract Documents. These deviations and additions may result from coordination required by, but not limited to: contract modifications; official responses to Contractor submitted Requests for Information; direction from the Contracting Officer; designs which are the responsibility of the Contractor, and differing site conditions. Maintain the as-builts throughout construction as red-lined hard copies on site. These files serve as the basis for the creation of the record drawings.

1.2.2 Record Drawings

The record drawings are the final compilation of actual conditions reflected in the as-built drawings.

1.2.3 Final Approved Shop Drawings

The final approved shop drawings are all approved submittals created during the execution of the project. All submittals, regardless of the approving authority, shall be submitted. Include the submittal cover sheet and all relevant attachments for all submittals. Each submittal shall be

saved as a separate file or have its own unique folder if a submittal includes attachments of multiple files or file types. Include a PDF copy of the completed submittal register.

1.3 SOURCE DRAWING FILES

Request the full set of electronic drawings, in the source format, for Record Drawing preparation, after award and at least 30 days prior to required use.

1.3.1 Terms and Conditions

Data contained on these electronic files must not be used for any purpose other than as a convenience in the preparation of construction data for the referenced project. Any other use or reuse shall be at the sole risk of the Contractor and without liability or legal exposure to the Government. The Contractor must make no claim and waives to the fullest extent permitted by law, any claim or cause of action of any nature against the Government, its agents or sub consultants that may arise out of or in connection with the use of these electronic files. The Contractor must, to the fullest extent permitted by law, indemnify and hold the Government harmless against all damages, liabilities or costs, including reasonable attorney's fees and defense costs, arising out of or resulting from the use of these electronic files.

These electronic CAD drawing files are not construction documents. Differences may exist between the CAD files and the corresponding construction documents. The Government makes no representation regarding the accuracy or completeness of the electronic CAD files, nor does it make representation to the compatibility of these files with the Contractor hardware or software. In the event that a conflict arises between the signed and sealed construction documents prepared by the Government and the furnished Source drawing files, the signed and sealed construction documents govern. The Contractor is responsible for determining if any conflict exists. Use of these Source Drawing files does not relieve the Contractor of duty to fully comply with the contract documents, including and without limitation, the need to check, confirm and coordinate the work of all contractors for the project. If the Contractor uses, duplicates or modifies these electronic source drawing files for use in producing construction data related to this contract, remove all previous indicia of ownership (seals, logos, signatures, initials and dates).

1.4 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Warranty Management Plan

Warranty Tags

Final Cleaning

Spare Parts Data

SD-08 Manufacturer's Instructions

Posted Instructions

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals

SD-11 Closeout Submittals

As-Built Drawings

Record Drawings

As-Built Record of Equipment and Materials

Final Approved Shop Drawings

Construction Contract Specifications

Certification of EPA Designated Items

Certification Of USDA Designated Items

Interim DD FORM 1354

Checklist for DD FORM 1354

High Performance and Sustainable Building (HPSB) Checklist

1.5 SPARE PARTS DATA

Submit two copies of the Spare Parts Data list.

a. Indicate manufacturer's name, part number, nomenclature, and stock level required for maintenance and repair. List those items that may be standard to the normal maintenance of the system.

1.6 WARRANTY MANAGEMENT

1.6.1 Warranty Management Plan

Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction. At least 30 days before the planned pre-warranty conference, submit one set of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesmen, or of engineering background, not necessarily familiar with this contract. The term "status" as indicated below must include due date and whether item has been submitted or was accomplished. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly pay estimate.

Assemble approved information in a binder and turn over two (2) copies of the binder to the Government upon submittal of the initial Test & Balance (TAB) Report or no later than ninety (90) days prior to contract completion date (CCD), whichever is sooner. The contents of the binder will be verified onsite for accuracy and completeness of contents by a representative of MCBCL Public Works. Upon site approval of the binder,

one copy will be distributed to the PWD representative and one copy will be stored in the O&M cabinet in the mechanical room.

The construction warranty period will begin on the date of project acceptance and continue for the full product warranty period. A joint 4 month and 9 month warranty inspection will be conducted, measured from time of acceptance, by the Contractor, Contracting Officer and the Customer Representative. Include within the warranty management plan , but not limited to, the following:

a. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the organizations of the Contractors, subcontractors, manufacturers or suppliers involved.

b. Furnish with each warranty the name, address, and telephone number of each of the guarantor's representatives nearest to the project location.

c. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers, and for all commissioned systems such as fire protection and alarm systems, sprinkler systems, lightning protection systems, etc.

d. As-Built Record of Equipment and Materials list for each warranted equipment, item, feature of construction or system indicating:

(1) Name of item.
(2) Model and serial numbers.
(3) Location where installed.
(4) Name and phone numbers of manufacturers or suppliers.
(5) Names, addresses and telephone numbers of sources of spare parts.
(6) Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
(7) Cross-reference to warranty certificates as applicable.
(8) Starting point and duration of warranty period.
(9) Summary of maintenance procedures required to continue the warranty in force.
(10) Cross-reference to specific pertinent Operation and Maintenance manuals.
(11) Organization, names and phone numbers of persons to call for warranty service.
(12) Typical response time and repair time expected for various warranted equipment.

e. The plans for attendance at the 4 and 9 month post-construction warranty inspections conducted by the Government.

f. Procedure and status of tagging of all equipment covered by extended warranties.

g. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.

1.6.2 Performance Bond

The Performance Bond must remain effective throughout the construction period .

a. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.

b. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the Contractor's expense, the Contracting Officer will have the right to recoup expenses from the bonding company.

c. Following oral or written notification of required construction warranty repair work, respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.

1.6.3 Pre-Warranty Conference

Prior to contract completion, and at a time designated by the Contracting Officer, meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contact will be located within the local service area of the warranted construction, be continuously available, and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in connection with other portions of this provision.

1.6.4 Warranty Tags

At the time of installation, tag each warranted item with a durable, oil and water resistant tag approved by the Contracting Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also, submit two record copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Type of product/material	
Model number	

Serial number	
Contract number	
Warranty period from/to	
Inspector's signature	
Construction Contractor	
Address	
Telephone number	
Warranty contact	
Address	
Telephone number	
Warranty response time priority code	
WARNING - PROJECT PERSONNEL TO PERFORM ONLY OPERATIONAL MAINTENANCE DURING THE WARRANTY PERIOD.	

PART 2 PRODUCTS

2.1 CERTIFICATION OF EPA DESIGNATED ITEMS

Submit the Certification of EPA Designated Items as required by FAR 52.223-9 Estimate of Percentage of Recovered Material Content for EPA Designated Items and FAR 52-223-17 Affirmative Procurement of EPA designated items in Service and Construction Contracts.. Include on the certification form the following information: project name, project number, Contractor name, license number, Contractor address, and certification. The certification will read as follows and be signed and dated by the Contractor. "I hereby certify the information provided herein is accurate and that the requisition/procurement of all materials listed on this form comply with current EPA standards for recycled/recovered materials content. The following exemptions may apply to the non-procurement of recycled/recovered content materials:

1) The product does not meet appropriate performance standards;
2) The product is not available within a reasonable time frame;
3) The product is not available competitively (from two or more sources);
4) The product is only available at an unreasonable price (compared with a comparable non-recycled content product)."

2.2 CERTIFICATION OF USDA DESIGNATED ITEMS

Submit the Certification of USDA Designated Items as required by FAR 52-223-1 Bio-based Product Certifications and FAR 52.223-2 Affirmative Procurement of Biobased Products Under Service and Construction Contracts. Include on the certification form the following information: project name, project number, Contractor name, license number, Contractor address, and certification. The certification will read as follows and be signed and dated by the Contractor. "I hereby certify the information provided herein is accurate and that the requisition/procurement of all materials listed on this form comply with current USDA standards for biobased materials content. The following exemptions may apply to the non-procurement of biobased content materials:

1) The product does not meet appropriate performance standards;
2) The product is not available within a reasonable time frame;
3) The product is not available competitively (from two or more sources);
4) The product is only available at an unreasonable price (compared with a comparable bio-based content product)."

PART 3 EXECUTION

3.1 AS-BUILT DRAWINGS

Provide and maintain two black line print copies of the PDF contract drawings for As-Built Drawings. At a minimum of 30 days prior to Beneficial Occupancy Date (BOD), certify both sets of as-built drawings as correct, sign, and submit the As-Built Drawings for Contracting Officer approval. Include corrected Construction contract specifications.

3.1.1 Markup Guidelines

Make comments and markup the drawings complete without reference to letters, memos, or materials that are not part of the As-Built drawing. Show what was changed, how it was changed, where item(s) were relocated and change related details. These working as-built markup prints must be neat, legible and accurate as follows:

a. Use base colors of red, green, and blue. Color code for changes as follows:

   (1) Special (Blue) - Items requiring special information, coordination, or special detailing or detailing notes.

   (2) Deletions (Red) - Over-strike deleted graphic items (lines), lettering in notes and leaders.

   (3) Additions (Green) - Added items, lettering in notes and leaders.

b. Provide a legend if colors other than the "base" colors of red, green, and blue are used.

c. Add and denote any additional equipment or material facilities, service lines, incorporated under As-Built Revisions if not already shown in legend.

d. Use frequent written explanations on markup drawings to describe

changes. Do not totally rely on graphic means to convey the revision.

e. Use legible lettering and precise and clear digital values when marking prints. Clarify ambiguities concerning the nature and application of change involved.

f. Wherever a revision is made, also make changes to related section views, details, legend, profiles, plans and elevation views, schedules, notes and call out designations, and mark accordingly to avoid conflicting data on all other sheets.

g. For deletions, cross out all features, data and captions that relate to that revision.

h. For changes on small-scale drawings and in restricted areas, provide large-scale inserts, with leaders to the applicable location.

i. Indicate one of the following when attaching a print or sketch to a markup print:

   1) Add an entire drawing to contract drawings

   2) Change the contract drawing to show

   3) Provided for reference only to further detail the initial design.

j. Incorporate all shop and fabrication drawings into the markup drawings.

3.1.2 As-Built Drawings Content

Show on the as-built drawings, but not limited to, the following information:

a. The actual location, kinds and sizes of all sub-surface utility lines. In order that the location of these lines and appurtenances may be determined in the event the surface openings or indicators become covered over or obscured, show by offset dimensions to two permanently fixed surface features the end of each run including each change in direction on the record drawings. Locate valves, splice boxes and similar appurtenances by dimensioning along the utility run from a reference point. Also record the average depth below the surface of each run.

b. The location and dimensions of any changes within the building structure.

c. Layout and schematic drawings of electrical circuits and piping.

d. Correct grade, elevations, cross section, or alignment of roads, earthwork, structures or utilities if any changes were made from contract plans.

e. Changes in details of design or additional information obtained from working drawings specified to be prepared or furnished by the Contractor; including but not limited to shop drawings, fabrication, erection, installation plans and placing details, pipe sizes, insulation material, dimensions of equipment, and foundations.

f. The topography, invert elevations and grades of drainage installed or

affected as part of the project construction.

g. Changes or Revisions which result from the final inspection.

h. Where contract drawings or specifications present options, show only the option selected for construction on the working as-built markup drawings.

i. If borrow material for this project is from sources on Government property, or if Government property is used as a spoil area, furnish a contour map of the final borrow pit/spoil area elevations.

j. Systems designed or enhanced by the Contractor, such as HVAC controls, fire alarm, fire sprinkler, and irrigation systems.

k. Changes in location of equipment and architectural features.

j. Modifications (include within change order price the cost to change working as-built markup drawings to reflect modifications) and compliance with FC 1-300-09N procedures.

l. Actual location of anchors, construction and control joints, etc., in concrete.

m. Unusual or uncharted obstructions that are encountered in the contract work area during construction.

n. Location, extent, thickness, and size of stone protection particularly where it will be normally submerged by water.

3.2 RECORD DRAWINGS

Prepare and provide Record Drawings in accordance with FC 1-300-09N. Provide 2 copies of Record Drawings on two separate CDs or DVDs 30 days after BOD.

3.3 OPERATION AND MAINTENANCE MANUALS

Provide project operation and maintenance manuals as specified in Section 01 78 23 OPERATION AND MAINTENANCE MANUALS DATA. Provide four electronic copies of the Operation and Maintenance Manual files. Submit to the Contracting Officer for approval within 60 calendar days of the Beneficial Occupancy Date (BOD). Update and resubmit files for final approval at BOD. Provide one hard copy and place in cabinet in main mechanical room.

3.4 CLEANUP

Provide final cleaning in accordance with ASTM E1971 and submit two copies of the listing of completed final clean-up items. Leave premises "broom clean." Comply with GS-37 for general purpose cleaning and bathroom cleaning. Use only nonhazardous cleaning materials, including natural cleaning materials, in the final cleanup. Clean interior and exterior glass surfaces exposed to view; remove temporary labels, stains and foreign substances; polish transparent and glossy surfaces; vacuum carpeted and soft surfaces. Clean equipment and fixtures to a sanitary condition. Replace filters of operating equipment and comply with the Indoor Air Quality (IAQ) Management Plan. Clean debris from roofs, gutters, downspouts and drainage systems. Sweep paved areas and rake

clean landscaped areas. Remove waste and surplus materials, rubbish and construction facilities from the site. Recycle, salvage, and return construction and demolition waste from project.

3.5 REAL PROPERTY RECORD

Near the completion of Project, but a minimum of 60 days prior to final acceptance of the work, complete, update draft DD FORM 1354 attached to this section, and submit an accounting of all installed property with Interim DD FORM 1354. Include any additional assets, improvements, and alterations from the Draft DD FORM 1354. Contact the Contracting Officer for any project specific information necessary to complete the DD FORM 1354. Refer to UFC 1-300-08 for instruction on completing the DD FORM 1354. Attach the Real Property receiving Component's completed High Performance and Sustainable Building (HPSB) Checklist for each applicable building to the completed DD 1354. For convenience, a blank fillable PDF DD FORM 1354 may be obtained at the following link: www.esd.whs.mil/Portals/54/Documents/DD/forms/dd/dd1354.pdf

Submit the completed Checklist for DD FORM 1354 of Installed Building Equipment items. Attach this list to the updated DD FORM 1354.

3.6 FINAL APPROVED SHOP DRAWINGS

Provide 2 copies of Final Approved Shop Drawings on two separate CDs or DVDs within 30 days after BOD.

-- End of Section --

SECTION 01 78 23

OPERATION AND MAINTENANCE DATA
04/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E1971	(2005; R 2011) Standard Guide for Stewardship for the Cleaning of Commercial and Institutional Buildings

1.2 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-10 Operation and Maintenance Data

O&M Database

Training Plan

Training Outline

Training Content

SD-11 Closeout Submittals

Training Video Recording

Validation of Training Completion

1.3 OPERATION AND MAINTENANCE DATA

Submit Operation and Maintenance (O&M) Data for the provided equipment, product, or system, defining the importance of system interactions, troubleshooting, and long-term preventive operation and maintenance. Compile, prepare, and aggregate O&M data to include clarifying and updating the original sequences of operation to as-built conditions. Organize and present information in sufficient detail to clearly explain O&M requirements at the system, equipment, component, and subassembly level. Include an index preceding each submittal. Submit in accordance with this section and Section 01 33 00 SUBMITTAL PROCEDURES.

1.3.1 Package Quality

Documents must be fully legible. Operation and Maintenance data must be consistent with the manufacturer's standard brochures, schematics, printed instructions, general operating procedures, and safety precautions.

1.3.2 Package Content

Provide data package content in accordance with paragraph SCHEDULE OF OPERATION AND MAINTENANCE DATA PACKAGES. Comply with the data package requirements specified in the individual technical sections, including the content of the packages and addressing each product, component, and system designated for data package submission, except as follows. Use Data Package 3 for commissioned items without a specified data package requirement in the individual technical sections. Provide a Data Package 3 instead of Data Package 1 or 2, as specified in the individual technical section, for items that are commissioned.

1.3.3 Changes to Submittals

Provide manufacturer-originated changes or revisions to submitted data if a component of an item is so affected subsequent to acceptance of the O&M Data. Submit changes, additions, or revisions required by the Contracting Officer for final acceptance of submitted data within 30 calendar days of the notification of this change requirement.

1.3.4 Commissioning Authority Review and Approval

Submit the commissioned systems and equipment submittals to the Government's Commissioning Authority (CxA) to review for completeness and applicability. Obtain validation from the CxA that the systems and equipment provided meet the requirements of the Contract documents and design intent, particularly as they relate to functionality, energy performance, water performance, maintainability, sustainability, system cost, indoor environmental quality, and local environmental impacts. The CxA communicates deficiencies to the Contracting Officer. Submit the O&M manuals to the Contracting Officer upon a successful review of the corrections, and with the CxA recommendation for approval and acceptance of these O&M manuals. This work is in addition to the normal review procedures for O&M data.

1.4 OPERATION AND MAINTENANCE MANUAL FILE FORMAT

Assemble O&M Database data packages into electronic Operation and Maintenance Manuals. Assemble each manual into a composite electronically indexed file using the most current version of Adobe Acrobat or similar software capable of producing PDF file format. Provide compact disks (CD) or data digital versatile disk (DVD) as appropriate, so that each one contains operation, maintenance and record files, project record documents, and training videos. Include a complete electronically linked operation and maintenance directory. Place one hard copy of each in cabinet in main mechanical room.

1.4.1 Organization

Bookmark Product and Drawing Information documents using the current version of CSI Masterformat numbering system, and arrange submittals using the specification sections as a structure. Use CSI Masterformat and UFGS numbers along with descriptive bookmarked titles that explain the content of the information that is being bookmarked.

1.4.2 CD or DVD Label and Disk Holder or Case

Provide the following information on the disk label and disk holder or case:

a. Building Number

b. Project Title

c. Activity and Location

d. Construction Contract Number

e. Prepared For: (Contracting Agency)

f. Prepared By: (Name, title, phone number and email address)

g. Include the disk content on the disk label

h. Date

i. Virus scanning program used

1.5 TYPES OF INFORMATION REQUIRED IN O&M DATA PACKAGES

The following are a detailed description of the data package items listed in paragraph SCHEDULE OF OPERATION AND MAINTENANCE DATA PACKAGES.

1.5.1 Operating Instructions

Provide specific instructions, procedures, and illustrations for the following phases of operation for the installed model and features of each system:

1.5.1.1 Safety Precautions and Hazards

List personnel hazards and equipment or product safety precautions for operating conditions. List all residual hazards identified in the Activity Hazard Analysis provided under Section 01 35 26 GOVERNMENT SAFETY REQUIREMENTS. Provide recommended safeguards for each identified hazard.

1.5.1.2 Operator Prestart

Provide procedures required to install, set up, and prepare each system for use.

1.5.1.3 Startup, Shutdown, and Post-Shutdown Procedures

Provide narrative description for Startup, Shutdown and Post-shutdown operating procedures including the control sequence for each procedure.

1.5.1.4 Normal Operations

Provide Control Diagrams with data to explain operation and control of systems and specific equipment. Provide narrative description of Normal Operating Procedures.

1.5.1.5 Emergency Operations

Provide Emergency Procedures for equipment malfunctions to permit a short period of continued operation or to shut down the equipment to prevent further damage to systems and equipment. Provide Emergency Shutdown Instructions for fire, explosion, spills, or other foreseeable

contingencies. Provide guidance and procedures for emergency operation of utility systems including required valve positions, valve locations and zones or portions of systems controlled.

1.5.1.6 Operator Service Requirements

Provide instructions for services to be performed by the operator such as lubrication, adjustment, inspection, and recording gauge readings.

1.5.1.7 Environmental Conditions

Provide a list of Environmental Conditions (temperature, humidity, and other relevant data) that are best suited for the operation of each product, component or system. Describe conditions under which the item equipment should not be allowed to run.

1.5.1.8 Operating Log

Provide forms, sample logs, and instructions for maintaining necessary operating records.

1.5.1.9 Additional Requirements for HVAC Control Systems

Provide Data Package 5 and the following for control systems:

a. Narrative description on how to perform and apply functions, features, modes, and other operations, including unoccupied operation, seasonal changeover, manual operation, and alarms. Include detailed technical manual for programming and customizing control loops and algorithms.

b. Full as-built sequence of operations.

c. Copies of checkout tests and calibrations performed by the Contractor (not Cx tests).

d. Full points list. Provide a listing of rooms with the following information for each room:

(1) Floor

(2) Room number

(3) Room name

(4) Air handler unit ID

(5) Reference drawing number

(6) Air terminal unit tag ID

(7) Heating or cooling valve tag ID

(8) Minimum cfm

(9) Maximum cfm

e. Full print out of all schedules and set points after testing and acceptance of the system.

f. Full as-built print out of software program.

g. Marking of system sensors and thermostats on the as-built floor plan and mechanical drawings with their control system designations.

1.5.2 Preventive Maintenance

Provide the following information for preventive and scheduled maintenance to minimize repairs for the installed model and features of each system. Include potential environmental and indoor air quality impacts of recommended maintenance procedures and materials.

1.5.2.1 Lubrication Data

Include the following preventive maintenance lubrication data, in addition to instructions for lubrication required under paragraph OPERATOR SERVICE REQUIREMENTS:

a. A table showing recommended lubricants for specific temperature ranges and applications.

b. Charts with a schematic diagram of the equipment showing lubrication points, recommended types and grades of lubricants, and capacities.

c. A Lubrication Schedule showing service interval frequency.

1.5.2.2 Preventive Maintenance Plan, Schedule, and Procedures

Provide manufacturer's schedule for routine preventive maintenance, inspections, condition monitoring (predictive tests) and adjustments required to ensure proper and economical operation and to minimize repairs. Provide instructions stating when the systems should be retested. Provide manufacturer's projection of preventive maintenance work-hours on a daily, weekly, monthly, and annual basis including craft requirements by type of craft. For periodic calibrations, provide manufacturer's specified frequency and procedures for each separate operation.

a. Define the anticipated time required to perform each of each test (work-hours), test apparatus, number of personnel identified by responsibility, and a testing validation procedure permitting the record operation capability requirements within the schedule. Provide a remarks column for the testing validation procedure referencing operating limits of time, pressure, temperature, volume, voltage, current, acceleration, velocity, alignment, calibration, adjustments, cleaning, or special system notes. Delineate procedures for preventive maintenance, inspection, adjustment, lubrication and cleaning necessary to minimize repairs.

b. Repair requirements must inform operators how to check out, troubleshoot, repair, and replace components of the system. Include electrical and mechanical schematics and diagrams and diagnostic techniques necessary to enable operation and troubleshooting of the system after acceptance.

1.5.2.3 Cleaning Recommendations

Provide environmentally preferable cleaning recommendations in accordance with ASTM E1971.

1.5.3 Repair

Provide manufacturer's recommended procedures and instructions for correcting problems and making repairs for the installed model and features of each system. Include potential environmental and indoor air quality impacts of recommended maintenance procedures and materials.

1.5.3.1 Troubleshooting Guides and Diagnostic Techniques

Provide step-by-step procedures to promptly isolate the cause of typical malfunctions. Describe clearly why the checkout is performed and what conditions are to be sought. Identify tests or inspections and test equipment required to determine whether parts and equipment may be reused or require replacement.

1.5.3.2 Wiring Diagrams and Control Diagrams

Provide point-to-point drawings of wiring and control circuits including factory-field interfaces. Provide a complete and accurate depiction of the actual job specific wiring and control work. On diagrams, number electrical and electronic wiring and pneumatic control tubing and the terminals for each type, identically to actual installation configuration and numbering.

1.5.3.3 Repair Procedures

Provide instructions and a list of tools required to repair or restore the product or equipment to proper condition or operating standards.

1.5.3.4 Removal and Replacement Instructions

Provide step-by-step procedures and a list of required tools and supplies for removal, replacement, disassembly, and assembly of components, assemblies, subassemblies, accessories, and attachments. Provide tolerances, dimensions, settings and adjustments required. Use a combination of text and illustrations.

1.5.3.5 Spare Parts and Supply Lists

Provide lists of spare parts and supplies required for repair to ensure continued service or operation without unreasonable delays. Special consideration is required for facilities at remote locations. List spare parts and supplies that have a long lead-time to obtain.

1.5.3.6 Repair Work-Hours

Provide manufacturer's projection of repair work-hours including requirements by type of craft. Identify, and tabulate separately, repair that requires the equipment manufacturer to complete or to participate.

1.5.4 Appendices

Provide information required below and information not specified in the preceding paragraphs but pertinent to the maintenance or operation of the product or equipment. Include the following:

1.5.4.1 Product Submittal Data

Provide a copy of SD-03 Product Data submittals documented with the required approval.

1.5.4.2 Certificates

Provide a copy of SD-07 Certificates submittals documented with the required approval.

1.5.4.3 Manufacturer's Instructions

Provide a copy of SD-08 Manufacturer's Instructions submittals documented with the required approval.

1.5.4.4 O&M Submittal Data

Provide a copy of SD-10 Operation and Maintenance Data submittals documented with the required approval.

1.5.4.5 Parts Identification

Provide identification and coverage for the parts of each component, assembly, subassembly, and accessory of the end items subject to replacement. Include special hardware requirements, such as requirement to use high-strength bolts and nuts. Identify parts by make, model, serial number, and source of supply to allow reordering without further identification. Provide clear and legible illustrations, drawings, and exploded views to enable easy identification of the items. When illustrations omit the part numbers and description, both the illustrations and separate listing must show the index, reference, or key number that will cross-reference the illustrated part to the listed part. Group the parts shown in the listings by components, assemblies, and subassemblies in accordance with the manufacturer's standard practice. Parts data may cover more than one model or series of equipment, components, assemblies, subassemblies, attachments, or accessories, such as typically shown in a master parts catalog.

1.5.4.6 Warranty Information

List and explain the various warranties and clearly identify the servicing and technical precautions prescribed by the manufacturers or contract documents in order to keep warranties in force. Include warranty information for primary components of the system. Provide copies of warranties required by Section 01 78 00 CLOSEOUT SUBMITTALS.

1.5.4.7 Extended Warranty Information

List all warranties for products, equipment, components, and sub-components whose duration exceeds one year. For each warranty listed, indicate the applicable specification section, duration, start date, end date, and the point of contact for warranty fulfillment. Also, list or reference the specific operation and maintenance procedures that must be performed to keep the warranty valid. Provide copies of warranties required by Section 01 78 00 CLOSEOUT SUBMITTALS.

1.5.4.8 Personnel Training Requirements

Provide information available from the manufacturers that is needed for

use in training designated personnel to properly operate and maintain the equipment and systems.

1.5.4.9 Testing Equipment and Special Tool Information

Include information on test equipment required to perform specified tests and on special tools needed for the operation, maintenance, and repair of components. Provide final set points.

1.5.4.10 Testing and Performance Data

Include completed prefunctional checklists, functional performance test forms, and monitoring reports. Include recommended schedule for retesting and blank test forms. Provide final set points.

1.5.4.11 Field Test Reports

Provide a copy of Field Test Reports (SD-06) submittals documented with the required approval.

1.5.4.12 Contractor Information

Provide a list that includes the name, address, and telephone number of the General Contractor and each Subcontractor who installed the product or equipment, or system. For each item, also provide the name address and telephone number of the manufacturer's representative and service organization that can provide replacements most convenient to the project site. Provide the name, address, and telephone number of the product, equipment, and system manufacturers.

1.6 SCHEDULE OF OPERATION AND MAINTENANCE DATA PACKAGES

Provide the O&M data packages specified in individual technical sections. The information required in each type of data package follows:

1.6.1 Data Package 1

a. Safety precautions and hazards

b. Cleaning recommendations

c. Maintenance and repair procedures

d. Warranty information

e. Extended warranty information

f. Contractor information

g. Spare parts and supply list

1.6.2 Data Package 2

a. Safety precautions and hazards

b. Normal operations

c. Environmental conditions

d. Lubrication data

e. Preventive maintenance plan, schedule, and procedures

f. Cleaning recommendations

g. Maintenance and repair procedures

h. Removal and replacement instructions

i. Spare parts and supply list

j. Parts identification

k. Warranty information

l. Extended warranty information

m. Contractor information

1.6.3 Data Package 3

a. Safety precautions and hazards

b. Operator prestart

c. Startup, shutdown, and post-shutdown procedures

d. Normal operations

e. Emergency operations

f. Environmental conditions

g. Operating log

h. Lubrication data

i. Preventive maintenance plan, schedule, and procedures

j. Cleaning recommendations

k. Troubleshooting guides and diagnostic techniques

l. Wiring diagrams and control diagrams

m. Maintenance and repair procedures

n. Removal and replacement instructions

o. Spare parts and supply list

p. Product submittal data

q. O&M submittal data

r. Parts identification

s. Warranty information

t. Extended warranty information

u. Testing equipment and special tool information

v. Testing and performance data

w. Contractor information

x. Field test reports

1.6.4 Data Package 4

a. Safety precautions and hazards

b. Operator prestart

c. Startup, shutdown, and post-shutdown procedures

d. Normal operations

e. Emergency operations

f. Operator service requirements

g. Environmental conditions

h. Operating log

i. Lubrication data

j. Preventive maintenance plan, schedule, and procedures

k. Cleaning recommendations

l. Troubleshooting guides and diagnostic techniques

m. Wiring diagrams and control diagrams

n. Repair procedures

o. Removal and replacement instructions

p. Spare parts and supply list

q. Repair work-hours

r. Product submittal data

s. O&M submittal data

t. Parts identification

u. Warranty information

v. Extended warranty information

w. Personnel training requirements

x. Testing equipment and special tool information

y. Testing and performance data

z. Contractor information

aa. Field test reports

1.6.5 Data Package 5

a. Safety precautions and hazards

b. Operator prestart

c. Start-up, shutdown, and post-shutdown procedures

d. Normal operations

e. Environmental conditions

f. Preventive maintenance plan, schedule, and procedures

g. Troubleshooting guides and diagnostic techniques

h. Wiring and control diagrams

i. Maintenance and repair procedures

j. Removal and replacement instructions

k. Spare parts and supply list

l. Product submittal data

m. Manufacturer's instructions

n. O&M submittal data

o. Parts identification

p. Testing equipment and special tool information

q. Warranty information

r. Extended warranty information

s. Testing and performance data

t. Contractor information

u. Field test reports

v. Additional requirements for HVAC control systems

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

3.1 TRAINING

Prior to acceptance of the facility by the Contracting Officer for Beneficial Occupancy, provide comprehensive training for the systems and equipment specified in the technical specifications. The training must be targeted for the Facilities Management Specialist, building maintenance personnel, and applicable building occupants. Instructors must be well-versed in the particular systems that they are presenting. Address aspects of the eOMSI Manual, as submitted in Section 01 78 24.00 20 FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI). Training must include classroom or field lectures based on the system operating requirements. The location of classroom training requires approval by the Contracting Officer.

3.1.1 Training Plan

Submit a written training plan to the Contracting Officer for approval at least 60 calendar days prior to the scheduled training. Training plan must be approved by the Government's Commisioning Authority (CxA) prior to forwarding to the Contracting Officer. Also, coordinate the training schedule with the Contracting Officer and CxA. Include within the plan the following elements:

a. Equipment included in training

b. Intended audience

c. Location of training

d. Dates of training

e. Objectives

f. Outline of the information to be presented and subjects covered including description

g. Start and finish times and duration of training on each subject

h. Methods (e.g. classroom lecture, video, site walk-through, actual operational demonstrations, written handouts)

i. Instructor names and instructor qualifications for each subject

j. List of texts and other materials to be furnished by the Contractor that are required to support training

k. Description of proposed software to be used for video recording of training sessions.

3.1.2 Training Content

The core of this training must be based on manufacturer's recommendations and the operation and maintenance information. The CxA is responsible for overseeing and approving the content and adequacy of the training. Provide a brief summary of the FACILITY INFORMATION manual, and a more detailed presentation of the PRODUCT AND DRAWING MANUAL, specified in Section 01 78 24.00 20 FACILITY ELECTRONIC OPERATION AND MAINTENANCE

SUPPORT INFORMATION (eOMSI). Spend 95 percent of the instruction time during the presentation on the OPERATION AND MAINTENANCE DATA. Include the following for each system training presentation:

a. Start-up, normal operation, shutdown, unoccupied operation, seasonal changeover, manual operation, controls set-up and programming, troubleshooting, and alarms.

b. Relevant health and safety issues.

c. Discussion of how the feature or system is environmentally responsive. Advise adjustments and optimizing methods for energy conservation.

d. Design intent.

e. Use of O&M Manual Files.

f. Review of control drawings and schematics.

g. Interactions with other systems.

h. Special maintenance and replacement sources.

i. Tenant interaction issues.

3.1.3 Training Outline

Provide the eOMSI Manual files as specified in Section 01 78 24.00 20, FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI), and a written course outline listing the major and minor topics to be discussed by the instructor on each day of the course to each trainee in the course. Provide the course outline 14 calendar days prior to the training.

3.1.4 Training Video Recording

Record classroom training session(s) on video. Provide to the Contracting Officer two copies of the training session(s) in DVD video recording format. Capture within the recording, in video and audio, the instructors' training presentations including question and answer periods with the attendees. The recording camera(s) must be attended by a person during the recording sessions to assure proper size of exhibits and projections during the recording are visible and readable when viewed as training.

3.1.5 Unresolved Questions from Attendees

If, at the end of the training course, there are questions from attendees that remain unresolved, the instructor must send the answers, in writing, to the Contracting Officer for transmittal to the attendees, and the training video must be modified to include the appropriate clarifications.

3.1.6 Validation of Training Completion

Ensure that each attendee at each training session signs a class roster daily to confirm Government participation in the training. At the completion of training, submit a signed validation letter that includes a sample record of training for reporting what systems were included in the

training, who provided the training, when and where the training was performed, and copies of the signed class rosters. Provide two copies of the validation to the Contracting Officer, and one copy to the Operation and Maintenance Manual Preparer for inclusion into the Manual's documentation.

3.1.7 Quality Control Coordination

Coordinate this training with the CxA in accordance with Section 01 45 00.05 20 DESIGN AND CONSTRUCTION QUALITY CONTROL FOR DESIGN-BUILD.

-- End of Section --

SECTION 01 78 24.00 20

FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI)
03/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. DEPARTMENT OF DEFENSE (DOD)

FC 1-300-09N	(2014; with Change 4) Navy and Marine Corps Design Procedures

1.2 DEFINITIONS AND ABBREVIATIONS

1.2.1 eOMSI Manual

Manual (PDF file) provided by the Contractor that includes, but is not limited to, product information, a facility description with photos, and a list of primary facility systems.

1.2.2 Systems

The words "system", "systems", and "equipment", when used in this document refer to as-built systems and equipment.

1.2.3 Computer Assisted Design and Drafting (CADD)

Electronic Computer Assisted Design and Drafting graphic software program that is used to create facility design contract documents and Record Drawings.

1.2.4 KTR

An abbreviation for "Contractor."

1.3 EOMSI MEETINGS

1.3.1

Be prepared to discuss the following during this meeting:

a. eOMSI Manual Development Meetings

b. Processes and methods of gathering eOMSI Manual information during construction.

c. The eOMSI Submittals schedule. Include the eOMSI submittal schedule on the Baseline Construction Schedule.

1.3.2 eOMSI Manual Coordination Meeting

Facilitate a meeting after the Post-Award Kickoff Meeting prior to the

submission of the eOMSI Progress Submittal. Meeting attendance must include the Contractor's eOMSI Manual Preparer, and Quality Control Manager, and the Government's Design Manager (DM), Contracting Officer's Representative, and NAVFAC Public Works (PW) Facilities Management Division (FMD). Include any Mechanical, Electrical, and Fire Protection Sub-Contractors.

The purpose of this meeting is to reach a mutual understanding of the scope of work concerning the contract requirements for eOMSI and coordinate the efforts necessary by both the Government and Contractor to ensure an accurate collection, preparation and timely Government review of eOMSI.

1.3.3 Facility Turnover Meeting

Include eOMSI in NAVFAC Red Zone (NRZ) facility turnover meetings as specified in Section 01 30 00, ADMINISTRATIVE REQUIREMENTS.

1.4 SUBMITTAL SCHEDULING

1.4.1 eOMSI, Progress Submittal

Submit the Progress submittal when construction is approximately 50 percent complete, to the Contracting Officer for approval. Provide eOMSI Manual Files (Bookmarked PDF). Include the elements and portions of system construction completed up to this point.

The purpose of this submittal is to verify progress is in accordance with contract requirements as discussed during the eOMSI Coordination Meeting. Field verify a portion of the eOMSI information in accordance with paragraph FIELD VERIFICATION.

1.4.2 eOMSI, Prefinal Submittal

Submit the 100 percent submittal of the eOMSI Prefinal Submittal to the Contracting Officer for approval within 90 calendar days of the Beneficial Occupancy Date (BOD). This submittal must provide a complete, working document that can be used to operate and maintain the facility. Any portion of the submittal that is incomplete or inaccurate requires the entire submittal to be returned for correction. Any discrepancies discovered during the Government's review of eOMSI Progress submittal must be corrected prior to the Prefinal submission.

The eOMSI Prefinal Submittal must include eOMSI Manual Files (Bookmarked PDF).

1.4.3 eOMSI, Final Submittal

Submit completed eOMSI Manual Files (Bookmarked PDF). The Final submittal is due at BOD. Any discrepancies discovered during the Government's review of the Prefinal eOMSI submittal, including the Field Verification, must be corrected prior to the Final eOMSI submission.

1.5 UNITS OF MEASURE

Provide eOMSI utilizing the English Inch-Pound units of measure

1.6 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-11 Closeout Submittals

eOMSI, Progress Submittal; G

eOMSI, Prefinal Submittal; G

eOMSI, Final Submittal; G

PART 2 PRODUCTS

2.1 eOMSI FILES FORMAT

Format eOMSI manuals and files in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA. Include a complete electronically linked operation and maintenance directory. Provide four electronic copies of the eOMSI Manuals to the Contracting Officer for approval.

Scan eOMSI Manuals and Files for viruses, malware, and spyware using a commercially available scanning program that is routinely updated to identify and remove current virus threats. Provide one hard copy of eOMSI Manuals and Files in the cabinet in the main mechanical room.

2.1.1 eOMSI Manual Organization

Organize the eOMSI Manuals into two parts: 1) Product and Drawing Information, and 2) Facility Information. Bookmark the PDF files for easy access to the information.

a. Bookmark Product and Drawing Information documents in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

b. Bookmark Facility Information to at least one level lower than the major system.

2.1.2 eOMSI Manual CD or DVD Disk Label and Disk Holder or Case

Provide disks in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA. At a minimum, provide four (4) disks and place one hard copy of all O&M Data in the cabinet in the main mechanical room.

2.2 eOMSI MANUAL

2.2.1 Product and Drawing Information

Provide an organized record of the facility products, materials, equipment, and minimum information necessary to operate the facility. Provide Product and Drawing Information for the systems in the final constructed facility.

2.2.1.1 O&M Data

As a minimum, provide the approved O&M Data, submitted in the technical specification sections, in accordance with paragraph TYPES OF INFORMATION REQUIRED IN O&M DATA PACKAGES in Section 01 78 23 OPERATION AND

MAINTENANCE DATA.

2.2.1.2 Record Drawings

Provide an electronic, PDF copy of the Record Drawings, prepared in accordance with FC 1-300-09N and 01 78 00 CLOSEOUT SUBMITTALS. Bookmark drawings using the sheet title and sheet number.

Include Record Drawings as part of the Red-Zone specified in Section 01 30 00 ADMINISTRATIVE REQUIREMENTS.

2.2.1.3 Utility Record Drawings

Using Record Source Drawings, show and document details of the actual installation of the utility systems; annotate and highlight the eOMSI information. Provide Utility Record Drawings in PDF format. Provide the following drawings at a large enough scale to differentiate designated isolation units from surrounding valves and switches.

a. Utility Schematic Diagrams - Provide a one line schematic diagram for each utility system such as power, water, wastewater, and gas/fuel. Schematic diagram must show from the point where the utility line is connected to the mainline up to the five-foot connection point to the facility. Indicate location or area designation for route of transmission or distribution lines; locations of duct banks, manholes/ handholes or poles; isolation units such as valves and switches; and utility facilities such as pump stations, lift stations, and substations.

b. Enlarged Connection and Cutoff Plans - Provide enlarged floor plans that provide information between the five foot utility connection point and where utilities connect to facility distribution. Enlarge floor plans/ elevations of the rooms where the utility enters the building and indicate on these plans locations of the main interior and exterior connection and cutoff points for the utilities. Also enlarge floor plans / elevations of the rooms where equipment is located. Include enough information to enable someone unfamiliar with the facility to locate the connection and cutoff points. Indicate designations such as room number, panel number, circuit breaker, or valve number, of each utility and equipment connection and cutoff point, and what that connection and cutoff point controls.

2.2.2 Facility Information

Provide the following in Facility Information:

2.2.2.1 General Facility and System Description

Describe the function of the facility. Detail the overall dimensions of the facility, number of floors, foundation type, expected number of occupants, and facility Category Code. List and generally describe all the facility systems and any special building features (for example, HVAC Controls, Sprinkler Systems, Cranes, Elevators, and Generators). Include photographs marked up and labeled to show key operating components and the overall facility appearance.

2.2.2.2 Floor Plans

Provide uncluttered, legible 11 by 17 inches floor plans. Include room

numbers, type or function of spaces, and overall facility dimensions on the floor plans. Do not include items such as construction instructions, references, or frame numbers.

2.2.2.3 Floor Coverings, Wall Surfaces, and Ceiling Surfaces

Provide a table that lists by room number (including hallways and common spaces), the type, and area of finish, manufacturer's product name, identifying number, and color. Include a facility summary of the total area for each type of space and floor, wall, or ceiling finish in the table.

2.2.2.4 Windows

Provide a table that lists by room number (including hallways and common spaces), the type of window, window size, number of each size and type, special features, manufacturer's product name, identifying number, and color. The table must include a facility summary of the total number for each type and size of window.

2.2.2.5 Roofing

Provide the total area of each type of roof surface and system. Provide the name of the roofing product and system; manufacturer's, supplier's, and installer's names, addresses, and phone numbers; manufacturer's product name, identifying number, and color. For each type of roof, provide a recommended inspection, maintenance and repair schedule that details checkpoints, frequencies, and prohibited practices. List roof structural load limits.

2.2.2.6 HVAC Filters

Provide a table that lists the quantity, type, size, and location of each HVAC filter, manufacturer's product name, and identifying number.

2.2.2.7 Plumbing Fixtures

Provide a table that lists by room number, the number and type of plumbing and bathroom plumbing fixtures (for example, sinks, water closets, urinals, showers and drinking fountains).

2.2.2.8 Lighting Fixtures

Provide a table that lists by room number (including hallways and common spaces), the type of lighting fixture, ballast, number of lighting fixtures, type of lamps and number of lamps, and the manufacturer's product name and the identifying number. The table must include a facility summary of the total number of fixtures of each type and number of lamps of each type.

2.2.2.9 Equipment Listing

Provide a table that lists the major equipment shown on the design equipment schedules. Show the item descriptions, locations, model numbers; and the names, addresses, and telephone numbers of the manufacturers, suppliers, contractors, and subcontractors.

2.2.2.10 System Flow Diagrams

Provide a flow diagram indicating system liquid, air or gas flow during normal operations. Integrate the system components into the diagram. A compilation of non-integrated, flow diagrams for the individual system components are not acceptable.

2.2.2.11 Valve List

Provide a list of all valves associated with the system. Show valve type, identification number, function, location and normal operating position.

2.2.2.12 Riser Diagrams

Provide riser diagrams and settings of equipment.

PART 3 EXECUTION

3.1 FIELD VERIFICATION

Field verify eOMSI Maximo and Warranty Binder information with Contractor and Government personnel. Include the following personnel in this meeting: Contractor's eOMSI Manual and Quality Control Manager, and the Government's Contracting Officer's Representative and NAVFAC PW FMD. Request, and provide, an eOMSI Field Verification Meeting no sooner than 14 calendar days after submission of the Progress eOMSI submittal, and another, no sooner than 14 calendar days after submission of the initial TAB report.

100 percent accuracy of eOMSI Maximo and Warranty Binder information is required for successful field verification.

3.2 eOMSI TRAINING

Provide training on eOMSI Manuals in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

-- End of Section --

SECTION 01 78 30.00 22

GIS DATA DELIVERABLES

5/22

PART 1 GENERAL

1.1 OBJECTIVE

The primary objective of this section is to provide detailed specifications for collection and delivery of geospatial data commonly referred to as Geographic Information System (GIS) data. Additionally, this section shall provide guidance to ensure that all GIS data delivered is compatible and will add value to the Marine Corps Base (MCB) Camp Lejeune Installation Geospatial Information and Services (IGI&S) GEOdatabase.

Failure to comply with the specifications outlined in this document will result in non-acceptance of data deliverables.

1.1.1 Point of Contact for MCB Camp Lejeune

The Points of Contact (POC) for assistance in preparation of GIS deliverables are as follows:

Resident Officer In Charge Of Construction
Construction Manager (CM)
1005 Michael Drive
Camp Lejeune, NC 28547-2521
(910) 451-2581 (Main Number)

Public Works Assigned
GIS Data Manager
1005 Michael Road
Camp Lejeune, NC 28547-2521
(910) 000-0000 ext 0000 TBD
Lejeune_PWD_GIS@usmc.mil

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-11 Closeout Submittals

GIS Data Deliverables

1.3 GOVERNMENT GEOSPATIAL DATA, SCHEMA, AND DOMAINS

Geo-spatial data is based on the Spatial Data Standards for Facilities, Infrastructure and Environment (SDSFIE) GEOFidelis Data Model. Because there are recurring business driven modifications and or adaptations within the SDSFIE schema, provide all spatial and non-spatial data in the most current version by the USMC utilized at the time of delivery.

1.3.1 Data Request Package Requirements

Request the existing GIS Data, Schema and Domain Properties by utilizing a Data Request Package (DRP), which is supplied via the government sponsor.

a. The DRP should be submitted prior to the start of data collection

efforts and again 4 weeks prior to data delivery to ensure that GIS data has been created and will be delivered utilizing the most up to date SDSFIE schema.

1.3.1.1 Instruction for submitting a Geospatial DRP to the CM or the Project Manager (PM)

a. Each CM or PM will provide DRP forms upon request from the contractor. Complete the request and include all information as instructed on the data request form.

b. Request only GIS data, schema and domains for feature classes that are relevant to the contract and within the boundary of project area and provide justifications as necessary.

c. Attach the Scope of Work, which is defined by this GIS DATA DELIVERABLES section for each DPR submittal.

d. Return the DRP to the CM or PM for sponsorship and submittal as instructed with required attachments and justifications for submittal.

e. Incomplete forms may delay receipt of the requested GIS data.

f. GIS data deliverables do not supplement or replace as-built drawings.

1.3.2 Data Collection and Utility Locates

a. Utilize the most up to date SDSFIE Schema when delivering GIS Data.

b. Prior to GPS efforts all underground utilities are to be located utilizing a utility locating service in order to obtain and verify accurate feature locations.

c. Actual conditions in the field always supersede drawings. Locate and field verify all features to ensure location is correctly recorded.

d. Data will be created to represent the real world, for example, water, sewer, and transportations systems will be connected. All segments will be created from source to sink in the direction of flow.

e. Research may be required to collect data. Verification of existing data which is located in the Technical Records in the Public Works Department at 1005 Michael Street, MCB Camp Lejeune.

f. Infrastructure data, as identified in paragraph "ATTRIBUTE DATA COLLECTION AND GPS REQUIREMENTS FOR SPECIFIC FEATURES" may be collected utilizing Sub-Foot or better GPS data collection methods.

g. Utility data, as identified in paragraph "ATTRIBUTE DATA COLLECTION AND GPS REQUIREMENTS FOR SPECIFIC FEATURES" will be collected utilizing Survey Grade GPS data collection methods.

1.3.3 Attribute Data Requirements

a. All attributes will be populated in accordance with paragraph ATTRIBUTE DATA COLLECTION AND GPS REQUIREMENTS FOR SPECIFIC FEATURES and will be obtained via contract specifications, plans and record drawings.

b. Demolished / Removed Real Property data will be captured, attributed and delivered in the Disposal feature classes which include Disposal Facility Area, Disposal Facility Line and Disposal Facility Point.

c. Demolished / Removed UTILITY data will be captured, attributed and delivered by creating a new feature class which will consists of adding DEMO to the feature's naming convention for each feature, such as, but not limited to the following examples; DEMO.WastUtilNode_SPump (point), DEMO.Feat_SwRetentionBasinArea,(polygon), and DEMO.WastUtilSegment (polyline)

   1. The Contractor will be responsible for properly delivering demolished features with the current attributes associated with the feature and additionally updating the new contract number, date of demolishment, and optional status.

d. Spatial and non-spatial data may be copied from existing data, with the exception of specific attributes. Potable water wells are an exception to this rule and shall remain in the feature class and attributed as Removed or AIP.

e. Abandoned In Place (AIP) utility lines will be located and updated in the current feature data set and be attributed as AIP as required.

1.3.4 GIS Topology Rules for Geospatial Data

All data must be created using GIS topology rules for polygons, points and lines, such as, but not limited to the following examples:

a. Utility and transportation systems will be created from source to sink.

b. All utilities shall be drawn in the direction of flow with no breaks in polyline except for fittings, manholes and other features nodes within the feature Dataset.

c. All utility or infrastructure system data, which is, but is not limited to, transportation system and electrical, water, thermal distribution, and wastewater collection, etc., will be created using GIS spatial connectivity rules which specify that vertex, edge and endpoints be snapped to features within the system.

d. All polygons will be closed without slivers and be topologically correct.

e. All polylines will be topologically correct, and should be connected to avoid undershoots, overshoots and dangles and will cross only if they share a point in common, at least one of which is not an endpoint.

f. For all Polygons, Polylines and points rules; please reference illustrating topology rules in ArcGIS at www.esri.com.

1.3.5 Global Positioning System (GPS) Data Collection

Utilize field survey GPS data collected by means of non-recreational GPS equipment

a. Only bench marks included in the North Carolina Geodetic Survey Base Station Network are to be used for GPS data collection.

b. Mission planning is essential. Utilize the best Position Dilution of Precision (PDOP) values for data accuracy.

c. Mission planning for GPS collection should be conducted when positional dilution of precision (PDOP) value is 4 or less.

d. Spatial accuracy requirements

1. Survey and Sub-Foot GPS grade data collection requirements are as follows:

i. Sub-Foot requirements:

1) All points shall be within plus or minus 12 inches

2) 95 percent accuracy rate for all points.

ii. Survey Grade requirements:

1) All points shall be within plus or minus 1 centimeter

2) 98 percent accuracy rate for all points

e. Make every effort to capture feature locations without using Offsets. All Offsets will be noted in the Final Report for each feature. Deliver report in PDF format.

1. Resubmittal of data will be required if PDOP planning was not observed per this specification.

1.3.6 Coordinate System Requirements

The data must be collected in the following Spatial Reference / Coordinate System for each feature for all MCB Camp Lejeune and surrounding bases:

1. Transverse Mercator (UTM) Zone 18N

a. GRS 1980 spheroid

b. North American Datum 1983 (NAD83) horizontal datum

c. North American Vertical Datum 1988 (NAVD88) vertical datum.

2. Domain precision of 1000 which will result in a database accuracy of 1/1000 m

1.3.7 Formats and Version Guidelines

All data deliverables shall be presented in the following formats and/or versions.

a. GIS data will be provided in an ArcGIS 10.8 or higher if a higher version is being used by the Government at the time of this project. Verify the ArcGIS version, via the CM or PM at the commencement of this contract.

b. Microsoft Windows 10 operating system, unless otherwise approved by the Government.

c. All reports and maps will be delivered as a hard copy and in a searchable Adobe Portable Document Format (PDF).

1.3.8 GIS Deliverable Submittal Requirements

All GIS Submittals will be submitted to the CM or PM and then analyzed by Government GIS personnel prior to final approval. Failure to comply with the specifications outlined in this document will result in non-acceptance of GIS data deliverables.

a. Prior to any spatial and non-spatial development, provide the Government with a technical approach document, in PDF format, for review and approval. The Technical Approach document will describe in detail the Contractor's technical approach for developing GIS data to include utility locating, collecting, and attributing all GIS data.

b. Provide a GIS deliverable at the end of each phase and at each Beneficial Occupancy Date (BOD) when contracted efforts, studies or construction are delivered in phases.

c. To ensure specifications compliance and quality a preliminary GIS deliverable shall be provided for review when 25 percent of the data has been collected and updated according to this specification.

d. Deliver digital geographic maps, GPS collection files and related data. All working text and documents and personal geodatabase will be included for review in the draft and final delivery of data in PDF format.

e. Do not deliver blank unused schema or feature class data with no attributes. Deliver only data pertinent to the contract that adds value to the Geodatabase per this section.

f. Do not include existing data in the GIS deliverable.

g. Spatial and non-spatial GIS data must be provided in a format that does not require translation or pre/post processing.

h. It is the Contractor's responsibility to perform quality assurance for all data and related materials required in this section prior to submitting product to the Government.

i. The data will be analyzed for discrepancies in subject content, correct format in accordance with this statement of work, and compatibility with the existing SDSFIE Schema as well as all other specifications included in this section.

1.3.9 GIS Deliverable Package Requirements

All reports must be provided in pdf format. Each GIS deliverable must contain the following information and be in the most up to date SDSFIE format utilized by the USMC at the time of delivery.

a. Digital and Paper Maps.

1. All maps of GIS DATA DELIVERABLES will be ANSI C size.

2. Each map will include a project title, contract number, scale, legend, standard symbology, attributes, i.e., building numbers,

road names, etc.

3. All utilities will be labeled with direction of flow and segment line size.

4. Provide paper copy and pdf copies of Maps for project.

5. Provide a copy of all red-line construction drawings in pdf format.

6. Communication data will be provided on a separate map.

b. Provide all spatial and non-spatial data for review and acceptance.

c. Provide a report of specific procedures, list GPS equipment, software and versions that were utilized for the GPS data collection and creation of geospatial data.

d. Submit all GPS data files collected in the field.

e. Provide details on any offsets to include justification as to why offsets were utilized and which features and or points offsets were used.

f. Provide the source that was utilized for required attributes, such as redlines drawings and or field notes.

g. Summit DD form 1354, Transfer and Acceptance of DOD Real Property.

h. Provide a coversheet that specifies the CM / PM, contract number, contract title, point of contract for GIS related questions.

i. All geospatial data, pdf reports, spreadsheet, database files, reports, and maps will be submitted on a Digital Versatile Disc (DVD) platform.

j. Failure to comply will result in non – compliance and rejection of data.

1.3.10 Ownership

All digital files, hardcopy products, GPS raw data, source data acquired for this project, and related materials, including that furnished by the Government, will become the property of the Government and will not be issued, posted, distributed, or published by the Contractor. All documentation will be delivered in the final delivery.

Note: No endorsement of software or hardware is implied.

1.4 ATTRIBUTE DATA COLLECTION AND GPS REQUIREMENTS FOR REAL PROPERTY AND OTHER MISCELLANEOUS FEATURES THAT ARE NOT CONSIDERED A UTILITY

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required. Items in this section that require Survey Grade GPS are property identified in the feature class description.

1.4.1 Feature Dataset CLJN.CL.AccessControl

Locate, GPS and collect attribute data as specified for each feature listed with GPS accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.AccessControlPoint (point) -The location of a feature, manned or unmanned, intended to selectively restrict entrance to or use of a place or other resource.

a) accessControlType - The type of access control. Domain values, i.e., gate, tireShedder, barricade, etc.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) gatePurposeType - Purpose that the gate exists and functions under. Domain values i.e., decorative, insternalSecurity, perimaterSecurity, recreation, residential, safely, vehicleBarrier, other, etc.
h) gateTypeMaterial - The type of material of the gate. Domain values i.e., metal, steel, wood, wroughtiron, etc.
i) isBaseEntryPoint -The Yes / No indicator of whether or not the location is an entry point for the military installation.
j) isCheckpoint - Indicator if location is where officials check vehicle contents or personnel. Yes / No
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) isManned - Yes / No
n) isRangeAccess - Yes / No
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.AccessControlLine (polyline) - The location of a feature, manned or unmanned, intended to selectively restrict entrance to or use of a place or other resource.

a) accessControlTypeThe type of access control. Domain AccessControlType
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber- The contract number associated with the feature.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review

current data for common name)

g) gatePurposeType- - Purpose that the gate exists and functions under. Domain values i.e., decorative, insternalSecurity, perimaterSecurity, recreation, residential, safely, vehicleBarrier, other, etc.
h) gateTypeMaterial - The type of material of the gate. Domain values i.e., metal, steel, wood, wroughtiron, etc.
i) gateUse - The type of a gate (or similar route barrier) based on its intended use.
j) medialD - gpsDataCollected
k) MetadataId - metaID000072
l) isBaseEntryPoint - Yes / No
m) isCheckpoint - Yes / No
n) isManned - Yes / No
o) isRangeAccess - Yes / No
p) operationalStatus- The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.BarricadePoint (point) - The coordinated series of obstacles designed or employed to channel, direct, restrict, delay, or stop the movement of personnel, equipment, or an opposing force and to impose additional losses in personnel, time, and equipment on the opposing force. Barricades can exist naturally, be man-made, or a combination of both.

a) accessControlType - The type of access control. Domain values, i.e., gate, tireShedder, barricade, etc.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) barricadeType -The type of barricade. Domain values i.e., bollard, bollardPipe, pedestrianBarrier, other, etc.
h) barricadeUse - The intended use of the barricade Domain values i.e., pedestrianTraffic, security, vehicularTraffic, etc.
i) gatePurposeType - Purpose that the gate exists and functions under. Domain values i.e., internalSecurity, perimeterSecurity, recreation, residential, safety, vechicleBarrier, etc.
j) gateTypeMaterial - The type of material of the gate. Domain values i.e., metal, steel, wood, wroughtiron, etc.
k) gateUse - The type of a gate (or similar route barrier) based on its intended use.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.BarricadeLine (polyline) - The coordinated series of obstacles designed or employed to channel, direct, restrict, delay, or stop the movement of personnel, equipment, or an opposing force and to impose additional losses in personnel, time, and equipment on the opposing

force. Barricades can exist naturally, be man-made, or a combination of both.

a) accessControlType - The type of access control. Domain values, i.e., gate, tireShedder, barricade, etc.
b) barricadeUse - The intended use of the barricade Domain values i.e., pedestrianTraffic, security, vehicularTraffic, etc.
c) builtDate - The calendar date on which the original construction was completed for a facility.
d) contractNumber - The contract number associated with the feature.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) gatePurposeType - Purpose that the gate exists and functions under. Domain values i.e., internalSecurity,
i) perimeterSecurity, recreation, residential, safety, vechicleBarrier, etc.
j) mediald - gpsDataCollected
k) l) MetadataId - metaID000072
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) gateTypeMaterial - The type of material of the gate. Domain values i.e., metal, steel, wood, wroughtiron, etc.

1.4.2 Feature Dataset CLJN.CL.CivilWorks

Locate, GPS and collect attribute data as specified for each feature listed with GPS accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.PitOrQuarry (Polygon) - The location where material has been or is being excavated or extracted for use at another location.

a) featureDescription - The narrative describing the feature. (Review current data for description)
b) featureName - The common name of the feature. (Review current data for common name)
c) contractNumber - The contract number associated with the feature.
d) mediald - gpsDataCollected
e) MetadataId -metaID000072
f) isWaterFilled - Yes / No
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

1.4.3 Feature Dataset CLJN.CL.HarbourArea

Locate, GPS and collect attribute data as specified for each feature listed with GPS accuracy as described in paragraph "Global Positioning

System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.BoatRampPoint - (Point) - The partially submerged hard surfaced or non-hardsurface structure on a shoreline for launching or retrieving vessels or vehicles.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) isLighted - Yes / No
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.DockOrWharf (Polygon) - The location of a manmade water-land interface structure often used for access to boats, ships, or barges.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) dockType - The kind or type of the dock. Domain values i.e., access ramp, pier, slipway, general, etc.
d) dockUseType - The predominant use. Domain values i.e., fishing, fueling, loading, staging, etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) materialType - The material composition of the feature. Domain values i.e., concrete, steel, wood, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.

CLJN.CL.MarineNavigationAid (Point) - The physical object that serves as an aid to navigation. *Requires Survey Grade GPS.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the

feature.

c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
g) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
h) isLighted - Yes / No
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) navaidType - Type of the navaid. Domain value i.e., buoyMarkerDangerPoint, buoyMarkerDangerPoint etc.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, closed, abandoned, etc.

1.4.4 Feature Dataset CLJN.CL.RealProperty

Locate, GPS and collect attribute data as specified for each feature listed with GPS accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

Specific instruction for all Disposal polygons, polylines and points. All demolished or removed property shall be accounted for in the following 3 disposal features. A simple copy and paste with the following exceptions as explains in the disposal area, polyline and point may be permitted with the exception of the directions for attribution for each feature as noted. However, under no circumstance should potable water wells be removed from their original feature class. Potable wells are never deleted from their main feature, all that is required is the water wells are attributed in such a way that indicated if they are abandoned in Place (AIP) or Removed.

CLJN.CL.Disposal_FacilityArea (polygon)- The location of a facility asset in the DoD real property inventory for which a disposal action is being or has been taken to physically demolish, remove, or release the DoD of accountability for and control of the asset.

a) abandonedDate - The date the feature was abandoned. Leave blank if removed.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature demolishment or abandonment.
d) ClassType - Population is contingent only if data is currently available for feature.
e) disposalCompletionDate - The actual calendar date of the disposal or abandonment of the asset.
f) facilityNumber - Asset Identification such as building or structure number.
g) featureDescription -Population is contingent only if data is

currently available for feature.
h) featureName (Mandatory) - Feature Name and subtype
i) facilityIdfk - Population is contingent only if data is currently available for feature.
j) operationalStatus - The state of usability of the feature. Domain values i.e., removed, abandoned, etc.
k) owner - Population is contingent only if data is currently available for feature.
l) removedDate - The date the feature was removed. Leave blank if abandoned.
m) realPropertyJurisdictionType - Population is contingent only if data is currently available for feature.
n) registryIdentifier - Population is contingent only if data is currently available for feature.
o) sourceFeatureClass (Mandatory) - The feature class containing the polygon feature.

CLJN.CL.Disposal_FacilityLine (polyline) - The location of a personal property asset in the DoD real property inventory for which a disposal action is being or has been taken to physically demolish, remove, or release the DoD of accountability for and control of the asset.

a) abandonedDate - The date the feature was abandoned. Leave blank if removed.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature demolishment or abandoned.
d) classType - Population is contingent only if data is currently available for feature.
e) disposalCompletionDate - The actual calendar date of the disposal or abandonment of the asset.
f) facilityNumber - Asset Identification RoadName, fence, utility line, fence gate information, etc.
g) featureDescription - Population is contingent only if data is currently available for feature.
h) featureName (Mandatory) - Feature Name and subtype
i) operationalStatus - The state of usability of the feature. Domain values i.e., removed, abandoned, etc.
j) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
k) removedDate - The date the feature was removed. Leave blank if abandoned.
l) realPropertyJurisdictionType - The type of real property jurisdiction. Domain values i.e., tbd, etc.
m) registryIdentifier - Population is contingent only if data is currently available for feature.
n) sdsId - Population is contingent only if data is currently available for feature.
o) sourceFeatureClass (Mandatory) - The feature class containing the line feature.

CLJN.CL.Disposal_FacilityPoint (point) - The location of a personal property asset in the DoD real property inventory for which a disposal action is being or has been taken to physically demolish, remove, or release the DoD of accountability for and control of the asset.

a) abandonedDate - The date the feature was abandoned. Leave blank if removed.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature demolishment or abandoned.
d) ClassType - Population is contingent only if data is currently available for feature.
e) disposalCompletionDate - The actual calendar date of the disposal or abandonment of the asset.
f) facilityNumber - Asset Identification such as generator, ows, towers, etc.
g) featureDescription - Population is contingent only if data is currently available for feature.
h) featureName (Mandatory) - Feature Name and subtype
i) facilityIdfk - Population is contingent only if data is currently available for feature.
j) operationalStatus - The state of usability of the feature. Domain values i.e., removed, abandoned, etc.
k) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
l) removedDate - The date the feature was removed. Leave blank if abandoned.
m) realPropertyJurisdictionType - The type of real property jurisdiction. Domain values i.e., tbd, etc.
n) registryIdentifier - Population is contingent only if data is currently available for feature.
o) sdsId - Population is contingent only if data is currently available for feature.
p) sourceFeatureClass (Mandatory) - The feature class containing the point feature.

CLJN.CL.Bridge - Bridge (polygon) - The structure erected over a depression or an obstacle such as a body of water, railroad, etc., to provide a pathway for vehicles, rail services, pedestrians or to carry utility services.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the
c) facilityNumber - Asset number used for visual identification of the facility.
d) contractNumber - The contract number associated with the feature.
e) featureDescription - The narrative describing the feature. Value Base Area or Road Name Crossing
f) featureName - The common name of the feature. Pedestrian, Railroad, Road, other, etc.
g) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
h) heightUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) isFixed - Indicator of whether the bridge cannot be opened for navigation or other purposes. Yes / No
l) operationalStatus - The state of usability of the feature

i.e., inService, notInService, abandoned, etc.

CLJN.CL.Building - Building (polygon) - The roofed and floored facility enclosed by exterior walls and consisting of one or more levels.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature if feature function does not accuracy address the description of building.
e) featureName - The common name of the feature. (Review current data for common name)
f) featureFunction - The purpose(s) of, or intended role(s) served by, the feature. Domain values i.e., Fishing (3), Aircraft Repair (341), Motor Vehicle Repair (343), Utilities (350), Water Treatment (362), Water Distribution (363), Residence (563), Guard (781), Government (811), Recreation (921) etc.
g) floorCount - The number of floors
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.Fence (polyline) - The freestanding structure designed to restrict or prevent movement across a boundary.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - FENCE or GATE.
f) FenceDesignType - The configuration of fabricated fence materials in a particular manner to build a fence. This may or may not include specifications of the post type(s). Domain values i.e., cross, postAndFrame, metalRail, postAndFrame, etc.
g) fenceFabricatedMaterialType - The fabricated material of the fence. Domain values i.e., barbedWire, chainLink, wroughtIron, metalOther, steel, wood, etc.
h) fencePrimaryMaterialType - The fundamental or raw substance of the fence. Domain values i.e., jute, metalOther, steel, wood, wroughtIron, etc.
i) fenceTopType - The fabricated material used as an upper barrier on the fence. Domain values i.e., spiked, electricfiedWire, etc.
j) fenceUseType - The purpose that the fence serves. Domain values, i.e., internalSecurity, perimeterSecurity,

recreation, residential, safety, vechicleBarrier, etc.
k) heightAboveSurfaceLevel - The vertical distance measurement in feet.
l) heightUom - The unit of measure for the height measurement. Domain values 0.3048 metres or feet, etc.
m) mediald - gpsDataCollected
n) MetadataId - metaID000072
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.Gate (polyline) - A movable barrier that closes an opening in a fence, wall, or other enclosure or enclosure.

a) accessControlType - The type of access control. Domain values, i.e., gate etc.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the feature.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) gateTypeMaterial - The type of material of the gate. Domain values i.e., metal, steel, wood, wroughtiron, etc.
h) gatePurposeType - Purpose that the gate exists and functions under. Domain values i.e., decorative, insternalSecurity, perimaterSecurity, recreation, residential, safely, vehicleBarrier, other, etc.
i) gateTopType - The fabricated material used as an upper barrier on the fence. Domain values i.e., spiked,
j) isBaseEntryPoint - Yes or No
k) isCheckpoint - Yes or No
l) isManned - Yes or No
m) isPortable - Yes or No
n) isRangeAccess - Yes or No
o) mediald - gpsDataCollected
p) metadataId - metaID000072
q) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.RecreationBoundary (polygon) - The area designated for recreational purposes.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) isFormallyDelineated Yes / No

g) isHandicappedAccessible Yes / No
h) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.OpenStorage - Open Storage (polygon) - The non-covered and/or covered storage areas, paved or otherwise established, for the storage of general supply materials or the receipt, processing, staging and issue of materials.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) mediald - gpsDataCollected
g) MetadataId - metaID000072
h) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.PavementSectionAirfieldArea - Pavement Section Airfield (polygon) - The location of a surface feature that comprises a section of a military airfield area. *Requires Survey Grade GPS.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) airfieldPavementUse - The use of the airfield. Domain values i.e., apron, fueling area, helipad, runway, taxiway, etc.
e) featureDescription - The narrative describing the feature. Values should include Area i.e., MCAS NEW RIVER, HADNOT POINT, RIFLE RANGE, MCOLF CAMP DAVIS, GSRA, HOSPITAL, etc.
f) featureName - The common name of the feature. (Review current data for common name)
g) highestElevation - The elevation from a specified vertical datum to the highest point on a feature.
h) highestElevationUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
i) isLighted - Yes / No
j) isPaved - Yes / No
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
o) runwayClassification - Classification of the runway. Domain values i.e., classA, classB, rotary, olf, etc.

CLJN.CL.PavementSectionParkingArea (polygon) - The area used for parking vehicles not including residential streets and driveways.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) isLighted - Yes / No
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
k) pavementSurfaceType - The type of material used to construct the surface of the pavement feature. Domain values i.e., asphalt, gravel, asphaltOverAsphaltConcrete, portlandCementConcrete, etc.
l) vehicleType - The type of vehicle permitted on the pavement section. Domain value i.e., all, gov, mil, pov, etc.

CLJN.CL.PavementSectionRoadway (polygon) - The surface area that comprise a road area, upon which vehicles drive and park.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - FULL Road Name All Capital Letters, i.e., D STREET, SIXTH STREET, FOSTER BOULEVARD, PORTLAND COURT
f) isPaved - Yes / No
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
k) pavementSurfaceType - The type of material used to construct the surface of the pavement feature. Domain values i.e., gravel, asphalt, asphaltOverAsphaltConcrete, portlandCementConcrete, etc.
l) roadSectionType - The type of road asset represented by this section. Domain values i.e., roadway, stagingArea, etc.
m) vehicleType - The type of vehicle permitted on the pavement section. Domain value i.e., all, gov, mil, pov, etc.

CLJN.CL.PavementSection - Pavement Section (polygon) - The portion of

a pavement branch that differs in some aspect from other sections such that further segmentation is required to uniquely identify that section.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. Value i.e., GENERATOR PAD, TRANSFORER PAD, DUMPSTER PAD, BLEACHER PAD, UTILITY PANEL PAD, etc.
e) FeatureName - Slab.
f) featureName - The common name of the feature. (Review current data for common name)
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.

CLJN.CL.PavementSectionSidewalk (polygon) - The paved pedestrian walkway prepared to facilitate travel on foot. It may or may not be adjacent to a street/road.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) isLighted - Yes / No
g) isPaved - Yes / No
h) materialType - The material composition of the feature. Domain values i.e., asphalt, concrete, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.

CLJN.CL.StructureArea - Structure (polygon) - The facility, other than a building or linear structure, which is constructed on or in the land.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.

d) featureDescription - The narrative describing the feature. Values i.e., Picnic Pavilion, Gazebo, Postal Shelter, Buss Stop, Golf Shelter, Vehicle Wash Platform, Outdoor Classroom,
e) featureName - The common name of the feature. Values i.e., CANOPY, PLATFORM, PAVILLION, RAMP, WEIGH STATION, etc.
f) mediald - gpsDataCollected
g) MetadataId - metaID000072
h) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.TowerPoint (point) - The vertical projection, higher than its diameter, generally used for observation, etc.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. I.e., Range, Observation, Cell, etc.
e) featureName - Common name utilized for Range Area name.
f) heightMax - Maximum height of structure in feet.
g) heightUom - The unit of measure for the height measurement. Domain values .3048 metres or feet, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) towerUseType - The primary operational use of the tower. Domain values, i.e., fire, observation, communication, training, etc.

CLJN.CL.TrafficControlLight (point) - A feature used to represent traffic lights.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) heightAboveSurfaceLevel - Maximum height of structure in feet.
g) heightAboveSurfaceLevelUom - The unit of measure for the height measurement. Domain values .3048 metres or feet, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.WallLine - Wall - The linear feature used for separation of facilities, ornamental decoration, or structural reinforcement.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. Values i.e., BENCH, DUMSPTER ENCLOSURE, UTILITY ENCLOSURE, RETAINING WALL, BLAST PROTECTION, BAFFLE WALL, MECHANICAL YARD, etc.
e) featureName - The common name of the feature. (Review current data for common name)
f) height - The height of the feature in feet.
g) heightUom - The unit of measure for the height measurement. Domain values .3048 metres or feet, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) wallMaterialType - The material from which the majority of the wall is constructed. Domain values i.e., brick, cinderblock, grass, glassBlock, masonry, wood, etc.

1.4.5 Feature Dataset CLJN.CL.Recreation

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.RecreationTrail - Recreation Trail (Polyline) - The path or walkway providing opportunity for physical activities.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature area. Values i.e., HADNOT POINT, FRECH CREEK, WALLAS CREEK, MCAS, etc.
e) featureName - The common name of the feature such as common trail name. Values, i.e., GREENWAY, MCAS, KNOX, etc.
f) Mediald - gpsDataCollected
g) MetadataId - metaID000072
h) meterialType - The material composition of the feature. Domain values i.e., asphalt, concrete, etc.
i) officialLength - The officially reported length of the feature in feet.
j) officialLengthUom - The official length. Domain values i.e. 0.3048 metres, feet, etc.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.Playground - Playground (Polygon) The area designed for children to play outdoors.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) featureDescription - The narrative describing the feature. (Review current data for description).
d) featureName - The common name of the feature. (Review current data for common name)
e) featureName - The common name of the feature such as common trail name.
f) isHandicappedAccessible - Yes / No
g) Mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
k) isHandicappedAccessible - Yes / No
l) playgroundCategory - Playground categorization by physical location on the installation. Domain values i.e., childDevCenter, generalPurpose, housingArea, school, etc.
m) playgroundMaterial - The primary material that the play pieces are constructed from. Domain values i.e., paintedMetal, plastic, vinylCoatedMetal, wood, etc.
n) recreationFeatureType - The type of recreation feature. Domain values i.e., paintball, playground, obstacleCourse, picnicSite, tennisCourt, volleyballCourt, swimmingPool, etc.
o) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
p) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

CLJN.CL.RecreationFeatureArea - Recreation Feature Area (Polygon) - The location of an object or other physical asset associated with a recreation site. - Recreation area, i.e., swimming pool, basketball, tennis, baseball, football, and other recreation features.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) facilityNumber - Asset number used for visual identification of the facility.
c) contractNumber - The contract number associated with the feature.
d) featureDescription - The narrative describing the feature.
e) featureName - The common name of the feature if not addressed in RecreationFeatureType field.
f) mediald - gpsDataCollected
g) MetadataId - metaID000072
h) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
i) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

j) isHandicappedAccessible - Recreation Area has a formal designation. Yes / No
k) isIndoor - Yes or No
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
n) RecreationFeatureType - The type of recreation feature. Domain values. i.e., athleticCourt, athleticField, basketballCourt, climbingStructure, dugout, exerciseStation, footballField, picnicSite, recreationalFirearmsRange, volleyballCourt, etc.

1.4.6 Feature Dataset CLJN.CL.Transportation

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.Sign - Sign (point) - The structure that conveys directional, warning, or other information.

a) builtDate - The calendar date on which the original construction was completed for a facility.
b) contractNumber - The contract number associated with the feature.
c) medialD - gpsDataCollected
d) MetadataId - metaID000072
e) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
f) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
h) signAssemblyType - The type of sign assembly material. Domain values i.e., IBeamSteelBreakaway, PedestrialPole, SignalMastArm, signalPole, fire, safety, etc.
i) signText - The text displayed on the sign.
j) signType - The type of sign. Domain values i.e., regulatory, school, warning, etc.
k) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.

CLJN.CL.RoadCenterline - The center of a roadway, as measured from the edge of the navigable road with the paved or unpaved surface. Polylines is to be drawn in direction of flow with no breaks except where naturally occurring such as intersections and crossings.

a) dataSource - The agency that last updated the record.
b) dateUpdated - The date the record was created or last modified.
c) elevationFrom - Elevation value at start of segment.
d) elevationTo - Elevation value at end of segment.

e) featureDescription - The narrative describing the feature.
f) featureName - the common name of the feature.
g) fullStreetName - The combined full street name.
h) isPaved - The yes or no indicator of whether the feature has a paved surface. Domain values i.e., yes, no.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) numLanes - The number of traffic lanes throughout the length of the centerline.
l) oneWayDirection - The one-way road directionality. Domain values i.e. ft, tf, b, etc.
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) owner - The entity that owns the feature. Domain values, i.e., usmc, ncdot, etc.
o) roadClass - The general description of the type of road, based on the US Census MAF/TIGER Feature Classification Codes (MTFCC). Domain values i.e., primary, secondary, local, etc.
p) roadWidth - The width of the feature.
q) roadWidthUom - The width unit of measure in feet
r) Domain: GsipLengthUom (i.e. usSurveyFoot, metre, etc.)
s) speedLimit - The posted speed limit in MPH.
t) verticalDatum - The vertical reference datum for the z location value. Domain values i.e. navd88, etc.
u) verticalEpoch - The time period epoch to which the elevation measurement is referenced. Domain values i.e., opus, etc.

1.4.7 Attrribute Data Collection and GPS Requirements for Utilities

Locate, GPS and collect attribute data as specified for each feature listed with (Survey Grade GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

1.4.8 Feature Dataset CLJN.CL.Telecommunication

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.CommUtilSegment (polyline) - The location of a feature used for destruction in a communication network, particularity a cable for the transmission of a signal.

a) availableStrands - A list of fiber strands that are available.
b) cableCount - The number of copper pairs or fiber strands dedicated at a given location.
c) cableId - The cable identifier. (Review current data for description)
d) cableInstaller - The name of the group responsible for installation of the cable feature.
e) cableInstallType - The type of installation of the cables. Domain values i.e., aeria, directBuried, tunnel, underground,

etc.

f) cableInsulation - The material composition of the insulation of the cable. Domain values i.e., pvc, xlpe, etc.
g) cableMaterial - The material composition of the cable. Domain values i.e., fiberOpt, cu, etc.
h) cableRoute - The start and end points of a cable section. (Review current data for description)
i) cableSheathing - The type of sheathing or insulation of the cable. Domain values i.e., bp, cpnm, cj, etc.
j) communicationsSegmentType - The type of communications network segment that this feature represents. Domain values i.e., cCoaxial, cFiberOptic, etc.
k) contractNumber - The contract number associated with the feature.
l) dateInService - The date the utility equipment was put in service.
m) featureDescription - The narrative describing the feature. (Review current data for description)
n) featureName - The common name of the feature. (Review current data for naming convention)
o) numberOfPairs - The number of wire pairs in the cable.
p) numberOfSingleModeStrands - The number of single-mode fiber strands.
q) numberOfStrands -The total number of fiber strands in the cable.
r) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
s) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
t) wireGauge - The gauge of the wire.

CLJN.CL.Feat_CUgEnclosureAccess (point) - The location of a communication access point to the related communication underground enclosure.

a) commUtilityFeatureType - Type of communication feature, i.e., cUGEnclosureAccess
b) contractNumber- The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for naming convention)
f) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., elevated, semiBuried, underground, etc.
g) medialD - gpsDataCollected
h) MetadataId - metaID000072
i) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., communications.
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS,PPV, Company Name, etc.
l) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., communications, etc.

CLJN.CL.Feat_CPedestal (point) - The location of an above-ground enclosed structure that provides access to buried plant and a place to house utility features.

a) commUtilityFeatureType - Type of communication feature, i.e., cPedestal
b) contractNumber- The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for naming convention)
f) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., elevated, semiBuried, underground, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., communications.
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS,PPV, Company Name, etc.

CLJN.CL.CommUtilNode_CAntenna (point) - A device that can transmit or receive radio frequency signals.

a) communicationsNodeType - Type of communication node, i.e., cAntenna
b) contractNumber- The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for naming convention)
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) ownerName - The name of the item owner, i.e., MCB CL, MCCS,PPV, Company Name, etc.

CLJN.CL.Feat_CDuctBank (polyline) - The location of one or more ducts routed in parallel between two nodes.

a) commUtilityFeatureType - Type of communication feature, i.e., cDuctBank, etc.
b) contractNumber- The contract number associated with the feature.

c) dateInService - The date the utility equipment was put in service.
d) ductDiameterUom - - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) ductMaterial - The material composition of the feature. Domain values i.e., cooper, carbonSteel, etc.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for naming convention)
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., communications.
k) NumberOfDucts
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS,PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., communications, etc.

1.4.9 Feature Dataset CLJN.CL.Utilities_Electrical Class

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.AlternativeEnergyArea (polygon) - The apparatus or device used for the production of energy from a renewable resource.

a) alternativeEnergyType - The type of alternative energy that the feature represents. Domain values i.e., photovoltaic, windTurbine, tbd, etc.
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) expansionDistributionNetwork - An indication of the distribution network interconnection an alternative energy feature uses to supply renewable energy. Domain values i.e., partOElectricalNetwork, etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, recreational, tbd, etc.
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) hasInverter - Yes / No

k) isMetered - Yes / No
l) mediald - gpsDataCollected
m) MetadataId - metaID000072
n) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
o) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
p) panelType - The type of panel present.
q) systemCapacityDc - The system capacity for the DC current produced by the solar photovoltaic array, preferably measured in kilowatts.

CLJN.CL.ElecUtilNode_EFuse (point) - The location of a device used to protect electric distribution devices from dangerously high currents, and reduce risk of severe injury for personnel.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) alternativeEnergyType - The type of alternative energy that the feature represents. Domain values i.e., photovoltaic, windTurbine, tbd, etc.
c) contractNumber - The contract number associated with the feature.
d) dateInService - The date the utility equipment was put in service.
e) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., efuse.
f) facilityNumber - Asset number used for visual identification of the facility.
g) featureDescription - The narrative describing the feature. (Review current data for description)
h) featureName - The common name of the feature. (Review current data for common name)
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, recreational, etc.
j) mediald - gpsDataCollected
k) MetadataId - metaID000071
l) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.

CLJN.CL.ElecUtilNode_EGenerator (point) - The location of an available kinetic power source providing electricity.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in

service.

d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eGenerator.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) generatorPowerSource - The power source of the generator. Domain values, i.e., gas, natural gas, propane, solarPower, etc.
j) generatorType - The type of electrical generator. Domain values i.e., emergency, primary, standby, etc.
k) isPortable - Yes / No
l) kvaRate - The rating of the complex power that the generator creates.
m) kwRate - The rating of the real power that the generator creates.
n) Manufacturer - The name of the manufacturer of the feature.
o) mediald - gpsDataCollected
p) MetadataId - metaID000072
q) modelNumber - The model, product, catalog, or item number for the feature item.
r) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
s) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
t) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
u) serialNumber - The manufacturer serial or unique identification number for the feature item.
v) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.ElecUtilNode_EMeter (point) - The location of a device that measures the amount of electric energy consumed by the power user.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eMeter.
e) energySource - Indicates if the meter is measuring a standard power source or an alternative energy source. Domain values i.e., standardPowerSource, alternativeEnergySource, tbd, etc.
f) facilityNumber - Asset number used for visual identification of the facility.

g) featureDescription - The narrative describing the feature. (Review current data for description)
h) featureName - The common name of the feature. (Review current data for common name)
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
j) isAmi - An indicator of whether or not the meter is an AMI or smart meter. Yes / No
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) meterType - The type of meter. Domain valves i.e., diaphragm, orifice, rotary, other, tbd, etc.
n) meterUse - An indication of the type of service the meter is monitoring. Domain valves eleMeter, generator, loadPoint, commercial, etc.
o) mountingType - The type of mounting for the subject item. Domain valves electrical, pole, pad, transformer, wall, etc.
p) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
q) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
r) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
s) transformerKva - The kva rate for the transformer.
t) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.ElecUtilNode_ECircuitBreaker (point) - The location of a circuit breaker, an automatically operated electrical switch designed to protect an electrical circuit from damage caused by excess current from an overload or short circuit.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eCircuitBreaker.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS,

PPV, Company Name, etc.

CLJN.CL.ElecUtilNode_EExteriorLight (point) - The location of a lighting device that is supplied by local distribution systems and is generally the only service for which the electric utility installs, operates and maintains utilization equipment.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eExteriorLight.
e) facilityNumber - Asset number used for visual identification of the facility.
f) exteriorLightType - The type of exterior light. Domain i.e., landscapelight, parkingLotLight, pedestrianLight, recreationFieldLight, securityLight, streetlight, sidewalkLight, etc.
g) featureDescription - The narrative describing the feature. (Review current data for description)
h) featureName - The common name of the feature. (Review current data for common name)
i) feederId - The Feeder Manager identifier assigned to electric feeders and devices that participate in a specific distribution circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) hasSensor - Yes / No
l) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
m) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
n) isSolar - Yes / No
o) lampType - The type of lamp per fixture. Domain i.e., led, hps, mh, etc.
p) mediald - gpsDataCollected
q) MetadataId - metaID000072
r) mountingType - The type of mounting for the subject item. Domain values i.e., pole, pad, transformer, wall, ground, etc.
s) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
t) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
u) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.ElecUtilNode_EAirfieldLight (point) - The location of an electrical device used to illuminate runways, taxiways, helipads,

aprons, and any other aircraft movement area, as well as to guide ground traffic.

a) airfieldLightType - The type of lighting present on the airfield. Domain value i.e., runwayLight, taxiwayLight, apron, helipadLight, approachLight, etc.
b) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
c) contractNumber - The contract number associated with the feature.
d) dateInService - The date the utility equipment was put in service
e) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eAirfieldLight.
f) facilityNumber - Asset number used for visual identification of the facility.
g) featureDescription - The narrative describing the feature. (Review current data for description)
h) featureName - The common name of the feature. (Review current data for common name)
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
j) medialD - gpsDataCollected
k) MetadataId - metaID000072
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.ElecUtilNode_EEnergyStorage - The location of energy storage device or natural system capable of capture of energy produced at one time for use at a later time, within the relative span of a human lifetime.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eEnergyStorage.
e) featureDescription The narrative describing the feature. (Review current data for description)
f) featureName - The narrative describing the feature. (Review current data for description)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.

h) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
i) ownerName - The name of the item owner, i.e., MCB CL, Company Name, etc.

CLJN.CL.ElecUtilNode_ESubstation (point) - A substation is a part of an electrical generation, transmission, and distribution system. Substations transform voltage from high to low, or the reverse, or perform any of several other important functions. Between the generating station and consumer, electric power may flow through several substations at different voltage levels.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eSubstation
d) facilityNumber - Asset number used for visual identification of the facility.-
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) numberOfAvailableBays - The number of available bays at the substation.
k) numberOfCircuits - The number of circuits present at the substation.
l) numberOfSpareBreakers - The number of Spare Breakers in the substation.
m) numberOfTransformers - The number of transformers present.
n) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
o) ownerName - The name of the item owner, i.e., MCB CL, Company Name, etc.
p) voltageIn - The line-to-line voltage of the transmission line that is the source for the substation. Domain value i.e., 120V, 480V, 480YTo277V etc.
q) voltageOut - The line-to-line output voltage of the substation. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.Feat_ESubstation (Polygon) - The location of a facility in an electrical system where the voltage is reduced from transmission levels to distribution levels.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalUtilityFeatureType - The type of electrical utility feature. Domain value, i.e., eSubstation.

d) FaciltyNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values i.e., electrical, etc.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

CLJN.CL.ElecUtilNode_EVoltageRegulator (point) - Current Regulators are different that Voltage Regulators and are used on the airfield lighting systems.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., ecurrentRegulator.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.

CLJN.CL.ElecUtilNode_ESwitchingStation (point) - A Switching Station is an electrical substation with only one voltage level, whose only function are switching actions.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eSwitchingStation.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - Number of Switches.
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediaId- gpsDataCollected
j) MetadataId - metaID000072
k) numberOfSwitches -The number of switches present.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.

CLJN.CL.ElecUtilNode_ESwitch (point) - The location of a device throughout distribution feeder circuits to redirect power flows to balance loads or for sectionalizing to allow repair of damaged lines or equipment.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes, i.e., eSwitch.
e) electricalSwitchInstallation - The mounting/installation style of the electrical switch. Domain values buildingMounted, padMounted, poleMounted, electricalPanel, etc.
f) electricalSwitchType - The type or style of electrical switch. Domain values circuitBrkr, disconnect, fuseCutout, gangDisc, hdSaftly, iso, reclosure, etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - The narrative describing the feature. (Review current data for description)

i) featureName - The common name of the feature. (Review current data for common name)
j) feederId - The Feeder Manager identifier assigned to electric feeders and devices that participate in a specific distribution circuit, utilize (tbd) if unknown.
k) feederId2 - The feeder Manager Identifier assigned if the electric device is supplied by second feeder, utilize. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
l) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
m) mediald - gpsDataCollected
n) MetadataId - metaID000072
o) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
p) numberOfSwitches - The number of switches present, i.e.,
q) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
r) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
s) switchPosition - Code indicating normal position of switch, per phase. Domain value closed, closedOpen, open, openClosed, unknown, tbd, etc.
t) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.Feat_EPedestal (point) An aboveground service entrance, allowing maintenance access to the specific utility, usually electric or communications.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) bcontractNumber - The contract number associated with the feature.
c) cdateInService - The date the utility equipment was put in service.
d) electricalUtilityFeatureType - The type of electrical utility feature, i.e., ePedestal
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) featureName - The common name of the feature. (Review current data for common name)
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
j) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) operationalStatus - The state of usability of the feature

i.e., inService, notInService, abandoned, etc.

n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

ElecUtilNode_ETransformer - Electrical Utility Node - Transformer (point) - The location of an electric distribution or power transformer.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) electricalNodeType - The type of electrical network node that this feature represents. Domain values consist of electrical nodes i.e., eTransformer.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) feederId - The Feeder Manager identifier assigned to electric feeders and devices that participate in a specific distribution circuit, utilize (tbd) if unknown.
i) feederId2 - The feeder Manager Identifier assigned if the electric device is supplied by second feeder, utilize (tbd) if unknown.
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) Manufacture - The name of the manufacturer of the feature.
n) modelNumber - The model, product, catalog, or item number for the feature item.
o) mountingType - The type of mounting for the subject item. Domain value ground, pad, pole, transformer, wall, tbd, etc.
p) numberOfPhases - Number of phases. Domain values i.e., one, two, three, etc.
q) numberOfTransformers - The number of transformers present.
r) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
s) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
t) primaryVoltage - The voltage on the source side of the regulator with the associated units given. Domain value i.e., 120V, 480V, 480YTo277V etc.
u) secondaryVoltage - The voltage on the load side of the regulator with the associated units given. Domain value i.e., 120V, 480V, 480YTo277V etc.
v) totalKva - The total kva rate.

w) transformerType - The type of transformer. Domain values i.e., inverter, isolation, stepDown, stepUp, vault, etc.

CLJN.CL.ElecUtilSegment (polyline) - The location of a linear feature, particularly a cable that transmits, distributes or connects customers to electricity. All polylines shall be drawn in the direction of flow with no breaks except for what is naturally occurring such at nodes, etc.

a) ElectricalSegmentType - The identifier for Primary or Secondary line segments within an electrical distribution system.
b) cableInsulation - The material composition of the insulation of the cable. Domain value, i.e., ip, epr, pe, pvc, rubber, xipe, tdb, unknow, etc.
c) cableMaterial - The material composition of the cable. Domain value, i.e., ac, al, copper, fiberOpt, steel, steelGalv, etc.
d) cableSheathing - The type of sheathing or insulation of the cable. Domain value, i.e., shielded, weatherProof, asbestos, cellulose, tapeArmor, tbd, etc.
e) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
f) conductorSize - The size of the conductor.
g) contractNumber - The contract number associated with the feature.
h) dateInService - The date the utility equipment was put in service.
i) facilityNumber - Asset number used for visual identification of the facility.
j) featureDescription - The narrative describing the feature. (Review current data for description)
k) featureName - The common name of the feature. (Review current data for common name)
l) feederId - The Feeder Manager identifier assigned to electric feeders and devices that participate in a specific distribution circuit, utilize (tbd) if unknown.
m) feederId2 - The feeder Manager identifier assigned if the electric device is supplied by second feeder, utilize. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
n) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
o) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
p) medialD - gpsDataCollected
q) MetadataId - metaID000072
r) neutralSize - The size of a single neutral conductor. Domain value i.e., .5, .75, 1, 1.25, 2, 4, etc.
s) numberOfPhases - Number of phases. Value, i.e., 1, 2, 3, 4, etc.
t) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
u) ownerName - The name of the item owner, i.e., MCB CL, MCCS,

PPV, Company Name, etc.

v) voltage - The system voltage applied to the subject item. Domain value i.e., 120V, 480V, 480YTo277V etc.

CLJN.CL.Feat_EScadaSensor (point) - The location of a device that is used to remotely measure the status of electrical network components as part of a Supervisory Control and Data Acquisition (SCADA) system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalUtilityFeatureType - The type of electrical utility feature, i.e., eScadaSensor
d) FacilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
i) medialD - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., electrical.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

CLJN.CL.Feat_EDemarcationPoint (point) - The location where the electrical service provider ownership ends, and the customer ownership begins.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalUtilityFeatureType - The type of electrical utility feature, i.e., eDemarcationPoint.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.

h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., electrical.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) outsideProvider - The name of the outside provider for the Utility Feature. Value, i.e., owner of point may be 3rd party company.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

CLJN.CL.Feat_ESupportStructure (point) - The location of a structural framework that holds electric devices in an elevated position.

a) circuitId - An operator generated identifier locally used to reference a specific electrical circuit. (Data can be found in Geodatabase, i.e., RG2, FC1, CHB, IND, etc. or contact PWD GIS Office)
b) configurationType - The cable mounting configuration on the pole or tower. Domain value, i.e, armless, crossarmEqal, crossarmUnequal, shortArm, vertical, other, tbd, unknown, etc.
c) contractNumber - The contract number associated with the feature.
d) dateInService - The date the utility equipment was put in service.
e) electricalUtilityFeatureType - The type of electrical utility feature i.e., eSupportStructure.
f) facilityNumber - Asset number used for visual identification of the facility.
g) featureDescription - The narrative describing the feature. (Review current data for description)
h) featureName - The common name of the feature. (Review current data for common name)
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
j) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
k) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature in feet.
l) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
m) materialType - The material composition of the feature. Domain value, i.e., cement, fiberglass, log, metal, steel, wood, etc.
n) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., electrical.
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) serialNumber - Physical ID on pole that is a unique identifier added to pole on label by contractor/shop.
r) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

CLJN.CL.Feat_ESurfaceStructure - The location of a structural framework that holds electric devices in a position at or near the ground surface.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalStructureType - The type of electrical feature. Domain values i.e., electricalCabinet, handHole, junctionBox, manhole, etc.
d) electricalUtilityFeatureType - The type of electrical utility feature i.e., eSurfaceStructure.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The common name of the feature. (Review current data for common name)
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) mediaId - gpsDataCollected
k) MetadataId - metaID000072
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc. utilityNetworkSubtype

CLJN.CL.Feat_EAnchorGuy (point) - The location of a wire or set of wires running from the top of the pole to an anchor installed in the ground and consist of wires, appropriate fastenings and the anchor.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalUtilityFeatureType - The type of electrical utility feature, i.e., eAnchorGuy.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.

h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., electrical.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

CLJN.CL.Feat_EUgEnclosureAccess (point) - The location of an electrical access point to the related electrical underground enclosure.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) electricalUtilityFeatureType - The type of electrical utility feature i.e., eUgEnclosureAccess.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., electrical.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., electrical, etc.

1.4.10 Feature Dataset CLJN.CL.Utilities_Pol

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.PolUtilNode _OOwsSystem (point) - A filtering device placed in the fuel stream specifically to remove oil and water from the fuel.

a) contractNumber - The contract number associated with the feature.
b) dateInService The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
j) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., contaminatedMedia, b5, automotiveDiesal, etc.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

CLJN.CL.PolUtilNode_OValve (point) -The location of a network component used to control flow, pressure, and level within fueling systems.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.
d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - The narrative describing the feature. (Review current data for description)
i) featureName - The common name of the feature. (Review current data for common name)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., jetA, kerosene,

marineDiesel, jp5, automotiveDiesel, etc.

o) polNodeType - The type of POL network node that this feature represents i.e., oValve, etc.
p) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
q) valveMaterial - The material composition of the valve. Domain values, i.e., ductileIron, carbonSteel, etc.
r) valveType - The normal status or operating position of the valve. Domain values i.e., check, gate, etc.

CLJN.CL.PolUtilNode_OMeter (point) - The location of a device that measures the volumetric flow rate of fuel passing through the meter.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) isAmi - Description of meter - meter is an AMI or smart meter. Yes / No
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) meterType - The type of meter. Domain valves i.e., diaphragm, orifice, rotary, other, tbd, etc.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, AmeriGas, etc., etc.
m) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., jetA, kerosene, marineDiesel, jp5, automotiveDiesel, contaminatedMedia, etc.
n) polNodeType - The type of POL network node that this feature represents i.e,. oMeter

CLJN.CL.PolUtilNode_OTank (point) -The location of a container for storage of POL products at atmospheric pressure.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing,

recreational, training, water, etc.

g) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
h) locatedUnderground - Yes / No
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) nominalCapacity - The numeric volume of the feature when filled to its design capacity.
l) nominalCapacityUom - The unit of measure of the like named value. Domain values i.e., usgallon
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., jetA, kerosene, marineDiesel, jp5, automotiveDiesel, contaminatedMedia, etc.
p) secondaryContainment - Indicates the storage tank has a secondary containment area that contains spills. Domain values i.e., concreteVault, doubleBottom, plasticPanSystem, other, etc.
q) polNodeType - The type of POL network node that this feature represents. Domain values, i.e, (oTank)
r) secondaryContainment - Indicates the storage tank has a secondary containment area that contains spills, i.e., spillPan, etc.
s) storageTankProduct - The product contained in the storage tank. Domain values i.e., automotiveDiesel, bf5, dielectricOil, diesel, ethanol, gasoline, heatingOilUnspecified, jp, marineDiesel, propane, reclaimedFuel, usedCookingOil, usedFuel, usedOil, etc.
t) tankTopHeight - The top of the tank reservoir measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature.
u) tankTopHeightUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

CLJN.CL.PolUtilNode_ODispenser (point) - The location of a machine at a fueling station that is used to pump fuel into vehicles or Aerospace Ground Equipment (AGE).w

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. Type of dispenser i.e., Marine, Aircraft, Automobile, HeavyEquipment, POV, GOV, etc.
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) functionalArea - The principle activity within a landuse

area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.

h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) networkType - The primary type of utility network to which this feature relates. Domain values i.e., (pol)
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., jetA, kerosene, marineDiesel, jp5, automotiveDiesel, contaminatedMedia, etc.
n) polNodeType - The type of POL network node that this feature represents i.e., oDispenser

CLJN.CL.PolUtilSegment (polyline) - The location of a linear feature, particularly a pipeline, used for the conveyance of petroleum, oil, and lubricants (POL) product. All polylines shall be drawn in the direction of flow with no breaks except for what is naturally occurring such at nodes, etc.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.
d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - The narrative describing the feature. (Review current data for description)
i) featureName - The common name of the feature. (Review current data for common name)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
l) materialType - The material composition of the feature. Domain values i.e., cooper, carbonSteel, etc.
m) mediald - gpsDataCollected
n) MetadataId - metaID000072
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) polNetworkSubType - The subtype of POL network in which this feature participates. Domain values i.e., jetA, kerosene, marineDiesel, jp5, automotiveDiesel, contaminatedMedia, etc.

1.4.11 Feature Dataset CLJN.CL.Utilities_Sewer

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.Feat_SDemarcationPoint (point) - The location where the wastewater service provider ownership ends, and the customer ownership begins.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
h) medialD - gpsDataCollected
i) MetadataId - metaID000072
j) networkType - The primary type of utility network to which this feature relates. Domain values i.e., wastewater, etc.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) outsideProvider - The name of the outside provider for the Utility Feature. Value, i.e., owner of point may be 3rd party company.
m) owner - The entity that owns the feature. Domain values, i.e., ppv, usmc, usn, leased, federalOther, etc.
n) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates. Domain values i.e., domesticSewage, oilyWaste, industricalWaste, etc.
o) wastewaterNodeType - The type of water utility feature i.e., sDemarcationPoint.

CLJN.CL.WastUtilNode_SMeter (point) - The location of a device or set of devices used to measure the flow of wastewater.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)

e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) isAmi - An indicator of whether or not the meter is an AMI or smart meter. Yes / No
h) Manufacturer - The name of the manufacturer of the feature.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) meterType - The type of meter. Domain valves i.e., diaphragm, orifice, rotary, other, tbd, etc.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates. Domain values i.e., domesticSewage, oilyWaste, industricalWaste, etc.
o) wastewaterNodeType - The type of wastewater network node that this feature represents i.e., smeter.

CLJN.CL.Feat_SScadaSensor (point) - The location of a device that is used to remotely measure the status of wastewater network components as part of a Supervisory Control and Data Acquisition (SCADA) system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., wastewater, etc.
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
l) utilityNetworkSubType - The subtype of wastewater network in which this feature participates. Domain values i.e., domesticSewage, etc.
m) wastewaterUtilityFeatureType - The type of water utility feature i.e., sScadaSensor

CLJN.CL.Feat_SUgEnclosureAccess (point) -The location of a wastewater access point to the related wastewater underground enclosure.

a) contractNumber - The contract number associated with the

feature.

b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
h) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
i) invertElevation - The elevation of the bottom of the feature in inches.
j) invertElevationUom - The invert elevation. Domain values, i.e., length equal to .0254, inch, etc.
k) numberOfPipes - The number of pipes connecting to the manhole.
l) mediald - gpsDataCollected
m) MetadataId - metaID000072
n) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., wastewater.
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) rimElevation - The elevation at the top of the feature in feet.
r) rimElevationUom - The unit of measure for rim elevation. Domain values i.e. measurement equal to 0.3048 metres, etc.
s) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., wastewater, etc.
t) wastewaterUtilityFeatureType - The type of water utility feature i.e., sUgEnclosureAccess.

CLJN.CL.WastUtilNode_SCleanOut (point) - The location of a wastewater device access point in a lateral used for maintenance purposes.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
g) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing,

recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) materialType - The material composition of the feature. Domain values i.e., copper, ductileIron, fiber, fiberglassReinforcedPolyester, galvanizedIron, galvanizedSteel, PVC, terracotta, etc.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
o) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., scleanOut.

CLJN.CL.WastUtilNode_SFitting (point) - The location of a mechanical device on the wastewater system that caps or plugs a single pipe, or connects two or more pipes.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) fittingMaterial - The material of the pipe fitting. Domain values i.e., Domain values i.e., copper, ductileIron, fiber, fiberglassReinforcedPolyester, galvanizedIron, galvanizedSteel, PVC, steel, etc.
i) fittingType - The type of pipe fitting. Domain values, i.e., bend, reducer, tee, plug, etc.
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) mediald - digitized
l) MetadataId - metaID000071
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
p) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sFitting.

CLJN.CL.WastUtilNode_SSystemValve (point) - The location of a device that regulates, directs, or controls the flow of wastewater.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) valveMaterial - The material composition of the valve. Domain values, i.e., ductileIron, carbonSteel, etc.
n) valvePosition - The normal status or operating position of the valve. Domain values i.e., normallyClosed, normallyOpen, other, tbd, unknown.
o) valveType - The normal status or operating position of the valve. Domain values i.e., flowControl, butterfly, check, gate, postIndicator, etc.
p) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
q) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sSystemValve.

CLJN.CL.WastUtilNode_SReleaseValve (point) - The location of a wastewater device used to purge air from a force main.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072

k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) valveMaterial - The material composition of the valve. Domain values, i.e., ductileIron, carbonSteel, etc.
n) valveType - The normal status or operating position of the valve. Domain values i.e., airRelease.
o) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
p) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sReleaseValve.

CLJN.CL.WastUtilNode_SGreaseTrap (point) - The location of a tank which separates grease from water, collects the grease for removal, and allows the water to exit.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
k) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
l) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sGreaseTrap.

CLJN.CL.WastUtilNode_STank (point) - The location of a container for storage of products associated with the wastewater network.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) diameter - Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription- The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review

current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) hasSecondaryContainment - Yes / No
k) materialType - The material composition of the feature. Domain values i.e., concrete, etc.
l) nominalCapacity - The unit total numeric capacity in gallons.
m) nominalCapacityUom - The unit of measure of the like named value i.e., usGallon
n) mediald - gpsDataCollected
o) MetadataId - metaID000072
p) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
q) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc
r) storageTankProduct - The product contained in the storage tank. Domain values i.e., oilyWastewater, rawWater, wasteFuel.
s) volume - The volumetric capacity of the feature
t) volumeUom - The unit of measure of the like named value i.e., usGallon
u) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, oilyWaste, etc.
v) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e.,stank.
w) width - The dimension of a feature in feet.
x) widthUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

CLJN.CL.WastUtilNode_SOilWateSeparator (point) - The location of a device or structure placed in the wastewater stream to separate water from oil products.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) nominalCapacity - The unit total numeric capacity in gallons.
j) nominalCapacityUom - The unit of measure of the like named value i.e., usGallon
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, oilyWaste, etc.
n) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sOilWaterSeparator.

CLJN.CL.WastUtilNode_SPump (point) - The location of a piece of wastewater equipment that adds energy to a fluid being conveyed through a pipe or other closed conduit.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) medialD - gpsDataCollected
h) MetadataId - metaID000072
i) isMainPump - Yes / No
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
l) pumpType - Type of pump. Domain values i.e., liftstation, booster, submersible, grinder, etc.
m) ratedFlow - The common rate of flow of each pump.
n) ratedFlowUom - The rate of flow for each pump. Domain value i.e., galMin
o) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
p) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sPump.

CLJN.CL.Feat_SPumpStation (polygon) - The location of a facility that collects and discharges wastewater via pumps.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature.
e) featureDescription - The narrative describing the feature. (Review current data for description)
f) featureName - The common name of the feature. (Review current data for common name)
g) functionalArea - The principle activity within a landuse

area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.

h) hasGeneratorBackup - Yes / No
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) isMainPump - Yes / No
l) nominalCapacity - The station total capacity in gallons.
m) nominalCapacityUom - The unit of measure of the like named value i.e., usGallon
n) numberOfPumps - The number of pumps in the feature.
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) pumpStationType - Type of pumping station. Domain value i.e., pumpingStation, ejectorStation, liftStation, etc.
r) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
s) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., sPumpStation.

CLJN.CL.Feat_SSepticTankPoint (point) - The location of a small-scale anaerobic digester and leach field designed to treat wastewater from an individual facility, and is not connected to the wastewater collection system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) materialType - The material composition of the feature. Domain values i.e., plastic, concrete, fiberglass, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., wastewater.
k) nominalCapacity - The unit total numeric capacity in gallons.
l) nominalCapacityUom - The unit of measure of the like named value i.e., usGallon
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) secondaryContainment - Indicates the storage tank has a secondary containment area that contains spills. Domain values i.e., concreteVault, doubleBottom, plasticPanSystem, other, etc.
o) septicTankType - The type of septic tank. Domain values, i.e., mound, septicTank, etc.
p) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e.,

domesticSewage, etc.

q) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
r) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, oilyWaste, etc.
s) wastewaterNodeType - The type of wastewater network node that this feature represents. i.e., tbd

CLJN.CL.WastUtilSegment (polyline) - The location of a feature used for the conveyance of wastewater. All polylines shall be drawn in the direction of flow with no breaks except for what is naturally occurring such at nodes, etc.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) materialType - The material composition of the feature. Domain values i.e., asbestosCement, pvc, etc.
j) invertElevationDownstream - Numeric number of the elevation downstream invert in inches.
k) invertElevationDownstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
l) invertElevationUpstream - Numeric number of the elevation upstream invert in inches.
m) invertElevationUpstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
n) isLined - Yes / No
o) medialD - gpsDataCollected
p) MetadataId - metaID000072
q) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
r) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
s) pipeType - The type of pipe used. Domain values i.e., box, circular, pipArch, tbd, etc.
t) slope - The slope of the bottom of the subject item expressed as a percentage.
u) wastewaterNetworkSubType - The subtype of wastewater network in which this feature participates, i.e., domesticSewage, etc.
v) wastewaterSegmentType - The type of wastewater network segment that this feature represents. Domain values i.e., sForceMain, sGravityMain, sLateralLine, sPressurizedServiceLine, etc.

1.4.12 Feature Dataset CLJN.CL.Utilities_Stormwater

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.StormUtilNode_SwInlet (point) - The location where stormwater is collected and received into the utility system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. Values i.e., CATCHBASIN, ENDWALL, HEADWALL, INLET, ETC.
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) inletCoverType - The type of inlet cover. Domain values i.e., Domain values i.e., concrete, metalGate, etc.
h) inletDiameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.5, 1, 4, etc.
i) inletDiameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
j) inletOpeningSize - The size of the inlet opening in inches.
k) inletOpeningSizeUom - The unit of measure for the inlet opening size. Domain values, i.e., 0.0254 metres, inches etc.
l) invertElevation - The elevation of the bottom of the feature in inches.
m) invertElevationUom - The invert elevation. Domain values, i.e., length equal to .0254, inch, etc.
n) materialType - The material composition of the feature. Domain values i.e., concrete, steel, pvc, etc.
o) mediald - gpsDataCollected
p) MetadataId - metaID000072
q) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
r) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
s) rimElevation - The elevation at the top of the feature in feet.
t) rimElevationUom - The unit of measure for rim elevation. Domain values i.e. measurement equal to 0.3048 metres, etc.
u) stormwaterInletType - The type of stormwater inlet feature. Domain values i.e., catch basin, curbinlet, grateInlet, weirInlet, etc.
v) stormwaterNodeType - The type of stormwater network node that this feature represents. Domain values i.e., swCatchBasin, swCleanout, swDownspout, swInlet, swInfall, etc.

CLJN.CL.Feat_SwUgEnclosureAccess (point) - The location of a Stormwater access point to the related Stormwater underground enclosure.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom- The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. Values i.e., swManhole, etc.
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) invertElevation - The elevation of the bottom of the feature in inches.
j) invertElevationUom - The invert elevation. Domain values, i.e., length equal to .0254, inch, etc.
k) medialD - gpsDataCollected
l) MetadataId - metaID000072
m) networkType - The type of stormwater network node that this feature represents. Domain values i.e., stormwater.
n) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
o) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
p) rimElevation - The elevation at the top of the feature in feet.
q) rimElevationUom - The unit of measure for rim elevation. Domain values i.e. measurement equal to 0.3048 metres, etc.
r) stormwaterUtilityFeatureType - The type of stormwater utility feature, i.e., swUgEnclosureAccess
s) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., stormwater, etc.

CLJN.CL.StormUtilSeg (polyline) - The location of a feature used for the conveyance of stormwater. For example, a pipeline, culvert, or ditch. All polylines shall be drawn in the direction of flow with no breaks except for what is naturally occurring such at nodes, etc.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification

of the facility.

f) featureDescription - The narrative describing the feature. (Review current data for description)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) invertElevation - The elevation of the bottom of the feature in inches.
j) invertElevationUom - The invert elevation. Domain values, i.e., length equal to .0254, inch, etc.
k) invertElevationDownstream - Numeric number of the elevation downstream invert in inches.
l) invertElevationDownstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
m) invertElevationUpstream - Numeric number of the elevation upstream invert in inches.
n) invertElevationUpstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
o) mediald - gpsDataCollected
p) MetadataId - metaID000072
q) openDrainSurface - The surface material of the drain, typically at the bottom of the structure.
r) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
s) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
t) percentSlope - The slope of the bottom of the subject item expressed as a percentage.
u) pipeType - The type of pipe used. Domain values i.e., box, circular, pipArch, tbd, etc.
v) stormwaterSegmentType - The type of stormwater network segment that this feature represents. Domain values i.e., swCulvert, swForceMain, swGravityMain, swLateralLine, swOpenDrain, swSwale, swTrenchDrain, tbd.

CLJN.CL.StormUtilNode_SwOilWateSepa (point) - The location of a device or structure placed in the stormwater stream to separate water from oil products.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service degradationIndex
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
h) isCovered - Yes / No

i) nominalCapacity - The numeric volume of the feature when filled to its design capacity.
j) nominalCapacityUom - The unit of measure of the like named value. Domain values i.e., usgallon
k) operationalStatus - The state of usability of the feature i.e., inService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) stormwaterNodeType - The type of stormwater network node that this feature represents. Domain values i.e., swCatchBasin, swCleanout, swDownspout, swInlet, swInfall, etc.

CLJN.CL.Feat_SwRetentionBasinArea (polygon) - The location of a human-created area installed to improve water quality by permanently storing runoff.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) networkType - The type of stormwater network node that this feature represents. Domain values i.e., stormwater.
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
l) stormwaterUtilityFeatureType - The type of stormwater utility feature, i.e. swRetentionBasinArea
m) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., stormwater, etc.

1.4.13 Feature Dataset CLJN.CL.Utilities_Thermal

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.TherUtilNode_TPump (point) - The location of a facility that operates to maintain flow at adequate pressure for the thermal system.

a) contractNumber - The contract number associated with the

feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
h) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
i) pumpElevation - The elevation of the pump feature in feet.
j) pumpElevationUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
k) pumpType - The type of pump.
l) ratedFlow - The numeric flow rating of the pump.
m) ratedFlowUom - The rate of flow for each pump. Domain value i.e., galMin
n) thermalNodeType - The type of thermal network node that this feature represents, tPump.

CLJN.CL.TherUtilNode_TProdStruc (point) - The location of a facility which produce steam, high-temperature water, low-temperature water, dual-temperature water or chilled water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) heightAboveSurfaceLevel - The vertical distance measured from the lowest point of the base of the feature at ground or water level to the tallest point of the feature in feet.
h) heightAboveSurfaceLevelUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
i) medialD - gpsDataCollected
j) MetadataId - metaID000072
k) nominalCapacity - The numeric volume of the feature when filled to its design capacity
l) nominalCapacityUom - The unit of measure for nominal capacity. Domain value i.e., tons, btu, etc.
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.

o) thermalNetworkSubType - The subtype of thermal network in which this feature participates. Domain values i.e., steamSupply, otherSupply, geothermalSupply (well), highTemperatureHotWaterSupply, etc.
p) thermalNodeType - The type of thermal network node that this feature represents, tProductionStructure.
q) thermalProdStrucType - The type of production structure based upon various classifications including methods of transferring heat, piping arrangement, pumping arrangement, or the relative temperature of transferred media. Examples include Boilers, Chillers, Cooling Towers, Heat Pumps, Single/Double pipe systems, Low/Medium/High Temperatures systems, etc.
r) volume - The volumetric capacity of the feature
s) volumeUom - Rate of flow in tons, btu, etc.

CLJN.CL.TherUtilNode_TCondCollector (point) - The location of a thermal related well or a tank that collects condensation.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
h) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
i) thermalNetworkSubType - The subtype of thermal network in which this feature participates. Domain values i.e., chilledWaterReturn, dualTemperatureWaterSupply, geothermalReturn, highTemperatureHotWaterSupply, lowTemperatureHotWaterSupply, steamSupply, etc.
j) thermalNodeType - The type of thermal network node that this feature represents, tCondCollector.

CLJN.CL.TherUtilNode_TSystemValve (point) - The location of a device that regulates, directs, or controls the flow of steam or water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)

f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
h) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
i) thermalNetworkSubType - The subtype of thermal network in which this feature participates. Domain values i.e., chilledWaterReturn, dualTemperatureWaterSupply, geothermalReturn, highTemperatureHotWaterSupply, lowTemperatureHotWaterSupply, steamSupply, etc.
j) thermalNodeType - The type of thermal network node that this feature represents, tSystemValve
k) valveMaterial - The material composition of the valve. Domain values i.e., steel, etc.
l) valvePosition - The normal status or operating position of the valve. Domain value i.e., normallyClose, normallyOpen, other, tbd, unknown.
m) valveType - The normal status or operating position of the valve. Domain values i.e., reliefValve, flowControl, gate, pressureRegulator, pressureReducing, etc.

CLJN.CL.Feat_TUgEnclosureAccess (point) - The location of a thermal access point to the related thermal underground enclosure.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
h) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) networkType - The primary type of utility network to which this feature relates. Domain values i.e., thermal.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) thermalUtilityFeatureType - The type of thermal utility feature tUgEnclosureAccess.
n) thermalNetworkSubType - The subtype of thermal network in which this feature participates. Domain values i.e., steamSupply, otherSupply, geothermalSupply, highTemperatureHotWaterSupply, etc.

ThermalUtilitySegment (polyline) - The location of a feature used for the conveyance of steam, high-temperature water, low-temperature water, or chilled water. All polylines shall be drawn in the direction of flow with no breaks except for what is naturally occurring such at nodes, etc.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.
d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - The narrative describing the feature. (Review current data for description)
i) featureName - The common name of the feature. (Review current data for common name)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
n) materialType - Type of segment material. Domain values i.e., steel, castiron, etc.
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) pipeType - The type of pipe used. Domain values i.e., box, circular, pipArch, tbd, etc.
r) thermalNetworkSubType - The subtype of thermal network in which this feature participates. Domain values i.e., steamSupply, otherSupply, geothermalSupply, highTemperatureHotWaterSupply, etc.
s) thermalSegmentType - The type of termal network segment that this feature represents. Domain values i.e., tMainLine, tService Line.

1.4.14 Feature Dataset CLJN.CL.Utilities_Water

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a

particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.WateUtilNode_WSystemValve (point) - The location of a device that regulates, directs, or controls the flow of water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.
d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - Utilize CLJN.CL.Feat_WUtilityArea to use Service Area Values i.e., Stone Bay, Onslow Beach, Handnot Point, etc.
i) featureName - The common name of the feature. (Review current data for common name)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) turnDirectionToClose - The turn direction to close the valve. Domain values i.e., leftToClose, rightToClose, other, na, tbd, unknown, etc.
p) valveMaterial - The material composition of the valve. Domain values i.e., ductileIron, steel, pvc, etc.
q) valvePosition - The normal status or operating position of the valve. Domain value i.e., normallyClose, normallyOpen, other, tbd, unknown.
r) valveType - The subtype of water network in which this feature participates. Domain values i.e., ball, gate, postIndicator, waterServiceValve, postIndicator, fireHydrantValve, etc.
s) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater, etc.
t) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wAirGap, wControlValve, wFireHydrant, wFitting, wFlushingStation, wHydrant, wMeter, etc.

CLJN.CL.WateUtilNode_WReliefValve (point) - The location of a water related device designed to release when the set pressure is exceeded.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.
d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) facilityNumber - Asset number used for visual identification of the facility.
h) featureDescription - The common name of the feature. (Review current data for common name)
i) featureName - The common name of the feature. (Review current data for common name)
j) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
n) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
o) valveMaterial - The material composition of the valve. Domain values i.e., steel, pvc, etc.
p) valveType - The subtype of water network in which this feature participates. Domain values i.e., wReliefValve.
q) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
r) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wReliefValve

CLJN.CL.WateUtilNode_WPressReduStation (point) - The location of a feature which reduces the pressure from line pressure to the desired operating pressure and can switch from low to high pressure for flushing.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) featureDescription - The common name of the feature. (Review current data for common name)
d) featureName - The common name of the feature. (Review current data for common name)
e) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
f) mediald - gpsDataCollected
g) MetadataId - metaID000072
h) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.

i) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
j) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
k) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wPressureReducingStation.

CLJN.CL.WateUtilNode_WBackPrevDevice (point) - The location of a feature that is used to protect water supplies from contamination or pollution.

a) bfpType - Backflow prevention device type. Domain values i.e., ag, avb, dcva, pvb, rpz, spvb, etc.
b) contractNumber - The contract number associated with the feature.
c) dateInService - The date the utility equipment was put in service.
d) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.75, 2, etc.
e) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
f) featureDescription - The common name of the feature. (Review current data for common name)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
m) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
n) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wBackflowPreventionDevice.

CLJN.CL.WateUtilNode_WMeter (point) - The location of a device used to measure the quantity and/or rate of water flowing through a pipe, which may be the amount of water used by the customer.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.

e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The common name of the feature. (Review current data for common name)
g) featureName - The common name of the feature. (Review current data for common name)
h) fittingType - The type of pipe fitting. Domain values i.e., bend, tap, cap, other, tbd, etc.
i) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
j) isAmi - The yes or no indicator of whether or not the meter is an AMI or smart meter.
k) mediald - gpsDataCollected
l) MetadataId - metaID000072
m) meterType - The type of meter. Domain values i.e., turbine, rotary, etc.
n) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
o) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
p) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
q) waterNodeType - The type of water network node that this feature represents, wMeter.

CLJN.CL.WateUtilNode_WHydrant (point) - Hydrants not exclusively used for firefighting. Secondary uses are flushing main lines and laterals, filling tank trucks, and providing a temporary water source for construction jobs.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The common name of the feature. (Review current data for common name)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) HydrantPurpose - The purpose of the Hydrant. Values i.e., fireHydant, flushedFDC, YardHydrant, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
l) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.

m) waterNodeType - The type of water network node that this feature represents. Domain values i.e., whHydrant.

CLJN.CL.WateUtilNode_WFireHydrant (point) a valve connection on a water supply system having one or more outlets and that is used in firefighting to supply hose and fire department pumpers with water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.5, 1.75, 2, etc.
d) diameter1 - The diameter of the outlet.
e) diameter2 - The diameter of the outlet.
f) diameter3 - The diameter of the outlet.
g) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
h) facilityNumber - Asset number used for visual identification of the facility.
i) featureDescription - The common name of the feature. (Review current data for common name)
j) featureName - The common name of the feature. (Review current data for common name)
k) fireConnectionType - The yes or no indicator of whether or not the fire hydrant is a fire protection connection. Yes or No
l) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
m) hydrantNumber - The equipment number as designated by the fire department that is primarily responsible for the fire hydrants operation and maintenance.
n) inletDiameter - The diameter of the inlet.
o) inletDiameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
p) mediald - gpsDataCollected
q) MetadataId - metaID000072
r) isFireConnection - The yes or no indicator of whether or not the fire hydrant is a fire protection connection. Yes or No
s) outletDiameter - The diameter of the outlet.
t) outletDiameter1 - The diameter of the outlet.
u) outletDiameter2 - The diameter of the outlet.
v) outletDiameter3 - The diameter of the outlet.
w) outletDiameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
x) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
y) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
z) waterNodeType - The type of water network node that this feature represents, wFireHydrant.

CLJN.CL.WateUtilNode_WFitting (point) - The location of a mechanical device that connects two or more pipes, or caps or plugs a single pipe, on the water system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, 1, 1.25, 1.5, 1.75, 2, etc.
d) diameter1 - The diameter of the outlet.
e) diameter2 - The diameter of the outlet.
f) diameter3 - The diameter of the outlet.
g) diameter4 - The diameter of the outlet.
h) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
i) facilityNumber - Asset number used for visual identification of the facility.
j) featureDescription - The common name of the feature. (Review current data for common name)
k) featureName - The common name of the feature. (Review current data for common name)
l) fittingType - The type of pipe fitting. Domain values i.e., bend, cap, tee, etc.
m) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
n) mediald - digitized
o) MetadataId - metaID000071
p) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
q) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
r) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wfitting.
s) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.

CLJN.CL.WateUtilNode_WPump (point) - The location of a water related piece of equipment that adds energy to a fluid, such as water, being conveyed through a pipe or other closed conduit.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The common name of the feature. (Review current data for common name)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) mediald - gpsDataCollected
h) MetadataId - metaID000072
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
j) ownerName - The name of the item owner, i.e., MCB CL, MCCS,

PPV, Company Name, etc.

k) pumpType - Type of pump. Domain values i.e., booster, submersible, etc.
l) ratedFlow - The common rate of flow of each pump.
m) ratedFlowUom - The rate of flow for each pump. Domain value i.e., galMin
n) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wpump.
o) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.

CLJN.CL.WateUtilNode_WStorageStructure (point) - The location of a facility that store large volumes of water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Elevation - The elevation from a specified vertical datum to the highest point on a feature.
d) elevationUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The common name of the feature. (Review current data for common name)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) groundElevation - The elevation of the ground at the location of the item in feet.
k) invertElevation - The elevation of the bottom of the feature in feet.
l) mediald - gpsDataCollected
m) MetadataId - metaID000072
n) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
o) overflowElevation - The elevation of the overflow device (i.e., pipe invert).
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) secondaryContainment - Indicates the storage tank has a secondary containment area that contains spills. Domain values i.e., concreteVault, doubleBottom, plasticPanSystem, other, etc.
r) storageTankProduct - The product contained in the storage tank.
s) storageTankType - The primary type of storage tank.
t) topElevation - The elevation at the top of the feature.
u) topElevationUom The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

v) volume - The volumetric capacity of the feature in usgallons.
w) volumeUom - Unit of measure in usgallons
x) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
y) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wstorageStructure.
z) width - The dimension of a feature in feet.
aa) widthUom - The unit of measure Domain values i.e. 0.3048 metres, feet, etc.

CLJN.CL.Feat_WUgEnclosureAccess (point) - The location of a water access point to the related water underground enclosure.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.5, 1.75, 2, etc.
d) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) facilityNumber - Asset number used for visual identification of the facility.
f) featureDescription - The common name of the feature. (Review current data for common name)
g) featureName - The common name of the feature. (Review current data for common name)
h) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
i) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
j) lidDiameter - Diameter of the lid or cover that allows access to the manhole.
k) lidDiameterUom - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 2, etc.
l) lidMaterial - Material type of the manhole access lid or cover.
m) mediald - gpsDataCollected
n) MetadataId - metaID000072
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
r) waterUtilityFeatureType - The type of water utility feature i.e., wUgEnclosureAccess.

WateUtilNode_WSource(point) - A source of water intake to the water system including reservoirs, natural water bodies, wells, and/or feeds from external water networks. Do not delete potable from any feature

class, please attribute as removed or AIP.

a) abandonedDate - The date the feature was abandoned - see feature name to add contract number for abandoned.
b) contractNumber - The contract number associated with the original construction of this feature.
c) dateInService - The date the utility equipment was put in service.
d) facilityNumber - Asset number used for visual identification of the facility.
e) featureDescription - The common name of the feature. (Review current data for common name)
f) featureName - The common name of the feature. Until such a time that the well is abandoned or removed. (Add contract number associated with removal or abandonment of water well)
g) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
k) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
l) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
m) removedDate - Enter Remove date; however, do not delete water well from well feature class. (Attribute contract number to remove well in featureName)
n) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
o) waterNodeType - The type of water network node that this feature represents. Domain values i.e., wSource.
p) waterSourceType - Source of water, well.

CLJN.CL.Feat_WScadaSensor (point) - The location of a device that is used to remotely measure the status of water network components as part of a Supervisory Control and Data Acquisition (SCADA) system.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The common name of the feature. (Review current data for common name)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities,
g) familyHousing, recreational, training, water, etc.
h) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground,

elevated, semiBuried, underground, etc.
i) mediald - gpsDataCollected
j) MetadataId - metaID000072
k) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., water.
l) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., water, etc.
o) waterUtilityFeatureType - The type of water utility feature is wScadaSensor.

CLJN.CL.Feat_WDemarcationPoint (point) - The location where the water service provider ownership ends, and the customer ownership begins.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The common name of the feature. (Review current data for common name)
e) featureName - The common name of the feature. (Review current data for common name)
f) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
g) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
h) mediald - gpsDataCollected
i) MetadataId - metaID000072
j) networkType - The primary type of utility network to which this feature relates. Domain values, i.e., water.
k) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
l) outsideProvider - The name of the outside provider for the Utility Feature.
m) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
n) utilityNetworkSubtype - The primary subtype of utility to which this feature relates. Domain values i.e., water, etc.
o) waterUtilityFeatureType - The type of water utility feature is wDemarcationPoint.

CLJN.CL.WaterUtilitySegment (polyline) - The location of a feature used for the conveyance of water.

a) contractNumber - The contract number associated with the feature.
b) dateInService - The date the utility equipment was put in service.
c) depth - The distance, measured vertically downward to the base in inches.

d) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
e) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.5, 1.75, 2, etc.
f) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
g) elevation - The elevation at the top of the feature.
h) elevationUom - The elevation unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
i) facilityNumber - Asset number used for visual identification of the facility.
j) featureDescription - The narrative describing the feature. (Review current data for description)
k) featureName - The common name of the feature. (Review current data for common name)
l) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
m) groundConfiguration - The configuration of the asset in relationship to the ground. Domain values i.e., aboveground, elevated, semiBuried, underground, etc.
n) invertElevationDownstream - Numeric number of the elevation downstream invert in inches.
o) invertElevationDownstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
p) invertElevationUpstream - Numeric number of the elevation upstream invert in inches.
q) invertElevationUpstreamUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, etc.
r) lateralSegmentType - The type of lateral water network segment that this feature represents. Domain values i.e., wDomesticLateral, wFireProtectionLateral, wHydrantLateral, wInlineStorageLateral, wIrrigationLateral, wTransportPipeLateral, etc.
s) materialType - The material composition of the feature. Domain values i.e., pvc, tbd, etc.
t) medialD - gpsDataCollected
u) MetadataId - metaID000072
v) operationalStatus - The state of usability of the feature i.e., inService, notInService, abandoned, etc.
w) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
x) waterNetworkSubType - The subtype of water network in which this feature participates. Domain values i.e., fireProtectionWater, nonPotableWater, potableWater, rawWater, saltWater.
y) waterSegmentType - The type of wastewater network segment that this feature represents. Domain values i.e., wDistributionMain, wGravityMain, wLateral, wTransmissionMain

1.4.15 Feature Dataset CLJN.CL.Wells

Locate, GPS and collect attribute data as specified for each feature listed with (GPS) accuracy as described in paragraph "Global Positioning System (GPS) Data Collection". Attribute fields may be associated with Domains, which are utilized to constrain the values allowed in a particular field, attribute table or feature class. Domains must be utilized when populating the feature where required.

CLJN.CL.WellPoint - (point) - The man-made vertical excavation penetrating the surface of the Earth used collect environmental samples or monitor fluid or gas characteristics, inject fluids, gases or thermal energy into the subsurface, or extract contamination or other impurities from the subsurface. *(Potable Water Wells used for water distribution are not to be deleted from the this feature class, if they are demolished or AIP, the contract number utilize to make any changes should be attributed in featureName and the operation status should be changed to removed)*

a) abandonedDate - The date the feature was abandoned - see feature name to add contract number for abandoned.
b) builtDate - The calendar date on which the original construction was completed for a facility.
c) contractNumber - The contract number associated with the original construction of this feature.
d) depth - The distance, measured vertically downward to the base in inches.
e) depthUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
f) Diameter - The diameter of the feature in inches. Domain value i.e., .5, .75, 1, 1.25, 1.5, 2, 3, etc.
g) diameterUom - The diameter unit of measure. Domain values, i.e., 0.0254 metres, inches etc.
h) facilityNumber - Asset number used for visual identification of the facility.
i) featureDescription - Utilize CLJN.CL.Feat_WUtilityArea to use Service Area Values i.e., Stone Bay, Onslow Beach, Handnot Point, etc.
j) featureName - The common name of the feature. Until such a time that the well is abandoned or removed. (Add contract number associated with removal or abandonment of water well)
k) functionalArea - The principle activity within a landuse area. Domain values i.e., utilities, familyHousing, recreational, training, water, etc.
l) locationAccuracy - The location accuracy for the data that was collected and verified i.e., Survey Grade GPS
m) mediald - gpsDataCollected
n) MetadataId - metaID000072
o) operationalStatus - The state of usability of the feature i.e., inService, notInService, removed, etc.
p) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company Name, etc.
q) removedDate - Enter Remove date; however, do not delete water well from well feature class. *(Attribute contract number to remove well in featureName)*
r) wellCapacity- The total capacity in gallons.
s) wellCapacityUom - The unit of measure of the like named value i.e., usGallon
t) wellPurposeType - The purpose of the well. Domain values extraction.
u) wellResourceType - The resource type which is being extracted, i.e. waterNonPotable.

1.4.16 Feature Dataset CLJN.CL.CadFloorPlan

All new and renovated buildings or structures shall be required to have a

linear representation, "clean floor plan", for each floor. A polyline for each level will include exterior and interior walls, doors and windows, exits and stairwells, etc. No nonpermanent fixtures, such as furniture, shall be included. Please note the dataset/feature name may change, however, the attribution requirements will remain the same.

CLJN.CL.CadFloorPlan (polyline) A linear representation of the floor plan representing the outer and inner walls, doors and windows of a building or structure that has been exported into a GIS Feature. (Note - Naming convention may change in the future)

This feature will present all levels, entry, exits, windows, stairwells. No none permanent fixtures, such as furniture should be included.

a) contractNumber - The contract number associated with the feature.
b) builtDate - The date the utility equipment was put in service.
c) facilityNumber - Asset number used for visual identification of the facility.
d) featureDescription - The narrative describing the feature. (Review current data for description)
e) featureName - The narrative describing the feature. (Review current data for description)
f) florid - Floor Level
g) mediald - digitized
h) MetadataId - metaID000071
i) operationalStatus - The state of usability of the feature i.e., inService, notInService, removed, etc.
j) ownerName - The name of the item owner, i.e., MCB CL, MCCS, PPV, Company

1.4.17 Non-Compliance

Failure to follow the specification outlined in this document will result in non-acceptance of data deliverable.

Note: Geospatial data delivery does not replace record drawing requirements.

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

-- End of Section --

SECTION 02 41 00

DEMOLITION
08/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI Guideline K	(2009) Guideline for Containers for Recovered Non-Flammable Fluorocarbon Refrigerants

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP A10.6	(2006) Safety & Health Program Requirements for Demolition Operations - American National Standard for Construction and Demolition Operations

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

U.S. DEFENSE LOGISTICS AGENCY (DLA)

DLA 4145.25	(Jun 2000; Reaffirmed Oct 2010) Storage and Handling of Liquefied and Gaseous Compressed Gases and Their Full and Empty Cylinders; https://www.dla.mil/Portals/104/Documents/Dispositions/ddsr/docs/cylinderjointpub.pdf

U.S. DEPARTMENT OF DEFENSE (DOD)

DOD 4000.25-1-M	(2006) MILSTRIP - Military Standard Requisitioning and Issue Procedures
MIL-STD-129	(2014; Rev R; Change 1 2018; Change 2 2019; Change 3 2023) Military Marking for Shipment and Storage

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 61	National Emission Standards for Hazardous Air Pollutants
40 CFR 82	Protection of Stratospheric Ozone
49 CFR 173.301	Shipment of Compressed Gases in Cylinders and Spherical Pressure Vessels

1.2 PROJECT DESCRIPTION

1.2.1 Definitions

1.2.1.1 Critical Root Zone (CRZ)

The critical root zone is the area around and under a tree where the majority of its roots are located. The CRZ is usually measured as a circle with a radius that's 1.5- foot for every inch of the tree's diameter at breast height (DBH), and a depth of 24 inches.

1.2.1.2 Demolition

Demolition is the process of tearing apart and removing any feature of a facility together with any related handling and disposal operations.

1.2.1.3 Demolition Plan

Demolition Plan is the planned steps and processes for managing demolition activities and identifying the required sequencing activities and disposal mechanisms.

1.2.2 Demolition Plan

Prepare a Demolition Plan and submit proposed demolition and removal procedures for approval before work is started. Include in the plan procedures for careful removal and disposition of materials specified to be salvaged, coordination with other work in progress, a detailed description of methods and equipment to be used for each operation and of the sequence of operations.

1.2.3 General Requirements

Do not begin demolition until authorization is received from the Contracting Officer. Remove rubbish and debris from the project site. The work includes demolition, salvage of identified items and materials, and removal of resulting rubbish and debris. Remove rubbish and debris from Government property daily, unless otherwise directed. Store materials that cannot be removed daily in areas specified by the Contracting Officer. In the interest of occupational safety and health, perform the work in accordance with EM 385-1-1, Section 17, Demolition, and other applicable Sections.

1.3 ITEMS TO REMAIN IN PLACE

Comply with FAR 52.236-9 to protect existing vegetation, structures, equipment, utilities, and improvements. Coordinate the work of this section with all other work indicated. Construct and maintain shoring, bracing, and supports as required. Ensure that structural elements are not overloaded. Do not overload pavements to remain.

1.3.1 Existing Construction Limits and Protection

Do not disturb existing construction beyond the extent indicated or necessary for installation of new construction. Provide protective measures to control accumulation and migration of dust and dirt in all work areas. Remove dust, dirt, and debris from work areas daily.

1.3.2 Trees

Protect the trees that are to remain and might be damaged during demolition or deconstruction by a 4 foot high polyethylene fence. Erect and secure fence to protect the critical root zone (CRZ) using a 1.5-foot protection radius for each 1 inch of tree diameter measured at breast height (DBH) or edge of tree canopy, whichever is greater. Replace any tree designated to remain that is damaged during the work under this contract in accordance with tree mitigation requirements and approved by the Contracting Officer.

1.3.3 Utility Service

Maintain existing utilities indicated to stay in service and protect against damage during demolition and deconstruction operations. Prior to start of work, utilities serving each area of alteration or removal will be shut off by the Government and disconnected and sealed by the Contractor.

1.3.4 Facilities

Protect electrical and mechanical services and utilities. Where removal of existing utilities and pavement is specified or indicated, provide approved barricades, temporary covering of exposed areas, and temporary services or connections for electrical and mechanical utilities. Floors, roofs, walls, columns, pilasters, and other structural components that are designed and constructed to stand without lateral support or shoring, and are determined to be in stable condition, must remain standing without additional bracing, shoring, or lateral support until demolished or deconstructed, unless directed otherwise by the Contracting Officer. Ensure that no elements determined to be unstable are left unsupported and place and secure bracing, shoring, or lateral supports as may be required as a result of any cutting, removal, deconstruction, or demolition work performed under this contract.

1.4 BURNING

The use of burning at the project site for the disposal of refuse and debris will not be permitted.

1.5 SUBMITTALS

Government approval is required for all submittals with a "G" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submittals not having a "G" classification are for information only. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Demolition Plan; G

Existing Conditions

SD-07 Certificates

Notification; G

SD-11 Closeout Submittals

Receipts

1.6 QUALITY ASSURANCE

Submit timely notification of demolition projects to Federal, State, regional, and local authorities in accordance with 40 CFR 61, Subpart M. Notify the Contracting Officer in writing 10 working days prior to the commencement of work in accordance with 40 CFR 61, Subpart M. Comply with federal, state, and local hauling and disposal regulations. In addition to the requirements of the "Contract Clauses," conform to the safety requirements contained in ASSP A10.6. Comply with the Environmental Protection Agency requirements specified. Use of explosives will not be permitted.

1.6.1 Dust and Debris Control

Prevent the spread of dust and debris to occupied portions of the building and avoid the creation of a nuisance or hazard in the surrounding area. Do not use water if it results in hazardous or objectionable conditions such as, but not limited to, ice, flooding, or pollution. Sweep pavements as often as necessary to control the spread of debris that may result in foreign object damage potential to aircraft.

1.7 PROTECTION

1.7.1 Traffic Control Signs

a. Where pedestrian and driver and aircraft safety is endangered in the area of removal work, use traffic barricades with flashing lights. Anchor barricades in a manner to prevent displacement by wind, jet or prop blast. Notify the Contracting Officer prior to beginning such work.

1.7.2 Protection of Personnel

Before, during and after the demolition work continuously evaluate the condition of the structure being demolished and take immediate action to protect all personnel working in and around the project site. No area, section, or component of floors, roofs, walls, columns, pilasters, or other structural element will be allowed to be left standing without sufficient bracing, shoring, or lateral support to prevent collapse or failure while workmen remove debris or perform other work in the immediate area.

1.8 RELOCATIONS

Perform the removal and reinstallation of relocated items as indicated with workmen skilled in the trades involved. Repair or replace items to be relocated which are damaged by the Contractor with new undamaged items as approved by the Contracting Officer.

1.9 EXISTING CONDITIONS

Before beginning any demolition work, survey the site and examine the drawings and specifications to determine the extent of the work. Record existing conditions in the presence of the Contracting Officer showing the condition of structures and other facilities adjacent to areas of alteration or removal. Photographs or electronic images with a minimum resolution of 3072 x 2304 pixels, capable of a print resolution of 300

dpi, will be acceptable as a record of existing conditions. Include in the record the elevation of the top of foundation walls, finish floor elevations, possible conflicting electrical conduits, plumbing lines, alarms systems, the location and extent of existing cracks and other damage and description of surface conditions that exist prior to starting work. It is the Contractor's responsibility to verify and document all required outages which will be required during the course of work, and to note these outages on the record document. Submit survey results to the Contracting Officer.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED

Inspect and evaluate existing structures onsite for reuse. Disassemble existing construction scheduled to be removed for reuse. Dismantled and removed materials are to be separated, set aside, and prepared as specified, and stored or delivered to a collection point for reuse, remanufacture, recycling, or other disposal, as specified. Designate materials for reuse onsite whenever possible.

3.1.1 Structures

a. Remove existing structures indicated in their entirety including all foundation elements. Overhead and underground utility lines will be terminated as indicated. The concrete slab, walkway, and footings shall also be removed. The demolished sites will be backfilled, leveled, and seeded unless otherwise indicated. Remove sidewalks, curbs, gutters and street light bases as indicated.

b. Demolish structures in a systematic manner from the top of the structure to the ground. Complete demolition work above each tier or floor before the supporting members on the lower level are disturbed. Demolish concrete and masonry walls in small sections. Remove structural framing members and lower to ground by means of derricks, platforms hoists, or other suitable methods as approved by the Contracting Officer.

c. Locate demolition equipment throughout the structure and remove materials so as to not impose excessive loads to supporting walls, floors, or framing.

d. Building, or the remaining portions thereof, not exceeding 80 feet in height may be demolished by the mechanical method of demolition.

3.1.2 Utilities and Related Equipment

3.1.2.1 General Requirements

Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by the Contracting Officer. Do not interrupt existing utilities serving facilities occupied and used by the Government except when approved in writing and then only after temporary utility services have been approved and provided. Do not begin demolition work until all utility disconnections have been made. Shut off and cap

utilities for future use, as indicated.

3.1.2.2 Disconnecting Existing Utilities

Remove existing utilities, as indicated and uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Contracting Officer. When utility lines are encountered but are not indicated on the drawings, notify the Contracting Officer prior to further work in that area. Remove meters and related equipment and deliver to a location on the station in accordance with instructions of the Contracting Officer.

3.1.3 Chain Link Fencing

Remove chain link fencing, gates and other related salvaged items scheduled for removal.

3.1.4 Paving and Slabs

Remove concrete and asphaltic concrete paving and slabs including aggregate base as indicated to a depth of 16 inches below new finish grade. Provide neat sawcuts at limits of pavement removal as indicated. Move, grind and store pavement and slabs designated to be recycled and utilized in this project as directed by the Contracting Officer. Remove pavement and slabs not to be used in this project from the installation at Contractor's expense.

3.1.5 Concrete

Saw concrete along straight lines to a depth of a minimum 2 inch. Make each cut in walls perpendicular to the face and in alignment with the cut in the opposite face. Break out the remainder of the concrete provided that the broken area is concealed in the finished work, and the remaining concrete is sound. At locations where the broken face cannot be concealed, grind smooth or saw cut entirely through the concrete.

3.1.6 Miscellaneous Metal

Salvage shop-fabricated items such as access doors and frames, steel gratings, metal ladders, wire mesh partitions, metal railings, metal windows and similar items as whole units. Salvage light-gage and cold-formed metal framing, such as steel studs, steel trusses, metal gutters, roofing and siding, metal toilet partitions, toilet accessories and similar items. Recycle scrap metal as part of demolition and deconstruction operations. Provide separate containers to collect scrap metal and transport to a scrap metal collection or recycling facility, in accordance with the Waste Management Plan.

3.1.7 Patching

Where removals leave holes and damaged surfaces exposed in the finished work, patch and repair these holes and damaged surfaces to match adjacent finished surfaces, using on-site materials when available. Where new work is to be applied to existing surfaces, perform removals and patching in a manner to produce surfaces suitable for receiving new work. Make finished surfaces of patched area flush with the adjacent existing surface and match the existing adjacent surface as closely as possible to texture and finish. Provide patching as specified and indicated, and include the following:

a. Concrete: Completely fill holes and depressions, left as a result of removals in existing masonry walls to remain.

3.1.8 Air Conditioning Equipment

Remove air conditioning, refrigeration, and other equipment containing refrigerants without releasing chlorofluorocarbon refrigerants to the atmosphere in accordance with the Clean Air Act Amendment of 1990. Recover all refrigerants prior to removing air conditioning, refrigeration, and other equipment containing refrigerants and dispose of in accordance with the paragraph entitled "Disposal of Ozone Depleting Substance (ODS)." Turn in salvaged Class I ODS refrigerants as specified in paragraph, "Salvaged Materials and Equipment."

3.1.9 Cylinders and Canisters

Remove all fire suppression system cylinders and canisters and dispose of in accordance with the paragraph entitled "Disposal of Ozone Depleting Substance (ODS)."

3.1.10 Electrical Equipment and Fixtures

Salvage motors, motor controllers, and operating and control equipment that are attached to the driven equipment. Salvage wiring systems and components. Box loose items and tag for identification. Disconnect primary, secondary, control, communication, and signal circuits at the point of attachment to their distribution system.

3.1.10.1 Fixtures

Remove and salvage electrical fixtures. Salvage unprotected glassware from the fixture and salvage separately. Salvage incandescent, mercury-vapor, and fluorescent lamps and fluorescent ballasts manufactured prior to 1978, boxed and tagged for identification, and protected from breakage.

3.1.10.2 Electrical Devices

Remove and salvage switches, switchgear, transformers, conductors including wire and nonmetallic sheathed and flexible armored cable, regulators, meters, instruments, plates, circuit breakers, panelboards, outlet boxes, and similar items. Box and tag these items for identification according to type and size.

3.2 CONCURRENT EARTH-MOVING OPERATIONS

Do not begin excavation, filling, and other earth-moving operations that are sequential to demolition or deconstruction work in areas occupied by structures to be demolished or deconstructed until all demolition and deconstruction in the area has been completed and debris removed. Fill holes, open basements and other hazardous openings.

3.3 DISPOSITION OF MATERIAL

3.3.1 Title to Materials

Except for salvaged items specified in related Sections, and for materials or equipment scheduled for salvage, all materials and equipment removed

and not reused or salvaged, become the property of the Contractor and must be removed from Government property. Materials approved for storage by the Contracting Officer must be removed before completion of the contract. Title to materials resulting from demolition and deconstruction, and materials and equipment to be removed, is vested in the Contractor upon approval by the Contracting Officer. The Government will not be responsible for the condition or loss of, or damage to, such property after contract award. Showing for sale or selling materials and equipment on site is prohibited.

3.3.2 Salvaged Materials and Equipment

Remove materials and equipment that are indicated to be removed by the Contractor and that are to remain the property of the Government, and deliver to a storage site, as directed within 5 miles of the work site.

a. Remove salvaged items to remain the property of the Government in a manner to prevent damage, and packed or crated to protect the items from damage while in storage or during shipment. Items damaged during removal or storage must be repaired or replaced to match existing items. Properly identify the contents of containers.

3.3.3 Disposal of Ozone Depleting Substance (ODS)

Class I and Class II ODS are defined in Section, 602(a) and (b), of The Clean Air Act. Prevent discharge of Class I and Class II ODS to the atmosphere. Place recovered ODS in cylinders meeting AHRI Guideline K suitable for the type ODS (filled to no more than 80 percent capacity) and provide appropriate labeling. Turn over recovered ODS to the Contracting Officer. Dispose products, equipment and appliances containing ODS in a sealed, self-contained system (e.g. residential refrigerators and window air conditioners) in accordance with 40 CFR 82. Submit Receipts or bills of lading, as specified. Submit a shipping receipt or bill of lading for all containers of ozone depleting substance (ODS) shipped to the Defense Depot, Richmond, Virginia.

3.3.3.1 Special Instructions

No more than one type of ODS is permitted in each container. Apply a warning/hazardous label to the containers in accordance with Department of Transportation regulations. Provide a tag with the following information on all cylinders including but not limited to fire extinguishers, spheres, or canisters containing an ODS:

a. Activity name and unit identification code

b. Activity point of contact and phone number

c. Type of ODS and pounds of ODS contained

d. Date of shipment

e. National stock number (for information, call (804) 279-4525).

3.3.3.2 Fire Suppression Containers

Deactivate fire suppression system cylinders and canisters with electrical charges or initiators prior to shipment. Also, safety caps must be used to cover exposed actuation mechanisms and discharge ports on these special

cylinders.

3.3.4 Transportation Guidance

Ship all ODS containers in accordance with MIL-STD-129, DLA 4145.25 (also referenced one of the following: Army Regulation 700-68, Naval Supply Instruction 4440.128C, Marine Corps Order 10330.2C, and Air Force Regulation 67-12), 49 CFR 173.301, and DOD 4000.25-1-M.

3.3.5 Unsalvageable and Non-Recyclable Material

Dispose of unsalvageable and non-recyclable combustible material off the site.

3.4 CLEANUP

Remove debris and rubbish from basement and similar excavations. Remove and transport the debris in a manner that prevents spillage on streets or adjacent areas. Apply local regulations regarding hauling and disposal.

3.5 DISPOSAL OF REMOVED MATERIALS

3.5.1 Regulation of Removed Materials

Dispose of debris, rubbish, scrap, and other nonsalvageable materials resulting from removal operations with all applicable federal, state and local regulations.

3.5.2 Burning on Government Property

Burning of materials removed from demolished and deconstructed structures will not be permitted on Government property.

3.5.3 Removal from Government Property

Transport waste materials removed from demolished and deconstructed structures, except waste soil, from Government property for legal disposal. Dispose of waste soil as directed.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 41 01

BUILDING DECONSTRUCTION
08/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI Guideline K	(2009) Guideline for Containers for Recovered Non-Flammable Fluorocarbon Refrigerants

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP A10.6	(2006) Safety & Health Program Requirements for Demolition Operations - American National Standard for Construction and Demolition Operations

ASTM INTERNATIONAL (ASTM)

ASTM F710	(2022) Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

U.S. DEFENSE LOGISTICS AGENCY (DLA)

DLA 4145.25	(Jun 2000; Reaffirmed Oct 2010) Storage and Handling of Liquefied and Gaseous Compressed Gases and Their Full and Empty Cylinders; https://www.dla.mil/Portals/104/Documents/Dispositions/ddsr/docs/cylinderjointpub.pdf

U.S. DEPARTMENT OF DEFENSE (DOD)

DOD 4000.25-1-M	(2006) MILSTRIP - Military Standard Requisitioning and Issue Procedures
MIL-STD-129	(2014; Rev R; Change 1 2018; Change 2 2019; Change 3 2023) Military Marking for Shipment and Storage

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 61	National Emission Standards for Hazardous

	Air Pollutants
40 CFR 82	Protection of Stratospheric Ozone
49 CFR 173.301	Shipment of Compressed Gases in Cylinders and Spherical Pressure Vessels

1.2 PROJECT DESCRIPTION

1.2.1 Definitions

1.2.1.1 Critical Root Zone (CRZ)

The critical root zone is the area around and under a tree where the majority of its roots are located. The CRZ is usually measured as a circle with a radius that's 1.5- foot for every inch of the tree's diameter at breast height (DBH), and a depth of 24 inches.

1.2.1.2 Demolition

Demolition is the process of tearing apart and removing any feature of a facility together with any related handling and disposal operations.

1.2.1.3 Deconstruction

Deconstruction is the process of taking apart a facility with the primary goal of preserving the value of all useful building materials.

1.2.1.4 Demolition Plan

Demolition Plan is the planned steps and processes for managing demolition activities and identifying the required sequencing activities and disposal mechanisms.

1.2.1.5 Deconstruction Plan

Deconstruction Plan is the planned steps and processes for dismantling all or portions of a structure or assembly, to include managing sequencing activities, storage, re-installation activities, salvage and disposal mechanisms.

1.2.2 Deconstruction Plan

Prepare a Deconstruction Plan and submit proposed salvage, deconstruction and removal procedures for approval before work is started. Include in the plan procedures for careful removal and disposition of materials specified to be salvaged, coordination with other work in progress, a disconnection schedule of utility services, and a detailed description of methods and equipment to be used for each operation and of the sequence of operations. Identify components and materials to be salvaged for reuse or recycling with reference to paragraph Existing Facilities to be Removed. Append tracking forms for all removed materials indicating type, quantities, condition, destination, and end use. Coordinate with Waste Management Plan in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL. Provide procedures for safe conduct of the work in accordance with EM 385-1-1. Plan must be approved by Contracting Officer prior to work beginning.

1.2.3 General Requirements

Do not begin deconstruction until authorization is received from the Contracting Officer. The work of this section is to be performed in a manner that maximizes the value derived from the salvage and recycling of materials. Remove rubbish and debris from the project site; do not allow accumulations. The work includes deconstruction, salvage of identified items and materials, and removal of resulting rubbish and debris. Remove rubbish and debris from Government property daily, unless otherwise directed. Store materials that cannot be removed daily in areas specified by the Contracting Officer. In the interest of occupational safety and health, perform the work in accordance with EM 385-1-1, Section 17, Demolition, and other applicable Sections.

1.3 ITEMS TO REMAIN IN PLACE

Comply with FAR 52.236-9 to protect existing vegetation, structures, equipment, utilities, and improvements. Coordinate the work of this section with all other work indicated. Construct and maintain shoring, bracing, and supports as required. Ensure that structural elements are not overloaded. Increase structural supports or add new supports as may be required as a result of any cutting, removal or deconstruction work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by deconstruction or removal work. Repairs, reinforcement, or structural replacement require approval by the Contracting Officer prior to performing such work.

1.3.1 Existing Construction Limits and Protection

Do not disturb existing construction beyond the extent indicated or necessary for installation of new construction. Provide temporary shoring and bracing for support of building components to prevent settlement or other movement. Provide protective measures to control accumulation and migration of dust and dirt in all work areas. Remove dust, dirt, and debris from work areas daily.

1.3.2 Weather Protection

For portions of the building to remain, protect building interior and materials and equipment from the weather at all times. Where removal of existing building envelope is necessary to accomplish work, have materials and workmen ready to provide adequate and temporary covering of exposed areas.

1.3.3 Utility Service

Maintain existing utilities indicated to stay in service and protect against damage during deconstruction operations. Prior to start of work, utilities serving each area of alteration or removal will be shut off by the utility provider and disconnected and sealed by the Contractor.

1.3.4 Facilities

Protect electrical and mechanical services and utilities. Where removal of existing utilities and pavement is specified or indicated, provide approved barricades, temporary covering of exposed areas, and temporary services or connections for electrical and mechanical utilities. Floors, roofs, walls, columns, pilasters, and other structural components that are

designed and constructed to stand without lateral support or shoring, and are determined to be in stable condition, must remain standing without additional bracing, shoring, or lateral support until deconstructed, unless directed otherwise by the Contracting Officer. Ensure that no elements determined to be unstable are left unsupported and place and secure bracing, shoring, or lateral supports as may be required as a result of any cutting, removal or deconstruction work performed under this contract.

1.4 BURNING

The use of burning at the project site for the disposal of refuse and debris will not be permitted.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Deconstruction Plan; G

Existing Conditions

SD-07 Certificates

Notification; G

SD-11 Closeout Submittals

Receipts

1.6 QUALITY ASSURANCE

Submit timely notification of deconstruction and renovation projects to Federal, State, regional, and local authorities in accordance with 40 CFR 61, Subpart M. Notify the Contracting Officer in writing 10 working days prior to the commencement of work in accordance with 40 CFR 61, Subpart M. Comply with federal, state, and local hauling and disposal regulations. In addition to the requirements of the "Contract Clauses," conform to the safety requirements contained in ASSP A10.6. Comply with the Environmental Protection Agency requirements specified.

1.6.1 Dust and Debris Control

Prevent the spread of dust and debris to occupied portions of the building and avoid the creation of a nuisance or hazard in the surrounding area. Do not use water if it results in hazardous or objectionable conditions such as, but not limited to, ice, flooding, or pollution. Vacuum and dust the work area daily. Sweep pavements as often as necessary to control the spread of debris.

1.7 PROTECTION

1.7.1 Traffic Control Signs

a. Where pedestrian and driver safety is endangered in the area of removal work, use traffic barricades with flashing lights. Notify the Contracting Officer prior to beginning such work.

1.7.2 Protection of Personnel

Before, during and after the deconstruction work continuously evaluate conditions and take immediate action to protect personnel working in and around the project site. No area, section, or component of floors, roofs, walls, columns, pilasters, or other structural element will be allowed to be left standing without sufficient bracing, shoring, or lateral support to prevent collapse or failure while workmen remove debris or perform other work in the immediate area.

1.8 EXISTING CONDITIONS

Before beginning any deconstruction work, survey the site and examine the drawings and specifications to determine the extent of the work. Record existing conditions in the presence of the Contracting Officer showing the condition of structures and other facilities adjacent to areas of alteration or removal. Photographs or electronic images with a minimum resolution of 3072 x 2304 pixels, capable of a print resolution of 300 dpi, will be acceptable as a record of existing conditions. Include in the record possible conflicting electrical conduits, plumbing lines, alarms systems, the location and extent of existing cracks and other damage and description of surface conditions that exist prior to starting work. It is the Contractor's responsibility to verify and document outages required during the course of work, and to note these outages on the record document. Submit survey results to the Contracting Officer.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED

Inspect and evaluate materials and equipment onsite for reuse. Disassemble constructions scheduled to be removed for reuse. Dismantled and removed materials are to be separated, set aside, and prepared as specified, and stored or delivered to a collection point for reuse, remanufacture, recycling, or other disposal, as specified. Designate materials for reuse onsite whenever possible.

Perform deliberate and controlled material removal to accommodate successive tradework together with any related handling and disposal operations. Perform activities to disassemble or penetrate installed tradework and constructions encountered.

Separate metal items derived from deconstruction activities. Items include structural steel sections, metal roofing, light gauge metal framing, metal siding, metal doors and frames, miscellaneous metals, suspended acoustical grid, mechanical equipment and fixtures, piping, ductwork, electrical equipment and fixtures, wiring, conduit, metal furniture, metal scrap and similar metals encountered.

Deliver items to the Treatment and Processing Facility located at the Piney Green Road lot. Contact the Qualified Recycling Program Manager FSC/Recycling, GF Public Works Division, Building 982, Piney Green Road, Camp Lejeune at (910) 451-2037 for applicable procedures and protocols.

3.1.1 Utilities and Related Equipment

3.1.1.1 General Requirements

Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by the Contracting Officer. Do not interrupt existing utilities serving facilities occupied and used by the Government except when approved in writing and then only after temporary utility services have been approved and provided. Do not begin deconstruction work until utility disconnections have been made. Shut off and cap utilities for future use, as indicated.

3.1.1.2 Disconnecting Existing Utilities

Remove existing utilities and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Contracting Officer. When utility lines are encountered but are not indicated on the drawings, notify the Contracting Officer prior to further work in that area. Remove meters and related equipment and deliver to a location in accordance with instructions of the Contracting Officer.

3.1.2 Paving and Slabs

Remove sawcut concrete and asphaltic concrete paving and slabs. Provide neat sawcuts at the nearest concrete control or expansion joint adjacent to the limits of pavement removal as indicated. Cuts between joints are not permitted. Remove pavement and slabs not to be used in this project from the project site at Contractor's expense.

3.1.3 Roofing

Remove existing roof system and associated components in their entirety down to existing roof deck. Remove roofing and insulation without damaging the roof deck. Sequence work to minimize building exposure between deconstruction and new roof materials installation.

3.1.3.1 Temporary Roofing

Install temporary roofing and flashing as necessary to maintain a watertight condition throughout the course of the work. Remove temporary work prior to installation of permanent roof system materials unless approved otherwise by the Contracting Officer.

3.1.3.2 Reroofing

When removing the existing roofing system from the roof deck, remove only as much roofing as can be recovered by the end of the work day, unless approved otherwise by the Contracting Officer. Do not attempt to open the roof covering system in threatening weather. Reseal all openings prior to suspension of work the same day.

3.1.4 Masonry

Sawcut and remove masonry so as to prevent damage to surfaces to remain and to facilitate the installation of new work. Where new masonry adjoins existing, abut or tie the new work into the existing construction as specified for the new work. Provide square, straight edges and corners where existing masonry adjoins new work and other locations..

Continue the bond of adjoining walls when performing masonry infill and repairs. Alternate head joints between courses. Patch masonry holes and smooth uneven surfaces that become exposed. Match the texture of adjacent painted surfaces by applying additional coats of block filler and paint to unpainted masonry units.

Restore wall constructions using masonry shapes matching that adjoining. Install concrete masonry unit lintels with adequate jamb bearing. Create smooth, continuous replacement jambs with double corner concrete masonry units where exposed. Bore holes in hollow metal jambs to anchor frames and solidly grout in place. Repair hollow metal frame holes with smooth, seamless patches. Caulk both sides of frame perimeters and jamb feet for a neat finish.

Repair surfaces that become exposed where deconstruction removes masonry walls flush with masonry to remain. Grind protruding horizontal joint reinforcement below finished surfaces. Repair wall penetrations, patch holes and install concrete masonry unit shells to restore surfaces to smooth substrates. Match the texture of adjacent painted surfaces by applying additional coats of block filler and paint to unpainted concrete masonry units.

3.1.5 Wallboard

Dispose of wallboard and similar gypsum items.

3.1.6 Concrete

Saw concrete along straight lines to a depth of a minimum 2 inch. Make each cut in walls perpendicular to the face and in alignment with the cut in the opposite face. Break out the remainder of the concrete provided that the broken area is concealed in the finished work, and the remaining concrete is sound. At locations where the broken face cannot be concealed, grind smooth or saw cut entirely through the concrete. Sawcuts in existing concrete sidewalks and curbs must be at the nearest existing expansion joint or weakened plane joint and at full depth.

Restore concrete to a thickness matching that adjoining.

3.1.7 Finish Flooring Removal

Use hand tools and similar methods that do not create excessive dust when separating non hazardous floor covering compositions from substrates. Do not sand, drill, saw, blast or mechanically abrade floor coverings. Dampen flooring debris when dry sweeping or dry scraping produces excessive dusting. Do not saturate floors or debris. Remove residual adhesive using mechanical cleaning methods. Do not use hydrocarbon petrochemicals or solvents to alter adhesive composition.

Remove contaminants using mechanical cleaning equipment with vacuum debris containment in accordance with ASTM F710. Use mechanical cleaning methods

such as abrasive blasting, diamond grinding or similar methods to remove dust, dirt, grease, oil, alkaline salts, laitance, mold, mildew, residual adhesive, mastic, adhesive remover, coatings, sealers, curing compound films, silicate penetrating curing compounds and moisture from floor substrates that adversely affect patching underlayment compound or glue adhesion.

Test for moisture vapor emission. Do not proceed with installation when vapor pressures exceed 3 pounds per 1,000 square feet. Test concrete substrates for alkalinity to confirm proper adhesion. The presence or integrity of vapor retarders or barriers cannot be reasonably verified for slab on grade substrates present. Furnish a suitable surface moisture suppression membrane addressing conditions encountered including, but not limited to, concrete moisture content, surface profile and contamination.

3.1.8 Textured Coating Removal

Prepare concrete and masonry surfaces for recoating using hand tools and similar methods to remove efflorescence, dust, dirt, grease and oil. Roughen surfaces to remove glaze. Remove loose, chipped, peeling or blistered coatings by scraping and sanding. Dampen coating residue when dry sweeping or dry scraping produces excessive dusting. Do not saturate floors or debris. Remove residual adhered texture using mechanical cleaning equipment with vacuum debris containment. Use mechanical cleaning methods such as abrasive blasting, diamond grinding or similar methods. Test for alkalinity and moisture content to ensure recoating adhesion. Specially prepare newly exposed surfaces to match the texture of adjoining surfaces. Remove residue from substrates that adversely affects adhesion and appearance of scheduled recoating.

3.1.9 Structural Steel

Dismantle structural steel at field connections and in a manner that will prevent bending or damage. Salvage and recycle structural steel, steel joists, girders, angles, plates, columns and shapes. Transport structural steel shapes to a designated material recovery facility, stacked according to size, type of member and length, and stored off the ground, protected from the weather.

3.1.10 Miscellaneous Metal

Salvage shop-fabricated items such as access doors and frames, steel gratings, metal ladders, wire mesh partitions, metal railings, metal windows, suspended ceiling grid and similar items as whole units. Salvage light-gage and cold-formed metal framing, such as steel studs, steel trusses, metal gutters, roofing and siding, metal toilet partitions, toilet accessories and similar items. Recycle scrap metal as part of deconstruction operations. Provide separate containers to collect scrap metal and transport to the material recovery facility, in accordance with the Waste Management Plan.

3.1.11 Carpentry

Dispose of lumber, millwork items, finished boards and similar wood items.

3.1.12 Acoustic Ceiling Tile

Remove, neatly stack, and recycle acoustic ceiling tiles. Recycling may be available with manufacturer. Otherwise, give priority to a local

recycling organization. Recycling is not required if the tiles contain or may have been exposed to asbestos material.

3.1.13 Patching

Where removals leave holes and damaged surfaces exposed in the finished work, patch and repair these holes and damaged surfaces to match adjacent finished surfaces, using on-site materials when available. Where new work is to be applied to existing surfaces, perform removals and patching in a manner to produce surfaces suitable for receiving new work. Make finished surfaces of patched area flush with the adjacent existing surface and match the existing adjacent surface as closely as possible to texture and finish. Provide patching as specified and indicated, and include the following:

a. Concrete and Masonry: Completely fill holes and depressions, caused by previous physical damage or left as a result of removals in existing masonry walls to remain, with an approved masonry patching material, applied in accordance with the manufacturer's printed instructions.

3.1.14 Air Conditioning Equipment

Remove air conditioning, refrigeration, and other equipment containing refrigerants without releasing chlorofluorocarbon refrigerants to the atmosphere in accordance with the Clean Air Act Amendment of 1990. Recover refrigerants prior to removing air conditioning, refrigeration, and other equipment and dispose of in accordance with the paragraph entitled "Disposal of Ozone Depleting Substance (ODS)." Turn in salvaged Class I ODS refrigerants as specified in paragraph, "Salvaged Materials and Equipment."

3.1.15 Cylinders and Canisters

Remove fire suppression system cylinders and canisters and dispose of in accordance with the paragraph entitled "Disposal of Ozone Depleting Substance (ODS)."

3.1.16 Locksets on Swinging Doors

Remove locksets from deconstructed swinging doors. Deliver the locksets and related items to a designated location for receipt by the Contracting Officer after removal.

3.1.17 Mechanical Equipment and Fixtures

Disconnect mechanical hardware at the nearest connection to existing services to remain, unless otherwise noted. Disconnect mechanical equipment and fixtures at fittings. Transport salvaged equipment and fixtures, including motors and machines, to the material recovery facility as directed by the Contracting Officer. Do not remove equipment until approved.

3.1.17.1 Preparation for Storage

Remove water, dirt, dust, and foreign matter; drain tanks, piping and fixtures; if previously used to store flammable, explosive, or other dangerous liquids, store piping outdoors until all fumes and residues are removed.

3.1.17.2 Piping

Disconnect piping at unions, flanges and valves, and fittings as required to reduce the pipe into straight lengths for practical storage. If the piping that remains can become pressurized due to upstream valve failure, attach end caps, blind flanges, or other types of plugs or fittings with a pressure gage and bleed valve to the open end of the pipe to ensure positive leak control. Carefully dismantle piping that previously contained gas, gasoline, oil, or other dangerous fluids, with precautions taken to prevent injury to persons and property. Store piping outdoors until all fumes and residues are removed. Classify piping not designated for salvage, or not reusable, as scrap metal.

3.1.17.3 Ducts

Classify removed duct work as scrap metal.

3.1.17.4 Fixtures, Motors and Machines

Remove and salvage fixtures, motors and machines associated with plumbing, heating, air conditioning, refrigeration, and other mechanical system installations. Salvage, box and store auxiliary units and accessories with the main motor and machines. Tag salvaged items for identification, storage, and protection from damage. Classify non-porcelain broken, damaged, or otherwise unserviceable units and not caused to be broken, damaged, or otherwise unserviceable as debris to be disposed of by the Contractor.

3.1.18 Electrical Equipment and Fixtures

Salvage motors, motor controllers, and operating and control equipment that are attached to the driven equipment. Salvage wiring systems and components. Box loose items and tag for identification. Disconnect primary, secondary, control, communication, and signal circuits at the point of attachment to their distribution system.

3.1.18.1 Fixtures

Remove and salvage electrical fixtures and deliver to the material recovery facility. Salvage incandescent, mercury-vapor, and fluorescent lamps and fluorescent ballasts manufactured prior to 1978, boxed and tagged for identification, and protected from breakage.

3.1.18.2 Electrical Devices

Remove and salvage switches, switchgear, transformers, conductors including wire and nonmetallic sheathed and flexible armored cable, regulators, meters, instruments, plates, circuit breakers, panelboards, outlet boxes, and similar items. Box and tag these items for identification according to type and size.

3.1.18.3 Wiring Ducts or Troughs

Remove and salvage wiring ducts or troughs. Dismantle plug-in ducts and wiring troughs into unit lengths. Remove plug-in or disconnecting devices from the busway and store separately.

3.1.18.4 Conduit and Miscellaneous Items

Salvage conduit except where embedded in concrete or masonry and deliver to the material recovery facility. Consider corroded, bent, or damaged conduit as scrap metal. Classify supports, knobs, tubes, cleats, and straps as debris to be removed and disposed.

3.1.19 Items With Unique/Regulated Disposal Requirements

Remove and dispose of items with unique or regulated disposal requirements in the manner dictated by law or in the most environmentally responsible manner.

3.2 DISPOSITION OF MATERIAL

3.2.1 Title to Materials

Except for salvaged items specified in related Sections, and for materials or equipment scheduled for salvage, materials and equipment removed and not reused, recycled or salvaged, become the property of the Contractor and must be removed from Government property. Materials approved for storage by the Contracting Officer must be removed before completion of the contract. Title to materials resulting from deconstruction, and materials and equipment to be removed, is vested in the Contractor upon approval by the Contracting Officer. The Government will not be responsible for the condition or loss of, or damage to, such property after contract award. Showing for sale or selling materials and equipment on site is prohibited.

3.2.2 Reuse of Materials and Equipment

Remove and store materials and equipment to be reused to prevent damage, and reinstall as the work progresses. Coordinate the re-use of materials and equipment with the re-use requirements in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL. Capture re-use of materials in the diversion calculations for the project.

3.2.3 Salvaged Materials and Equipment

Remove materials and equipment that are to remain the property of the Government, and deliver to a storage site as directed or to the material recovery facility.

a. Salvage items and material to the maximum extent possible.

b. Store materials salvaged for the Contractor as approved by the Contracting Officer and remove from Government property before completion of the contract. Coordinate the salvaged materials with tracking requirements in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL. Capture salvaged materials in the diversion calculations for the project.

c. Remove salvaged items to remain the property of the Government in a manner to prevent damage, and packed or crated to protect the items from damage while in storage or during shipment.

d. Remove and capture all Class I ODS refrigerants in accordance with the Clean Air Act Amendment of 1990, and turn in to the Navy as directed by the Commanding Officer.

3.2.4 Disposal of Ozone Depleting Substance (ODS)

Class I and Class II ODS are defined in Section, 602(a) and (b), of The Clean Air Act. Prevent discharge of Class I and Class II ODS to the atmosphere. Place recovered ODS in cylinders meeting AHRI Guideline K suitable for the type ODS (filled to no more than 80 percent capacity) and provide appropriate labeling. Remove recovered ODS from Government property and dispose of in accordance with 40 CFR 82. Dispose products, equipment and appliances containing ODS in a sealed, self-contained system (e.g. residential refrigerators and window air conditioners) in accordance with 40 CFR 82. Submit Receipts or bills of lading, as specified. Submit a shipping receipt or bill of lading for all containers of ozone depleting substance (ODS) shipped to the Defense Depot, Richmond, Virginia.

3.2.4.1 Special Instructions

No more than one type of ODS is permitted in each container. Apply a warning/hazardous label to the containers in accordance with Department of Transportation regulations. Provide a tag with the following information on all cylinders including but not limited to fire extinguishers, spheres, or canisters containing an ODS:

a. Activity name and unit identification code

b. Activity point of contact and phone number

c. Type of ODS and pounds of ODS contained

d. Date of shipment

e. National stock number (for information, call (804) 279-4525).

3.2.4.2 Fire Suppression Containers

Deactivate fire suppression system cylinders and canisters with electrical charges or initiators prior to shipment. Also, safety caps must be used to cover exposed actuation mechanisms and discharge ports on these special cylinders.

3.2.5 Transportation Guidance

Ship all ODS containers in accordance with MIL-STD-129, DLA 4145.25 (also referenced one of the following: Army Regulation 700-68, Naval Supply Instruction 4440.128C, Marine Corps Order 10330.2C, and Air Force Regulation 67-12), 49 CFR 173.301, and DOD 4000.25-1-M.

3.2.6 Unsalvageable and Non-Recyclable Material

Dispose of unsalvageable and non-recyclable noncombustible material.

3.3 CLEANUP

Remove debris and rubbish. Remove and transport the debris in a manner that prevents spillage on streets or adjacent areas. Apply local regulations regarding hauling and disposal.

3.4 DISPOSAL OF REMOVED MATERIALS

3.4.1 Regulation of Removed Materials

Dispose of debris, rubbish, and other nonsalvageable materials resulting from removal operations with all applicable federal, state and local regulations as contractually specified in the Waste Management Plan.

3.4.2 Removal to Spoil Areas on Government Property

Transport noncombustible materials removed from deconstructed structures to designated spoil areas on Government property.

3.4.3 Removal from Government Property

Transport waste materials removed from deconstructed structures, except waste soil, from Government property for legal disposal. Dispose of waste soil as directed.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 03 30 00

CAST-IN-PLACE CONCRETE
02/19, CHG 10: 08/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 117	(2010; R 2015) Specifications for Tolerances for Concrete Construction and Materials and Commentary
ACI 121R	(2008) Guide for Concrete Construction Quality Systems in Conformance with ISO 9001
ACI 301	(2020) Specifications for Structural Concrete
ACI 302.1R	(2015) Guide for Concrete Floor and Slab Construction
ACI 304.2R	(2017) Guide to Placing Concrete by Pumping Methods
ACI 304R	(2000; R 2009) Guide for Measuring, Mixing, Transporting, and Placing Concrete
ACI 305R	(2020) Guide to Hot Weather Concreting
ACI 306R	(2016) Guide to Cold Weather Concreting
ACI MNL-2	(2019; 11th Edition) ACI Manual of Concrete Inspection
ACI MNL-15	(2020) Field Reference Manual: Specifications for Concrete Construction ACI 301-20 with Selected ACI References
ACI SPEC 308.1	>(2023) External Curing of Cast-in-Place Concrete - Specification

AMERICAN WELDING SOCIETY (AWS)

AWS D1.4/D1.4M	(2018) Structural Welding Code - Reinforcing Steel

ASTM INTERNATIONAL (ASTM)

ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated,

	Welded and Seamless
ASTM A184/A184M	(2024) Standard Specification for Welded Deformed Steel Bar Mats for Concrete Reinforcement
ASTM A615/A615M	(2025) Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A706/A706M	(2024) Standard Specification for Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM A780/A780M	(2020) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM A884/A884M	(2019; Errata 1) Standard Specification for Epoxy-Coated Steel Wire and Welded Wire Reinforcement
ASTM A934/A934M	(2022) Standard Specification for Epoxy-Coated Prefabricated Steel Reinforcing Bars
ASTM A996/A996M	(2016) Standard Specification for Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
ASTM A1022/A1022M	(2016b) Standard Specification for Deformed and Plain Stainless Steel Wire and Welded Wire for Concrete Reinforcement
ASTM A1060/A1060M	(2016b) Standard Specification for Zinc-Coated (Galvanized) Steel Welded Wire Reinforcement, Plain and Deformed, for Concrete
ASTM A1064/A1064M	(2024) Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
ASTM C31/C31M	(2025a) Standard Practice for Making and Curing Concrete Test Specimens in the Field
ASTM C33/C33M	(2024a) Standard Specification for Concrete Aggregates
ASTM C39/C39M	(2024) Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
ASTM C42/C42M	(2020) Standard Test Method for Obtaining and Testing Drilled Cores and Sawed Beams of Concrete
ASTM C78/C78M	(2022) Standard Test Method for Flexural

	Strength of Concrete (Using Simple Beam with Third-Point Loading)
ASTM C94/C94M	(2025) Standard Specification for Ready-Mixed Concrete
ASTM C136/C136M	(2019) Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
ASTM C138/C138M	(2024a) Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete
ASTM C143/C143M	(2020) Standard Test Method for Slump of Hydraulic-Cement Concrete
ASTM C150/C150M	(2024) Standard Specification for Portland Cement
ASTM C172/C172M	(2017) Standard Practice for Sampling Freshly Mixed Concrete
ASTM C173/C173M	(2024a) Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C231/C231M	(2024) Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C260/C260M	(2024) Standard Specification for Air-Entraining Admixtures for Concrete
ASTM C311/C311M	(2025) Standard Test Methods for Sampling and Testing Fly Ash or Natural Pozzolans for Use in Portland-Cement Concrete
ASTM C330/C330M	(2017a) Standard Specification for Lightweight Aggregates for Structural Concrete
ASTM C494/C494M	(2024) Standard Specification for Chemical Admixtures for Concrete
ASTM C567/C567M	(2019) Determining Density of Structural Lightweight Concrete
ASTM C595/C595M	(2024) Standard Specification for Blended Hydraulic Cements
ASTM C618	(2025a) Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
ASTM C845/C845M	(2018) Standard Specification for Expansive Hydraulic Cement
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants

ASTM C989/C989M	(2024) Standard Specification for Slag Cement for Use in Concrete and Mortars
ASTM C1012/C1012M	(2024) Standard Test Method for Length Change of Hydraulic-Cement Mortars Exposed to a Sulfate Solution
ASTM C1077	(2026) Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation
ASTM C1107/C1107M	(2020) Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
ASTM C1157/C1157M	(2023) Standard Performance Specification for Hydraulic Cement
ASTM C1218/C1218M	(2020c) Standard Test Method for Water-Soluble Chloride in Mortar and Concrete
ASTM C1240	(2020) Standard Specification for Silica Fume Used in Cementitious Mixtures
ASTM C1260	(2023) Standard Test Method for Potential Alkali Reactivity of Aggregates (Mortar-Bar Method)
ASTM C1293	(2008; R 2015) Standard Test Method for Determination of Length Change of Concrete Due to Alkali-Silica Reaction
ASTM C1567	(2025) Standard Test Method for Determining the Potential Alkali-Silica Reactivity of Combinations of Cementitious Materials and Aggregate (Accelerated Mortar-Bar Method)
ASTM C1602/C1602M	(2022) Standard Specification for Mixing Water Used in Production of Hydraulic Cement Concrete
ASTM C1778	(2023) Standard Guide for Reducing the Risk of Deleterious Alkali-Aggregate Reaction in Concrete
ASTM D1751	(2018) Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D1752	(2018) Standard Specification for Preformed Sponge Rubber, Cork and Recycled PVC Expansion Joint Fillers for Concrete Paving and Structural Construction

ASTM D2628	(1991; R 2016) Standard Specification for Preformed Polychloroprene Elastomeric Joint Seals for Concrete Pavements
ASTM D2835	(1989; R 2017) Standard Specification for Lubricant for Installation of Preformed Compression Seals in Concrete Pavements
ASTM D5759	(2012; R 2020) Characterization of Coal Fly Ash and Clean Coal Combustion Fly Ash for Potential Uses
ASTM D6690	(2021) Standard Specification for Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E329	(2023) Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
ASTM E1155	(2020) Standard Test Method for Determining Floor Flatness and Floor Levelness Numbers
ASTM E1643	(2018a) Standard Practice for Selection, Design, Installation, and Inspection of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs
ASTM E1745	(2017; R 2023) Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs

COMPOSITE PANEL ASSOCIATION (CPA)

ANSI/CPA A135.4	(2012; R2020) Basic Hardboard

CONCRETE REINFORCING STEEL INSTITUTE (CRSI)

CRSI RB4.1	(2016) Supports for Reinforcement Used in Concrete
CRSI SP0001-31-DL-I	(2024) Manual of Standard Practice

NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)

NIST PS 1	(2009) DOC Voluntary Product Standard PS 1-07, Structural Plywood

U.S. ARMY CORPS OF ENGINEERS (USACE)

COE CRD-C 104	(1980) Method of Calculation of the Fineness Modulus of Aggregate

1.2 DEFINITIONS

a. "Cementitious material" as used herein includes all portland cement, pozzolan, fly ash, slag cement, and silica fume.

b. "Exposed to public view" means situated so that it can be seen from eye level from a public location after completion of the building. A public location is accessible to persons not responsible for operation or maintenance of the building.

c. "Chemical admixtures" are materials in the form of powder or fluids that are added to the concrete to give it certain characteristics not obtainable with plain concrete mixes.

d. "Supplementary cementing materials" (SCM) include coal fly ash, silica fume, slag cement, natural or calcined pozzolans, and ultra-fine coal ash when used in such proportions to replace the portland cement that result in improvement to sustainability and durability and reduced cost.

e. "Design strength" (f'c) is the specified compressive strength of concrete at time(s) specified in this section to meet structural design criteria.

f. "Mass Concrete" is any concrete system that approaches a maximum temperature of 158 degrees F within the first 72 hours of placement. In addition, it includes all concrete elements with a section thickness of 3 feet or more regardless of temperature.

g. "Mixture proportioning" is the process of designing concrete mixture proportions to enable it to meet the strength, service life and constructability requirements of the project while minimizing the initial and life-cycle cost.

h. "Mixture proportions" are the masses or volumes of individual ingredients used to make a unit measure (cubic meter or cubic yard) of concrete.

i. "Pozzolan" is a siliceous or siliceous and aluminous material, which in itself possesses little or no cementitious value but will, in finely divided form and in the presence of moisture, chemically react with calcium hydroxide at ordinary temperatures to form compounds possessing cementitious properties.

j. "Workability (or consistence)" is the ability of a fresh (plastic) concrete mix to fill the form/mould properly with the desired work (vibration) and without reducing the concrete's quality. Workability depends on water content, chemical admixtures, aggregate (shape and size distribution), cementitious content and age (level of hydration).

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Quality Control Program; G

Quality Control Personnel Certifications; G

Quality Control Organizational Chart

Laboratory Accreditation; G

SD-02 Shop Drawings

Reinforcing Steel; G

SD-03 Product Data

Joint Sealants; S

Joint Filler; S

Formwork Materials

Recycled Aggregate Materials; S

Cementitious Materials; S

Vapor Retarder

Concrete Curing Materials

Reinforcement; S

Admixtures

Mechanical Reinforcing Bar Connectors

Biodegradable Form Release Agent

Nonshrink Grout

SD-05 Design Data

Construction and Movement Joints Locations and Details; G

Concrete Mix Design; G

SD-06 Test Reports

Concrete Mix Design; G

Fly Ash; G

Pozzolan; G

Slag Cement; G

Aggregates; G

Portland Cement; G

Tolerance ReportCompressive Strength Tests; G

Unit Weight of Structural Concrete

Air Content

Slump Tests

Water

SD-07 Certificates

Reinforcing Bars

Welder Qualifications

Field Testing Technician and Testing Agency

SD-08 Manufacturer's Instructions

Joint Sealants; S

Curing Compound

1.4 MODIFICATION OF REFERENCES

Accomplish work in accordance with ACI publications except as modified herein. Consider the advisory or recommended provisions to be mandatory. Interpret reference to the "Building Official," the "Structural Engineer," and the "Architect/Engineer" to mean the Contracting Officer.

1.5 DELIVERY, STORAGE, AND HANDLING

Follow ACI 301, ACI 304R and ASTM A934/A934M requirements and recommendations. Do not deliver concrete until vapor retarder, forms, reinforcement, embedded items, and chamfer strips are in place and ready for concrete placement. Do not store concrete curing compounds or sealers with materials that have a high capacity to adsorb volatile organic compound (VOC) emissions. Do not store concrete curing compounds or sealers in occupied spaces.

1.5.1 Reinforcement

Store reinforcement of different sizes and shapes in separate piles or racks raised above the ground to avoid excessive rusting. Protect from contaminants such as grease, oil, and dirt. Ensure bar sizes can be accurately identified after bundles are broken and tags removed.

1.6 QUALITY ASSURANCE

1.6.1 Design Data

1.6.1.1 Concrete Mix Design

Sixty days minimum prior to concrete placement, submit a mix design for each strength and type of concrete. Submit all documentation required in ACI 301 Section 4 and as specified in this section. Submit a complete list of materials including type; brand; source and amount of cement, supplementary cementitious materials, and admixtures; and applicable reference specifications. Submit mill test and all other test for cement, supplementary cementitious materials, aggregates, and admixtures. Provide

documentation of maximum nominal aggregate size, gradation analysis, percentage retained and passing sieve, and a graph of percentage retained verses sieve size. Provide mix proportion data using at least three different water-cementitious material ratios for each type of mixture, which produce a range of strength encompassing those required for each type of concrete required. If source material changes, resubmit mix proportion data using revised source material. Provide only materials that have been proven by trial mix studies to meet the requirements of this specification, unless otherwise approved in writing by the Contracting Officer. Indicate clearly in the submittal where each mix design is used when more than one mix design is submitted. Resubmit data on concrete components if the qualities or source of components changes. Required average strength can be documented by field experience if field strength test data are available and represent a single group of at least 10 consecutive strength tests for one mixture, using materials and conditions similar to those expected for work, and encompassing a period of not less than 45 days. The average of field strength tests must equal or exceed fcr'. Changes in materials, conditions, and proportions within the test record must not have been more closely restricted than those for the proposed work. Test records must not be more than 24 months old. Obtain mix design approval from the contracting officer prior to concrete placement.

1.6.2 Shop Drawings

1.6.2.1 Reinforcing Steel

Indicate bending diagrams, assembly diagrams, splicing and laps of bars, shapes, dimensions, and details of bar reinforcing, accessories, and concrete cover. Do not scale dimensions from structural drawings to determine lengths of reinforcing bars. Reproductions of contract drawings are unacceptable.

1.6.3 Test Reports

1.6.3.1 Fly Ash and Pozzolan

Submit test results in accordance with ASTM C618 for fly ash and pozzolan. Submit test results performed within 6 months of submittal date.

1.6.3.2 Slag Cement

Submit test results in accordance with ASTM C989/C989M for slag cement. Submit test results performed within 6 months of submittal date.

1.6.3.3 Aggregates

Submit test results in accordance with ASTM C33/C33M, or ASTM C330/C330M for lightweight aggregate, and ASTM C1293 or ASTM C1567 as required in the paragraph titled ALKALI-AGGREGATE REACTION.

1.6.4 Quality Control Program

Develop and submit for approval a concrete quality control program in accordance with the guidelines of ACI 121R and as specified herein. Include approved laboratories. Provide direct oversight for the concrete qualification program inclusive of associated sampling and testing. Provide all quality control reports to the Contracting Officer, Quality Manager and Concrete Supplier. Maintain a copy of ACI MNL-15 and

CRSI SP0001-31-DL-I at project site.

1.6.5 Quality Control Personnel Certifications

Submit for approval the responsibilities of the various quality control personnel, including the names and qualifications of the individuals in those positions and a quality control organizational chart defining the quality control hierarchy and the responsibility of the various positions. Quality control personnel must be employed by the Contractor.

Submit American Concrete Institute certification for the following:

a. CQC personnel responsible for inspection of concrete operations.

b. Lead Foreman or Journeyman of the Concrete Placing, Finishing, and Curing Crews.

c. Field Testing Technicians: ACI Concrete Field Testing Technician, Grade I.

1.6.5.1 Quality Manager Qualifications

Holds a current license as a professional engineer in a U.S. state or territory with experience on at least five similar projects. Evidence of extraordinary proven experience may be considered by the Contracting Officer as sufficient to act as the Quality Manager.

1.6.5.2 Field Testing Technician and Testing Agency

Submit data on qualifications of proposed testing agency and technicians for approval by the Contracting Officer prior to performing testing on concrete.

a. Work on concrete under this contract must be performed by an ACI Concrete Field Testing Technician Grade 1 qualified in accordance with ACI MNL-2 or equivalent. Equivalent certification programs must include requirements for written and performance examinations as stipulated in ACI MNL-2.

b. Testing agencies that perform testing services on reinforcing steel must meet the requirements of ASTM E329.

c. Testing agencies that perform testing services on concrete materials must meet the requirements of ASTM C1077.

1.6.6 Laboratory Qualifications for Concrete Qualification Testing

The concrete testing laboratory must have the necessary equipment and experience to accomplish required testing. The laboratory must meet the requirements of ASTM C1077 and be Cement and Concrete Reference Laboratory (CCRL) inspected.

1.6.7 Laboratory Accreditation

Laboratory and testing facilities are provided by and at the expense of the Contractor. The laboratories performing the tests must be accredited in accordance with ASTM C1077, including ASTM C78/C78M and ASTM C1260. The accreditation must be current and must include the required test methods, as specified. Furthermore, comply with the following

requirements:

a. Aggregate Testing and Mix Proportioning: Studies performed by an accredited laboratory and under the direction of a registered professional engineer in a U.S. state or territory competent in concrete materials who is competent in concrete materials and must sign all reports and designs.

b. Acceptance Testing: Furnish all materials, labor, and facilities required for molding, curing, testing, and protecting test specimens at the site and in the laboratory. Furnish and maintain boxes or other facilities suitable for storing and curing the specimens at the site while in the mold within the temperature range stipulated by ASTM C31/C31M.

c. Contractor Quality Control: All sampling and testing must be performed by an approved, onsite, independent, accredited laboratory.

1.7 ENVIRONMENTAL REQUIREMENTS

Provide space ventilation according to material manufacturer recommendations, at a minimum, during and following installation of concrete curing compound and sealer. Maintain one of the following ventilation conditions during the curing period or for 72 hours after installation:

a. Supply 100 percent outside air 24 hours a day.

b. Supply airflow at a rate of 6 air changes per hour, when outside temperatures are between 55 degrees F and 84 degrees F and humidity is between 30 percent and 60 percent.

c. Supply airflow at a rate of 1.5 air changes per hour, when outside air conditions are not within the range stipulated above.

1.7.1 Submittals for Environmental Performance

a. Provide data indication the percentage of post-industrial pozzolan (fly ash, slag cement) cement substitution as a percentage of the full product composite by weight.

b. Provide data indicating the percentage of post-industrial and post-consumer recycled content aggregate.

c. Provide product data indicating the percentage of post-consumer recycled steel content in each type of steel reinforcement as a percentage of the full product composite by weight.

d. Provide product data stating the location where all products were manufactured

e. For projects using FSC certified formwork, provide chain-of-custody documentation for all certified wood products.

f. For projects using reusable formwork, provide data showing how formwork is reused.

g. Provide SDS product information data showing that form release agents meet any environmental performance goals such as using vegetable and

soy based products.

h. Provide SDS product information data showing that concrete adhesives meet any environmental performance goals including low emitting, low volatile organic compound products.

1.8 QUALIFICATIONS FOR WELDING WORK

Welding procedures must be in accordance with AWS D1.4/D1.4M.

Verify that Welder qualifications are in accordance with AWS D1.4/D1.4M for welding of reinforcement or under an equivalent qualification test approved in advance. Welders are permitted to do only the type of welding for which each is specifically qualified.

PART 2 PRODUCTS

2.1 FORMWORK MATERIALS

a. Form-facing material in contact with concrete must be lumber,. Submit product information on proposed form-facing materials if different from that specified herein.

b. Design formwork, shores, reshores, and backshores to support loads transmitted to them and to comply with applicable building code requirements.

c. Design formwork and shoring for load redistribution resulting from stressing of post-tensioned reinforcement. Ensure that formwork allows movement resulting from application of prestressing force.

d. Design formwork to withstand pressure resulting from placement and vibration of concrete and to maintain specified tolerances.

e. Design formwork to accommodate waterstop materials in joints at locations indicated in Contract Documents.

f. Provide temporary openings in formwork if needed to facilitate cleaning and inspection.

g. Design formwork joints to inhibit leakage of mortar.

h. Limit deflection of facing materials for concrete surfaces exposed to view to 1/400 of center-to-center spacing of facing supports.

i. Submit product information on proposed form-facing materials if different from that specified herein.

j. Submit procedure for reshoring and backshoring, including drawings signed and sealed by a licensed design engineer. Include on shop drawings the formwork removal procedure and magnitude of construction loads used for design of reshoring or backshoring system. Indicate in procedure the magnitude of live and dead loads assumed for required capacity of the structure at time of reshoring or backshoring.

k. Submit manufacturer's product data on form liner proposed for use with each formed surface.

2.1.1 Wood Forms

Provide lumber that is square edged or tongue-and-groove boards, free of raised grain, knotholes, or other surface defects. Provide plywood that complies with NIST PS 1, B-B concrete form panels or better or ANSI/CPA A135.4, hardboard for smooth form lining.

2.1.1.1 Concrete Form Plywood (Standard Rough)

Provide plywood that conforms to NIST PS 1, B-B, concrete form, not less than 5/8-inch thick.

2.2 FORMWORK ACCESSORIES

a. Use commercially manufactured formwork accessories, including ties and hangers.

b. Form ties and accessories must not reduce the effective cover of the reinforcement.

2.2.1 Form Ties

a. Use form ties with ends or end fasteners that can be removed without damage to concrete.

b. Where indicated in Contract Documents, use form ties with integral water barrier plates or other acceptable positive water barriers in walls.

c. The breakback distance for ferrous ties must be at least 3/4 in. for Surface Finish-2.0 or Surface Finish-3.0, as defined in ACI 301.

d. If the breakback distance is less than 3/4 in., use coated or corrosion-resistant ties.

e. Submit manufacturer's data sheet on form ties.

2.2.2 Biodegradable Form Release Agent

a. Provide form release agent that is colorless, biodegradable, and water-based, with a zero VOC content.

b. Provide product that does not bond with, stain, or adversely affect concrete surfaces and does not impair subsequent treatments of concrete surfaces.

c. Provide form release agent that reduces formwork moisture absorption, and does not contain diesel fuel, petroleum-based lubricating oils, waxes, or kerosene. Submit documentation indicating type of biobased material in product and biobased content. Indicate relative dollar value of biobased content products to total dollar value of products included in project.

d. Submit manufacturer's product data on formwork release agent for use on each form-facing material.

2.2.3 Chamfer Materials

Use lumber materials with dimensions of 3/4 x 3/4 in.

2.2.4 Construction and Movement Joints Locations and Details

a. Submit details and locations of construction joints in accordance with the requirements herein.

b. Locate construction joints within middle one-third of spans of slabs, beams, and girders. If a beam intersects a girder within the middle one-third of girder span, the distance between the construction joint in the girder and the edge of the beam must be at least twice the width of the larger member.

c. For members with post-tensioning tendons, locate construction joints where tendons pass through centroid of concrete section.

d. Locate construction joints in walls and columns at underside of slabs, beams, or girders and at tops of footings or slabs.

e. Make construction joints perpendicular to main reinforcement.

f. Provide movement joints where indicated in Contract Documents or in accepted alternate locations.

g. Submit location and detail of movement joints if different from those indicated in Contract Documents.

h. Submit manufacturer's data sheet on expansion joint materials.

i. Provide keyways where indicated in Contract Documents.

2.2.5 Other Embedded items

Use sleeves, inserts, anchors, and other embedded items of material and design indicated in Contract Documents.

2.3 CONCRETE MATERIALS

2.3.1 Cementitious Materials

2.3.1.1 Portland Cement

a. Unless otherwise specified, provide cement that conforms to ASTM C150/C150M Type II .

b. Use one brand and type of cement for formed concrete having exposed-to-view finished surfaces.

c. For portland cement manufactured in a kiln fueled by hazardous waste, maintain a record of source for each batch.

d. Submit information along with evidence demonstrating compliance with referenced standards. Include types of cementitious materials, manufacturing locations, shipping locations, and certificates showing compliance.

e. Store cementitious materials and keep dry and free from contaminants.

2.3.1.2 Fly Ash

a. ASTM C618, Class F, except that the maximum allowable loss on ignition must not exceed 3 percent.

b. If fly ash is used it must range from 15 to 20 percent by weight of cementitious material, provided the fly ash does not reduce the amount of cement in the concrete mix below the minimum requirements of local building codes. Do not use fly ash when it cannot meet the minimum level. Report the chemical analysis of the fly ash in accordance with ASTM C311/C311M. Evaluate and classify fly ash in accordance with ASTM D5759.

2.3.1.3 Slag Cement

ASTM C989/C989M, Grade 100.

2.3.1.4 Silica Fume

Silica fume must conform to ASTM C1240, including the optional limits on reactivity with cement alkalis. Silica fume may be furnished as a dry, densified material or as slurry. Proper mixing is essential to accomplish proper distribution of the silica fume and avoid agglomerated silica fume which can react with the alkali in the cement resulting in premature and extensive concrete damage. Supervision at the batch plant, finishing, and curing is essential.

2.3.1.5 Other Supplementary Cementitious Materials

Natural pozzolan must be raw or calcined and conform to ASTM C618, Class N, including the optional requirement for uniformity.

Ultra Fine Fly Ash (UFFA) and Ultra Fine Pozzolan (UFP) must conform to ASTM C618, Class F or N, and the following additional requirements:

a. The strength activity index at 28 days of age at least 95 percent of the control specimens.

b. The average particle size not exceed 6 microns.

c. The sum of SiO_2 plus Al_2O_3 plus Fe_2O_3 greater than 77 percent.

2.3.2 Water

a. Water or ice must comply with the requirements of ASTM C1602/C1602M.

b. Minimize the amount of water in the mix. Improve workability by adjusting the grading of the aggregate and using admixture rather than by adding water.

c. Provide water potable; free from injurious amounts of oils, acids, alkalis, salts, organic materials, or other substances deleterious to concrete.

d. Protect mixing water and ice from contamination during storage and delivery.

e. Submit test report showing water complies with ASTM C1602/C1602M.

f. When nonpotable source is proposed for use, submit documentation on effects of water on strength and setting time in compliance with ASTM C1602/C1602M.

2.3.3 Aggregate

2.3.3.1 Normal-Weight Aggregate

a. Conform to ASTM C33/C33M unless otherwise specified in the Contract Documents or approved by the contracting officer .

b. Obtain aggregates used in concrete from the same sources and have the same size range as aggregates used in concrete represented by submitted field test records or used in trial mixtures.

c. Provide sand that is at least 50 percent natural sand.

d. Store and handle aggregate in a manner that will avoid segregation and prevents contamination by other materials or other sizes of aggregates. Store aggregates in locations that will permit them to drain freely. Do not use aggregates that contain frozen lumps.

e. Submit types, pit or quarry locations, producers' names, aggregate supplier statement of compliance with ASTM C33/C33M, and ASTM C1293 expansion data not more than 18 months old.

2.3.3.2 Recycled Aggregate Materials

Use a minimum of 25 percent recycled aggregate, depending on local availability and conforming to requirements of the mix design. Recycled aggregate to include: recovered concrete recovered stone that meets the aggregate requirements specified. Submit recycled material request with the aggregate certification submittals and do not use until approved by the Contracting Officer.

2.3.4 Admixtures

a. Chemical admixtures must conform to ASTM C494/C494M.

b. Air-entraining admixtures must conform to ASTM C260/C260M.

c. Do not use calcium chloride admixtures unless approved by the contracting officer.

d.

e. Viscosity modifying admixtures (VMA) must conform to ASTM C494/C494M, Type S.

f. Admixtures used in concrete must be the same as those used in the concrete represented by submitted field test records or used in trial mixtures.

g. Protect stored admixtures against contamination, evaporation, or damage.

h. To ensure uniform distribution of constituents, provide agitating equipment for admixtures used in the form of suspensions or unstable

solutions. Protect liquid admixtures from freezing and from temperature changes that would adversely affect their characteristics.

i. Submit types, brand names, producers' names, manufacturer's technical data sheets, and certificates showing compliance with standards required herein.

2.4 MISCELLANEOUS MATERIALS

2.4.1 Concrete Curing Materials

Provide concrete curing material in accordance with ACI 301 Section 5 and ACI SPEC 308.1 Section 2. Submit product data for concrete curing compound s. Submit manufactures instructions for placement of curing compound.

2.4.2 Nonshrink Grout

Nonshrink grout in accordance with ASTM C1107/C1107M.

2.4.3 Expansion/Contraction Joint Filler

ASTM D1751 or ASTM D1752 Type I or Type II . Provide material 1/2 inch thick, unless otherwise indicated.

2.4.4 Joint Sealants

Submit manufacturer's product data, indicating VOC content.

2.4.4.1 Horizontal Surfaces, 3 Percent Slope, Maximum

ASTM D6690 or ASTM C920, Type M, Class 25, Use T.

2.4.4.2 Preformed Polychloroprene Elastomeric Type

ASTM D2628.

2.4.4.3 Lubricant for Preformed Compression Seals

ASTM D2835.

2.4.5 Vapor Retarder

ASTM E1745 Class A polyethylene sheeting, minimum 10 mil thickness or other equivalent material with a maximum permeance rating of 0.04 perms per ASTM E96/E96M.

Consider plastic vapor retarders and adhesives with a high recycled content, low toxicity low VOC (Volatile Organic Compounds) levels.

2.5 CONCRETE MIX DESIGN

2.5.1 Properties and Requirements

a. Use materials and material combinations listed in this section and the contract documents.

b. Cementitious material content must be adequate for concrete to satisfy the specified requirements for strength, w/cm, durability, and finishability described in this section and the contract documents.

c. The minimum cementitious material content for concrete used in floors must meet the following requirements:

Nominal maximum size of aggregate, in.	Minimum cementitious material content, pounds per cubic yard
1-1/2	470
1	520
3/4	540
3/8	610

d. Selected target slump must meet the requirements of this section, the contract documents, and must not exceed 9 in. Concrete must not show visible signs of segregation.

e. Enforce the target slump for the duration of the project. Determine the slump by ASTM C143/C143M. Slump tolerances must meet the requirements of ACI 117.

f. The nominal maximum size of coarse aggregate for a mixture must not exceed three-fourths of the minimum clear spacing between reinforcement, one-fifth of the narrowest dimension between sides of forms, or one-third of the thickness of slabs or toppings.

g. Concrete must be air entrained for members assigned to Exposure Class F1, F2, or F3, with the total air content in accordance with the requirements of the paragraph titled DURABILITY.

h. Measure air content at the point of delivery in accordance with ASTM C173/C173M or ASTM C231/C231M.

i. Concrete for slabs to receive a hard-troweled finish must not contain an air-entraining admixture or have a total air content greater than 3 percent.

j. Concrete properties and requirements for each portion of the structure are specified in the table below. Refer to the paragraph titled DURABILITY for more details on exposure categories and their requirements.

	Minimum *f'c* psi	Exposure Categories^	Miscellaneous Requirements
Footings	3000 at 28 days	S1 ; C1 ; W1 ; F0	Max. slump: 6 in. Nominal maximum aggregate size must be 1 in.
Slabs-on-ground	4000 at 28 days	S1 ; C1 ; W1 ; F0	

2.5.2 Durability

2.5.2.1 Alkali-Aggregate Reaction

Do not use any aggregate susceptible to alkali-carbonate reaction (ACR). Use one of the three options below for qualifying concrete mixtures to reduce the potential of alkali-silica reaction (ASR):

a. For each aggregate used in concrete, the expansion result determined in accordance with ASTM C1293 must not exceed 0.04 percent at one year.

b. For each aggregate used in concrete, the expansion result of the aggregate and cementitious materials combination determined in accordance with ASTM C1567 must not exceed 0.10 percent at an age of 16 days.

c. Alkali content in concrete (LBA) must not exceed 4 pounds per cubic yard for moderately reactive aggregate or 3 pounds per cubic yard for highly reactive aggregate. Determine reactivity by testing in accordance with ASTM C1293 and categorize in accordance with ASTM C1778. Alkali content is calculated as follows:
LBA = (cement content, pounds per cubic yard) × (equivalent alkali content of portland cement in percent/100 percent)

2.5.2.2 Freezing and Thawing Resistance

a. Provide concrete meeting the following requirements based on exposure class assigned to members for freezing-and-thawing exposure in Contract Documents:

Exposure class	Maximum *w/cm**	Minimum *f'c*, psi	Air content	Additional Requirements
F0	N/A	2500	N/A	
F1	0.55	3500	Depends on aggregate size	N/A
F2	0.45	4500	Depends on aggregate size	See limits on maximum cementitious material by mass
F3	0.40	5000	Depends on aggregate size	See limits on maximum cementitious material by mass
F3 plain concrete	0.45	4500	Depends on aggregate size	See limits on maximum cementitious material by mass

*The maximum *w/cm* limits do not apply to lightweight concrete.

b. Concrete must be air entrained for members assigned to Exposure Class F1, F2, or F3. Meet the requirements of the following table:

Nominal maximum aggregate size, in.	Total air content, percent*^	
	Exposure Class F2 and F3	Exposure Class F1
3/8	7.5	6.0
1/2	7.0	5.5
3/4	6.0	5.0
1	6.0	4.5
1-1/2	5.5	4.5
2	5.0	4.0
3	5.5	3.5

*Tolerance on air content as delivered must be plus/minus 1.5 percent.

^For f'c greater than 5000 psi, reducing air content by 1.0 percentage point is acceptable.

c. Submit documentation verifying compliance with specified requirements.

d. For sections of the structure that are assigned Exposure Class F3, submit certification on cement composition verifying that concrete mixture meets the requirements of the following table:

Cementitious material	Maximum percent of total cementitious material by mass*
Fly ash or other pozzolans conforming to ASTM C618	25
Slag cement conforming to ASTM C989/C989M	50
Silica fume conforming to ASTM C1240	10
Total of fly ash or other pozzolans, slag cement, and silica fume	50^
Total of fly ash or other pozzolans and silica fume	35^

*Total cementitious material also includes ASTM C150/C150M, ASTM C595/C595M, ASTM C845/C845M, and ASTM C1157/C1157M cement. The maximum percentages above must include:

i. Fly ash or other pozzolans present in ASTM C1157/C1157M or ASTM C595/C595M Type IP or Type IT blended cement.

ii. Slag cement present in ASTM C1157/C1157M or ASTM C595/C595M Type IS or Type IT blended cement.

iii. Silica fume conforming to ASTM C1240 present in ASTM C1157/C1157M or ASTM C595/C595M Type IP or Type IT blended cement.

^Fly ash or other pozzolans and silica fume must constitute no more than 25 percent and 10 percent, respectively, of the total mass of the cementitious materials.

2.5.2.3 Corrosion and Chloride Content

a. Provide concrete meeting the requirements of the following table based on the exposure class assigned to members requiring protection against reinforcement corrosion in Contract Documents.

b. Submit documentation verifying compliance with specified requirements.

c. Determine water-soluble chloride ion content contributed from constituents including water, aggregates, cementitious materials, and admixtures for the concrete mixture by ASTM C1218/C1218M at age between 28 and 42 days.

d. The maximum water-soluble chloride ion (Cl-) content in concrete, percent by mass of cement is as follows:

Exposure class	**Maximum *w/cm****	**Minimum f'c, psi**	**Maximum water-soluble chloride ion (CL-) content in concrete, percent by mass of cement**
Reinforced concrete			
C0	N/A	2500	1.00
C1	N/A	2500	0.30
C2	0.4	5000	0.15
Prestressed concrete			
C0	N/A	2500	0.06
C1	N/A	2500	0.06
C2	0.4	5000	0.06

*The maximum w/cm limits do not apply to lightweight concrete.

2.5.2.4 Sulfate Resistance

a. Provide concrete meeting the requirements of the following table based on the exposure class assigned to members for sulfate exposure.

Exposure class	**Maximum w/cm**	**Minimum f'c, psi**	**Required cementitious materials-types**			**Calcium chloride admixture**
			ASTM	**ASTM**	**ASTM**	
S0	N/A	2500	N/A	N/A	N/A	No restrictions
S1	0.50	4000	II*^	Types with (MS) designation	MS	No restrictions
S2	0.45	4500	V^	Types with (HS) designation	HS	Not permitted
S3	0.45	4500	V + pozzolan or slag cement**	Types with (HS) designation plus pozzolan or slag cement**	HS + pozzolan or slag cement**	Not permitted
S3	0.40	5000	V***	Types with (HS) designation	HS	Not permitted

* For seawater exposure, other types of portland cements with tricalcium aluminate (C3A) contents up to 10 percent are acceptable if the w/cm does not exceed 0.40.

** The amount of the specific source of the pozzolan or slag cement to be used must be at least the amount determined by test or service record to improve sulfate resistance when used in concrete containing Type V cement. Alternatively, the amount of the specific source of the pozzolan or slag used must not be less than the amount tested in accordance with ASTM C1012/C1012M and meeting the requirements maximum

expansion requirements listed herein.

*** If Type V cement is used as the sole cementitious material, the optional sulfate requirement of 0.040 percent maximum expansion in ASTM C150/C150M is required.

^ Other available types of cement, such as Type III or Type I, are acceptable in exposure classes S1 or S2 if the C3A contents are less than 8 or 5 percent, respectively.

b. The maximum w/cm limits for sulfate exposure do not apply to lightweight concrete.

c. Alternative combinations of cementitious materials of those listed in this paragraph are acceptable if they meet the maximum expansion requirements listed in the following table:

Exposure class	**Maximum expansion when tested using ASTM C1012/C1012M**		
	At 6 months	**At 12 months**	**At 18 months**
S1	0.10 percent	N/A	N/A
S2	0.05 percent	0.10 percent^	N/A
S3	N/A	N/A	0.10 percent

^The 12-month expansion limit applies only when the measured expansion exceeds the 6-month maximum expansion limit.

2.5.2.5 Concrete Temperature

The temperature of concrete as delivered must not exceed 95 degrees F .

2.5.2.6 Concrete Permeability

a. Provide concrete meeting the requirements of the following table based on exposure class assigned to members requiring low permeability in the Contract Documents.

Exposure class	**Maximum *w/cm****	**Minimum f'c, psi**	**Additional minimum requirements**
W0	N/A	2500	None
W1	0.5	4000	None
W2	0.50	4000	None

*The maximum w/cm limits do not apply to lightweight concrete.

b. Submit documentation verifying compliance with specified requirements.

2.5.3 Trial Mixtures

In accordance with ACI 301.

2.5.4 Ready-Mix Concrete

Provide concrete that meets the requirements of ASTM C94/C94M.

Ready-mixed concrete manufacturer must provide duplicate delivery tickets with each load of concrete delivered. Provide delivery tickets with the following information in addition to that required by ASTM C94/C94M:

a. Type and brand cement

b. Cement and supplementary cementitious materials content in 94-pound bags per cubic yard of concrete

c. Maximum size of aggregate

d. Amount and brand name of admixtures

e. Total water content expressed by water cementitious material ratio

2.6 REINFORCEMENT

Shop Fabricate reinforcing bars to conform to shapes and dimensions indicated for reinforcement, and as follows:

a. Bend reinforcement cold. Reinforcement must be bent cold in the shop to shapes as indicated. Rebending of a reinforcing bar that has been bent incorrectly is not permitted. Bending must be in accordance with the standard approved practice and by approved machine methods. Provide hooks and bends that are in accordance with the Contract Documents. Fabricate reinforcement in accordance with fabricating tolerances of ACI 117.

b. Submit manufacturer's certified test report for reinforcement.

c. Submit placing drawings showing fabrication dimensions and placement locations of reinforcement and reinforcement supports. Indicate locations of splices, lengths of lap splices, and details of mechanical and welded splices.

d. Submit request with locations and details of splices not indicated in Contract Documents.

e. Submit request to place column dowels without using templates.

f. Submit request and procedure to field-bend or straighten reinforcing bars partially embedded in concrete at locations not indicated in Contract Documents. Field bending or straightening of reinforcing bars is permitted where indicated in the Contract Documents

Deliver reinforcing bars bundled, tagged, and marked. Tags must be metal with bar size, length, mark, and other information pressed in by machine. Marks must correspond with those used on the placing drawings.

2.6.1 Reinforcing Bars

a. Deformed, except spirals, load-transfer dowels, and welded wire reinforcement, which may be plain.

b. ASTM A615/A615M with the bars marked S, Grade 60; or ASTM A996/A996M with the bars marked R, Grade 60, or marked A, Grade 60. Provide reinforcing bars that contain a minimum of percent recycled content.

c.

d. Submit mill certificates for reinforcing bars.

2.6.1.1 Bar Mats

a. Conform to ASTM A184/A184M.

b. If coated bar mats are required, repair damaged coating as required in the paragraph titled GALVANIZED REINFORCING BARS EPOXY-COATED REINFORCING BARS and DUAL-COATED REINFORCING BARS.

2.6.2 Mechanical Reinforcing Bar Connectors

a. Provide 125 percent minimum yield strength of the reinforcement bar.

b. Mechanical splices for galvanized reinforcing bars must be galvanized or coated with dielectric material.

c. Mechanical splices used with epoxy-coated or dual-coated reinforcing bars must be coated with dielectric material.

d. Submit data on mechanical splices demonstrating compliance with this paragraph.

2.6.3 Wire

a. Provide wire reinforcement that contains a minimum of 100 percent recycled content. Provide flat sheets of welded wire reinforcement for slabs and toppings.

b. Plain or deformed steel wire must conform to ASTM A1064/A1064M.

c. Stainless steel wire must conform to ASTM A1022/A1022M.

d. Epoxy-coated wire must conform to ASTM A884/A884M. Repair coating damage incurred during shipment, storage, handling, and placing of epoxy-coated wires must be repaired. Repair damaged coating areas with patching material in accordance with material manufacturer's written recommendations. If damaged area exceeds 2 percent of surface area in each linear foot of each wire, wire must not be used. The 2 percent limit on damaged coating area includes repaired areas damaged before shipment as required by ASTM A884/A884M. Fading of coating color is not a cause for rejection of epoxy-coated wire reinforcement.

2.6.4 Welded Wire Reinforcement

a. Use welded wire reinforcement specified in Contract Documents and conforming to one or more of the specifications given herein.

b. Plain welded wire reinforcement must conform to ASTM A1064/A1064M, with welded intersections spaced no greater than 12 in. apart in direction of principal reinforcement.

c. Deformed welded wire reinforcement must conform to ASTM A1064/A1064M, with welded intersections spaced no greater than 16 in. apart in direction of principal reinforcement.

d. Epoxy-coated welded wire reinforcement must conform to ASTM A884/A884M. Repair coating damage incurred during shipment, storage, handling, and placing of epoxy-coated welded wire reinforcement in accordance with ASTM A884/A884M. Repair damaged coating areas with patching material in accordance with material manufacturer's written recommendations. If damaged area exceeds 2 percent of surface area in each linear foot of each wire or welded wire reinforcement, the sheet containing the damaged area must not be used. The 2 percent limit on damaged coating area includes repaired areas damaged before shipment as required by ASTM A884/A884M. Fading of coating color is not a cause for rejection of epoxy-coated welded wire reinforcement.

e. Stainless steel welded wire reinforcement must conform to ASTM A1022/A1022M.

f. Zinc-coated (galvanized) welded wire reinforcement must conform to ASTM A1060/A1060M. Repair coating damage incurred during shipment, storage, handling, and placing of zinc-coated (galvanized) welded wire reinforcement in accordance with ASTM A780/A780M. If damaged area exceeds 2 percent of surface area in each linear foot of each wire or welded wire reinforcement, the sheet containing the damaged area must not be used. The 2 percent limit on damaged coating area includes repaired areas damaged before shipment as required by ASTM A1060/A1060M.

2.6.5 Reinforcing Bar Supports

a. Provide reinforcement support types within structure as required by Contract Documents. Conform to CRSI RB4.1. Submit description of reinforcement supports and materials for fastening coated reinforcement if not in conformance with CRSI RB4.1.

b.

c. Legs of supports in contact with formwork may be hot-dip galvanized, or plastic coated after fabrication, or stainless-steel bar supports.

d.

2.6.6 Dowels for Load Transfer in Floors

Provide greased dowels for load transfer in floors of the type, design, weight, and dimensions indicated. Provide dowel bars that are plain-billet steel conforming to ASTM A615/A615M, Grade 40. Provide dowel pipe that is steel conforming to ASTM A53/A53M.

2.6.7 Welding

a. Provide weldable reinforcing bars that conform to ASTM A706/A706M, Grade 60 (420), including Supplement S1.

b. Comply with AWS D1.4/D1.4M unless otherwise specified. Do not tack

weld reinforcing bars.

c. Welded assemblies of steel reinforcement produced under factory conditions, such as welded wire reinforcement, bar mats, and deformed bar anchors, are allowed.

d. After completing welds on zinc-coated (galvanized), epoxy-coated, or zinc and epoxy dual-coated reinforcement, coat welds and repair coating damage as previously specified.

PART 3 EXECUTION

3.1 EXAMINATION

a. Do not begin installation until substrates have been properly constructed; verify that substrates are level.

b. If substrate preparation is the responsibility of another installer, notify Contracting Officer of unsatisfactory preparation before processing.

c. Check field dimensions before beginning installation. If dimensions vary too much from design dimensions for proper installation, notify Contracting Officer and wait for instructions before beginning installation.

3.2 PREPARATION

Determine quantity of concrete needed and minimize the production of excess concrete. Designate locations or uses for potential excess concrete before the concrete is poured.

3.2.1 General

a. Surfaces against which concrete is to be placed must be free of debris, loose material, standing water, snow, ice, and other deleterious substances before start of concrete placing.

b. Remove standing water without washing over freshly deposited concrete. Divert flow of water through side drains provided for such purpose.

3.2.2 Subgrade Under Foundations and Footings

a. When subgrade material is semi-porous and dry, sprinkle subgrade surface with water as required to eliminate suction at the time concrete is deposited, or seal subgrade surface by covering surface with specified vapor retarder.

b. When subgrade material is porous, seal subgrade surface by covering surface with specified vapor retarder.

3.2.3 Subgrade Under Slabs on Ground

a. Before construction of slabs on ground, have underground work on pipes and conduits completed and approved.

b. Clean previously constructed subgrade or fill of foreign materials.

c. Finish surface of capillary water barrier under interior slabs on

ground must not show deviation in excess of 1/4 inch when tested with a 10-foot straightedge parallel with and at right angles to building lines.

d. Finished surface of subgrade or fill under exterior slabs on ground must not be more than 0.02-foot above or 0.10-foot below elevation indicated.

3.2.4 Edge Forms and Screed Strips for Slabs

a. Set edge forms or bulkheads and intermediate screed strips for slabs to obtain indicated elevations and contours in finished slab surface, strong enough to support vibrating bridge screeds or roller pipe screeds if nature of specified slab finish requires use of such equipment.

b. Align concrete surface to elevation of screed strips by use of strike-off templates or approved compacting-type screeds.

3.2.5 Reinforcement and Other Embedded Items

a. Secure reinforcement, joint materials, and other embedded materials in position, inspected, and approved before start of concrete placing.

b. When concrete is placed, reinforcement must be free of materials deleterious to bond. Reinforcement with rust, mill scale, or a combination of both will be considered satisfactory, provided minimum nominal dimensions, nominal weight, and minimum average height of deformations of a hand-wire-brushed test specimen are not less than applicable ASTM specification requirements.

3.3 PLACING REINFORCEMENT AND MISCELLANEOUS MATERIALS

a. Unless otherwise specified, place reinforcement and miscellaneous materials in accordance to ACI 301. Provide bars, welded wire reinforcement, wire ties, supports, and other devices necessary to install and secure reinforcement.

b. Reinforcement must not have rust, scale, oil, grease, clay, or foreign substances that would reduce the bond. Rusting of reinforcement is a basis of rejection if the effective cross-sectional area or the nominal weight per unit length has been reduced. Remove loose rust prior to placing steel. Tack welding is prohibited.

c. Nonprestressed cast-in-place concrete members must have concrete cover for reinforcement given in the following table:

Concrete Exposure	**Member**	**Reinforcement**	**Specified cover, in.**
Cast against and permanently in contact with ground	All	All	3

Concrete Exposure	Member	Reinforcement	Specified cover, in.
Exposed to weather or in contact with ground	All	No. 6 through No. 18 bars	2
		No. 5 bar, W31 or D31 wire, and smaller	1-1/2
Not exposed to weather or in contact with ground	Slabs, joists, and walls	No. 14 and No. 18 bars	1-1/2
		No. 11 bar and smaller	3/4
	Beams, columns, pedestals, and tension ties	Primary reinforcement, stirrups, ties, spirals, and hoops	1-1/2

d. Cast-in-place prestressed concrete members must have concrete cover for reinforcement, ducts, and end fittings given in the following table:

Concrete	Member	Reinforcement	Specified
Cast against and permanently in contact with ground	All	All	3
Exposed to weather or in contact with ground	Slabs, joists, and walls	All	1
	All other	All	1-1/2
Not exposed to weather or in contact with ground	Slabs, joists, and walls	All	3/4
	Beams, columns, and tension ties	Primary reinforcement	1-1/2
		Stirrups, ties, spirals, and hoops	1

e. Precast nonprestressed or prestressed concrete members manufactured

under plant conditions must have concrete cover for reinforcement, ducts, and end fittings given in the following table:

Concrete Exposure	Member	Reinforcement	Specified cover, in.
Exposed to weather or in contact with ground	Walls	No. 14 and No. 18 bars; tendons larger than 1-1/2 in. diameter	1-1/2
		No. 11 bars and smaller; W31 and D31 wire, and smaller; tendons and strands 1-1/2 in.	3/4
	All other	No. 14 and No. 18 bars; tendons larger than 1-1/2 in.	2
		No. 6 through No. 11 bars; tendons and strands larger than 5/8 in. diameter through 1-1/2 in.	1-1/2
		No. 5 bar, W31 or D31 wire, and smaller; tendons and strands 5/8 in. diameter and smaller	1-1/4

Concrete Exposure	Member	Reinforcement	Specified cover, in.
Not exposed to weather or in contact with ground	Slabs, joists, and walls	No. 14 and No. 18 bars; tendons larger than 1-1/2 in. diameter	1-1/4
		Tendons and strands 1-1/2 in. diameter and smaller	3/4
		No. 11 bar, W31 or D31	5/8
	Beams, columns, pedestals, and tension ties	Primary reinforcement	Greater of bar diameter and 5/8 and need not exceed 1-1/2
		Stirrups, ties, spirals, and hoops	3/8

3.3.1 General

Provide details of reinforcement that are in accordance with the Contract Documents.

3.3.2 Vapor Retarder

a. Install in accordance with ASTM E1643. Provide beneath the on-grade concrete floor slab. Use the greatest widths and lengths practicable to eliminate joints wherever possible. Lap joints a minimum of 12 inches and tape.

b. Remove torn, punctured, or damaged vapor retarder material and provide with new vapor retarder prior to placing concrete. Concrete placement must not damage vapor retarder. Place vapor barrier directly on underlying subgrade, base course, or capillary water barrier, unless it consists of crushed material or large granular material which could puncture the vapor barrier. In this case, a thin layer of approximately 1/2 inch of fine graded material should be rolled or compacted over the fill before installation of the vapor barrier to reduce the possibility of puncture. Control concrete placement so as to prevent damage to the vapor barrier.

3.3.3 Perimeter Insulation

Install perimeter insulation at locations indicated. Adhesive must be

used where insulation is applied to the interior surface of foundation walls and may be used for exterior application.

3.3.4 Reinforcement Supports

Provide reinforcement support in accordance with CRSI RB4.1 and ACI 301 Section 3 requirements. Also, coat supports for coated or galvanized bars with electrically compatible material for a distance of at least 2 inches beyond the point of contact with the bars.

3.3.5 Splicing

As indicated in the Contract Documents. For splices not indicated follow ACI 301. Do not splice at points of maximum stress. Overlap welded wire reinforcement the spacing of the cross wires, plus 2 inches.

3.3.6 Setting Miscellaneous Material

Place and secure anchors and bolts, pipe sleeves, conduits, and other such items in position before concrete placement and support against displacement. Plumb anchor bolts and check location and elevation. Temporarily fill voids in sleeves with readily removable material to prevent the entry of concrete.

3.3.7 Inspection of Reinforcement

Inspect and verify proper reinforcement grade, shape, cross section and condition. Do not use reinforcement with the following defects:

a. Bar lengths, depths, and bends beyond specified fabrication tolerances.

b. Bends or kinks not indicated on drawings or approved shop drawings.

c. Bars with reduced cross section due to rusting or other cause.

3.3.8 Placing Reinforcement

Place reinforcement in accordance with ACI 301.

For slabs on grade (over earth or over capillary water barrier) and for footing reinforcement, support bars or welded wire reinforcement on precast concrete blocks, spaced at intervals required by size of reinforcement, to keep reinforcement the minimum height specified above the underside of slab or footing.

For slabs other than on grade, supports for which any portion is less than 1 inch from concrete surfaces that are exposed to view or to be painted may be precast concrete units, plastic-coated steel, or stainless steel protected bar supports. Precast concrete units must be wedge shaped, not larger than 3-1/2 by 3-1/2 inches, and of thickness equal to that indicated for concrete protection of reinforcement. Provide precast units that have cast-in galvanized tie wire hooked for anchorage and blend with concrete surfaces after finishing is completed.

Provide reinforcement that is supported and secured together to prevent displacement by construction loads or by placing of wet concrete, and as follows:

a. Provide supports for reinforcing bars that are sufficient in number

and have sufficient strength to carry the reinforcement they support, and in accordance with ACI 301 and CRSI SP0001-31-DL-I. Do not use supports to support runways for concrete conveying equipment and similar construction loads.

b. Equip supports on ground and similar surfaces with sand-plates.

c. Support welded wire reinforcement as required for reinforcing bars.

d. Secure reinforcements to supports by means of tie wire. Provide black, soft iron wire, not less than 16 gage.

e. Accurately place reinforcement, securely tie at intersections, and hold in position during placing of concrete by spacers, chairs, or other approved supports. Point wire-tie ends away from the form. Unless otherwise indicated, numbers, type, and spacing of supports must conform to the Contract Documents.

f. Bending of reinforcing bars partially embedded in concrete is permitted only as specified in the Contract Documents.

3.3.9 Spacing of Reinforcing Bars

a. As indicated in the Contract Documents.

b. Reinforcing bars may be relocated to avoid interference with other reinforcement, or with conduit, pipe, or other embedded items. If any reinforcing bar is moved a distance exceeding one bar diameter or specified placing tolerance, resulting rearrangement of reinforcement is subject to preapproval by the Contracting Officer.

3.3.10 Concrete Protection for Reinforcement

In accordance with the Contract Documents.

3.3.11 Welding

In accordance with AWS D1.4/D1.4M.

3.4 BATCHING, MEASURING, MIXING, AND TRANSPORTING CONCRETE

In accordance with ASTM C94/C94M, ACI 301, ACI 302.1R and ACI 304R, except as modified herein. Utilize batching equipment such that the concrete ingredients are consistently measured within the following tolerances: 1 percent for cement and water, 2 percent for aggregate, and 3 percent for admixtures. Furnish mandatory batch ticket information for each load of ready mix concrete.

3.4.1 Measuring

Make measurements at intervals as specified in paragraphs SAMPLING and TESTING.

3.4.2 Mixing

a. Mix concrete in accordance with ASTM C94/C94M, ACI 301 and ACI 304R.

b. Machine mix concrete. Begin mixing within 30 minutes after the cement has been added to the aggregates. Place concrete within 90 minutes of

either addition of mixing water to cement and aggregates or addition of cement to aggregates. A retarder must be used to facilitate placing and finishing when concrete temperature is 85 degrees F or greater.

c. If the entrained air content falls below the specified limit, add a sufficient quantity of admixture, within the manufacturer's recommended dosage, to bring the entrained air content within the specified limits. Dissolve admixtures in the mixing water and mix in the drum to uniformly distribute the admixture throughout the batch. Do not reconstitute concrete that has begun to solidify.

d. When fibers are used, add fibers together with the aggregates and never as the first component in the mixer. Dispense fibers into the mixing system using appropriate dispensing equipment and procedure as recommended by the manufacturer.

3.4.3 Transporting

Transport concrete from the mixer to the forms as rapidly as practicable. Prevent segregation or loss of ingredients. Clean transporting equipment thoroughly before each batch. Do not use aluminum pipe or chutes. Remove concrete which has segregated in transporting and dispose of as directed.

3.5 PLACING CONCRETE

Place concrete in accordance with ACI 301 Section 5. Place concrete within 15 minutes of discharge into non-agitating equipment.

3.5.1 Footing Placement

Concrete for footings may be placed in excavations without forms upon inspection and approval by the Contracting Officer. Excavation width must be a minimum of 4 inches greater than indicated.

3.5.2 Pumping

ACI 304R and ACI 304.2R. Pumping must not result in separation or loss of materials nor cause interruptions sufficient to permit loss of plasticity between successive increments. Loss of slump in pumping equipment must not exceed 2 inches at discharge/placement. Do not convey concrete through pipe made of aluminum or aluminum alloy. Avoid rapid changes in pipe sizes. Limit maximum size of course aggregate to 33 percent of the diameter of the pipe. Limit maximum size of well-rounded aggregate to 40 percent of the pipe diameter. Take samples for testing at both the point of delivery to the pump and at the discharge end.

3.5.3 Cold Weather

Meet the requirements of ACI 301 unless otherwise specified. Do not allow concrete temperature to decrease below 50 degrees F. Obtain approval prior to placing concrete when the ambient temperature is below 40 degrees F or when concrete is likely to be subjected to freezing temperatures within 24 hours. Cover concrete and provide sufficient heat to maintain 50 degrees F minimum adjacent to both the formwork and the structure while curing. Limit the rate of cooling to 5 degrees F in any one hour and 18 degrees F per 24 hours after heat application.

3.5.4 Hot Weather

Meet the requirements of ACI 301 unless otherwise specified. Maintain required concrete temperature using Figure 4.2 in ACI 305R to prevent the evaporation rate from exceeding 0.2 pound of water per square foot of exposed concrete per hour. Cool ingredients before mixing or use other suitable means to control concrete temperature and prevent rapid drying of newly placed concrete. Shade the fresh concrete as soon as possible after placing. Start curing when the surface of the fresh concrete is sufficiently hard to permit curing without damage. Provide water hoses, pipes, spraying equipment, and water hauling equipment, where job site is remote to water source, to maintain a moist concrete surface throughout the curing period. Provide burlap cover or other suitable, permeable material with fog spray or continuous wetting of the concrete when weather conditions prevent the use of either liquid membrane curing compound or impervious sheets. For vertical surfaces, protect forms from direct sunlight and add water to top of structure once concrete is set.

3.5.5 Bonding

Roughen and clean surfaces of set concrete at joints of laitance, coatings, loose particles, and foreign matter. Roughen surfaces in a manner that exposes the aggregate uniformly and does not leave laitance, loosened particles of aggregate, nor damaged concrete at the surface.

Obtain bonding of fresh concrete that has set as follows:

a. At joints between footings and walls or columns, between walls or columns and the beams or slabs they support, and elsewhere unless otherwise specified; dampen but do not saturate roughened and cleaned surface of set concrete immediately prior to placing fresh concrete.

b. At joints in exposed-to-view work; at vertical joints in walls; at joints near midpoint of span in girders, beams, supported slabs, other structural members; in work designed to contain liquids; dampen but do not saturate the roughened and cleaned surface of set concrete and cover with a cement grout coating.

c. Provide cement grout that consists of equal parts of portland cement and fine aggregate by weight with not more than 6 gallons of water per sack of cement. Apply cement grout with a stiff broom or brush to a minimum thickness of 1/16 inch. Deposit fresh concrete before cement grout has attained its initial set.

3.6 WASTE MANAGEMENT

Provide as specified in the Waste Management Plan and as follows.

3.6.1 Mixing Equipment

Before concrete pours, designate Contractor-owned site meeting environmental standards for cleaning out concrete mixing trucks. Minimize water used to wash equipment.

3.6.2 Hardened, Cured Waste Concrete

Crush and reuse hardened, cured waste concrete as fill or as a base course for pavement.

3.6.3 Reinforcing Steel

Collect reinforcing steel and place in designated area for recycling.

3.6.4 Other Waste

Identify concrete manufacturer's or supplier's policy for collection or return of construction waste, unused material, deconstruction waste, and/or packaging material. Return excess cement to supplier.

3.7 SURFACE FINISHES EXCEPT FLOOR, SLAB, AND PAVEMENT FINISHES

3.7.1 Defects

Repair surface defects in accordance with ACI 301 Section 5.

3.8 FLOOR, SLAB, AND PAVEMENT FINISHES AND MISCELLANEOUS CONSTRUCTION

In accordance with ACI 301 and ACI 302.1R, unless otherwise specified. Slope floors uniformly to drains where drains are provided. Where straightedge measurements are specified, provide straightedge.

3.8.1 Finish

Place, consolidate, and immediately strike off concrete to obtain proper contour, grade, and elevation before bleedwater appears. Permit concrete to attain a set sufficient for floating and supporting the weight of the finisher and equipment. If bleedwater is present prior to floating the surface, drag the excess water off or remove by absorption with porous materials. Do not use dry cement to absorb bleedwater. Do no use grate tampers ("jitterbugs").

3.8.1.1 Scratched

Use for surfaces intended to receive bonded applied cementitious applications. Finish concrete in accordance with ACI 301 Section 5 for a scratched finish.

3.8.1.2 Floated

Use for exterior slabs where not otherwise specified. Finish concrete in accordance with ACI 301 Section 5 for a floated finish.

3.8.1.3 Concrete Containing Silica Fume

Finish using magnesium floats or darbies.

3.8.1.4 Steel Troweled

Use for floors intended as walking surfaces and for reception of floor coverings . Finish concrete in accordance with ACI 301 Section 5 for a steel troweled finish.

3.8.1.5 Nonslip Finish

Use on surfaces of exterior platforms, steps, and landings; and on exterior and interior pedestrian ramps. Finish concrete in accordance with ACI 301 Section 5 for a dry-shake finish. After the selected material has been embedded by the two floatings, complete the operation

with a broomed finish.

3.8.1.6 Broomed

Use on surfaces of exterior walks, platforms, patios, and ramps, unless otherwise indicated. Finish concrete in accordance with ACI 301 Section 5 for a broomed finish.

3.8.1.7 Pavement

Screed the concrete with a template advanced with a combined longitudinal and crosswise motion. Maintain a slight surplus of concrete ahead of the template. After screeding, float the concrete longitudinally. Use a straightedge to check slope and flatness; correct and refloat as necessary. Obtain final finish by Round edges and joints with an edger having a radius of 1/8 inch.

3.8.2 Flat Floor Finishes

ACI 302.1R. Construct in accordance with one of the methods recommended in Table 10.15.3a, "Slab-on-ground flatness/levelness construction guide" or Table 10.15.3b, "Suspended slab flatness/levelness construction guide" appropriate for the type of construction. ACI 117 for tolerance tested by ASTM E1155.

a. Specified Conventional Value:

Floor Flatness (Ff) 25 minimum

Floor Levelness (FL) 20 minimum

3.8.2.1 Measurement of Floor Tolerances

Test slab within 24 hours of the final troweling. Provide tests to Contracting Officer within 12 hours after collecting the data. Floor flatness inspector is required to provide a tolerance report which includes:

a. Key plan showing location of data collected.

b. Results required by ASTM E1155.

3.8.2.2 Remedies for Out of Tolerance Work

Repair and retest any floors not meeting specified tolerances. Prior to repair, submit and receive approval for the proposed repair, including product data from any materials proposed. Repairs must not result in damage to structural integrity of the floor. For floors exposed to public view, repairs must prevent any uneven or unusual coloring of the surface.

3.8.3 Concrete Walks

Provide 4 inches thick minimum. Provide contraction joints spaced every 5 linear feet unless otherwise indicated. Cut contraction joints 1 inch deep, or one fourth the slab thickness whichever is deeper, with a jointing tool after the surface has been finished. Provide 0.5 inch thick transverse expansion joints at changes in direction where sidewalk abuts curb, steps, rigid pavement, or other similar structures; space expansion joints every 50 feet maximum. Give walks a broomed finish. Unless

indicated otherwise, provide a transverse slope of 1/48. Limit variation in cross section to 1/4 inch in 5 feet.

3.8.4 Pits and Trenches

Place bottoms and walls monolithically or provide waterstops and keys.

3.8.5 Curbs and Gutters

Provide contraction joints spaced every 10 feet maximum unless otherwise indicated. Cut contraction joints 3/4 inch deep with a jointing tool after the surface has been finished. Provide expansion joints 1/2 inch thick and spaced every 100 feet maximum unless otherwise indicated. Perform pavement finish.

3.8.6 Splash Blocks

Provide at outlets of downspouts emptying at grade. Splash blocks may be precast concrete, 24 inches long, 12 inches wide and 4 inches thick, unless otherwise indicated, with smooth-finished countersunk dishes sloped to drain away from the building.

3.9 JOINTS

3.9.1 Construction Joints

Make and locate joints not indicated so as not to impair strength and appearance of the structure, as approved. Make joints perpendicular to main reinforcement. Continue and develop reinforcement across construction joints. Locate construction joints as follows:

3.9.1.1 Construction Joints for Constructability Purposes

a. In walls, at top of footing; at top of slabs on ground; at top and bottom of door and window openings or where required to conform to architectural details; and at underside of deepest beam or girder framing into wall.

b. In columns or piers, at top of footing; at top of slabs on ground; and at underside of deepest beam or girder framing into column or pier.

c. Near midpoint of spans for supported slabs, beams, and girders unless a beam intersects a girder at the center, in which case construction joints in girder must offset a distance equal to twice the width of the beam. Make transfer of shear through construction joint by use of inclined reinforcement.

Provide keyways at least 1-1/2-inches deep in construction joints in walls and slabs and between walls and footings; approved bulkheads may be used for slabs.

3.9.2 Isolation Joints in Slabs on Ground

a. Provide joints at points of contact between slabs on ground and vertical surfaces, such as column pedestals, foundation walls, grade beams, and elsewhere as indicated.

b. Fill joints with premolded joint filler strips 1/2 inch thick, extending full slab depth. Install filler strips at proper level

below finish floor elevation with a slightly tapered, dress-and-oiled wood strip temporarily secured to top of filler strip to form a groove not less than 3/4 inch in depth where joint is sealed with sealing compound and not less than 1/4 inch in depth where joint sealing is not required. Remove wood strip after concrete has set. Clean groove of foreign matter and loose particles after surface has dried.

3.9.3 Contraction Joints in Slabs on Ground

a. Provide joints to form panels as indicated.

b. Under and on exact line of each control joint, cut 50 percent of welded wire reinforcement before placing concrete.

c. Sawcut contraction joints into slab on ground in accordance with ACI 301 Section 5.

d. Sawcutting will be limited to within 12 hours after set and at 1/4 slab depth.

3.9.4 Sealing Joints in Slabs on Ground

a. Seal contraction and control joints which are to receive finish flooring material with joint sealing compound after concrete curing period. Slightly underfill groove with joint sealing compound to prevent extrusion of compound. Remove excess material as soon after sealing as possible.

b. Leave sealed groove ready to receive filling material that is provided as part of finish floor covering work.

3.10 CURING AND PROTECTION

Curing and protection in accordance with ACI 301 Section 5, unless otherwise specified. Begin curing immediately following form removal. Avoid damage to concrete from vibration created by blasting, pile driving, movement of equipment in the vicinity, disturbance of formwork or protruding reinforcement, and any other activity resulting in ground vibrations. Protect concrete from injurious action by sun, rain, flowing water, frost, mechanical injury, tire marks, and oil stains. Do not allow concrete to dry out from time of placement until the expiration of the specified curing period. Do not use membrane-forming compound on surfaces where appearance would be objectionable, on any surface to be painted, where coverings are to be bonded to the concrete, or on concrete to which other concrete is to be bonded. If forms are removed prior to the expiration of the curing period, provide another curing procedure specified herein for the remaining portion of the curing period. Provide moist curing for those areas receiving liquid chemical sealer, hardener, or epoxy coating. Allow curing compound/sealer installations to cure prior to the installation of materials that adsorb VOCs.

3.10.1 Requirements for Type III, High-Early-Strength Portland Cement

The curing periods are required to be not less than one-fourth of those specified for portland cement, but in no case less than 72 hours.

3.10.2 Curing Periods

ACI 301 Section 5, except 10 days for retaining walls, pavement or chimneys. Begin curing immediately after placement. Protect concrete from premature drying, excessively hot temperatures, and mechanical injury; and maintain minimal moisture loss at a relatively constant temperature for the period necessary for hydration of the cement and hardening of the concrete. The materials and methods of curing are subject to approval by the Contracting Officer.

3.10.3 Curing Formed Surfaces

Accomplish curing of formed surfaces, including undersurfaces of girders, beams, supported slabs, and other similar surfaces by moist curing with forms in place for full curing period or until forms are removed. If forms are removed before end of curing period, accomplish final curing of formed surfaces by any of the curing methods specified above, as applicable.

3.10.4 Curing Unformed Surfaces

a. Accomplish initial curing of unformed surfaces, such as monolithic slabs, floor topping, and other flat surfaces, by membrane curing.

b. Accomplish final curing of unformed surfaces by any of curing methods specified, as applicable.

c. Accomplish final curing of concrete surfaces to receive liquid floor hardener of finish flooring by moisture-retaining cover curing.

3.10.5 Temperature of Concrete During Curing

When temperature of atmosphere is 41 degrees F and below, maintain temperature of concrete at not less than 55 degrees F throughout concrete curing period or 45 degrees F when the curing period is measured by maturity. When necessary, make arrangements before start of concrete placing for heating, covering, insulation, or housing as required to maintain specified temperature and moisture conditions for concrete during curing period.

When the temperature of atmosphere is 80 degrees F and above or during other climatic conditions which cause too rapid drying of concrete, make arrangements before start of concrete placing for installation of wind breaks, of shading, and for fog spraying, wet sprinkling, or moisture-retaining covering of light color as required to protect concrete during curing period.

Changes in temperature of concrete must be uniform and not exceed 5 degrees F in any one hour nor 49 degrees F in any 24-hour period.

3.10.6 Protection from Mechanical Injury

During curing period, protect concrete from damaging mechanical disturbances, particularly load stresses, heavy shock, and excessive vibration and from damage caused by rain or running water.

3.10.7 Protection After Curing

Protect finished concrete surfaces from damage by construction operations.

3.11 FIELD QUALITY CONTROL

3.11.1 Aggregate Testing

3.11.1.1 Fine Aggregate

At least once during each shift when the concrete plant is operating, there must be one sieve analysis and fineness modulus determination in accordance with ASTM C136/C136M and COE CRD-C 104 for the fine aggregate or for each fine aggregate if it is batched in more than one size or classification. The location at which samples are taken may be selected by the Contractor as the most advantageous for control. However, the Contractor is responsible for delivering fine aggregate to the mixer within specification limits. When the amount passing on any sieve is outside the specification limits, immediately resample and retest the fine aggregate. If there is another failure on any sieve, immediately report the fact to the Contracting Officer, stop concreting, and take immediate steps to correct the grading.

3.11.1.2 Coarse Aggregate

At least once during each shift in which the concrete plant is operating, provide a sieve analysis in accordance with ASTM C136/C136M for each size of coarse aggregate. The location at which samples are taken may be selected by the Contractor as the most advantageous for production control. However, the Contractor is responsible for delivering the aggregate to the mixer within specification limits. A test record of samples of aggregate taken at the same locations must show the results of the current test as well as the average results of the five most recent tests including the current test. The Contractor may adopt limits for control coarser than the specification limits for samples taken other than as delivered to the mixer to allow for degradation during handling. When the amount passing any sieve is outside the specification limits, immediately resample and retest the coarse aggregate. If the second sample fails on any sieve, report that fact to the Contracting Officer. Where two consecutive averages of 5 tests are outside specification limits, the operation will be considered out of control and reported to the Contracting Officer. Stop concreting and take immediate steps to correct the grading.

3.11.2 Concrete Sampling

ASTM C172/C172M. Collect samples of fresh concrete to perform tests specified. ASTM C31/C31M for making test specimens.

3.11.3 Concrete Testing

3.11.3.1 Slump Tests

ASTM C143/C143M. Take concrete samples during concrete placement/discharge. The maximum slump may be increased as specified with the addition of an approved admixture provided that the water-cementitious material ratio is not exceeded. Perform tests at commencement of concrete placement, when test cylinders are made, and for each 20 cubic yards (maximum) of concrete. If the measured slump at point of delivery is greater than specified, a check test will be performed on a new sample from point of delivery. If the check test fails, concrete is considered to have failed to meet the requirements of this specification. If the

measured slump is less than specified, adjustments will be permitted in accordance with ASTM C94/C94M. If the test of slump of the adjusted mixture fails, concrete is considered to have failed to meet the requirements of this specification.

3.11.3.2 Temperature Tests

Test the concrete delivered and the concrete in the forms. Perform tests in hot or cold weather conditions (below 50 degrees F and above 80 degrees F) for each batch (minimum) or every 20 cubic yards (maximum) of concrete, until the specified temperature is obtained, and whenever test cylinders and slump tests are made.

3.11.3.3 Compressive Strength Tests

ASTM C39/C39M. Make eight 6 inch by 12 inch or 4 inch by 8 inch test cylinders for each set of tests in accordance with ASTM C31/C31M, ASTM C172/C172M and applicable requirements of ACI 305R and ACI 306R. Take precautions to prevent evaporation and loss of water from the specimen. Test two 6 inch by 12 inch or three 4 inch by 8 inch cylinders at 7 days, two 6 inch by 12 inch or three 4 inch by 8 inch cylinders at 28 days,. Take samples for strength tests for each concrete mixture placed each day not less than once a day, nor less than once for each 150 cubic yards of concrete, nor less than once for each 5000 square feet of surface area for slabs or walls. For the entire project, take no less than five sets of samples and perform strength tests for each mix design of concrete placed. Each strength test result must be the average of two 6 inch by 12 inch or three 4 inch by 8 inch cylinders from the same concrete sample tested at 28 days . Concrete compressive tests must meet the requirements of this section, the Contract Document, and ACI 301.

3.11.3.4 Air Content

ASTM C173/C173M or ASTM C231/C231M for normal weight concrete. Test air-entrained concrete for air content at the same frequency as specified for slump tests. If the measured air content at point of delivery is greater than the specified upper limit, a check test of air content will be performed on a new sample from point of delivery. If the check test fails, concrete has failed to meet the requirements of this specification. If the measured air content is less than the specified lower limit, adjustments will be permitted in accordance with ASTM C94/C94M. If the check test of the adjusted mixture fails, concrete has failed to meet the requirements of this specification.

3.11.3.5 Unit Weight of Structural Concrete

ASTM C567/C567M and ASTM C138/C138M. Determine unit weight of lightweight and normal weight concrete. Perform test for every 20 cubic yards maximum.

3.11.3.6 Strength of Concrete Structure

The strength of the concrete structure will be considered to be deficient if any of the following conditions are identified:

a. Failure to meet compressive strength tests as evaluated.

b. Reinforcement not conforming to requirements specified.

c. Concrete which differs from required dimensions or location in such a

manner as to reduce strength.

d. Concrete curing and protection of concrete against extremes of temperature during curing, not conforming to requirements specified.

e. Concrete subjected to damaging mechanical disturbances, particularly load stresses, heavy shock, and excessive vibration.

f. Poor workmanship likely to result in deficient strength.

Where the strength of the concrete structure is considered deficient submit a mitigation or remediation plan for review and approval by the Contracting Officer.

3.11.3.7 Non-Conforming Materials

Factors that indicate that there are non-conforming materials include (but not limited to) excessive compressive strength, inadequate compressive strength, excessive slump, excessive voids and honeycombing, concrete delivery records that indicate excessive time between mixing and placement, or excessive water was added to the mixture during delivery and placement. Any of these indicators alone are sufficient reason for the Contracting Officer to request additional sampling and testing.

Conduct investigations into non-conforming materials at the Contractor's expense. The Contractor is responsible for the investigation and must make written recommendations to adequately mitigate or remediate the non-conforming material. The Contracting Officer may accept, accept with reduced payment, require mitigation, or require removal and replacement of non-conforming material at no additional cost to the Government.

3.11.3.8 Testing Concrete Structure for Strength

When there is evidence that strength of concrete structure in place does not meet specification requirements or there are non-conforming materials, make cores drilled from hardened concrete for compressive strength determination in accordance with ASTM C42/C42M, and as follows:

a. Take at least three representative cores from each member or area of concrete-in-place that is considered potentially deficient. Location of cores will be determined by the Contracting Officer.

b. Test cores after moisture conditioning in accordance with ASTM C42/C42M if concrete they represent is more than superficially wet under service.

c. Air dry cores, (60 to 80 degrees F with relative humidity less than 60 percent) for 7 days before test and test dry if concrete they represent is dry under service conditions.

d. Strength of cores from each member or area are considered satisfactory if their average compressive strength is equal to or greater than 85 percent of the design compressive strength, and if no single core strength is less than 75 percent of the design compressive strength. Additional testing of cores extracted from locations represented by erratic core strength results will be permitted only when approved by the Contracting Officer.

Fill core holes solid with patching mortar and finished to match adjacent

concrete surfaces.

Correct concrete work that is found inadequate by core tests in a manner approved by the Contracting Officer.

3.12 REPAIR, REHABILITATION AND REMOVAL

Before the Contracting Officer accepts the structure, inspect the structure for cracks, damage and substandard concrete placements that may adversely affect the service life of the structure. Prepare a report documenting these defects which includes recommendations for repair, removal or remediation and submit to the Contracting Officer for approval before any corrective work is accomplished.

3.12.1 Crack Repair

Prior to final acceptance, document all cracks in excess of 0.02 inches wide and repair. Submit the proposed method and materials to repair the cracks to the Contracting Officer for approval. Address the amount of movement expected in the crack due to temperature changes and loading.

3.12.2 Repair of Weak Surfaces

Weak surfaces are defined as mortar-rich, rain-damaged, uncured, or containing exposed voids or deleterious materials. Concrete surfaces with weak surfaces less than 1/4 inch thick must be diamond ground to remove the weak surface. Surfaces containing weak surfaces greater than 1/4 inch thick must be removed and replaced or mitigated in a manner acceptable to the Contracting Officer.

3.12.3 Failure of Quality Assurance Test Results

Proposed mitigation efforts must be approved by the Contracting Officer prior to proceeding.

-- End of Section --

SECTION 03 30 53

MISCELLANEOUS CAST-IN-PLACE CONCRETE (SIDEWALKS)
05/14

PART 1 GENERAL

1.1 SUMMARY

Perform all work in accordance with ACI 318.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 117	(2010; R 2015) Specifications for Tolerances for Concrete Construction and Materials and Commentary
ACI 301	(2020) Specifications for Structural Concrete
ACI 304R	(2000; R 2009) Guide for Measuring, Mixing, Transporting, and Placing Concrete
ACI 305R	(2020) Guide to Hot Weather Concreting
ACI 306R	(2016) Guide to Cold Weather Concreting
ACI 318	(2019; R 2022) Building Code Requirements for Structural Concrete (ACI 318-19) and Commentary (ACI 318R-19)
ACI 347R	(2014; Errata 1 2017) Guide to Formwork for Concrete
ACI SP-66	(2004) ACI Detailing Manual

ASTM INTERNATIONAL (ASTM)

ASTM A615/A615M	(2025) Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A1064/A1064M	(2024) Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
ASTM C31/C31M	(2025a) Standard Practice for Making and Curing Concrete Test Specimens in the Field
ASTM C33/C33M	(2024a) Standard Specification for Concrete Aggregates

ASTM C39/C39M	(2024) Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
ASTM C94/C94M	(2025) Standard Specification for Ready-Mixed Concrete
ASTM C143/C143M	(2020) Standard Test Method for Slump of Hydraulic-Cement Concrete
ASTM C150/C150M	(2024) Standard Specification for Portland Cement
ASTM C172/C172M	(2017) Standard Practice for Sampling Freshly Mixed Concrete
ASTM C173/C173M	(2024a) Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C231/C231M	(2024) Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C260/C260M	(2024) Standard Specification for Air-Entraining Admixtures for Concrete
ASTM C494/C494M	(2024) Standard Specification for Chemical Admixtures for Concrete
ASTM C618	(2025a) Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
ASTM C685/C685M	(2024) Standard Specification for Concrete Made by Volumetric Batching and Continuous Mixing
ASTM C1064/C1064M	(2023) Standard Test Method for Temperature of Freshly Mixed Hydraulic-Cement Concrete
ASTM C1602/C1602M	(2022) Standard Specification for Mixing Water Used in Production of Hydraulic Cement Concrete
ASTM D75/D75M	(2019) Standard Practice for Sampling Aggregates
ASTM D1752	(2018) Standard Specification for Preformed Sponge Rubber, Cork and Recycled PVC Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials

ASTM E1745 (2017; R 2023) Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 247 Comprehensive Procurement Guideline for Products Containing Recovered Materials

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Air-Entraining Admixture

Water-Reducing or Retarding Admixture

Curing Materials

Expansion Joint Filler Strips, Premolded

Conveying and Placing Concrete

Formwork

Mix Design Data; G

Ready-Mix Concrete

Mechanical Reinforcing Bar Connectors

Fly Ash

SD-06 Test Reports

Aggregates

Concrete Mixture Proportions; G

Compressive Strength Testing; G

Slump; G

Air Content

Water

SD-07 Certificates

Cementitious Materials

Pozzolan

Aggregates

Delivery Tickets

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

The Government retains the option to sample and test aggregates and concrete to determine compliance with the specifications. Provide facilities and labor as may be necessary to assist the Government in procurement of representative test samples. Obtain samples of aggregates at the point of batching in accordance with ASTM D75/D75M. Sample concrete in accordance with ASTM C172/C172M. Determine slump and air content in accordance with ASTM C143/C143M and ASTM C231/C231M, respectively, when cylinders are molded. Prepare, cure, and transport compression test specimens in accordance with ASTM C31/C31M. Test compression test specimens in accordance with ASTM C39/C39M. Take samples for strength tests not less than once each shift in which concrete is produced. Provide a minimum of four 6 x 12 inch or six 4 x 8 inch specimens from each sample; two 6 x 12 inch or three 4 x 8 inch to be tested at 28 days (90 days if pozzolan or slag cement is used) for acceptance. Two 6 x 12 inch or three 4 x 8 inch will be tested at 7 days for information.

2.1.1 Strength

Acceptance test results are the average strengths of two 6 x 12 inch or three 4 x 8 inch specimens tested at 28 days (90 days if pozzolan or slag cement is used). The strength of the concrete is considered satisfactory so long as the average of all three consecutive acceptance test results equal or exceed the specified compressive strength, f'c, and no individual acceptance test result falls below f'c by more than 500 psi.

2.1.2 Construction Tolerances

Apply a Class "C" finish to all surfaces except those specified to receive a Class "D" finish. Apply a Class "D" finish to all post-construction surfaces which will be permanently concealed. Surface requirements for the classes of finish required are as specified in ACI 117.

2.1.3 Concrete Mixture Proportions

Concrete mixture proportions are the responsibility of the Contractor. Mixture proportions must include the dry weights of cementitious material(s); the nominal maximum size of the coarse aggregate; the specific gravities, absorptions, and saturated surface-dry weights of fine and coarse aggregates; the quantities, types, and names of admixtures; and quantity of water per yard of concrete. Provide materials included in the mixture proportions of the same type and from the same source as will be used on the project. The specified compressive strength f'c is 3,000 psi at 28 days (90 days if pozzolan is used). The maximum nominal size coarse aggregate is 3/4 inch, in accordance with ACI 304R. The air content must be between 4.5 and 7.5 percent with a slump between 2 and 5 inches. The maximum water-cementitious material ratio is 0.50. Submit the applicable test reports and mixture proportions that will produce concrete of the quality required, ten days prior to placement of concrete.

2.2 MATERIALS

Submit manufacturer's literature from suppliers which demonstrates compliance with applicable specifications for the specified materials.

2.2.1 Cementitious Materials

Submit Manufacturer's certificates of compliance, accompanied by mill test reports, attesting that the concrete materials meet the requirements of the specifications in accordance with the Special Clause "CERTIFICATES OF COMPLIANCE". Also, certificates for all material conforming to EPA's Comprehensive Procurement Guidelines (CPG), in accordance with 40 CFR 247. Provide cementitious materials that conform to the appropriate specifications listed:

2.2.1.1 Portland Cement

ASTM C150/C150M, Type I, including false set requirements with tri-calcium aluminates (C3A) content less than 10 percent and a maximum cement-alkali content of 0.80 percent Na2Oe (sodium oxide) equivalent.

2.2.1.2 Pozzolan

Provide pozzolan that conforms to ASTM C618, Class F, including requirements of Tables 1A and 2A.

2.2.2 Aggregates

For fine and coarse aggregates meet the quality and grading requirements of ASTM C33/C33M, Class Designations 4M or better. Submit certificates of compliance and test reports for aggregates showing the material(s) meets the quality and grading requirements of the specifications under which it is furnished.

2.2.3 Admixtures

Provide admixtures, when required or approved, in compliance with the appropriate specification listed. Retest chemical admixtures that have been in storage at the project site, for longer than 6 months or that have been subjected to freezing, at the expense of the Contractor at the request of the Contracting Officer and will be rejected if test results are not satisfactory.

2.2.3.1 Air-Entraining Admixture

Provide air-entraining admixture that meets the requirements of ASTM C260/C260M.

2.2.3.2 Water-Reducing or Retarding Admixture

Provide water-reducing or retarding admixture meeting the requirements of ASTM C494/C494M, Type A, B, or D.

2.2.4 Water

Mixing and curing water in compliance with the requirements of ASTM C1602/C1602M; free of injurious amounts of oil, acid, salt, or alkali. Submit test report showing water complies with ASTM C1602/C1602M.

2.2.5 Reinforcing Steel

Provide reinforcing bars conforming to the requirements of ASTM A615/A615M, Grade 60, deformed. Provide welded steel wire reinforcement conforming to the requirements of ASTM A1064/A1064M. Detail reinforcement not indicated in accordance with ACI 301 and ACI SP-66. Provide mechanical reinforcing bar connectors in accordance with ACI 301 and provide 125 percent minimum yield strength of the reinforcement bar.

2.2.6 Expansion Joint Filler Strips, Premolded

Expansion joint filler strips, premolded of sponge rubber conforming to ASTM D1752, Type I.

2.2.7 Formwork

Design and engineer the formwork as well as its construction in accordance with ACI 301 Section 2 and 5 and ACI 347R. Fabricate of wood, steel, or other approved material.

2.2.8 Form Coatings

Provide form coating in accordance with ACI 301.

2.2.9 Vapor Barrier

ASTM E1745 Class A polyethylene sheeting, minimum 10 mil thickness or other equivalent material with a maximum permeance rating of 0.04 perms per ASTM E96/E96M.

Consider plastic vapor retarders and adhesives with a high recycled content, low toxicity low VOC (Volatile Organic Compounds) levels.

2.2.10 Curing Materials

Provide curing materials in accordance with ACI 301, Section 5.

2.3 READY-MIX CONCRETE

Provide ready-mix concrete with mix design data conforming to ACI 301 Part 4. Submit delivery tickets in accordance with ASTM C94/C94M for each ready-mix concrete delivery, include the following additional information: .

a. Type and brand cement

b. Cement content in 94-pound bags per cubic yard of concrete

c. Maximum size of aggregate

d. Amount and brand name of admixture

e. Total water content expressed by water cementitious material ratio

PART 3 EXECUTION

3.1 PREPARATION

Prepare construction joints to expose coarse aggregate. The surface must be clean, damp, and free of laitance. Construct ramps and walkways, as

necessary, to allow safe and expeditious access for concrete and workmen. Remove snow, ice, standing or flowing water, loose particles, debris, and foreign matter. Satisfactorily compact earth foundations. Make spare vibrators available. Placement cannot begin until the entire preparation has been accepted by the Government.

3.1.1 Embedded Items

Secure reinforcement in place after joints, anchors, and other embedded items have been positioned. Arrange internal ties so that when the forms are removed the metal part of the tie is not less than 2 inches from concrete surfaces permanently exposed to view or exposed to water on the finished structures. Prepare embedded items so they are be free of oil and other foreign matters such as loose coatings or rust, paint, and scale. The embedding of wood in concrete is permitted only when specifically authorized or directed. Provide all equipment needed to place, consolidate, protect, and cure the concrete at the placement site and in good operating condition.

3.1.2 Formwork Installation

Forms must be properly aligned, adequately supported, and mortar-tight. Provide smooth form surfaces, free from irregularities, dents, sags, or holes when used for permanently exposed faces. Chamfer all exposed joints and edges , unless otherwise indicated.

3.1.3 Production of Concrete

3.1.3.1 Ready-Mixed Concrete

Provide ready-mixed concrete conforming to ASTM C94/C94M except as otherwise specified.

3.1.3.2 Concrete Made by Volumetric Batching and Continuous Mixing

Conform to ASTM C685/C685M.

3.2 CONVEYING AND PLACING CONCRETE

Convey and place concrete in accordance with ACI 301, Section 5.

3.2.1 Cold-Weather Requirements

Place concrete in cold weather in accordance with ACI 306R

3.2.2 Hot-Weather Requirements

Place concrete in hot weather in accordance with ACI 305R

3.3 FINISHING

3.3.1 Temperature Requirement

Do not finish or repair concrete when either the concrete or the ambient temperature is below 50 degrees F.

3.3.2 Finishing Formed Surfaces

3.3.3 Finishing Unformed Surfaces

3.3.3.1 Expansion and Contraction Joints

Provide 1/2 inch thick transverse expansion joints where new work abuts an existing concrete. Provide expansion joints at a maximum spacing of 30 feet on center in sidewalks, unless otherwise indicated. Provide contraction joints at a maximum spacing of 5 linear feet in sidewalks, unless otherwise indicated. Cut contraction joints at a minimum of 1 inch(es) deep with a jointing tool after the surface has been finished.

3.4 CURING AND PROTECTION

Cure and protect in accordance with ACI 301, Section 5.

3.5 FORM WORK

Provide form work in accordance with ACI 301, Section 2 and Section 5.

3.5.1 Removal of Forms

Remove forms in accordance with ACI 301, Section 2.

3.6 STEEL REINFORCING

Reinforcement must be free from loose, flaky rust and scale, and free from oil, grease, or other coating which might destroy or reduce the reinforcement's bond with the concrete.

3.6.1 Fabrication

Shop fabricate steel reinforcement in accordance with ACI 318 and ACI SP-66. Provide shop details and bending in accordance with ACI 318 and ACI SP-66.

3.6.2 Splicing

Perform splices in accordance with ACI 318 and ACI SP-66.

3.6.3 Supports

Secure reinforcement in place by the use of metal or concrete supports, spacers, or ties.

3.7 EMBEDDED ITEMS

Before placing concrete, take care to determine that all embedded items are firmly and securely fastened in place. Provide embedded items free of oil and other foreign matter, such as loose coatings of rust, paint and scale. Embedding of wood in concrete is permitted only when specifically authorized or directed.

3.8 TESTING AND INSPECTING

Report the results of all tests and inspections conducted at the project site informally at the end of each shift. Submit written reports weekly. Deliver within three days after the end of each weekly reporting period. See Section 01 45 00 QUALITY CONTROL.

3.8.1 Field Testing Technicians

The individuals who sample and test concrete must have demonstrated a knowledge and ability to perform the necessary test procedures equivalent to the ACI minimum guidelines for certification of Concrete Field Testing Technicians, Grade I.

3.8.2 Preparations for Placing

Inspect foundation or construction joints, forms, and embedded items in sufficient time prior to each concrete placement to certify that it is ready to receive concrete.

3.8.3 Sampling and Testing

a. Obtain samples and test concrete for quality control during placement. Sample fresh concrete for testing in accordance with ASTM C172/C172M. Make six test cylinders.

b. Test concrete for compressive strength at 7 and 28 days for each design mix and for every 100 cubic yards of concrete. Test two cylinders at 7 days; two cylinders at 28 days; and hold two cylinders in reserve. Conform test specimens to ASTM C31/C31M. Perform compressive strength testing conforming to ASTM C39/C39M.

c. Test slump at the site of discharge for each design mix in accordance with ASTM C143/C143M. Check slump twice during each shift that concrete is produced for each strength of concrete required.

d. Test air content for air-entrained concrete in accordance with ASTM C231/C231M. Test concrete using lightweight or extremely porous aggregates in accordance with ASTM C173/C173M. Check air content at least twice during each shift that concrete is placed for each strength of concrete required.

e. Determine temperature of concrete at time of placement in accordance with ASTM C1064/C1064M. Check concrete temperature at least twice during each shift that concrete is placed for each strength of concrete required.

3.8.4 Action Required

3.8.4.1 Placing

Do not begin placement until the availability of an adequate number of acceptable vibrators, which are in working order and have competent operators, has been verified. Discontinue placing if any lift is inadequately consolidated.

3.8.4.2 Air Content

Whenever an air content test result is outside the specification limits, adjust the dosage of the air-entrainment admixture prior to delivery of concrete to forms.

3.8.4.3 Slump

Whenever a slump test result is outside the specification limits, adjust

the batch weights of water and fine aggregate prior to delivery of concrete to the forms. Make the adjustments so that the water-cementitious material ratio does not exceed that specified in the submitted concrete mixture proportion and the required concrete strength is still met.

-- End of Section --

SECTION 04 20 01

MASONRY INFILL AND PATCHING
11/15, CHG 2: 05/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 216.1	(2014) Code Requirements for Determining Fire Resistance of Concrete and Masonry Construction Assemblies

ASTM INTERNATIONAL (ASTM)

ASTM A82	(2017) Standard Specification for Steel Wire, Plain, for Concrete Reinforcement
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A167	(2011) Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A185/A185M	(2007) Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete
ASTM A420/A420M	(2024a) Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Low-Temperature Service
ASTM A615/A615M	(2025) Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A641/A641M	(2019) Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire
ASTM A666	(2023) Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
ASTM A951/A951M	(2011) Standard Specification for Steel Wire for Masonry Joint Reinforcement
ASTM A1064/A1064M	(2024) Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for

	Concrete
ASTM B370	(2022) Standard Specification for Copper Sheet and Strip for Building Construction
ASTM C33/C33M	(2024a) Standard Specification for Concrete Aggregates
ASTM C67/C67M	(2025) Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile
ASTM C90	(2022) Standard Specification for Loadbearing Concrete Masonry Units
ASTM C150/C150M	(2024) Standard Specification for Portland Cement
ASTM C173/C173M	(2024a) Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C207	(2024) Standard Specification for Hydrated Lime for Masonry Purposes
ASTM C216	(2021) Standard Specification for Facing Brick (Solid Masonry Units Made from Clay or Shale)
ASTM C231/C231M	(2024) Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C270	(2025b) Standard Specification for Mortar for Unit Masonry
ASTM C426	(2022) Standard Test Method for Linear Drying Shrinkage of Concrete Masonry Units
ASTM C476	(2023) Standard Specification for Grout for Masonry
ASTM C494/C494M	(2024) Standard Specification for Chemical Admixtures for Concrete
ASTM C641	(2017) Standard Test Method for Iron Staining Materials in Lightweight Concrete Aggregates
ASTM C979/C979M	(2024) Standard Specification for Pigments for Integrally Colored Concrete
ASTM C1019	(2019) Standard Test Method for Sampling and Testing Grout
ASTM C1194	(2024) Standard Test Method for Compressive Strength of Architectural Cast Stone
ASTM C1195	(2021) Standard Test Method for Absorption

of Architectural Cast Stone

ASTM C1364 (2023; E 2024) Standard Specification for Architectural Cast Stone

ASTM C1384 (2012a) Standard Specification for Admixtures for Masonry Mortars

THE MASONRY SOCIETY (TMS)

TMS MSJC (2016) Masonry Standard Joint Committee's (MSJC) Book - Building Code Requirements and Specification for Masonry Structures, Containing TMS 402/ACI 530/ASCE 5, TMS 602/ACI 530.1/ASCE 6, and Companion Commentaries

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Hot Weather Procedures; G

Cold Weather Procedures; G

Clay or Shale Brick; G

Cementitious Materials; G

SD-04 Samples

Mock-Up Panel; G

Clay or Shale Brick; G

Concrete Masonry Units (CMU); G

Admixtures for Masonry Mortar; G

Anchors, Ties, and Bar Positioners; G

Joint Reinforcement; G

SD-05 Design Data

Fire-Rated Concrete Masonry Units

SD-06 Test Reports

Efflorescence Test

Fire-Rated Concrete Masonry Units

SD-07 Certificates

Clay or Shale Brick

Concrete Masonry Units (CMU)

Cementitious Materials

Admixtures for Masonry Mortar

Admixtures for Grout

Anchors, Ties, and Bar Positioners

Joint Reinforcement

SD-08 Manufacturer's Instructions

Admixtures for Masonry Mortar

Admixtures for Grout

SD-11 Closeout Submittals

Recycled Content of Clay Units; S

Recycled Content of Cement; S

1.3 QUALITY ASSURANCE

1.3.1 Masonry Mock-Up Panels

1.3.1.1 Mock-Up Panel Location

After material samples are approved and prior to starting masonry work, construct a mock-up panel for each type and color of masonry required. At least 48 hours prior to constructing the panel or panels, submit written notification to the Contracting Officer. Do not build-in mock-up panels as part of the structure; locate mock-up panels where directed. Construct portable mock-up panels or locate in an area where they will not be disrupted during construction.

1.3.1.2 Mock-Up Panel Configuration

Construct mock-up panels L-shaped or otherwise configured to represent all of the wall elements. Construct panels of the size necessary to demonstrate the acceptable level of workmanship for each type of masonry represented on the project. Provide a straight panel or a leg of an L-shaped panel of minimum size 8 feet long by 6 feet high.

1.3.1.3 Mock-Up Panel Composition

Show full color range, texture, and bond pattern of the masonry work.

Demonstrate mortar joint tooling; positioning and lapping of joint reinforcement (including prefabricated corners); and cleaning of masonry work during the construction of the panels. Also include installation or application procedures for anchors, wall ties, CMU control joints, brick expansion joints, flashing, brick soldier, row lock courses and weeps. Include a masonry bonded corner. When the panel represents reinforced masonry, include a 2 by 2 foot opening placed at least 2 feet above the panel base and 2 feet away from all free edges, corners, and control joints. Provide required reinforcing around this opening as well as at wall corners and control joints.

1.3.1.4 Mock-Up Panel Construction Method

Where cavity walls are required, demonstrate and receive approval for the method of construction; i.e., either bring up the two wythes together or separately, with the insulation and appropriate ties placed within the specified tolerances across the cavity. Demonstrate provisions to preclude mortar droppings in the cavity and to provide a clear open air space of the dimensions shown on the drawings. Construct panels on a properly designed concrete foundation.

1.3.1.5 Mock-Up Panel Purpose

The completed panels is used as the standard of workmanship for the type of masonry represented. Do not commence masonry work until the mock-up panel for that type of masonry construction has been completed and approved. Protect panels from the weather and construction operations until the masonry work has been completed and approved. Perform cleaning procedures on the mockup and obtain approval of the Contracting Officer prior to cleaning the building. After completion of the work, completely remove the mock-up panels, including all foundation concrete, from the construction site.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver, store, handle, and protect material to avoid chipping, breakage, and contact with soil or contaminating material. Store and prepare materials in already disturbed areas to minimize project site disturbance and size of project site.

1.4.1 Masonry Units

Cover and protect masonry units from precipitation. Conform to handling and storage requirements of TMS MSJC.

1.4.2 Reinforcement, Anchors, and Ties

Store steel reinforcing bars, coated anchors, ties, and joint reinforcement above the ground. Maintain steel reinforcing bars and uncoated ties free of loose mill scale and loose rust.

1.4.3 Cementitious Materials, Sand and Aggregates

Deliver cementitious and other packaged materials in unopened containers, plainly marked and labeled with manufacturers' names and brands. Store cementitious material in dry, weathertight enclosures or completely cover. Handle cementitious materials in a manner that will prevent the inclusion of foreign materials and damage by water or dampness. Store sand and aggregates in a manner to prevent contamination and segregation.

1.5 PROJECT/SITE CONDITIONS

Conform to TMS MSJC for hot and cold weather masonry erection.

1.5.1 Hot Weather Procedures

When ambient air temperature exceeds 100 degrees F, or exceeds 90 degrees F and the wind velocity is greater than 8 mph, comply with TMS MSJC Article 1.8 D for: preparation prior to conducting masonry work; construction while masonry work is in progress; and protection for newly completed masonry.

1.5.2 Cold Weather Procedures

When ambient temperature is below 40 degrees F, comply with TMS MSJC Article 1.8 C for: preparation prior to conducting masonry work; construction while masonry work is in progress; and protection for newly completed masonry.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

2.1.1 Design - Specified Compressive Strength of Masonry

The specified compressive strength of masonry, f'm, is 2,000 PSI.

2.2 MANUFACTURED UNITS

2.2.1 General Requirements

Do not change the source of materials, which will affect the appearance of the finished work, after the work has started except with Contracting Officer's approval. Submit test reports from an approved independent laboratory. Certify test reports on a previously tested material as the same materials as that proposed for use in this project. Submit certificates of compliance stating that the materials meet the specified requirements.

2.2.2 Clay or Shale Brick

2.2.2.1 General

2.2.2.1.1 Sample Submittal

Submit brick samples as specified, showing the color range and texture of clay or shale brick. Limit units used on the project to those that conform to the approved sample. Submit sample of colored mortar with applicable masonry unit and color samples of three stretcher units and one unit for each type of special shape.

Brick color selections for building alterations match that adjoining.

2.2.2.1.2 Brick Matching Criteria

Submit product data confirming technical compliance; manufcturer and series; brick dimensions and tolerances; and physical samples sufficient to exhibit the full color range.

Criteria evaluated for determining a match, or for requiring another selection be submitted, include color and range; texture and surface finish; size and dimensions; shape and edge conditions; degree of firing or flashing; weathering characteristics; overall appearance and similar unit characteristics.

2.2.2.1.3 Uniformity

Manufacture bricks at one time and from the same run. Deliver clay or shale brick units factory-blended to provide a uniform appearance and color range in the completed wall.

2.2.2.1.4 Recycled Content

Provide clay units containing a minimum of 5 percent post-consumer recycled content, and a minimum of 20 percent post-industrial recycled content.

2.2.2.1.5 Efflorescence Test

Test clay brick that will be exposed to weathering for efflorescence in accordance with ASTM C67/C67M. Schedule tests far enough in advance of starting masonry work to permit retesting if necessary. Units meeting the definition of "effloresced" are subject to rejection.

2.2.2.2 Solid Clay or Shale Brick

Provide solid clay or shale brick that conforms to ASTM C216, Type FBS. Provide brick with minimum five unit average compressive strength of 3,000 psi. Where brick cores, recesses, or deformation would be exposed to view, provide 100 percent solid units. Provide brick with texture and color tange to match the brick indicated.

Provide brick with specified sizes.

a. Modular size, 3-5/8 inches thick, 2-1/4 inches high, and 7-5/8 inches long.

2.2.3 Concrete Units

2.2.3.1 Aggregates

Test lightweight aggregates, and blends of lightweight and heavier aggregates in proportions used in producing the units, for stain-producing iron compounds in accordance with ASTM C641,visual classification method. Do not incorporate aggregates for which the iron stain deposited on the filter paper exceeds the "light stain" classification.

Use industrial waste by-products (air-cooled slag, cinders, or bottom ash), ground waste glass and concrete, granulated slag, and expanded slag in aggregates.

2.2.3.2 Concrete Masonry Units (CMU)

2.2.3.2.1 Recycled Content

Provide units with a minimum of 10 percent post-consumer recycled content,

or a minimum of 40 percent post-industrial recycled content, based on mass, cost, or volume.

2.2.3.2.2 Size

Provide units with specified dimension of 7.625 inches wide, 7.625 inches high, and 15.625 inches long. Provide standard widths and shapes ranging from nominal 4 inch to 1 foot, 0 inch wythe units. Furnish bullnose, corner, double corner, sill, cap and header units. Furnish special shapes indicated in the Instruments of Service. Units must have a regular, consistent texture.

2.2.3.2.3 Surfaces

Provide units with exposed surfaces that are smooth and of uniform texture.

2.2.3.2.4 Unit Types

a. Hollow Load-Bearing Units: ASTM C90, lightweight . Provide load-bearing units for exterior walls, foundation walls, load-bearing walls, and shear walls.

b. Solid Load-Bearing Units: ASTM C90, lightweight or normal weight units. Provide solid units as indicated.

2.2.3.3 Fire-Rated Concrete Masonry Units

For indicated fire-rated construction, provide concrete masonry units of minimum equivalent thickness for the fire rating indicated and the corresponding type of aggregates indicated in TABLE I. Units containing more than one of the aggregates listed in TABLE I will be rated by linear interpolation based on the percent by dry-rodded volume of each aggregate used in manufacturing the units.

TABLE I
FIRE-RATED CONCRETE MASONRY UNITS

Aggregate Type	Minimum Equivalent Thickness for Fire-Resistance Rating, inch						
	1/2 hour	3/4 hour	1 hour	1-1/2 hour	2 hours	3 hours	4 hours
Calcareous or siliceous gravel (other than limestone)	2.0	2.4	2.8	3.6	4.2	5.3	6.2
Limestone, cinders, or air-cooled slag	1.9	2.3	2.7	3.4	4.0	5.0	5.9
Expanded clay, expanded shale, or expanded slate	1.8	2.2	2.6	3.3	3.6	4.4	5.1
Expanded slag or pumice	1.5	1.9	2.1	2.7	3.2	4.0	4.7

Determine equivalent thickness in accordance with ACI 216.1. Where walls are to receive plaster or be faced with brick, or otherwise form an

assembly; include the thickness of plaster or brick or other material in the assembly in determining the equivalent thickness. Submit calculation results.

2.2.3.4 Cast Stone

Cast stone is manufactured to simulate natural cut stone. Mixes are proportioned cements combined with natural or manufactured sands, crushed stone, well graded natural gravel and mineral coloring pigments. Appearances, physical durability and weathering properties comply with ASTM C1364. Employ dry machine casting, vibrant dry tamp casting and wet casting without preference to best suit applications encountered.

Cast stone is high density concrete. Prove mix designs are resistant to weather degradation through prior use. Exposed surfaces have uniform textures, are free of voids greater than 0.0313 inches and have consistent appearances in direct daylight at a distance of 5 feet, 0 inches. Air content, when wet casting is required, is within the range of 4 to 8% in accordance with ASTM C173/C173M or ASTM C231/C231M.

Cast Stone	Performance	Standard
Linear shrinkage	Less than 0.065%	ASTM C426
Compressive strength at 28 days	5,000 PSI	ASTM C1194
Water absorption	6 to 10%	ASTM C1195
Mass loss, 300 freeze and thaw cycles	Less than 5%	ASTM C1364

Cement conforms to ASTM C150/C150M, Type I or II portland cement. Fine aggregates are graded and washed natural sands, or manufactured granite, quartz or limestone sands, complying with ASTM C33/C33M. Coarse aggregates are graded and washed natural gravels or crushed, graded quartz, limestone or other durable stone complying with ASTM C33/C33M. Inorganic pigments are natural or synthetic iron oxide types complying with ASTM C979/C979M and guaranteed lime proof. Provide galvanized or epoxy coated reinforcing bars complying with ASTM A615/A615M, Grade 40 or 60, in an amount equal to 0.25% of unit cross sectional areas. Units exceeding 1 foot, 0 inches in any dimension have reinforcement in two directions to resist thermal movement. Reinforcing concrete cover is twice the reinforcing diameter. Wire reinforcement complies with ASTM A82, and welded wire fabric reinforcement conforms to ASTM A185/A185M or ASTM A1064/A1064M. Furnish a wash on exterior sills, copings, projecting courses and similar conditions with exposed horizontal surfaces. Incorporate a raised fillet at window sill backs, and a drip groove under outer edges of projecting units and soffits. Concealed anchors, when required, are wall tie assemblies of commercially available zinc alloy, hot dipped galvanized steel, brass or stainless steel.

Cast stone is White, similar to split face architectural masonry as indicated in Marine Corps Base Camp Lejeune Base Exterior Architectural Plan, Camp Gieger.

2.3 EQUIPMENT

2.3.1 Vibrators

Maintain at least one spare vibrator on site at all times.

2.3.2 Grout Pumps

Pumping through aluminum tubes is not permitted.

2.4 MATERIALS

2.4.1 Mortar Materials

2.4.1.1 Cementitious Materials

Provide cementitious materials that conform to those permitted by ASTM C270.

2.4.1.2 Hydrated Lime and Alternates

Provide lime that conforms to one of the materials permitted by ASTM C207 for use in combination with portland cement, hydraulic cement, and blended hydraulic cement. Do not use lime in combination with masonry cement or mortar cement.

2.4.1.3 Colored Mortar

Use mortar pigment that conforms to ASTM C979/C979M. Add pigment to mortar to produce a uniform color complimenting the brick selection. Furnish pigments in accurately pre-measured and packaged units that can be added to a measured amount of cementitious materials or supply pigments via preblended cementitious materials or dry mortar mix.

a. In masonry cement or mortar cement, do not exceed 5 percent of cement weight for mineral oxide pigment; do not exceed 1 percent of cement weight for carbon black pigment.

b. In cement-lime mortar mix, do not exceed 10 percent of cementitious materials' weight for mineral oxide pigment; do not exceed 2 percent of cementitious materials' weight for carbon black pigment.

Mortar selections for building alterations match that adjoining.

2.4.1.4 Admixtures for Masonry Mortar

In cold weather, use a non-chloride based accelerating admixture that conforms to ASTM C1384, unless Type III portland cement is used in the mortar.

2.4.1.5 Aggregate and Water

Provide aggregate (sand) and water that conform to materials permitted by ASTM C270.

2.4.2 Grout and Ready-Mix Grout Materials

2.4.2.1 Cementitious Materials for Grout

Provide cementitious materials that conform to those permitted by ASTM C476.

2.4.2.2 Admixtures for Grout

Water-reducing admixtures that conform to ASTM C494/C494M Type F or G and viscosity-modifying admixtures that conform to ASTM C494/C494M Type S are permitted for use in grout. Other admixtures require approval by the Contracting Officer.

In cold weather, a non-chloride based accelerating admixture may be used

subject to approval by the Contracting Officer; use accelerating admixture that is non-corrosive and conforms to ASTM C494/C494M, Type C.

2.4.2.3 Aggregate and Water

Provide fine and coarse aggregates and water that conform to materials permitted by ASTM C476.

2.5 MORTAR AND GROUT MIXES

2.5.1 Mortar Mix

a. Provide mortar Type S unless specified otherwise herein. Do not use masonry cement in the mortar. Do not use air-entrainment in the mortar.

b. For field-batched mortar, measure component materials by volume. Use measuring boxes for materials that do not come in packages, such as sand, for consistent batching. Mix cementitious materials and aggregates between 3 and 5 minutes in a mechanical batch mixer with a sufficient amount of water to produce a workable consistency. Do not hand mix mortar unless approved by the Contracting Officer. Maintain workability of mortar by remixing or retempering. Discard mortar that has begun to stiffen or is not used within 2-1/2 hours after initial mixing.

2.5.2 Grout and Ready Mix Grout Mix

Use grout that conforms to ASTM C476. Use conventional grout with a slump between 8 and 11 inches. Use self-consolidating grout with slump flow of 24 to 30 inches and a visual stability index (VSI) not greater than 1. Provide minimum grout strength of 3,000 psi in 28 days, as tested in accordance with ASTM C1019. Do not change proportions and do not use materials with different physical or chemical characteristics in grout for the work unless additional evidence is furnished that grout meets the specified requirements. Use ready-mixed grout that conforms to ASTM C476.

2.6 ACCESSORIES

2.6.1 Grout Barriers

Grout barriers for vertical cores that consist of fine mesh wire, fiberglass, or expanded metal.

2.6.2 Anchors, Ties, and Bar Positioners

2.6.2.1 General

a. Fabricate anchors and ties without drips or crimps. Size anchors and ties to provide a minimum of 5/8 inch mortar cover from each face of masonry.

b. Fabricate steel wire anchors and ties shall from wire conforming to ASTM A1064/A1064M and hot-dip galvanize in accordance with ASTM A153/A153M.

c. Fabricate joint reinforcement in conformance with ASTM A951/A951M. Hot dip galvanize joint reinforcement in exterior walls and in interior walls exposed to moist environment in conformance with ASTM A153/A153M. Galvanize joint reinforcement in other interior

walls in conformance with ASTM A641/A641M; coordinate with paragraph JOINT REINFORCEMENT below.

2.6.2.2 Wire Mesh Anchors

Provide wire mesh anchors of 1/4 inch mesh galvanized hardware cloth, conforming to ASTM A185/A185M, with length not less than 12 inches, at intersections of interior non-bearing masonry walls.

2.6.2.3 Wall Ties for Multi-Wythe Masonry Construction

Provide rectangular-shaped wall ties, fabricated of hot-dipped galvanized W2.8 diameter steel wire. Provide rectangular wall ties no less than 4 inches wide.

Provide adjustable type wall ties, if approved for use, that consist of two essentially U-shaped elements fabricated of minimum W2.8 diameter steel wire or pintle type ties that are inserted to eyes of horizontal joint reinforcement, hot-dip galvanized. Provide adjustable ties with double pintle legs and allows a maximum offset of 1-1/4 inch between each element of the tie and maximum distance between connecting parts no more than 1/16 inch. Form the pintle and eye elements shall be formed so that both can be in the same plane. Wall ties may also be of a continuous type conforming to paragraph JOINT REINFORCEMENT.

2.6.3 Joint Reinforcement

Factory fabricate joint reinforcement in conformance with ASTM A951/A951M, welded construction. Provide ladder type joint reinforcement, having one longitudinal wire in the mortar bed of each face shell for hollow units and one wire for solid units and with all wires a minimum of 9 gauge. Size joint reinforcement to provide a minimum of 5/8 inch cover from each face. Space crosswires not more than 16 inches. Provide joint reinforcement for straight runs in flat sections not less than 10 feet long. Provide joint reinforcement with factory formed corners and intersections. If approved for use, joint reinforcement may be furnished with adjustable wall tie features. Submit one piece of each type used, including corner and wall intersection pieces, showing at least two cross wires.

2.6.4 Through Wall Flashing and Weeps

2.6.4.1 General

Provide copper or stainless steel sheet, or self-adhesive rubberized sheet on formable stainless steel flashing, except that flashing indicated to terminate in reglets shall be metal.

2.6.4.2 Copper or Stainless Steel Flashing

Provide copper sheet, complying with ASTM B370, minimum 16 ounce weight; or stainless steel, ASTM A167, Type 304 or 316, 0.015 inch thick, No. 2D finish.

2.6.4.3 Rubberized Flashing

Provide self-adhesive rubberized asphalt sheet flashing consisting of 32-mil thick pliable and highly adhesive rubberized asphalt compound

bonded completely and integrally to 8-mil thick, high density, cross-laminated polyethylene film to produce an overall thickness of 40 mils. Provide rubberized, asphalt-based mastic and surface conditioner that are each approved by flashing manufacturer for use with flashing material. Continuously support self adhered through wall flashing with formable stainless steel flashing. Formable miscellaneous flashing and sheet metal is 0.019 inch, 26 gauge, UNS S30400 Type 304 stainless steel sheet coil complying with ASTM A420/A420M and ASTM A666. Fasteners are stainless steel.

2.6.4.4 Weep Ventilators

Provide weep ventilators that are prefabricated from stainless steel. Provide inserts with grill or louver-type openings designed to allow the passage of moisture from cavities and to prevent the entrance of insects, and with a rectangular closure strip to prevent mortar droppings from clogging the opening. Provide ventilators with compressible flanges to fit in a standard 3/8 inch wide mortar joint and with height equal to the nominal height of the unit.

2.6.4.5 Metal Drip Edge

Provide stainless steel drip edge, 15-mil thick, hemmed edges, with down-turned drip at the outside edge and upturned dam at the inside edge for use with membrane flashings.

2.6.5 RIGID BOARD-TYPE INSULATION

Provide rigid board-type insulation as specified in Section 07 21 13 BOARD AND BLOCK INSULATION.

PART 3 EXECUTION

3.1 EXAMINATION

Prior to start of work, verify the applicable conditions as set forth in TMS MSJC, inspection.

3.2 PREPARATION

3.2.1 Stains

Protect exposed surfaces from mortar and other stains. When mortar joints are tooled, remove mortar from exposed surfaces with fiber brushes and wooden paddles. Protect base of walls from splash stains by covering adjacent ground with sand, sawdust, or polyethylene.

3.2.2 Loads

Do not apply uniform loads for at least 12 hours or concentrated loads for at least 72 hours after masonry is constructed. Provide temporary bracing as required.

3.2.3 Concrete Surfaces

Where masonry is to be placed, clean concrete of laitance, dust, dirt, oil, organic matter, or other foreign materials and slightly roughen to provide a surface texture with a depth of at least 1/8 inch. Sandblast, if necessary, to remove laitance from pores and to expose the aggregate.

3.2.4 Bracing

Provide bracing and scaffolding necessary for masonry work.

3.3 ERECTION

3.3.1 General

a. Coordinate masonry work with the work of other trades to accommodate built-in items and to avoid cutting and patching. Lay masonry units in running bond pattern unless indicated otherwise. Lay facing courses level with back-up courses, unless the use of adjustable ties has been approved in which case the tolerances is plus or minus 1/2 inch. Adjust each unit to its final position while mortar is still soft and has plastic consistency.

b. Remove and clean units that have been disturbed after the mortar has stiffened, and relay with fresh mortar. Keep air spaces, cavities, chases, expansion joints, and spaces free from mortar and other debris. Select units to be used in exposed masonry surfaces from those having the least amount of chipped edges or other imperfections detracting from the appearance of the finished work.

c. When necessary to temporarily discontinue the work, step (rack) back the masonry for joining when work resumes. Toothing may be used only when specifically approved by the Contracting Officer. Before resuming work, remove loose mortar and thoroughly clean the exposed joint. Cover the top of walls subjected to rain or snow with nonstaining waterproof covering or membrane when work is not in process. Extend the covering a minimum of 2 feet down on each side of the wall and hold securely in place.

d. Ensure that units being laid and surfaces to receive units are free of water film and frost. Lay solid units in a nonfurrowed full bed of mortar. Bevel mortar for veneer wythes and slope down toward the cavity side. Shove units into place so that the vertical joints are tight. Completely fill vertical joints between solid units with mortar, except where indicated at control, expansion, and isolation joints. Place hollow units so that mortar extends to the depth of the face shell at heads and beds, unless otherwise indicated. Mortar will be permitted to protrude up to 1/2 inch into the space or cells. Provide means to prevent mortar from dropping into the space below or cleaning spaces.

e. In multi-wythe construction with collar joints no more than 3/4 inch wide, bring up the inner wythe not more than 16 inches ahead of the outer wythe. Fill collar joints with mortar during the laying of the facing wythe, and filling shall not lag the laying of the facing wythe by back-buttering each unit as it is laid.

3.3.1.1 Jointing

Tool mortar joints when the mortar is thumbprint hard. Tool horizontal joints after tooling vertical joints. Brush mortar joints to remove loose and excess mortar.

3.3.1.1.1 Tooled Joints

Tool mortar joints in exposed masonry surfaces concave, using a jointer that is slightly larger than the joint width so that complete contact is made along the edges of the unit. Perform tooling so that the mortar is compressed and the joint surface is sealed. Use a jointer of sufficient length to obtain a straight and true mortar joint. No exposed joints are to be left un-tooled.

3.3.1.1.2 Joint Widths

a. Construct brick masonry with mortar joint widths equal to the difference between the specified and nominal dimensions of the unit, within tolerances permitted by TMS MSJC.

b. Provide 3/8 inch wide mortar joints in concrete masonry.

c. Maintain mortar joint widths within tolerances permitted by TMS MSJC

3.3.1.2 Cutting and Fitting

Use full units of the proper size wherever possible, in lieu of cut units. Locate cut units where they would have the least impact on the architectural aesthetic goals of the facility. Perform cutting and fitting, including that required to accommodate the work of others, by masonry mechanics using power masonry saws. Concrete masonry units may be wet or dry cut. Before being placed in the work, dry wet-cut units to the same surface-dry appearance as uncut units being laid in the wall. Provide cut edges that are clean, true and sharp.

a. Carefully make openings in the masonry so that wall plates, cover plates or escutcheons required by the installation will completely conceal the openings and will have bottoms parallel with the masonry bed joints. Provide reinforced masonry lintels above openings over 12 inches wide for pipes, ducts, cable trays, and other wall penetrations, unless steel sleeves are used.

b. Do not reduce masonry units in size by more than one-third in height and one-half in length. Do not locate cut products at ends of walls, corners, and other openings.

3.3.1.3 Unfinished Work

Rack back unfinished work for joining with new work. Toothing may be resorted to only when specifically approved by the Contracting Officer. Remove loose mortar and thoroughly clean the exposed joints before laying new work.

3.3.2 Clay or Shale Brick Masonry

3.3.2.1 Brick Placement

Blend all brick at the jobsite from several cubes to produce a uniform appearance when installed. An observable "banding" or "layering" of colors or textures caused by improperly mixed brick is unacceptable. Lay brick facing with the better face exposed. Lay brick in running bond with each course bonded at corners, unless otherwise indicated. Lay molded brick with the frog side down. Do not lay brick that is cored, recessed, or has other deformations in a manner that allows those deformations to be

exposed to view; lay 100 percent solid units in these areas. Completely fill head and bed joints of solid units with mortar. Lay hollow units with mortar joints as specified for concrete masonry units.

3.3.2.2 Wetting of Units

Wetting of clay, shale brick, or hollow brick units having an initial rate of absorption of more than 1 gram per minute per square inch of bed surface shall be in conformance with ASTM C67/C67M. Ensure that each unit is nearly saturated when wetted but surface dry when laid.

Test clay or shale brick daily on the job, prior to laying, as follows: Using a wax pencil, draw a circle the size of a quarter on five randomly selected bricks. Apply 20 drops of water with a medicine dropper to the surface within the circle on each brick. If the average time that the water is completely absorbed in the five bricks is less than 1-1/2 minutes, wet bricks represented by the five bricks tested.

3.3.2.3 Brick Sills

Lay brick on edge, slope not less than 3/4 inch downward to the outside, and project not less than 1/2 inch beyond the face of the wall to form a wash and drip. Fill all joints solidly with mortar and tool.

3.3.2.4 Partitions

a. Construct partitions continuous from floor to underside of floor or roof deck where shown. Fill openings in firewalls around joists and other structural members as indicated or approved. Where suspended ceilings on both sides of partitions are indicated, the partitions other than those shown to be continuous may be stopped approximately 4 inches above the ceiling level. Construct an isolation joint in the intersection between partitions and structural or exterior walls.

3.3.3 Composite Walls

Tie masonry wythes together with joint reinforcement or with unit wall ties. Embed wall ties at least 1-1/2 inch into mortar of solid units and at least 1/2 inch into the mortar of the outer face shell of hollow units. Provide at least one tie every 2.67 square feet for wire size W1.7 and at least one tie every 4.50 square feet for wire size W2.8. Space ties at a maximum of 36 inches horizontally and 24 inches vertically. Do not cross expansion joints or control joints with ties. Fill collar joints between masonry facing and masonry backup solidly with grout.

3.3.4 Cavity Walls (Multi-Wythe Noncomposite Walls

Provide a continuous cavity as indicated. Bevel mortar beds away from cavity to prevent projection into cavity when bricks are shoved in place. Keep cavities clear and clean of mortar droppings. At the bottom of cavity walls, in the course immediately above the through-wall flashing, temporarily omit one brick every 4 feet. Clean mortar droppings and debris out of the cavity through the temporary openings at least once each day masonry is laid, and more often when required to keep the cavities clean. Fill in the openings with bricks and mortar after the wall is complete and the cavity has been inspected and found clean. Install an air and moisture barrier on the cavity face of interior wythe.

Securely tie the two wythes together with horizontal joint reinforcement,

or provide ties to connect the masonry wythes in sufficient quantity to comply with the following requirements: maximum wall area per tie of 1.77 SF, and maximum vertical spacing of 1 foot, 4 inches, and maximum horizontal spacing of 1 foot, 4 inches. Provide additional ties around openings larger than 16 inches in either direction. Space ties around perimeter of opening at a maximum of 3 feet on center. Place ties within 12 inchesof openings. Ties with drips are not permitted.

3.3.5 ANCHORAGE

3.3.5.1 Anchorage at Intersecting Walls

Provide wire mesh anchors at maximum 16 inches spacing at intersections of interior non-bearing masonry walls.

Anchor structural masonry walls with horizontal joint reinforcement spaced no more than 1 foot, 4 inches on center, unless the drawings indicate a movement joint at the intersection.

3.3.6 Lintels

3.3.6.1 Masonry Lintels

Construct masonry lintels with lintel units filled solid with grout in all courses and reinforced with a minimum of two No. 4 bars in the bottom course unless otherwise indicated. Extend lintel reinforcement beyond each side of masonry opening 40 bar diameters or 24 inches, whichever is greater. Support reinforcing bars in place prior to grouting and locate 1/2 inch above the bottom inside surface of the lintel unit.

3.4 INSTALLATION

3.4.1 Joint Reinforcement Installation

Install joint reinforcement at 16 inches on center unless otherwise indicated. Lap joint reinforcement not less than 6 inches. Install prefabricated sections at corners and wall intersections. Place the longitudinal wires of joint reinforcement in mortar beds to provide not less than 5/8 inch cover to either face of the unit.

3.4.2 Bond Beams

Reinforce and grout bond beams as indicated and as described in paragraphs above. Install grout barriers under bond beam units to retain the grout as required, unless wall is fully grouted or solid bottom units are used. For high lift grouting in partially grouted masonry, provide grout retaining material on the top of bond beams to prevent upward flow of grout. Ensure that reinforcement is continuous, including around corners, except through control joints or expansion joints, unless otherwise indicated.

3.4.3 Flashing and Weeps

a. Install through-wall flashing at obstructions in the cavity and where indicated on Drawings. Ensure continuity of the flashing at laps and inside and outside corners by splicing in a manner approved by the flashing manufacturer. Ensure that the top edge of the flashing is sealed by turning metal flashing 1/2 inch into the mortar bed joint of backup masonry and by attaching a termination bar and applying

compatible sealant at the top edge of the termination bar for rubberized flashing. Terminate the horizontal leg of the flashing terminating the fabric flashing 1/2 inch short of the outside face of masonry and adhering the flashing to a sheet metal drip edge. Provide sealant below the drip edge of through-wall flashing.

b. Wherever through-wall flashing occurs, provide weep holes to drain flashing to exterior at acceptable locations as indicated. Provide weeps of weep ventilators. Locate weeps not more than 24 inches on centers in mortar joints of the exterior wythe directly on the horizontal leg of through-wall flashing over foundations, bond beams, and any other horizontal interruptions of the cavity. Place weep holes perfectly horizontal or slightly canted downward to encourage water drainage outward and not inward. Other methods may be used for providing weeps when spacing is reduced to 16 inches on center and approved by the Contracting Officer. Maintain weeps free of mortar and other obstructions.

3.5 APPLICATION

3.5.1 Insulation

Insulate cavity walls (multi-wythe noncomposite masonry walls), where shown, by installing board-type insulation on the cavity side of the inner wythe. Apply board type insulation directly to the masonry or thru-wall flashing with adhesive. Neatly fit insulation between obstructions without impaling insulation on ties or anchors. Apply insulation in parallel courses with vertical joints breaking midway over the course below and in moderate contact with adjoining units without forcing. Cut to fit neatly against adjoining surfaces.

3.5.2 Interface with Other Products

3.5.2.1 Built-In Items

Fill spaces around built-in items with mortar. Point openings around flush-mount electrical outlet boxes in wet locations with mortar. Embed anchors, ties, wall plugs, accessories, flashing, pipe sleeves and other items required to be built-in as the masonry work progresses. Fully embed anchors, ties and joint reinforcement in the mortar.

3.5.3 Tolerances

Lay masonry plumb, true to line, with courses level within the tolerances of TMS MSJC, Article 3.3 F.

3.6 FIELD QUALITY CONTROL

3.6.1 Tests

3.6.1.1 Clay Brick Efflorescence Test

Test clay brick that will be exposed to weathering for efflorescence in accordance with ASTM C67/C67M. Schedule tests far enough in advance of starting masonry work to permit retesting if necessary. Units meeting the definition of "effloresced" are subject to rejection.

3.7 POINTING AND CLEANING

After mortar joints have attained their initial set, but prior to hardening, completely remove mortar and grout daubs and splashings from masonry-unit surfaces that will be exposed. Before completion of the work, rake out defects in joints of masonry to be exposed, fill with mortar, and tool to match existing joints. Immediately after grout work is completed, remove scum and stains that have percolated through the masonry work using a low pressure stream of water and a stiff bristled brush. Do not clean masonry surfaces, other than removing excess surface mortar, until mortar in joints has hardened. Leave masonry surfaces clean, free of mortar daubs, dirt, stain, and discoloration, including scum from cleaning operations, and with tight mortar joints throughout. Do not use metal tools and metal brushes for cleaning.

3.7.1 Dry-Brushing Concrete Masonry

Dry brush exposed concrete masonry surfaces at the end of each day's work and after any required pointing, using stiff-fiber bristled brushes.

3.7.2 Clay Brick Surfaces

Clean exposed clay brick masonry surfaces to obtain surfaces free of stain, dirt, mortar and grout daubs, efflorescence, and discoloration or scum from cleaning operations. Perform cleaning in accordance with the approved cleaning procedure demonstrated on the mockup.

After cleaning, examine the sample panel of similar material for discoloration or stain as a result of cleaning. If the sample panel is discolored or stained, change the method of cleaning to ensure that the masonry surfaces in the structure will not be adversely affected. Water-soak exposed masonry surfaces and then clean with a proprietary masonry cleaning agent specifically recommended for the color and texture by the clay brick manufacturer and manufacturer of the cleaning product. Apply the solution with stiff fiber brushes, followed immediately by thorough rinsing with clean water. Use proprietary cleaning agents in conformance with the cleaning product manufacturer's printed recommendations. Remove efflorescence in conformance with the brick manufacturer's recommendations.

3.8 PROTECTION

Protect facing materials against staining. Cover top of walls with nonstaining waterproof covering or membrane to protect from moisture intrusion when work is not in progress. Continue covering the top of the unfinished walls until the wall is waterproofed with a complete roof. Extend covering a minimum of 2 feet down on each side of the wall and hold securely in place. Before starting or resuming work, clean top surface of masonry in place of loose mortar and foreign material.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 05 30 00

STEEL DECKS
05/15, CHG 2: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI D100	(2017) Cold-Formed Steel Design Manual

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS D1.3/D1.3M	(2018) Structural Welding Code - Sheet Steel

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A780/A780M	(2020) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM A792/A792M	(2022) Standard Specification for Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM A1008/A1008M	(2025) Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM D746	(2024) Standard Test Method for Brittleness Temperature of Plastics and Elastomers by Impact
ASTM D1056	(2020) Standard Specification for Flexible Cellular Materials - Sponge or Expanded Rubber
ASTM D1149	(2018) Standard Test Method for Rubber Deterioration - Cracking in an Ozone

	Controlled Environment
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/
FM DS 1-28R	(1998) Data Sheet: Roof Systems

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC Paint 20	(2019) Zinc-Rich Primers (Type I, Inorganic, and Type II, Organic)

STEEL DECK INSTITUTE (SDI)

ANSI/SDI QA/QC	(2017) Standard for Quality Control and Quality Assurance for Installation of Steel Deck
SDI DDM04	(2015; Errata 1-3 2016; Add 1 2015; Add 2 20162006) Diaphragm Design Manual; 4th Edition
SDI DDP	(1987; R 2000) Deck Damage and Penetrations
SDI MOC3	(2016) Manual of Construction with Steel Deck (3rd Edition)

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-301-01	(2023; with Change 6, 2026) Structural Engineering

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1926	Safety and Health Regulations for Construction

UL SOLUTIONS (UL)

UL 580	(2006; Reprint Apr 2024) UL Standard for Safety Tests for Uplift Resistance of Roof Assemblies
UL Fire Resistance	(2014) Fire Resistance Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Fabrication Drawings; G

SD-03 Product Data

Accessories

Deck Units

Galvanizing Repair Paint

Touch-Up Paint

Welding Equipment

Welding Rods and Accessories

Recycled Content of Steel Products; S

SD-04 Samples

Metal Roof Deck Units

Flexible Closure Strips

SD-05 Design Data

Deck Units; G

SD-07 Certificates

Powder-Actuated Tool Operator

Welder Qualifications

Welding Procedures

Fire Safety

Wind Storm Resistance

Manufacturer's Certificate

1.3 QUALITY ASSURANCE

1.3.1 Deck Units

Furnish deck units and accessory products from a manufacturer regularly engaged in manufacture of steel decking. Provide manufacturer's certificates attesting that the decking material meets the specified requirements.

1.3.2 Certification of Powder-Actuated Tool Operator

Provide manufacturer's certificate attesting that the operators are authorized to use the low velocity powder-actuated tool.

1.3.3 Qualifications for Welding Work

Follow Welding Procedures of AWS D1.3/D1.3M for sheet steel and AWS D1.1/D1.1M for stud welding.
Submit qualified Welder Qualifications in accordance with AWS D1.3/D1.3M for sheet steel and AWS D1.1/D1.1M for stud welding, or under an equivalent approved qualification test. Perform tests on test pieces in positions and with clearances equivalent to those actually encountered. If a test weld fails to meet requirements, perform an immediate retest of two test welds until each test weld passes. Failure in the immediate retest will require the welder be retested after further practice or training, performing a complete set of test welds.

Submit manufacturer's catalog data for Welding Equipment and Welding Rods and Accessories.

1.3.4 Regulatory Requirements

1.3.4.1 Fire Safety

Test roof deck as a part of a roof deck construction assembly of the type used for this project, listing as fire classified in the UL Fire Resistance, or listing as Class I construction in the FM APP GUIDE, and so labeled.

1.3.4.2 Wind Storm Resistance

Provide roof construction assembly capable of withstanding a nominal uplift pressure of 90 pounds per square foot when tested in accordance with the uplift pressure test described in the FM DS 1-28R or as described in UL 580 and in general compliance with UFC 3-301-01.

1.3.5 Fabrication Drawings

Show type and location of units, location and sequence of connections, bearing on supports, methods of anchoring, attachment of accessories, adjusting plate details, cant strips, ridge and valley plates, metal closure strips, size and location of holes to be cut and reinforcement to be provided, the manufacturer's erection instructions and other pertinent details.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver deck units to the site in a dry and undamaged condition. Store and handle steel deck in a manner to protect it from corrosion, deformation, and other types of damage. Do not use decking for storage or as working platform until units have been fastened into position. Exercise care not to damage material or overload decking during construction. The maximum uniform distributed storage load must not exceed the design live load. Stack decking on platforms or pallets and cover with weathertight ventilated covering. Elevate one end during storage to provide drainage. Maintain deck finish at all times to prevent formation of rust. Repair deck finish using touch-up paint. Replace damaged material.

1.5 DESIGN REQUIREMENTS FOR ROOF DECKS

1.5.1 Properties of Sections

Properties of metal roof deck sections must comply with engineering design

width as limited by the provisions of AISI D100.

1.5.2 Allowable Loads

Indicate total uniform dead and live load for detailing purposes.

PART 2 PRODUCTS

2.1 DECK UNITS

Submit manufacturer's design calculations, or applicable published literature for the structural properties of the proposed deck units.

Provide products with an average recycled content of steel products so postconsumer recycled content plus one half of preconsumer recycled content not less than 25 percent.

2.1.1 Roof Deck

Conform to ASTM A792/A792M or ASTM A1008/A1008M for deck used in conjunction with insulation and built-up roofing. Fabricate roof deck units of the steel design thickness required by the design drawings and galvanized . Furnish sample of Metal Roof Deck Units used to illustrate actual cross section dimensions and configurations.

2.1.2 Length of Deck Units

Provide deck units of sufficient length to span three or more spacings where possible.

2.1.3 Touch-Up Paint

Provide a high zinc-dust content paint for regalvanizing welds in galvanized steel conforming to ASTM A780/A780M.

Provide touch-up paint for shop-painted units , and touch-up paint for zinc-coated units of an approved galvanizing repair paint with a high-zinc dust content . Touch-up welds with paint conforming to SSPC Paint 20 in accordance with ASTM A780/A780M. Maintain finish of deck units and accessories by using touch-up paint whenever necessary to prevent the formation of rust.

2.2 ACCESSORIES

Provide accessories of same material as deck, unless specified otherwise. Provide manufacturer's standard type accessories, as specified.

2.2.1 Adjusting Plates

Provide adjusting plates, or segments of deck units, of same thickness and configuration as deck units in locations too narrow to accommodate full size units. Provide factory cut plates of predetermined size where possible.

2.2.2 End Closures

Fabricated of sheet metal by the deck manufacturer. Provide end closures minimum 0.0295 inch thick to close open ends at eaves, and openings through deck.

2.2.3 Partition Closures

Provide closures for closing voids above interior walls and partitions that are perpendicular to the direction of the configurations. Provide rubber, plastic, or sheet steel closures above typical partitions.

2.2.4 Flexible Closure Strips for Roof Decks

Provide strips made of vulcanized, closed-cell, synthetic rubber material specified and premolded to the configuration required to provide tight-fitting closures at open ends and sides of steel roof decking.

Conforming to ASTM D1056, Grade 2A1, with the following additional properties:

Brittleness temperature of minus 40 degrees F when tested in accordance with ASTM D746.

Flammability resistance with a flame spread rating of less than 25 when tested in accordance with ASTM E84.

Resistance to ozone must be "no cracks" after exposure of a sample kept under a surface tensile strain of 25 percent to an ozone concentration of 100 parts per million of air by volume in air for 100 hours at 104 degrees F and tested in accordance with ASTM D1149.

Provide a elastomeric type adhesive as recommended by the manufacturer of the flexible closure strips.

2.2.5 Sheet Metal Collar

Where deck is cut for passage of pipes, ducts, columns, etc., and deck is to remain exposed, provide a neatly cut sheet metal collar to cover edges of deck. Do not cut deck until after installation of supplemental supports.

2.2.6 Cover Plates

Sheet metal to close panel edge and end conditions, and where panels change direction or butt. Polyethylene-coated, self-adhesive, 2 inch wide joint tape may be provided in lieu of cover plates on flat-surfaced decking butt joints.

Fabricate cover plates for abutting floor deck units from the specified structural-quality steel sheets not less than nominal 18 gagethick before galvanizing. Provide 6 inch wide cover plates and form to match the contour of the floor deck units.

2.2.7 Column Closures

Sheet metal, minimum 0.0358 inch thick or metal rib lath.

2.2.8 Access Hole Covers

Sheet metal, minimum 0.0474 inch thick.

2.2.9 Hanger

Provide clips or loops for utility systems of one or more of the following types:

a. Lip tabs or integral tabs where noncellular decking or flat plate of cellular section is 0.0474 inch thick or more, and a structural concrete fill is used over deck.

b. Slots or holes punched in decking for installation of pigtails.

c. Tabs driven from top side of decking and arranged so as not to pierce electrical cells.

d. Decking manufacturer's standard as approved by the Contracting Officer.

2.2.10 Cant Strips for Roof Decks

Fabricate cant strips from the specified commercial-quality steel sheets not less than nominal 0.0358 inch thick before galvanizing. Bend strips to form a 45-degree cant not less than 5 inch wide, with top and bottom flanges a minimum 3 inch wide. Length of strips 10 feet.

2.2.11 Ridge and Valley Plates for Roof Decks

Fabricate plates from the specified structural-quality steel sheets, not less than nominal 0.0358 inch thick before galvanizing. Provide plates of minimum 4-1/2 inch wide and bent to provide tight fitting closures at ridges and valleys. Provide a minimum length of ridge and valley plates of 10 feet.

2.2.12 Metal Closure Strips for Roof Decks

Fabricate strips from the specified commercial-quality steel sheets not less than nominal 0.0358 inch thick before galvanizing. Provide strips from the configuration required to provide tight-fitting closures at open ends and sides of steel roof decking.

2.2.13 Galvanized Steel Angles for Roof Decks

Provide hot-rolled carbon steel angles conforming to ASTM A36/A36M, and hot-dip galvanized in accordance with ASTM A123/A123M.

2.2.14 Miscellaneous Accessories
Furnish the manufacturer's standard accessories to complete the deck installation. Furnish metal accessories of the same material as the deck and with the minimum design thickness as follows: saddles, 0.0474 inch welding washers, 0.0598 inch other metal accessories, 0.0358 inch unless otherwise indicated.

PART 3 EXECUTION

3.1 EXAMINATION

Prior to installation of decking units and accessories, examine worksite to verify that as-built structure will permit installation of decking system without modification.

3.2 INSTALLATION

Install steel deck units in accordance with 29 CFR 1926, Subpart R – Steel Erection, ANSI/SDI QA/QC, and approved shop drawings. Place units on structural supports, properly adjusted, leveled, and aligned at right angles to supports before permanently securing in place. Damaged deck and accessories including material which is permanently stained or contaminated, deformed, or with burned holes shall not be installed. Extend deck units over three or more supports unless absolutely impractical. Report inaccuracies in alignment or leveling to the Contracting Officer and make necessary corrections before permanently anchoring deck units. Locate deck ends over supports only. Lap 2 inch deck ends. Do not use unanchored deck units as a work or storage platform. Permanently anchor units placed by the end of each working day. Do not support suspended ceilings, light fixtures, ducts, utilities, or other loads by steel deck unless indicated. Distribute loads by appropriate means to prevent damage.

3.2.1 Attachment

Immediately after placement and alignment, and after correcting inaccuracies, permanently fasten steel deck units to structural supports and to adjacent deck units by welding with normal 5/8 inchdiameter puddle welds, fastened with screws, powder-actuated fasteners, or pneumatically driven fasteners as indicated on the design drawings and in accordance with manufacturer's recommended procedure. Clamp or weight deck units to provide firm contact between deck units and structural supports while performing welding or fastening. Attachment of adjacent deck units by button-punching is prohibited.

3.2.1.1 Welding

Perform welding in accordance with AWS D1.3/D1.3M using methods and electrodes recommended by the manufacturers of the base metal alloys being used. Ensure only operators previously qualified by tests prescribed in AWS D1.3/D1.3M make welds. Immediately recertify, or replace qualified welders, that are producing unsatisfactory welding. Conform to the recommendations of the Steel Deck Institute and the steel deck manufacturer for location, size, and spacing of fastening. Do use welding washers at the connections of the deck to supports. Do not use welding washers at sidelaps. Holes and similar defects will not be acceptable. Attach all partial or segments of deck units to structural supports in accordance with Section 2.5 of SDI DDM04. . Immediately clean welds by chipping and wire brushing. Heavily coat welds, cut edges and damaged portions of coated finish with zinc-dust paint conforming to ASTM A780/A780M .

3.2.1.2 Sidelap Fastening

Lock sidelaps between adjacent floor deck units together by welding or screws as indicated.

3.2.2 Openings

Cut or drill all holes and openings required and be coordinated with the drawings, specifications, and other trades. Frame and reinforce openings through the deck in conformance with SDI DDP. Reinforce holes and openings 6 to 12 inch across by 0.0474 inch thick steel sheet at least 12 inch wider and longer than the opening and be fastened to the steel deck at each corner of the sheet and at a maximum of 6 inch on center. Reinforce

holes and openings larger than 12 inch by steel channels or angles installed perpendicular to the steel joists and supported by the adjacent steel joists. Install steel channels or angles perpendicular to the deck ribs and fasten to the channels or angles perpendicular to the steel joists. Deck manufacturer shall approve holes or openings larger than 6 inch in diameter prior to drilling or cutting.

3.2.3 Deck Damage

SDI MOC3, for repair of deck damage.

3.2.4 Touch-Up Paint

3.2.4.1 Roof Deck

After roof decking installation, wire brush, clean, and touchup paint the scarred areas on top and bottom surfaces of metal roof decking. The scarred areas include welds, weld scars, bruises, and rust spots. Touchup galvanized surfaces with galvanizing repair paint. Touchup painted surfaces with repair paint of painted surfaces.

3.2.4.2 Floor Deck

For floor decking installation, wire brush, clean, and touchup paint the scarred areas on the top and bottom surfaces of the metal floor decking and on the surface of supporting steel members. Include welds, weld scars, bruises, and rust spots for scarred areas. Touched up the galvanized surfaces with galvanizing repair paint. Touch up the painted surfaces with paint for the repair of painted surfaces.

3.2.5 Accessory Installation

3.2.5.1 Adjusting Plates

Provide in locations too narrow to accommodate full-size deck units and install as shown on shop drawings.

3.2.5.2 End Closures

Provide end closure to close open ends of cells at columns, walls, and openings in deck.

3.2.5.3 Closures Above Partitions

Provide for closing voids between cells over partitions that are perpendicular to direction of cells. Provide a one-piece closure strip for partitions 4 inch nominal or less in thickness and two-piece closure strips for wider partitions.

3.2.5.4 Access Hole Covers

Provide access hole covers to seal holes cut in decking to facilitate welding of the deck to structural supports.

3.2.5.5 Hangers

Provide as indicated to support utility system . Space devices so as to provide one device per 6.25 square feet.

3.3 CANT STRIPS FOR ROOF DECKS

Provide strips to be fusion welded to surface of roof decking, secured to wood nailers by galvanized screws or to steel framing by galvanized self-tapping screws or welds. Do not exceed spacing of welds and fasteners of 12 inch. Lap end joints a minimum 3 inch and secure with galvanized sheet metal screws spaced a maximum 4 inch on center.

3.4 RIDGE AND VALLEY PLATES FOR ROOF DECKS

Provide plates to be fusion welded to top surface of roof decking. Lap end joints a minimum 3 inch. For valley plates, provide endlaps to be in the direction of water flow.

3.5 CLOSURE STRIPS FOR ROOF DECKS

Provide closure strips at open, uncovered ends and edges of the roof decking and in voids between roof decking and top of walls and partitions where indicated. Install closure strips in position in a manner to provide a weathertight installation.

3.6 ROOF INSULATION SUPPORT FOR ROOF DECKS

Provide metal closure strips for support of roof insulation where rib openings in top surface of metal roof decking occur adjacent to edges and openings. Weld metal closure strips in position.

3.7 CLEANING AND PROTECTION FOR ROOF DECKS

Upon completion of the deck, sweep surfaces clean and prepare for installation of the roofing.

3.8 FIELD QUALITY CONTROL

3.8.1 Deck Weld Inspection

Visual inspect welds in accordance with AWS D1.3/D1.3M.

3.8.2 Decks Not Receiving Concrete

Inspect the decking top surface for distortion after installation. For roof decks not receiving concrete, verify distortion by placing a straight edge across three adjacent top flanges. The maximum allowable gap between the straight edge and the top flanges should not exceed manufacturing and construction tolerances of supporting members. When gap is more than the allowable, provide corrective measures or replacement. Reinspect decking after performing corrective measures or replacement.

-- End of Section --

SECTION 05 40 00

COLD-FORMED METAL FRAMING
05/15, CHG 1: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 318	(2019; R 2022) Building Code Requirements for Structural Concrete (ACI 318-19) and Commentary (ACI 318R-19)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI S100	(2016) North American Specification for the Design of Cold-Formed Steel Structural Members
AISI S110	(2007; Suppl 1; Reaffirmed 2012) Standard for Seismic Design of Cold-Formed Steel Structural Systems - Special Bolted Moment Frames
AISI S200	(2007) North American Standard for Cold-Formed Steel Framing - General Provision
AISI S201	(2007) North American Standard for Cold-Formed Steel Framing - Product Data
AISI S202	(2011) Code of Standard Practice for Cold-formed Steel Structural Framing
AISI S211	(2007) North American Standard for Cold-Formed Steel Framing - Wall Stud Design
AISI S212	(2007) North American Standard for Cold-Formed Steel Framing - Header Design
AISI S213	(2007; Suppl 1 2009) North American Standard for Cold-Formed Steel Framing - Lateral Design
AISI S214	(2012) North American Standard for Cold-Formed Steel Framing – Truss Design

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel

AWS D1.3/D1.3M	(2018) Structural Welding Code - Sheet Steel

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A1003/A1003M	(2023; E 2024) Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
ASTM C955	(2024) Standard Specification for Cold-Formed Steel Structural Framing Members
ASTM C1007	(2020; R 2024) Standard Specification for Installation of Load Bearing (Transverse and Axial) Steel Studs and Related Accessories
ASTM C1513	(2024) Standard Specification for Steel Tapping Screws for Cold-Formed Steel Framing Connections
ASTM E119	(2024) Standard Test Methods for Fire Tests of Building Construction and Materials
ASTM E329	(2023) Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
ASTM E488/E488M	(2022) Standard Test Methods for Strength of Anchors in Concrete Elements
ASTM F1554	(2020) Standard Specification for Anchor Bolts, Steel, 36, 55, and 105-ksi Yield Strength
ASTM F1941/F1941M	(2016; R 2025) Standard Specification for Electrodeposited Coatings on Threaded Fasteners (Unified Inch Screw Threads (UN/UNR))

ASTM F2329/F2329M (2015; R 2023) Standard Specification for Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy Steel Bolts, Screws, Washers, Nuts, and Special Threaded Fasteners

INTERNATIONAL CODE COUNCIL (ICC)

ICC IBC (2024) International Building Code

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-301-01 (2023; with Change 6, 2026) Structural Engineering

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Framing Components; G

SD-03 Product Data

Steel Studs, Joists, Tracks, Bracing, Bridging and Accessories

Recycled Content of Steel Products; S

SD-05 Design Data

Metal Framing Calculations; G

SD-07 Certificates

Welds

1.3 DELIVERY, STORAGE, AND HANDLING

Steel framing and related accessories shall be stored and handled in accordance with the AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing".

1.4 MAXIMUM DEFLECTION

Deflections of structural members shall not exceed the more restrictive of the limitations of ICC IBC and UFC 3-301-01.

1.5 QUALITY ASSURANCE

a. Engineering Responsibility: Preparation of Shop Drawings, design calculations, and other structural data by a registered professional engineer.

b. Testing Agency Qualifications: An independent testing agency,

acceptable to authorities having jurisdiction, qualified according to ASTM E329 for testing indicated.

c. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.

d. Welding Qualifications: Qualify procedures and personnel according to the following:

(1) AWS D1.1/D1.1M, "Structural Welding Code - Steel".

(2) AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel".

e. Fire-Test-Response Characteristics: Where indicated, provide cold-formed metal framing identical to that of assemblies tested for fire resistance per ASTM E119 by, and displaying a classification label from, a testing and inspecting agency acceptable to authorities having jurisdiction.

f. AISI Specifications and Standards: Comply with:

(1) AISI S100, "North American Specification for the Design of Cold-Formed Steel Structural Members".

(2) AISI S110, "Standard for Seismic Design of Cold-Formed Steel Structural Systems - Special Bolted Moment Frames".

(3) AISI S200, "North American Standard for Cold-Formed Steel Framing - General Provision".

(4) AISI S201, "North American Standard for Cold-Formed Steel Framing - Product Data".

(5) AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing".

(6) AISI S211, "North American Standard for Cold-Formed Steel Framing - Wall Stud Design".

(7) AISI S212, "North American Standard for Cold-Formed Steel Framing - Header Design".

(8) AISI S213, "North American Standard for Cold-Formed Steel Framing - Lateral Design".

(9) AISI S214, "North American Standard for Cold-Formed Steel Framing - Truss Design".

1.5.1 Drawing Requirements

Submit framing components to show sizes, thicknesses, layout, material designations, methods of installation, and accessories including the following:

a. Cross sections, plans, and/or elevations showing component types and locations for each framing application; including shop coatings and

material thicknesses for each framing component.

b. Connection details showing fastener type, quantity, location, and other information to assure proper installation.

c. Drawings depicting panel configuration, dimensions, components, locations, and construction sequence if the Contractor elects to install prefabricated/prefinished frames.

Sign and seal fabrication drawings by a registered professional engineer.

1.5.2 Design Data Required

Submit metal framing calculations with design criteria and structural loading to verify sizes, thickness, and spacing of members and connections signed and sealed by a registered professional engineer. Show methods and practices used in installation.

PART 2 PRODUCTS

2.1 STEEL STUDS, JOISTS, TRACKS, BRACING, BRIDGING AND ACCESSORIES

Framing components shall comply with ASTM C955 and the following.

a. Provide products with an average recycled content of steel products so postconsumer recycled content plus one half of preconsumer recycled content not less than 25 percent.

b. Steel Sheet: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:

(1) Grade: As required by structural performance.

(2) Coating: G60 (Z180), A60 (ZF180), AZ50 (AZ150), or GF30 (ZGF90).

c. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

(1) Minimum Base-Metal Thickness: 0.0428 inch.

(2) Flange Width: 1-5/8 inches.

d. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with straight flanges, and as follows:

(1) Minimum Base-Metal Thickness: 0.0428 inch.

(2) Flange Width: 1-1/4 inches.

e. Roof Truss Members: Manufacturer's standard C-shaped steel sections, of web depths indicated, unpunched, with stiffened flanges, and as follows:

(1) Minimum Base-Metal Thickness: 0.0428 inch.

(2) Flange Width: 1-5/8 inches, minimum at top and bottom chords connecting to sheathing or directly fastened construction.

2.1.1 Studs and Joists of 54 mils (0.054 Inch) and Heavier

Galvanized steel, ASTM A653/A653M and ASTM A1003/A1003M, SS Grade 50, G60.

2.1.2 Studs and Joists of 43 mils (0.043 Inch) and Lighter

Studs and Joists of 43 mils (0.043 Inch) and Lighter, Track, and Accessories (All thicknesses): Galvanized steel, ASTM A653/A653M and ASTM A1003/A1003M, SS, Grade 33 33,000 psi G60.

2.1.3 Sizes, Thickness, Section Modulus, and Other Structural Properties

Size and thickness as required.

2.2 MARKINGS

Studs and track shall have product markings stamped on the web of the section. The markings shall be repeated throughout the length of the member at a maximum spacing of 4 feet on center and shall be legible and easily read. The product marking shall include the following:

a. An ICC number.

b. Manufacturer's identification.

c. Minimum delivered uncoated steel thickness.

d. Protective coating designator.

e. Minimum yield strength.

2.3 CONNECTIONS

2.3.1 Steel-To-Concrete Connections

a. Anchor Rods: ASTM F1554, Grade 36; galvanized per ASTM A153/A153M.

b. Post-Installed Concrete Anchors: Adhesive or expansion anchors fabricated from corrosion-resistant materials with allowable load capacities in accordance with ICC-ES AC193 and ACI 318 greater than or equal to the design load as determined by testing per ASTM E488/E488M conducted by a qualified testing agency.

c. Power-Actuated Fasteners: Fabricated from corrosion-resistant materials with allowable load capacities in accordance with ICC-ES AC 70 greater than or equal to the design load as determined by testing per ASTM E1190 conducted by a qualified testing agency.

2.3.2 Steel-To-Steel Connections

a. Screws: ASTM C1513, corrosion-resistant-coated, self-drilling, self-tapping steel screws of the type and size indicated. Provide low-profile head beneath sheathing and manufacturer's standard elsewhere. Electroplated to a minimum of 5 micron zinc coating per ASTM F1941/F1941M or hot-dipped galvanized per ASTM A123/A123M or ASTM A153/A153M.

b. Bolts: ASTM A307 coated by hot-dip process per ASTM F2329/F2329M or zinc-coated by mechanical-deposition process per ASTM B695, Class 55.

c. Welding Electrodes: Comply with AWS standards.

2.4 PLASTIC GROMMETS

Supply plastic grommets for stud webs as recommended by stud manufacturer, to protect electrical wires and plumbing piping. Prevent metal-to-metal contact between wiring/piping and studs.

2.5 SEALER GASKET

Closed-cell neoprene foam, 1/4-inch thick, selected from manufacturer's standard widths to match width of bottom track on concrete slab or foundation.

PART 3 EXECUTION

3.1 TRUSS FABRICATION

a. Fabricate cold-formed steel trusses and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.

b. Truss must be fabricated either on site or off site prior to erection.

c. Fabricate trusses using jigs or templates.

d. Splices can only occur at joints.

e. Cut truss members by sawing or shearing: do not torch cut.

f. Fasten cold-formed steel truss members by welding, screw fastening, clinch fastening, pneumatic pin fastening, or riveting as standard with fabricator.

g. Fasten other materials to cold-formed steel trusses by welding, bolting, pneumatic pin fastening, or screw fastening, according to Shop Drawings.

h. Reinforce, stiffen, and brace trusses to withstand handling, delivery, and erection stresses. Lift fabricated trusses to prevent damage or permanent distortion.

3.2 FASTENING

Fasten framing members together by welding or by using self-drilling, self-tapping screws. Electrodes and screw connections shall be as required and indicated in the design calculations.

3.2.1 Welds

All welding shall be performed in accordance with AWS D1.3/D1.3M, as modified by AISI S100. All welders, welding operations, and welding procedures shall be qualified according to AWS D1.3/D1.3M. Submit certified copies of welder qualifications test records showing qualification in accordance with AWS D1.3/D1.3M. All welds shall be cleaned and coated with rust inhibitive galvanizing paint. Do not field weld materials lighter than 43 mils.

3.2.2 Screws

Screws shall be of the self-drilling self-tapping type, size, and location as required. Screw penetration through joined materials shall not be less than three exposed threads. Minimum spacings and edge distances for screws shall be as specified in AISI S100. Screws covered by sheathing materials shall have low profile heads.

3.2.3 Anchors

Anchors shall be of the type, size, and location as required.

3.2.4 Powder-Actuated Fasteners

Powder-actuated fasteners shall be of the type, size, and location as required.

3.3 INSTALLATION

Install cold-formed framing in accordance with ASTM C1007 and AISI S200.

Install cold-formed steel framing according to AISI S202 and to manufacturer's written instructions unless more stringent requirements are indicated.

3.3.1 Tracks

Provide accurately aligned runners at top and bottom of studs. Install sealer gasket under bottom of track on concrete slab or foundation. Anchor tracks as indicated in design calculations. Butt weld joints in tracks or splice with stud inserts. Fasteners shall be at least 3 inches from the edge of concrete slabs.

3.3.2 Studs

Cut studs square and set with firm bearing against webs of top and bottom tracks. Position studs vertically in tracks and space as indicated in design. Do not splice studs. Provide at least two studs at jambs of doors and other openings 2 feet wide or larger. Provide jack studs over openings, as necessary, to maintain indicated stud spacing. Provide tripled studs at corners, positioned to receive interior and exterior finishes. Fasten studs to top and bottom tracks by welding or screwing both flanges to the tracks. Framed wall openings shall include headers and supporting components as shown on the drawings. Headers shall be installed in all openings that are larger than the stud spacing in a wall. In curtain wall construction, provide for vertical movement where studs connect to the structural frame. Provide horizontal bracing in accordance with the design calculations and AISI S100. Bracing shall be not less than the following:

LOAD	HEIGHT	BRACING
Wind load only	Up to 10 feet	One row at mid-height

LOAD	HEIGHT	BRACING
	Over 10 feet	Rows 5'-0" o.c. maximum
Axial load	Up to 10 feet	Two rows at 1/3 points
	Over 10 feet	Rows 3'-4" o.c. maximum

3.3.3 Joists and Trusses

a. Provide a stud directly under each joist or truss. The maximum spacing of studs as indicated shall be maintained.

b. Install, bridge, and brace cold-formed steel trusses according to AISI S200, AISI S214, AISI's "Code of Standard Practice for Cold-Formed Steel Structural Framing," and manufacturer's written instructions unless more stringent requirements are indicated.

c. Install temporary bracing and supports. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

d. Do not alter, cut, or remove framing members or connections of trusses.

3.3.4 Erection Tolerances

a. Framing members which will be covered by finishes such as wallboard, plaster, or ceramic tile set in a mortar setting bed, shall be within the following limits:

(a) 1) Layout of walls and partitions: 1/4 inch from intended position;

(b) 2) Plates and runners: 1/4 inch in 8 feet from a straight line;

(c) 3) Studs: 1/4 inch in 8 feet out of plumb, not cumulative; and

(d) 4) Face of framing members: 1/4 inch in 8 feet from a true plane.

b. Framing members which will be covered by ceramic tile set in dry-set mortar, latex-portland cement mortar, or organic adhesive shall be within the following limits:

(a) 1) Layout of walls and partitions: 1/4 inch from intended position;

(b) 2) Plates and runners: 1/8 inch in 8 feet from a straight line;

(c) 3) Studs: 1/8 inch in 8 feet out of plumb, not cumulative;

and

(d) 4) Face of framing members: 1/8 inch in 8 feet from a true plane.

-- End of Section --

SECTION 05 50 13

MISCELLANEOUS METAL FABRICATIONS
08/24, CHG 1: 08/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF45	(2003; Reaffirmed 2009) Designation System for Aluminum Finishes

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 611	(2014) Voluntary Specification for Anodized Architectural Aluminum

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

ANSI/AISC 303	(2022) Code of Standard Practice for Structural Steel Buildings and Bridges

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B18.2.1	(2012; R 2021) Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)
ASME B18.2.2	(2022) Nuts for General Applications: Machine Screw Nuts, and Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)
ASME B18.6.2	(2020) Square Head Set Screws and Slotted Headless Set Screws (Inch Series)
ASME B18.6.3	(2024) Machine Screws, Tapping Screws, and Metallic Drive Screws (Inch Series)
ASME B18.21.1	(2009; R 2016) Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers (Inch Series)
ASME B18.21.2M	(1999; R 2014) Lock Washers (Metric Series)
ASME B18.22M	(1981; R 2017) Metric Plain Washers

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP A10.3	(2020) Safety Requirements for Powder-Actuated Fastening Systems American National Standard for Construction and

Demolition Operations

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A47/A47M	(1999; R 2022; E 2022) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A276/A276M	(2025) Standard Specification for Stainless Steel Bars and Shapes
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A467/A467M	(2020) Standard Specification for Machine Coil Chain
ASTM A500/A500M	(2023) Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A780/A780M	(2020) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM A924/A924M	(2022a) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM A1008/A1008M	(2025) Standard Specification for Steel,

	Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM B26/B26M	(2018; E 2018) Standard Specification for Aluminum-Alloy Sand Castings
ASTM B108/B108M	(2019) Standard Specification for Aluminum-Alloy Permanent Mold Castings
ASTM B209/B209M	(2021a) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM B221M	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)
ASTM C1513	(2024) Standard Specification for Steel Tapping Screws for Cold-Formed Steel Framing Connections
ASTM D1187/D1187M	(1997; R 2018) Standard Specification for Asphalt-Base Emulsions for Use as Protective Coatings for Metal
ASTM E488/E488M	(2022) Standard Test Methods for Strength of Anchors in Concrete Elements
ASTM F1267	(2023) Standard Specification for Metal, Expanded, Steel
ASTM F1554	(2020) Standard Specification for Anchor Bolts, Steel, 36, 55, and 105-ksi Yield Strength

MASTER PAINTERS INSTITUTE (MPI)

MPI 79	(2016) Primer, Alkyd, Anti-Corrosive for Metal

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM EMMA 557	(2025) Standards For Expanded Metal

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC PA 1	(2024) Shop, Field, and Maintenance Coating of Metals
SSPC SP 3	(2024) Power Tool Cleaning
SSPC SP 6/NACE No.3	(2007) Commercial Blast Cleaning

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Sill Angle, Installation Drawings; G

Bollards/Pipe Guards; G

Retrofit Treads; G

Embedded Angles and Plates, Installation Drawings; G

SD-03 Product Data

Retrofit Treads; G

Recycled Content; S

SD-04 Samples

1.3 QUALIFICATION OF WELDERS

Qualify procedures and personnel according to the following:

a. AWS D1.1/D1.1M Structural Welding Code - Steel.

b. AWS D1.2/D1.2M Structural Welding Code - Aluminum.

1.4 DELIVERY, STORAGE, AND PROTECTION

Protect from corrosion, deformation, and other types of damage. Store items in an enclosed area free from contact with soil and weather. Remove and replace damaged items with new items.

1.5 MISCELLANEOUS REQUIREMENTS

1.5.1 Fabrication Drawings

Submit fabrication drawings showing layout(s), connections to structural system, and anchoring details as specified in ANSI/AISC 303.

1.5.2 Installation Drawings

Submit templates, erection, and installation drawings indicating thickness, type, grade, class of metal, and dimensions. Show construction details, reinforcement, anchorage, and installation in relation to the building construction.

PART 2 PRODUCTS

2.1 SUSTAINABLE DESIGN REQUIREMENTS

See Section 01 33 29 SUSTAINABILITY REQUIREMENTS AND REPORTING for sustainable design requirements for the following, except as modified here:

2.1.1 Recycled Content

Provide products with recycled content.

2.2 MATERIALS

Provide exposed fastenings of compatible materials (avoid contact of dissimilar metals). Coordinate color and finish with the material to which fastenings are applied.

2.2.1 Structural Carbon Steel

Provide in accordance with ASTM A36/A36M.

2.2.2 Stainless Steel Bars and Shapes

ASTM A276/A276M, Type 304.

2.2.3 Structural Tubing

Provide in accordance with ASTM A500/A500M.

2.2.4 Steel Pipe

Provide in accordance with ASTM A53/A53M, Type E or S, Grade B.

2.2.5 Fittings for Steel Pipe

Provide standard malleable iron fittings in accordance with ASTM A47/A47M.

2.2.6 Anchor Bolts

Provide in accordance with ASTM F1554. Where exposed, provide anchor bolts of the same material, color, and finish as the metal to which they are applied.

2.2.6.1 Adhesive Anchors

Provide adhesive anchors sized and fabricated for the conditions encountered. Design values are as tested in accordance with ASTM E488/E488M.

2.2.6.2 Lag Screws and Bolts

Provide in accordance with ASME B18.2.1, type and grade best suited for the purpose.

2.2.6.3 Toggle Bolts

Provide in accordance with ASME B18.2.1.

2.2.6.4 Bolts, Nuts, Studs and Rivets

Provide in accordance with ASME B18.2.2 or ASTM A307.

2.2.6.5 Powder Actuated Fasteners

Follow safety provisions in accordance with ASSP A10.3.

2.2.6.6 Screws

Provide in accordance with ASME B18.2.1, ASME B18.6.2, ASME B18.6.3 and ASTM C1513.

2.2.6.7 Washers

Provide plain washers in accordance with ASME B18.22M, ASME B18.21.1. Provide beveled washers for American Standard beams and channels, square or rectangular, tapered in thickness, and smooth. Provide lock washers in accordance with ASME B18.21.2M, ASME B18.21.1.

2.2.7 Aluminum Alloy Products

Provide in accordance with ASTM B209/B209M for sheet plate, ASTM B221M, ASTM B221M, ASTM B221 for extrusions, and ASTM B26/B26M or ASTM B108/B108M for castings. Provide aluminum extrusions at least 1/8 inch thick and aluminum plate or sheet at least 0.050 inch thick.

2.3 FABRICATION FINISHES

2.3.1 Galvanizing

Hot-dip galvanize items specified to be zinc-coated, after fabrication where practicable. Provide galvanizing in accordance with ASTM A123/A123M, ASTM A153/A153M, ASTM A653/A653M, or ASTM A924/A924M, Z275 G90.

2.3.2 Galvanize

Anchor bolts, grating fasteners, washers, and parts or devices necessary for proper installation, unless indicated otherwise.

2.3.3 Shop Cleaning and Painting

2.3.3.1 Surface Preparation

Blast clean ferrous metal fabrication surfaces in accordance with SSPC SP 6/NACE No.3. Surfaces that will be exposed in spaces above ceiling or in attic spaces, crawl spaces, furred spaces, and chases may be cleaned in accordance with SSPC SP 3 in lieu of being blast cleaned. Wash cleaned surfaces which become contaminated with rust, dirt, oil, grease, or other contaminants with solvents until thoroughly clean. Steel to be embedded in concrete must be free of dirt and grease prior to embed. Do not paint or galvanize bearing surfaces, including contact surfaces within slip critical joints. Shop coat these surfaces with rust prevention.

2.3.3.2 Pretreatment, Priming and Painting

Apply pre-treatment, primer, and paint in accordance with manufacturer's printed instructions.

2.3.4 Nonferrous Metal Surfaces

Protect by plating, anodic, or organic coatings.

2.3.5 Aluminum Surfaces

2.3.5.1 Surface Condition

Before finishes are applied, remove roll marks, scratches, rolled-in scratches, kinks, stains, pits, orange peel, die marks, structural streaks, and other defects which will affect uniform appearance of finished surfaces.

2.3.5.2 Aluminum Finishes

Unexposed sheet, plate and extrusions may have mill finish as fabricated. Sandblast castings' finish, medium, AA DAF45. Unless otherwise specified, provide all other aluminum items with an anodized finish complying with AAMA 611. Provide a coating thickness not less than that specified for protective and decorative type finishes for items used in interior locations or architectural Class I type finish for items used in exterior locations. Provide in accordance with AA DAF45. Provide a polished satin finish on items to be anodized.

2.4 BOLLARDS/PIPE GUARDS

Provide galvanized weight steel pipe in accordance with ASTM A53/A53M. Anchor posts in concrete as indicated and fill solidly with concrete.

2.5 RIGID DOWNSPOUTS

Provide 6 inch by 6 inch, square steel galvanized downspouts with fabricated cleanout access and outlet transitions of various diameters to receive scheduled underground stormwater distribution. Seams and joints welded and ground smooth prior to galvanizing.

Expanded metal leaf guards for guttering are formed of steel complying with ASTM A1008/A1008M, ASTM F1267 and NAAMM EMMA 557. Steel is cold rolled, hot rolled or hot rolled pickled and oiled. Hot dip galvanize stock for heavy commercial applications in accordance with ASTM A123/A123M. Diamond openings are a 0.25 inch short way dimension, 0.040 inch, 20 gauge flattened strands and 54% open area. Adjust the opening dimension so both LWD ends are sheared to match the installation width.

2.6 MISCELLANEOUS PLATES AND SHAPES

Submit installation drawings for and provide items that do not form a part of the structural steel framework, such as lintels, sill angles, and miscellaneous mountings and frames. Provide lintels fabricated from structural steel shapes over openings in masonry walls and partitions to support wall loads over openings. Construct to have at least 8 in bearing on masonry at each end.

Provide angles and plates in accordance with ASTM A36/A36M, for embedment as indicated. Hot dip galvanize embedded items exposed to the elements in accordance with ASTM A123/A123M unless noted otherwise.

2.7 RETROFIT TREADS

Retrofit treads for concrete steps are single piece, aluminum 6063 T5 alloy fabrications complying with ASTM B221 and incorporating abrasive filler strips of aluminum oxide, silicon carbide or a combination of both set in an epoxy resin binder. Color is homogenous and extends throughout the thickness of filler. Ends and backs are beveled. Treads are 9 inches wide by the full length of treads encountered, and 0.2813 inches thick with 1.125 inch beveled back nosing. Treads are suited for interior and exterior applications.

2.8 SAFETY CHAINS

Construct safety chains of galvanized steel, straight link type, minimum 3/16 inch diameter, with a minimum of twelve links per one foot, and snap hooks on each end. Test safety chain in accordance with ASTM A467/A467M, Class CS. Provide boat type snap hooks. Provide galvanized 3/8 inch bolt with 3/4 inch eye diameter for attachment of chain, anchored as indicated. Supply two chains, 4 inches longer than the anchorage spacing, for each guarded area. Door pull chains are simialr.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

Install items at locations indicated in accordance with manufacturer's instructions. Verify all field dimensions prior to fabrication. Include materials and parts necessary to complete each assembly, whether indicated or not. Miss-alignment and miss-sizing of holes for fasteners is cause for rejection. Conceal fastenings where practicable. Joints exposed to weather must be watertight.

3.2 WORKMANSHIP

Provide miscellaneous metalwork that is true and accurate in shape, size, and profile. Make angles and lines continuous and straight. Make curves consistent, smooth and unfaceted. Provide continuous welding along the entire area of contact except where tack welding is permitted. Do not tack weld exposed connections. Unless otherwise indicated and approved, provide a smooth finish on exposed surfaces. Provide countersunk rivets where exposed. Provide coped and mitered corner joints aligned flush and without gaps. Do not weld, cut or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are bolted or screwed field connections.

3.3 ANCHORAGE, FASTENINGS, AND CONNECTIONS

Provide anchorage as necessary, whether indicated or not, for fastening miscellaneous metal items securely in place. Include slotted inserts, expansion shields, powder-driven fasteners, toggle bolts (when approved for concrete), through bolts for masonry, headed shear studs, machine and carriage bolts for steel, through bolts, lag bolts, and screws for wood. Do not use wood plugs. Provide non-ferrous attachments for non-ferrous metal. Provide exposed fastenings of compatible materials (avoid contact of dissimilar metals), that generally match in color and finish the surfaces to which they are applied. Conceal fastenings where practicable. Provide all fasteners flush with the surfaces they fasten, unless indicated otherwise.

3.4 BUILT-IN WORK

Where necessary and not otherwise indicated, form built-in metal work for anchorage with concrete or masonry. Provide built-in metal work in ample time for securing in place as the work progresses.

3.5 WELDING

Perform welding, welding inspection, and corrective welding in accordance with AWS D1.1/D1.1M. Use continuous welds on all exposed connections. Grind visible welds smooth in the finished installation. Provide welded headed shear studs in accordance with AWS D1.1/D1.1M, Clause 7, except as otherwise specified. Provide in accordance with the safety requirements of EM 385-1-1.

3.6 DISSIMILAR METALS

Where dissimilar metals are in contact, protect surfaces with a coating in accordance with MPI 79 to prevent galvanic or corrosive action. Where aluminum is in contact with concrete, plaster, mortar, masonry, wood, or absorptive materials subject to wetting, protect in accordance with ASTM D1187/D1187M, asphalt-base emulsion. Clean surfaces with metal shavings from installation at the end of each work day.

3.7 INSTALLATION OF BOLLARDS/PIPE GUARDS

Set bollards/pipe guards vertically in concrete piers. Fill hollow cores with concrete having a compressive strength of 3000 psi.

3.8 INSTALLATION OF RIGID DOWNSPOUTS

Secure galvanized rigid downspouts as indicated. Fabricate sheet metal downspout transitions to connect gutter outlets to galvanized downspout intlets. Fabricate transitions of various sizes to enable a telescoping joint at horizontal piping inlets.

3.9 INSTALLATION OF DOWNSPOUT TERMINATIONS

Locate bolts in mortar joints of masonry walls. Provide pipe fittings to accommodate transitions.

3.10 MOUNTING OF SAFETY CHAINS

Provide safety chains where indicated.

3.11 INSTALLATION OF RETROFIT TREADS

Straighten worn or dished concrete steps with leveling compound to fully support retrofit stair treads. Allow compound to set. Drill concrete and install expansion shields. Drill a pilot hole that accommodates the fastener shank in aluminum treads, followed by drilling an indention with a larger bit to countersink fastener heads. Coat the step and tread back with recommended construction adhesive. Position the retrofit tread, compress into place and secure.

3.12 REPAIRS

a. Touchup Painting:

(1) Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with same material as used for shop painting to comply with SSPC PA 1 for touching up shop-painted surfaces.

b. Galvanized Surfaces:

(1) Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A780/A780M.

-- End of Section --

SECTION 05 51 33

METAL LADDERS
02/16, CHG 2: 02/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN LADDER INSTITUTE (ALI)

ALI A14.3	(2008; R 2018) Ladders - Fixed - Safety Requirements

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP Z359.16	(2016) Safety Requirements for Climbing Ladder Fall Arrest Systems

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A47/A47M	(1999; R 2022; E 2022) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A500/A500M	(2023) Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM D1187/D1187M	(1997; R 2018) Standard Specification for Asphalt-Base Emulsions for Use as Protective Coatings for Metal

MASTER PAINTERS INSTITUTE (MPI)

MPI 79	(2016) Primer, Alkyd, Anti-Corrosive for Metal

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC SP 3	(2024) Power Tool Cleaning

SSPC SP 6/NACE No.3 (2007) Commercial Blast Cleaning

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.23 (Nov 2016) Ladders

29 CFR 1910.28 (Nov 2016)Duty to Have Fall Protection and Falling Object Protection

29 CFR 1910.29 (Nov 2016) Fall Protection System and Falling Object Protection - Criteria and Practices

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Ladders, Installation Drawings

SD-03 Product Data

Ladders

Ladder Safety Devices (Climbing Ladder Fall Arrest Systems)

SD-07 Certificates

Fabricator Certification for Ladder Assembly

1.3 CERTIFICATES

Provide fabricator certification for ladder assembly stating that the ladder and associated components have been fabricated according to the requirements of 29 CFR 1910.23.

1.4 QUALIFICATION OF WELDERS

Qualify welders working with steel in accordance with AWS D1.1/D1.1M. Use procedures, materials, and equipment of the type required for the work.

1.5 DELIVERY, STORAGE, AND PROTECTION

Protect from corrosion, deformation, and other types of damage. Store items in an enclosed area free from contact with soil and weather. Remove and replace damaged items with new items.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Structural Carbon Steel

ASTM A36/A36M.

2.1.2 Structural Tubing

ASTM A500/A500M.

2.1.3 Steel Pipe

ASTM A53/A53M, Type E or S, Grade B.

2.1.4 Fittings for Steel Pipe

Standard malleable iron fittings ASTM A47/A47M.

2.2 FABRICATION FINISHES

2.2.1 Shop Cleaning and Painting

2.2.1.1 Surface Preparation

Blast clean interior fabrication surfaces in accordance with SSPC SP 6/NACE No.3. Surfaces that will be exposed in spaces above ceiling or in attic spaces, crawl spaces, furred spaces, and chases may be cleaned in accordance with SSPC SP 3 in lieu of being blast cleaned. Wash cleaned surfaces which become contaminated with rust, dirt, oil, grease, or other contaminants with solvents until thoroughly clean.

2.2.1.2 Pretreatment, Priming and Painting

Apply pretreatment, primer, and paint interior fabrications in accordance with manufacturer's printed instructions. On surfaces concealed in the finished construction or not accessible for finish painting, apply an additional prime coat to a minimum dry film thickness of 1.0 mil. Tint additional prime coat with a small amount of tinting pigment.

2.3 LADDERS

Fabricate vertical ladders conforming to 29 CFR 1910.23 and Section 5 of ALI A14.3. Ladders shall be capable of supporting their maximum intended load. Use 2 1/2 by 3/8 inch steel flats for stringers and 3/4 inch diameter steel rods for rungs. Ladder rungs, step and cleats must be spaced not less than 10 inches and not more than 16 inches wide (measured before installation of ladder safety system), spaced no more than 14 inches apart, plug welded or shouldered and headed into stringers. Install ladders so that the maximum perpendicular distance from the centerline of the steps or rungs, or grab bars, or both, to the nearest permanent object in the back of the ladder or to the finished wall surface will not be less than 7 inches, except for the elevator pit ladders, which have a minimum perpendicular distance of 4.5 inches. Provide heavy clip angles riveted or bolted to the stringer and drilled for not less than two 1/2 inch diameter expansion bolts as indicated. Provide intermediate clip angles not over 48 inches on centers. The top rung of the ladder must be level with the top of the access level, parapet or landing served by the ladder

except for hatches or wells. Extend the side rails of through or side step ladders 42 inches above the access level. Provide ladder access protective swing gates at the top of access/egress level. The drawings must indicate ladder locations and details of critical dimensions and materials.

2.3.1 Phasing out of Ladder Cages and Wells (29 CFR 1910.28, Nov 2016)

Conform to 29 CFR 1910.28 (Nov 2016).

Each newly installed ladder over 20 feet in length shall only be equipped with a personal fall arrest system or climbing ladder fall arrest system (ladder safety device), cages and wells are prohibited. When a fixed ladder, cage, or well, or any portion of a section thereof, is replaced, a personal fall arrest system or climbing ladder fall arrest system (ladder safety device) is installed in at least that section of the fixed ladder, cage, or well where the replacement is located. On and after November 18, 2036, all fixed ladders shall only be equipped with a personal fall arrest system or a ladder safety device (climbing ladder Fall Arrest System).

2.3.2 Ladder Safety Devices (Climbing Ladder Fall Arrest Systems)

Conform to 29 CFR 1910.29, Section 7 of ALI A14.3 and ASSP Z359.16. Install ladder safety devices on ladders over 20 feet long or more. The ladder safety systems must meet the design requirement of the ladders which they serve. The ladder safety system must be capable of sustaining a minimum static load of 1,000 pounds. The applied loads transferred to the climbing ladder mounting locations as a result of a fall shall be specified by the manufacturer of the climbing ladder fall arrest system. Each ladder safety system must allow the worker to climb up and down using both hands and does not require the employee continuously, hold, push, or pull any part of the system while climbing. The connection between the carrier or lifeline and the point of attachment to the body harness does not exceed 9 inches. The ladder safety system consists of a rigid or flexible carrier. Mountings for the rigid carries are attached at each end of the carrier, with intermediate mountings spaced as necessary, along the entire length of the carrier. Mountings for flexible carrier are attached at each end of the carrier and cable guides for flexible carriers are installed at least 25 feet apart but not more than 40 feet apart along the entire length of the carrier. The design and installation of mountings and cable guides does not reduce the design strength of the ladder.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

Install items at locations indicated, according to manufacturer's instructions. Verify all measurements and take all field measurements necessary before fabrication. Provide Exposed fastenings of compatible materials, generally matching in color and finish, and harmonize with the material to which fastenings are applied. Include materials and parts necessary to complete each item, even though such work is not definitely shown or specified. Poor matching of holes for fasteners will be cause for rejection. Conceal fastenings where practicable. Thickness of metal and details of assembly and supports must provide strength and stiffness. Formed joints exposed to the weather to exclude water. Items listed below require additional procedures.

3.2 WORKMANSHIP

Metalwork must be well formed to shape and size, with sharp lines and angles and true curves. Drilling and punching must produce clean true lines and surfaces. Continuously weld along the entire area of contact. Do not tack weld exposed connections of work in place. Grid smooth exposed welds. Provide smooth finish on exposed surfaces of work in place, unless otherwise approved. Where tight fits are required, mill joints. Cope or miter corner joints, well formed, and in true alignment. Install in accordance with manufacturer's installation instructions and approved drawings, cuts, and details.

3.3 ANCHORAGE, FASTENINGS, AND CONNECTIONS

Provide anchorage where necessary for fastening metal items securely in place. Include for anchorage not otherwise specified or indicated slotted inserts, expansion anchors, and powder-actuated fasteners, when approved for concrete; toggle bolts and through bolts for masonry; machine bolts, carriage bolts and powder-actuated threaded studs for steel; through bolts, lag bolts, and screws for wood. Do not use wood plugs in any material. Provide non-ferrous attachments for non-ferrous metal. Make exposed fastenings of compatible materials, generally matching in color and finish, to which fastenings are applied. Conceal fastenings where practicable.

3.4 WELDING

Perform welding, welding inspection, and corrective welding, in accordance with AWS D1.1/D1.1M. Use continuous welds on all exposed connections. Grind visible welds smooth in the finished installation.

3.5 FINISHES

3.5.1 Dissimilar Materials

Where dissimilar metals are in contact, protect surfaces with a coat conforming to MPI 79 to prevent galvanic or corrosive action. Where aluminum is in contact with concrete, plaster, mortar, masonry, wood, or absorptive materials subject to wetting, protect with ASTM D1187/D1187M, asphalt-base emulsion.

3.6 LADDERS

Secure to the adjacent construction with the clip angles attached to the stringer. Secure to masonry or concrete with not less than two 1/2 inch diameter expansion bolts. Install intermediate clip angles not over 48 inches on center. Install brackets as required for securing of ladders welded or bolted to structural steel or built into the masonry or concrete. Ends of ladders must not rest upon floors.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 05 52 01

ALUMINUM RAILINGS
02/18, CHG 1: 02/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 314	(1990; R 2013) Standard Specification for Steel Anchor Bolts

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B18.6.3	(2024) Machine Screws, Tapping Screws, and Metallic Drive Screws (Inch Series)
ASME B18.21.1	(2009; R 2016) Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers (Inch Series)

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A449	(2014; R 2020) Standard Specification for Hex Cap Screws, Bolts, and Studs, Steel, Heat Treated, 120/105/90 ksi Minimum Tensile Strength, General Use
ASTM B26/B26M	(2018; E 2018) Standard Specification for Aluminum-Alloy Sand Castings
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM C514	(2004; R 2020) Standard Specification for

	Nails for the Application of Gypsum Board
ASTM C636/C636M	(2013) Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels
ASTM E488/E488M	(2022) Standard Test Methods for Strength of Anchors in Concrete Elements
ASTM F3125/F3125M	(2019) Standard Specification for High Strength Structural Bolts and Assemblies, Steel and Alloy Steel, Heat Treated, Inch Dimensions 120 ksi and 150 ksi Minimum Tensile Strength, and Metric Dimensions 830 MPa and 1040 MPa Minimum Tensile Strength

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Hardware; G

Shapes, Plates, Bars and Strips; G

Masonry Anchorage Devices; G

Aluminum Railings and Handrails; G

SD-07 Certificates

Welding Procedures; G

Welder Qualification; G

1.3 QUALITY CONTROL

1.3.1 Welding Procedures

Submit results of welding procedures testing in accordance with AWS D1.1/D1.1M and AWS D1.2/D1.2M, as applicable, made in the presence of the Contracting Officer and by an approved testing laboratory at the Contractor's expense.

1.3.2 Welder Qualification

Submit certified welder qualification by tests in accordance with AWS D1.1/D1.1M and AWS D1.2/D1.2M, as applicable, or under an equivalent approved qualification test. In addition, perform tests on test pieces in positions and with clearances equivalent to those actually encountered. If a test weld fails to meet requirements, conduct an immediate retest of two test welds and ensure that each test weld passes. Failure in the

immediate retest will require that the welder be retested after further practice or training and make a complete set of test welds.

PART 2 PRODUCTS

2.1 FABRICATION

Preassemble items in the shop to the greatest extent possible. Disassemble units only to the extent necessary for shipping and handling. Clearly mark units for reassembly and coordinated installation.

For the fabrication of work exposed to view, use only materials that are smooth and free of surface blemishes, including pitting, seam marks, roller marks, rolled trade names, and roughness. Remove blemishes by grinding, or by welding and grinding, before cleaning, treating, and applying surface finishes, including zinc coatings.

Provide railing and handrail detail plans and elevations at not less than 1 inch to 1 foot. Provide details of sections and connections at not less than 3 inches to 1 foot. Also detail setting drawings, diagrams, templates for installation of anchorages, including concrete inserts, anchor bolts, and miscellaneous metal items having integral anchors.

Use materials of size and thicknesses indicated or, if not indicated, of the size and thickness necessary to produce adequate strength and durability in the finished product for its intended use. Work the materials to the dimensions indicated on approved detail drawings, using proven details of fabrication and support. Use the type of materials indicated or specified for the various components of work.

Form exposed work true to line and level, with accurate angles and surfaces and straight sharp edges. Ensure that all exposed edges are eased to a radius of approximately 1/32 inch. Bend metal corners to the smallest radius possible without causing grain separation or otherwise impairing the work.

Weld corners and seams continuously and in accordance with the recommendations of AWS D1.1/D1.1M. Grind exposed welds smooth and flush to match and blend with adjoining surfaces.

Form the exposed connections with hairline joints that are flush and smooth, using concealed fasteners wherever possible. Use exposed fasteners of the type indicated or, if not indicated, use countersunk Phillips flathead screws or bolts.

Provide anchorage of the type indicated and coordinated with the supporting structure. Fabricate anchoring devices and space as indicated and as required to provide adequate support for the intended use of the work.

2.1.1 Aluminum Railings

Fabrication: Provide fabrication jointing by one of the following methods:

a. Use flush-type rail fittings, welded and ground smooth with splice locks secured with 3/8 inch recessed-head set screws.

b. Ensure that mitered and welded joints made by fitting; post to top rail; intermediate rail to post; and corners, are groove welded and

ground smooth. Where allowed by the Contracting Officer, provide butt splices reinforced by a tight-fitting dowel or sleeve not less than 6 inches in length. Tack-weld or epoxy-cement the dowel or sleeve to one side of the splice.

c. Assemble railings using slip-on aluminum-magnesium alloy fittings for joints. Fasten fittings to pipe or tube with 1/4 or 3/8 inch stainless-steel recessed-head setscrews. Provide assembled railings with fittings only at vertical supports or at rail terminations attached to walls. Provide expansion joints at the midpoint of panels. Provide a setscrew in only one side of the slip-on sleeve. Provide alloy fittings to conform to ASTM B26/B26M.

2.2 COMPONENTS

2.2.1 Masonry Anchorage Devices

Provide masonry anchorage devices consisting of expansion shields complying with AASHTO M 314, ASTM E488/E488M and ASTM C514 as follows:

Provide lead expansion shields for machine screws and bolts 1/4 inch and smaller; head-out embedded nut type, single-unit class, Group I, Type 1, Class 1.

Provide lead expansion shields for machine screws and bolts larger than 1/4 inch in size; head-out embedded nut type, multiple-unit class, Group I, Type 1, Class 2.

Provide bolt anchor expansion shields for lag bolts; zinc-alloy, long-shield anchor class, Group II, Type 1, Class 1.

Provide bolt anchor expansion shields for bolts; closed-end bottom-bearing class, Group II, Type 2, Class 1.

Provide tumble-wing-type toggle bolts conforming to ASTM F3125/F3125M, ASTM A449 and ASTM C636/C636M, type, class, and style as required.

2.2.2 Fasteners

Provide galvanized zinc-coated fasteners in accordance with ASTM A153/A153M used for exterior applications or where built into exterior walls or floor systems. Select fasteners for the type, grade, and class required for the installation of steel stair items.

Provide standard hexagon-head bolts, conforming to ASTM A307, Grade A.

Provide cadmium-plated steel machine screws conforming to ASME B18.6.3.

Provide plain round, general-assembly-grade, carbon steel washers conforming to ASME B18.21.1.

2.2.3 Aluminum Railings And Handrails

Provide railings and handrails consisting of aluminum semihollow tube with rounded corners ASTM B221 and sized to match the adjoining members. Provide clear anodized aluminum railings. Ensure that all fasteners are Series 300 stainless steel.

Remove and replace damaged members incorporated into aluminum railings.

Replace with aluminum components having matching cross sections.

PART 3 EXECUTION

3.1 PREPARATION

Adjust stair railings and handrails before securing in place in order to ensure proper matching at butting joints and correct alignment throughout their length. Plumb posts in each direction. Secure posts and rail ends to building construction as follows:

a. Anchor posts in concrete by means of pipe sleeves set and anchored into concrete. Provide sleeves of galvanized, standard-weight, steel pipe, not less than 6 inches long, and having an inside diameter not less than 1/2 inch greater than the outside diameter of the inserted pipe post. Provide steel plate closure secured to the bottom of the sleeve, with closure width and length not less than 1 inch greater than the outside diameter of the sleeve. After posts have been inserted into sleeves, fill the annular space between the post and sleeve with nonshrink grout or a quick-setting hydraulic cement. Cover anchorage joint with a round steel flange welded to the post.

Secure handrails to walls by means of wall brackets and wall return fitting at handrail ends. Provide brackets of malleable iron castings, with not less than 3 inch projection from the finished wall surface to the center of the pipe, drilled to receive one 3/8 inch bolt. Locate brackets not more than 60 inches on center. Provide wall return fittings of cast iron castings, flush type, with the same projection as that specified for wall brackets. Secure wall brackets and wall return fittings to building construction as follows:

a. For concrete and solid masonry anchorage, use bolt anchor expansion shields and lag bolts.

b. For hollow masonry and stud partition anchorage, use toggle bolts having square heads.

Install toe boards and brackets. Make splices, where required, at expansion joints.

3.2 INSTALLATION

Provide complete, detailed fabrication and installation drawings for all hardware, and for all shapes, plates, bars, and strips used in accordance with the design specifications cited in this section.

3.2.1 Aluminum Handrail

Affix replacement members to base structure in a similar manner to that adjoining. Provide Series 300 stainless-steel bolts to anchor aluminum alloy flanges, of a size appropriate to the standard product of the manufacturer. Where aluminum or alloy fittings or extrusions are to be in contact with dissimilar metals or concrete, coat the contact surface with a heavy coating of bituminous paint.

3.3 FIELD QUALITY CONTROL

3.3.1 Field Welding

Ensure that procedures of manual shielded metal arc welding, appearance and quality of welds made, and methods used in correcting welding work comply with AWS D1.1/D1.1M and AWS D1.2/D1.2M, as applicable.

-- End of Section --

SECTION 06 10 00

ROUGH CARPENTRY
08/16, CHG 3: 05/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN LUMBER STANDARDS COMMITTEE (ALSC)

ALSC PS 20	(2021) American Softwood Lumber Standard

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B18.2.1	(2012; R 2021) Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)
ASME B18.2.2	(2022) Nuts for General Applications: Machine Screw Nuts, and Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)
ASME B18.5.2.1M	(2006; R 2011) Metric Round Head Short Square Neck Bolts
ASME B18.5.2.2M	(1982; R 2010) Metric Round Head Square Neck Bolts
ASME B18.6.1	(2016) Wood Screws (Inch Series)

AMERICAN WOOD COUNCIL (AWC)

AWC NDS	(2018) National Design Specification (NDS) for Wood Construction
AWC WFCM	(2012) Wood Frame Construction Manual for One- and Two-Family Dwellings

AMERICAN WOOD PROTECTION ASSOCIATION (AWPA)

AWPA BOOK	(2015) AWPA Book of Standards
AWPA M2	(2019) Standard for the Inspection of Preservative Treated Wood Products for Industrial Use
AWPA M6	(2024) Brands Used on Preservative Treated Materials
AWPA P5	(2015) Standard for Waterborne Preservatives

AWPA U1	(2024) Use Category System: User Specification for Treated Wood

APA - THE ENGINEERED WOOD ASSOCIATION (APA)

APA E445	(2002) Performance Standards and Qualification Policy for Structural-Use Panels (APA PRP-108)
APA F405	(19) Product Guide: Performance Rated Panels
APA L870	(2010) Voluntary Product Standard, PS 1-09, Structural Plywood
APA S350	(2019) PS 2-18, Performance Standard for Wood-Based Structural-Use Panels

ASTM INTERNATIONAL (ASTM)

ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM F547	(2017) Standard Terminology of Nails for Use with Wood and Wood-Base Materials
ASTM F1667/F1667M	(2021a) Standard Specification for Driven Fasteners: Nails, Spikes, and Staples

FM GLOBAL (FM)

FM 4435	(2017) Roof Perimeter Flashing

INTERNATIONAL CODE COUNCIL (ICC)

ICC IBC	(2024) International Building Code

SOUTHERN PINE INSPECTION BUREAU (SPIB)

SPIB 1003	(2021) Standard Grading Rules for Southern Pine Lumber

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-1923	(Rev A; Notice 1; Notice 2; Notice 3; Notice 4) Shield, Expansion (Lag, Machine and Externally Threaded Wedge Bolt Anchors)
CID A-A-1924	(Rev A; Notice 3) Shield, Expansion (Self Drilling Tubular Expansion Shell Bolt Anchors
CID A-A-1925	(Rev A; Notice 1; Notice 2; Notice 3; Notice 4) Shield Expansion (Nail Anchors)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S"

classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-06 Test Reports

Preservative-treated Lumber and Plywood

SD-07 Certificates

Certificates of Grade

Preservative Treatment

1.3 DELIVERY AND STORAGE

Deliver materials to the site in an undamaged condition. Store, protect, handle, and install prefabricated structural elements in accordance with manufacturer's instructions and as specified. Store materials off the ground to provide proper ventilation, with drainage to avoid standing water, and protection against ground moisture and dampness. Store materials with a moisture barrier at both the ground level and as a cover forming a well ventilated enclosure. Adhere to requirements for stacking, lifting, bracing, cutting, notching, and special fastening requirements. Do not use materials that have visible moisture or biological growth. Remove defective and damaged materials and provide new materials. Store separated reusable wood waste convenient to cutting station and area of work.

1.4 GRADING AND MARKING

1.4.1 Lumber

Mark each piece of framing and board lumber or each bundle of small pieces of lumber with the grade mark of a recognized association or independent inspection agency. Such association or agency must be certified by the Board of Review, American Lumber Standards Committee, to grade the species used. Surfaces that are to be exposed to view must not bear grademarks, stamps, or any type of identifying mark. Hammer marking will be permitted on timbers when all surfaces will be exposed to view.

1.4.2 Plywood

Mark each sheet with the mark of a recognized association or independent inspection agency that maintains continuing control over the quality of the plywood. The mark must identify the plywood by species group or span rating, exposure durability classification, grade, and compliance with APA L870. Surfaces that are to be exposed to view must not bear grademarks or other types of identifying marks.

1.4.3 Preservative-Treated Lumber and Plywood

The Contractor is responsible for the quality of treated wood products. Each treated piece must be inspected in accordance with AWPA M2 and permanently marked or branded, by the producer, in accordance with AWPA M6. The Contractor must provide Contracting Officer's Representative (COR) with the inspection report of an approved independent inspection agency that offered products comply with applicable AWPA Standards. The appropriate Quality Mark on each piece will be accepted, in lieu of

inspection reports, as evidence of compliance with applicable AWPA treatment standards.

Provide chemical coating documentation for field treating cuts and holes. Identify compatible fasteners for selected preservative treatments.

1.5 SIZES AND SURFACING

ALSC PS 20 for dressed sizes of yard and structural lumber. Lumber must be surfaced four sides. Size references, unless otherwise specified, are nominal sizes, and actual sizes must be within manufacturing tolerances allowed by the standard under which the product is produced. Other measurements are IP or SI standard.

1.6 MOISTURE CONTENT

Kiln-dry treated lumber after treatment. Maximum moisture content of wood products must be as follows at the time of delivery to the job site:

a. Framing lumber and board, 19 percent maximum

1.7 PRESERVATIVE TREATMENT

Treat wood products with waterborne wood preservatives conforming to AWPA P5. Pressure treatment of wood products must conform to the requirements of AWPA BOOK Use Category System Standards U1 and T1. Pressure-treated wood products must not contain arsenic, chromium, or other agents classified as carcinogenic, probably carcinogenic, or possibly carcinogenic to humans (compounds in Groups 1, 2A, or 2B) by the International Agency for Research on Cancer (IARC), Lyon, France. Pressure-treated wood products must not exceed the limits of the U.S. EPA's Toxic Characteristic Leaching Procedure (TCLP), and must not be classified as hazardous waste. Submit certification from treating plant stating chemicals and process used and net amount of preservatives retained are in conformance with specified standards. In accordance with AWPA U1 provide non-copper preservative treatment such as EL2, PTI or SBX,DOT for products in direct contact with sheet metal.

a. Specific treatments must be verified by the report of an approved independent inspection agency, or the AWPA Quality Mark on each piece. Minimize cutting and avoid breathing sawdust. Brush coat areas that are cut or drilled after treatment with either the same preservative used in the treatment or with a 2 percent copper naphthenate solution.
   (1) Nailers, edge strips, crickets, curbs, and cants for roof decks.
   (2) Plywood and 2 x framing of various widths for catwalks and balustrades.

1.8 CERTIFICATIONS

1.8.1 Certified Wood Grades

Provide certificates of grade from the grading agency on graded but unmarked lumber or plywood attesting that materials meet the grade requirements specified herein.

PART 2 PRODUCTS

2.1 LUMBER

2.1.1 Framing Lumber

Framing lumber and sheathing must be one of the species listed in the table below. Minimum grade of species must be as listed.

Table of Grades for Framing and Board Lumber			
Grading Rules	Species	Framing	Board Lumber

Table of Grades for Framing and Board Lumber			
Grading Rules	Species	Framing	Board Lumber
SPIB 1003 standard grading rules	Southern Pine	All Species: Standard Light Framing or No. 3 Structural Light Framing (Stud Grade for 2x4 nominal size, 10 feet and shorter)	No. 2 Boards

2.1.1.1 Pressure treated material for roof constructions:

AWPA U1, UC3B, Commodity Specification A, Sawn Products, various sizes, No. 2 Grade lumber

2.1.1.2 Pressure treated material for catwalks and balustrades:

AWPA U1, UC1, Commodity Specification A, Sawn Products, various sizes, No. 2 Grade lumber

2.2 PLYWOOD PANELS

APA L870, APA S350, APA E445, and APA F405 respectively.

2.2.1 Sheathing

2.2.1.1 Plywood

Furnish an Identification Index of not less than 24/16. Provide exterior grade material with phenol resin for all applications.

2.2.1.1.1 Pressure treated material for roof constructions:

AWPA U1, UC3B, Commodity Specification F, Wood Composites, Grade C-C Plugged, Group 1, various thicknesses, Exterior Exposure plywood

2.2.1.1.2 Pressure treated material for catwalks and balustrades:

AWPA U1, UC1, Commodity Specification F, Wood Composites, Grade A-C, Group 1, various thicknesses, Exterior Exposure plywood

2.3 ROUGH HARDWARE

Unless otherwise indicated or specified, rough hardware must be of the type and size necessary for the project requirements. Sizes, types, and spacing of fastenings of manufactured building materials must be as recommended by the product manufacturer unless otherwise indicated or specified. Rough hardware exposed to the weather or embedded in or in contact with preservative treated wood, exterior masonry, or concrete walls or slabs must be hot-dip zinc-coated in accordance with ASTM A153/A153M.

2.3.1 Bolts, Nuts, Studs, and Rivets

ASME B18.2.1, ASME B18.5.2.1M, ASME B18.5.2.2M and ASME B18.2.2.

2.3.2 Expansion Shields

CID A-A-1923, CID A-A-1924, and CID A-A-1925. Except as shown otherwise, maximum size of devices must be 3/8 inch.

2.3.3 Lag Screws and Lag Bolts

ASME B18.2.1.

2.3.4 Wood Screws

ASME B18.6.1.

2.3.5 Nails

ASTM F547, size and type best suited for purpose. In general, 8-penny or larger nails must be used for nailing through 1 inch thick lumber and for toe nailing 2 inch thick lumber; 16-penny or larger nails must be used for nailing through 2 inch thick lumber. Nails used with treated lumber and sheathing must be hot-dipped galvanized in accordance with ASTM A153/A153M. Nailing must be in accordance with the recommended nailing schedule contained in AWC WFCM. Where detailed nailing requirements are not specified, nail size and spacing must be sufficient to develop an adequate strength for the connection. The connection's strength must be verified against the nail capacity tables in AWC NDS. Reasonable judgment backed by experience must ensure that the designed connection will not cause the wood to split. If a load situation exceeds a reasonable limit for nails, a specialized connector must be used.

2.3.6 Wire Nails

ASTM F1667/F1667M.

PART 3 EXECUTION

3.1 INSTALLATION

Do not install building construction materials that show visual evidence of biological growth.

Conform to AWC WFCM and install in accordance with the National Association of Home Builders (NAHB) Advanced Framing Techniques: Optimum Value Engineering, unless otherwise indicated or specified. Select lumber sizes to minimize waste. Fit framing lumber and other rough carpentry, set accurately to the required lines and levels, and secure in place in a rigid manner. Do not splice framing members between bearing points. Set joists, rafters, and purlins with their crown edge up. Provide adequate support as appropriate to the application, climate, and modulus of elasticity of the product. Provide as necessary for the proper completion of the work all framing members not indicated or specified. Spiking and nailing not indicated or specified otherwise must be in accordance with the Nailing Schedule contained in ICC IBC; perform bolting in an approved manner. Spikes, nails, and bolts must be drawn up tight.

3.2 MISCELLANEOUS

3.2.1 Wood Roof Nailers and Edge Strips

Provide sizes and configurations indicated or specified and anchored securely to continuous construction.

3.2.1.1 Roof Edge Strips and Nailers

Provide at perimeter of roof, around openings through roof, and where roofs abut walls, curbs, and other vertical surfaces. Except where indicated otherwise, nailers must be 6 inches wide and the same thickness as the insulation. Anchor nailers securely to underlying construction. Anchor perimeter nailers in accordance with FM 4435.

3.2.2 Temporary Centering, Bracing, and Shoring

Provide for the support and protection of masonry work during construction.

3.3 WASTE MANAGEMENT OF WOOD PRODUCTS

In accordance with the Waste Management Plan and as specified. Separate and reuse scrap sheet materials and framing members. Clearly separate damaged wood and other scrap lumber for acceptable alternative uses on site.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 06 41 16.00 10

PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS
08/10, CHG 1: 11/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A161.2	(1998) Decorative Laminate Countertops, Performance Standards for Fabricated High Pressure

ASTM INTERNATIONAL (ASTM)

ASTM F547	(2017) Standard Terminology of Nails for Use with Wood and Wood-Base Materials

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

ANSI/BHMA A156.9	(2020) Cabinet Hardware

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI/NEMA LD 3	(2005) Standard for High-Pressure Decorative Laminates

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

UL ENVIRONMENT (ULE)

ULE Greenguard	UL Greenguard Certification Program

WINDOW AND DOOR MANUFACTURERS ASSOCIATION (WDMA)

ANSI/WDMA I.S.1A	(2013) Interior Architectural Wood Flush Doors

WOODWORK INSTITUTE (WI)

NAAWS 4.0	(2021 Errata Edition) North American Architectural Woodwork Standards

1.2 SYSTEM DESCRIPTION

Work in this section includes laminate clad custom casework cabinets and vanity aprons as shown on the drawings and as described in this specification. This Section includes high-pressure laminate surfacing and cabinet hardware. Comply with EPA requirements in accordance with Section

01 33 29 SUSTAINABILITY REPORTING. All exposed and semi-exposed surfaces, whose finish is not otherwise noted on the drawings or finish schedule, shall be sanded smooth and shall receive a clear finish of polyurethane. Wood finish may be shop finished or field applied in accordance with Section 09 90 00 PAINTS AND COATINGS.

1.3 SUSTAINABILITY REPORTING

See Section 01 33 29 SUSTAINABILITY REPORTING for sustainability information.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approvalSubmittals with an "S" are for inclusion in the Sustainability eNotebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Shop Drawings

Installation

SD-03 Product Data

Wood Materials

Finish Schedule

Certification

SD-04 Samples

Plastic Laminates

Cabinet Hardware

SD-07 Certificates

Quality Assurance

Laminate Clad Casework

1.5 QUALITY ASSURANCE

1.5.1 General Requirements

Unless otherwise noted on the drawings, all materials, construction methods, and fabrication shall conform to and comply with the custom grade quality standards as outlined in NAAWS 4.0, Section for laminate clad cabinets. These standards shall apply in lieu of omissions or specific requirements in this specification. Contractors and their personnel engaged in the work shall be able to demonstrate successful experience with work of comparable extent, complexity and quality to that shown and specified. Submit a quality control statement which illustrates compliance with and understanding of NAAWS 4.0 requirements, in general,

and the specific NAAWS 4.0 requirements provided in this specification. The quality control statement shall also certify a minimum of ten years Contractor's experience in laminate clad casework fabrication and construction. The quality control statement shall provide a list of a minimum of five successfully completed projects of a similar scope, size, and complexity.

1.5.2 Sustainable Design Certification

Product shall be third party certified in accordance with ULE Greenguard, SCS Scientific Certification Systems Indoor Advantage or equal. Certification shall be performed annually and shall be current.

1.6 DELIVERY, STORAGE, AND HANDLING

Casework may be delivered knockdown or fully assembled. Deliver all units to the site in undamaged condition, stored off the ground in fully enclosed areas, and protected from damage. The storage area shall be well ventilated and not subject to extreme changes in temperature or humidity.

1.7 SEQUENCING AND SCHEDULING

Coordinate work with other trades. Units shall not be installed in any room or space until painting, and ceiling installation are complete within the room where the units are located. Floor cabinets shall be installed before finished flooring materials are installed.

PART 2 PRODUCTS

2.1 WOOD MATERIALS

2.1.1 Lumber

a. All framing lumber shall be kiln-dried Grade III to dimensions as shown on the drawings. Frame front, where indicated on the drawings, shall be nominal 3/4 inch hardwood.

b. Standing or running trim casework components, which are specified to receive a transparent finish, shall be a hardwood species, plain sawn. AWI grade shall be custom. Location, shape, and dimensions shall be as indicated on the drawings.

2.1.2 Panel Products

2.1.2.1 Plywood

All plywood panels used for framing purposes shall be veneer core hardwood plywood, NAAWS 4.0 Grade AA. Nominal thickness of plywood panels shall be as indicated in this specification and on the drawings.

2.2 HIGH PRESSURE DECORATIVE LAMINATE (HPDL)

All plastic laminates shall meet the requirements of ANSI/NEMA LD 3 and ANSI A161.2 for high-pressure decorative laminates. Design, colors, surface finish and texture, and locations shall be as indicated on the drawings. Submit two samples of each plastic laminate pattern and color. Samples shall be a minimum of 5 by 7 inches in size. Plastic laminate types and nominal minimum thicknesses for casework components shall be as indicated in the following paragraphs.

2.2.1 Horizontal General Purpose Standard (HGS) Grade

Horizontal general purpose standard grade plastic laminate shall be 0.048 inches (plus or minus 0.005 inches) in thickness. This laminate grade is intended for horizontal surfaces where postforming is not required.

2.2.2 Vertical General Purpose Standard (VGS) Grade

Vertical general purpose standard grade plastic laminate shall be 0.028 inches (plus or minus 0.004 inches) in thickness. This laminate grade is intended for exposed exterior vertical surfaces of casework components where postforming is not required.

2.2.3 Horizontal General Purpose Postformable (HGP) Grade

Horizontal general purpose postformable grade plastic laminate shall be 0.042 inches (plus or minus 0.005 inches) in thickness. This laminate grade is intended for horizontal surfaces where post forming is required.

2.2.4 Backing Sheet (BK) Grade

Undecorated backing sheet grade laminate is formulated specifically to be used on the backside of plastic laminated panel substrates to enhance dimensional stability of the substrate. Backing sheet thickness shall be 0.020 inches. Backing sheets shall be provided for all laminated casework components where plastic laminate finish is applied to only one surface of the component substrate.

2.3 EDGE BANDING

Edge banding for casework doors and drawer fronts shall be PVC vinyl and shall be 0.020 inch thick. Material width shall be 15/16 inches. Color and pattern shall match exposed door and drawer front laminate pattern and color.

2.4 CABINET HARDWARE

Submit one sample of each cabinet hardware item specified to include hinges and pulls. All hardware shall conform to ANSI/BHMA A156.9, unless otherwise noted, and shall consist of the following components:

2.4.1 Door Hinges

Concealed European hinges.

2.4.2 Cabinet Pulls

Conform to ABA standard U-shaped type pull, BHMA No. B02011.

2.4.3 Drawer Slide

Side mounted type, with full extension and a minimum 100 pound load capacity. Slides shall include an stop to avoid accidental drawer removal.

2.4.4 Adjustable Shelf Support System

Recessed mortise mounted metal standards, BHMA No. B04071. Support clips for the standards must be closed type, BHMA No. B04081.

2.5 FASTENERS

Nails, screws, and other suitable fasteners shall be the size and type best suited for the purpose and shall conform to ASTM F547 where applicable.

2.6 ADHESIVES, CAULKS, AND SEALANTS

2.6.1 Adhesives

Adhesives shall be of a formula and type recommended by AWI. Adhesives shall be selected for their ability to provide a durable, permanent bond and shall take into consideration such factors as materials to be bonded, expansion and contraction, bond strength, fire rating, and moisture resistance. Adhesives shall meet local regulations regarding VOC emissions and off-gassing.

2.6.1.1 Wood Joinery

Adhesives used to bond wood members shall be a Type II for interior use urea-formaldehyde resin formula. Adhesives shall withstand a bond test as described in ANSI/WDMA I.S.1A.

2.6.1.2 Laminate Adhesive

Adhesive used to join high-pressure decorative laminate to wood shall be adhesive consistent with AWI and laminate manufacturer's recommendations. PVC edgebanding shall be adhered using a polymer-based hot melt glue.

2.6.2 Caulk

Caulk used to fill voids and joints between laminated components and between laminated components and adjacent surfaces shall be clear, 100 percent silicone.

2.6.3 Sealant

Sealant shall be of a type and composition recommended by the substrate manufacturer to provide a moisture barrier at sink cutouts and all other locations where unfinished substrate edges may be subjected to moisture.

2.7 ACCESSORIES

2.8 FABRICATION

Verify field measurements as indicated in the shop drawings before fabrication. Fabrication and assembly of components shall be accomplished at the shop site to the maximum extent possible. Construction and fabrication of cabinets and their components shall meet or exceed the requirements for AWI custom grade unless otherwise indicated in this specification. Cabinet style, in accordance with NAAWS 4.0, Section 400-G descriptions, shall be as indicated on the drawings.

2.8.1 Base and Wall Cabinet Case Body

2.8.1.1 Cabinet Components

Frame members shall be glued-together, kiln-dried hardwood lumber. Top

corners, bottom corners, and cabinet bottoms shall be braced with either hardwood blocks or water-resistant glue and nailed in place metal or plastic corner braces. Cabinet components shall be constructed from the following materials and thicknesses:

2.8.1.1.1 Body Members (Ends, Divisions, Bottoms, and Tops)

3/4 inch plywood panel product

2.8.1.1.2 Face Frames and Rails

3/4 inch panel product

2.8.1.1.3 Shelving

3/4 inch plywood panel product

2.8.1.1.4 Cabinet Backs

1/4 inch plywood panel product

2.8.1.1.5 Drawer Sides, Backs, and Subfronts

1/2 inch panel product

2.8.1.1.6 Drawer Bottoms

1/2 inch plywood panel product

2.8.1.1.7 Door and Drawer Fronts

3/4-inch plywood panel product

2.8.1.2 Joinery Method for Case Body Members

2.8.1.2.1 Tops, Exposed Ends, and Bottoms

a. Steel "European" assembly screws (1-1/2 inch from end, 5 inch on center, fasteners will not be visible on exposed parts).

b. Doweled, glued under pressure (approx. 4 dowels per 12 inches of joint).

c. Stop dado, glued under pressure, and either nailed, stapled or screwed (fasteners will not be visible on exposed parts).

d. Spline or biscuit, glued under pressure.

2.8.1.2.2 Exposed End Corner and Face Frame Attachment

2.8.1.2.2.1 Mitered Joint

lock miter or spline or biscuit, glued under pressure (no visible fasteners)

2.8.1.2.2.2 Non-Mitered Joint (90 degree)

butt joint glued under pressure (no visible fasteners)

2.8.1.2.3 Cabinet Backs (Wall Hung Cabinets)

Wall hung cabinet backs must not be relied upon to support the full weight of the cabinet and its anticipated load for hanging/mounting purposes. Method of back joinery and hanging/mounting mechanisms should transfer the load to case body members. Fabrication method shall be:

2.8.1.2.3.1 Full Bound

Full bound, captured in grooves on cabinet sides, top, and bottom. Cabinet backs for floor standing cabinets shall be side bound, captured in grooves; glued and fastened to top and bottom.

2.8.1.2.3.2 Full Overlay

Full overlay, plant-on backs with minimum back thickness of 1/2 inch and minimum No. 12 plated (no case hardened) screws spaced a minimum 3 inches on center. Edge of back shall not be exposed on finished sides. Anchor strips are not required when so attached.

2.8.1.2.4 Cabinet Backs (Floor Standing Cabinets)

2.8.1.2.4.1 Full Overlay

Full overlay, plant-on backs with minimum back thickness of 1/2 inch and minimum No. 12 plated (no case hardened) screws spaced a minimum 3 inches on center. Edge of back shall not be exposed on finished sides. Anchor strips are not required when so attached.

2.8.1.2.5 Wall Anchor Strips

Wall Anchor Strips shall be required for all cabinets with backs less than 1/2 inch thick. Strips shall consist of minimum 1/2 inch thick lumber, minimum 2-1/2 inches width; securely attached to wall side of cabinet back - top and bottom for wall hung cabinets, top only for floor standing cabinets.

2.8.2 Cabinet Floor Base

Floor cabinets shall be mounted on a base constructed of 3/4 inch veneer core exterior marine grade or salt-treated plywood. Base assembly components shall be a moisture-resistant panel product. Finished height for each cabinet base shall be as indicated on the drawings. Bottom edge of the cabinet door or drawer face shall be flush with top of base.

2.8.3 Cabinet Door and Drawer Fronts

Door and drawer fronts shall be fabricated from 3/4 inch medium density particleboard. All door and drawer front edges shall be surfaced with high pressure plastic laminate, color and pattern to match exterior face laminate.

2.8.4 Drawer Assembly

2.8.4.1 Drawer Components

Drawer components shall consist of a removable drawer front, sides, backs, and bottom. Drawer components shall be constructed of the following materials and thicknesses:

2.8.4.1.1 Drawer Sides and Backs For Laminate Finish

1/2 inch thick 7-ply hardwood veneer core substrate

2.8.4.1.2 Drawer Bottom

1/2 inch thick plywood product for transparent or plastic laminate finish

2.8.4.2 Drawer Assembly Joinery Method

a. Multiple dovetail (all corners) or French dovetail front/dadoed back, glued under pressure.

b. Doweled, glued under pressure.

c. Lock shoulder, glued and pin nailed.

d. Bottoms shall be set into sides, front, and back, 1/4 inch deep groove with a minimum 3/8 inch standing shoulder.

2.8.5 Shelving

2.8.5.1 General Requirements

Shelving shall be fabricated from 3/4 inch veneer core plywood. All shelving top and bottom surfaces shall be finished with HPDL plastic laminate. Shelf edges shall be finished in a HPDL plastic laminate.

2.8.5.2 Shelf Support System

The shelf support system shall be:

2.8.5.2.1 Recessed (Mortised) Metal Shelf Standards

Mortise standards flush with the finishes surface of the cabinet interior side walls, two per side. Position and space standards on the side walls to provide a stable shelf surface that eliminates tipping when shelf front is weighted. Install and adjust standards vertically to provide a level, stable shelf surface when clips are in place.

2.8.6 Laminate Application

Laminate application to substrates shall follow the recommended procedures and instructions of the laminate manufacturer and ANSI/NEMA LD 3, using tools and devices specifically designed for laminate fabrication and application. Provide a balanced backer sheet (Grade BK) wherever only one surface of the component substrate requires a plastic laminate finish. Apply required grade of laminate in full uninterrupted sheets consistent with manufactured sizes using one piece for full length only, using adhesives specified herein or as recommended by the manufacturer. Fit corners and joints hairline. All laminate edges shall be machined flush, filed, sanded, or buffed to remove machine marks and eased (sharp corners removed). Clean up at easing shall be such that no overlap of the member eased is visible. Fabrication shall conform to ANSI A161.2. Laminate types and grades for component surfaces shall be as follows unless otherwise indicated on the drawings:

2.8.6.1 Base/Wall Cabinet Case Body

a. Exterior (exposed) surfaces to include exposed and semi-exposed face frame surfaces: HPDL Grade VGS.

b. Interior (semi-exposed) surfaces to include interior back wall, bottom, and side walls: HPL.

2.8.6.2 Adjustable Shelving

2.8.6.2.1 Top and Bottom Surfaces

HPDL Grade HGS

2.8.6.2.2 All Edges

HPDL Grade VGS

2.8.6.3 Fixed Shelving

2.8.6.3.1 Top and Bottom Surfaces

HPDL Grade HGS

2.8.6.3.2 Exposed Edges

HPDL Grade VGS

2.8.6.4 Door, Drawer Fronts, Access Panels

2.8.6.4.1 Exterior (Exposed) and Interior (Semi-Exposed) Faces

HPDL Grade VGS

2.8.6.4.2 Edges

HPDL Grade VGS

2.8.6.5 Drawer Assembly

All interior and exterior surfaces: HPDL.

2.8.6.6 Tolerances

Flushness, flatness, and joint tolerances of laminated surfaces shall meet the NAAWS 4.0 custom grade requirements.

2.8.7 Finishing

2.8.7.1 Filling

No fasteners shall be exposed on laminated surfaces. All nails, screws, and other fasteners in non-laminated cabinet components shall be countersunk and the holes filled with wood filler consistent in color with the wood species.

2.8.7.2 Sanding

All surfaces requiring coatings shall be prepared by sanding with a grit

and in a manner that scratches will not show in the final system.

2.8.7.3 Coatings

Types, method of application and location of casework finishes shall be in accordance with the finish schedule, drawings and Section 09 90 00 PAINTS AND COATINGS. All cabinet reveals shall be painted. Submit descriptive data which provides narrative written verification of all types of construction materials and finishes, methods of construction, etc. not clearly illustrated on the submitted shop drawings. Data shall provide written verification of conformance with NAAWS 4.0 for the quality indicated to include materials, tolerances, and types of construction. Both the manufacturer of materials and the fabricator shall submit available literature which describes re-cycled product content, operations and processes in place that support efficient use of natural resources, energy efficiency, emissions of ozone depleting chemicals, management of water and operational waste, indoor environmental quality, and other production techniques supporting sustainable design and products.

PART 3 EXECUTION

3.1 INSTALLATION

Installation shall comply with applicable requirements for NAAWS 4.0 custom quality standards. Countertops and fabricated assemblies shall be installed level, plumb, and true to line, in locations shown on the drawings. Cabinets and other laminate clad casework assemblies shall be attached and anchored securely to the floor and walls with mechanical fasteners that are appropriate for the wall and floor construction.

3.1.1 Anchoring Systems

3.1.1.1 Floor

Base cabinets shall utilize a floor anchoring system as detailed on the drawings. Anchoring and mechanical fasteners shall not be visible from the finished side of the casework assembly. Cabinet assemblies shall be attached to anchored bases without visible fasteners as indicated in the drawings. Where assembly abuts a wall surface, anchoring shall include a minimum 1/2 inch thick lumber or panel product hanging strip, minimum 2-1/2 inch width; securely attached to the top of the wall side of the cabinet back.

3.1.1.2 Wall

Cabinet to be wall mounted shall utilize minimum 1/2 inch thick lumber or panel product hanging strips, minimum 2-1/2 inch width; securely attached to the wall side of the cabinet back, both top and bottom.

3.1.2 Countertops

Countertops shall be installed in locations as indicated on the drawings. Countertops shall be fastened to supporting casework structure with mechanical fasteners, hidden from view. All joints formed by the countertop or countertop splash and adjacent wall surfaces shall be filled with a clear silicone caulk. Loose back and side splashes shall be adhered to both the countertop surface perimeter and the adjacent wall surface with adhesives appropriate for the type of materials to be adhered. Joints between the countertop surface and splash shall be filled

with clear silicone caulk in a smooth consistent concave bead. Bead size shall be the minimum necessary to fill the joint and any surrounding voids or cracks.

3.1.3 Hardware

Casework hardware shall be installed in types and locations as indicated on the drawings. Where fully concealed European-style hinges are specified to be used with particleboard or fiberboard doors, the use of plastic or synthetic insertion dowels shall be used to receive 3/16 inch "Euroscrews". The use of wood screws without insertion dowels is prohibited.

3.1.4 Doors, Drawers and Removable Panels

The fitting of doors, drawers and removable panels shall be accomplished within target fitting tolerances for gaps and flushness in accordance with NAAWS 4.0 custom grade requirements.

3.1.5 Plumbing Fixtures

Install sinks, sink hardware, and other plumbing fixtures in locations as indicated on the drawings and in accordance with Section 22 00 00 PLUMBING, GENERAL PURPOSE.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 06 61 16

SOLID SURFACING FABRICATIONS
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM D570	(2022) Standard Test Method for Water Absorption of Plastics
ASTM D638	(2014) Standard Test Method for Tensile Properties of Plastics
ASTM D696	(2016) Standard Test Method for Coefficient of Linear Thermal Expansion of Plastics Between -30 degrees C and 30 degrees C With a Vitreous Silica Dilatometer
ASTM D790	(2017) Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
ASTM D2583	(2013a) Indentation Hardness of Rigid Plastics by Means of a Barcol Impressor
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM G21	(2015; R 2021; E 2021) Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

CSA GROUP (CSA)

CSA B45.5-17/IAPMO Z124	(2017; Errata 2017; Errata 2018) Plastic Plumbing Fixtures

INTERNATIONAL CAST POLYMER ASSOCIATION (ICPA)

ICPA SS-1	(2001) Performance Standard for Solid Surface Materials

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI/NEMA LD 3	(2005) Standard for High-Pressure Decorative Laminates

NSF INTERNATIONAL (NSF)

NSF/ANSI 51	(2023) Food Equipment Materials

1.2 SYSTEM DESCRIPTION

a. Work under this section includes items utilizing solid surfacing material fabrications as indicated on the drawings and as described in this specification. Do not change source of supply for materials after work has started, if the appearance of finished work would be affected.

b. In most instances, installation of solid surfacing material fabricated components and assemblies requires strong correctly located structural support provided by other trades. To provide a stable, sound, secure installation, close coordination is required between the solid surfacing material fabricator/installer and other trades to ensure that necessary structural wall support, cabinet counter top structural support, proper clearances, and other supporting components are provided for the installation of wall panels, counter tops, shelving, and all other solid surfacing material fabrications to the degree and extent recommended by the solid surfacing material manufacturer.

c. Provide appropriate staging areas for solid surfacing material fabrications. Allow variation in component size and location of openings of plus or minus 1/8 inch.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Fabrication Drawings; G

Installation; G

Shower Wall Panel And Pan System; G

SD-03 Product Data

Solid Polymer; G

Indoor air quality for solid surface seam and sealant products; S

Shower Wall Panel And Pan System; G

SD-04 Samples

Material; G

Counter Tops; G

SD-06 Test Reports

Test Report Results

SD-07 Certificates

Qualifications

Indoor Air Quality for solid surface fabrication products; S

SD-10 Operation and Maintenance Data

Solid Polymer, Data Package 1; G

1.4 QUALITY ASSURANCE

1.4.1 Qualifications

To ensure warranty coverage, provide manufacturer certified solid surfacing fabricators to fabricate the solid surfacing material being utilized. Mark all fabrications with the fabricator's certification label affixed in an inconspicuous location. Minimum of 5 years of experience working with solid surfacing materials is required of fabricators. Submit solid surfacing material manufacturer's certification attesting to fabricator qualification approval.

1.5 DELIVERY, STORAGE, AND HANDLING

Do not deliver materials to project site until areas are ready for installation. Deliver components and materials to the site undamaged, in containers clearly marked and labeled with manufacturer's name. Store materials indoors and take adequate precautions to prevent damage to finished surfaces. Provide protective coverings to prevent physical damage or staining following installation, for duration of project.

1.6 WARRANTY

Provide manufacturer's warranty to repair or replace defective materials, excluding damages caused by physical or chemical abuse or excessive heat, and workmanship for a period of 10 years from date of final acceptance of the work.

PART 2 PRODUCTS

2.1 MATERIAL

Submit detail fabrication drawings and installation drawings of each solid surfacing fabrication indicated. Include elevations, dimensions, clearances, details of construction and anchorage, and details of joints and connections.

Submit manufacturers' descriptive product data for each type of solid

polymer fabrication indicated. Include manufacturers' literature, finishes, profiles and thicknesses of materials.

Submit manufacturers' operations and maintenance data for each type of solid polymer fabrication in accordance with Section 01 78 23 OPERATIONS AND MAINTENANCE DATA.

2.1.1 Solid Surfacing Material

Provide solid polymer that is a homogeneous filled solid polymer; not coated, laminated or of a composite construction, complying with ICPA SS-1. Provide material that meets or exceeds the minimum physical and performance properties specified. Superficial damage to a depth of 0.01 inch must be repairable by sanding or polishing. Material thickness is 1/4 inch. Submit a minimum 4 inch by 4 inch sample of each color and pattern for approval; include full range of color and pattern variation. Retain approved samples as a standard for this work. Submit test report results from an independent testing laboratory attesting that the submitted solid surfacing materials meet or exceed each of the specified performance requirements.

a. Horizontal Surfaces: 1/2 inch thick material

b. Vertical Surfaces: 1/4 inch thick material

c. Provide materials that meet the emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type). Provide certification or validation of indoor air quality for solid surface fabrication products.

2.1.2 Cast, 100 Percent Acrylic Polymer Solid Surfacing Material

Cast, 100 percent acrylic solid polymer material composed of acrylic polymer, mineral fillers, and pigments. Provide acrylic polymer that meets or exceeds the following minimum performance requirements:

PROPERTY	REQUIREMENT (min. or max.)	TEST PROCEDURE
Tensile Strength	4000 psi (max.)	ASTM D638
Hardness	55-Barcol Impressor (min.)	ASTM D2583
Thermal Expansion	.000023 in/in/F (max.)	ASTM D696
Boiling Water Surface Resistance	No Change	ANSI/NEMA LD 3-3.05
High Temperature Resistance	No Change	ANSI/NEMA LD 3-3.06
Impact Resistance (Ball drop)		ANSI/NEMA LD 3-303
1/4 inch sheet	36-inches, 1/2 lb ball, no failure	

PROPERTY	REQUIREMENT (min. or max.)	TEST PROCEDURE
1/2 inch sheet	140-inches, 1/2 lb ball, no failure	
3/4 inch sheet	200-inches, 1/2 lb ball, no failure	
Mold & Mildew Growth	No growth	ASTM G21
Bacteria Growth	No growth	ASTM G21
Liquid Absorption (Weight in 24 hrs.)	0.1 percent max.	ASTM D570
Flammability		ASTM E84
Flame Spread	25 max.	
Smoke Developed	30 max.	
Sanitation	"Food Contact" approval	NSF/ANSI 51
Flexural Strength	6,800 psi (min.)	ASTM D790

2.1.3 Material Patterns and Colors

Provide pattern and color for all solid surfacing material components and fabrications as indicated; colors listed are not intended to limit the selection of equal colors from other manufacturers. Provide products with consistent patterned color throughout thickness of the product.

2.1.4 Surface Finish

Provide a uniform appearance on exposed finished surfaces and edges. Exposed surface finish is matte; gloss rating of 5-20,semigloss; gloss rating of 25-50 or polished; gloss rating of 55-80.

2.2 ACCESSORY PRODUCTS

Provide accessory products, as specified below, as manufactured by the solid surfacing material manufacturer or as approved by the solid surfacing material manufacturer for use with the solid surfacing materials being specified.

2.2.1 Adhesives

Provide a two-part seam adhesive kit to create permanent, inconspicuous, non-porous, hard seams and joints by chemical bond between solid surfacing materials and components to create a monolithic appearance of the fabrication. Provide adhesive approved by the solid surfacing material manufacturer. Color-match adhesive to the surfaces being bonded where solid-colored, solid surfacing materials are being bonded together. Provide clear or color matched seam adhesive where particulate patterned, solid surfacing materials are being bonded together.

2.2.2 Seam and Sealant Emissions

Provide seam and other accessory materials that meet the emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type). Provide validation of indoor air quality for solid surface seam and sealant products.

2.2.3 Silicone Sealant

Provide silicone sealant, mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, acid-curing; ASTM C920, Type S, Grade NS, Class 25, Use NT; clear formulation; approved for use by the solid surfacing material manufacturer.

2.2.4 Mounting Hardware

Provide mounting hardware, including sink/bowl clips, inserts and fasteners for attachment of undermount sinks and lavatories.

2.3 FABRICATIONS

Provide factory or shop fabricate components to sizes and shapes indicated, to the greatest extent practical, in accordance with approved Shop Drawings and manufacturer's requirements. Provide factory cutouts for sinks, lavatories, and plumbing fixtures where indicated on the drawings. Contours and radii must be routed to template, with edges smooth. Defective and inaccurate work will be rejected. Submit product data indicating product description, fabrication information, and compliance with specified performance requirements for solid surfacing material, joint adhesive, sealants, and heat reflective tape. Both the manufacturer of materials and the fabricator are required to submit a detailed description of operations and processes in place that support efficient use of natural resources, energy efficiency, emissions of ozone depleting chemicals, management of water and operational waste, indoor environmental quality, and other production techniques supporting sustainable design and products.

2.3.1 Joints and Seams

Form joints and seams between solid surfacing material components using manufacturer's approved seam adhesive. Provide inconspicuous joints in appearance without voids to create a monolithic appearance.

2.3.2 Edge Finishing

Rout and finish component edges to a smooth, uniform appearance and finish. Provide edge shapes and treatments, including any inserts, as detailed on the drawings. Rout all cutouts, then sand all edges smooth. Repair or reject defective or inaccurate work.

2.3.3 Counter Top Splashes

Fabricate backsplashes and end splashes from 1/2 inch thick solid surfacing material to be 4 inches high. Provide backsplashes and end splashes for all counter tops. Shop fabricate backsplashes and provide loose, to be field attached.

2.3.3.1 End Splashes

Provide end splashes loose for installation at the jobsite after horizontal surfaces to which they are to be attached have been installed.

2.3.4 Window Stools

Fabricate window stools from 1/2 inch thick solid surfacing material; dimensions, edge shape, and other details as selected from manufacturer's available pre-fabricated standards, equal to the width of the window opening by a 1/2 inch overhang of the window sill depth. Provide bullnose edge profiles where exposed.

2.3.5 Counter Tops

Fabricate all solid surfacing material, counter top components from 1/2 inch thick material. Indicate details, dimensions, locations, and quantities on the drawings. Provide counter tops with 4 inch loose at all locations. Attach 2 inch wide reinforcing strip of solid surfacing material under each horizontal counter top seam. Submit a minimum 1 foot wide by 6 inch deep, full size sample for each type of counter top shown on the project drawings; include the edge profile and backsplash as detailed on the drawings and at least one seam. Retain approved sample as standard for this work. Provide square edge profile where exposed.

2.3.5.1 Counter Tops with Sinks

a. Provide stainless steel sink; include cutouts to template for counter tops with sinks as furnished by the sink manufacturer. Provide manufacturer's standard sink under mounting. Seal between sink and counter top with specified silicone sealant. Provide sink, faucet, and plumbing requirements in accordance with Section 22 00 00 PLUMBING,GENERAL PURPOSE.

b. Provide manufacturer's standard solid polymer sinks, pre-molded product specifically designed to be integral with solid surfacing material counter tops. See paragraph SOLID POLYMER SINKS for additional requirements.

2.3.6 Solid Polymer Bowls

Provide solid polymer bowls that are a standard product of the solid polymer manufacturer, in compliance with CSA B45.5-17/IAPMO Z124 requirements, designed specifically to be integral within the solid surfacing material counter tops. Provide bowls of the same polymer composition as the adjoining counter top. Bowl design must support a seam adhesive flush installation method.

2.3.7 Shower Wall Panel And Pan System

Provide tub/shower wall enclosures with a system of solid surfacing material components. Shower wall panel and pan system to include: prefabricated shower pan base and wall panels and shampoo shelf; dimensions of all components are as indicated. Form panels from manufacturer's standard 1/4 inch thick sheet product. Provide panels full width and height with seams occurring only at the inside corners of the enclosure. Provide shampoo shelf of configuration, shape, and location as indicated.

Prefabricated shower bases for BEQ's are of the sizes encountered and molded with drains at a low point. Pans are a 0.5 inch thick, adhered to a 2 inch extruded polystyrene core and have a maximum slope of 0.5 inches per foot. The maximum pan size is a nominal 8 feet, 0 inches by 5 feet, 4 inches. Drain locations vary and extend at least 8 inches from adjoining walls. Coordinate drain locations with piping rough in locations encountered. Furnish matching fiberglass reinforced perimeter flanges with extruded polystyrene cores to accommodate drain piping and fittings within bases. Provide 3 inch wide by 1 inch high, internal lip curbs at exposed base edges. Pans have an 80 grit, slip resistant surface. Furnish epoxy weld sealant, gaskets, edge reinforcement and similar recommended accessories to provide a watertight installation. Shower base assemblies comply with ASTM E84.

Shower base and wall panels are Glacier White.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Components

Install all components and fabricated units plumb, level, and rigid. Make field joints between solid surfacing material components using solid surfacing material manufacturer's approved seam adhesives, to provide a monolithic appearance with joints inconspicuous in the finished work. Attach metal or vitreous china sinks and lavatory bowls to counter tops using solid surfacing material manufacturer's recommended clear silicone sealant and mounting hardware. Install solid polymer sinks and bowls using a color-matched seam adhesive.

3.1.1.1 Loose Counter Top Splashes

Mount loose splashes in the locations noted on the drawings. Adhere loose splashes to the counter top with a color matched silicone sealant when the solid surfacing material components are solid colors. Use a clear silicone sealant to provide adhesion of particulate patterned solid surfacing material splashes to counter tops.

3.1.1.2 Wall Panels & Panel Systems

Installation of wall panels and system components to substrates must include the use of a specified panel adhesive. Use specified seam adhesive to adhere all solid surfacing material components to each other with the exception of expansion joints and inside corners. All inside corners and expansion joints between solid surfacing material components must be joined with specified silicone sealant. All joints between solid surfacing material components and non-solid polymer surfaces must be sealed with specified silicone sealant.

3.1.1.3 Shower Wall Panel System

Assemble and test drain piping for watertightness. Remove perimeter flange extruded polystyrene core material to closely fit piping. Apply edge reinforcements and gaskets. Use a 0.75 inch notched trowel to apply a bed of modified thin set mortar to receiving substrates. Set perimeter flanges within bedding. Seal the flange perimeter with weathertight

sealant. Attach the drain body and outlet to the shower base. Use a 0.75 inch notched trowel to apply a bed of modified thin set mortar to the exposed extruded polystyrene core of the perimeter flange. Prepare the drain outlet and receiving piping for a watertight fit. Set shower bases within bedding. Seal the shower base to flange joint with weathertight sealant. Remove excess sealant. Seal the shower base to wall joint with epoxy weld for a weathertight joint.

Reference Wall Panels & Panel Systems for shower wall assemblies. Provide watertight panel joints.

3.1.2 Silicone Sealant

Use specified silicone sealant to seal all expansion joints between solid surfacing material components and all joints between solid surfacing material components and other adjacent surfaces such as walls, floors, ceiling, and plumbing fixtures. Provide sealant bead smooth and uniform in appearance and minimum size necessary to bridge any gaps between the solid surfacing material and the adjacent surface. Provide continuous bead and run the entire length of the joint being sealed.

3.1.3 Plumbing

Make plumbing connections to sinks and lavatories.

3.2 CLEAN-UP

Components must be cleaned after installation and covered to protect against damage during completion of the remaining project items. Damaged components must be repaired or replaced at the Contractor's sole expense.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 19 00

WATER REPELLENTS
05/11, CHG 1: 08/17

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 501.1	(2017) Standard Test Method for Water Penetration of Windows, Curtain Walls and Doors Using Dynamic Pressure

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO T 259	(2002; R 2017) Standard Method of Test for Resistance of Concrete to Chloride Ion Penetration
AASHTO T 260	(1997; R 2016) Standard Method of Test for Sampling and Testing for Chloride Ion in Concrete and Concrete Raw Materials

ASTM INTERNATIONAL (ASTM)

ASTM C140/C140M	(2022b) Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units
ASTM C672/C672M	(2012) Scaling Resistance of Concrete Surfaces Exposed to Deicing Chemicals
ASTM D2369	(2010; R 2015; E 2015) Volatile Content of Coatings
ASTM D3278	(1996; R 2011) Flash Point of Liquids by Small Scale Closed-Cup Apparatus
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E514/E514M	(2020) Standard Test Method for Water Penetration and Leakage Through Masonry
ASTM G154	(2016) Standard Practice for Operating Fluorescent Light Apparatus for UV Exposure of Nonmetallic Materials

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.1000 Air Contaminants

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Water Repellents

SD-06 Test Reports

Water Absorption

Accelerated Weathering

Resistance to Chloride Ion Penetration

Moisture Vapor Transmission

Scaling Resistance

Water Penetration and Leakage

SD-07 Certificates

Manufacturer's Qualifications

Applicator's Qualifications

Evidence of Acceptable Variation

Warranty

SD-08 Manufacturer's Instructions

Application Instructions

Provide manufacturer's instructions including preparation, application, recommended equipment to be used, safety measures, and protection of completed application.

Manufacturer's Safety Data Sheets

1.3 QUALITY ASSURANCE

1.3.1 Qualifications

a. Manufacturer's qualifications: Minimum five years record of successful in-service experience of water repellent treatments manufactured for masonry applications.

b. Applicator's qualifications: Minimum five years successful experience in projects of similar scope using specified or similar treatment

materials and manufacturer's approval for application.

1.3.2 Performance Requirements

a. Water absorption: ASTM C140/C140M. Comparison of treated and untreated specimens.

b. Moisture vapor transmission: ASTM E96/E96M. Comparison of treated and untreated specimens.

c. Water penetration and leakage through masonry: ASTM E514/E514M.

1.3.3 Evidence of Acceptable Variation

If a product proposed for use does not conform to requirements of the referenced specification, submit for approval to the Contracting Officer, evidence that the proposed product is either equal to or better than the product specified. Include the following:

a. Identification of the proposed substitution;

b. Reason why the substitution is necessary;

c. A comparative analysis of the specified product and the proposed substitution, including tabulations of the composition of pigment and vehicle;

d. The difference between the specified product and the proposed substitution; and

e. Other information necessary for an accurate comparison of the proposed substitution and the specified product.

1.4 SAMPLE TEST PANEL

The approved Sample Test Panel will serve as the standard of quality for all other water repellent coating work. Do not proceed with application until the sample panel has been approved by the Contracting Officer.

1.4.1 Sample Test Panel

Prior to commencing work, including bulk purchase and delivery of material, apply water repellent treatment to a minimum 4 feet high by 4 feet long masonry test-panel. Provide a full height expansion joint at mid-panel length. Prepare and seal joint with materials approved for project use.

1.4.1.1 Testing

AAMA 501.1 Provide field water testing of water repellent treated surfaces in the presence of the Contracting Officer and the water repellent treatment manufacturer's representative.

a. Apply water repellent to left side of mock-up and allow to cure prior to application of treatment to right side.

b. Twenty days after completion of application of treatment, test mock-up with 5/8 inch garden hose, with spray nozzle, located 10 feet from wall and aimed upward so water strikes wall at 45 degree downward

angle. After water has run continuously for three hours observe back side of mock-up for water penetration and leakage. If leakage is detected make changes as needed and retest.

c. Coordinate testing procedures and modify project treatment application as required to pass mock-up tests for water penetration and leakage resistance.

1.4.1.2 Approval

Proceed with water repellent treatment work only after completion of field test application and approval of mock-up and tests by the Contracting Officer.

1.4.2 Pre-Installation Meeting

a. Attend pre-installation meeting required prior to commencement of masonry installation.

b. Review procedures and coordination required between water repellent treatment work and work of other trades which could affect work to be performed under this section of the work.

c. Convene additional pre-installation meeting prior to water repellent treatment application for coordination with work not previously coordinated including joint sealants.

1.5 REGULATORY REQUIREMENTS

1.5.1 Environmental Protection

Notify the Contracting Officer of any water repellent coating specified herein which fails to conform to the local Air Quality Management District Rules at the location of the Project. In localities where the specified coating is prohibited, the Contracting Officer may direct the substitution of an acceptable coating.

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver materials in original sealed containers, clearly marked with the manufacturer's name, brand name, type of material, batch number, percent solids by weight and volume, and date of manufacturer. Store materials off the ground, in a dry area where the temperature will be not less 50 degrees F nor more than 85 degrees F.

1.7 SAFETY METHODS

Apply coating materials using safety methods and equipment in accordance with Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS, and the following:

1.7.1 Toxic Materials

To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

a. The coating manufacturer when using solvents or other chemicals. Use impermeable gloves, chemical goggles or face shield, and other recommended protective clothing and equipment to avoid exposure of skin, eyes, and respiratory system. Conduct work in a manner to

minimize exposure of building occupants and the general public.

b. 29 CFR 1910.1000.

c. Threshold Limit Values (R) of the American Conference of Governmental Industrial Hygienists.

d. Manufacturer's Safety Data Sheets.

1.8 ENVIRONMENTAL CONDITIONS

1.8.1 Weather and Substrate Conditions

Do not proceed with application of water repellents under any of the following conditions, except with written recommendations of manufacturer.

a. Ambient temperature is less than 40 degrees F.

b. Substrate faces have cured less than one month.

c. Rain or temperature below 40 degrees F are predicted for a period of 24 hours before or after treatment.

d. Earlier than three days after surfaces are wet.

e. Substrate is frozen or surface temperature is less than 40 degrees F and falling.

1.8.2 Moisture Condition

Determine moisture content of substrate meets manufacturer's requirements prior to application of water repellent material.

1.9 SEQUENCING AND SCHEDULING

1.9.1 Masonry Surfaces

Do not start water repellent coating until all joint tooling, pointing and masonry cleaning operations have been completed. Allow masonry to cure for at least 60 days under normal weather conditions before applying water repellent.

1.9.2 Sealants

Do not apply water repellents until the sealants for joints adjacent to surfaces receiving water repellent treatment have been installed and cured.

a. Water repellent work may precede sealant application only if sealant adhesion and compatibility have been tested and verified using substrate, water repellent, and sealant materials identical to those used in the work.

b. Provide manufacturers' test results of compatibility.

1.10 INSPECTIONS

Notify the manufacturer's representative a minimum of 72 hours prior to scheduled application of water repellents for field inspection. Inspect surfaces and obtain approval in writing from the manufacturer's

representative prior to any application of any water repellent coating.

1.11 SURFACES TO BE COATED

Coat all exterior masonry surfaces. This includes back faces of parapets, top of walls, edges and returns adjacent to windows and door frames and free standing walls.

1.12 WARRANTY

Provide a warranty, issued jointly by the manufacturer and the applicator of the water repellent treatment against moisture penetration through the treated structurally sound surface for a period of five years. Warranty to provide the material, labor, and equipment necessary to remedy the problem. At the satisfactory completion of the work, complete the warranty sign, notarize, and submit to the Contracting Officer.

PART 2 PRODUCTS

2.1 MATERIALS

Water repellent solution shall be a clear, non-yellowing, deep-penetrating, VOC compliant solution. Material shall not stain or discolor and shall produce a mechanical and chemical interlocking bond with the substrate to the depth of the penetration.

2.2 WATER REPELLENTS

2.2.1 Siloxanes

Penetrating water repellent. Alkylalkoxysiloxanes that are oligomerous with alcohol, ethanol, mineral spirits, or water.

a. Solids by weight: ASTM D2369, 7.5 to 16.0 percent.

b. Volatile Organic Content (VOC) after blending: Less than 175 grams per liter.

c. Density, activated: 8.4 pounds per gallon, plus or minus one percent.

d. Flash point, ASTM D3278: Greater than 212 degrees F.

2.2.2 VOC-Complying Water Repellents

Products certified by the manufacturer that they comply with local regulations controlling use of volatile organic compounds (VOC's).

2.3 PERFORMANCE CRITERIA

2.3.1 Siloxanes

a. Dry time for recoat, if necessary: One to two hours depending on weather conditions.

b. Penetration: 3/8 inch, depending on substrate.

c. Water penetration and leakage through masonry, ASTM E514/E514M, percentage reduction of leakage: 97.0 percent minimum.

d. Moisture vapor transmission, ASTM E96/E96M: 47.5 perms or 82 percent maximum compared to untreated sample.

e. Resistance to accelerated weathering, ASTM G154. Testing 2,500 hours: No loss in repellency.

f. Resistance to chloride ion penetration, AASHTO T 259 and AASHTO T 260.

g. Scaling resistance,ASTM C672/C672M, non-air-entrained concrete: Zero rating, no scaling, 100 cycles treated concrete.

PART 3 EXECUTION

3.1 EXAMINATION

Examine surfaces to be treated to ensure that:

a. All visible cracks, voids or holes have been repaired.

b. All mortar joints in masonry are tight and sound, have not been re-set or misaligned and show no cracks or spalling.

c. Moisture contents of walls does not exceed 15 percent when measured on an electronic moisture register, calibrated for the appropriate substrate.

d. Concrete surfaces are free of form release agents, curing compounds and other compounds that would prevent full penetration of the water repellent material.

Do not start water repellent treatment work until all deficiencies have been corrected, examined and found acceptable to the Contracting Officer and the water repellent treatment manufacturer. Do not apply treatment to damp, dirty, dusty or otherwise unsuitable surfaces. Comply with the manufacturer's recommendations for suitability of surface.

3.2 PREPARATION

3.2.1 Surface Preparation

Prepare substrates in accordance with water repellent treatment manufacturer's recommendation. Clean surfaces of dust, dirt, efflorescence, alkaline, and foreign matter detrimental to proper application of water repellent treatment.

3.2.2 Protection

Provide masking or protective covering for materials which could be damaged by water repellent treatment.

a. Protect glass, glazed products, and prefinished products from contact with water repellent treatment.

b. Protect landscape materials with breathing type drop cloths: plastic covers are not acceptable.

3.2.3 Compatibility

a. Confirm treatment compatibility with each type of joint sealer within

or adjacent to surfaces receiving water repellent treatment in accordance with manufacturer's recommendations.

b. When recommended by joint sealer manufacturer, apply treatment after application and cure of joint sealers. Coordinate treatment with joint sealers.

c. Mask surfaces indicated to receive joint sealers which would be adversely affected by water repellent treatment where treatment must be applied prior to application of joint sealers.

3.3 MIXING

Mix water repellent material thoroughly in accordance with the manufacturer's recommendations. Mix, in quantities required for that days work, all containers prior to application. Mix each container the same length of time.

3.4 APPLICATION

In strict accordance with the manufacturers written requirements. Do not start application without the manufacturer's representative being present or his written acceptance of the surface to be treated.

3.4.1 Water Repellent Treatment

3.4.1.1 Spray Application

Spray apply water repellent material to exterior surfaces using low-pressure airless spray equipment in strict accordance with manufacturer's printed application, instructions, and precautions. Maintain copies at the job site. Apply flood coat in an overlapping pattern allowing approximately 8 to 10 inch rundown on the vertical surface. Maintain a wet edge at all overlaps, both vertical and horizontal. Hold gun maximum 18 inches from wall.

3.4.1.2 Brush or Roller Application

Brush or roller apply water repellent material only at locations where overspray would affect adjacent materials and where not practical for spray applications.

3.4.1.3 Covered Surfaces

Coat all exterior masonry surfaces including back faces of parapets, tops of walls, edges and returns adjacent to window and door frames, window sills, and free-standing walls.

3.4.1.4 Rate of Application

Apply materials to exterior surfaces at the coverages recommended by the manufacturer and as determined from sample panel test. Increase or decrease application rates depending upon the surface texture and porosity of the substrate so as to achieve even appearance and total water repellency.

3.4.1.5 Number of Coats

The sample panel test shall determine the number of coats required to

achieve full coverage and protection.

3.4.1.6 Appearance

If unevenness in appearance, lines of work termination or scaffold lines exist, or detectable changes from the approved sample panel occur, the Contracting Officer may require additional treatment at no additional cost to the Government. Apply any required additional treatment to a natural break off point.

3.5 CLEANING

Clean all runs, drips, and overspray from adjacent surfaces while the water repellent treatment is still wet in a manner recommended by the manufacturer.

3.6 FIELD QUALITY CONTROL

Do not remove drums containing water repellent material from the job site until completion of all water repellent treatment and until so authorized by the Contracting Officer.

3.6.1 Field Testing

AAMA 501.1. At a time not less than twenty days after completion of the water repellent coating application, subject a representative wall area of the building to the Navy Hose Stream Field Test similar to AAMA 501.1 hose test to simulated rainfall for a period of three hours. Use a minimum 5/8 inch diameter hose and a fixed lawn sprinkler spray head which will direct a full flow of water against the wall. Place the sprinkler head so that the water will strike the wall downward at a 45 degree angle to the wall. If the inside of the wall shows any trace of moisture during or following the test, apply another coat of water repellent, at the manufacturer's recommended coverage rate to the entire building. Repeat testing and re-coating process until no moisture shows on the inside wall face. Accomplish any required work retesting and re-coating at no additional cost to the Government.

3.6.2 Site Inspection

Inspect treatment in progress by manufacturer's representative to verify compliance with manufacturer instructions and recommendations.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 21 13

BOARD AND BLOCK INSULATION
08/23, CHG 1: 08/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C272/C272M	(2018; R 2024) Standard Test Method for Water Absorption of Core Materials for Sandwich Constructions
ASTM C578	(2023) Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation
ASTM C930	(2019; R 2025) Standard Classification of Potential Health and Safety Concerns Associated with Thermal Insulation Materials and Accessories
ASTM D1621	(2016; R2023) Standard Test Method for Compressive Properties of Rigid Cellular Plastics
ASTM D1709	(2024) Standard Test Methods for Impact Resistance of Plastic Film by the Free-Falling Dart Method
ASTM D3833/D3833M	(1996; R 2019) Standard Test Method for Water Vapor Transmission of Pressure-Sensitive Tapes
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E154/E154M	(2008; R 2025) Standard Test Methods for Water Vapor Retarders Used in Contact with Earth Under Concrete Slabs, on Walls, or as Ground Cover

INTERNATIONAL CODE COUNCIL (ICC)

ICC IBC	(2024) International Building Code

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Manufacturer's Standard Details; G

SD-03 Product Data

Environmental Data for Materials; G

Block or Board Insulation; G

Vapor Retarder; G

Pressure Sensitive Tape; G

Accessories including sealants; G

Recycled Content for Block or Board Insulation; S

SD-07 Certificates

Indoor Air Quality For Block Or Board Insulation; S

SD-08 Manufacturer's Instructions

Insulation Installation and Handling

Adhesive

SD-11 Closeout Submittals

Draft Guarantee; G

Final Guarantee; G

Draft Warranty; G

Final Warranty; G

1.3 MANUFACTURER'S DETAILS

Submit manufacturer's standard details indicating methods of attachment and spacing, transition and termination details, and installation details. Include verification of existing conditions.

1.4 PRODUCT DATA

Include environmental data for materials descriptions, recommendations for product shelf life and precautions for flammability and toxicity. Include data to verify compatibility of sealants with insulation.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver materials to the site in original sealed wrapping bearing manufacturer's name and brand designation, specification number, type, grade, R-value, and class. Store and handle to protect from damage. Do not allow insulation materials to become wet, soiled, crushed, or covered with ice or snow. Comply with manufacturer's recommendations for handling, storing, and protecting of materials before and during installation.

1.5.2 Storage

Inspect materials delivered to the site for damage and store out of weather in manufacturer's original packaging. Store only in dry locations, not subject to open flames or sparks, and easily accessible for inspection and handling. Keep materials wrapped and separated from off-gassing materials (such as drying paints and adhesives). Do not use materials that have visible moisture or biological growth. Comply with manufacturer's recommendations for handling, storage, and protection of materials before and during installation.

1.6 SAFETY PRECAUTIONS

1.6.1 Other Safety Considerations

Comply with the safety requirements of ASTM C930.

1.7 SPECIAL WARRANTIES

1.7.1 Guarantee

Guarantee insulation installation against failure due to ultraviolet light exposure for a period of three years from the date of Beneficial Occupancy or Substantial Completion. Submit draft guarantee and final guarantee in accordance with Sections 01 78 00 CLOSEOUT SUBMITTALS.

1.7.2 Warranty

Provide manufacturer's material warranty for all system components for a period of three years from the date of Beneficial Occupancy or Substantial Completion. Submit draft warranty and final warranty in accordance with Sections 01 78 00 CLOSEOUT SUBMITTALS.

PART 2 PRODUCTS

2.1 BLOCK OR BOARD INSULATION

Provide insulation with the following physical properties and in accordance with the following standards:

a. Extruded Preformed Cellular Polystyrene (XPS): ASTM C578 REV A, TypeIV

2.1.1 Thermal Resistance

Provide a wall R-value of 15.

2.1.2 Fire Protection Requirements

a. Flame spread index of 75 or less when tested in accordance with ASTM E84.

b. Smoke developed index of 200 or less when tested in accordance with ASTM E84.

c. Provide insulated assemblies in accordance ICC IBC Chapter Fire and Smoke Protection Features.

2.1.3 Other Material Properties

Provide thermal insulating materials with the following properties:

a. Rigid cellular plastics: Compressive Resistance at Yield: Not less than 25 pounds per square inch (psi) when measured according to ASTM D1621.

b. Water Vapor Permeance: Not more than 1.5 Perms or less when measured according to ASTM E96/E96M, desiccant method, in the thickness required to provide the specified thermal resistance, including facings, if any.

c. Water Absorption: Not more than 0.3 percent by total immersion, by volume, when measured according to ASTM C272/C272M.

2.1.4 Recycled Materials

Provide thermal insulation containing recycled materials to the extent practicable, provided that the material meets all other requirements of this section. The minimum required recycled material contents (by weight, not volume) are:

Phenolic Rigid Foam:	5 percent

Provide data identifying percentage of recycled content for block or board insulation.

2.1.5 Indoor Air Quality

Provide certification of indoor air quality for block or board insulation.

2.1.6 Prohibited Materials

Do not provide materials containing asbestos.

2.2 VAPOR RETARDER

2.2.1 Vapor Retarder under Floor Slab

a. Water vapor permeance: 0.1 Perm or less when tested in accordance with ASTM E96/E96M.

b. Puncture resistance: Minimum of 2200 grams when tested according to ASTM D1709.

c. Tensile strength: Minimum of 45.0 lbf/in. when tested in accordance with ASTM E154/E154M.

2.3 PRESSURE SENSITIVE TAPE

As recommended by manufacturer of vapor retarder(s). Match water vapor permeance rating for each vapor retarder specified. Provide tape in accordance with ASTM D3833/D3833M.

2.4 ACCESSORIES

2.4.1 Adhesive

As recommended by insulation manufacturer.

2.4.2 Mechanical Fasteners

Corrosion resistant fasteners as recommended by the insulation manufacturer.

PART 3 EXECUTION

3.1 EXISTING CONDITIONS

Prior to installation, ensure all areas that will be in contact with the insulation are dry and free of projections that could cause voids, compressed insulation, or punctured vapor retarders. Do not proceed with installation if moisture or other conditions are present and notify the Contracting Officer of such conditions. Do not proceed with the work until conditions have been corrected and verified to be dry.

3.2 PREPARATION

3.2.1 Blocking Around Heat Producing Devices

Provide noncombustible blocking at all spaces between heat producing devices and the floors through which they pass.

3.3 INSTALLATION

3.3.1 Insulation Installation and Handling

Provide insulation in accordance with the manufacturer's printed installation instructions. Keep material dry and free of extraneous materials.

3.3.2 Electrical Wiring

Do not install insulation in a manner that would enclose electrical

conductors, that are not installed in conduit, between two layers of insulation.

3.3.3 Continuity of Insulation

Butt tightly against adjoining boards and obstructions. Provide continuity and integrity of insulation at corners, walls and floors. Avoid creating thermal bridges and voids. Provide and verify continuity of insulative barrier throughout the building enclosure.

3.3.4 Coordination

Verify final installed insulation thicknesses comply with thicknesses indicated and with the approved insulation submittal(s).

3.4 INSTALLATION ON WALLS

3.4.1 Installation on Masonry Walls

Apply board directly to masonry with adhesive or fasteners. Fit between obstructions without impaling board on ties or anchors. Apply in parallel courses with joints breaking midway over course below. Place boards in moderate contact with adjoining insulation without forcing and without gaps. Cut and shape as required to fit around wall penetrations, projections or openings to accommodate conduit or other utilities. Seal around cutouts with sealant. Install insulation in wall cavities so that it leaves at least a nominal one inch air space outside of the insulation to allow for cavity drainage.

3.4.2 Adhesive Attachment to Concrete and Masonry Walls

Apply adhesive to wall and completely cover wall with insulation.

a. Spot method: Provide at least six spots having diameter of approximately 4 inches, located at each corner and mid points of each of the longer sides of each board.

b. Use only full back method for pieces of one square foot or less.

c. Butt all edges of insulation and seal edges with tape.

3.4.3 Mechanical Attachment on Concrete and Masonry Walls

Cut insulation to cover walls. Apply adhesive to wall and set clip or other mechanical fastener in adhesive as recommended by manufacturer. After curing of adhesive, install insulation over fasteners and bend split prongs to provide a flush condition with the insulation. Butt all edges of insulation and seal with tape.

3.5 VAPOR RETARDER

Apply vapor retarder continuous across all surfaces. Overlap all joints at least 6 inches and seal with pressure sensitive tape. Seal at sills, header, windows, doors and utility penetrations. Repair punctures or tears with pressure sensitive tape.

3.6 ACCESS PANELS AND DOORS

Attach insulation to all access panels and all access doors in insulated

floors. Use insulation with same R-Value as that for the floor in which each panel occurs.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 21 16

MINERAL FIBER BLANKET INSULATION
11/11, CHG 4: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C665	(2023) Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
ASTM C930	(2019; R 2025) Standard Classification of Potential Health and Safety Concerns Associated with Thermal Insulation Materials and Accessories
ASTM C1104	(2019) Standard Test Method for Determining the Water Vapor Sorption of Unfaced Mineral Fiber Insulation
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E136	(2024b) Standard Test Method for Assessing Combustibility of Materials Using a Vertical Tube Furnace at 750 Degrees C

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.134	Respiratory Protection

UNDERWRITERS LABORATORIES (UL)

UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S"

classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Blanket Insulation

Accessories

SD-07 Certificates

Indoor Air Quality for Insulation Materials; S

SD-08 Manufacturer's Instructions

Insulation

1.3 CERTIFICATIONS

Submit required indoor air quality certifications and validations in one submittal package.

1.3.1 Insulation Products

Provide product certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification by other third-party programs. Provide current product certification from certification body.

1.3.2 Adhesives and Sealants

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party programs that products meet the requirements of this Section. Provide current product certification documentation from certification body. When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein.

1.4 DELIVERY, STORAGE, AND HANDLING

1.4.1 Delivery

Deliver materials to site in original sealed wrapping bearing manufacturer's name and brand designation, specification number, type, grade, R-value, and class. Store and handle to protect from damage. Do not allow insulation materials to become wet, soiled, crushed, or covered with ice or snow. Comply with manufacturer's recommendations for handling, storing, and protecting of materials before and during installation.

1.4.2 Storage

Inspect materials delivered to the site for damage; unload and store out of weather in manufacturer's original packaging. Store only in dry locations, not subject to open flames or sparks, and easily accessible for

inspection and handling.

1.5 SAFETY PRECAUTIONS

1.5.1 Respirators

Provide installers with dust/mist respirators, training in their use, and protective clothing, all approved by National Institute for Occupational Safety and Health (NIOSH)/Mine Safety and Health Administration (MSHA) in accordance with 29 CFR 1910.134.

1.5.2 Other Safety Concerns

Consider other safety concerns and measures as outlined in ASTM C930.

PART 2 PRODUCTS

2.1 BLANKET INSULATION

2.1.1 Thermal Blanket Insulation

Mineral wool consists of inorganic fibers derived from basalt, bonded and formed to a thickness and a width corresponding to the framing spacing and cavity depth. Insulation complies with ASTM C665, Type I and ASTM E136, Non Combustible. Material has a density of 2.5 PCF and an NRC of 1.2 for a 4 inch thickness. Blankets contain 70% recycled content.

Thermal Blanket Insulation	Performance	Standard
Water absorption, by volume	Less than 1%	ASTM C1104
Flame spread rating	0	ASTM E84
Smoke developed rating	0	ASTM E84
Water vapor transmission	50 perms	ASTM E96/E96M

Install thermal blanket insulation to achieve an R-38 at the bottom chords of trusses in the attic.

2.1.1.1 Thermal Blanket R-Value

Thermal blanket R-Value is 3.7 per inch.

2.1.2 Prohibited Materials

Do not provide asbestos-containing materials.

2.1.3 Reduced Volatile Organic Compounds (VOC) for Insulation Materials

Provide certification of indoor air quality for insulation materials.

2.2 ACCESSORIES

2.2.1 Mechanical Fasteners

Corrosion resistant fasteners as recommended by the insulation manufacturer.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Insulation

Install and handle insulation in accordance with manufacturer's instructions. Keep material dry and free of extraneous materials. Any materials that show visual evidence of biological growth due to presence of moisture must not be installed on the building project. Ensure personal protective clothing and respiratory equipment is used as required. Observe safe work practices.

Place insulation in permanent contact with the six surfaces that enclose each cavity, and provide a thickness and width corresponding to the cavity depth and shape. Specified insulation R-values are minimums. Provide greater thicknesses and R-values to fully fill cavities without compression.

3.1.1.1 Electrical wiring

Do not install insulation in a manner that would sandwich electrical wiring between two layers of insulation.

3.1.1.2 Continuity of Insulation

Install blanket insulation to butt tightly against adjoining blankets and to studs and any obstructions. Provide continuity and integrity of insulation at corners, and floor. Avoid creating thermal bridges.

3.1.1.3 Insulation without Affixed Vapor Retarder

Provide snug friction fit to hold insulation in place. Stuff pieces of insulation into cracks between trusses, joists, studs and other framing, such as at attic access doors, door and window heads, jambs, and sills, band joists, and headers.

3.1.1.4 Sizing of Blankets

Provide only full width blankets when insulating between studs. Size width of blankets for a snug fit where trusses, joists or studs are irregularly spaced.

-- End of Section --

SECTION 07 22 00

ROOF AND DECK INSULATION
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C1289	(2023a) Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

FM GLOBAL (FM)

FM 4450	(1989) Approval Standard for Class 1 Insulated Steel Deck Roofs
FM 4470	(2022) Single-Ply, Polymer-Modified Bitumen Sheet, Built-up Roof (BUR), and Liquid Applied Roof Assemblies for Use in Class 1 and Noncombustible Roof Deck Construction
FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

INTERNATIONAL CODE COUNCIL (ICC)

ICC IBC	(2024) International Building Code

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

UL SOLUTIONS (UL)

UL 1256	(2023) Fire Test of Roof Deck Constructions
UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance

with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Insulation Board Layout and Attachment; G

Verification of Prevailing Conditions; G

SD-03 Product Data

Insulation; G

Recycled Content For Insulation; S

SD-05 Design Data

Wind Resistance; G

SD-06 Test Reports

Flame Spread Rating; G

SD-07 Certificates

Installer Qualifications; G

Indoor Air Quality For Insulation; S

Acceptable Foam Blowing Agents; S

SD-08 Manufacturer's Instructions

Roof Insulation; G

1.3 SHOP DRAWINGS

Submit insulation board layout and attachment indicating methods of attachment and spacing of fasteners on each board, transitions, thicknesses of materials, and closure and termination conditions. Show locations of ridges, cricketsand slopes. Base shop drawings on verified field measurements and include verification of prevailing conditions. Show wood nailers.

1.4 PRODUCT DATA

Include data for material descriptions, recommendations for product shelf life, requirements for coatings, and precautions for flammability and toxicity. Include data to verify compatibility of sealants with insulation.

1.5 MANUFACTURER'S INSTRUCTIONS

Include field of roof, perimeter, and corner attachment requirements.

Provide a complete description of installation sequencing for each phase of the roofing system. Include weatherproofing procedures.

1.6 QUALITY CONTROL

Provide certification of installer qualifications from the insulation manufacturer confirming the specific installer has the required qualifications for installing the specific roof insulation system(s) indicated.

1.7 WIND RESISTANCE REQUIREMENTS

The complete roof system assembly must be rated and installed to resist wind loads indicated and validated by uplift resistance testing in accordance with Factory Mutual (FM) test procedures. Coordinate with roof covering attachment requirements and submit wind resistance test certification, attachment patterns for field, perimeter, and corner roof areas along with perimeter and corner boundary dimensions.

Submit a DELEGATED DESIGN with sealed calculations and shop drawings prepared by a registered professional engineer. Incorporate this information in the roofing submittal.

Furnish roof and deck insulation that resists uplift and lateral loads. Assembly design responsibility is delegated to the Contractor and incorporates specific properties and structural capabilities of selected products and manufacturers.

Supplement delegated design shop drawings with roof and deck insulation structural computations. Tie general manufacturer data of appurtenant components utilized to project specific conditions. Specify fastening patterns and connections.

1.8 FIRE PERFORMANCE REQUIREMENTS

1.8.1 Insulation in Roof Systems

Comply with the requirements of ICC IBC or UL 1256 or FM 4450 or FM 4470. Roof insulation must have a flame spread rating of 75 or less when tested in accordance with ASTM E84. Additional documentation of compliance with flame spread rating is not required when insulation of the type used for this project as part of the specific roof assembly is listed and labeled as FM Class 1 approved.

1.9 CERTIFICATIONS

Provide products certified to meet indoor air quality requirements by UL 2818(Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification by other third-party programs. Provide current product certification documentation from certification body.

1.10 DELIVERY, STORAGE, AND HANDLING

1.10.1 Delivery

Deliver materials to the project site in manufacturer's unopened and undamaged standard commercial containers bearing the following legible information:

a. Name of manufacturer

b. Brand designation

c. Specification number, type, and class, as applicable, where materials are covered by a referenced specification

Deliver materials in sufficient quantity to allow continuity of the work.

1.10.2 Storage and Handling

Store and handle materials in accordance with manufacturer's printed instructions. Protect from damage, exposure to open flame or other ignition sources, wetting, condensation, and moisture absorption. Keep materials wrapped and separated from off-gassing materials (such as drying paints and adhesives). Do not use materials that have visible moisture or biological growth. Store in an enclosed building or trailer that provides a dry, adequately ventilated environment. Replace damaged material with new material.

1.11 ENVIRONMENTAL CONDITIONS

As per manufacturer's recommendations or Government's instructions, do not install roof insulation during inclement weather or when air temperature is below 40 degrees F and interior humidity is 45 percent or greater, or when there is visible ice, frost, or moisture on the roof deck.

PART 2 PRODUCTS

2.1 INSULATION

2.1.1 Insulation Types

Provide roof insulation that is compatible with attachment methods for the specified insulation and roof membrane.

a. Polyisocyanurate Board: Provide in accordance with ASTM C1289 REV A Type II, fibrous felt or glass mat membrane both sides, except minimum compressive strength of 25 pounds per square inch (psi).

2.1.2 Recycled Materials

Provide thermal insulation materials containing recycled content. Unless specified otherwise, the minimum required recycled content for listed materials are:

Polyisocyanurate/polyurethane:	9 percent recovered material

Provide data identifying percentage of recycled content for insulation.

2.1.3 Indoor Air Quality

Provide certification of indoor air quality for insulation.

2.1.4 Prohibited Materials

Products that contain high ozone depleting or high Global Warming Potential (GWP) blowing agents are prohibited. For a list of acceptable substitute foam blowing agents for the type of insulation used see https://www.epa.gov/snap/foam-blowing-agents. Provide validation of acceptable foam blowing agents that no prohibited materials are used.

2.1.5 Insulation Thickness

As necessary to provide the thermal resistance (R-value) of R-28.5. Base calculation on the R-value for aged insulation. For insulation over steel decks, satisfy both specified R-value and minimum thickness for width of rib opening recommended in insulation manufacturer's published literature.

2.2 WOOD NAILERS

Pressure-preservative treated wood as specified in Section 06 10 00 ROUGH CARPENTRY.

PART 3 EXECUTION

3.1 EXAMINATION AND PREPARATION

3.1.1 Surface Inspection

Ensure surfaces are clean, smooth, and dry prior to application. Check roof deck surfaces for defects before starting work.

The Contracting Officer will inspect and approve the surfaces immediately before starting installation. Prior to installing insulation, perform the following:

a. Examine steel decks to ensure that panels are properly secured to structural members and to each other and that surfaces of top flanges are flat or slightly convex.

3.1.2 Surface Preparation

To correct defects and inaccuracies in roof deck surface to eliminate poor drainage from hollow or low spots, perform the following:

a. Provide wood nailers of the same thickness as the insulation at eaves, edges, curbs, walls, and roof openings for securing of, gutters, flashing flanges and curbs.

b. Cover steel decks with a layer of insulation board of sufficient width to span the width of a deck rib opening, and in accordance with fire safety requirements. Secure with piercing or self-drilling, self-tapping fasteners of quantity and placement in accordance with FM APP GUIDE. Locate insulation joints parallel to ribs of deck on solid bearing surfaces only, not over open ribs.

3.2 INSULATION INSTALLATION

Apply insulation in two layers with staggered joints when total required thickness of insulation exceeds 1/2 inch. Lay insulation so that continuous longitudinal joints are perpendicular to direction of roofing and end joints of each course are staggered with those of adjoining courses. When using multiple layers of insulation, provide joints of each succeeding layer that are parallel and offset in both directions with respect to the layer below. Keep insulation 1/2 inch clear of vertical surfaces penetrating and projecting from roof surface.

3.3 PROTECTION

3.3.1 Protection of Applied Insulation

Completely cover each day's installation of insulation with finished roofing. Phased construction is not permitted. Protect open spaces between insulation and spaces at curbs until permanent roofing and flashing are applied. Storing, walking, wheeling, or trucking directly on insulation or on roofed surfaces is not permitted. Provide smooth, clean board or plank walkways, runways, and platforms near supports, as necessary, to distribute weight. Protect exposed edges of insulation with cutoffs at the end of each workday or whenever precipitation is imminent. Cutoffs must be membrane. Fill all profile voids in cutoffs to prevent trapping moisture below the membrane. Remove cutoffs when work resumes.

3.3.2 Damaged Work and Materials

Restore work and materials that become damaged during construction to original condition or replace with new materials.

3.4 INSPECTION

Establish and maintain inspection procedures to assure compliance of the installed roof insulation with Contract requirements. Remove, replace, correct in an approved manner, any work found not in compliance. Quality control must include, but is not limited to, the following:

a. Observation of environmental conditions; number and skill level of insulation workers; start and end time of work.

b. Verification of certification, listing or label compliance with FM Data Sheets.

c. Inspection of insulation joint orientation and laps between layers, joint width and bearing of edges of insulation on deck.

d. Installation of cutoffs and proper joining of work on subsequent days.

e. Continuation of complete roofing system installation to cover insulation installed same day.

-- End of Section --

SECTION 07 27 19.01

SELF-ADHERING AIR BARRIERS
08/23, CHG 1: 08/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR BARRIER ASSOCIATION OF AMERICA (ABAA)

ABAA Accreditation	Accreditation
ABAA QAP	Quality Assurance Program

ASTM INTERNATIONAL (ASTM)

ASTM D146/D146M	(2004; E 2012; R 2012) Sampling and Testing Bitumen-Saturated Felts and Woven Fabrics for Roofing and Waterproofing
ASTM D412	(2016; R 2021) Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
ASTM D570	(2022) Standard Test Method for Water Absorption of Plastics
ASTM D903	(1998; R 2017) Standard Test Method for Peel or Stripping Strength of Adhesive Bonds
ASTM D1876	(2008; R 2015; E 2015) Standard Test Method for Peel Resistance of Adhesives (T-Peel Test)
ASTM D4263	(1983; R 2018) Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method
ASTM D4541	(2022) Standard Test Method for Pull-Off Strength of Coatings Using Portable Adhesion Testers
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E154/E154M	(2008; R 2025) Standard Test Methods for Water Vapor Retarders Used in Contact with Earth Under Concrete Slabs, on Walls, or as Ground Cover
ASTM E283/E283M	(2019) Standard Test Method for

	Determining Rate of Air Leakage Through Exterior Windows, Skylights, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM E331	(2000; R 2023) Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
ASTM E2178	(2021a) Standard Test Method for Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials
ASTM E2357	(2018) Standard Test Method for Determining Air Leakage Rate of Air Barrier Assemblies

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 285	(2023) Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components

1.2 RELATED REQUIREMENTS

Coordinate the requirements of other building enclosure sections to provide a complete building air barrier system. Submit all materials, components, and assemblies of the air barrier system together as one complete submittal package.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualifications of Manufacturer; G

Qualifications of Installer; G

SD-02 Shop Drawings

Self-adhering Air Barrier Shop Drawings; G

SD-03 Product Data

Self-adhering Air Barrier; G

Primers, Adhesives, and Mastics; G

Safety Data Sheets; G

SD-06 Test Reports

Field Peel Adhesion Test; G

Flame Propagation of Wall Assemblies; G

Site Inspections and Testing; G

SD-08 Manufacturer's Instructions

Self-adhering Air Barrier Manufacturer's Printed Instructions; G

Primers, Adhesives, and Mastics; G

1.4 MISCELLANEOUS REQUIREMENTS

For self-adhering air barrier provide the following:

1.4.1 Shop Drawings

Submit self-adhering air barrier shop drawings showing locations and extent of air barrier assemblies and details of all typical conditions, intersections with other building enclosure assemblies and materials, and membrane counterflashings. Show details for bridging of gaps in construction, treatment of inside and outside corners, expansion joints, methods of attachment of materials covering the self-adhered barrier without compromising the barrier. Indicate how miscellaneous penetrations such as conduit, pipes, electric boxes and similar items will be sealed.

1.4.2 Product Data

Submit manufacturer's technical data indicating compliance with performance and environmental requirements in Part 2 of this specification. Also submit self-adhering air barrier manufacturer's printed instructions for evaluating, preparing, and treating substrates, temperature and other limitations of installation conditions, safety requirements for installation, and Safety Data Sheets. Indicate flame and smoke spread ratings for all products.

1.4.3 Test Reports

Submit test reports indicating that field peel-adhesion tests on all materials have been performed and the changes made, if required, in order to achieve successful and lasting adhesion. Submit test reports for flame propagation of wall assemblies tested in accordance with NFPA 285.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver and store materials in sufficient quantity to allow for uninterrupted flow of work. Inspect materials delivered to the site for damage and store out of weather. Deliver materials to the jobsite in their original unopened packages, clearly marked with the manufacturer's name, brand designation, description of contents, and shelf life of containerized materials. Store and handle to protect from damage.

1.5.2 Storage

Inspect materials delivered to the site for damage; unload and store out of weather in manufacturer's original packaging. Store only in dry locations, not subject to open flames or sparks, and easily accessible for inspection and handling. Protect stored materials from direct sunlight. Keep materials sealed and separated from absorptive materials, such as wood and insulation.

1.6 QUALITY ASSURANCE

1.6.1 Qualifications of Manufacturer

Submit documentation verifying that the manufacturer of the self-adhering air barrier is currently accredited by Air Barrier Association of America (ABAA Accreditation https://www.airbarrier.org/).

1.6.2 Qualifications of Installer

Submit documentation verifying that installers of the self-adhering air barrier are currently certified in accordance with the ABAA QAP Quality Assurance Program (https://www.airbarrier.org/qap/).

1.6.3 Field Peel Adhesion Test

Perform a field peel-adhesion test. Test the self-adhering air barrier for adhesion in accordance with ASTM D4541 using a Type II pull tester except use a disk that is 4 inches square and cut through the membrane to separate the material attached to the dish from the surrounding material. Perform test after curing period in accordance with manufacturer's written recommendations. Record mode of failure and area which failed in accordance with ASTM D4541. Compare adhesion values with the manufacturer's established minimum values for the particular combination of material and substrate. Indicate on the inspection report whether the manufacturer's requirement has been met. Where the manufacturer has not declared a minimum adhesion value for their product and substrate combination, the inspector must record actual values.

1.7 PRECONSTRUCTION MEETING

Conduct a preconstruction meeting a minimum of two weeks prior to commencing work specified in this specification Section. Agenda must include, at a minimum, construction and testing, sequence of construction, coordination with substrate preparation, materials approved for use, compatibility of materials, coordination with installation of adjacent and covering materials, and details of construction. Attendance is required by representatives of related trades including covering materials, substrate materials, adjacent materials, and materials and components of the air barrier system.

1.8 ENVIRONMENTAL CONDITIONS

1.8.1 Temperature

Install air barrier within the range of ambient and substrate temperatures as recommended in writing by the air barrier manufacturer. Verify that the surface to receive self-adhering air barrier is dry for a minimum of 48 hours prior to the installation of the barrier. Do not apply air barrier to damp or wet substrates. Do not apply during inclement weather

or when ice, frost, surface moisture, or visible dampness is present on surfaces to be covered, or when precipitation is imminent.

1.8.2 Exposure to Weather and Ultraviolet Light

Protect air barrier products from direct exposure to rain, snow, sunlight, mist, and other extreme weather conditions. Replace, at no additional cost to the Government, barrier products that have been exposed to ultraviolet (sun)light longer than allowed by manufacturer's written requirements.

PART 2 PRODUCTS

2.1 SELF-ADHERING AIR BARRIER

Provide minimum 0.040 inch thick self-adhering, vapor retarding, air barrier membrane consisting of a cross-laminated high density polyethylene (HDPE) film, fully coated with rubberized butyl-based or acrylic-based adhesive. Provide membrane in rolls of various widths interleaved with disposable silicone release paper. Self-adhering air barrier must exhibit no visible water leakage when tested in accordance with ASTM E331 and must perform as a liquid water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Use regular or low temperature formulation depending on site conditions, within temperature ranges specified by manufacturer. Install self adhering membrane on metal deck substrates.

2.1.1 Physical Properties

a. Air Permeance (ASTM E2178): Less than 0.004 CFM per sf at 1.57 psf.

b. Assembly Air Leakage (ASTM E2357, ASTM E283/E283M): less than 0.04 CFM per sf at 1.57 psf at one inch.

c. Tensile Strength (ASTM D412 die C modified): Not less than 400 psi.

d. Tensile Elongation (ASTM D412 die C modified): Not less than 200 percent.

e. Puncture Resistance (ASTM E154/E154M): Not less than 40 lbs.

f. Pliability (ASTM D146/D146M): Unaffected at minus 25 degrees F, 0.063 inch mandrel.

g. Lap Adhesion (ASTM D1876 modified): Not less than 4.0 lbs per inch.

h. Peel Adhesion (ASTM D903): Not less than 5.0 lbs per inch.

i. Water Vapor Permeance (Vapor Impermeable Air Barrier) (ASTM E96/E96M, desiccant method A): 0.1 perms or less.

j. Water Absorption (ASTM D570): Not to exceed 0.12 percent by weight.

k. Flame propagation of wall assemblies (NFPA 285): Pass

2.2 PRIMERS, ADHESIVES, AND MASTICS

Provide primers, adhesives, mastics and other accessory materials as recommended in writing by the manufacturer of the self-adhering air

barrier for adequate bonding to each type of substrate. Adhesive must be butyl- or acrylic-based.

2.3 SHEET METAL FLASHING

Steel flat stock for lap joint support is galvanized. Provide as specified in Section 07 60 00 FLASHING AND SHEET METAL.

2.4 JOINT SEALANTS

Provide as specified in Section 07 92 00 JOINT SEALANTS. Verify compatibility with adjacent products that are or will be in contact with one another.

PART 3 EXECUTION

3.1 EXAMINATION

Before installing air barrier, examine substrates, areas, and conditions under which air barrier assemblies will be applied, with Installer present, for compliance with requirements. Ensure the following conditions are met:

a. Surfaces are sound, dry, even, and free of oil, grease, dirt, excess mortar or other contaminants.

b. Verify substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method in accordance with ASTM D4263 and take suitable measures until substrate passes moisture test.

3.2 PREPARATION

Clean, prepare, and treat substrate in accordance with manufacturer's written instructions. Ensure clean, dust-free, and dry substrate for air barrier application.

a. Prepare, treat, and seal vertical and horizontal surfaces at terminations and penetrations through air barrier and at protrusions.

3.3 INSTALLATION

3.3.1 Installation of Self-adhering Air Barrier

Install materials in accordance with manufacturer's recommendations and the following:

a. Apply primer at rate recommended by manufacturer prior to membrane installation. Allow primer to dry completely before membrane application. Apply as many coats as necessary for proper adhesion.

b. When membrane is properly positioned, press into place and roll membrane with roller immediately after placement.

c. Apply membrane sheets to shed water naturally without interception by a sheet edge, unless that edge is sealed with permanently flexible termination mastic.

d. Position subsequent sheets of membrane applied above so that membrane overlaps the membrane sheet below by a minimum of 2-1/2 inches, unless greater overlap is recommended by manufacturer. Roll into place with roller.

e. Make side laps a minimum of 2-1/2 inches and end laps a minimum of 5 inches, unless greater overlap is recommended by manufacturer. Roll seams with roller.

f. Roll membrane to adhere to substrate. Cover corners and joints with two layers of reinforcement by first applying a 12 inch width of membrane centered along the axis. Flash drains and projections with a second ply of membrane for a distance of 6 inches from the drain or projection.

g. Seal around all penetrations through the air barrier resulting from pipes, vents, conduit, electrical fixtures, structural members, or other construction passing through it. Seal with termination mastic, extruded silicone sealant, membrane counterflashing or other sealing methods in accordance with manufacturer's written recommendations.

h. Continuously connect the air barrier between walls, roof, floor and below grade assemblies to form a continuous integrated air barrier system around the entire building enclosure. Extend the air barrier membrane into rough openings such as doors, windows, louvers, and other exterior penetrations. Seal edges of barrier at junctures with rough openings.

i. At changes in substrate plane, provide transition material (e.g., bead of sealant, mastic, extruded silicone sealant, membrane counterflashing or other material recommended by manufacturer) under membrane to eliminate all sharp 90-degree inside corners and to make a smooth transition from one plane to another.

j. Provide mechanically fastened non-corrosive metal sheet to span gaps in substrate plane and to make a smooth transition from one plane to the other. Continuously support membrane with substrate.

k. At deflection and control joints, provide backup for the membrane to accommodate anticipated movement.

l. At expansion and seismic joints provide transition to the joint assemblies.

m. Apply a bead or trowel coat of mastic along membrane seams at reverse lapped seams, rough cuts, and as recommended by the manufacturer.

n. At end of each working day, seal top edge of membrane to substrate with termination mastic.

o. Do not allow materials to come in contact with chemically incompatible materials.

p. Counterflash upper edge of thru-wall flashing and air barrier. Counter flashing is specified in Section 07 60 00 FLASHING AND SHEET METAL. See applicable wall-type Sections for thru-wall flashing requirements.

3.4 FIELD QUALITY CONTROL

3.4.1 Site Inspections and Testing

Provide site inspections and testing in accordance with accepted practices and this section.

a. Conduct inspections and testing at 5, 50, and 95 percent completion of this scope of work. Forward written site inspections and testing reports to the Contracting Officer within five working days of the inspection and test being performed.

b. If inspections reveal defects, promptly remove and replace defective work at no additional expense to the Government.

3.5 FIELD PEEL ADHESION TEST

Conduct in accordance with test protocol indicated in Part 1, paragraph FIELD PEEL ADHESION TEST.

3.6 PROTECTION AND CLEANING

3.6.1 Protection

3.6.1.1 Adjacent Surfaces

Protect exposed adjacent surfaces that could be damaged by primers and adhesives associated with air barrier membrane. Provide protection during application and the remainder of construction in accordance with manufacturer's written instructions.

3.6.1.2 The Air Barrier Assembly

Protect finished portions of the air barrier assembly from damage during ongoing application and throughout the remainder of the construction period in accordance with manufacturer's written instructions. Coordinate timing of installation of materials that will cover the air barrier membrane to ensure the exposure period does not exceed that recommended by the air barrier manufacturer's written installation instructions. Remove and replace, at no additional cost to the Government, membrane products that exceed the manufacturer's allowed exposure limits.

3.6.2 Cleaning

Clean spillage and soiling from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction and as acceptable to the primary material manufacturer.

-- End of Section --

SECTION 07 27 26

FLUID-APPLIED MEMBRANE AIR BARRIERS
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR BARRIER ASSOCIATION OF AMERICA (ABAA)

ABAA Accreditation	Accreditation
ABAA QAP	Quality Assurance Program

ASTM INTERNATIONAL (ASTM)

ASTM C1305/C1305M	(2016) Standard Test Method for Crack Bridging Ability of Liquid-Applied Waterproofing Membrane
ASTM D412	(2016; R 2021) Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
ASTM D4263	(1983; R 2018) Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method
ASTM D4541	(2022) Standard Test Method for Pull-Off Strength of Coatings Using Portable Adhesion Testers
ASTM D5590	(2017; R 2021) Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E283/E283M	(2019) Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Skylights, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM E331	(2000; R 2023) Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
ASTM E2178	(2021a) Standard Test Method for

	Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials
ASTM E2357	(2018) Standard Test Method for Determining Air Leakage Rate of Air Barrier Assemblies

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 285	(2023) Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components

1.2 RELATED REQUIREMENTS

Coordinate the requirements of other building enclosure sections to provide a complete building air barrier system. Submit all materials, components and assemblies of the air barrier system together as one complete submittal package.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualifications of Manufacturer; G

Qualifications of Installer; G

SD-02 Shop Drawings

Fluid-Applied Membrane Air Barrier Shop Drawings; G

SD-03 Product Data

Fluid-Applied Membrane Air Barrier; G

Transition Membrane; G

Primers, Adhesives, and Mastics; G

Reinforcement; G

Safety Data Sheets; G

SD-06 Test Reports

Capillary Moisture Test; G

Field Peel Adhesion Test; G

Flame Propagation of Wall Assemblies; G

Site Inspections Reports; G

SD-08 Manufacturer's Instructions

Fluid-Applied Membrane Air Barrier Manufacturer's Printed Instructions; G

Primers, Adhesives, and Mastics Printed Manufacturer's Instructions; G

1.4 MISCELLANEOUS REQUIREMENTS

For fluid-applied membrane air barriers provide the following:

1.4.1 Shop Drawings

Submit fluid-applied membrane air barrier shop drawings showing locations and extent of barrier assemblies, transition membranes, details of all typical conditions, intersections with other envelope assemblies and materials, and membrane counterflashings. Show details for bridging of gaps in construction, treatment of inside and outside corners, expansion joints, methods of attachment of materials covering the self-adhered barrier without compromising the barrier. Indicate how miscellaneous penetrations such as conduit, pipes, electric boxes, brick ties, and similar items will be sealed.

1.4.2 Product Data

Submit manufacturer's technical data indicating compliance with performance and environmental requirements. Submit fluid-applied membrane air barrier manufacturer's printed instructions for evaluating, preparing, and treating substrates, temperature and other limitations of installation conditions, safety requirements for installation, and Safety Data Sheets. Also, submit primers, adhesives and mastics printed manufacturer's instructions for installation conditions and safety requirements. Indicate flame and smoke spread ratings for all products.

1.4.3 Test Reports

Submit test reports indicating that capillary moisture tests and field peel adhesion tests on all substrate materials have been performed and the changes made, if required, in order to achieve successful and lasting adhesion. Submit test reports for flame propagation of wall assemblies tested in accordance with NFPA 285.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver and store materials in sufficient quantity to allow for uninterrupted flow of work. Inspect materials delivered to the site for damage and store out of weather. Deliver materials to the jobsite in their original unopened packages, clearly marked with the manufacturer's name, brand designation, description of contents, and shelf life of containerized materials. Store and handle to protect from damage.

1.5.2 Storage

Inspect materials delivered to the site for damage; unload and store out of weather in manufacturer's original packaging. Store only in dry locations, not subject to open flames or sparks, and easily accessible for inspection and handling. Protect stored materials from direct sunlight.

1.6 CAPILLARY MOISTURE TEST

Perform a capillary moisture test by plastic sheet method in accordance with ASTM D4263 on the substrate materials. Perform test after curing period as recommended by the air barrier manufacturer. Record mode of failure and area which failed in accordance with ASTM D4263. Once the air barrier material manufacturer has established a minimum adhesion or moisture level for the product on the particular substrate, indicate on the inspection report whether this requirement has been met. Where the manufacturer has not declared a minimum adhesion or moisture value for their product and substrate combination, the inspector must record actual values.

1.7 FIELD PEEL ADHESION TEST

Perform a field peel adhesion test. Test the applied product for adhesion in accordance with manufacturer's recommendations. Perform test after curing period recommended by the manufacturer. Record mode of failure and area which failed in accordance with ASTM D4541. When the manufacturer has established a minimum adhesion level for the product on the particular substrate, the inspection report must indicate whether this requirement has been met. Where the manufacturer has not declared a minimum adhesion value for their product/substrate combination, the inspector must record actual values.

1.8 QUALITY ASSURANCE

1.8.1 Qualifications of Manufacturer

Submit documentation verifying that manufacturer of fluid-applied membrane air barrier is currently accredited by the Air Barrier Association of America (ABAA Accreditation https://www.airbarrier.org/).

1.8.2 Qualifications of Installer

Submit documentation verifying that installers of the fluid-applied membrane air barrier are currently certified in accordance with the ABAA QAP Quality Assurance Program (https://www.airbarrier.org/qap/).

1.9 PRECONSTRUCTION MEETING

Conduct a preconstruction meeting a minimum of two weeks prior to commencing work specified in this specification Section. Agenda must include, at a minimum, sequence of construction, coordination with substrate preparation, materials approved for use, compatibility of materials, coordination with installation of adjacent and covering materials, and details of construction. Attendance is required by representatives of related trades including covering materials, substrate materials, adjacent materials, and materials and components of the fluid-applied membrane air barrier.

1.10 ENVIRONMENTAL CONDITIONS

1.10.1 Temperature

Install fluid-applied membrane air barrier within the range of ambient and substrate temperatures as recommended in writing by the fluid-applied membrane air barrier manufacturer. Do not apply fluid-applied membrane air barrier to a damp or wet substrate. Do not apply during inclement weather or when ice, frost, surface moisture, or visible dampness is present on surfaces to be covered, or when precipitation is imminent.

1.10.2 Exposure to Weather

Protect fluid-applied membrane air barrier products from direct exposure to rain, snow, sunlight, mist, and other extreme weather conditions. Replace, at no additional cost to the Government, barrier products that have been exposed to ultraviolet (sun)light longer than allowed by manufacturer's written requirements.

PART 2 PRODUCTS

2.1 FLUID-APPLIED MEMBRANE AIR BARRIER

Provide a fluid-applied, vapor retarding, air barrier. This barrier must exhibit no visible water leakage when tested in accordance with ASTM E331 and must perform as a liquid water drainage plane with thru-wall flashing to discharge incidental condensation and water penetration to the exterior of the building enclosure. Provide products suitable for use within temperature ranges specified by manufacturer for the location of the project. Install fluid applied membranes on vertical masonry substrates.

2.1.1 Physical Properties

a. Air Permeance (ASTM E2178): less than 0.004 CFM per sf at 1.57 psf.

b. Air Leakage (ASTM E2357, ASTM E283/E283M): Less than 0.04 CFM per sf at 1.57 psf at one inch.

c. Water Vapor Permeance (Vapor Impermeable Membrane) (ASTM E96/E96M, desiccant method A): 0.1 perms or less.

d. Pull Adhesion (ASTM D4541): Not less than 15 psi.

e. Elongation (ASTM D412): Not less than 300 percent.

f. Low temperature Flexibility and Crack Bridging (ASTM C1305/C1305M): Pass at minus 15 degrees F.

g. Solids by Volume: minimum 50 percent.

h. Flame propagation of wall assemblies (NFPA 285): Pass

i. Resistance to Mold, Mildew and Fungal Growth (ASTM D5590): 0, No growth.

2.2 PRIMERS, ADHESIVES, AND MASTICS

Provide primers, adhesives, mastics, sealants and other accessories as recommended by manufacturer of fluid-applied membrane air barrier for a

complete installation.

2.3 TRANSITION MEMBRANE

Provide the recommended transition membranes.

2.4 SHEET METAL FLASHING

Provide as specified in Section 07 60 00 FLASHING AND SHEET METAL.

2.5 JOINT SEALANTS

Provide as specified in Section 07 92 00 JOINT SEALANTS.

2.6 REINFORCEMENT

Provide fiberglass mesh tape, or fluid-applied air barrier manufacturer's approved comparable equivalent product, reinforcement at seams, edges, projections and penetrations. Reinforce all joints exceeding 1/4 inch with fiberglass mesh.

PART 3 EXECUTION

3.1 EXAMINATION

Before installing fluid-applied membrane air barrier, examine substrates, areas, and conditions under which fluid-applied membrane air barrier assemblies will be applied, with installer present, for compliance with requirements. Ensure the following conditions are met:

a. Surfaces are sound, dry, even, and free of oil, grease, dirt, excess mortar or other contaminants detrimental to the adhesion of the membranes.

b. Masonry surfaces are cured and dry, smooth without large voids, spalled areas or sharp protrusions.

c. Fill voids, gaps and spalled areas in substrate to provide an even plane. Strike masonry joints full flush.

d. Verify substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method in accordance with ASTM D4263 and take suitable measures until substrate passes moisture test.

e. Verify sealants used in substrates, and in joints between substrates, are compatible with fluid-applied membrane air barrier.

3.2 PREPARATION

Clean, prepare, and treat substrate in accordance with manufacturer's written instructions. Ensure clean, dust-free, and dry substrate for fluid-applied membrane air barrier application.

a. Remove dust, dirt and other contaminants from joints and cracks before coating surfaces.

b. Prepare, treat, and seal vertical and horizontal surfaces at terminations and penetrations through fluid-applied membrane air

barrier.

c. At changes in substrate plane, provide transition material (bead of sealant, mastic, extruded silicone sealant, membrane counterflashing or other material recommended by manufacturer) under transition membrane to eliminate all sharp 90-degree inside corners and to make a smooth transition from one plane to another.

d. Provide mechanically fastened non-corrosive metal sheet to span gaps in substrate plane and to make a smooth transition from one plane to the other. Continuously support membrane with substrate.

e. For exterior sheathing substrates, ensure that exterior sheathing is stabilized, with corners and edges fastened with appropriate screws. Treat all joints in accordance with the air barrier manufacturer's instructions prior to application of air barrier material. Allow sufficient time for joint treatments to fully cure before application of transition membranes and fluid-applied membrane air barrier.

f. For masonry substrates, fill all voids and holes, particularly in mortar joints, with non-shrinking grout.

g. Mask off and cover adjacent surfaces to protect from spillage and overspray.

3.3 INSTALLATION

3.3.1 Installation of Transition Membrane

Install transition membrane materials in accordance with the details on the drawings and the following:

a. Install transition membrane at all required locations (such as at any voids, gaps, or interstitial spaces that the fluid-applied air barrier cannot adequately protect) prior to installation of the fluid-applied membrane air barrier.

b. Verify transition membrane is fully adhered to substrate and that its surface is clean, dry and wrinkle free prior to installation of the fluid-applied membrane air barrier.

c. Verify transition membrane completely covers all transition areas and provides continuity of the finished fluid-applied membrane air barrier without gaps or cracks.

3.3.2 Installation of Flashing

Counterflash upper edge of thru-wall flashing and fluid-applied air barrier. Counter flashing is specified in Section 07 60 00 FLASHING AND SHEET METAL. See applicable wall-type Sections for thru-wall flashing requirements.

3.3.3 Installation of Fluid-Applied Membrane Air Barrier

Install materials in accordance with manufacturer's recommendations and the following:

a. Apply fluid-applied membrane air barrier in single or dual coat application by spray or roller. Apply fluid-applied membrane air

barrier within manufacturer's recommended temperature range for application.

b. Apply fluid-applied membrane air barrier in manner and at rate and wet film thickness recommended by manufacturer to yield a finished dry film thickness of not less than 45 mils.

c. Apply fluid-applied membrane air barrier around all penetrations ensuring a complete and continuous air barrier. Lap fluid-applied membrane air barrier a minimum of 3 inch over transition membrane to seal leading edge.

d. Seal membrane terminations, heads of mechanical fasteners, masonry tie fasteners, around penetrations, HVAC assemblies, plumbing and electrical assemblies, doors, windows, louvers, and other assemblies penetrating the fluid-applied membrane air barrier with a termination sealant recommended by the fluid-applied membrane air barrier manufacturer.

e. Notify the Contracting Officer and Testing Agency upon completion of fluid-applied membrane air barrier installation. Air barrier materials and assemblies must remain exposed until tested and inspected in accordance with the ABAA protocol.

f. Do not allow materials to come in contact with chemically incompatible materials.

3.3.4 Installation of Reinforcement

Install reinforcement at projections, corners, joints, and penetrations where applicable.

3.4 FIELD QUALITY CONTROL

3.4.1 Site Inspections and Testing

Provide site inspections and testing in accordance with accepted practices.

a. Conduct inspections and testing at 5, 50, and 95 percent completion of this scope of work. Forward written inspection reports to the Contracting Officer within five working days of the inspection and test being performed.

b. If the inspections reveal defects, promptly remove and replace defective work at no additional expense to the Government.

3.5 PROTECTION AND CLEANING

3.5.1 Protection

Protect fluid-applied membrane air barrier assemblies from damage during application and remainder of construction in accordance with manufacturer's written instructions.

Coordinate installation, testing, and inspection procedures to ensure exposure period does not exceed that recommended by the product manufacturer. Remove and replace, at no additional cost to the government, membrane products that exceed manufacturer's allowed exposure limits.

3.5.2 Cleaning of Adjacent Surfaces

Clean excess product from adjacent construction using cleaning agents and procedures as recommended in writing by the manufacturer of each type of affected construction and as acceptable to same.

3.6 CLEANUP OF SPILLS

Conduct cleanup of uncured product spillage in accordance with manufacturer's written safe handling instructions.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 27 36

SPRAY FOAM AIR BARRIERS
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR BARRIER ASSOCIATION OF AMERICA (ABAA)

ABAA Accreditation	Accreditation

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP Z9.2	(2018) Fundamentals Governing the Design and Operation of Local Exhaust Ventilation Systems
ASSP Z88.2	(2015) American National Standard Practices for Respiratory Protection

ASTM INTERNATIONAL (ASTM)

ASTM C518	(2021) Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus
ASTM C1029	(2020) Standard Specification for Spray-Applied Rigid Cellular Polyurethane Thermal Insulation
ASTM C1060	(2011a; R 2015) Standard Practice for Thermographic Inspection of Insulation Installations in Envelope Cavities of Frame Buildings
ASTM C1153	(2023) Standard Practice for Location of Wet Insulation in Roofing Systems Using Infrared Imaging
ASTM C1303/C1303M	(2022) Standard Test Method for Predicting Long-Term Thermal Resistance of Closed-Cell Foam Insulation
ASTM C1338	(2019) Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings
ASTM D1621	(2016; R2023) Standard Test Method for Compressive Properties of Rigid Cellular Plastics

ASTM D1622	(2020) Standard Test Method for Apparent Density of Rigid Cellular Plastics
ASTM D1623	(2017) Standard Test Method for Tensile and Tensile Adhesion Properties of Rigid Cellular Plastics
ASTM D2126	(2020) Response of Rigid Cellular Plastics to Thermal and Humid Aging
ASTM D2842	(2019) Water Absorption of Rigid Cellular Plastics
ASTM D4541	(2022) Standard Test Method for Pull-Off Strength of Coatings Using Portable Adhesion Testers
ASTM D6226	(2021) Standard Test Method for Open Cell Content of Rigid Cellular Plastics
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E283/E283M	(2019) Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Skylights, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM E2178	(2021a) Standard Test Method for Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials
ASTM E2357	(2018) Standard Test Method for Determining Air Leakage Rate of Air Barrier Assemblies

INTERNATIONAL CODE COUNCIL (ICC)

ICC 1100	(2019) Standard for Spray-applied Polyurethane Foam Plastic Insulation
ICC IBC	(2024) International Building Code
ICC IECC	(2021) International Energy Conservation Code

INTERNATIONAL SAFETY EQUIPMENT ASSOCIATION (ISEA)

ANSI/ISEA Z87.1	(2020) Occupational and Educational Personal Eye and Face Protection Devices

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 10	(2026) Standard for Portable Fire Extinguishers
NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 285	(2023) Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components
NFPA 286	(2024) Standard Methods of Fire Tests for Evaluating Contribution of Wall and Ceiling Interior Finish to Room Fire Growth

SPRAY POLYURETHANE FOAM ALLIANCE (SPFA)

SPFA TechDocs	(2015) SPFA Technical Documents Library, four categories: General, Insulation, Roofing, Specialty

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-600-01	(2016; with Change 6, 2021) Fire Protection Engineering for Facilities

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.134	Respiratory Protection

UL SOLUTIONS (UL)

UL 723	(2018; Reprint Jun 2025) UL Standard for Safety Test for Surface Burning Characteristics of Building Materials

1.2 RELATED REQUIREMENTS

Coordinate the requirements of other building envelope sections to provide a complete air barrier system. Submit all materials, components, and assemblies of the air barrier system together as one complete submittal package.

1.3 DEFINITIONS

1.3.1 Long Term Thermal Resistance (LTTR)

The thermal resistance value of a closed cell foam insulation product measured using accelerated aging ASTM C1303/C1303M equivalent to the time-weighted average thermal resistance value over 15 years. Loss in thermal resistance is attributable to changes in cell gas composition caused by diffusion of air into and blowing agent out of the foam cells.

1.3.2 SPFA TechDocs

Reformatted documents, named SPFA TechDocs (https://www.sprayfoam.org/SPFA_techdocs), is a repository of technical information containing common definitions used in this Section. The site is organized in four categories for easy reference and identification: Roofing, Insulation, Specialty and General.

Spray Polyurethane Foam: Thermal and air/vapor barrier system consisting of sprayed polyurethane foam (SPF).

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualification of Manufacturer; G

Qualification of Installer; G

Quality Control Plan; G

Safety Plan; G

Fire Prevention Plan; G

Respiratory Protection Plan; G

SD-02 Shop Drawings

Spray Foam Air Barrier System Shop Drawings

SD-03 Product Data

Blowing Agents; G

Closed Cell SPF; G

Transition Membrane; G

Primers, Adhesives, and Mastics; G

Sealants; G

Safety Data Sheets; G

Ignition Barrier Coatings; G

Accessories; G

Recycled Content for Closed Cell Spray Foam Air Barrier; S

SD-06 Test Reports

Peel Adhesion Test; G

Thermographic Test; G

Fire-Ratings Of Ignition Barrier Materials; G

Flame Spread and Smoke Developed Index Ratings of SPF Products; G

Flame Propagation of Wall Assemblies; G

Site Inspections Reports; G

SD-07 Certificates

Indoor Air Quality for Spray Foam Air Barrier; S

SD-08 Manufacturer's Instructions

SPF Handling, Storage, and Spray Procedures; G

Substrate Preparation; G

Ignition Barrier; G

Transition Membrane Manufacturer's Installation Instructions; G

Manufacturer's Printed Installation Instructions for Primers, Adhesives, and Mastics; G

SD-09 Manufacturer's Field Reports

Core Samples; G

Daily Work Record; G

Visual Inspection and Thermal Scanning; G

1.5 MISCELLANEOUS REQUIREMENTS

For the spray foam air barrier system provide the following:

1.5.1 Shop Drawings

Submit spray foam air barrier system shop drawings showing locations, detailing, and extent of spray foam air barrier assemblies. Provide details of all typical conditions, intersections with other envelope assemblies and materials, membrane counter-flashings. Provide details and indicate materials for ignition barriers. Show details for bridging of gaps in construction, treatment of inside and outside corners, expansion joints, methods of attachment of materials covering the SPF without compromising the barrier. Indicate how miscellaneous penetrations such as conduit, pipes, electric boxes, brick ties, and similar items will be sealed.

1.5.2 Product Data

Submit manufacturer's technical data indicating compliance with performance and environmental requirements, manufacturer's printed instructions for evaluating, preparing, and treating substrates, temperature and other limitations of installation conditions, safety

requirements for installation, and Safety Data Sheets. Indicate flame and smoke spread ratings for all products. Submit ignition barrier literature including material description, physical properties, and manufacturer's printed installation instructions. Also include manufacturer's printed installation instructions for primers, adhesives, and mastics.

1.5.3 Test Reports

Submit test reports indicating that peel adhesion tests on all materials have been performed and the changes made, if required, in order to achieve successful and lasting adhesion. Submit test reports for flame spread and smoke developed index ratings of SPF products tested in accordance with ASTM E84 or UL 723. Submit test reports for flame propagation of wall assemblies tested in accordance with NFPA 285. Submit test reports for fire-ratings of ignition barrier materials tested in accordance with ASTM E84 or UL 723.

1.6 DELIVERY, STORAGE, AND HANDLING

1.6.1 Delivery

Deliver and store materials in sufficient quantity to allow for uninterrupted flow of work. Inspect materials delivered to the site for damage; unload and store out of weather. Deliver materials to the jobsite in their original unopened packages, clearly marked with the manufacturer's name, brand designation, description of contents, and shelf life of containerized materials. Store and handle to protect from damage. Submit SPF Handling, Storage, and Spray Procedures in accordance with submittal procedures.

1.6.2 Storage

Store materials in clean, dry areas, away from excessive heat, sparks, and open flame. Maintain temperatures in the storage area below the materials' flash point(s) and within limits recommended by the manufacturer's printed instructions. Provide ventilation in accordance with ASSP Z9.2 to prevent build-up of flammable gases. Store all chemicals in locations that limit the risk of contact with water, acids, caustics (such as lye), alcohols, and strong oxidizing and reducing agents.

1.6.3 Handling

Handle materials and containers safely and in accordance with manufacturer's recommendations. Store liquids in airtight containers and keep containers closed except when removing materials. Do not use equipment or containers containing remains of dissimilar materials. Do not expose foam component containers to direct sunlight. Containers exposed to long periods of cold may also exhibit separation and poor performance. Do not use materials from containers with content temperatures exceeding limits specified in the manufacturers installation instructions.

Mark and remove from job site all chemicals which have been contaminated with moisture, that exceed shelf life limits, or that have been exposed to temperature extremes.

1.6.3.1 Venting and Handling of Material Containers

Partially unscrew material container and drum caps to gradually vent the

containers prior to opening. Do not inhale vapors. Follow drum decontamination and disposal procedures recommended by the manufacturer or the American Chemistry Council's Center for the Polyurethanes Industry.

1.7 PEEL ADHESION TEST

Perform a field peel adhesion test on the SPF in accordance with ASTM D4541 Method B using a Type II pull tester except use a disk that is 2.25 inches in diameter and cut through the foam to separate the material attached to the disk from the surrounding material. Perform test after curing period in accordance with manufacturer's written recommendations. Record mode of failure and area which failed in accordance with ASTM D4541. Compare adhesion values with the manufacturer's established minimum values for the particular combination of material and substrate. Indicate on the inspection report whether the manufacturer's requirement has been met. Where the manufacturer has not declared a minimum adhesion value for their product and substrate combination, the inspector must record actual values.

1.8 SAFETY PROVISIONS

1.8.1 Fire Prevention

Provide a written fire prevention plan for the SPF application. Address specific fire hazards such as spontaneous combustion from exothermic heat build-up of SPF components during curing. Provide a continuous fire watch during mixing and spraying of SPF and for a minimum of two hours after completion of work at the end of each day. Maintain fire watch for additional time as required to ensure no potential ignition conditions exist.

1.8.1.1 Fire Extinguishers

Provide two fire extinguishers of minimum 15 pounds capacity each, in accordance with NFPA 10, in the immediate vicinity of the work. CAUTION: Do not discharge high pressure carbon dioxide extinguishers where explosive vapors exist since the discharge can cause a spark which will ignite the vapors.

1.8.2 Respiratory Protection Plan

Provide a written respiratory protection plan in accordance with OSHA regulation 29 CFR 1910.134 that protects installers during application and addresses separation of the area to prevent other workers from entering the work area during spraying.

1.8.3 Isolation

Isolate the work area as recommended by spray foam manufacturer's written requirements. Prevent workers without respiratory, skin, and eye Personal Protective Equipment (PPE) or training from entering the work area or otherwise being exposed to airborne chemicals from off-gassing of the insulation in excess of permissible exposure limits. Display appropriate warning signage at all work area entry points. Provide negative pressure ventilation of the spray area to minimize chemical exposure for all workers.

1.8.4 Respirators and Eye Protection

Respiratory protective devices (respirators) must meet the requirements of

ASSP Z88.2. Eye and face protective equipment must meet the requirements of ANSI/ISEA Z87.1. Additionally, sprayers and workers in the immediate vicinity of the spray during indoor installation of high-pressure SPF must wear NIOSH-approved, full-face, supplied air respirators (SAR) or hoods operated in positive pressure or continuous flow mode. Workers not in the immediate vicinity of the sprayer must wear air purifying respirators (APR) with an organic gas / P100 particulate cartridge. During outdoor installation of high-pressure SPF, sprayers and workers in the immediate vicinity of the spray must wear air purifying respirators (APR) with an organic gas / P100 particulate cartridge.

Instruct personnel in the use of personal protective equipment. Maintain such equipment and inspect regularly. All workers using respirators are required to have undergone pulmonary function testing and fit testing and must provide certification that they have done so. Change APR cartridges in accordance with manufacturer's written recommendations.

1.8.5 Clothing and Gloves

Sprayers and workers must wear protective clothing and gloves in accordance with OSHA requirements during materials application. Disposable, chemically-resistant coveralls must be worn and must cover all exposed skin. Sprayers and workers must wear fabric gloves coated with nitrile, neoprene, butyl or PVC.

1.8.6 Additional Requirements

Require personnel to review the Health, Safety and Environmental Aspects of Spray Polyurethane Foam and Coverings published by the Spray Polyurethane Foam Alliance (SPFA) (https://www.sprayfoam.org/) and the American Chemistry Council Center for the Polyurethanes Industry. Verify compliance prior to allowing personnel on site for installation work.

1.9 QUALITY CONTROL

1.9.1 Qualification of Manufacturer

Submit documentation verifying that the manufacturer of the SPF is currently accredited by the Air Barrier Association of America (ABAA Accreditation https://www.airbarrier.org/) or by the Spray Polyurethane Foam Alliance (SPFA) Professional Certification Program (PCP).

1.9.2 Qualification of Installer

Submit documentation verifying that installers of the spray foam air barrier are currently certified to properly install SPF materials. Acceptable certifications include those provided by the approved product manufacturer, by ABAA/BPQI (Building Performance Quality Institute) or by the Spray Polyurethane Foam Alliance (SPFA) Professional Certification Program (PCP). Installers must provide photo identification certification cards for inspection upon request.

1.9.3 General Quality Requirements

Provide all products and installation in accordance with the approved product manufacturer's installation instructions. SPFA TechDocs requirements (https://www.sprayfoam.org/SPFA_techdocs) may be used if manufacturers installation instructions do not address specific applications and documented best practices.

1.10 PRECONSTRUCTION MEETING

Conduct a preconstruction meeting after approval of submittals and a minimum of two weeks prior to commencing work specified in this Section. Attendance is required by the Contracting Officer's designated personnel, Contractor, and representatives of related trades including covering materials, substrate materials, adjacent materials, and materials and components of the air/vapor/thermal barrier system. Agenda must include, at a minimum, the following items:

a. Drawings, specifications and submittals related to the SPF work;

b. Sequence of construction;

c. Coordination with substrate preparation work and responsibility of repairing defects in substrates. Determine method of ensuring SPF work does not begin until substrates have been inspected and accepted;

d. Ensure that all penetrations of the substrate by other trades are completed prior to SPF air barrier installation where possible; responsibility of sealing penetrations after SPF air barrier installation should be addressed.

e. Compatibility of materials;

f. Application of self-adhering air barrier transition strips and primer as required for sealing the spray foam air barrier system at openings including but not limited to windows, doors and louvers;

g. Spray foam air barrier system installation; including methods to be used to provide a continuous barrier at thru-wall flashing, penetrations, and covering of embed items;

h. Quality control plan including methods of applying the product so that a consistent thickness across the face of the substrate is achieved.

i. Procedures for SPF manufacturer's technical representative's onsite inspection and acceptance of substrates, contact info for the representative, frequency of visits, and distribution of copies of inspection reports. Determine where core samples will be taken and review procedures for daily documentation of SPF application.

j. Property protection measures, including isolation of the work, and prevention of overspray and clean-up should overspray occur.

k. Safety requirements, including review of PPE, fire prevention, safety plan, respirator plan, ventilation and separation of the work area, fall protection, and posting of warning signs. Provide a complete schedule and a detailed, written fire protection plan including temporary isolation of the product and the work area until permanent isolation or ignition barrier is in place.

1.11 PROJECT/SITE CONDITIONS

1.11.1 Temperature and Weather

Install SPF within the range of ambient and substrate surface temperatures in accordance with manufacturer's written instructions. Do not apply SPF

to damp or wet substrates. Do not apply SPF during inclement weather or when ice, frost, surface moisture, or visible dampness is present on surfaces to be covered, or when precipitation is imminent. Do not apply SPF to exterior building surfaces when wind speeds exceed 25 miles per hour. Use moisture measuring methods and equipment to verify that the moisture conditions of substrate surfaces are in accordance with SPF manufacturer requirements prior to application. Substrate temperatures must be within limits recommended by the manufacturer's printed instructions.

1.11.2 Conditions for Primers

Follow manufacturer's printed application and curing instructions regarding ambient temperature minimum limits.

1.11.3 Conditions for Ignition Barriers

Ensure that sprayed surfaces comply with manufacturer's written requirements for application coverage, thickness, and curing prior to application of ignition barrier coatings.

1.11.4 Temporary Ventilation

Provide temporary ventilation for work of this Section in accordance with manufacturer's written instructions and with OSHA requirements for this type of application.

1.12 FOAM SPRAY EQUIPMENT

1.12.1 Applicator

Install spray foam with a plural-component proportioner, hoses and spray gun system approved by the spray foam manufacturer

Use a foam spray gun approved by the foam manufacturer that does not require a flushing solvent during the spray operation.

1.12.2 Equipment Calibration

Fully calibrate the foam metering equipment to monitor each liquid component to within 2 percent of the SPF manufacturer's required metering ratio. Calibrate spray equipment each day at the start of operations, after each restart if spraying operations have been terminated for more than one hour, whenever there is a change in fan pattern or pressure, whenever slow curing areas are noticed, whenever a change is made in hose length or working height, and after changeover between materials. Calibration consists of demonstrating that the equipment is adjusted to deliver components in proper mix and proportion. Conduct calibration tests on cardboard or plywood on a wall adjacent to the area to be sprayed.

1.12.3 Metering Equipment Requirements

Use foam metering equipment capable of developing and maintaining the SPF manufacturer's required liquid component pressures and temperatures. Foam metering equipment must have gages for visual monitoring. Equipment must provide temperature control of foam components to within the temperature ranges recommended by the foam manufacturer's printed instructions.

1.12.4 Moisture Protection

Protect surfaces of supply containers and tanks used to feed foam metering equipment from moisture.

1.12.5 Compressed Air

Supply compressed air that is in contact with SPF during mixing or atomization through moisture traps that are continuously bled.

1.12.6 Dispense Excess Materials

Do not deposit materials used for cleaning of equipment or materials dispensed for calibration purposes and establishment of spray gun pattern onto the ground. Dispense such materials into scrap containers or onto plastic film, or cardboard, and dispose of in accordance with safety requirements and jobsite regulations.

PART 2 PRODUCTS

2.1 SPRAY FOAM AIR BARRIER

2.1.1 General

Provide a closed cell, sprayed in place, SPF that forms a continuous air /vapor/thermal barrier. Provide in accordance with ASTM C1029, with the requirements of UFC 3-600-01, ICC IBC Chapter 26, ICC 1100, and NFPA 285. In the event of a conflict, the most stringent requirement applies. Provide all system components necessary for a complete, code compliant installation, whether indicated or not, including material support components, expansion and contraction joints, ignition barrier coatings and accessories.

Liquid thermal and ignition barrier protective membrane is a non flammable, one part, water based intumescing coating complying with NFPA 286. The formulation is non toxic, drain safe, non fuming and expands up to 2,000%. The EPA classifies the barrier as an Ultra Low VOC with less than 1 gram per liter content. Material has a flame spread rating of 5 and smoke rating of 20 when tested in accordance with ASTM E84 and UL 723. Barriers are for interior use only, and can be top coated with latex or oil based paint.

Provide closed cell spray polyurethane foam at the perimeters of exterior frames, wall to roof framing conditions and similar locations indicated.

2.1.2 Physical Properties

Provide a closed cell product with the following characteristics:

a. Core Density (ASTM D1622): 1.5 to 2.5 lb per cf, nominal

b. Thermal Resistance (ASTM C518)

(1) Initial R-value per inch thickness: 7 sf·degrees F h per Btu

(2) Aged R-value per inch thickness (180 days at 76 degrees F): 6.6 sf·degrees F·h per Btu

c. Material Air Permeance (ASTM E2178): Less than 0.004 CFM per sf at

1.57 psf at the minimum installed thickness.

d. Assembly Air Leakage (ASTM E2357, ASTM E283/E283M): less than 0.04 CFM per sf at 1.57 psf at the minimum installed thickness.

e. Compressive Strength (ASTM D1621): Minimum 28.3 psi

f. Tensile Strength (ASTM D1623)

(1) Medium density: 15 psi

g. Water Vapor Permeance (ASTM E96/E96M, water method): less than 1.2 US Perms at one inch thickness

h. Vapor Retarder (ICC IBC, ICC IECC) Class II

i. Surface Burning Characteristics (ASTM E84 or UL 723) 4 inch thickness:

(1) Flame Spread (FS) Index Rating less than 75.

(2) Smoke Developed (SD) Index Rating less than 150. When fully encapsulated, SPF with an SD rating greater than 150 but less than 450 is permitted. Approval of SPF product is contingent upon approval of encapsulation products and assemblies..

j. Closed Cell Content (ASTM D6226): minimum 90 percent

k. Dimensional Stability (Humid Aging) (ASTM D2126): 15 percent at 28 days at 158 degrees F with 97 percent relative humidity.

l. Water Absorption (ASTM D2842): Maximum 5.0 per volume

m. Fungi Resistance (ASTM C1338): Pass, with no growth

n. Recycled Content: Minimum 9 percent (pre- and post-consumer). Provide data identifying percentage of recycled content for closed cell spray foam air barrier.

2.1.3 Expansion and Contraction

Provide an assembly that allows for relative movement due to temperature, moisture, and air pressure changes. Provide expansion and contraction measures as required by the manufacturer's written recommendations.

2.1.4 Flame Spread and Smoke Developed Index Ratings

Provide product test reports that include flame spread (FS) and smoke developed (SD) index data. Where FS and SD values of foam products do not meet requirements, provide code-compliant ignition barrier products or alternate assemblies and verify complete encapsulation of the spray foam air barrier through product data or on shop drawings. Submit for approval in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

2.1.5 Prohibited Materials

Products that contain hexabromocyclododecane (HBCD) flame retardants are prohibited. Products that contain hydrochlorofluorocarbons (HCFCs), chlorofluorocarbons (CFCs), or other hydrofluorocarbons (HFCs), or other blowing agents with Ozone Depletion Potential (ODP) greater than 0.015 or

Global Warming Potential (GWP) above 16 are prohibited. For a list of foam blowing agents with ODP and GWP values see https://www.epa.gov/snap/substitutes-rigid-polyurethane-spray. Provide validation of indoor air quality for spray foam air barrier that no prohibited materials are used.

2.2 TRANSITION MEMBRANE

Provide the recommended transition membranes.

2.3 PRIMERS, ADHESIVES, AND MASTICS

Provide primers, adhesives, mastics and other accessory materials as recommended by spray foam manufacturer's printed literature.

2.4 FLASHING

As specified in Section 07 60 00 FLASHING AND SHEET METAL.

2.5 JOINT SEALANTS

As specified in Section 07 92 00 JOINT SEALANTS. Verify compatibility with other system products.

PART 3 EXECUTION

3.1 EXAMINATION

Before installing the spray foam air barrier and with the installer present, examine substrates, areas, and conditions under which SPF will be applied, for compliance with requirements. Ensure that surfaces are structurally sound, dry, even, and free of oil, grease, dirt, excess mortar or other contaminants. Verify that work by other trades is in place and complete prior to application of spray foam.

3.2 PREPARATION

3.2.1 Substrate Preparation

Clean, prepare, and treat substrate according to manufacturer's written instructions. Provide clean, dust-free, and dry substrate for spray foam application.

a. Prepare surfaces by brushing, scrubbing, scraping, or grinding to remove loose mortar, dust, oil, grease, oxidation, mill scale and other contaminants which will affect adhesion of the SPF.

b. Wipe down metal surfaces to remove release agents or other non-compatible coatings, using clean sponges or rags soaked in a solvent compatible with the SPF.

3.2.2 Protection

Protect adjacent areas and surfaces from spray applied materials in accordance with the following:

a. Mask and cover adjacent areas to protect from overspray.

b. Ensure required foam stops and back up materials are in place to

achieve a complete seal.

c. Seal off ventilation equipment. Install temporary ducting and fans to provide required negative-pressure exhaust of spray fumes. Provide make-up air as required.

d. Erect barriers, isolate area, and post warning signs to notify non-protected personnel of the requirement to avoid the spray area.

3.2.3 Blocking Around Heat Producing Devices

Install non-combustible blocking around heat producing devices to provide the following clearances:

a. Recessed light fixtures, including wiring compartments, ballasts, and other heat producing devices, unless certified for installation surrounded by insulation: Minimum of 3 inches from outside face of fixtures and devices and in accordance with NFPA 70 and, if insulation is to be placed above fixture or device, 24 inches above fixture.

3.2.4 Fire and Explosion Hazards

Prohibit open flames, sparks, welding, and smoking in the application area. Provide and maintain fire extinguishers of appropriate type, size and distance, as required by NFPA, in the application area. Apply SPF according to manufacturer's instructions regarding maximum pass thickness and curing time. Mix batches in small enough quantities to avoid spontaneous combustion from exothermic heat build-up of SPF components during curing.

3.2.5 Warning Signs

Post warning signs at ground level adjacent to the work area and a minimum of 150 feet from the application area stating the area is off limits to unauthorized persons and warning of potential hazards. Place clearly visible and legible warning sign at entrance to primary road leading to the project facility warning of presence of combustible materials, irritating fumes, and potential of overspray damage.

3.2.6 Prime Substrate

Provide as recommended by the manufacturer for each substrate to be primed. Use primers at full strength. Do not dilute primers unless required and as recommended in writing by the manufacturer. Do not use cleaning solvents for thinning primers or other materials. Ensure that diluted primer(s) meet VOC requirements.

3.3 INSTALLATION

3.3.1 Spray Polyurethane Foam Application

Type of Construction	Insulation Thickness	R-value
Window, door and similar exterior opening perimeters	Varies	Varies
Wall to roof framing conditions	Varies	Varies

3.3.2 Sequencing and Coordination

Sequence the work to prevent access to the work area by other trades during foam application and curing. Limit access of non-essential workers during application. Notify the Contracting Officer 24 hours in advance of spraying operations. Sequence spray foam work with other trades to permit continuous self-flashing of the spray foam air barrier. Ensure expansion and control joints are provided as detailed on the manufacturer's shop drawings to accommodate the expansion of each layer of the air/vapor /thermal envelope. Provide temporary fire protection of uncured foam, and isolate the work area, until foam application is covered with a permanent thermal or ignition barrier.

3.3.3 Installation of Transition Membrane

Install transition membrane materials in accordance with the details on the drawings and the following:

a. Install transition membrane at all required locations prior to installation of the SPF air barrier.

b. Verify transition membrane is fully adhered to substrate and that its surface is clean, dry and wrinkle free prior to installation of the fluid-applied membrane air barrier.

c. Verify transition membrane completely covers all transition areas and will provide continuity of the finished SPF air barrier without gaps or cracks.

Submit transition membrane manufacturer's installation instructions.

3.3.4 Installation of Spray Foam Air Barrier

Install materials in accordance with paragraph SAFETY PROVISIONS, in accordance with manufacturer's recommendations, and in accordance with the following:

a. Use spray equipment that complies with foam manufacturer's recommendations for the specific type of application, and as specified herein. Record equipment settings on the Daily Work Record. Each proportioned unit can supply only one spray gun.

b. Apply only when surfaces and environmental conditions are within limits prescribed by the material manufacturer.

c. Continuously apply the spray foam air barrier at wall and roof junctures to form a continuous integrated air barrier system around the entire building perimeter. Provide a spray foam air barrier at exterior penetrations and openings. Use self-adhering air barrier transition strips if necessary to achieve full extension and continuity of the barrier at these locations. Seal edges of barrier at junctures with rough openings.

d. Install within manufacturer's tolerances, but not more than minus 1/4 inch or plus 1/2 inch.

e. Sequence work to completely seal all penetrations resulting from pipes, vents, wires, conduit, electrical fixtures, structural members, or other construction. If penetrations through the spray foam air

barrier are made after the initial SPF application, reapply in accordance with manufacturer's written instructions for such remedial work.

f. Finished surface of SPF must be free of voids and embedded foreign objects.

g. Remove masking materials and overspray from adjacent areas immediately after foam surface has hardened. Ensure cleaning methods do not damage work performed by other sections.

h. Trim, as required, any excess thickness that would interfere with the application of work by other trades.

i. Clean and restore surfaces soiled or damaged by work of other trades. Before cleaning and restoring damaged work, consult with other trades for appropriate and approved methods for cleaning and restoration to prevent further damage.

j. Complete connections to other components and repair any gaps, holes or other damage using material approved by the SPF manufacturer.

k. Provide expansion joints in the SPF application aligned with expansion joints in the building enclosure, where substrate materials change, and in accordance with manufacturer's recommendations.

l. Provide a continuous fire watch in accordance with paragraph SAFETY PROVISIONS.

3.4 FIELD QUALITY CONTROL

3.4.1 General Site Inspections and Testing

Provide site inspections and testing in accordance with accepted practices and this Section.

a. Conduct inspections and testing at 5, 50, and 95 percent of completion of this scope of work. Forward written inspection reports to the Contracting Officer within 5 working days of the inspection and test being performed.

b. If inspections reveal defects, promptly remove and replace defective work at no additional expense to the Government.

3.4.2 Manufacturer Site Inspections

Manufacturer's technical representative must visit the site during the installation process to ensure the SPF and accessories are being applied in compliance with requirements. At a minimum, manufacturer's technical representative must be present at work startup and perform field inspection of the first day's completed application and at substantial completion, prior to demobilization. After each inspection, submit an inspection report signed by the manufacturer's technical representative, to the Contracting Officer within five working days. The inspection report must note overall quality of work, deficiencies, and recommended corrective actions in detail. Notify the Contracting Officer a minimum of two working days prior to site visits by manufacturer's technical representative.

3.4.3 Contractor's Site Inspections

Establish and maintain an inspection procedure to ensure compliance of the foam installation with Contract requirements. Conduct inspections and testing at 5, 50, and 95 percent completion of application. Forward written inspection reports to the Contracting Officer within five working days of the inspection and test being performed. Work not in compliance must be promptly removed and replaced or corrected, in an approved manner, at no additional cost to the Government. Quality control must include, but is not limited to, the following:

a. Observation of environmental conditions; number and skill level of insulation workers.

b. Verification of certification, listing, or label.

c. Verification of proper storage and handling of materials before, during, and after installation.

d. Inspection of SPF, support structure, primer, expansion joints, ignition barrier, vapor retarder, and accessories.

3.4.4 Peel Adhesion Test

Conduct in accordance with test protocol indicated in Part 1 paragraph PEEL ADHESION TEST.

3.4.5 Visual Inspection and Thermal Scanning

Following completion of installation, inspect the SPF surface or cavity using infrared (IR) scanning as specified in ASTM C1060, and ASTM C1153. Where the IR inspection indicates construction inconsistencies including wet insulation, remove inconsistent portions of the assembly and replace insulation to correct thermal anomalies. Reinspect and document corrections to the satisfaction of the Contracting Officer.

3.4.5.1 Thermographic Test Report

Include thermographs in color and a color temperature scale to define the temperature indicated by the various colors. Identify the high temperature reading, the outdoor air temperature, the building indoor air temperature, and the wind speed and direction. Note areas of compromise in the building enclosure, and note actions required and taken to correct those areas. Final thermography test report must demonstrate that the problem areas have been corrected. Submit the complete test and analysis.

3.5 CORRECTION OF DEFICIENCIES

Upon completion of inspection, testing, or sample taking, repair damaged construction, restore substrates and finishes, and protect repaired construction. Deficiencies found during inspection must be corrected following notification.

3.6 CLEANUP OF SPILLS

Conduct cleanup of uncured product spillage in accordance with paragraph SAFETY PROVISIONS and the manufacturer's written safe handling instructions and SDS. In the event of a conflict, the most stringent requirement governs.

3.7 PROTECTION AND CLEANING

3.7.1 Protection of Installed Work

Protect SPF installation from damage during application and remainder of construction period in accordance with manufacturer's written instructions. Repair damaged areas to new condition.

3.7.2 Cleaning of Adjacent Surfaces

Clean overspray from adjacent construction using cleaning agents and procedures as recommended in writing by the manufacturer of each type of affected construction and as acceptable to same.

-- End of Section --

SECTION 07 60 00

FLASHING AND SHEET METAL
08/23, CHG 1: 05/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2605	(2022) Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels

AMERICAN WELDING SOCIETY (AWS)

AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM A480/A480M	(2024a) Standard Specification for General Requirements for Flat-Rolled Stainless and Heat-Resisting Steel Plate, Sheet, and Strip
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A792/A792M	(2022) Standard Specification for Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B209/B209M	(2021a) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM B370	(2022) Standard Specification for Copper Sheet and Strip for Building Construction
ASTM D2244	(2021) Standard Practice for Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates

ASTM D4214 (2007; R 2015) Standard Test Method for Evaluating the Degree of Chalking of Exterior Paint Films

ASTM E2112 (2023) Standard Practice for Installation of Exterior Windows, Doors and Skylights

NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)

NRCA 0429 (2022) The NRCA Roofing Manual: Architectural Metal Flashing, Condensation and Air Leakage Control and Reroofing

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1793 (2012) Architectural Sheet Metal Manual, 7th Edition

1.2 GENERAL REQUIREMENTS

Finished sheet metal assemblies must form a weathertight enclosure without waves, warps, buckles, fastening stresses or distortion, while allowing for expansion and contraction without damage to the system. The sheet metal installer is responsible for cutting, fitting, drilling, and other operations in connection with sheet metal modifications required to accommodate the work of other trades. Coordinate installation of sheet metal items used in conjunction with roofing with roofing work to permit continuous, uninterrupted roofing operations.

1.2.1 General Material Requirements

All materials specified in this Section installed in conjunction with the roofing system must be provided by the roofing system manufacturer, or by a manufacturer approved by the roofing system manufacturer for use in the roofing system, and must form a part of the Warranty as required by the applicable roofing system Section.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Exposed Sheet Metal Coverings; G

Gutters; G

Downspouts; G

fascia; G

Flashing at Roof Penetrations and Equipment Supports; G

Drip Edges; G

Recycled Content; S

SD-04 Samples

Finish Samples; G

SD-07 Certificates

Warranty on Finishes; G

SD-08 Manufacturer's Instructions

Instructions for Installation; G

Quality Control Plan; G

SD-10 Operation and Maintenance Data

Cleaning and Maintenance; G

1.4 MISCELLANEOUS REQUIREMENTS

1.4.1 Product Data

Indicate thicknesses, dimensions, fastenings, anchoring methods, expansion joints, and other provisions necessary for thermal expansion and contraction. Scaled manufacturer's catalog data may be submitted for factory fabricated items.

1.4.2 Finish Samples

Submit two color charts and two finish sample chips from manufacturer's standard color and finish options for each type of finish indicated.

1.4.3 Operation and Maintenance Data

Submit detailed instructions for installation and quality control during installation, cleaning and maintenance, for each type of assembly indicated.

1.5 DELIVERY, HANDLING, AND STORAGE

Package and protect materials during shipment. Uncrate and inspect materials for damage, dampness, and wet-storage stains upon delivery to the job site. Remove from the site and replace damaged materials that cannot be restored to like-new condition. Handle sheet metal items to avoid damage to surfaces, edges, and ends. Store materials in dry, weather-tight, ventilated areas until installation.

PART 2 PRODUCTS

2.1 RECYCLED CONTENT

Provide products with recycled content. Provide data for each product with recycled content, identifying percentage of recycled content.

2.2 MATERIALS

Use any metal listed by NRCA 0429 or SMACNA 1793 for a particular item, unless otherwise indicated. Provide materials and configurations in accordance with NRCA 0429 or SMACNA 1793 for each material, while also meeting the minimum thickness requirements specified in this Section. Different items need not be of the same metal, except that if copper is selected for any exposed item, all exposed items must be copper, and that contact between dissimilar metals must be avoided.

Provide sheet metal items in 8 to 10 foot lengths. Single pieces less than 8 feet long may be used to connect to factory-fabricated inside and outside corners, and at ends of runs. Factory fabricate corner pieces with minimum 12 inch legs. Provide accessories and other items essential to complete the sheet metal installation. Provide accessories made of the same or compatible materials as the items to which they are applied. Fabricate sheet metal items of the materials specified below and to the gage, thickness, or weight shown in Table I at the end of this section unless identifed otherwise under MISCELLANEOUS METAL FABRICATIONS. Where more than one material is listed for a particular item in Table I, each is acceptable and may be used, except as follows:

2.2.1 Exposed Sheet Metal Items

Provide exposed sheet metal items of the same material. Consider the following as exposed sheet metal: gutters, including hangers; downspouts; fascia; cap, base, and eave flashings and related accessories.

2.2.2 Drainage

Do not use copper for an exposed item if drainage from that item will pass over exposed masonry, stonework or other metal surfaces.

2.2.3 Copper, Sheet and Strip

Provide in accordance with ASTM B370, cold-rolled temper, H 00 (standard).

2.2.4 Lead Sheet

Provide in a minimum weight of 4 pounds per square foot.

2.2.5 Galvanized Steel Sheet

Provide in accordance with ASTM A653/A653M, a minimum of 24 gauge, and a minimum zinc coat weighting of 90 ounces per square feet.

2.2.6 Steel Sheet, Aluminum Zinc-Coated

Provide in accordance with ASTM A792/A792M, a minimum gauge as indicated in Table I, or a minimum of 24 gauge if not listed.

2.2.7 Stainless Steel

Provide in accordance with ASTM A480/A480M, Type 302 or 304, 2D Finish, fully annealed, dead-soft temper, a minimum gauge as indicated in Table I, or a minimum of 24 gauge if not listed.

2.2.8 Aluminum Alloy, Extruded Bars, Rods, Shapes, and Tubes

ASTM B221.

2.2.9 Aluminum Alloy Sheet and Plate

Provide in accordance with ASTM B209/B209M form alloy, and temper appropriate for use. Provide material of a minimum gauge as indicated in Table I, or a minimum of 0.032-in in thickness if not listed.

2.2.9.1 Alclad

When fabricated of aluminum, fabricate the following items with Alclad 3003, Alclad 3004, or Alclad 3005, clad on one side unless otherwise indicated.

a. Gutters, downspouts, and hangers

b. Fascia

c. Flashing

2.2.10 Finishes

Provide exposed exterior sheet metal with a baked on, factory applied coil fluoropolymer color coating. Field applications of color coatings are prohibited and will be rejected.

2.2.10.1 Steel Sheet Coil Finish

Give galvalume steel and hot dipped galvanized steel sheet coil a mechanical pretreatment to enhance adhesion followed by a caustic etch or alkaline wash for cleaning and degreasing. Apply a phosphate spray or chromate conversion treatment to protect against humidity and corrosive chemicals. Furnish an organic coating treatment conforming to AAMA 2605 to obtain a 70% PVDF coating. Provide a two coat application consisting of 0.2 mils of primer with a 0.7 mil topcoat that achieves a 0.9 mil thickness.

2.2.10.2 Aluminum Sheet Coil Finish

Give aluminum sheet coil a mechanical pretreatment to enhance adhesion followed by a caustic etch or alkaline wash for cleaning and degreasing. Apply a phosphate spray or chromate conversion treatment to protect against humidity and corrosive chemicals. Furnish an organic coating treatment conforming to AAMA 2605 to obtain a 70% PVDF coating. Provide a two coat application consisting of 0.2 mils of primer with a 0.7 mil topcoat that achieves a 0.9 mil thickness.

2.2.10.3 Color Selection

Gutters and downspouts are Slate Gray, AMS 595A 36173 as indicated in the Marine Corps Base Camp Lejune, Base Exterior Architectural Plan, Camp Gieger.

Flashing and sheet metal finish matches the sheet metal roofing selection.

2.2.10.4 Warranty on Finishes

Provide a manufacturer's warranty to repair, or replace, sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within 20 years from date of project substantial completion. Deterioration includes the following:

a. Color fading more than 5 Delta E units when tested in accordance with ASTM D2244.

b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.

c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2.3 Fasteners and Seams

Select fastener alloys that do not create electrolysis with substrates. Fasteners are non ferrous metal or galvanized steel at exterior conditions, except that hard copper fasteners are used with copper; aluminum or stainless steel fasteners are used with aluminum; and stainless steel fasteners are used with stainless steel. Fasteners are self clinching, penetrating types of various diameters, thread types and lengths dictated by the conditions encountered. Finish exposed fasteners to match substrate colors encountered.

Solder seams in accordance with ASTM B32, 95-5 tin-antimony.

Make splice plates weathertight with silicone sealant.

2.4 MISCELLANEOUS METAL FABRICATIONS

2.5 Downspouts and Gutters

Downspouts, gutters, components and accessories are a matching material and finish.

Downspout tubing joints are tapered and telescope 1 inch. Metal brackets are fabrications 1 inch in width with a combination external strap and internal wall stand off. Fabricate seamless 45 degree offset and kickout elbows.

Fabricate offsets and terminations that telescope into downspout boot receivers.

Fabricate gutters in the longest lengths practical. Separate gutter end joints 0.375 of an inch and back with 6 inch wide exposed splice plates at gutter expansion joints. Create 0.375 inch expansion reveals to accommodate thermal movement with 6 inch wide concealed splice plates between joint lengths. Provide support brackets and interior spreaders. Hem exposed edges. Construct corner fabrications using miter joints with button lock pockets in lieu of interlocked and mechanically fastened assemblies. Shop fabricate 1 foot, 6 inch inside corner, outside corner, tee and end terminations using butt joint and splice plate end conditions. Provide end caps, outlets and similar accessories.

Furnish bronze, copper, stainless steel or aluminum wire ball strainers at each outlet.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Workmanship

Make lines and angles sharp and true. Free exposed surfaces from visible wave, warp, buckle, and tool marks. Fold back exposed edges neatly to form a 1/2 inch hem on the concealed side. Make sheet metal exposed to the weather watertight with provisions for expansion and contraction.

Make surfaces to receive sheet metal plumb and true, clean, even, smooth, dry, and free of defects and projections. For installation of items not shown in detail or not covered by specifications conform to the applicable requirements of SMACNA 1793, Architectural Sheet Metal Manual. Provide sheet metal flashing in the angles required to accommodate terminations, edges and wherever indicated and necessary to make the work watertight. Join sheet metal items together as shown in Table II.

3.1.2 Nailing

Confine nailing of sheet metal generally to sheet metal having a maximum width of 18 inches. Confine nailing of flashing to one edge only. Space nails evenly not over 3 inch on center and approximately 1/2 inch from edge unless otherwise specified or indicated. Face nailing is not permitted. Where sheet metal is applied to other than wood surfaces, include in shop drawings, the locations for sleepers and nailing strips required to secure the work. Secure flashing at one-half the normal interval to ensure a wind-resistant installation.

3.1.3 Cleats

Provide cleats for sheet metal 18 inches and longer in width. Cleats are continuous. Unless otherwise specified, provide cleats of the same material and thickness as the sheet metal beingsecured. Secure cleat upper edges with fasteners and fold cleat toes into continuously tonged lock seams. Pre-tin cleats for soldered seams.

3.1.4 Bolts, Rivets, and Screws

Install bolts, rivets, and screws where indicated or required. Provide compatible washers where required to protect surface of sheet metal and to provide a watertight connection. Provide mechanically formed joints in aluminum sheets 0.040 inches or less in thickness.

3.1.5 Seams

Straight and uniform in width and height with no solder showing on the face.

3.1.5.1 Flat-lock Seams

Finish not less than 3/4 inch wide.

3.1.5.2 Lap Seams

Finish soldered seams not less than one inch wide. Overlap seams not soldered, not less than 3 inches.

3.1.5.3 Loose-Lock Expansion Seams

Not less than 3 inches wide; provide minimum one inch movement within the joint. Completely fill the joints with the specified sealant, applied at not less than 1/8 inch thick bed.

3.1.5.4 Standing Seams

Not less than one inch high, double locked without solder.

3.1.5.5 Flat Seams

Make seams in the direction of the flow.

3.1.6 Soldering

Where soldering is specified, apply to copper, zinc-coated steel, and stainless steel items. Pre-tin edges of sheet metal before soldering is begun. Seal the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants. Do not solder aluminum.

3.1.6.1 Edges

Scrape or wire-brush the edges of lead-coated material to be soldered to produce a bright surface. Flux brush the seams in before soldering. Treat with soldering acid flux the edges of stainless steel to be pre-tinned. Seal the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants. Do not solder aluminum.

3.1.7 Welding and Mechanical Fastening

Use welding for aluminum of thickness greater than 0.040 inch. Aluminum 0.040 inch or less in thickness must be butted and the space backed with formed flashing plate; or lock joined, mechanically fastened, and filled with sealant as recommended by the aluminum manufacturer.

3.1.7.1 Welding of Aluminum

Use welding of the inert gas, shield-arc type. For procedures, appearance and quality of welds, and the methods used in correcting welding work, conform to AWS D1.2/D1.2M.

3.1.7.2 Mechanical Fastening of Aluminum

Use No. 12, aluminum alloy, sheet metal screws or other suitable aluminum alloy or stainless steel fasteners. Drive fasteners in holes made with a No. 26 drill in securing side laps, end laps, and flashings. Space fasteners 12 inches maximum on center. Where end lap fasteners are required to improve closure, locate the end lap fasteners not more than 2 inches from the end of the overlapping sheet.

3.1.8 Protection from Contact with Dissimilar Materials

3.1.8.1 Copper or Copper-bearing Alloys

Paint with heavy-bodied bituminous paint surfaces in contact with dissimilar metal, or separate the surfaces by means of moistureproof building felts.

3.1.8.2 Aluminum

Do not allow aluminum surfaces in direct contact with other metals except stainless steel, zinc, or zinc coating. Where aluminum contacts another metal, paint the dissimilar metal with a primer followed by two coats of aluminum paint. Where drainage from a dissimilar metal passes over aluminum, paint the dissimilar metal with a non-lead pigmented paint.

3.1.8.3 Metal Surfaces

Paint surfaces in contact with mortar, concrete, or other masonry materials with alkali-resistant coatings such as heavy-bodied bituminous paint.

3.1.9 Expansion and Contraction

Provide expansion and contraction joints at not more than 32 foot intervals for aluminum and at not more than 40 foot intervals for other metals. Provide an additional joint where the distance between the last expansion joint and the end of the continuous run is more than half the required interval. Space joints evenly. Join extruded aluminum fascia by expansion and contraction joints spaced not more than 12 feet apart.

3.1.10 Fascia

Prefabricate in the shapes and sizes indicated and in lengths not less than 8 feet. Extend flange at least 4 inches onto roofing. Provide prefabricated, mitered corners internal and external corners.

3.1.10.1 Edge Strip

Hook the lower edge of fascia at least 3/4 inch over a continuous strip of the same material bent outward at an angle not more than 45 degrees to form a drip. Nail hook strip to a wood nailer at 6 inches maximum on center. Where fastening is made to concrete or masonry, use screws spaced 12 inches on center driven in expansion shields set in the concrete or masonry. Where horizontal wood nailers are slotted to provide for insulation venting, install strips to prevent obstruction of vent slots. Where necessary, install strips over 1/16 inch thick compatible spacer or washers.

3.1.10.2 Joints

Leave open the section ends of fascia 1/4 inch and backed with a formed flashing plate, mechanically fastened in place and lapping each section end a minimum of 4 inches set laps in plastic cement. Face nailing is not permitted. Install prefabricated aluminum fascia in accordance with the manufacturer's printed instructions and details.

3.1.11 Metal Drip Edges

Provide a metal drip edge, designed to allow water run-off to drip free of underlying construction, at eaves and rakes prior to the application of roofing. .

3.1.12 Gutters

The hung type of shape indicated and supported on underside by brackets

that permit free thermal movement of the gutter. Provide gutters in sizes indicated complete with mitered corners, end caps, outlets, brackets, and other accessories necessary for installation. Bead with hemmed edge or reinforce the outer edge of gutter with a stiffening bar not less than 3/4 by 3/16 inch of material compatible with gutter. Fabricate gutters in sections not less than 8 feet. Lap the sections a minimum of one inch in the direction of flow or provide with concealed splice plate 6 inches minimum. Join the gutters, other than aluminum, by riveted and soldered joints. Join aluminum gutters with riveted sealed joints. Provide expansion-type slip joints midway between outlets. Install gutters below slope line of the roof so that snow and ice can slide clear. Support gutters on adjustable hangers spaced not more than 30 inches on center or by continuous cleats. Adjust gutters to slope uniformly to outlets, with high points occurring midway between outlets. Fabricate hangers and fastenings from compatible metals.

3.1.13 Downspouts

Space supports for downspouts. Types, shapes and sizes are indicated. Provide complete including elbows and offsets. Provide downspouts in approximately 10 foot lengths. Provide end joints to telescope not less than 1/2 inch and lock longitudinal joints. Provide gutter outlets with wire ball strainers for each outlet. Provide strainers to fit tightly into outlets and be of the same material used for gutters. Keep downspouts not less than one inch away from walls. Fasten to the walls at top, bottom, offsets and intermediate points not to exceed 5 feet on center with leader straps or concealed rack-and-pin type fasteners. Form straps and fasteners of metal compatible with the downspouts.

3.1.13.1 Terminations

Neatly fit into the drainage connection the downspouts terminating in drainage lines and fill the joints with a portland cement mortar cap sloped away from the downspout. Provide downspouts terminating in splash blocks with elbow-type fittings.

3.1.14 Flashing at Wall Openings

Install pan flashing in the rough opening sill at all penetrations in the exterior wall assemblies, such as windows, louvers, storefronts and curtain walls. Pan sill flashing must have end dams at both jambs a minimum of 2 in high and a rear dam of 2 in high. Flashing must comply with ASTM E2112 and SMACNA 1793.

3.1.15 Sheet Metal Covering on Flat, Sloped, or Curved Surfaces

Except as specified or indicated otherwise, cover and flash all minor flat, sloped, or curved surfaces such as crickets, bulkheads, dormers and small decks with metal sheets of the material used for flashing; maximum size of sheets, 16 by 18 inches. Fasten sheets to sheathing with metal cleats. Lock seams and solder. Lock aluminum seams as recommended by aluminum manufacturer. Provide an underlayment of roofing felt for all sheet metal covering.

3.1.16 Flashing at Roof Penetrations and Equipment Supports

Provide metal flashing for all pipes, ducts, and conduits projecting through the roof surface and for equipment supports, guy wire anchors, and similar items supported by or attached to the roof deck. Goose-necks,

rain hoods, power roof ventilators, and similar items are specified in other sections.

3.1.17 Single Pipe Vents

See Table I, footnote (d). Set flange of sleeve in bituminous plastic cement and nail 3 inches on center. Bend the top of sleeve over and extend down into the vent pipe a minimum of 2 inches. For long runs or long rises above the deck, where it is impractical to cover the vent pipe with lead, use a two-piece formed metal housing. Set metal housing with a metal sleeve having a 4 inches roof flange in bituminous plastic cement and nailed 3 inches on center. Extend sleeve a minimum of 8 inches above the roof deck and lapped a minimum of 3 inches by a metal hood secured to the vent pipe by a draw band. Seal the area of hood in contact with vent pipe with an approved sealant.

3.2 PAINTING

Touch ups in the field may be applied only after metal substrates have been cleaned and pretreated in accordance with manufacturer's written instructions and products.

Field-paint dissimilar sheet metals in contact to separate and deter galvanic interactions.

3.3 CLEANING

Clean exposed sheet metal work at completion of installation. Remove grease and oil films, handling marks, contamination from steel wool, fittings and drilling debris, and scrub-clean. Free the exposed metal surfaces of dents, creases, waves, scratch marks, and solder or weld marks.

3.4 REPAIRS TO FINISH

Scratches, abrasions, and minor surface defects of finish may be repaired in accordance with the manufacturer's printed instructions and as approved. Repair damaged surfaces caused by scratches, blemishes, and variations of color and surface texture. Replace items which cannot be repaired.

3.5 FIELD QUALITY CONTROL

Establish and maintain a Quality Control Plan for sheet metal used in conjunction with roofing to assure compliance of the installed sheet metalwork with the Contract requirements. Remove work that is not in compliance with the Contract and replace or correct. Include quality control, but not be limited to, the following:

a. Observation of environmental conditions; number and skill level of sheet metal workers; condition of substrate.

b. Verification that specified material is provided and installed.

c. Inspection of sheet metalwork, for proper size(s) and thickness(es), fastening and joining, and proper installation.

3.5.1 Procedure

Submit for approval prior to start of roofing work. Include a checklist

of points to be observed. Document the actual quality control observations and inspections. Provide a copy of the documentation to the Contracting Officer at the end of each day.

Provide the thicknesses and jointing indicated, as applicable, in Table I and Table II:

TABLE I. SHEET METAL WEIGHTS, THICKNESSES, AND GAGES					
Sheet Metal Items	Copper ounces per square foot	Aluminum, inch	Stainless Steel, Aluminum Zinc Coated Steel, inch		
Building Expansion Joints					
Cover	16	.032	.015		
Waterstop-bellows or flanged, U-type.	16	-	.015		
Covering on minor flat, pitched or curved surfaces	20	.040	.018		
Downspouts and leaders	16	.032	.015		
Downspout clips and anchors	-	.040 clip .125 anchor	-		
Downspout straps, 2-inch	48 (a)	.060	.050		
Conductor heads	16	.032	.015		
Scupper lining	20	.032	.015		
Strainers, wire diameter or gage	No. 9 gage	.144 diameter	.109 diameter		
Flashings:					
Base	20	.040	.018		
Cap (Counter-flashing)	16	.032	.015		
Eave	16	-	.015		

TABLE I. SHEET METAL WEIGHTS, THICKNESSES, AND GAGES					
Sheet Metal Items	Copper ounces per square foot	Aluminum, inch	Stainless Steel, Aluminum Zinc Coated Steel, inch		
Spandrel beam	10	-	.010		
Bond barrier	16	-	.015		
Stepped	16	.032	.015		
Valley	16	.032	.015		
Roof drain	16 (b)				
Pipe vent sleave (c)					
Coping	16	-	-		
Gravel stops and fascia:					
Extrusions	-	.075	-		
Sheets, corrugated	16	.032	.015		
Sheets, smooth	20	.050	.018		
Edge strip	24	.050	.025		
Gutters:					
Gutter section	16	.032	.015		
Continuous cleat	16	.032	.015		
Hangers, dimensions	1 inch by 1/8 inch (a)	1 inch by .(inch	1 inch by .0 inch		
Joint Cover plates (See Table II)	16	.032	.015		
Reglets	10	-	.010		
Splash pans	16	.040	.018		
(a) Brass.					
(b) May be lead weighing 4 pounds per square foot.					

TABLE I. SHEET METAL WEIGHTS, THICKNESSES, AND GAGES					
Sheet Metal Items	Copper ounces per square foot	Aluminum, inch	Stainless Steel, Aluminum Zinc Coated Steel, inch		
(c) 2.5 pound minimum lead sleeve with 4 inch flange. Where lead sleeve is impractical, refer to paragraph SINGLE PIPE VENTS for optional material.					

TABLE II. SHEET METAL JOINTS			
TYPE OF JOINT			
Item Designation	Copper, Aluminum Zinc-Coated Steel and Stainless Steel	Aluminum	Remarks
Joint cap for building expansion seam, cleated joint at roof	1.25 inch single lock, standing seam, cleated	1.25 inch single lock, standing	--
Flashings			
Base	One inch 3 inch lap for expansion joint	One inch flat locked, soldered; sealed; 3 inch lap for expansion joint	Aluminum manufacturer's recommended hard setting sealant for locked aluminum joints. Fill each metal expansion joint with a joint sealing compound.
Cap-in reglet	3 inch lap	3 inch lap	Seal groove with joint sealing compound.

TABLE II. SHEET METAL JOINTS			
TYPE OF JOINT			
Item Designation	Copper, Aluminum Zinc-Coated Steel and Stainless Steel	Aluminum	Remarks
Reglets	Butt joint	--	Seal reglet groove with joint sealing compound.
Eave	One inch flat locked, cleated. One inch loose locked, sealed expansion joint, cleated.	One inch flat locked, locked, cleated one inch loose locked, sealed expansion joints, cleated	Same as base flashing.
Stepped	3 inch lap	3 inch lap	--
Valley	6 inch lap cleated	6 inch lap cleated	--
Edge strip	Butt	Butt	--
Gravel stops:			
Extrusions	--	Butt with 1/2 inch space	Use sheet flashing beneath and a cover plate
Sheet, smooth	Butt with 1/4 inch space	Butt with 1/4 inch space	Use sheet flashing backup plate.
Sheet, corrugated	Butt with 1/4 inch space	Butt with 1/4 inch space	Use sheet flashing beneath and a cover plate or a combination unit
Gutters	1.5 inch lap, riveted and soldered	One inch flat locked riveted and sealed	Aluminum producers recommended hard setting sealant for locked aluminum joints.
(a) Provide a 3 inch lap elastomeric flashing with manufacturer's recommended sealant.			

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 61 15.00 20

CL ALUMINUM STANDING SEAM ROOFING
08 March 2021

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA ADM1	(2020) Aluminum Design Manual
AA ADM-105	(2005; Errata 2005) Aluminum Design Manual
AA ASM-35	(2000) Specifications for Aluminum Sheet Metal Work in Building Construction, Construction Manual Series Section 5

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 501.1	(2017) Standard Test Method for Water Penetration of Windows, Curtain Walls and Doors Using Dynamic Pressure

AMERICAN FOREST AND PAPER ASSOCIATION (AF&PA)

AF&PA T101	(2005) National Design Specification (NDS) for Wood Construction

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI SG03-3	(2002; Suppl 2001-2004; R 2008) Cold-Formed Steel Design Manual Set

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7	(2017) Minimum Design Loads for Buildings and Other Structures

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or

	Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A1008/A1008M	(2025) Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM A1011/A1011M	(2023) Standard Specification for Steel Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM D1654	(2008; R 2016; E 2017) Standard Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D1970/D1970M	(2019) Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection
ASTM D2247	(2025) Standard Practice for Testing Water Resistance of Coatings in 100 Percent Relative Humidity
ASTM D2565	(1999; R 2008) Xenon Arc Exposure of Plastics Intended for Outdoor Applications
ASTM D3767	(2020) Standard Practice for Rubber—Measurement of Dimensions
ASTM D4214	(2007; R 2015) Standard Test Method for Evaluating the Degree of Chalking of Exterior Paint Films
ASTM D412	(2016; R 2021) Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
ASTM D522	(1993a; R 2008) Mandrel Bend Test of Attached Organic Coatings
ASTM D523	(2014; R 2018) Standard Test Method for Specular Gloss
ASTM D714	(2002; R 2009) Evaluating Degree of Blistering of Paints

ASTM D903	(1998; R 2017) Standard Test Method for Peel or Stripping Strength of Adhesive Bonds
ASTM D968	(2005; R 2010) Abrasion Resistance of Organic Coatings by Falling Abrasive
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E108	(2020a) Standard Test Methods for Fire Tests of Roof Coverings
ASTM E1592	(2017) Standard Test Method for Structural Performance of Sheet Metal Roof and Siding Systems by Uniform Static Air Pressure Difference
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E1646	(1995; R 2018) Standard Test Method for Water Penetration of Exterior Metal Roof Panel Systems by Uniform Air Pressure Difference
ASTM E1680	(2016) Standard Test Method for Rate of Air Leakage Through Exterior Metal Roof Panel Systems
ASTM E2140	(2001; R 2023) Standard Test Method for Water Penetration of Metal Roof Panel Systems by Static Water Pressure Head
ASTM G152	(2006) Operating Open Flame Carbon Arc Light Apparatus for Exposure of Nonmetallic Materials
ASTM G153	(2004; R 2010) Operating Enclosed Carbon Arc Light Apparatus for Exposure of Nonmetallic Materials

FM GLOBAL (FM)

FM 4471	(2010) Class I Panel Roofs

NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)

NRCA Details	(2003) NRCA Roof Perimeter Flashing Systems Construction Details for Class 1 Roof Construction

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1793	(2012) Architectural Sheet Metal Manual, 7th Edition

SMACNA 1013	(2012) Architectural Sheet Metal Manual, 7th Edition

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-301-01	(2023; with Change 6, 2026) Structural Engineering
UFC 3-110-03	(2006) Roofing

UL SOLUTIONS (UL)

UL 580	(2006; Reprint Apr 2024) UL Standard for Safety Tests for Uplift Resistance of Roof Assemblies
UL 790	(2022) UL Standard for Safety Test Methods for Fire Tests of Roof Coverings

1.2 DEFINITIONS

1.2.1 Roofing System

The roofing system is defined as the assembly of roofing components, including roofing panels, flashing, fasteners, and accessories which, when assembled properly result in a watertight installation.

1.3 SYSTEM DESCRIPTION

1.3.1 Design Requirements

a. Provide continuous length panels with no joints or seams, except where indicated. Individual panels shall be removable for replacement of damaged material.

b. There shall be no exposed or penetrating fasteners except where shown on the approved shop drawings. Fasteners are materials compatible with aluminum as recommended by the manufacturer. Length and diameter of screws shall be sufficient to meet the design loads with a suitable factor of safety for the material to which the roofing components are attached. Calculate fastener capacity in accordance with AISI SG03-3, AA ADM-105 or AF&PA T101 as applicable.

c. Roof panel standing seam shall include a capillary break and be mechanically locked closed by the manufacturer's locking tool. The seam shall include a continuous sealant when required by the manufacturer to withstand the rainfall and wind specified in paragraph entitled "Manufacturer's Requirements."

d. Roof panel anchor clips shall be concealed and designed to allow for thermal movement of the panels, except where specific fixed points are indicated.

e. The system shall resist the positive and negative loads specified herein in accordance with "Sheet Building Sheathing Design Guide" of the AA ADM-105.

f. Panels shall support walking loads without excessive distortion or

telegraphing of the structural supports. Panels shall support a 250 pound load concentrated on a four square inch area at the center of the panel without buckling or permanent distortion.

1.3.2 Performance Requirements

1.3.2.1 Static pressure air infiltration (Roof panels)

Pressure Leakage Rate per ASTM E1680:
a. 1.57 PSF 0.0012 cfm/ sq. ft.
b. 6.24 PSF 0.0001 cfm/ sq. ft.
c. 20.0 PSF 0.0011 cfm/ sq. ft.

1.3.2.2 Static pressure water infiltration (Roof panels)

Text Pressure Result per ASTM E1646:
a. 5 Gal. / Hr. per S.F. and Static NO LEAKAGE
b. Pressure of 20.0 PSF for 15 Minutes NO LEAKAGE

1.3.2.3 Tests

Capacities for gauge, span or loading other than those tested may be determined by interpolation of test results withing the range or test data. Extrapolations for conditions outside test range are not acceptable.

1.3.2.4 Water penetration (dynamic pressure):

No water penetration, other than condensation, when exposed to dynamic rain and 70 mph wind velocities for not less than five minutes duration, when tested in accord with principles of AAMA 501.1.

1.3.2.5 Wind and wind driven rain resistance

No water penetration, other than condensation, when exposed to dynamic rain and 70 mph wind velocities for not less than five minutes duration, when tested in accord with principles of AAMA 501.1.

1.3.2.6 Roof pressures

The installed roof system assembly shall show that it can resist the calculated roof pressure in accordance with the test results of TAS 125.

1.3.2.7 Water penetration in low slope application

No water penetration or panel movement when subject to 6" head of water for 6 hours when tested in accordance with the ASTM E2140 and when subject to 6" head of water for 7 days when tested in accordance with the TAS 114 appendix

1.3.2.8 Hydrostatic Head Resistancee

No water penetration when tested according to ASTM E2140. Submit Leakage test report with submittal data.

1.3.2.9 Wind Uplift Resistance

Provide metal roof panel system that conform to the requirements of ASTM E1592 and UL 580. Uplift force due to wind action governs the design for panels. Submit wind uplift test report prior to commencing installation. Submit licensed engineer's wind uplift calculations and substantiating data to validate delegated design installation details. Base wind uplift measurements on a design wind speed of 144 mph in accordance with ASCE 7 and/or other applicable building code requirements. Metal roof panels and component materials must also comply with the requirements in FM 4471 as part of a panel roofing system as listed in Factory Mutual Guide (FMG) "Approval Guide" for class 1 or noncombustible construction, as applicable. Identify all materials with FMG Markings.

Marine Corps Base Camp Lejeune must resist a 144 mile per hour, ultimate design wind speed, 54 PSF, Risk Category II, Surface Roughness Category C, Exposure Category C lateral load. Comply with UFC 3-301-01 and ASCE 7 as applicable for building system designs and components.

Design for wind loads in accordance with ASCE 7 and UFC 3-110-03. Comply with the pressurization standards of UL 580, Class 90. Comply with the pressurization standards of FM 4471, Class 1-120 for roof slopes with a 1.75:12 pitch or more. Divide metal roof panel systems supported by either solid decking or purlins into field, edge and corner pressure zones. Stipulate requirements for additional structural members and fasteners. Evaluate pressure zones in accordance with the load sequence stipulated by ASTM E1592. Resist the design pressures indicated, and determine panel bending and clip to panel strength. Interpolate capacities for gauge, span and loading. Account for prying forces from eccentric clip loading when computing uplift loads on fasteners. Calculate fastener holding strength based on substrate thickness or length of embedment. Use safety factors appropriate for the material properties involved. The construction assembly must match the pull out resistance determined by ASTM E1592, but may be attached to either solid decking or purlin substrates as permitted by UFC 3-110-03.

Specified panel gauges are minimums. Provide greater panel thicknesses as dictated by a delegated design that accounts for the available purlin spacing using recommended cleat, bearing plate and fastener pattern combinations. Alternatively, provide additional structural members to reduce panel spans and accommodate the specified gauge using recommended cleat, bearing plate and fastener pattern combinations to resist specified loads.

1.3.2.10 Standing Seam Water - Stop test:

Comply with ASTM E1680, ASTM E1646, AAMA 501.1, and ASTM E2140.

1.3.2.11 Fire Test

When required comply with ASTM E108 or UL 790.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Roofing panels; G

Gutters; G

Downspouts; G

Submit drawings as necessary to supplement the instructions and diagrams. Drawings shall include design and erection drawings containing an isometric view of the roof showing the design uplift pressures and dimensions of edge, ridge and corner zones. Show typical and special conditions including flashings, accessory installation, materials and thicknesses, all dimensions, anchoring methods, sealant locations, sealant tape locations, fastener layout, sizes, spacing, provisions for thermal movement, terminations, penetrations, and attachments. Details of installation shall be in accordance with the manufacturer's Standard Instructions and details or the SMACNA 1013. The manufacturer's technical engineering department shall approve the drawings before they are submitted.

SD-03 Product Data

Roofing panels; G

Attachment clips; G

Closures

Accessories

Fasteners

Sample warranty certificate; G

Submit for all materials to be provided. Submit data sufficient to indicate conformance to specified requirements.

SD-04 Samples

Roofing panels

Submit a 12 inch long section of typical panel in color selected.

When colors are not indicated, submit samples of not less than six different manufacturer's standard colors for selection.

INTERMEDIATE SUPPORT

Accessories

Submit each type of accessory item used in the project including, but not limited to: each type of anchor clip, closures, fasteners and leg clamps.

SD-05 Design Data

Load calculations; G

SD-06 Test Reports; G

Panel Finish (Color); G

Leakage Test Report

Wind Uplift Test Report

Finish

Submit reports of the tests required by this section.

Manufacturer's field inspection; G

Submit manufacturer's technical representative's inspection reports as required in paragraph entitled "Manufacturer's Field Inspection."

SD-07 Certificates

Technical representative

Qualification of Installer

Submit documentation proving the installer is factory-trained, has the specified experience and is authorized by the manufacturer to install the products specified.

Coil stock compatibility

Provide certification of coil compatibility with roll forming machinery to be used for forming panels without warping, waviness, and rippling not part of panel profile; to be done without damage, abrasion or marking of finish coating.

Qualification of Manufacturer

SD-08 Manufacturer's Instructions

Sealant

Submit manufacturer's sealant requirements for making the standing seam watertight when subjected to 5 inches of rainfall per hour simultaneous with 124 mph winds.

Installation manual

Submit manufacturer's printed installation manual/instructions and standard details.

SD-11 Closeout Submittals

Information card

For each roofing installation, submit a typewritten card or photoengraved aluminum card containing the information listed on Form 1 located at the end of this section.

1.5 LOAD CALCULATIONS

Submit load calculations for the following by a structural engineer registered as a Professional Engineer in any jurisdiction verifying that the system supplied meets the design loads indicated. Coordinate calculations with manufacturer's test results.

a. Wind load uplift design pressure at roof locations specified in paragraph entitled "Wind Uplift Resistance."

b. Clip spacing and allowable load per clip calculations.

c. The fastening of clips to structure or intermediate support spacing.

d. Intermediate support spacing and fastening to structure when required.

e. Allowable panel span at anchorage spacing indicated.

f. Safety factor used in determining loading.

1.6 QUALITY ASSURANCE

1.6.1 Preroofing Conference

After submittals are received and approved but before roofing and insulation work, including associated work, is preformed, the Contractor shall hold a preroofing conference to review the following:

a. The drawings and specifications

b. Procedure for on site inspection and acceptance of the roofing substrate and pertinent structural details relating to the roofing system

c. Contractor's plan for coordination of the work of the various trades involved in providing the roofing system and other components secured to the roofing

d. Safety requirements.

The preroofing conference shall be attended by the Contractor and personnel directly responsible for the roofing and insulation installation, mechanical and electrical work, and the roofing manufacturer's technical representative. Conflicts among those attending the preroofing conference shall be resolved and confirmed in writing before roofing work, including associated work, is begun. Prepare written minutes of the preroofing conference and submit to the Contracting Officer.

1.6.2 Manufacturer's Technical Representative

The representative shall have authorization from manufacturer to approve field changes and be thoroughly familiar with the products and with installations in the geographical area where construction will take place. The manufacturer's representative shall be an employee of the manufacturer with at least 5 years experience in installing the roof system. The representative shall be available to perform field inspections and attend meetings as required herein, and as requested by the Contracting Officer.

When the project is in progress, the roofing system manufacturer shall provide the following:

1.6.2.1 Work Progress

Keep the Owner informed as to the progress and quality of the work as observed. Photographic Inspection Report to be turned in on a weekly basis to the Owner.

1.6.2.2 Inspections

Provide job site inspections a minimum of THREE days a week.

1.6.2.3 Reports

Report to the Owner in writing any failure or refusal of the Contractor to correct unacceptable practices called to the Contractor's attention.

1.6.2.4 Confirmation of work done

Confirm after completion that manufacturer has observed no application procedures in conflict with the specifications other than those that may have been previously reported and corrected.

1.6.2.5 Annual Inspection

The roofing manufacturer must inspect the roof on an annual basis and submit an annual inspection report to Public Works at MC Base Camp Lejeune and MCAS New River.

1.6.2.6 Manufacturer Inspector

The manufacturer's inspector must be a full time employee of the manufacturer with a minimum 5 years experience inspecting the specified roof system. A signed copy to attest to the full time employ and tenure of the inspector by the president of the manufacturing company will accompany submittals.

1.6.3 Qualification of Installer

The roofing system installer shall be factory-trained, approved by the metal roofing system manufacturer to install the system, and shall have a minimum of five (5) years experience as an approved applicator with that manufacturer. The applicator shall have applied five installations of similar size and scope to this project within the previous 3 years.

1.6.4 Single Source

Provide roofing panels, clips, closures and other accessories from a single manufacturer. Provide the most recent design of the manufacturer to operate as a complete system for the intended use.

1.6.5 Qualification ofManufacturer

The SSMRS shall be the product of a metal roofing industry recognized SSMRS manufacturer who has been in the practice of manufacturing SSMRS for a period of not less than 5 years and who has been involved in at least 5 projects similar in size and complexity to this project.

1.6.6 Qualifications for Welding Work

Welding procedures must conform to AWS D1.1/D1.1M for steel or AWS D1.2/D1.2M for aluminum. Operators are permitted to make only those types of weldments for which each is specifically qualified.

1.6.7 Field Verification

Prior to the preparation of drawings and fabrication, verify location of roof framing, roof openings and penetrations, and any other special conditions. Indicate all special conditions and measurements on final shop drawings.

1.7 DELIVERY, STORAGE, AND HANDLING

Deliver, store, and handle preformed panels, bulk roofing products and other manufactured items in a manner to prevent damage or deformation.

1.7.1 Delivery

Provide adequate packaging to protect materials during shipment. Do not uncrate materials until ready for use except for inspection. Immediately upon arrival of materials at jobsite, inspect materials for damage, dampness, and staining. Replace damaged or permanently stained materials that cannot be restored to like-new condition with new material. If materials are wet, remove moisture, restack and protect panels until used.

1.7.2 Handling

Handle material carefully to avoid damage to surfaces, edges and ends.

1.7.3 Storage

Stack materials stored on the site on platforms or pallets and cover with tarpaulins or other suitable weathertight coverings which prevent water trapping or condensation. Store panels so that water which might have accumulated during transit or storage will drain off. Do not store the panels in contact with materials that might cause staining, such as mud, lime, cement, fresh concrete or chemicals. Protect stored panels from wind damage.

1.8 Warranty

Furnish manufacturer's no dollar limit materials and workmanship warranty for the roofing system. The warranty period shall be not less than 30 years from the date of Government acceptance of the work. The warranty shall be issued directly to the Government. The warranty shall provide that if within the warranty period the metal roofing system becomes non-watertight or shows evidence of corrosion, perforation, peeling paint, rupture or excess weathering due to deterioration of the roofing system resulting from defective materials or workmanship the repair or replacement of the defective materials and correction of the defective workmanship shall be the responsibility of the roofing system manufacturer. Repairs that become necessary because of defective materials and workmanship while roofing is under warranty shall be performed within 7 days after notification, unless additional time is approved by the Contracting Officer. Failure to perform repairs within the specified period of time will constitute grounds for having the repairs performed by others and the cost billed to the manufacturer and contractor

as described herewith. Contractor shall also provide a 2 year contractor installation warranty during which time the materials are covered by the manufacturer per the warranty period described above. Provide coverage for damage to the roofing system caused by sustained winds having a velocity up to and including 144 mph.

PART 2 PRODUCTS

The supporting substrate for the Mechanical Building is conventional metal decking.

1. Air and Moisture Barrier Underlayment
2. Polyisocyanurate Insulation, three layers, minimum thickness of 5 inches, mechanically fastened, taped seams
4. Ice Guard Underlayment, self adhering
5. Formed Sheet Metal Roofing, 2.375 inch standing T seam

The supporting substrate for the BEQ Roof Replacement is conventional plywood decking.

1. Ice Guard Underlayment, self adhering
2. Formed Sheet Metal Roofing, 2.375 inch standing T seam

2.1 ROOFING PANELS

2.1.1 Material

3004 aluminum, ASTM B209 and AA ADM1.
Products must be American made and manufactured in a plant owned and operated by the roofing manufacturer listed in the submittals. Product re-labeling will not be acceptable.

2.1.1.1 Thickness

0.040 inch minimum.

2.1.1.2 Finish

Exposed Coil-Coated Finish: 2-Coat Fluoropolymer. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat. Manufacturers' approved applicator to prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

Coating system shall provide nominal 1.0 mil (0.025 mm) dry film thickness, consisting of primer and color coat.

Concealed Finish: Apply pretreatment and manufacturer's standard white or light-colored polyester backer finish, consisting of prime coat and wash coat with a minimum total dry film thickness of 0.5 mil (0.013 mm).

2.1.1.3 Texture

Smooth with raised intermediate ribs for added stiffness.

2.1.1.4 Color

Standing seam roofing is Slate Gray, AMS 595A 36173 as indicated in the Marine Corps Base Camp Lejeune, Base Exterior Architectural Plan, Camp Gieger.

2.1.1.5 Configuration

a. Provide panels of continuous lengths from ridge to eaves or from top to eaves on shed roof designs. Panels from coil stock shall be formed without warping, waviness or ripples not a part of the panel profile, and shall be free of damage to the finish coating system.

b. Provide panels with UNLIMITED thermal movement.

c. Profile: 2 3/8" high seam at 16" o.c.; mechanically seamed "T" seam; continuous length, no splicing; Concealed 16 GA one piece stainless steel clip not to come in contact with seam sealant.

d. Panel/Cap configuration must have a total of four (4) layers of aluminum surrounding anchor clip for prevention of water infiltration and increased system strength designed to limit potential for panel blow-off.

e. Profile of panel shall have mesas every two (2) inches on center continuous throughout the panel which are a minimum of one and one half (1-1/2) inches wide.

f. Seam must be two and three-eighths (2 3/8) inches minimum height for added upwared pressures and aesthetic appeal. Seam shall have continuous anchor reveals to allow anchor clips to resist positive and negative loading and allow unlimited expansion and contraction of panels due to thermal changes. Integral (not mechanically sealed) seams are unacceptable.

g. Seam cap: Snap on cap shall be a minimum of 1" wide "T" shaped of continuous length up to forty five (45) feet according to job conditions and field seamed by means of manufacturer's standard seaming machine.

h. Cap shall be designed to receive two (2) beads of continuous gasketing sealant, which will be applied independent of of anchor clip, to allow unlimited thermal movement of panel without serious damage to cap sealant.

i. Stiffening ribs : Located in flat of panel to minimize oil canning and telegraphing of structural members.

j. Replaceability: Panels shall be of a symmetical design with snap on, mechanically seamed cap configuration such that individual panels may be removable for replacement without removing adjacent panels and uncrimping the existing seam (Panels will be removed by replacing the batten seam cap only to maintain the structural integrity of the panel and seam. Uncrimping and recrimping a mechanical seam is unacceptable.

k. Panel ends shall be panned at ridge, headwall, and hip conditions, or where applicable.

l. Panel length: Full length without joints, including bends.

2.2 INTERMEDIATE SUPPORTS

Fabricate panel subgirts, subpurlins, T-bars, Z-bars and tracks from galvanized steel conforming to ASTM A653/A653M, G90, Grade D (16 gage and heavier), Grade A (18 gage and lighter); or steel conforming to ASTM A36/A36M, ASTM A1011/A1011M , or ASTM A1008/A1008M prime painted with zinc-rich primer. Size, shape, thickness and capacity as required to meet the load, insulation thickness and deflection criteria specified.

2.3 ATTACHMENT CLIPS

Provide one-piece clips of compatible materials to aluminum roof panels. Size, shape, thickness and capacity must meet the thickness and design load criteria specified. Two piece clips are not acceptable.

2.4 ACCESSORIES

Sheet metal flashings, trim, moldings, closure strips, caps, preformed crickets, equipment curbs, gutters,downspouts, and other similar sheet metal accessories provided in conjunction with preformed metal panels shall be of the same material and finish as panels, except that such items which will be concealed after installation may be provided without the finish if they are aluminum or stainless steel. Provide ridge and rib closures, as specified. Metal shall be of thickness not less than that of panels. Molded closure strips shall be closed-cell synthetic rubber, neoprene, or polyvinyl chloride premolded to match configurations of preformed metal panels. Thermal spacer blocks and other thermal barriers at concealed fasteners shall be as recommended by the roofing panel manufacturer.

Reference Section 07 60 00, FLASHING AND SHEET METAL for additional information pertaining to gutter and downspout installations. Gauges stipulated therein are minimums.

Metal rooftop appurtenances are the same material and color as the substrates of attachment. Provide roof penetration flashings that are compatible with roof panel profiles and seam configurations encountered. Provide bases, flanges and accommodations to conform to roof slopes encountered and result in plumb, vertical penetrations.

2.4.1 Closures

2.4.1.1 Ridge Closure

Metal-clad foam or metal closure with foam secondary closure matching panel configuration for installation on surface of roof panel between panel ribs at ridge and headwall roof panel flashing conditions and terminations. Foam material shall not absorb water.

2.4.1.2 Rib Closure

Aluminum, closed-cell or solid-cell synthetic rubber, neoprene or polyvinyl chloride pre-molded to match configuration of rib opening. Material for closures shall not absorb water.

2.4.2 Fasteners

Series 300 stainless steel with composite metal and neoprene composition

washers. Fasteners for attachment to structural supports and fasteners for attachment of panels shall be as approved and in accordance with manufacturer's recommendation. Unless specified otherwise herein, fasteners shall be either self-tapping screws, bolts and nuts, or self-locking bolts. Design fastening system to withstand design loads indicated. Fasteners shall not be over-torqued and shall develop full capacity of attachment clips.

Finish exposed fasteners to match substrate colors encountered.

2.4.2.1 Screws

Concealed fasteners are corrosion resistant steel screws, #10 minimum diameter x length appropriate for substrate, hex washer head or pancake head. Use self-drilling, self-tapping fasteners for metal substrates and A-point for plywood substrates.

Exposed fasteners are 300 series stainless steel screws with neoprene sealing washer and 1/8-inch diameter stainless steel rivets. Cadmium or zinc coatings are not acceptable.

2.4.2.2 Bolts

Provide not less than 1/4 inch diameter, shouldered or plain shank as required, with proper nuts.

2.4.2.3 Automatic End-Welded Studs

Provide shouldered type with a shank diameter of not less than 3/16 inch and cap or nut for holding covering against the shoulder.

2.4.2.4 Explosive Driven Fasteners

Provide fasteners to be driven with explosive actuated tools and with a shank diameter of not less than 1/2 inch for fastening to steel and not less than one inch for fastening to concrete.

2.4.2.5 Rivets

Blind rivets shall be aluminum with 3/16 inch nominal diameter shank or stainless steel with 1/8 inch nominal diameter shank. Rivets shall be threaded stem type if used for other than fastening trim. Rivets with hollow stems shall have closed ends.

2.4.3 Sealant

Elastomeric type containing no oil or asphalt. Exposed sealant shall cure to a rubberlike consistency. Concealed sealant shall be the non-hardening type. Seam sealant shall be factory-applied, non-skinning, non-drying. Sealants shall conform to the roofing manufacturer's recommendations.

2.4.4 Sealant Tape

Polyvinyl chloride closed cell foam tape composed of 99 percent solids in a base of butyl polyisobutylene rubber with the following properties and characteristics:

a. Webbing and Elongation: 100 percent minimum at 77 degrees F

b. Adhesion: Excellent to surfaces used

c. U-V light exposure: No effect

d. Ozone: No effect

e. Weathering: 1000 hours in QUV Test Apparatus - Excellent, no cracking, bleeding, or significant changes.

f. Moisture Transmission: 0.05 to 0.15 grams per 100 square inches in 24 hours.

g. Service Temperature Tests: Bending over 1/2 inch mandrel at minus 60 degrees F with no cracking. Expose sealed typical metal lap joint to plus 350 degrees F for 24 hours with no significant loss of original properties.

h. Reaction to Metals: Non-corrosive to metals

2.4.5 Ice Guard Underlayment

Ice guard underlayment for metal roofing is a cold applied, self adhering membrane composed of a high density, cross laminated polyethylene film coated on one side with a layer of rubberized asphalt adhesive. An embossed, slip resistant surface is provided on the polyethylene. Roll goods are interwound with a disposable, silicone coated release sheets. Furnish primers as recommended for the substrates encountered.

Ice Guard Underlayment	Performance	Standard
Tensile strength	245 to 255 PSI	ASTM D412
Elongation	240 to 260%	ASTM D412
Weight	0.3 PSF	
Plywood adhesion, per inch of width	3.0 pounds	ASTM D903
Flexibility at -20 F	Unaffected	
ASTM D1970/D1970M		
Thickness	38 to 42 mils	ASTM D3767
Permeance	Less than 0.05 perms	
ASTM E96/E96M		

2.4.6 Vent Stack Flashing

Prefabricated vent stack flashings have metal flanges with stacks sized for the penetrations encountered. Boots are an ozone and UV resistant EPDM secured with stainless steel top clamps, gaskets and sealants.

2.4.7 Roof Hatches

Roof hatches are for ladder access. Cover and curb are 0.091 inch, 11 gauge aluminum with 3 inch beaded flanges and formed reinforcing members capable of supporting a 40 PSF live load. Insulation is 1 inch glass fiber sheathed by an 0.040 inch, 18 gauge interior aluminum liner. The curb is 1 foot, 0 inches in height and formed with 3.5 inch flanges with pre punched holes. Integral metal cap flashings of matching gauge and material receive membranes, and corners are fully welded. Insulation on curb exteriors is 1 inch rigid fiberboard. The hatch has heavy pintle hinges, positive snap latch with turn handles, interior and exterior padlock hasps and mechanically retained thermoplastic rubber gaskets. Compression spring operators enclosed in telescopic tubes provide smooth,

easy and controlled door operation throughout the entire movement arc. Covers are equipped with automatic hold open arms and vinyl grip handles. Hardware is Type 316 stainless steel, zinc plated and chromate sealed.

Size roof hatches with 2 feet, 4 inches of clearance after acommodating access ladders and roof pitches encountered. Furnish roof hatches that maintain the ratings of roof assemblies encountered.

2.5 LABORATORY TESTS FOR PANEL FINISH

Previously manufactured panels of the same type and finish as proposed for the project shall have been tested by an approved testing laboratory to ensure conformance to specifications. The term "appearance of base metal" refers to the aluminum base metal. Panels shall meet the following test requirements.

2.5.1 Salt Spray Test

Panels shall withstand a salt spray test for a minimum of 1000 hours in accordance with ASTM B117, including the scribe requirement in the test. Immediately upon removal of the panel from the test, coating shall receive a rating of 10, no blistering, as determined by ASTM D714; and a rating of 7, 1/16 inch failure at scribe, as determined by ASTM D1654, Rating Schedule No. 1.

2.5.2 Formability Test

For formability test, when subjected to a 180 degree bend over a 1/8 inch diameter mandrel in accordance with ASTM D522, exterior coating film shall show only microchecking of the exterior film and there shall be no loss of adhesion.

2.5.3 Accelerated Weathering Test

Panels shall withstand an accelerated weathering test for a minimum of 2000 hours in accordance with ASTM G152, ASTM G153 or ASTM D2565 without cracking, peeling, blistering, loss of adhesion of the protective coating, or corrosion of the base metal. Protective coating that can be readily removed from the base metal with a penknife blade or similar instrument shall be considered to indicate loss of adhesion.

2.5.4 Chalking Resistance

After the 2000-hour weatherometer test, exterior coating shall not chalk greater than No. 8 rating when measured in accordance with ASTM D4214 test procedures.

2.5.5 Abrasion Resistance Test for Color Coating

When subjected to the falling sand test in accordance with ASTM D968, coating system shall withstand a minimum of 100 liters of sand per mil of coating thickness before affecting appearance of base metal.

2.5.6 Humidity Test

When subjected to a humidity cabinet test in accordance with ASTM D2247 for 1000 hours, a scored panel shall show no signs of blistering, cracking, creepage, or corrosion.

2.5.7 Fire Hazard

The finish on factory-fabricated panels shall have a flame spread rating of not more than 25 when tested in accordance with ASTM E84.

2.5.8 Gloss

The gloss of the finish shall be 30 plus or minus 5 at an angle of 60 degrees, when measured in accordance with ASTM D523.

2.5.9 Glare Resistance

Surfaces of panels that will be exposed to the exterior shall have a specular reflectance of not more than 10 when measured in accordance with ASTM D523 at an angle of 85 degrees. Requirements specified under "Formability Test" will be waived if necessary to conform to this requirement.

PART 3 EXECUTION

3.1 EXAMINATION

Examine surfaces to receive standing seam metal roofing and flashing. Provide plumb and true surfaces, clean, even, smooth and as dry as possible. Ensure that surfaces are free from defects and projections which might affect the installation. Report unsuitable conditions to Contracting Officer.

3.2 PROTECTION OF DISSIMILAR METALS

Where an aluminum component is in contact with, fastened to, or contacted by drainage from dissimilar metals other than stainless steel, give such dissimilar metals one of the following treatments:

a. A heavy brush coat of primer followed by two coats of aluminum metal and masonry paint.

b. A heavy coat of alkali-resistant bituminous paint.

c. Separate contact surfaces with non-absorptive tape or gasket.

3.2.1 Contact with Masonry

Where aluminum is in contact with masonry, concrete, or plaster, apply a heavy coat of alkali-resistant bituminous paint.

3.3 INSTALLATION

Install in accordance with approved manufacturer's erection instructions shop drawings, and diagrams, except as specified otherwise herein. Provide panels in full and firm contact with clips. Obtain approval prior to installation on prefinished panels cut in the field, and factory applied coverings or coatings that were repaired after being abraded or damaged during handling or installation. Make repairs with material of same color as weather coating. Completely seal openings through panels. Correct defects or errors in materials in an approved manner. Replace materials which cannot be corrected in an approved manner with new materials. Provide molded closure strips where indicated and where necessary for weathertight construction. Use shims as required to ensure

clip line is true. Use a spacing gage at each row of panels to ensure that panel width is not stretched or shortened. Provide one layer of synthetic underlayment with side laps down slope. Overlap side end laps 3 inches.

3.3.1 Roof Panels

Apply roofing panels with standing seams parallel to slope of roof. Provide roofing panels in full lengths from ridge to eaves (top to eaves on shed roofs), with no transverse joints except at the junction of ventilators, curbs, skylights, chimneys, and similar openings. Form interlocking rib type panel seams in the field with an automatic mechanical seamer approved by the manufacturer. Attach panels to structure with concealed clips which are incorporated into the panel seams. Clip attachment shall allow roof to move freely and independently of the structure, except at fixed points as indicated.

Provide Manufacturer's methods for lifting of large panels to prevent panel deformation during its installation. Use manufacturer's spreader bar where applicable to prevent kinking and damage to panels. Field formed panels shall be done with the same factory machinery and methods. Field form machinery must be calibrated daily. For field forming of panels, the manufacturer must use the same equipment used in the factory to form the panels onsite. Manufacturer must engage a factory authorized service representative to form the panels on site and comply with the following:

a. Roll form operator is to be factory trained and authorized to provide job site operations of the panel forming process with quality control standards.

b. The panel profile shall be checked and verified to be within acceptable forming tolerances as called for under the factory defined panel quality control fabrication standards (Quality control sheets). These standards define the upper and lower acceptable forming tolerances. The actual forming dimensions shall be on or within these acceptable standards.

c. Dimensional checks shall be conducted at the beginning of the operation and at the beginning of each new slit coil. This process ensures proper panel profile is being produced with each new slit coil and consistency throughout the project.

d. These panel dimensions shall be recorded on site in the Daily Report and returned to the factory for quality control review.

e. Panels shall be formed on heavy duty factory type roll former with no fewer than 16 forming stations to improve quality and minimize oil canning.

f. Panels shall be of identical profile and characteristics as factory formed panels and specimens used as the basis of performance tests.

g. Sealant shall be factory applied in a separate factory formed snap on cap. Site/field applied seam sealant is unacceptable. Seam caps may be shipped in 45 feet or less length and lap spliced over full length panels in accordance with manufacturer's system details.

h. Site roll-forming equipment shall be owned and maintained by the panel manufacturer and operated by the panel manufacturer's trained

full-time experienced technician. The installer must provide additional personnel to handle raw materials and finished product as necessary.

3.3.2 Flashings

Provide flashing and related closures and accessories in connection with preformed metal panels as indicated and as necessary to provide a weathertight installation. Install flashing to ensure positive water drainage away from roof penetrations. Flash and seal roof at ridge, eaves and rakes, at projections through roof, and elsewhere as necessary. Accomplish placement of closure strips, flashing, and sealing material in an approved manner that will ensure complete weathertightness. Details of installation which are not indicated shall be in accordance with the NRCA Details, SMACNA 1793, AA ASM-35, panel manufacturer's printed instructions and details of the approved shop drawings. Installation shall allow for expansion and contraction of flashing.

3.3.3 Flashing Fasteners

Fastener spacings shall be in accordance with the panel manufacturer's recommendations and as necessary to withstand the indicated design loads. Install fasteners in roof valleys as recommended by the manufacturer of the panels. Install fasteners in straight lines within a tolerance of 1/2 inch in the length of a bay. Drive exposed penetrating type fasteners normal to the surface and to a uniform depth to seat gasketed washers properly and drive so as not to damage factory applied coating. Exercise extreme care in drilling pilot holes for fastenings to keep drills perpendicular and centered. Do not drill through sealant tapes. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Torque used in applying fasteners shall not exceed that recommended by the manufacturer. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels.

3.3.4 Closure/Closure Strips

Set closure/closure strips in joint sealant material.

3.3.5 Roof Hatches

Provide hatches completely assembled. Provide hardware for interior padlocking. Cover action must be smooth through its entire range of motion with an operating pressure of approximately 30 pounds.

3.4 CLEANING

Clean exposed sheet metal work at completion of installation. Remove metal shavings, filings, nails, bolts, and wires from roofs on completion to prevent discoloration and harm to the panels and flashing. Remove grease and oil films, excess sealants handling marks, contamination from steel wool, fittings and drilling debris and scrub the work clean. Exposed metal surfaces shall be free of dents, creases, waves, scratch marks, and solder or weld marks.

3.5 MANUFACTURER'S FIELD INSPECTION

Manufacturer's technical representative shall visit the site as necessary, but not less than three (3) days a week, during the installation process to assure panels, flashings, and other components are being installed in a

satisfactory manner. Each inspection visit must include a review of the entire installation to date. After each inspection, a report, signed by the manufacturer's technical representative, shall be submitted to the Contracting Officer noting the overall quality of work, deficiencies and any other concerns, and recommended corrective actions in detail. Notify Contracting Officer a minimum of 2 working days prior to site visit by manufacturer's technical representative.

3.6 COMPLETED WORK

Completed work shall be plumb and true without oil canning, dents, ripples, abrasion, rust, staining, or other damage detrimental to the performance or aesthetics of the completed roof assembly.

3.7 INFORMATION CARD

For each roof, provide a typewritten card, laminated in plastic and framed for interior display or a photoengraved 0.032 inch thick aluminum card for exterior display. Card to be 8 1/2 by 11 inches minimum and contain the information listed on Form 1 at end of this section. Install card near point of access to roof, or where indicated. Send a photostatic paper copy to LANTNAVFACENGCOM, Code 1613, 1510 Gilbert Street, Norfolk, VA 23511-2699.

3.8 FORM ONE

FORM 1 - PREFORMED STEEL STANDING SEAM ROOFING SYSTEM COMPONENTS

1. Contract Number:

2. Building Number & Location:

3. NAVFAC Specification Number:

4. Deck/Substrate Type:

5. Slopes of Deck/Roof Structure:

6. Insulation Type & Thickness:

7. Insulation Manufacturer:

8. Vapor Retarder: ( )Yes ( )No

9. Vapor Retarder Type:

10. Preformed Steel Standing Seam Roofing Description:

a. Manufacturer (Name, Address, & Phone No.):
b. Product Name: c. Width: d. Gage:
e. Base Metal: f. Method of Attachment:

11. Repair of Color Coating:

a. Coating Manufacturer (Name, Address & Phone No.):
b. Product Name:
c. Surface Preparation:
d. Recoating Formula:
e. Application Method:

12. Statement of Compliance or Exception:_____
_____
_____

13. Date Roof Completed:

14. Warranty Period: From_____ To_____

15. Roofing Contractor (Name & Address):

16. Prime Contractor (Name & Address):

Contractor's Signature _____ Date:

Inspector's Signature _____ Date:

-- End of Section --

SECTION 07 84 00

FIRESTOPPING
05/10, CHG 1: 08/13

PART 1 GENERAL

1.1 SUMMARY

Furnish and install tested and listed firestopping systems, combination of materials, or devices to form an effective barrier against the spread of flame, smoke and gases, and maintain the integrity of fire resistance rated walls, partitions, floors, and ceiling-floor assemblies, including through-penetrations and construction joints and gaps.

a. Through-penetrations include the annular space around pipes, tubes, conduit, wires, cables and vents.

b. Construction joints include those used to accommodate expansion, contraction, wind, or seismic movement; do not allow firestopping material to interfere with the required movement of the joint.

c. Gaps requiring firestopping include gaps between the curtain wall and the floor slab and between the top of the fire-rated walls and the roof or floor deck above and at the intersection of shaft assemblies and adjoining fire resistance rated assemblies.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E119	(2024) Standard Test Methods for Fire Tests of Building Construction and Materials
ASTM E814	(2024) Standard Test Method for Fire Tests of Penetration Firestop Systems
ASTM E1399/E1399M	(1997; R 2022) Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems
ASTM E1966	(2024) Standard Test Method for Fire-Resistive Joint Systems
ASTM E2174	(2024) Standard Practice for On-Site Inspection of Installed Firestop Systems
ASTM E2307	(2025) Standard Test Method for

	Determining Fire Resistance of Perimeter Fire Barrier Systems Using Intermediate-Scale, Multi-story Test Apparatus
ASTM E2393	(2024) Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers

FM GLOBAL (FM)

FM 4991	(2013) Approval of Firestop Contractors
FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

INTERNATIONAL CODE COUNCIL (ICC)

ICC IBC	(2024) International Building Code

UL SOLUTIONS (UL)

UL 723	(2018; Reprint Jun 2025) UL Standard for Safety Test for Surface Burning Characteristics of Building Materials
UL 1479	(2015; Reprint Apr 2025) UL Standard for Safety Fire Tests of Penetration Firestops
UL 2079	(2015; Reprint Jun 2025) Tests for Fire Resistance of Building Joint Systems
UL Fire Resistance	(2014) Fire Resistance Directory

1.3 SEQUENCING

Coordinate the specified work with other trades. Apply firestopping materials, at penetrations of pipes and ducts, prior to insulating, unless insulation meets requirements specified for firestopping. Apply firestopping materials. at building joints and construction gaps, prior to completion of enclosing walls or assemblies. Locate cast-in-place firestop devices and install in place before concrete placement. Install pipe, conduit or cable bundles through cast-in-place device after concrete placement but before area is concealed or made inaccessible. Firestop material must be inspected and approved prior to final completion and enclosing of any assemblies that may conceal installed firestop.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" . designation; submittals not having a "G" designation are for Contractor Quality Control approval. Shop drawings (SD 02), product data (SD 03), and Certificates (SD-07) must be prepared by the contractor and combined and submitted as one complete package. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Firestopping System; G

SD-03 Product Data

Firestopping Materials; G

SD-06 Test Reports

Inspection Form; G

Inspection Report; G

SD-07 Certificates

Inspector Qualifications; G

Firestopping Materials

Installer Qualifications; G

1.5 QUALITY ASSURANCE

1.5.1 Installer Qualifications

All firestopping systems shall be performed by one experienced firestop contractor. Experienced firestop contractor is defined as following:

a. FM Research approved in accordance with FM 4991,

b. Operating as a UL Certified Firestop Contractor, or

c. A contractor completed the manufacturer accredited firestop specialty contractor program. Certified, licensed or otherwise qualified by the firestopping manufacturer as having the necessary staff, training, and a minimum of 3 years of experience in the installation of manufacturer's products in accordance with specified requirements. Submit documentation of this experience. A manufacturer's willingness to sell its firestopping products to the contractor or to an installer engaged by the Contractor does not in itself confer installer qualifications on the buyer. Individual building system subcontractor, such as Mechanical, Electrical, Plumbing, Gypsum wall, etc., is not permitted to install firestopping systems.
A single complete submittal including Shop Drawings, Product Data, UL details must be provided for all firestopping systems throughout entire project.

1.5.2 Firestopping Inspector Qualifications

The Firestopping Inspector must meet all of the following:

a. Be completely independent of, and divested from, the Firestopping Installer, the manufacturer, and the supplier of any material or item being inspected, and

b. Not be a competitor of the Firestopping Installer, the contractor, the manufacturer, or supplier of any material or item being inspected, and

c. Have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. Provide proof of experience.

In addition, the Firestopping Inspector must meet one of the following:

a. Passed the UL Firestop exam within the last three years, or

b. Passed the FM Firestop exam within the last three years, or

c. Passed the International Firestop Council (IFC) exam within the last three years, or

d. Completed the International Code Council (ICC) Firestopping Credential of Learning Achievement within the last three years, or

e. Be a registered Professional Engineer who has passed the National Council of Examiners for Engineering and Surveying (NCEES) Fire Protection Engineer Exam.

Submit documentation demonstrating experience in construction field inspections of firestopping systems, products, and assemblies for a minimum of 3 relevant projects. Include a description of the project and date of construction completion.

Qualifications must be valid throughout the entirety of the project inspections. Include in the qualifications submittal a signed statement asserting compliance with the requirements stated in this paragraph.

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver materials in the original unopened packages or containers showing name of the manufacturer and the brand name. Store materials off the ground, protected from damage and exposure to elements and temperatures in accordance with manufacturer requirements. Remove damaged or deteriorated materials from the site. Use materials within their indicated shelf life.

PART 2 PRODUCTS

2.1 FIRESTOPPING SYSTEM

Submit detail drawings including manufacturer's descriptive data, typical details conforming to UL Fire Resistance or other details certified by another nationally recognized testing laboratory, installation instructions or UL listing details for a firestopping assembly in lieu of fire-test data or report. For those firestop applications for which no UL tested system is available through a manufacturer, submit a manufacturer's engineering judgment, derived from similar UL system designs or other tests for review and approval prior to installation. Submittal must indicate the firestopping material to be provided for each type of application. When more than a total of 5 penetrations and/or construction joints are to receive firestopping, provide drawings that indicate location, "F" "T" and "L" ratings, and type of application.

Submit a written report with floor plans indicating locations of and types of penetrations and types of firestopping used at each location. Record type by UL list printed numbers or Engineering Judgement (EJ) reference numbers.

2.2 FIRESTOPPING MATERIALS

Provide firestopping materials, supplied from a single domestic

manufacturer, consisting of commercially manufactured, asbestos-free, nontoxic products FM APP GUIDE approved, or UL listed, for use with applicable construction and penetrating items, complying with the following minimum requirements:

2.2.1 Fire Hazard Classification

Provide material that has a flame spread of 25 or less, and a smoke developed rating of 50 or less, when tested in accordance with ASTM E84 or UL 723. Provide an approved firestopping material as listed in UL Fire Resistance or by a nationally recognized testing laboratory.

2.2.2 Toxicity

Materials must have a Health Rating of 0 or 1, as indicated in the product Material Safety Data Sheet. Products must not contain hazardous chemicals or require harmful chemicals to clean material or equipment

2.2.3 Fire Resistance Rating

Firestop systems must be UL Fire Resistance listed or FM APP GUIDE approved with "F" rating at least equal to fire-rating of fire wall or floor in which penetrated openings are to be protected. Where required, firestop systems must also have "T" rating at least equal to the fire-rated floor in which the openings are to be protected.

2.2.3.1 Through-Penetrations

Firestopping materials for through-penetrations, as described in paragraph SUMMARY, must provide "F", "T" and "L" fire resistance ratings in accordance with ASTM E814 or UL 1479. Provide fire resistance ratings as follows:

2.2.3.1.1 Penetrations of Fire Resistance Rated Walls and Partitions

F Rating =Rating of wall or partition being penetrated.

2.2.3.1.2 Penetrations of Fire Resistance Rated Floors, Floor-Ceiling Assemblies and the Ceiling Membrane of Roof-Ceiling Assemblies

F Rating = Rating of the assembly being penetrated. Where the penetrating item is outside of a wall cavity the F rating must be equal to the fire resistance rating of the floor penetrated, and the T rating must be in accordance with the requirements of ICC IBC.

2.2.3.2 Construction Joints and Gaps

Fire resistance ratings of construction joints, as described in paragraph SUMMARY, and gaps such as those between floor slabs and curtain walls must be the same as the construction in which they occur. Provide construction joints and gaps with firestopping materials and systems that have been tested in accordance with ASTM E119, ASTM E1966 or UL 2079 to meet the required fire resistance rating. Provide curtain wall joints with firestopping materials and systems that have been tested in accordance with ASTM E2307 to meet the required fire resistance rating. Systems installed at construction joints must meet the cycling requirements of ASTM E1399/E1399M or UL 2079. Provide a minimum class II movement capability for all joints at the intersection of the top of a fire resistance rated wall and the underside of a fire-rated floor, floor

ceiling, or roof ceiling assembly.

2.2.4 Material Certification

Submit certificates attesting that firestopping material complies with the specified requirements. Provide certification of compliance with UL 1479 for all intumescent firestop materials used in through penetration systems.

All materials must bear a Listing Label. Manufacturer's container labels must include the manufacturer's name, product name, and product description. Other components of the firestop must also be identifiable by labeling or other method by the NAVFAC Designated Fire Protection Engineer (DFPE)

PART 3 EXECUTION

3.1 PREPARATION

The installer must notify the inspector of the arrival of the materials. Prior to installation, the Inspector must verify that all materials received for the installation meet the requirements of the approved Firestopping Materials.

Areas to receive firestopping must be free of dirt, grease, oil, or loose materials which may affect the fitting or fire resistance of the firestopping system. For cast-in-place firestop devices, formwork or metal deck to receive device prior to concrete placement must be sound and capable of supporting device. Prepare surfaces as recommended by the manufacturer.

3.2 INSTALLATION

Completely fill void spaces with firestopping material regardless of geometric configuration, subject to tolerance established by the manufacturer. Firestopping systems for filling floor voids 4 inches or more in any direction must be capable of supporting the same load as the floor is designed to support or be protected by a permanent barrier to prevent loading or traffic in the firestopped area. Install firestopping in accordance with manufacturer's written instructions. Provide tested and listed firestop systems in the following locations, except in floor slabs on grade:

a. Penetrations of duct, conduit, tubing, cable and pipe through floors and through fire-resistance rated walls, partitions, and ceiling-floor assemblies.

b. Penetrations of vertical shafts such as pipe chases, elevator shafts, and utility chutes.

c. Gaps at the intersection of floor slabs and curtain walls, including inside of hollow curtain walls at the floor slab.

d. Gaps at perimeter of fire-resistance rated walls and partitions, such as the bottom of walls and floor slabs and between the top of the walls and the bottom of roof decks.

e. Construction joints in floors and fire rated walls and partitions.

f. Other locations where required to maintain fire resistance rating of

the construction.

3.2.1 Insulated Pipes and Ducts

Cut and remove thermal insulation where pipes or ducts pass through firestopping, unless insulation meets requirements specified for firestopping. Replace thermal insulation with a material having equal thermal insulating and firestopping characteristics.

3.2.2 Fire Dampers

Install and firestop fire dampers in accordance with Section 23 30 00 HVAC AIR DISTRIBUTION. Firestop installed with fire damper must be tested and approved for use in fire damper system. .

3.2.3 Data and Communication Cabling

Seal cabling for data and communication applications with re-enterable firestopping products and devices as indicated.

3.2.3.1 Re-Enterable Devices

Provide firestopping devices that are pre-manufactured modular devices, containing built-in self-sealing intumescent inserts. Allow for cable moves, additions or changes without the need to remove or replace any firestop materials. Devices must be capable of maintaining the fire resistance rating of the penetrated membrane at 0 percent to 100 percent visual fill of penetrants; while maintaining "L" rating of <10 cfm/sf at 0 percent to 100 percent visual fill.

3.2.3.2 Re-Sealable Products

Provide firestopping pre-manufactured modular products, containing self-sealing intumescent inserts. Allow for cable moves, additions or changes. Provide devices capable of maintaining the fire resistance rating of the penetrated membrane at 0 percent to 100 percent visual fill of penetrants.

3.3 INSPECTION

Install one of each type of penetration and have it inspected and accepted prior to the installation of the remainder of the penetrations by one of the following:

a. The Midlant Division, Naval Facilities Engineering Command, Fire Protection Engineer (DFPE).

b. The Firestopping Inspector, witnessed by a designated Government representative.

c. The Firestopping Inspector, with a detailed Inspection Form submitted to the Midlant Division, Naval Facilities Engineering Command, Fire Protection Engineer (DFPE) for review and approval within two days of the inspection. The Inspection Form must include:

(1) General project identification information.
(2) Name of Firestopping Inspector.
(3) Location of system with a partial floor plan to highlight location.

(4) UL system or Engineering Judgement and rating.
(5) Description of rated assembly being penetrated and type of penetrant.
(6) Photographs of destructive samples taken or photographs of steps taken during the installation.
(7) Measurement of cut samples must be shown in photographs with a ruler. Provide photographs of the joint or penetration prior firestopping; after firestopping; and intermediate steps. Photographs may be provided in electronic (.jpg or .pdf) format. Photographs must provide sufficient angles and detail to show conformance with requirements of the system.
(8) General observations.
(9) Statement of compliance or non-compliance.

The means of inspection must be coordinated with the DFPE prior to the inspection. At this inspection, the manufacturer's technical representative of the firestopping material must be present. The manufacturer's technical representative may be the Firestopping Installer.

For all projects, do not cover or enclose until inspection is complete and approved by the Contracting Officer. The inspector must inspect the applications initially to ensure adequate preparations (clean surfaces suitable for application, etc.) and periodically during the work to assure that the completed work has been accomplished according to the manufacturer's written instructions and the specified requirements. Submit written reports indicating locations of and types of penetrations and types of firestopping used at each location; record type by UL listed printed numbers.

3.3.1 Inspection Standards

Inspect all firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results to be submitted.

The Firestopping Inspector must be regularly employed by a firm meeting ASTM E329 for agencies involved Special Inspections.

The Firestopping Inspector must verify that the materials and systems used for firestopping and fire resistive joint systems are listed and labeled for the use intended.

The Firestopping Inspector must verify that the required firestop systems and fire resistive joint systems have been installed.

The Firestopping Inspector must verify compliance of the firestop systems and fire resistive joint systems by observing the installation process and by taking and recording measurements of the substrates and materials being installed or by destructive examination of completed installations.

Inspection frequency of firestop systems and fire resistive joint systems will depend on the method of inspection and the scope of the project.

The method of inspection for firestop systems must be one of the following:

a. The Firestopping Inspector must be on site during installation and randomly witness a minimum of 10% of each type of firestop system being installed, or

b. The Firestopping Inspector must conduct a post installation inspection, which requires destructive type verification of the firestop system and repair of the firestop system. A minimum of 2%, but not less than one, of each type of firestop system must be inspected per floor or for each area of a floor when a floor is larger than 10,000 SF. An area consists of 10,000 SF or less.

The method of inspection for fire resistive joint systems must be one of the following:

a. The Firestopping Inspector must be on site during installation and randomly witness a minimum of 5% of total lineal feet of each type of fire resistive joint system being installed, or

b. The Firestopping Inspector must conduct a post installation inspection in accordance with one of the following:

(1) Destructive type verification of the fire resistive joint system and repair of the joint system, or
(2) Disassembly and verification of the components and re-installation of the joint system, or
(3) Visual inspection and verification of the component or entire joint system, where a visual inspection establishes conformance; or
(4) Other appropriate methods showing compliance with the approval process or the manufacturer's instructions.

Inspection must consist of a minimum of one sampling per type of joint system per 500 lineal feet.

Prior to construction, the Firestopping Inspector must coordinate with the NAVFAC DFPE to determine the types of firestop systems and subsequently the number of each type that is to be inspected. The determination of a "type" will typically be a function of a unique combination of parameters, including penetrant type (for example, metal pipe, plastic pipe, cabling), firestop material or device (for example, intumescent caulk, collar, sealant), penetrated substrate (for example, gypsum wall, concrete floor, composite floor deck), and rating of penetrated item.

Any type of firestop system that does not comply with this specification will require repair or replacement and re-inspection of that firestop system plus one full additional inspection, of the number specified herein, of that type firestop system. If non-compliance occurs on 10% or more of the quantity of firestop products or firestop systems, then inspection of those particular type firestop systems must cease. The Firestopping Installer must inspect their own work, and repair or replace those like firestops within the area prior to re-commencement of inspections by the Firestopping Inspector.

The Firestopping Inspector must maintain inspection forms. All Observed deficiencies must be documented and marked on the inspection forms. In addition, the Firestopping Inspector must physically identify the location where a required firestop system has been omitted or where the inspection results indicate that the installed firestop system does not comply with the inspection documents. The Inspection Forms must include the following:

a. General project identification information.

b. Name of Firestopping Inspector.

c. Location of system with a partial floor plan to highlight location.

d. UL system or Engineering Judgement and rating.

e. Description of rated assembly being penetrated and type of penetrant.

f. Photographs of destructive samples taken or photographs of steps taken during the installation.

g. Measurement of cut samples must be shown in photographs with a ruler. Provide photographs of the joint or penetration prior firestopping; after firestopping; and intermediate steps. Photographs may be provided in electronic (.jpg or .pdf) format. Photographs must provide sufficient angles and detail to show conformance with requirements of the system.

h. General observations.

i. Statement of compliance or non-compliance

Submit the inspection forms to the DFPE for surveillance within two days of the inspection.

3.3.2 Inspection Reports

Submit inspection report stating that firestopping work has been inspected and found to be applied according to the manufacturer's recommendations and the specified requirements.

The report must contain a cover page with the following:

a. The project name, location, and contract number,

b. The name and address of the Firestopping Installer(s), as well as the prime contractor, if different; and

c. Report date.

The report must include drawings indicating locations and types of all penetrations and fire resistive joint systems and types of firestopping used at each location; type must be identified by UL listed printed numbers. Annotated inspected systems with a unique designator that correlates with the Inspection Forms. The drawings must include smoke barriers and partitions and indicate the methods and materials used to protect penetrations.

Include UL system details or Engineering Judgements, annotated to identify specific ratings and assembly components.

The report must contain a summary page with the following:

a. Types and quantity of each firestop system and fire resistive joint system on the project.

b. The verification method used to ascertain compliance.

c. The quantity of each firestop system and fire resistive joint system inspected on the project and a written statement by the Firestopping Inspector that the number of firestop systems and fire resistive joint systems inspected comply with this specification.

d. Percentages of deficiencies for each type of firestop system and fire resistive joint system referenced.

e. A total number of deficiencies, expressed as a percentage of the total number of firestop systems and fire resistive joint systems inspected.

f. Narrative of inspection observations and description of means and methods used to correct deficiencies. Include a description of deviations from the design documents.

g. Additional information, as determined by the Firestopping Inspector, required to adequately convey compliance.

The report must contain copies of all Inspection Forms generated during the inspection process, arranged chronologically.

Submit a Final Inspection Report at least 14 days prior to Government acceptance testing for review and approval.

3.3.3 Acceptance

The Government may require additional destructive testing at the time of Government acceptance testing. Systems that are subject to destructive testing must be replaced, at no cost to the Government, by the project's qualified Firestopping Installer. Confirmation that the system replaced complies must be provided by the Firestopping Inspector.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 92 00

JOINT SEALANTS
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C509	(2006; R 2021) Standard Specification for Elastomeric Cellular Preformed Gasket and Sealing Material
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM C1193	(2016) Standard Guide for Use of Joint Sealants
ASTM C1311	(2022) Standard Specification for Solvent Release Sealants
ASTM C1521	(2019; R 2020) Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
ASTM D1056	(2020) Standard Specification for Flexible Cellular Materials - Sponge or Expanded Rubber

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

UL SOLUTIONS (UL)

UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Sealants; G

Primers; G

Bond Breakers; G

Backstops; G

Cleaning Solvents; G

SD-06 Test Reports

Field Adhesion; G

SD-07 Certificates

Indoor Air Quality For Interior Sealants; S

Indoor Air Quality For Interior Floor Joint Sealants; S

1.3 PRODUCT DATA

Include storage requirements, shelf life, curing time, instructions for mixing and application, and accessories. Provide manufacturer's Safety Data Sheets (SDS) for each solvent, primer and sealant material proposed.

1.4 CERTIFICATIONS

1.4.1 Indoor Air Quality Certifications

Submit required indoor air quality certifications in one submittal package.

1.4.1.1 Adhesives and Sealants

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party program that products meet the requirements of this Section. Provide current product certification documentation from certification body. When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein.

1.5 ENVIRONMENTAL CONDITIONS

Apply sealant when the ambient temperature is between 40 and 90 degrees F.

1.6 DELIVERY AND STORAGE

Deliver materials to the jobsite in unopened manufacturers' sealed shipping containers, with brand name, date of manufacture, color and material designation clearly marked thereon. Label elastomeric sealant containers to identify type, class, grade, and use. Handle and store materials in accordance with manufacturer's printed instructions. Prevent exposure to foreign materials or subjection to sustained temperatures exceeding 90 degrees F or lower than 0 degrees F. Keep materials and containers closed and separated from absorptive materials such as wood and insulation.

1.7 QUALITY ASSURANCE

1.7.1 Compatibility with Substrate

Verify that each sealant is compatible for use with each joint substrate in accordance with sealant manufacturer's printed recommendations for each application.

1.7.2 Joint Tolerance

Provide joint tolerances in accordance with manufacturer's printed instructions.

1.7.3 Adhesion

Provide in accordance with ASTM C1193 or ASTM C1521.

PART 2 PRODUCTS

2.1 SEALANTS

Provide sealant products that have been tested, found suitable, and documented as such by the manufacturer for the particular substrates to which they will be applied.

2.1.1 Interior Sealants

Provide ASTM C920, Type S or M, Grade NS, Class 12.5, Use NT. Provide sealant products used on the interior of the building (defined as inside of the weatherproofing system) meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. Provide certification or validation of indoor air quality for interior sealants. Location(s) and color(s) of sealant, as applicable, for the following (Note, color "as selected" refers to manufacturer's full range of color options):

LOCATION	COLOR
a. Small voids between walls or partitions and adjacent lockers, casework, shelving, door frames, built-in or surface mounted equipment and fixtures, and similar items.	As selected

LOCATION	COLOR
b. Perimeter of frames at doors, windows, and access panels which adjoin exposed interior concrete and masonry surfaces.	As selected
c. Joints of interior masonry walls and partitions which adjoin columns, pilasters, concrete walls, and exterior walls unless otherwise detailed.	As selected
d. Joints between edge members for acoustical tile and adjoining vertical surfaces.	As selected
e. Interior locations, not otherwise indicated or specified, where small voids exist between materials specified to be painted.	As selected
f. Joints between bathtubs and ceramic tile; joints between shower receptors and ceramic tile; joints formed where non-planar tile surfaces meet.	As selected
g. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change.	As selected
h. Behind escutcheon plates at valve pipe penetrations and showerheads in showers.	As selected

2.1.2 Exterior Sealants

For joints in vertical surfaces, provide ASTM C920, Type S or M, Grade NS, Class 25, Use NT. For joints in horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T. Provide location(s) and color(s) of sealant, as applicable, as follows (Note, color "as selected" refers to manufacturer's full range of color options):

LOCATION	COLOR
a. Joints and recesses formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Use sealant at both exterior and interior surfaces of exterior wall penetrations.	Match adjacent surface color
b. Joints between new and existing exterior masonry walls.	As selected
c. Masonry joints where shelf angles occur.	As selected
d. Joints in wash surfaces of stonework.	As selected

LOCATION	COLOR
e. Expansion and control joints.	As selected
f. Interior face of expansion joints in exterior concrete or masonry walls where metal expansion joint covers are not required.	As selected
g. Voids where items pass through exterior walls.	As selected
h. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.	As selected
i. Metal-to-metal joints where sealant is indicated or specified.	As selected
j. Joints between ends of gravel stops, fascia, copings, and adjacent walls.	As selected

2.1.3 Floor Joint Sealants

ASTM C920, Type S or M, Grade P, Class 25, Use T. Provide sealant products used on the interior of the building (defined as inside of the weatherproofing system) meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. Provide certification or validation of indoor air quality for interior floor joint sealants. Also provide sealants for exterior site concrete including sidewalk, curb and gutter and similar concrete expansion joints. Provide location(s) and color(s) of sealant as follows (Note, color "as selected" refers to manufacturer's full range of color options):

LOCATION	COLOR
a. Seats of metal thresholds for exterior doors.	As selected
b. Control and expansion joints in floors, slabs, ceramic tile, and walkways.	As selected

2.2 PRIMERS

Non-staining, quick drying type and consistency as recommended by the sealant manufacturer for the particular application. Provide primers for interior applications that meet the indoor air quality requirements of the paragraph INTERIOR SEALANTS above.

2.3 BOND BREAKERS

Type and consistency as recommended by the sealant manufacturer to prevent adhesion of the sealant to the backing or to the bottom of the joint. Provide bond breakers for interior applications that meet the indoor air quality requirements of the paragraph INTERIOR SEALANTS above.

2.4 BACKSTOPS

Provide glass fiber roving, neoprene, butyl, polyurethane, or polyethylene foams free from oil or other staining elements as recommended by sealant manufacturer. Provide 25 to 33 percent oversized backing for closed cell material, unless otherwise indicated. Provide backstop material that is compatible with sealant. Do not use oakum or other types of absorptive materials as backstops.

2.4.1 Rubber

Provide in accordance with ASTM D1056, Type 2, closed cell, Class A, round cross sections for cellular rubber sponge backing.

2.4.2 Synthetic Rubber

Provide in accordance with ASTM C509, Option I, Type I preformed rods or tubes for synthetic rubber backing.

2.4.3 Neoprene

Provide in accordance with ASTM D1056, closed cell expanded neoprene cord Type 2, Class C, Grade 2C2 for neoprene backing.

2.4.4 Butyl Rubber Based

Provide in accordance with ASTM C1311, from a single component, with solvent release. color as selected from manufacturer's full range of color choices.

2.4.5 Silicone Rubber Base

Provide in accordance with ASTM C920, from a single component, with solvent release, Non-sag, Type S, Grade NS, Class 25. Color as selected from manufacturer's full range of color choices.

2.5 CLEANING SOLVENTS

Provide type(s) recommended by the sealant manufacturer and in accordance with environmental requirements herein. Protect adjacent aluminum and bronze surfaces from solvents. Provide solvents for interior applications that meet the indoor air quality requirements of the paragraph INTERIOR SEALANTS above.

PART 3 EXECUTION

3.1 FIELD QUALITY CONTROL

Perform a field adhesion test in accordance with manufacturer's instructions and ASTM C1193, Method A or ASTM C1521, Method A, Tail Procedure. Remove sealants that fail adhesion testing; clean substrates, reapply sealants, and re-test. Test sealants adjacent to failed sealants.

Submit field adhesion test report indicating tests, locations, dates, results, and remedial actions taken.

3.2 SURFACE PREPARATION

Prepare surfaces according to manufacturer's printed installation instructions. Clean surfaces from dirt, frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter that would destroy or impair adhesion. Remove oil and grease with solvent; thoroughly remove solvents prior to sealant installation. Wipe surfaces dry with clean cloths. When resealing an existing joint, remove existing caulk or sealant prior to applying new sealant. For surface types not listed below, provide in accordance with sealant manufacturer's printed instructions for each specific surface.

3.2.1 Steel Surfaces

Remove loose mill scale by sandblasting or, if sandblasting is impractical or would damage finished work, scraping and wire brushing. Remove protective coatings by sandblasting or using a residue free solvent. Remove resulting debris and solvent residue prior to sealant installation.

3.2.2 Aluminum or Bronze Surfaces

Remove temporary protective coatings from surfaces that will be in contact with sealant. When masking tape is used as a protective coating, remove tape and residual adhesive prior to sealant application. For removing protective coatings and final cleaning, use non-staining solvents recommended by the manufacturer of the item(s) containing aluminum or bronze surfaces.

3.2.3 Concrete and Masonry Surfaces

Where surfaces have been treated with curing compounds, oil, or other such materials, remove materials by sandblasting or wire brushing. Remove laitance, efflorescence and loose mortar from the joint cavity. Remove resulting debris prior to sealant installation.

3.3 SEALANT PREPARATION

Do not add liquids, solvents, or powders to sealants. Mix multicomponent elastomeric sealants in accordance with manufacturer's printed instructions.

3.4 APPLICATION

3.4.1 Joint Width-To-Depth Ratios

Acceptable Ratios, as applicable:

JOINT WIDTH	JOINT DEPTH	
	Minimum	Maximum
For metal, glass, or other nonporous surfaces:		

JOINT WIDTH	JOINT DEPTH	
	Minimum	Maximum
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch	1/2 of width	Equal to width
For wood, concrete, masonry and stone:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch to 1/2 inch	1/4 inch	Equal to width
over 1/2 inch to 1 inch	1/2 inch	5/8 inch
Over 1 inch	prohibited	

Unacceptable Ratios: Where joints of acceptable width-to-depth ratios have not been provided, clean out joints to acceptable depths and grind or cut to acceptable widths without damage to the adjoining work. Grinding is prohibited at metal surfaces.

3.4.2 Unacceptable Sealant Use

Do not install sealants in lieu of other required building enclosure weatherproofing components such as flashing, drainage components, and joint closure accessories, or to close gaps between walls, floors, roofs, windows, and doors, that exceed acceptable installation tolerances. Remove sealants that have been used in an unacceptable manner and correct building enclosure deficiencies to comply with contract documents requirements.

3.4.3 Masking Tape

Place masking tape on the finished surface on one or both sides of joint cavities to protect adjacent finished surfaces from primer or sealant smears. Remove masking tape within 10 minutes of joint filling and tooling.

3.4.4 Backstops

Provide backstops dry and free of tears or holes. Tightly pack the back or bottom of joint cavities with backstop material to provide joints in specified depths. Provide backstops where indicated and where backstops are not indicated but joint cavities exceed the acceptable maximum depths specified in JOINT WIDTH-TO-DEPTH RATIOS Table.

3.4.5 Primer

Clean out loose particles from joints immediately prior to application of. Apply primer to joints in concrete masonry units, wood, and other porous surfaces in accordance with sealant manufacturer's printed instructions. Do not apply primer to exposed finished surfaces.

3.4.6 Bond Breaker

Provide bond breakers to surfaces not intended to bond in accordance with, sealant manufacturer's printed instructions for each type of surface and sealant combination specified.

3.4.7 Sealants

Provide sealants compatible with the material(s) to which they are applied. Do not use a sealant that has exceeded its shelf life or has jelled and cannot be discharged in a continuous flow from the sealant gun. Apply sealants in accordance with the manufacturer's printed instructions with a gun having a nozzle that fits the joint width. Work sealant into joints so as to fill the joints solidly without air pockets. Tool sealant after application to ensure adhesion. Apply sealant uniformly smooth and free of wrinkles. Upon completion of sealant application, roughen partially filled or unfilled joints, apply additional sealant, and tool smooth as specified. Apply sealer over sealants in accordance with the sealant manufacturer's printed instructions.

3.5 PROTECTION AND CLEANING

3.5.1 Protection

Protect areas adjacent to joints from sealant smears. Masking tape may be used for this purpose if removed 5 to 10 minutes after the joint is filled and no residual tape marks remain.

3.5.2 Final Cleaning

Upon completion of sealant application, remove remaining smears and stains and leave the work in a clean and neat condition.

a. Masonry and Other Porous Surfaces: Immediately remove fresh sealant that has been smeared on adjacent masonry, rub clean with a solvent, and remove solvent residue, in accordance with sealant manufacturer's printed instructions. Allow excess sealant to cure for 24 hours then remove by wire brushing or sanding. Remove resulting debris.

b. Metal and Other Non-Porous Surfaces: Remove excess sealant with a solvent moistened cloth. Remove solvent residue in accordance with solvent manufacturer's printed instructions.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 11 13

STEEL DOORS AND FRAMES
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel

ASTM INTERNATIONAL (ASTM)

ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A879/A879M	(2012; R 2017) Standard Specification for Steel Sheet, zinc Coated by the Electrolytic Process for Applications Requiring Designation of the Coating Mass on Each Surface
ASTM A924/A924M	(2022a) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM C578	(2023) Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation
ASTM C591	(2022) Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
ASTM C612	(2014; R 2019) Standard Specification for Mineral Fiber Block and Board Thermal Insulation
ASTM D2863	(2019) Standard Test Method for Measuring the Minimum Oxygen Concentration to Support Candle-Like Combustion of Plastics (Oxygen Index)

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

ANSI/BHMA A156.115	(2016) Hardware Preparation in Steel Doors and Steel Frames

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(2025) Standard for Fire Doors and Other

Opening Protectives

NFPA 105 (2025) Standard for Smoke Door Assemblies and Other Opening Protectives

NFPA 252 (2022) Standard Methods of Fire Tests of Door Assemblies

STEEL DOOR INSTITUTE (SDI/DOOR)

SDI/DOOR 111 (2009) Recommended Details for Standard Steel Doors, Frames, and Accessories and Related Components

SDI/DOOR 113 (2023) Standard Practice for Determining the Steady-State Thermal Transmittance of Steel Door and Frame Assemblies

SDI/DOOR A250.6 (2020) Recommended Practice for Hardware Reinforcing on Standard Steel Doors and Frames

SDI/DOOR A250.8 (2023) Specifications for Standard Steel Doors and Frames

SDI/DOOR A250.11 (2022) Recommended Erection Instructions for Steel Frames

UL SOLUTIONS (UL)

UL 10C (2016; Reprint May 2021) UL Standard for Safety Positive Pressure Fire Tests of Door Assemblies

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Doors; G

Frames; G

Accessories

Schedule of Doors; G

Schedule of Frames; G

SD-03 Product Data

Doors; G

Recycled Content for Steel Door Product; S

Frames; G

Recycled Content for Steel Frame Product; S

Accessories

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver doors, frames, and accessories undamaged and with protective wrappings or packaging. Provide temporary steel spreaders securely fastened to the bottom of each welded frame. Store doors and frames on platforms under cover in clean, dry, ventilated, and accessible locations, with 1/4 inch airspace between doors. Remove damp or wet packaging immediately and wipe affected surfaces dry. Replace damaged materials with new.

PART 2 PRODUCTS

2.1 STEEL DOORS

SDI/DOOR A250.8. Prepare doors to receive door hardware as specified in Section 08 71 00 DOOR HARDWARE. Undercut where indicated. Provide exterior doors with top edge closed flush and sealed to prevent water intrusion. Provide doors at 1-3/4 inch thick, unless otherwise indicated. Provide door material that uses a minimum of 25 percent recycled content. Provide data indicating percentage of recycled content for steel door product.

2.1.1 Classification - Level, Performance, Model

2.1.1.1 Standard Duty Doors

2.1.1.2 Extra Heavy Duty Doors

SDI/DOOR A250.8, Level 3, physical performance Level A, Model 2 with core construction as required by the manufacturer of size(s) and design(s) indicated. Where vertical stiffener cores are required, the space between the stiffeners must be filled with board insulation.

2.1.1.3 Maximum Duty Doors

SDI/DOOR A250.8, Level 4, physical performance Level A, Model 2 with core construction as required by the manufacturer, of size(s) and design(s) indicated. Where vertical stiffener cores are required, the space between the stiffeners must be filled with board insulation..

2.2 ACCESSORIES

2.2.1 Astragals

For pairs of exterior steel doors which will not have aluminum astragals or removable mullions, as specified in Section 08 71 00 DOOR HARDWARE provide overlapping steel astragals with the doors.

2.2.2 Moldings

Provide moldings around glass of interior and exterior doors. Provide nonremovable moldings on outside of exterior doors and on corridor side of interior doors. Other moldings may be stationary or removable. Secure

inside moldings to stationary moldings, or provide snap-on moldings.

2.3 INSULATION CORES

Provide insulating cores at all exterior doors and provide an apparent U-factor of .48 in accordance with SDI/DOOR 113 and conforming to one of the following:

a. Rigid Cellular Polyisocyanurate Foam: ASTM C591, Type I or II, foamed-in-place or in board form, with oxygen index of not less than 22 percent when tested in accordance with ASTM D2863; or

b. Rigid Polystyrene Foam Board: ASTM C578, Type I or II; or

c. Mineral board: ASTM C612, Type I.

2.4 STEEL FRAMES

SDI/DOOR A250.8, Level 4 for exterior doors and Level 3 for interior doors. Form frames to sizes and shapes indicated, with welded corners. Provide frame product that uses a minimum of 25 percent recycled content. Provide data indicating percentage of recycled content for steel frame product.

2.4.1 Welded Frames

Continuously weld frame faces at corner joints. Mechanically interlock or continuously weld stops and rabbets. Grind welds smooth.

Weld frames in accordance with the recommended practice of the Structural Welding Code Sections 1 through 6, AWS D1.1/D1.1M and in accordance with the practice specified by the producer of the metal being welded.

2.4.2 Mullions and Transom Bars

Provide mullions and transom bars of closed or tubular construction with heads and jambs butt-welded together. Bottom of door mullions must have adjustable floor anchors and spreader connections.

2.4.3 Stops and Beads

Provide formed and loose stops and beads from 20 gage steel. Provide for glazed and other openings in standard steel frames. Secure beads to frames with oval-head, countersunk Phillips self-tapping sheet metal screws or concealed clips and fasteners. Space fasteners approximately 12 to 16 inch on center. Miter molded shapes at corners. Butt or miter square or rectangular beads at corners.

2.4.4 Anchors

Provide anchors to secure the frame to adjoining construction. Provide steel anchors, zinc-coated not lighter than 18 gage.

2.4.4.1 Wall Anchors

Provide at least three anchors for each jamb. For frames which are more than 7.5 feet in height, provide one additional anchor for each jamb for each additional 2.5 feet or fraction thereof.

a. Masonry: Provide anchors of corrugated or perforated steel straps or

3/16 inch diameter steel wire, adjustable or T-shaped;

b. Completed openings: Secure frames to previously placed concrete or masonry with expansion bolts in accordance with SDI/DOOR 111; and

2.4.4.2 Floor Anchors

Provide floor anchors drilled for 3/8 inch anchor bolts at bottom of each jamb member.

2.5 FIRE DOORS AND FRAMES

Provide fire doors and frames in accordance with NFPA 80 and NFPA 105 and this specification. Include insulated core materials in fire doors where required.

2.5.1 Labels

Provide fire doors and frames bearing the label of Underwriters Laboratories (UL), Factory Mutual Engineering and Research (FM), or Warnock Hersey International (WHI) attesting to the rating required. Testing must be in accordance with NFPA 252 or UL 10C. Provide labels that are metal with raised letters, bearing the name or file number of the door and frame manufacturer. Labels must be permanently affixed at the factory to frames and to the hinge edge of the door. Do not paint door and labels.

2.6 EXTERIOR FRAMES

Provide thermal insulation in all exterior frames. Provide frames of a minimum Level 4, with frames of a minimum thickness of 0.067 inch, 14 gage.

2.7 HARDWARE PREPARATION

Drill and tap doors and frames to receive finish hardware. Prepare doors and frames for hardware in accordance with the applicable requirements of SDI/DOOR A250.8 and SDI/DOOR A250.6. For additional requirements refer to ANSI/BHMA A156.115. Drill and tap for surface-applied hardware at the project site. Build additional reinforcing for surface-applied hardware into the door at the factory. Punch door frames, with the exception of frames that will have weatherstripping or gaskets, to receive a minimum of two rubber or vinyl door silencers on lock side of single doors and one silencer for each leaf at heads of double doors. Set lock strikes out to provide clearance for silencers.

2.8 FINISHES

2.8.1 Hot-Dip Zinc-Coated and Factory-Primed Finish

Fabricate doors and frames from hot dipped zinc coated steel, alloyed type, that complies with ASTM A924/A924M and ASTM A653/A653M. The coating weight must meet or exceed the minimum requirements for coatings having 0.4 ounces per square foot, total both sides, i.e., A40. Repair damaged zinc-coated surfaces by the application of zinc dust paint. Thoroughly clean and chemically treat to insure maximum paint adhesion. Factory prime as specified in SDI/DOOR A250.8.

2.8.2 Electrolytic Zinc-Coated Anchors and Accessories

Provide electrolytically deposited zinc-coated steel in accordance with ASTM A879/A879M, Commercial Quality, Coating Class A. Phosphate treat and factory prime zinc-coated surfaces as specified in SDI/DOOR A250.8.

2.9 FABRICATION AND WORKMANSHIP

Provide finished doors and frames that are strong and rigid, neat in appearance, and free from defects, waves, scratches, cuts, dents, ridges, holes, warp, and buckle. Provide molded members that are clean cut, straight, and true, with joints coped or mitered, well formed, and in true alignment. Dress exposed welded and soldered joints smooth. Design door frame sections for use with the wall construction indicated. Corner joints must be well formed and in true alignment. Conceal fastenings where practicable. On wraparound frames for partitions, provide a throat opening 1/8 inch larger than the actual wall thickness. Provide frames that allow sufficient space between the inside back of trim and wall to receive caulking compound.

2.10 PROVISIONS FOR GLAZING

Scheduled interior doors receive 0.25 inch glass and scheduled exterior doors receive 1 inch insulated glass composites. Glass is specified in Section 08 81 00, GLAZING.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Frames

Set frames in accordance with SDI/DOOR A250.11. Plumb, align, and brace securely until permanent anchors are set. Anchor bottoms of frames with expansion bolts or powder-actuated fasteners. Build in or secure wall anchors to adjoining construction.

3.1.2 Doors

Hang doors in accordance with clearances specified in SDI/DOOR A250.8. After erection and glazing, clean and adjust hardware.

3.1.3 Fire Doors and Frames

Install fire doors and frames, including hardware, in accordance with NFPA 80.

3.2 PROTECTION

Protect doors and frames from damage. Repair damaged doors and frames prior to completion and acceptance of the project or replace with new, as directed. Wire brush rusted frames until rust is removed. Clean thoroughly. Apply an all-over coat of rust-inhibitive paint of the same type used for shop coat.

3.3 CLEANING

Upon completion, clean exposed surfaces of doors and frames thoroughly. Remove mastic smears and other unsightly marks.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 31 00

ACCESS DOORS AND PANELS
05/17, CHG 1: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A666	(2023) Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
ASTM A1008/A1008M	(2025) Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM E119	(2024) Standard Test Methods for Fire Tests of Building Construction and Materials

MASTER PAINTERS INSTITUTE (MPI)

MPI 79	(2016) Primer, Alkyd, Anti-Corrosive for Metal

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 252	(2022) Standard Methods of Fire Tests of Door Assemblies
NFPA 288	(2017) Standard Methods of Fire Tests of Horizontal Fire Door Assemblies Installed in Horizontal Fire Resistance-Rated Assemblies

UNDERWRITERS LABORATORIES (UL)

UL 10B	(2008; Reprint May 2020) Fire Tests of Door Assemblies
UL 263	(2011; Reprint Aug 2021) UL Standard for Safety Fire Tests of Building Construction and Materials

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Access Doors And Panels; G

SD-03 Product Data

Access Doors And Panels; G

Hardware Including Locks and Keys; G

Accessories; G

Recycled Content; S

SD-04 Samples

Finishes; G

SD-06 Test Reports

Fire-rating(s) of Assemblies; G

1.3 MISCELLANEOUS REQUIREMENTS

For access doors and panels provide the following:

1.3.1 Shop Drawings

For field assembled access doors and panels, provide plans, elevations, sections, and details for each type of access door and panel assembly. Indicate frame, surface and edge construction, materials, and accessories. Indicate types of finished surfaces and details for panel edge conditions. Provide a door schedule with a unique number for each access door and panel, specific location in the project, location of hinges and hardware for each door. Indicate fire-rating(s) of assemblies and location.

1.3.2 Product Data

For shop assembled access doors and panels, provide literature indicating sizes, types, frame and edge construction, finishes, hardware, accessories

such as gaskets, seals and weatherstripping, and location of each door and panel in the project. Indicate fire-ratings of assemblies. Provide details of adjoining work for each condition indicated.

1.3.3 Finish Samples

Submit two color charts from manufacturer's standard color and finish options for each type of frame and panel assembly finish indicated.

1.3.4 Test Reports

Provide test reports for fire-rated assemblies when tested in accordance with NFPA 252 or UL 10B for fire-rated access door assemblies installed vertically and NFPA 288 for fire-rated access door assemblies installed horizontally.

1.4 PERFORMANCE REQUIREMENTS

1.4.1 Structural Requirements

Provide floor access assemblies to support live loads indicated for floors. Deflection must not exceed 1/180 of span.

1.4.2 Fire-Rating Requirements

Provide access panels with a minimum fire-rating that maintains the fire rating of substrates encountered.

1.5 DELIVERY, STORAGE, AND PROTECTION

Protect from corrosion, deformation, and other types of damage. Store items in an enclosed area free from contact with soil and weather. Remove and replace damaged items with new items.

PART 2 PRODUCTS

2.1 RECYCLED CONTENT

Provide products with recycled content. Provide data for each product with recycled content, identifying percentage of recycled content.

2.2 MATERIALS

2.2.1 Steel Plates, Shapes, and Bars

Provide in accordance with ASTM A36/A36M.

2.2.2 Sheet Steel

Provide cold rolled steel sheet substrate in accordance with ASTM A1008/A1008M, Commercial Steel (CS), exposed.

2.2.3 Stainless Steel

Provide in accordance with ASTM A666, type 302 or 304. Provide stainless steel finishes in damp areas.

2.2.4 Metallic Coated Steel Sheet

Provide in accordance with ASTM A653/A653M, Commercial Steel (CS), Type B; with minimum G60 (Z180) or A60 (ZF180) metallic coating. Furnish galvanized steel finishes in dry areas.

2.2.5 Hardware

Provide automatic closing devices. Provide latch releases operable from insides of doors. Provide anchors in accordance with applicable fire test parameters.

2.2.6 Hinges

Provide concealed spring hinges, 175 degrees of opening, with non-removable hinge pins. Provide hinges of same steel as door and frame or in accordance with manufacturer's written recommendations. If providing non-continuous hinges, provide in numbers required to maintain alignment of door panel with frame. Provide coatings as necessary to permanently protect dissimilar metals from contact with one another; see Part 3 herein for more information.

2.2.7 Locks

Unless otherwise indicated, provide flush screwdriver operated cam lock. Provide stainless steel bushings to protect holes in surface finishes for screwdriver to access lock.

2.2.8 Accessories

Provide anchors in size, number and location on four sides to secure access door to substrate. Provide anchors in types as recommended by manufacturer's written installation instructions for each substrate indicated. Provide shims, bushings, clips, gaskets, and other devices as necessary for a complete installation.

2.3 FABRICATION

2.3.1 Thickness, Size, Edges

Fabricate frames for access doors of steel not lighter than 16 gage with welded joints and anchorage for securing to adjacent construction. Provide doors a minimum of 24 by 24 inches and of not lighter than 16 gage steel, with stiffened edges and welded attachments. Provide with eased (lightly rounded) edges, without burrs, snags or sharpness and exposed welds ground smooth.

2.3.2 Welding

Provide in accordance with AWS D1.1/D1.1M.

2.4 ACCESS ASSEMBLY TYPES

Unless indicated otherwise, provide flush-face steel access doors and panels with steel frames and flanges.

2.4.1 Fire-rated Doors

2.4.1.1 Door Construction

Provide ceiling access door construction in accordance with ASTM E119 or UL 263. Provide wall access doors in accordance with NFPA 252 or UL 10B.

2.4.1.2 Labels

Provide class B opening according to UL 10B or test by another nationally recognized laboratory, approved by the Contracting Officer. Provide fire-rating as indicated herein, with a maximum temperature rise of 216 degrees F.

2.4.1.3 Door Panel and Frame

Steel sheet, with mineral fiber insulation core, insulated sandwich type construction.

2.5 FINISHES

Provide galvanized steel frames and panel surfaces with a powder coated finish. Provide manufacturer's standard two coat finish system consisting of one coat primer and one thermoset topcoat. Provide dry film thickness in 2 mils minimum. Provide stainless steel frames and panels with a No. 4 Brushed finish. Provide exposed fastenings that approximately match the color and finish of the each material to which fastenings are applied.

PART 3 EXECUTION

3.1 PREPARATION

Field verify all measurements prior to fabrication. Verify access door locations and sizes provide required maintenance access to installed building services components. Protect existing construction and completed work from damage during installation.

3.2 GENERAL INSTALLATION REQUIREMENTS

Install items at locations indicated, in accordance with manufacturer's written instructions. Include materials and parts as necessary for a complete installation of each item. Conceal fastenings where practicable. Poor matching of holes to fasteners is cause for rejection of the work.

3.3 ACCESS LOCATIONS

Install removable access panels directly below each valve, flow indicator, damper, air splitter or other utility requiring access that is located above ceilings and that would otherwise not be accessible. Install access doors and panels permitting access to service valves, traps, dampers, cleanouts, and other mechanical, electrical and conveyor control items concealed in walls and partitions.

3.4 ACCESS LOCATIONS IN WET AREAS

When possible, avoid locating access panels in wet areas. When such locations cannot be avoided, provide moisture resistant assemblies as indicated in Part I herein.

3.5 DISSIMILAR MATERIALS

Where dissimilar metals are in contact, protect surfaces with a coating in accordance with MPI 79 to prevent galvanic or corrosive action.

3.6 ADJUSTMENT

Adjust hardware so that door panel opens freely. Adjust door when closed center door panel in frame.

3.7 ENVIRONMENTAL CONDITIONS

Do not paint surfaces when damp or exposed to weather, when surface temperature is below 45 degrees F or over 95 degrees F, unless approved by the Contracting Officer.

-- End of Section --

SECTION 08 33 13

COILING COUNTER DOORS
05/09, CHG 2: 11/12

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	(2025a) Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Warranty
Rolling Counter Doors
Installation
Cleaning

SD-11 Closeout Submittals

Rolling Counter Door (20 Minute Smoke Rated)

1.3 QUALITY ASSURANCE

Submit Detail Drawings showing elevations of each door type, details of anchorage, details of construction, location and description of hardware, shape and thickness of materials, details of joints and connections, and details of guides and fittings. Include a schedule showing the location of each counter door with the drawings.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver rolling counter doors to the jobsite wrapped in a protective covering with the brands and names clearly marked thereon. Store rolling counter doors in accordance with the manufacturer's instructions in a dry location that is adequately ventilated and free from dust, water, or other

contaminants, and in a manner that permits easy access for inspecting and handling. Handle doors carefully to prevent damage. Replace damaged items that cannot be restored to like-new condition.

1.5 WARRANTY

Provide manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Furnish rolling counter doors of the type, size, and design indicated on the drawings. Provide the standard product of a manufacturer regularly engaged in the production of rolling counter doors. Provide each door with a permanent label showing the manufacturer's name and address and the model number of the door. Submit Manufacturer's descriptive data and catalog cuts.

2.2 BASIC COMPONENTS

2.2.1 Curtain

Fabricate the curtain of 22 gauge stainless steel slats conforming to ASTM A240/A240M, Type 304 or Type 430. Provide thickness of slat material as required by width of opening Use slats approximately 1-1/4 to 1-1/2 inch wide with a depth of crown of 1/2 inch. Fit alternate slats with endlocks to maintain curtain alignment. Provide bottom of curtain with angle or tubular bar reinforcement matching the curtain, and fitted with a resilient bottom seal.

2.2.2 Jamb Guides

Furnish guides of 13 gauge minimum thickness stainless steel conforming to ASTM A240/A240M, Type 304 or Type 430.

2.2.3 Counterbalance Shaft Assembly

Furnish the curtain coiled around a steel tube of sufficient thickness and diameter to prevent deflection exceeding 0.03 inch per foot. Provide a barrel containing oil tempered helical steel torsion springs capable of sufficient torque to counterbalance the weight of the curtain. Calculate the springs to provide a minimum of 7,500 operating cycles (one complete cycle of door operation will begin with the door in the closed position, move to the full open position and return to the closed position).

2.2.4 Brackets

Furnish brackets of a minimum 12 gauge thickness steel if flat plate, or 16 gauge thickness if there are a minimum of 3 returns of 3/4 inch width.

2.2.5 Hood

Provide a hood of 24 gauge stainless steel conforming to ASTM A240/A240M, Type 304 or Type 430.

2.2.6 Locks

Lock the curtain at both sides of bottom bar by a chrome-plated cylinder lock keyed into the building keying system. Provide keying conforming to Section 08 71 00 DOOR HARDWARE.

2.2.6.1 Two Point Deadlock

Two point deadlock for curtains have a bolt arm with 1.03125 inch throw. Coordinate the bolt, rod, bolt guide and strike to accommodate the counter door profile. Deadlock is retracted by a 90 degree rotation of the turn on the secure side. The assembly is deadlocked at 360 degree rotation of the turn, preventing operation in either the locked or unlocked position. Standard mortise cylinders on both the secure and unsecure sides control the turn by key.

2.3 ROLLING COUNTER DOOR (20 Minute Smoke RATED)

Construct rolling counter doors, curtains, guides and hood components of stainless steel conforming to the requirements specified herein. Submit complete copies of Data Package 2 for Fire-Rated Rolling Counter Doors (next paragraph) in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA. Provide a list of the parts recommended by the manufacturer to be replaced after 1 year and 3 years of service.

2.4 FINISH

Exposed parts of the counter door, including the curtain, bottom rail, guides, and hood must be of uniform finish and appearance. Furnish stainless steel with a No. 4 finish. Give all other steel parts a shop coat of primer paint standard with the manufacturer. Provide a factory coated color.

PART 3 EXECUTION

3.1 INSTALLATION

Install doors in accordance with approved detail drawings and manufacturer's instructions. Accurately locate anchors and inserts for guides, brackets, hardware, and other accessories. Upon completion, warped, twisted, or distorted doors are not acceptable. Lubricate, properly adjust, and demonstrate doors to operate freely.

3.2 OPERATION

3.2.1 Manual Operation

Provide curtain operated by means of manual push-up with lift handles or continuous full width lift bar. Rated counter doors are acuated by a fusible link.

3.3 CLEANING

Clean stainless steel doors in accordance with manufacturer's approved instructions. Submit Manufacturer's preprinted installation and cleaning instructions.

3.4 COILING COUNTER DOORS HARDWARE SETS

Smoke Openings

Duty 102
HWS-22 Interior Counter Door, Smoke, 20 Min Rtg

	1 each Fusible Link Actuator	
	2 each Two Point Deadlock, E86182	626
	2 each Turn	626
Section 08 71 00	2 each Mortise Cylinder Housing, F25, E09251	630
Section 08 71 00	2 each 7 Pin SFIC, F24, E09241	630

-- End of Section --

SECTION 08 33 24

ALUMINUM OVERHEAD COILING DOORS
08/20, CHG 1: 02/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7-16	(2017; Errata 2018; Supp 1 2018) Minimum Design Loads and Associated Criteria for Buildings and Other Structures

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B29.400	(2001; (R 2008) (R 2013) (R 2018)) Combination, "H" Type Mill Chains, and Sprockets

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A47/A47M	(1999; R 2022; E 2022) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A666	(2023) Standard Specification for Annealed

	or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
ASTM A780/A780M	(2020) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM A924/A924M	(2022a) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM E330/E330M	(2014; R 2021) Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
ASTM F568M	(2007) Standard Specification for Carbon and Alloy Steel Externally Threaded Metric Fasteners

DOOR AND ACCESS SYSTEM MANUFACTURERS ASSOCIATION (DASMA)

ANSI/DASMA 108	(2017) Standard Method for Testing Sectional Garage Doors, Rolling Doors and Flexible Doors: Determination of Structural Performance Under Uniform Static Air Pressure Difference

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 1	(2022) Standard for Industrial Control and Systems: General Requirements
NEMA ICS 2	(2000; R 2020) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 V
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA MG 1	(2021) Motors and Generators
NEMA ST 1	(1988; R 1994; R 1997) Specialty Transformers (Except General Purpose Type)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

UNDERWRITERS LABORATORIES (UL)

UL 325 (2017; Reprint Feb 2020) UL Standard for Safety Door, Drapery, Gate, Louver, and Window Operators and Systems

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Overhead Coiling Doors; G

Counterbalancing Mechanism; G

Electric Door Operators; G

Guides; G

Mounting Brackets; G

Hood; G

Installation Drawings; G

SD-03 Product Data

Overhead Coiling Doors; G

Hardware; G

Counterbalancing Mechanism; G

Recycled content for aluminum curtain slats; S

SD-05 Design Data

Overhead Coiling Doors; G

Hardware; G

Counterbalancing Mechanism; G

Wind Loading

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals, Data Package 2; G

SD-11 Closeout Submittals

Warranty; G

1.3 QUALITY CONTROL

1.3.1 Warranty

Furnish a written guarantee that the helical spring and counterbalance mechanism are free from defects in material and workmanship for not less than 2 years after completion and acceptance of the project.

Warrant that upon notification by the Government, any defects in material, workmanship, and door operation are immediately correct within the same time period covered by the guarantee, at no cost to the Government.

1.3.2 Operation And Maintenance Submittals

Submit 6 copies of the operation and maintenance manuals 30 calendar days prior to testing the Overhead Coiling Door Assemblies. Update and resubmit data for final approval no later than 30 calendar days prior to cContract completion.

Submit Operation and Maintenance Manuals for Overhead Coiling Door Assemblies,

Electric Door Operators

Hood

Counterbalancing Mechanism

Painting

Provide operation and maintenance manuals which are consistent with manufacturer's standard brochures, schematics, printed instructions, operating procedures, and safety precautions.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver doors to the jobsite wrapped in a protective covering with the brands and names clearly marked thereon. Store doors in an adequately ventilated dry location that is free from dirt and dust, water, or other contaminants. Store in a manner that permits easy access for inspection and handling. Handle doors carefully to prevent damage. Remove damaged items that cannot be restored to like-new condition and provide new items.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Provide exterior aluminum overhead coiling doors on structures one mile or less from bodies of water.

Exterior overhead coiling doors are insulated and comply with wind loading criteria.

Provide overhead coiling doors with interlocking slats, complete with anchoring and door hardware, guides, hood, and operating mechanisms, and designed for use on openings as indicated. Doors must be spring counterbalanced, rolling type, and designed for use on openings, as indicated. Doors must be operated by hand chain with gear or sprocket

reduction. Doors to be surface-mounted type with guides at jambs set back a sufficient distance to provide a clear opening when door is in open position. Mount doors as indicated

2.1.1 Design Requirements

2.1.1.1 Door Detail Shop Drawings

Provide installation drawings for door assemblies which show: elevations of each door type, shape and thickness of materials, finishes, details of joints and connections, details of guides and fittings, rough opening dimensions, location and description of hardware, anchorage locations, and counterbalancing mechanism and door operator details. Include a schedule showing the location of each door with the drawings.

Procure cut sheets for GFGI hardware from the Government. Coordinate GFGI hardware items with furnished hardware items indicated in applicable hardware sets. Use templates to prepare doors and frames for GFGI hardware selections.

2.1.2 Performance Requirements

2.1.2.1 Wind Loading

Design and fabricate door assembly to withstand the wind loading pressure in accordace with ANSI/DASMA 108. Provide test data showing compliance with ASTM E330/E330M. Sound engineering principles may be used to interpolate or extrapolate test results to door sizes not specifically tested. Ensure that the complete assembly meets or exceeds the requirements of ASCE 7-16.

Marine Corps Base Camp Lejeune must resist a 144 mile per hour, ultimate design wind speed, 54 PSF, Risk Category II, Surface Roughness Category C, Exposure Category B lateral load. Comply with UFC 3-301-01 and ASCE 7 as applicable for building system designs and components.

Submit a DELEGATED DESIGN demonstrating compliance

Furnish overhead curtain assemblies that resist lateral loads. Assembly design responsibility is delegated to the Contractor and incorporates specific properties and structural capabilities of selected products and manufacturers.

Supplement delegated design shop drawings with overhead curtain assembly structural computations. Tie general manufacturer data of appurtenant members utilized to project specific conditions. Specify fastening patterns and connections.

2.1.2.2 Air Infiltration

Coiling overhead door assemblies must meet the air infiltration requirements of ASHRAE 90.1 - IP.

2.1.2.3 Operational Cycle Life

Design all portions of the door, hardware and operating mechanism that are subject to movement, wear, or stress fatigue to operate through a minimum number of 10 cycles per day. One complete cycle of door operation is defined as when the door is in the closed position, moves to the fully

open position, and returns to the closed position.

2.2 COMPONENTS

2.2.1 Overhead Coiling Doors

2.2.1.1 Curtain Materials and Construction

Provide curtain slats fabricated from aluminum sheets conforming to ASTM B209, or ASTM B221 extrusions, alloy and tempering standard from the manufacturer for type of use and finish indicated; with a thickness as required by the size of the door to meet the required windload. Fill slat cavities with CFC free, foamed in place polyurethane insulation having an R value of 7.7 and an STC 21. Air leakage is less than 1 CFM per square foot. Provide aluminum curtain slats containing a minimum of 30 percent recycled content. Submit data identifying percentage of recycled content for aluminum curtain slats.Fabricate doors from interlocking cold-rolled slats, with section profiles as specified, designed to withstand the specified wind loading. Ensure the provided slats are continuous without splices for the width of the door.

2.2.1.2 Curtain Bottom Bar

Install curtain bottom bars as pairs of angles or using extrusions from the manufacturer's standard stainless and aluminum extrusions not less than 2.0 by 2.0 inches by 0.188 inch. Do not use aluminum on doors more than 16 feet wide. Stainless steel extrusions conforming to ASTM A666, Type 304. Aluminum extrusions conforming to ASTM B221. Galvanize angles and fasteners in accordance with ASTM A653/A653M and ASTM A924/A924M. Coat welds and abrasions with paint conforming to ASTM A780/A780M.

2.2.1.3 Endlocks (and Windlocks)

Provide endlocks of Grade B cast steel conforming to ASTM A47/A47M, galvanized in accordance with ASTM A153/A153M. Secure locks at every other curtain slat. In addition to endlocks, exterior doors which have a design wind load of more than 20 pounds per square foot, must have windlocks of manufacturer's standard design. Windlocks must prevent curtain from leaving guide because of deflection from wind pressure or other forces.

2.2.1.4 Weather Stripping

Provide a hood baffle inside the hood that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber or equivalent. Provide guide weather stripping that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber, or equivalent.

Provide bottom bar weather-stripping that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber, or equivalent.

2.2.1.5 Locking Devices

Provide a locking device assembly which includes cylinder lock, operating handle, cam plate, and adjustable locking bars to engage through slots in tracks.

2.2.2 Hardware

Ensure that all hardware conforms to ASTM A153/A153M, ASTM A307, and ASTM F568M.

2.2.2.1 Guides

Fabricate curtain jamb guides from the manufacturer's standard angles or channels of same material and finish as curtain slats unless otherwise indicated. Ensure curtain operates smoothly. Slot bolt holes for track adjustment. Securely attach guides to adjoining construction with not less than 3/8 inch diameter bolts, spaced near each end and not over 30 inches apart.

Ensure guides are roll-formed steel channel bolted to angle or structural grade, three angle assembly of steel to form a slot of sufficient depth to retain curtains in guides to achieve 20 psf windload standard. Guides may be provided with integral windlock bars and removable bottom bar stops.

2.2.2.2 Hood

Provide a hood with a minimum aluminum 18-gauge B&S sheet metal, flanged at top for attachment to header and flanged at bottom to provide longitudinal stiffness. The hood encloses the curtain coil and counterbalance mechanism.

Hoods for openings more than 12 feet in width must have intermediate support brackets to prevent excessive sag. Provide a weather baffle at the lintel or inside the hood of each exterior door.

2.2.3 Counterbalancing Mechanism

Counterbalance doors by means of manufacturer's standard mechanism with an adjustable-tension, steel helical torsion spring mounted, around a steel shaft and contained in a spring barrel connected to top of curtain with barrel rings. Use grease-sealed or self-lubricating bearings for rotating members.

2.2.3.1 Brackets

Provide the manufacturer's standard mounting brackets with one located at each end of the counterbalance barrel conforming to ASTM A36/A36M. Provide brackets of hot-rolled steel.

2.2.3.2 Counterbalance Barrels

Curtain must roll up on a barrel supported at head of opening on brackets and be balanced by a torsion spring system in the barrel. Fabricate spring barrel of manufacturer's standard hot-formed, structural-quality, welded or seamless carbon-steel pipe, conforming to ASTM A53/A53M or equivalent. Ensure the barrel is of sufficient diameter and wall thickness to support rolled-up curtain without distortion of slats. Limit barrel deflection to not more than 0.03 inch per foot of span under full load.

a. Barrel

Provide steel pipe capable of supporting curtain load with maximum deflection of 0.03 inches per foot of width.

b. Spring Balance

Provide an oil-tempered, heat-treated steel helical torsion spring assembly designed for proper balance of door. Ensure that effort to operate manually operated units does not exceed 25 lbs. At least 80 percent of the door weight must be counterbalanced at any position. Provide wheel for applying and adjusting spring torque.

2.2.4 Electric Door Operators

Provide electrical wiring and door operating controls conforming to the applicable requirements of NFPA 70 and UL 325. The door manufacturer must furnish automatic control and safety devices, including extra flexible type SO cable and spring-loaded automatic takeup reel or equivalent device, as required for proper operation of the doors. Conduit, wiring, and mounting of controls are specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

Electric door-operator assemblies need to be the sizes and capacities recommended and provided by the door manufacturer for specified doors. Furnish complete assemblies with electric motors and factory-prewired motor controls, starter, gear reduction units, solenoid-operated brakes, clutch, remote-control stations, manual or automatic control devices, and accessories as required for proper operation of the doors.

Design the operators so that motors may be removed without disturbing the limit-switch adjustment and affecting the emergency auxiliary operators.

Provide a manual operator of crank-gear or chain-gear mechanisms with a release clutch to permit manual operation of doors in case of power failure. Arrange the emergency manual operator so that it may be put into and out of operation from floor level, and its use does not affect the adjustment of the limit switches. Provide an electrical or mechanical device that automatically disconnects the motor from the operating mechanism when the emergency manual operating mechanism is engaged.

2.2.4.1 Electric Motors

Provide motors which are the high-starting-torque, reversible, constant-duty electrical type with overload protection of sufficient torque and horsepower to move the door in either direction from any position. Ensure they produce a door-travel speed of not less than 8 nor more than 12 inches per second without exceeding the horsepower rating.

Provide motors which conform to NEMA MG 1 designation, temperature rating, service factor, enclosure type, and efficiency to the requirements specified. Motors must be suitable for operation on current of the characteristics indicated. Install motors in approved locations.

2.2.4.2 Motor Bearings

Select bearings with bronze-sleeve or heavy-duty ball or roller antifriction type with full provisions for the type of thrust imposed by the specific duty load.

Pre-lubricate and factory seal bearings in motors less than 1/2 horsepower.

Equip motors coupled to worm-gear reduction units with either ball or roller bearings.

Equip bearings in motors 1/2 horsepower or larger with lubrication service fittings. Fit lubrication fittings with color-coded plastic or metal dust caps.

In any motor, bearings that are lubricated at the factory for extended duty periods do not need to be lubricated for a given number of operating hours. Display this information on an appropriate tag or label on the motor with instructions for lubrication cycle maintenance.

2.2.4.3 Motor Starters, Controls, and Enclosures

Provide each door motor with: a factory-wired, unfused, disconnect switch; a reversing, across-the-line magnetic starter with thermal overload protection; 24-volt operating coils with a control transformer limit switch; and a safety interlock assembled in a NEMA ICS 6 type enclosure as specified herein. Ensure control equipment conforms to NEMA ICS 1 and NEMA ICS 2.

Provide adjustable switches, electrically interlocked with the motor controls and set to stop the door automatically at the fully open and fully closed position.

2.2.4.4 Control Enclosures

Provide control enclosures that conform to NEMA ICS 6 for NEMA Type 4 and general purpose NEMA Type 1 as applicable to selected mounting locations.

2.2.4.5 Transformer

Provide starters with 230/460 to 115 volt control transformers with one secondary fuse when required to reduce the voltage on control circuits to 24volts or less. Provide a transformer conforming to NEMA ST 1.

2.2.4.6 Sensing-Edge Device

Provide each door with a pneumatic or electric sensing device that meets UL 325, extends the full width of the door, and is located within a U-section neoprene or rubber astragal, mounted on the bottom rail of the bottom door section. Device needs to immediately stop and reverse the door upon contact with an obstruction in the door opening or upon failure of the device or any component of the control system and cause the door to return to its user-defined open position. Any momentary door-closing circuit must be automatically locked out and the door must be operable manually or with constant pressure controls until the failure or damage has been corrected. A sensing device is not a substitute for a limit switch.

Connect sensing device to the control circuit through a retracting cord and reel.

2.2.4.7 Remote-Control Stations

Remote control stations must be at least 5 feet above the floor line, and all switches must be located so that the operator will have complete visibility of the door at all times. Provide interior remote control

stations that are full-guarded, momentary-contact three-button, heavy-duty, surface-mounted NEMA ICS 6 type enclosures as specified. Mark buttons "OPEN," "CLOSE," and "STOP." The "OPEN" and "STOP" buttons must be of the type requiring only momentary pressure to operate. The "CLOSE" button must be of the type either requiring constant pressure to maintain the closing motion of the door or momentary pressure when installed with a monitored entrapment detection device which, upon failure of the device or any component of the control system, cause the door to return to its full open position. When the door is in motion and the "STOP" button is pressed, ensure the door stops instantly and remains in the stopped position. From the stopped position, the door may then be operated in either direction by the "OPEN" or "CLOSE" buttons. When the door is in motion, and the "CLOSE" button of the constant pressure type is released, the door must stop and remain in the stop position or reverse to the user set up position; from the stop position, the door may then be operated in either direction by the "OPEN" or "CLOSE" buttons. Controls must be adjustable to automatically stop the doors at their fully open and closed positions. Open and closed positions must be readily adjustable.

Provide exterior control stations that are full-guarded, momentary-contact three-button standard-duty, surface-mounted, weatherproof type, NEMA ICS 6, Type 4 enclosures, key-operated, with the same operating functions as specified herein for interior remote-control stations.

2.2.4.8 Speed-Reduction Units

Provide speed-reduction units consisting of hardened-steel worm and bronze worm gear assemblies or planetary gear reducers running in oil or grease and inside a sealed casing, coupled to the motor through a flexible coupling. Drive shafts need to rotate on ball- or roller-bearing assemblies that are integral with the unit.

Provide minimum ratings of speed reduction units in accordance with AGMA provisions for class of service.

Ground worm gears to provide accurate thread form; machine teeth for all other types of gearing. Surface harden all gears.

Provide antifriction type bearings equipped with oil seals.

2.2.4.9 Chain Drives

Provide roller chains that are a power-transmission series steel roller type conforming to ASME B29.400, with a minimum safety factor of 10 times the design load.

Heat-treat or otherwise harden roller-chain side bars, rollers, pins, and bushings.

Provide high-carbon steel chain sprockets with machine-cut hardened teeth, finished bore and keyseat, and hollow-head setscrews.

2.2.4.10 Brakes

Provide 360-degree shoe brakes or shoe and drum brakes. Ensure the brakes are solenoid-operated and electrically interlocked to the control circuit to set automatically when power is interrupted.

2.2.4.11 Clutches

Ensure clutches are friction type or adjustable centrifugal type.

2.2.4.12 Weather/Smoke Seal Sensing Edge

Provide automatic stop control by an automatic sensing switch within neoprene astragal extending the full width of door bottom bar.

Provide an electric sensing edge device. Ensure the door immediately stops downward travel when contact occurs before door fully closes. Provide a self-monitoring sensing edge connection to the motor operator.

2.2.5 Surface Finishing

Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes. Noticeable variations in the same metal component are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved samples and are assembled or installed to minimize contrast.

2.2.5.1 Baked-Enamel or Powder-Coat Finish

Manufacturer's standard baked-on finish consisting of prime coat and thermosetting topcoat. Comply with the coating manufacturer's written instructions for cleaning, pretreatment, application, and minimum dry film thickness.

Give aluminum extrusions and aluminum sheet coil a pretreatment to enhance adhesion followed by a caustic etch or alkaline wash for cleaning and degreasing. Apply a phosphate spray or chromate conversion treatment to protect against humidity and corrosive chemicals. Furnish an acrylic, polyester baked enamel or powder coating treatment conforming AAMA 2603. Bake the treatment using a temperature and time relationship that ensures thorough curing and a tough, durable finish. Provide a one coat application that achieves a 0.8 mil thickness.

Overhead coiling door is Slate Gray, AMS 595A 36173 similar to utilities and appurtenances as indicated in the Marine Corps Base Camp Lejeune, Base Exterior Architectural Plan, Camp Gieger.

PART 3 EXECUTION

3.1 INSTALLATION

Install overhead coiling door assembly, anchors and inserts for guides, brackets, motors, switches, hardware, and other accessories in accordance with approved detail drawings and manufacturer's written instructions. Upon completion of installation, ensure doors are free from all distortion.

Install overhead coiling doors, motors, hoods, and operators at the mounting locations as indicated for each door in the Contract Documents and as required by the manufacturer.

Install overhead coiling doors, switches, and controls along accessible routes in compliance with regulatory requirements for accessibility and as required by the manufacturer.

3.2 ADJUSTING AND CLEANING

3.2.1 Acceptance Provisions

After installation, adjust the hardware and moving parts. Lubricate bearings and sliding parts as recommended by manufacturer to provide smooth operating functions for ease movement, free of warping, twisting, or distortion of the door assembly.

Adjust seals to provide a weather-tight fit around entire perimeter.

Engage a factory-authorized service representative to perform startup service and checks according to the manufacturer's written instructions.

Test and make final adjustment of new doors at no additional cost to the Government.

3.2.1.1 Maintenance and Adjustment

Not more than 90 calendar days after completion and acceptance of the project, examine, lubricate, test, and re-adjust doors as required for proper operation.

3.2.1.2 Cleaning

Clean doors in accordance with manufacturer's approved instructions.

3.3 OVERHEAD DOOR HARDWARE SETS

Exterior Openings

Door No. 515B
HWS-23 Exterior Overhead Door
1 each Insulated Curtain
1 each Door Control

-- End of Section --

SECTION 08 33 25

STAINLESS STEEL OVERHEAD COILING DOORS
08/20, CHG 1: 02/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2603	(2020) Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7-16	(2017; Errata 2018; Supp 1 2018) Minimum Design Loads and Associated Criteria for Buildings and Other Structures

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B29.400	(2001; (R 2008) (R 2013) (R 2018)) Combination, "H" Type Mill Chains, and Sprockets

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A47/A47M	(1999; R 2022; E 2022) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength

ASTM A666	(2023) Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
ASTM E330/E330M	(2014; R 2021) Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
ASTM F568M	(2007) Standard Specification for Carbon and Alloy Steel Externally Threaded Metric Fasteners

DOOR AND ACCESS SYSTEM MANUFACTURERS ASSOCIATION (DASMA)

ANSI/DASMA 108	(2017) Standard Method for Testing Sectional Garage Doors, Rolling Doors and Flexible Doors: Determination of Structural Performance Under Uniform Static Air Pressure Difference

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 1	(2022) Standard for Industrial Control and Systems: General Requirements
NEMA ICS 2	(2000; R 2020) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 V
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA MG 1	(2021) Motors and Generators
NEMA ST 1	(1988; R 1994; R 1997) Specialty Transformers (Except General Purpose Type)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

UNDERWRITERS LABORATORIES (UL)

UL 325	(2017; Reprint Feb 2020) UL Standard for Safety Door, Drapery, Gate, Louver, and Window Operators and Systems

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for

the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Overhead Coiling Doors; G

Counterbalancing Mechanism; G
Electric Door Operators; G

Guides; G

Mounting Brackets; G

Hood; G

Installation Drawings; G

SD-03 Product Data

Overhead Coiling Doors; G

Hardware; G

Counterbalancing Mechanism; G

Electric Door Operators; G

Recycled content for stainless steel curtain slats; S

SD-05 Design Data

Overhead Coiling Doors; G

Hardware; G

Counterbalancing Mechanism; G

Electric Door Operators; G

Wind Loading

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals, Data Package 2; G

SD-11 Closeout Submittals

Warranty; G

1.3 QUALITY CONTROL

1.3.1 Warranty

Furnish a written guarantee that the helical spring and counterbalance mechanism are free from defects in material and workmanship for not less than 2 years after completion and acceptance of the project.

Warrant that upon notification by the Government, any defects in material,

workmanship, and door operation are immediately correct within the same time period covered by the guarantee, at no cost to the Government.

1.3.2 Operation And Maintenance Submittals

Submit 6 copies of the operation and maintenance manuals 30 calendar days prior to testing the Overhead Coiling Door Assemblies. Update and resubmit data for final approval no later than 30 calendar days prior to cContract completion.

Submit Operation and Maintenance Manuals for Overhead Coiling Door Assemblies, including the following items:

Electric Door OperatorsHood

Counterbalancing Mechanism

Painting

Provide operation and maintenance manuals which are consistent with manufacturer's standard brochures, schematics, printed instructions, operating procedures, and safety precautions.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver doors to the jobsite wrapped in a protective covering with the brands and names clearly marked thereon. Store doors in an adequately ventilated dry location that is free from dirt and dust, water, or other contaminants. Store in a manner that permits easy access for inspection and handling. Handle doors carefully to prevent damage. Remove damaged items that cannot be restored to like-new condition and provide new items.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Exterior overhead coiling doors are insulated and comply with wind loading criteria.

Provide overhead coiling doors with interlocking slats, complete with anchoring and door hardware, guides, hood, and operating mechanisms, and designed for use on openings as indicated. Doors must be spring counterbalanced, rolling type, and designed for use on openings, as indicated. Doors must be operated by electric-power with auxiliary hand chain operation. Doors to be surface-mounted type with guides at jambs set back a sufficient distance to provide a clear opening when door is in open position. Mount doors as indicated

2.1.1 Design Requirements

2.1.1.1 Door Detail Shop Drawings

Provide installation drawings for door assemblies which show: elevations of each door type, shape and thickness of materials, finishes, details of joints and connections, details of guides and fittings, rough opening dimensions, location and description of hardware, anchorage locations, and counterbalancing mechanism and door operator details. Include a schedule showing the location of each door with the drawings.

2.1.2 Performance Requirements

2.1.2.1 Wind Loading

Design and fabricate door assembly to withstand the wind loading pressure in accordace with ANSI/DASMA 108. Provide test data showing compliance with ASTM E330/E330M. Sound engineering principles may be used to interpolate or extrapolate test results to door sizes not specifically tested. Ensure that the complete assembly meets or exceeds the requirements of ASCE 7-16.

Marine Corps Base Camp Lejeune must resist a 144 mile per hour, ultimate design wind speed, 54 PSF, Risk Category II, Surface Roughness Category C, Exposure Category B lateral load. Comply with UFC 3-301-01 and ASCE 7 as applicable for building system designs and components.

Submit a DELEGATED DESIGN demonstrating compliance

Furnish overhead curtain assemblies that resist lateral loads. Assembly design responsibility is delegated to the Contractor and incorporates specific properties and structural capabilities of selected products and manufacturers.

Supplement delegated design shop drawings with overhead curtain assembly structural computations. Tie general manufacturer data of appurtenant members utilized to project specific conditions. Specify fastening patterns and connections.

2.1.2.2 Air Infiltration

Coiling overhead door assemblies must meet the air infiltration requirements of ASHRAE 90.1 - IP.

2.1.2.3 Operational Cycle Life

Design all portions of the door, hardware and operating mechanism that are subject to movement, wear, or stress fatigue to operate through a minimum number of 10 cycles per day. One complete cycle of door operation is defined as when the door is in the closed position, moves to the fully open position, and returns to the closed position.

2.2 COMPONENTS

2.2.1 Overhead Coiling Doors

2.2.1.1 Curtain Materials and Construction

Provide curtain slats fabricated from Type 304 stainless steel sheets conforming to ASTM A666; sheet thickness as required by the size of the door to meet the required windload. Fill slat cavities with CFC free, foamed in place polyurethane insulation having an R value of 7.7 and an STC 21. Air leakage is less than 1 CFM per square foot. Provide stainless steel curtain slats containing a minimum of 60 percent recycled content. Submit data identifying percentage of recycled content for stainless steel curtain slats.Fabricate doors from interlocking cold-rolled slats, with section profiles as specified, designed to withstand the specified wind loading. Ensure the provided slats are continuous without splices for the width of the door.

2.2.1.2 Curtain Bottom Bar

Install curtain bottom bars as pairs of angles or using extrusions from the manufacturer's standard stainless extrusions not less than 2.0 by 2.0 inches by 0.188 inch. Stainless steel extrusions conforming to ASTM A666, Type 304.

Provide two minimum 2 inch by 2 inch by 1/8 inch structural, stainless steel angles.

2.2.1.3 Endlocks (and Windlocks)

Provide endlocks of Grade B cast steel conforming to ASTM A47/A47M, galvanized in accordance with ASTM A153/A153M. Secure locks at every other curtain slat. In addition to endlocks, exterior doors which have a design wind load of more than 20 pounds per square foot, must have windlocks of manufacturer's standard design. Windlocks must prevent curtain from leaving guide because of deflection from wind pressure or other forces.

2.2.1.4 Weather Stripping

Provide a hood baffle inside the hood that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber or equivalent. Provide guide weather stripping that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber, or equivalent.

Provide bottom bar weather-stripping that is a minimum 1/16 inch thick sheet of vinyl, neoprene rubber, or equivalent.

2.2.1.5 Locking Devices

Provide a locking device assembly which includes cylinder lock, operating handle, cam plate, and adjustable locking bars to engage through slots in tracks.

2.2.1.6 Safety Interlock

Equip power-operated doors with a safety interlock switch to disengage power supply when the door is locked, or provide an operator with an internal lock sensing device to prevent the door opening when the door is locked.

2.2.2 Hardware

Ensure that all hardware conforms to ASTM A153/A153M, ASTM A307, and ASTM F568M.

2.2.2.1 Guides

Fabricate curtain jamb guides from the manufacturer's standard angles or channels of same material and finish as curtain slats unless otherwise indicated. Ensure curtain operates smoothly. Slot bolt holes for track adjustment. Securely attach guides to adjoining construction with not less than 3/8 inch diameter bolts, spaced near each end and not over 30 inches apart.

Ensure guides are roll-formed channel bolted to angle or structural grade,

three angle assembly of stainless steel to form a slot of sufficient depth to retain curtains in guides to achieve 20 psf windload standard. Guides may be provided with integral windlock bars and removable bottom bar stops.

2.2.2.2 Hood

Provide a hood with a minimum galvanized stainless steel sheet metal, flanged at top for attachment to header and flanged at bottom to provide longitudinal stiffness. The hood encloses the curtain coil and counterbalance mechanism.

Hoods for openings more than 12 feet in width must have intermediate support brackets to prevent excessive sag. Provide a weather baffle at the lintel or inside the hood of each exterior door.

2.2.3 Counterbalancing Mechanism

Counterbalance doors by means of manufacturer's standard mechanism with an adjustable-tension, steel helical torsion spring mounted, around a steel shaft and contained in a spring barrel connected to top of curtain with barrel rings. Use grease-sealed or self-lubricating bearings for rotating members.

2.2.3.1 Brackets

Provide the manufacturer's standard mounting brackets with one located at each end of the counterbalance barrel conforming to ASTM A36/A36M. Provide brackets of hot-rolled steel.

2.2.3.2 Counterbalance Barrels

Curtain must roll up on a barrel supported at head of opening on brackets and be balanced by a torsion spring system in the barrel. Fabricate spring barrel of manufacturer's standard hot-formed, structural-quality, welded or seamless carbon-steel pipe, conforming to ASTM A53/A53M or equivalent. Ensure the barrel is of sufficient diameter and wall thickness to support rolled-up curtain without distortion of slats. Limit barrel deflection to not more than 0.03 inch per foot of span under full load.

a. Barrel

Provide steel pipe capable of supporting curtain load with maximum deflection of 0.03 inches per foot of width.

b. Spring Balance

Provide an oil-tempered, heat-treated steel helical torsion spring assembly designed for proper balance of door. Ensure that effort to operate manually operated units does not exceed 25 lbs. At least 80 percent of the door weight must be counterbalanced at any position. Provide wheel for applying and adjusting spring torque.

2.2.4 Electric Door Operators

Provide electrical wiring and door operating controls conforming to the applicable requirements of NFPA 70 and UL 325. The door manufacturer must furnish automatic control and safety devices, including extra flexible type SO cable and spring-loaded automatic takeup reel or equivalent

device, as required for proper operation of the doors. Conduit, wiring, and mounting of controls are specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

Electric door-operator assemblies need to be the sizes and capacities recommended and provided by the door manufacturer for specified doors. Furnish complete assemblies with electric motors and factory-prewired motor controls, starter, gear reduction units, solenoid-operated brakes, clutch, remote-control stations, manual or automatic control devices, and accessories as required for proper operation of the doors.

Design the operators so that motors may be removed without disturbing the limit-switch adjustment and affecting the emergency auxiliary operators.

Provide a manual operator of crank-gear or chain-gear mechanisms with a release clutch to permit manual operation of doors in case of power failure. Arrange the emergency manual operator so that it may be put into and out of operation from floor level, and its use does not affect the adjustment of the limit switches. Provide an electrical or mechanical device that automatically disconnects the motor from the operating mechanism when the emergency manual operating mechanism is engaged.

2.2.4.1 Electric Motors

Provide motors which are the high-starting-torque, reversible, constant-duty electrical type with overload protection of sufficient torque and horsepower to move the door in either direction from any position. Ensure they produce a door-travel speed of not less than 8 nor more than 12 inches per second without exceeding the horsepower rating.

Provide motors which conform to NEMA MG 1 designation, temperature rating, service factor, enclosure type, and efficiency to the requirements specified. Motors must be suitable for operation on current of the characteristics indicated. Install motors in approved locations.

2.2.4.2 Motor Bearings

Select bearings with bronze-sleeve or heavy-duty ball or roller antifriction type with full provisions for the type of thrust imposed by the specific duty load.

Pre-lubricate and factory seal bearings in motors less than 1/2 horsepower.

Equip motors coupled to worm-gear reduction units with either ball or roller bearings.

Equip bearings in motors 1/2 horsepower or larger with lubrication service fittings. Fit lubrication fittings with color-coded plastic or metal dust caps.

In any motor, bearings that are lubricated at the factory for extended duty periods do not need to be lubricated for a given number of operating hours. Display this information on an appropriate tag or label on the motor with instructions for lubrication cycle maintenance.

2.2.4.3 Motor Starters, Controls, and Enclosures

Provide each door motor with: a factory-wired, unfused, disconnect switch;

a reversing, across-the-line magnetic starter with thermal overload protection; 24-volt operating coils with a control transformer limit switch; and a safety interlock assembled in a NEMA ICS 6 type enclosure as specified herein. Ensure control equipment conforms to NEMA ICS 1 and NEMA ICS 2.

Provide adjustable switches, electrically interlocked with the motor controls and set to stop the door automatically at the fully open and fully closed position.

2.2.4.4 Control Enclosures

Provide control enclosures that conform to NEMA ICS 6 for NEMA Type 4and general purpose NEMA Type 1 as applicable to selected mounting locations.

2.2.4.5 Transformer

Provide starters with 230/460 to 115 volt control transformers with one secondary fuse when required to reduce the voltage on control circuits to 24volts or less. Provide a transformer conforming to NEMA ST 1.

2.2.4.6 Sensing-Edge Device

Provide each door with a pneumatic or electric sensing device that meets UL 325, extends the full width of the door, and is located within a U-section neoprene or rubber astragal, mounted on the bottom rail of the bottom door section. Device needs to immediately stop and reverse the door upon contact with an obstruction in the door opening or upon failure of the device or any component of the control system and cause the door to return to its user-defined open position. Any momentary door-closing circuit must be automatically locked out and the door must be operable manually or with constant pressure controls until the failure or damage has been corrected. A sensing device is not a substitute for a limit switch.

Connect sensing device to the control circuit through a retracting cord and reel.

2.2.4.7 Remote-Control Stations

Remote control stations must be at least 5 feet above the floor line, and all switches must be located so that the operator will have complete visibility of the door at all times. Provide interior remote control stations that are full-guarded, momentary-contact three-button, heavy-duty, surface-mounted NEMA ICS 6 type enclosures as specified. Mark buttons "OPEN," "CLOSE," and "STOP." The "OPEN" and "STOP" buttons must be of the type requiring only momentary pressure to operate. The "CLOSE" button must be of the type either requiring constant pressure to maintain the closing motion of the door or momentary pressure when installed with a monitored entrapment detection device which, upon failure of the device or any component of the control system, cause the door to return to its full open position. When the door is in motion and the "STOP" button is pressed, ensure the door stops instantly and remains in the stopped position. From the stopped position, the door may then be operated in either direction by the "OPEN" or "CLOSE" buttons. When the door is in motion, and the "CLOSE" button of the constant pressure type is released, the door must stop and remain in the stop position or reverse to the user set up position; from the stop position, the door may then be operated in either direction by the "OPEN" or "CLOSE" buttons. Controls must be

adjustable to automatically stop the doors at their fully open and closed positions. Open and closed positions must be readily adjustable.

Provide exterior control stations that are full-guarded, momentary-contact three-button standard-duty, surface-mounted, weatherproof type, NEMA ICS 6, Type 4 enclosures, key-operated, with the same operating functions as specified herein for interior remote-control stations.

2.2.4.8 Speed-Reduction Units

Provide speed-reduction units consisting of hardened-steel worm and bronze worm gear assemblies or planetary gear reducers running in oil or grease and inside a sealed casing, coupled to the motor through a flexible coupling. Drive shafts need to rotate on ball- or roller-bearing assemblies that are integral with the unit.

Provide minimum ratings of speed reduction units in accordance with AGMA provisions for class of service.

Ground worm gears to provide accurate thread form; machine teeth for all other types of gearing. Surface harden all gears.

Provide antifriction type bearings equipped with oil seals.

2.2.4.9 Chain Drives

Provide roller chains that are a power-transmission series steel roller type conforming to ASME B29.400, with a minimum safety factor of 10 times the design load.

Heat-treat or otherwise harden roller-chain side bars, rollers, pins, and bushings.

Provide high-carbon steel chain sprockets with machine-cut hardened teeth, finished bore and keyseat, and hollow-head setscrews.

2.2.4.10 Brakes

Provide 360-degree shoe brakes or shoe and drum brakes. Ensure the brakes are solenoid-operated and electrically interlocked to the control circuit to set automatically when power is interrupted.

2.2.4.11 Clutches

Ensure clutches are friction type or adjustable centrifugal type.

2.2.4.12 Weather/Smoke Seal Sensing Edge

Provide automatic stop control by an automatic sensing switch within neoprene astragal extending the full width of door bottom bar.

Provide an electric sensing edge device. Ensure the door immediately stops downward travel when contact occurs before door fully closes. Provide a self-monitoring sensing edge connection to the motor operator.

2.2.5 Surface Finishing

Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

Noticeable variations in the same metal component are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved samples and are assembled or installed to minimize contrast.

2.2.5.1 Baked-Enamel or Powder-Coat Finish

Manufacturer's standard baked-on finish consisting of prime coat and thermosetting topcoat. Comply with the coating manufacturer's written instructions for cleaning, pretreatment, application, and minimum dry film thickness.

Give stainless steel sheet coil a pretreatment to enhance adhesion followed by a caustic etch or alkaline wash for cleaning and degreasing. Apply a phosphate spray or chromate conversion treatment to protect against humidity and corrosive chemicals. Furnish an acrylic, polyester baked enamel or powder coating treatment conforming AAMA 2603. Bake the treatment using a temperature and time relationship that ensures thorough curing and a tough, durable finish. Provide a one coat application that achieves a 0.8 mil thickness.

Overhead coiling door is Slate Gray, AMS 595A 36173 similar to utilities and appurtenances as indicated in the Marine Corps Base Camp Lejeune, Base Exterior Architectural Plan, Camp Gieger.

PART 3 EXECUTION

3.1 INSTALLATION

Install overhead coiling door assembly, anchors and inserts for guides, brackets, motors, switches, hardware, and other accessories in accordance with approved detail drawings and manufacturer's written instructions. Upon completion of installation, ensure doors are free from all distortion.

Install overhead coiling doors, motors, hoods, and operators at the mounting locations as indicated for each door in the Contract Documents and as required by the manufacturer.

Install overhead coiling doors, switches, and controls along accessible routes in compliance with regulatory requirements for accessibility and as required by the manufacturer.

3.2 ADJUSTING AND CLEANING

3.2.1 Acceptance Provisions

After installation, adjust the hardware and moving parts. Lubricate bearings and sliding parts as recommended by manufacturer to provide smooth operating functions for ease movement, free of warping, twisting, or distortion of the door assembly.

Adjust seals to provide a weather-tight fit around entire perimeter.

Engage a factory-authorized service representative to perform startup service and checks according to the manufacturer's written instructions.

Test the door opening and closing operation when activated by controls system. Adjust controls and safeties. Replace damaged and malfunctioning controls and equipment. Reset the door-closing mechanism after a

successful test.

Test and make final adjustment of new doors at no additional cost to the Government.

3.2.1.1 Maintenance and Adjustment

Not more than 90 calendar days after completion and acceptance of the project, examine, lubricate, test, and re-adjust doors as required for proper operation.

3.2.1.2 Cleaning

Clean doors in accordance with manufacturer's approved instructions.

3.3 OVERHEAD DOOR HARDWARE SETS

Exterior Openings

Door No. 515B
HWS-24 Exterior Overhead Door
1 each Insulated Curtain
1 each Door Control
Note: Furnish electric metallic tubing raceway, cabling, equipment and programming to support connected devices and operate overhead curtain components

-- End of Section --

SECTION 08 51 13

ALUMINUM WINDOWS
05/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 701/702	(2011) Voluntary Specification for Pile Weatherstripping and Replaceable Fenestration Weatherseals
AAMA 901	(2016) Voluntary Specification for Rotary & Linear Operators in Window Applications
AAMA 907	(2015) Voluntary Specification for Corrosion Resistant Coatings on Carbon Steel Components Used in Windows, Doors and Skylights
AAMA 1503	(2009) Voluntary Test Method for Thermal Transmittance and Condensation Resistance of Windows, Doors and Glazed Wall Sections
AAMA 2605	(2022) Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels
AAMA WSG.1	(1995) Window Selection Guide
AAMA/WDMA/CSA 101/I.S.2/A440	(2017) North American Fenestration Standard/Specification for Windows, Doors, and Skylights

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 169	(2013) Climate Data for Building Design Standards

ASTM INTERNATIONAL (ASTM)

ASTM E1886	(2019) Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials
ASTM E1996	(2017) Standard Specification for Performance of Exterior Windows, Curtain

Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes

NATIONAL FENESTRATION RATING COUNCIL (NFRC)

NFRC 100 (2020) Procedure for Determining Fenestration Product U-Factors

NFRC 200 (2020) Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 101 (2024) Life Safety Code

SCREEN MANUFACTURERS ASSOCIATION (SMA)

SMA 1004 (1987; R 1998) Aluminum Tubular Frame Screens for Windows

SMA 1201 (R 2013) Specifications for Insect Screens for Windows, Sliding Doors and Swinging Doors

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Windows; G

Fabrication Drawings

SD-03 Product Data

Windows; G

Recycled Content of Aluminum Windows; S

Hardware; G

Fasteners; G

Window Performance; G

Thermal-Barrier Windows; G

Mullions; G

Screens; G

Weatherstripping; G

Accessories; G

Adhesives

Thermal Performance; G

SD-04 Samples

Finish Sample

Window Sample

SD-05 Design Data

Structural Calculations for Deflection; G

Design Analysis; G

SD-06 Test Reports

Minimum Condensation Resistance Factor

Windborne-Debris-Impact Performance

SD-07 Certificates

Engineer's Qualifications

SD-10 Operation and Maintenance Data

Windows, Data Package 1; G

Submit in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

1.3 QUALITY ASSURANCE

1.3.1 Qualification of Manufacturer

Window manufacturer must specialize in designing and manufacturing the type of aluminum windows specified in this section, and have a minimum of 10 years of documented successful experience. Manufacturer must have the facilities capable of meeting contract requirements, single-source responsibility and warranty.

1.3.2 Shop Drawing Requirements

Take field measurements prior to preparation of drawings and fabrications. Provide drawings that indicate elevations of windows, full-size sections, thickness and gages of metal, fastenings, proposed method of anchoring, size and spacing of anchors, details of construction, method of glazing, details of operating hardware, mullion details, method and materials for weatherstripping, method of attaching screens, stools, casings, sills, trim, installation details, and other related items.

1.3.3 Sample Requirements

1.3.3.1 Finish Sample Requirements

Submit aluminum color chips of color coatings specified.

1.3.3.2 Window Sample Requirements

Submit one full-size corner of each window type proposed for use. Where screens or weatherstripping is required, fit sample with such items that are to be used.

1.3.4 Engineer's Qualifications and Design Data Requirements

Submit calculations to substantiate compliance with deflection requirements. A registered Professional Engineer must provide calculations.

Submit design analysis with calculations showing that the design of each different size and type of aluminum window unit and its anchorage to the structure. Calculations verifying the structural performance of each window proposed for use, under the given loads, must be prepared and signed by a registered professional engineer. Reflect the window components and anchorage devices to the structure, as determined by the design analysis, in the shop drawings. Marine Corps Base Camp Lejeune must resist a 144 mile per hour, ultimate design wind speed, 54 PSF, Risk Category II, Surface Roughness Category C, Exposure Category C lateral load. Comply with UFC 3-301-01 and ASCE 7 as applicable for building system designs and components.

1.3.5 Test Report Requirements

Submit test reports for each type of window attesting that identical windows have been tested and meet the requirements specified herein for conformance to AAMA/WDMA/CSA 101/I.S.2/A440 including test size, and minimum condensation resistance factor (CRF)..

1.3.6 Certification

Each prime window unit must bear the AAMA Label warranting that the product complies with AAMA/WDMA/CSA 101/I.S.2/A440. Certified test reports attesting that the prime window units meet the requirements of AAMA/WDMA/CSA 101/I.S.2/A440, including test size, will be acceptable in lieu of product labeling.

1.4 DELIVERY AND STORAGE

Deliver windows to project site in an undamaged condition. Use care in handling and hoisting windows during transportation and at the jobsite. Store windows and components out of contact with the ground, under a weathertight covering, so as to prevent bending, warping, or otherwise damaging the windows. Repair damaged windows to an "as new" condition as approved. If windows can not be repaired, provide a new unit.

1.5 PERFORMANCE REQUIREMENTS

1.5.1 Wind Loading Design Pressure

Design window components, including mullions, hardware, and anchors, to withstand a wind-loading design pressure of at least 54 pounds per square

foot (psf).

1.5.2 Tests

Test windows proposed for use in accordance with AAMA/WDMA/CSA 101/I.S.2/A440 for the particular type and quality window specified.

Perform tests by a nationally recognized independent testing laboratory equipped and capable of performing the required tests. Submit the results of the tests as certified laboratory reports required herein.

Minimum design load for a uniform-load structural test must be 60 psf.

Test windows in accordance with the applicable portions of the AAMA WSG.1 for air infiltration, water resistance, uniform-load deflection, and uniform-load structural test.

1.6 DRAWINGS

Submit the Fabrication Drawings for aluminum window units showing complete window assembly including hardware, weatherstripping, and subframe assembly details.

1.7 WINDOW PERFORMANCE

Aluminum windows must meet the following performance requirements. Perform testing requirements by an independent testing laboratory or agency.

1.7.1 Structural Performance

Structural test pressures on window units must be for positive load (inward) and negative load (outward). After testing, there will be no glass breakage, permanent damage to fasteners, hardware parts, support arms or actuating mechanisms or any other damage which could cause window to be inoperable. There must be no permanent deformation of any main frame, sash or ventilator member in excess of the requirements established by AAMA/WDMA/CSA 101/I.S.2/A440 for the window types and classification specified in this section.

1.7.2 Air Infiltration

Air infiltration must not exceed the amount established by AAMA/WDMA/CSA 101/I.S.2/A440 for each window type.

1.7.3 Water Penetration

Water penetration must not exceed the amount established by AAMA/WDMA/CSA 101/I.S.2/A440 for each window type.

1.7.4 Thermal Performance

Windows (including frames and glass) will be independently tested and certified with a Solar Heat Gain Coefficient (SHGC) determined according to NFRC 200 procedures and a whole window U-factor determined in accordance with NFRC 100 within the ranges as indicated below according to the ASHRAE 169 Climate Zone of the project location. Provide visual Transmittance (VT) of 0.5 or greater. Submit documentation supporting

compliance with FEMP designated, and Passive House qualifications as applicable.

1.7.4.1 South-Central Climate

Windows installed within Climate Zone 3 will have a U-Factor of 0.30 to 0.46 BTU/h·ft^2·degrees F or less and a SHGC of 0.25 or less.

1.7.5 Life Safety Criteria

Provide windows that conform to NFPA 101 Life Safety Code when rescue and/or second means of escape are indicated.

1.7.6 Windborne-Debris-Impact Performance

Exterior window system including glazing must comply with indicated basis or enhanced protection testing requirements in ASTM E1996 for Wind Zone 2, 140 MPH to 150 MPH in accordance with 1609.2.2, IBC, when tested according to ASTM E1886. Test specimens must be no smaller in width and length than glazing indicated for use on Project and must be installed in same manner as glazing indicated for use on Project.

a. Refer to drawings for classification of window requiring basic or enhanced protection.

b. Large-Missile Test: For glazing located within 30 feet of grade.

1.8 WARRANTY

Provide Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period.

PART 2 PRODUCTS

2.1 WINDOWS

Maintain visual design concepts by conforming to basic dimensions, sight lines and member profiles detailed in the Instruments of Service. Muntins are full, simulated true divided light. Provide assemblies free of rattles, vibration harmonics, wind whistles and noise resulting from thermal movement, structural movement and wind pressures. Install units and components that account for expansion and contraction of substrates encountered without loosening, weakening or fracturing connections over time. Evacuate water entering unit joints and condensation occurring within assemblies using drain holes and gutters of adequate size. Provide concealed fasteners to the greatest extent practical.

Thicknesses of aluminum sheets and extrusions, alloy and temper are determined by fabrication and assembly properties required. Minimum aluminum characteristics are not less than 22,000 PSI ultimate tensile strength and 16,000 PSI yield strength as determined by ASTM B 221. Overall profile dimensions of unit sections describe the maximum sizes permitted. Increase gauges and thicknesses to resist lateral loadings and achieve performance characteristics required.

Provide prime windows that comply with AAMA/WDMA/CSA 101/I.S.2/A440 and the requirements specified herein. In addition to compliance with AAMA/WDMA/CSA 101/I.S.2/A440, window framing members for each individual light of glass must not deflect to the extent that deflection

perpendicular to the glass light exceeds L/175 of the glass edge length when subjected to uniform loads at specified design pressures. Provide Structural calculations for deflection to substantiate compliance with deflection requirements. Provide windows of types, performance classes, performance grades, combinations, and sizes indicated or specified. Provide aluminum window frames with a minimum recycled content of 20 percent. Provide data identifying percentage of recycled content of aluminum windows. Design windows to accommodate hardware, glass, weatherstripping, screens, and accessories to be furnished. Each window must be a complete factory assembled unit with or without glass installed. Dimensions shown are minimum. Provide windows with insulating glass and thermal break necessary to achieve a minimum Condensation Resistance Factor (CRF) of 56 to 60 when tested in accordance with AAMA 1503. Provide manufacturer's standard hardware fabricated from aluminum, stainless steel, carbon steel complying with AAMA 907, or other corrosion-resistant material compatible with adjacent materials; designed to smoothly operate, tightly close, and securely lock windows, and sized to accommodate sash weight and dimensions.

2.1.1 Projected Windows (AP)

Type AP-AW- 54. Provide projected hopper windows with concealed four bar friction hinges only. Mechanically limit sash operation to prevent passage of a 4 inch sphere. Gear-type rotary hardware to comply with AAMA 901. Provide operators that function without requiring the removal of interior screens.

Provide manual clerestory window wands for high installations. Wand extenders are anodized aluminum in nominal lengths ranging from three feet to twelve feet. Furnish wands with hooked heads for sill mounted cranks. Furnish wands with angled heads for jamb mounted cranks. Furnish an adaptor for each crank to enable wand operation. Provide two wands per floor.

2.1.2 Fixed Windows (FW)

Type FW-AW- 54 (Optional Performance Grade).

2.1.3 Glass and Glazing

Materials are specified in Section 08 81 00 GLAZING.

2.1.4 Caulking and Sealing

Are specified in Section 07 92 00 JOINT SEALANTS.

2.1.5 Weatherstripping

AAMA/WDMA/CSA 101/I.S.2/A440. Provide for all ventilating (operable) sash for all windows. Provide woven wool pile weatherstripping 0.210 inch thick, conforming to AAMA 701/702, or polypropylene multifilament fiber weatherstripping installed in an integral weatherstripping groove in the sash or frame, and flexible polyvinylchloride weatherstripping installed in the sill member.

2.2 FABRICATION

Fabrication of window units must comply with AAMA/WDMA/CSA 101/I.S.2/A440.

2.2.1 Provisions for Glazing

Design windows and rabbets suitable for glass thickness specified. Design sash for outside double glazing and for securing glass with metal beads, glazing clips, glazing channels, or glazing compound. Units must accommodate 1 inch insulated glazing composites.

2.2.2 Impact Resistant Glass

Protect glazed openings in hurricane prone regions with impact resistant glass complying with ASTM E 1886 and ASTM E 1996 as amended by Section 1609.2, IBC. Reference windborne debris regions, ASCE 7.

2.2.3 Fasteners

Use window manufacturer's standard for windows, trim, and accessories. Self-tapping sheet-metal screws are not acceptable for material more than 1/16 inch thick.

2.2.4 Adhesives

Provide joint sealants as specified in Section 07 92 00 JOINT SEALANTS. For interior application of joint sealants, comply with applicable regulations regarding reduced VOC's, and as specified in Section 07 92 00 JOINT SEALANTS.

2.2.5 Drips and Weep Holes

Provide continuous drips over heads of top ventilators. Where fixed windows adjoin ventilators, drips must be continuous across tops of fixed windows. Provide drips and weep holes as required to return water to the outside.

2.2.6 Combination Windows

Windows used in combination must be factory assembled of the same class and grade. Where factory assembly of individual windows into larger units is limited by transportation considerations, prefabricate, match mark, transport, and field assemble.

2.2.7 Mullions and Transom Bars

Provide mullions with a thermal break. Secure mullions and transom bars to adjoining construction and window units in such a manner as to permit expansion and contraction and to form a weathertight joint. Provide mullion covers on the interior and exterior to completely close exposed joints and recesses between window units and to present a neat appearance. Provide special covers over structural support at mullions as indicated.

2.2.8 Accessories

Provide windows complete with necessary hardware, fastenings, clips, fins, anchors, glazing beads, and other appurtenances necessary for complete installation and proper operation.

2.2.8.1 Hardware

AAMA/WDMA/CSA 101/I.S.2/A440. The item, type, and functional characteristics must be the manufacturer's standard for the particular

window type. Provide hardware of suitable design and of sufficient strength to perform the function for which it is used. Equip all operating ventilators with a lock or latching device which can be secured from the inside.

2.2.8.2 Fasteners

Provide concealed anchors of the type recommended by the window manufacturer for the specific type of construction. Anchors and fasteners must be compatible with the window and the adjoining construction. Provide a minimum of three anchors for each jamb located approximately 6 inches from each end and at midpoint.

2.2.8.3 Window Anchors

Anchoring devices for installing windows must be made of aluminum, cadmium-plated steel, stainless steel, or zinc-plated steel conforming to AAMA/WDMA/CSA 101/I.S.2/A440.

2.2.9 Finishes

Comply with NAAMM's "Metal Finishes Manual" for applying and designating finishes. Exposed aluminum surfaces must be factory finished with an organic coating.

2.2.9.1 Organic Coating

Clean and prime exposed aluminum surfaces. Provide a high-performance finish in accordance with AAMA 2605 with total dry film thickness of not less than 1.2 mils.

Window is Bone White, AMS 595A 37875 as indicated in the Marine Corps Base Camp Lejeune, Base Exterior Architectural Plan, Camp Gieger.

2.2.10 Screens

AAMA/WDMA/CSA 101/I.S.2/A440. Provide one insect screen for each operable exterior sash or ventilator. Design screens to be rewirable, easily removable from inside the building, and to permit easy access to operating hardware. Manufacturers standard aluminum frame complying with SMA 1004 or SMA 1201. Fabricate frames with mitered or coped joints or corner extrusion, concealed fasteners and removable PVC spline/anchors concealing edge of frame.

2.2.10.1 Insect Screen

Insect screen mesh to be Aluminum wire fabric, 18x16 mesh of 0.011 inch diameter coated aluminum wire.

2.3 THERMAL-BARRIER WINDOWS

Provide thermal-barrier windows, complete with accessories and fittings, where indicated.

Specify material and construction except as follows:

a. Aluminum alloy must be 6063-T6.

b. Frame construction, including operable sash, must be factory-assembled

and factory-sealed inner and outer aluminum completely separated from metal-to-metal contact. Join assembly by a continuous, concealed, low conductance divider housed in an interlocking extrusion of the inner frame. Metal fasteners, straps, or anchors must not bridge the connection between the inner and outer frame.

c. Operating hardware for each sash must consist of spring-loaded nylon cushion blocks and pin locks designed to lock in predetermined locations.

d. Sash must be completely separated from metal-to-metal contact by means of woven-pile weatherstripping, plastic, or elastomeric separation members.

e. Operating and storm sash must be factory-glazed with the type of glass indicated and of the quality specified in Section 08 81 00 GLAZING.

2.4 MULLIONS

Provide mullions between multiple-window units where indicated.

Provide profiles for mullions and mullion covers, reinforced as required for the specified wind loading, and securely anchored to the adjoining construction. Mullion extrusion will include serrations or pockets to receive weatherstripping, sealant, or tape at the point of contact with each window flange.

Mullion assembly must include aluminum window clamps or brackets screwed or bolted to the mullion and the mullion cover.

Mullion cover must be screw-fastened to the mullion unless otherwise indicated.

Mullion reinforcing members must be fabricated of the materials specified in AAMA/WDMA/CSA 101/I.S.2/A440 and meet the specified design loading.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Method of Installation

Install in accordance with the window manufacturer's printed instructions and details. Build in windows as the work progresses or install without forcing into prepared window openings. Set windows at proper elevation, location, and reveal; plumb, square, level, and in alignment; and brace, strut, and stay properly to prevent distortion and misalignment. Protect ventilators and operating parts against accumulation of dirt and building materials by keeping ventilators tightly closed and locked to frame. Bed screws or bolts in sill members, joints at mullions, contacts of windows with sills, built-in fins, and subframes in mastic sealant of a type recommended by the window manufacturer. Install and caulk windows in a manner that will prevent entrance of water and wind. Fasten insect screens securely in place.

Any materials that show visual evidence of biological growth due to the presence of moisture must not be installed on the building project.

3.1.2 Dissimilar Materials

Where aluminum surfaces are in contact with, or fastened to masonry, concrete, wood, or dissimilar metals, except stainless steel or zinc, protect the aluminum surface from dissimilar materials as recommended in the Appendix to AAMA/WDMA/CSA 101/I.S.2/A440. Do not coat surfaces in contact with sealants after installation with any type of protective material. Do not apply coatings or lacquers to surfaces to which caulking and glazing components must adhere.

3.1.3 Anchors and Fastenings

Make provision for securing units to each other, to masonry, and to other adjoining construction. Windows installed in masonry walls must have head and jamb members designed to recess into masonry wall not less than 7/16 inch.

3.1.4 Adjustments After Installation

After installation of windows and completion of glazing and field painting, adjust all ventilators and hardware to operate smoothly and to provide weathertight sealing when ventilators are closed and locked. Lubricate hardware and operating parts as necessary. Adjust single hung windows to operate with maximum applied force of 25 pounds in either direction, not including breakaway friction force. Verify that products are properly installed, connected, and adjusted.

3.2 CLEANING

Clean interior and exterior surfaces of window units of mortar, plaster, paint spattering spots, and other foreign matter to present a neat appearance, to prevent fouling of weathering surfaces and weather-stripping, and to prevent interference with the operation of hardware. Replace all stained, discolored, or abraded windows that cannot be restored to their original condition with new windows.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 71 00

DOOR HARDWARE
02/16, CHG 4: 02/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E283	(2019) Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM F883	(2013; R 2022) Standard Performance Specification for Padlocks

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

ANSI/BHMA A156.1	(2021) Butts and Hinges
ANSI/BHMA A156.2	(2022) Bored and Preassembled Locks and Latches
ANSI/BHMA A156.3	(2020) Exit Devices
ANSI/BHMA A156.4	(2024) Door Controls - Closers
ANSI/BHMA A156.5	(2020) Cylinder and Input Devices for Locks
ANSI/BHMA A156.6	(2021) Architectural Door Trim
ANSI/BHMA A156.7	(2016) Template Hinge Dimensions
ANSI/BHMA A156.8	(2021) Door Controls - Overhead Stops and Holders
ANSI/BHMA A156.13	(2022) Mortise Locks & Latches Series 1000
ANSI/BHMA A156.16	(2023) Auxiliary Hardware
ANSI/BHMA A156.18	(2020) Materials and Finishes
ANSI/BHMA A156.21	(2019) Thresholds
ANSI/BHMA A156.22	(2021) Gasketing
ANSI/BHMA A156.30	(2014) High Security Cylinders

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(2025) Standard for Fire Doors and Other Opening Protectives
NFPA 101	(2024) Life Safety Code
NFPA 252	(2022) Standard Methods of Fire Tests of Door Assemblies

STEEL DOOR INSTITUTE (SDI/DOOR)

SDI/DOOR A250.8	(2023) Specifications for Standard Steel Doors and Frames

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines

UNDERWRITERS LABORATORIES (UL)

UL Bld Mat Dir	(updated continuously online) Building Materials Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Manufacturer's Detail Drawings; G

Verification of Existing Conditions; G

Hardware Schedule; G

Keying System; G

SD-03 Product Data

Hardware Items; G

SD-08 Manufacturer's Instructions

Installation

SD-10 Operation and Maintenance Data

Hardware Schedule Items, Data Package 1; G

SD-11 Closeout Submittals

Key Bitting

1.3 SHOP DRAWINGS

Submit manufacturer's detail drawings indicating all hardware assembly components and interface with adjacent construction. Base shop drawings on verified field measurements and include verification of existing conditions.

1.4 PRODUCT DATA

Indicate fire-ratings at applicable components. Provide documentation of ABA/ADA accessibility compliance of applicable components, as required by 36 CFR 1191 Appendix D - Technical.

1.5 HARDWARE SCHEDULE

Provide Hardware Item List and Hardware Schedule containing the following information, and additional information as needed to identify the complete make up of each hardware set and its application to each opening, as applicable:

1.5.1 Hardware Item List:

a. Hardware Type

b. Item Number

c. Quantity

d. Size(s)

e. Reference Publication / Type Number

f. Manufacturer's Name / Catalog Number

g. Key Control Symbols

h. UL Mark (If fire rated and listed)

i. BHMA Finish(es)

j. Remarks

1.5.2 Hardware Schedule

a. Hardware Set Number

b. Opening Number(s)

c. Opening Description (single/double leaf, hand, size, door/frame material)

d. Fire Rating

e. Sound Rating

f. Hardware Items

g. Quantity

h. Size

i. BHMA Finish

j. Remarks

In addition, submit hardware schedule data package 1 in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

1.6 KEY BITTING CHART REQUIREMENTS

1.6.1 Requirements

Submit key bitting charts to the Contracting Officer prior to completion of the work. Include:

a. Complete listing of all keys (e.g. AA1 and AA2).

b. Complete listing of all key cuts (AA1-123456, AA2-123458).

c. Tabulation showing which key fits which door.

d. Copy of floor plan showing doors and door numbers.

e. Listing of 20 percent more key cuts than are presently required in each master system.

1.7 QUALITY ASSURANCE

1.7.1 Hardware Manufacturers and Modifications

Provide, as far as feasible, locks, hinges and closers of one lock, hinge or closer manufacturer's make. Modify hardware as necessary to provide features indicated or specified.

1.7.2 Key Shop Drawings Coordination Meeting

Prior to the submission of the key shop drawing, the Contracting Officer, Contractor, Door Hardware Subcontractor, using Activity and Base Locksmith must meet to discuss and coordinate key requirements for the facility. Confirm keyways utilized and provide compatible cylinders and cores. Confirm hardware set components and functions. Provide knob trim where scheduled, similar to Best knob 4 and rose C.

Coordinate with the Camp Lejeune Base Locksmith to resolve keying, procurement, shipping and installation procedures.

1.8 DELIVERY, STORAGE, AND HANDLING

Deliver hardware in original individual containers, complete with necessary appurtenances including fasteners and instructions. Mark each individual container with the item number as shown on hardware schedule. Deliver permanent keys and removable cores to the Contracting Officer, either directly or by certified mail.

PART 2 PRODUCTS

2.1 TEMPLATE HARDWARE

Hardware applied to doors must be manufactured using a template. Provide templates to door and frame manufacturers in accordance with ANSI/BHMA A156.7 for template hinges. Coordinate hardware items to prevent interference with other hardware.

2.2 HARDWARE FOR FIRE DOORS AND EXIT DOORS

Provide all hardware necessary to meet the requirements of NFPA 80 for fire doors, NFPA 101 for exit doors, NFPA 252 for fire tests of door assemblies, ABA/ADA accessibility requirements, and all other requirements indicated, even if such hardware is not specifically mentioned in paragraph HARDWARE SCHEDULE. Provide Underwriters Laboratories, Inc. labels for such hardware in accordance with UL Bld Mat Dir or equivalent labels in accordance with another testing laboratory approved in writing by the Contracting Officer.

2.3 HARDWARE ITEMS

Clearly and permanently mark with the manufacturer's name or trademark, hinges, locks, latches, exit devices, bolts and closers where the identifying mark is visible after the item is installed. For closers with covers, the name or trademark may be beneath the cover.

2.3.1 Hinges

Provide in accordance with ANSI/BHMA A156.1. Provide hinges that are 4-1/2 by 4-1/2 inch unless otherwise indicated. Construct loose pin hinges for interior doors and reverse-bevel exterior doors so that pins are non-removable when door is closed. Other anti-friction bearing hinges may be provided in lieu of ball bearing hinges.

2.3.2 Locks and Latches

a. At exterior locations provide locksets of full stainless steel type 302 or 304 construction including fronts, strike, escutcheons, knobs, bolts and all interior working parts. Marine Grade I, fully non-ferrous.

b. In non-air-conditioned interior environments or humid interior environments, provide interior locksets of the same Marine Grade I, fully non-ferrous as exterior locksets.

2.3.2.1 Bored Locks and Latches

Provide in accordance with ANSI/BHMA A156.2, Series 4000, Grade 1.

2.3.3 Exit Devices

Provide in accordance with ANSI/BHMA A156.3, Grade 1. Provide adjustable strikes for rim type and vertical rod devices on single leaf doors. Provide open back strikes for pairs of doors with mortise and vertical rod devices. Provide touch bars in lieu of conventional crossbars and arms.

Surface applied vertical rod exit and rim devices are UL listed and comply with ANSI/BHMA A156.3, Grade 1. Device touchbar, rail and cover

assemblies are heavy gauge, solid wrought material. Provide fire rated assemblies for labeled applications. Non fire rated units have hex key dogging as a standard feature. Surface mounted vertical rod devices have stainless steel pullman type latchbolts with 0.5 inch throw at the top and round slide bolts at the bottom. Rim devices are a pullman type with a 0.75 inch throw and fabricated of stainless steel. Devices are deadlocking latchbolts with 0.75 inch throw where applicable.

2.3.4 Cylinders and Cores

Provide cylinders and cores for new locks, including locks provided under other sections of this specification. Provide cylinders and cores with seven pin tumblers. Provide cylinders from the products of one manufacturer, and provide cores from the products of one manufacturer. Rim cylinders, mortise cylinders, knobs and levers of bored locksets have interchangeable cores which are removable by special control keys. Stamp each interchangeable core with a key control symbol in a concealed place on the core.

2.3.4.1 High Security Cylinders

Provide in accordance with ANSI/BHMA A156.30, security level A for all high security cylinder components. BEQ cylinders and cores at Camp Lejeune utilize an M Keyway as manufactured by Best, www.bestaccess.com with seven pins.

2.3.5 Keying System

Provide a grand master keying system for each building. Provide master keying for each BEQ floor. Locks have interchangeable cores. Provide construction interchangeable cores. Provide key cabinet as specified.

2.3.6 Lock Trim

Provide cast, forged, or heavy wrought construction and commercial plain design for lock trim.

2.3.6.1 Knobs and Roses

Provide knobs as indicated in the Hardware Schedule in accordance with ANSI/BHMA A156.2 and ANSI/BHMA A156.13 for knobs, roses, and escutcheons. For unreinforced knobs, roses, and escutcheons, provide a 0.050 inch thickness. For reinforced knobs, roses, and escutcheons, provide an outer shell thickness of 0.035 inch and a combined total thickness of 0.070 inch, except at knob shanks. Provide knob shanks 0.060 inch thick.

2.3.6.2 Lever Handles

Provide lever handles where indicated in the Hardware Schedule. Provide in accordance with ANSI/BHMA A156.3 for mortise locks of lever handles for exit devices. Provide lever handle locks with a breakaway feature (such as a weakened spindle or a shear key) to prevent irreparable damage to the lock when force in excess of that specified in ANSI/BHMA A156.13 is applied to the lever handle. Provide lever handles return to within 1/2 inch of the door face.

2.3.7 Keys

Furnish one file key, one duplicate key, and one working key for each key change and for each master and grand master keying system. Furnish one additional working key for each lock of each keyed-alike group. Furnish two additional keys for each sleeping room. Furnish construction keys, and control keys for removable cores. Furnish a quantity of key blanks equal to 20 percent of the total number of file keys. Stamp each key with appropriate key control symbol and "U.S. property - do not duplicate." Do not place room number on keys.

2.3.8 Door Bolts

Provide in accordance with ANSI/BHMA A156.16. Provide dustproof strikes for bottom bolts, except at doors having metal thresholds. Provide automatic latching flush bolts in accordance with ANSI/BHMA A156.3, Type 25.

2.3.9 Closers

Provide in accordance with ANSI/BHMA A156.4, Series C02000, Grade 1, with PT 4C. Provide with brackets, arms, mounting devices, fasteners, full metal covers and other features necessary for the particular application. Size closers in accordance with manufacturer's printed recommendations, or provide multi-size closers, Sizes 1 through 6, and list sizes in the Hardware Schedule. Provide manufacturer's 10 year warranty.

Use stainless steel inside bracketed or door mounted closers on exterior doors. On interior doors use closers of 302 or 304 stainless steel or non-ferrous materials. On surface-mounted closers use or apply rust inhibiting finish on all ferrous parts.

2.3.9.1 Closer

Non handed, surface applied door closers are UL listed and comply with ANSI/BHMA A156.4, Grade 1. Closers comply with barrier free accessibility requirements. Units have spring power and backcheck positioning adjustments. The backcheck function prevents uncontrolled door opening by automatically adjusting resistance in proportion to door opening speeds. Resistance is unnoticeable for slowly opened doors; however, the backcheck fully engages when doors are opened forcefully. Two separate temperature sensing, non critical adjustment valves control sweep and latch closing speeds. A parallel arm by flat form type is typical unless substrates encountered require otherwise. Maximum door opening ranges from 100 degrees to 180 degrees depending on arm configuration. Closers have a full metal cover.

2.3.9.2 Track Arm Closer

Non handed, surface applied, track arm door closers are UL listed and comply with ANSI/BHMA A156.4, Grade 1. Closers comply with barrier free accessibility requirements. Closers have steel cams, rollers and adjustable spring combined with track arm assemblies. Units have hydraulic delayed action, spring power and backcheck positioning adjustments. Hold open functions are adjustable for opening degree and force. Spring stop track arms assist in door stopping and opening degree is field selectable. Two separate temperature sensing, non critical adjustment valves control sweep and latch closing speeds. Maximum door opening ranges from 110 degrees to 175 degrees depending on arm

configuration.

2.3.9.3 Identification Marking

Engrave each closer with manufacturer's name or trademark, date of manufacture, and manufacturer's size designation in locations that will be visible after installation.

2.3.10 Overhead Holders

Overhead door holders have a stop function limiting the degree of door swing while providing a cushioned stop, and a slot screw operated hold open function. Holders comply with ANSI/BHMA A156.8, Grade 1. Extruded track channels are aluminum, slide blocks are solid brass and steel arms are zinc plated. A soffit plate and parallel arm bracket link power transfer between doors and frames. Door openings are held in 5 degree increments ranging from 85 through 110 degrees of swing.

2.3.11 Door Protection Plates

Provide in accordance with ANSI/BHMA A156.6.

Push, pull, kick and mop plates are 0.050 inches in thickness with square corners, four beveled edges and countersunk screw holes.

2.3.11.1 Sizes of Plates

2 inch less than door width for single doors; 1 inch less than door width for pairs of doors. Provide 8 inch kick plates for flush doors. Provide 4 inch mop plates.

2.3.12 Door Stops and Silencers

Provide in accordance with ANSI/BHMA A156.16. Silencers Type L03011. Provide three silencers for each single door, two for each pair. Silencers are rubber.

2.3.13 Padlocks

Provide in accordance with ASTM F883. Padlock case is machined from solid extruded brass with satin brass, 606 finish. Case dimensions are 1.78125 inches wide by 2.0625 inches tall by 0.1825 inches deep. Case accepts a SFIC with key retained while unlocked. The stainless steel shackle is 0.3125 inches in diameter and locks at both heel and toe. The length of shackle opening is measured from the case top to shackle underside when locked. Shackle opening dimensions are 0.875 inches wide by 1.5 inches tall. Furnish a 9 inch bronze chain with clevis and molded PVC weather cover.

2.3.14 Thresholds

Provide in accordance with ANSI/BHMA A156.21. Use J35100, with vinyl or silicone rubber insert in face of stop, for exterior doors opening out, unless specified otherwise.

2.3.15 Weatherstripping Gasketing

Provide in accordance with ANSI/BHMA A156.22. Provide the type and function designation where specified in paragraph HARDWARE SCHEDULE.

Provide a set to include head and jamb seals, sweep strips, and, for pairs of doors, astragals. Air leakage of weatherstripped doors not to exceed 1.25 cubic feet per minute of air per square foot of door area when tested in accordance with ASTM E283. Provide weatherstripping with one of the following:

2.3.15.1 Extruded Aluminum Retainers

Extruded aluminum retainers not less than 0.050 inch wall thickness with vinyl, neoprene, silicone rubber, or polyurethane inserts. Provide clear (natural) anodized aluminum.

2.3.16 Rain Drips

Provide in accordance with ANSI/BHMA A156.22. Provide extruded aluminum rain drips, not less than 0.08 inch thick, clear anodized finish. Provide rain drips with a 2 inch overlap on each side of each exterior door that is not protected by an awning, roof, eave or other horizontal projection. Set drips in sealant and fasten with stainless steel screws.

2.3.16.1 Overhead Rain Drips

Approximately 1-1/2 inch high by 2-1/2 inch projection. Align bottom with door frame rabbet.

2.3.17 Special Tools

Provide special tools, such as spanner and socket wrenches and dogging keys, as required to service and adjust hardware items.

2.4 FASTENERS

Provide fasteners of type, quality, size, and quantity appropriate to the specific application. Fastener finish to match hardware. Provide stainless steel fasteners in locations exposed to weather. Verify metals in contact with one another are compatible and will avoid galvanic corrosion when exposed to weather.

2.5 FINISHES

Provide in accordance with ANSI/BHMA A156.18. Provide hardware in BHMA 630 finish (satin stainless steel), unless specified otherwise. Provide hinges in stainless steel with BHMA 630 finish. Furnish exit devices in BHMA 630 finish. Match exposed parts of closers to lock and door trim.

2.6 KEY CABINET AND CONTROL SYSTEM

Provide in accordance with ANSI/BHMA A156.5. Type required to yield a capacity (number of hooks) 50 percent greater than the number of key changes used for door locks.

PART 3 EXECUTION

3.1 INSTALLATION

Provide hardware in accordance with manufacturers' printed installation instructions. Provide machine screws set in expansion shields for fastening hardware to solid concrete and masonry surfaces. Provide toggle bolts where required for fastening to hollow core construction. Provide

through bolts where necessary for satisfactory installation.

3.1.1 Weatherstripping Installation

Provide full contact, weathertight seals that allow operation of doors without binding the weatherstripping.

3.1.1.1 Stop Applied Weatherstripping

Fasten in place with color matched sheet metal screws not more than 9 inch on center after doors and frames have been finish painted.

3.1.2 Threshold Installation

Extend thresholds the full width of the opening and notch end for jamb stops. Set thresholds in a full bed of sealant and anchor to floor with cadmium-plated, countersunk, steel screws in expansion sleeves. For aluminum thresholds placed on top of concrete surfaces, coat the underside surfaces that are in contact with the concrete with fluid applied waterproofing as a separation measure prior to placement.

3.2 FIRE DOORS AND EXIT DOORS

Provide hardware in accordance with NFPA 80 for fire doors, NFPA 101 for exit doors, and NFPA 252 for fire tests of door assemblies.

3.3 HARDWARE LOCATIONS

Provide in accordance with SDI/DOOR A250.8, unless indicated or specified otherwise.

a. Kick Plates: Push side of single-acting doors.

b. Mop Plates: Bottom flush with bottom of door.

3.4 KEY CABINET AND CONTROL SYSTEM

Locate where directed. Tag one set of file keys and one set of duplicate keys. Place other keys in appropriately marked envelopes, or tag each key. Provide complete instructions for setup and use of key control system. On tags and envelopes, indicate door and room numbers or master or grand master key.

3.5 FIELD QUALITY CONTROL

After installation, protect hardware from paint, stains, blemishes, and other damage until acceptance of work. Submit notice of testing 15 days before scheduled, so that testing can be witnessed by the Contracting Officer. Adjust hinges, locks, latches, bolts, holders, closers, and other items to operate properly. Demonstrate that permanent keys operate respective locks, and give keys to the Contracting Officer. Correct, repair, and finish errors in cutting and fitting and damage to adjoining work.

3.6 HARDWARE SETS

Provide selected hardware items for other sections under this section. Deliver Hardware templates and hardware, except field applied hardware, to manufacturers for use in fabricating doors and frames.

3.7 Door Hardware Schedule

Location of Hardware Sets	HWS
Section 08 33 13, Coiling Counter Doors	22
Section 08 33 24, Aluminum Overhead Coiling Doors	23
Section 08 33 25, Stainless Overhead Coiling Doors	24
Section 08 71 00, Door Hardware	1-21
Section 32 31 14, High Security Fences & Gates	25

BB = Ball Bearing; CD = Cylinder Dogging; EDF = Exit Device Function; FMC = Full Metal Cover; HT = Hospital Tip; MIL = Mill Finished Aluminum; NRP = Non Removable Pin; LHR = Left Hand Reverse; RHR = Right Hand Reverse; SFIC = Small Format Interchangeable Core

HARDWARE SETS

<BLD>Heavy Duty Exterior Openings</BLD>

```
Door 101-C
HWS-1  Ext Corridor EDF Entrance Pair
                    1 each Removable Steel Mullion, Type 22              600
   Best             1 each Mortise Cylinder Housing, F25, E09251         630
   Best             1 each 7 Pin SFIC, F24, E09241                       630
                    8 each BB 4.5 x 4.5 Butt Hinge, NRP, A5111           630
                    2 each FMC Closer, C02231 with                       630
                     spring stop, stop mounted slide track arm
                     push side mount
      Active Leaf RHR
                    1 each Exit Device w/ Pull, EDF03                    630
                      Type 4, A x CD, entry by keyed trim,
                      public use by cylinder dogging function
   Best             1 each Rim Cylinder Housing, F26                     630
   Best             1 each 7 Pin SFIC, F24, E09241                       630
                    1 each 84" Brush Astragal                          Black
Section 08 11 13    1 each Flat Overlapping Astragal             Galvanealed
      Inactive Leaf LHR
                    1 each Exit Device w/ Pull, EDF02                    630
                      Type 4, A x CD, exit only, public use by
                      cylinder dogging function
                      no cylinder
                    1 each 88" Drip Ledge                                MIL
                    1 each 7070 Weatherstrip                             MIL
                    2 each 42" Bottom Sweep with Drip                    MIL
                    1 each 84" Threshold, J35100                         MIL
                    2 each Floor Stop, L02131                            626

Door 117
HWS-2  Ext Corridor EDF Entrance Pair
                    1 each Removable Steel Mullion, Type 22              600
   Best             1 each Mortise Cylinder Housing, F25, E09251         630
   Best             1 each 7 Pin SFIC, F24, E09241                       630
                    6 each BB 4.5 x 4.5 Butt Hinge, NRP, A5111           630
                    2 each FMC Closer, C02231 with                       630
                      spring stop, stop mounted slide track arm
```

```
                        push side mount
        Active Leaf RHR
                      1 each Exit Device w/ Pull, EDF03                    630
                        Type 4, B x CD, entry by keyed trim,
                        public use by cylinder dogging function
    Best              1 each Rim Cylinder Housing, F26                     630
    Best              1 each 7 Pin SFIC, F24, E09241                       630
                      1 each 84" Brush Astragal                          Black
  Section 08 11 13    1 each Flat Overlapping Astragal             Galvanealed
        Inactive Leaf LHR
                      1 each Exit Device w/ Pull, EDF02                    630
                        Type 4, B x CD, exit only, public use by
                        cylinder dogging function
                        no cylinder
                      1 each 76" Drip Ledge                                MIL
                      1 each 6070 Weatherstrip                             MIL
                      2 each 36" Bottom Sweep with Drip                    MIL
                      1 each 72" Threshold, J35100                         MIL
                      2 each Floor Stop, L02131                            626

  Door 108
  HWS-3  Exterior Pair Elec > 800 Amps
                      6 each BB 4.5 x 4.5 HT Butt, NRP, A5111              630
                      2 each Overhead Door Holder, C02511                  626
                        stop mounted slide track arm, push side mount
        Active Leaf RHR
                      1 each Exit Device w/ Knob, EDF03                    630
                        Type 5, B, entry by keyed trim, key removable
                        when locked
    Best              1 each Rim Cylinder Housing, F26                     630
    Best              1 each 7 Pin SFIC, F24, E09241                       630
                      1 each 84" Brush Astragal                          Black
  Section 08 11 13    1 each Flat Overlapping Astragal             Galvanealed
        Inactive Leaf LHR
                      2 each 12" Lever Ext Flush Bolt, L14251              626
                      1 each Dust Proof Strike, L04021                     626
                      1 each 76" Drip Ledge                                MIL
                      1 each 6070 Weatherstrip                             MIL
                      2 each 36" Bottom Sweep with Drip                    MIL
                      1 each 72" Threshold, J35100                         MIL
                      2 each Floor Stop, L02131                            626
  Note:  Trim is to have an abrasive texture to indicate a potentially
  hazardous environment to the blind

  Note:  Out swinging BEQ doors

  Door 123A-B, 123B-B, 208A-B, 208B-B, 308A-B, 308B-B
  HWS-4   Exterior Pair Elec/Mech/Tel Com
                      6 each BB 4.5 x 4.5 HT Butt, NRP, A5111              630
                      2 each Overhead Door Holder, C02511                  626
                        stop mounted slide track arm, push side mount
        Active Leaf RHR
                      1 each Knob Storeroom, F86                           630
    Best              1 each 7 Pin SFIC, F24, E09241                       630
                      1 each 84" Brush Astragal                          Black
  Section 08 11 13    1 each Flat Overlapping Astragal             Galvanealed
        Inactive Leaf LHR
                      2 each 12" Lever Ext Flush Bolt, L14251              626
                      1 each Dust Proof Strike, L04021                     626
```

	1 each 76" Drip Ledge	MIL
	1 each 6070 Weatherstrip	MIL
	2 each 36" Bottom Sweep with Drip	MIL
	1 each 72" Threshold, J35100	MIL
	2 each Floor Stop, L02131	626

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Note: Provide 6 foot, 4 inch safety chains attached to the frame interior for mechanical loft accesses without landings. Provide 4 foot, 0 inch chains for each door with one end attached to the upper leaf, latch corner and the other end attached to the frame interior, middle hinge height to pull doors closed from the inside

Note: Out swinging BEQ doors

Door No. 515A
HWS-5 Exterior Elec/Mech/Tel Com

	3 each BB 4.5 x 4.5 HT Butt, NRP, A5111	630
	1 each Overhead Door Holder, C02511 stop mounted slide track arm, push side mount	626
	1 each Knob Storeroom, F86	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 40" Drip Ledge	MIL
	1 each 3070 Weatherstrip	MIL
	1 each 36" Bottom Sweep with Drip	MIL
	1 each 36" Threshold, J35100	MIL
	1 each Floor Stop, L02131	626

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Note: Out swinging BEQ doors

Door No. 116-B
HWS-6 Ext Laundry EDF Egress

	3 each BB 4.5 x 4.5 HT Butt, NRP, A5111	630
	1 each FMC Closer, C02231 with spring stop, stop mounted slide track arm push side mount	630
	1 each Exit Device w/ Knob, EDF03 Type 4, B, entry by keyed trim, key removable when locked	630
Best	1 each Rim Cylinder Housing, F26	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 8 x 34 Beveled Kick Plate, J102	630
	1 each 40" Drip Ledge	MIL
	1 each 3070 Weatherstrip	MIL
	1 each 36" Bottom Sweep with Drip	MIL
	1 each 36" Threshold, J35100	MIL
	1 each Floor Stop, L02131	626

Note: Out swinging BEQ doors

Heavy Duty Rated Exterior Openings

Door No. 129A, 129B, 214A, 214B, 314A, 314B
HWS-7 Ext Sleeping Bunk EDF Pair, 45 Min

	1 each Removable Steel Mullion, Type 22	600
Best	1 each Mortise Cylinder Housing, F25, E09251	630
Best	1 each 7 Pin SFIC, F24, E09241	630

	6 each	BB 4.5 x 4.5 HT Butt, NRP, A5111	630
	2 each	FMC Closer, C02231 with spring stop, stop mounted slide track arm push side mount	630
Active Leaf RHR			
	1 each	Exit Device w/ Pull, EDF03 Type 4, B, entry by keyed trim, key removable when locked	630
Best	1 each	Rim Cylinder Housing, F26	630
Best	1 each	7 Pin SFIC, F24, E09241	630
	1 each	84" Brush Astragal and Category B Edge Seal, UL 10C	Black
Section 08 11 13	1 each	Flat Overlapping Astragal	Galvanealed
Inactive Leaf LHR			
	1 each	Exit Device w/ Pull, EDF02 Type 4, B, exit only no cylinder	630
	1 each	76" Drip Ledge	MIL
	1 each	6070 Weatherstrip	MIL
	1 each	6070 Category B Edge Seal, UL 10C	Charcoal
	2 each	36" Bottom Sweep with Drip	MIL
	1 each	72" Threshold, J35100	MIL
	2 each	Floor Stop, L02131	626

Heavy Duty Non Rated Openings

Door No. 106, 126B
HWS-8 Elec/Mech/Tel Com

	3 each	BB 4.5 x 4.5 HT Butt, A5111	630
	1 each	FMC Closer, C02021	630
	1 each	Knob Storeroom, F86	630
Best	1 each	7 Pin SFIC, F24, E09241	630
	3 each	Silencer, L03011	Grey
	1 each	Wall Stop, L02251 or Floor Stop, L02161	626

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Note: Out swinging BEQ doors

Door No. 111, 126A, 211A, 211B, 311A, 311B
HWS-9 Suite, Office Storage

	3 each	BB 4.5 x 4.5 HT Butt, A5111	630
	1 each	Knob Storeroom, F86	630
Best	1 each	7 Pin SFIC, F24, E09241	630
	3 each	Silencer, L03011	Grey
	1 each	Wall Stop, L02251 or Floor Stop, L02161	626

Heavy Duty Smoke Rated Openings

Door No. 104, 119, 123A-A, 123B-A, 208A-A, 208B-A, 202, 308A-A, 308B-A
HWS-10 Elec/Mech/Tel Com, Smoke, 20 Min

	3 each	BB 4.5 x 4.5 HT Butt, A5111	630
	1 each	FMC Closer, C02021	630
	1 each	Knob Storeroom, F86	630
Best	1 each	7 Pin SFIC, F24, E09241	630
	1 each	3070 Category B Edge Seal, UL 10C	Charcoal
	1 each	Wall Stop, L02251 or	626

Floor Stop, L02161

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Door No. 121A, 121B, 206A, 206B, 306A, 306B
HWS-11 Gang Head, Smoke, 20 Minutes Rtg

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02021	630
	1 each Knob Passage, F75	630
	no SFIC	
	1 each 8 x 34 Beveled Kick Plate, J102	630
	1 each 4 x 34 Beveled Mop Plate, J103	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or	626
	Floor Stop, L02161	

Door No. 105, 107
HWS-12 Head, Shower, Smoke, 20 Min Rtg

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02021	630
	1 each Knob Privacy, F76	630
	no SFIC	
	1 each 8 x 34 Beveled Kick Plate, J102	630
	1 each 4 x 34 Beveled Mop Plate, J103	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or	626
	Floor Stop, L02161	

Door No. 122A, 122B, 207A, 207B, 307A, 307B
HWS-13 Janitor, Smoke, 20 Minute Rating

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02021	630
	1 each Knob Storeroom, F86	630
	1 each 7 Pin SFIC, F24, E09241	630
	1 each 8 x 34 Beveled Kick Plate, J102	630
	1 each 4 x 34 Beveled Mop Plate, J103	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or	626
	Floor Stop, L02161	

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Door No. 112
HWS-14 Suite, Smoke, 20 Minute Rating

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02211 with	630
	spring stop, jamb mounted slide track arm	
	pull side mount	
	1 each Knob Entry, F109	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or	626
	Floor Stop, L02161	

Note: In swinging BEQ doors

Door No. 102, 113, 114, 115, 124A, 124B, 125A, 125B, 209A, 209B, 210A, 210B, 309A, 309B, 310A, 310B
HWS-15 Office, Duty, Smoke, 20 Min Rating

	3 each BB 4.5 x 4.5 HT Butt, A5111	630

	1 each FMC Closer, C02021	630
	1 each Knob Entry, F109	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or Floor Stop, L02161	626

Door No. 120A, 120B
HWS-16 Sleeping Bunk Room, Smoke, 20 Min

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02021	630
	1 each Knob Passage, F75	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or Floor Stop, L02161	626

Door No. 118, 204, 302, 304
HWS-17 Storage, Smoke, 20 Minute Rating

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02021	630
	1 each Knob Storeroom, F86	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or Floor Stop, L02161	626

Door No. 101-A, 101-B, 201-A, 201-B, 301-A, 301-B
HWS-18 Mid Corridor EDF, Smoke, 20 Min

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02231 with spring stop, stop mounted slide track arm push side mount	630
	1 each Exit Device w/ Knob, EDF23 Type 4, B, always active for public use, no cylinder	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or Floor Stop, L02161	626

Heavy Duty 45 Minute Rated Openings

Door No. 110
HWS-19 Elec/Mech/Tel Com/Chase, 45 Min

	3 each BB 4.5 x 4.5 HT Butt, A5111	630
	1 each FMC Closer, C02231 with spring stop, stop mounted slide track arm push side mount	630
	1 each Knob Storeroom, F86	630
Best	1 each 7 Pin SFIC, F24, E09241	630
	1 each 3070 Category B Edge Seal, UL 10C	Charcoal
	1 each Wall Stop, L02251 or Floor Stop, L02161	626

Note: Trim is to have an abrasive texture to indicate a potentially hazardous environment to the blind

Note: Out swinging BEQ doors

Door No. 116-A

HWS-20	Laundry, 45 Minute Rating		
	3 each	BB 4.5 x 4.5 HT Butt, A5111	630
	1 each	FMC Closer, C02211 with spring stop, jamb mounted slide track arm pull side mount	630
Dorma	1 each	Knob Classroom, F84	630
Best	1 each	7 Pin SFIC, F24, E09241	630
	1 each	8 x 34 Beveled Kick Plate, J102	630
	1 each	3070 Category B Edge Seal, UL 10C	Charcoal
	1 each	Wall Stop, L02251 or Floor Stop, L02161	626

Note: In swinging BEQ doors

Heavy Duty 1 Hour Rated Openings

Door No. 103, 203, 303

HWS-21	Stair, 1 Hour Rating		
	3 each	BB 4.5 x 4.5 HT Butt, A5111	630
	1 each	FMC Closer, C02021	630
	1 each	Knob Passage, F75 no SFIC	630
	1 each	8 x 34 Beveled Kick Plate, J102	630
	1 each	3070 Category B Edge Seal, UL 10C	Charcoal
	1 each	Wall Stop, L02251 or Floor Stop, L02161	626

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 81 00

GLAZING
05/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 800	(2016) Voluntary Specifications and Test Methods for Sealants

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z97.1	(2015) Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test

ASTM INTERNATIONAL (ASTM)

ASTM C509	(2006; R 2021) Standard Specification for Elastomeric Cellular Preformed Gasket and Sealing Material
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM C1021	(2008; R 2014) Standard Practice for Laboratories Engaged in Testing of Building Sealants
ASTM C1036	(2021) Standard Specification for Flat Glass
ASTM C1048	(2018) Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass
ASTM C1087	(2016) Standard Test Method for Determining Compatibility of Liquid-Applied Sealants with Accessories Used in Structural Glazing Systems
ASTM C1281	(2016) Standard Specification for Preformed Tape Sealants for Glazing Applications
ASTM D395	(2016; E 2017) Standard Test Methods for Rubber Property - Compression Set
ASTM D2287	(2019) Nonrigid Vinyl Chloride Polymer and Copolymer Molding and Extrusion Compounds

ASTM E1300	(2016) Standard Practice for Determining Load Resistance of Glass in Buildings
ASTM E1886	(2019) Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials
ASTM E1996	(2017) Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes

GLASS ASSOCIATION OF NORTH AMERICA (GANA)

GANA Glazing Manual	(2008) Glazing Manual
GANA Sealant Manual	(2008) Sealant Manual
GANA Standards Manual	(2008) Engineering Standards Manual

INSULATING GLASS MANUFACTURERS ALLIANCE (IGMA)

IGMA TB-3001	(2001) Guidelines for Sloped Glazing
IGMA TM-3000	(1990; R 2016) North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial & Residential Use

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

16 CFR 1201	Safety Standard for Architectural Glazing Materials

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Insulating Glass

Glazing Accessories

Sealants

Joint Backer

Rated Glazing

SD-04 Samples

Insulating Glass

Glazing Tape

Sealing Tapes

SD-08 Manufacturer's Instructions

Setting and Sealing Materials

Glass Setting

SD-11 Closeout Submittals

Warranty for Insulated Glass Units

1.3 SYSTEM DESCRIPTION

Fabricate and install watertight and airtight glazing systems to withstand thermal movement and wind loading without glass breakage, gasket failure, deterioration of glazing accessories, or defects in the work. Glazed panels must comply with the safety standards, in accordance with ANSI Z97.1, and comply with indicated wind/snow loading in accordance with ASTM E1300.

1.4 QUALITY CONTROL

Submit two 8 by 10 inch samples of each of the following: tinted glass and insulating glass units.

1.5 DELIVERY, STORAGE, AND HANDLING

Deliver products to the site in unopened containers, labeled plainly with manufacturers' names and brands. Store glass and setting materials in safe, enclosed dry locations and do not unpack until needed for installation. Handle and install materials in a manner that will protect them from damage.

1.6 ENVIRONMENTAL REQUIREMENTS

Do not start glazing work until the outdoor temperature is above40 degrees F and rising, unless procedures recommended by the glass manufacturer and approved by the Contracting Officer are made to warm the glass and rabbet surfaces. Provide ventilation to prevent condensation of moisture on glazing work during installation. Do not perform glazing work during damp or rainy weather.

1.7 WARRANTY

1.7.1 Warranty for Insulated Glass Units

Warranty insulating glass units against development of material obstruction to vision (such as dust, fogging, or film formation on the inner glass surfaces) caused by failure of the hermetic seal, other than through glass breakage, for a 10-year period following acceptance of the work. Provide new units for any units failing to comply with terms of this warranty within 45 working days after receipt of notice from the

Government.

PART 2 PRODUCTS

2.1 GLASS

ASTM C1036, unless specified otherwise. In doors and sidelights, provide safety glazing material conforming to 16 CFR 1201.

2.1.1 Clear Glass

For interior glazing (i.e., pass and observation windows), 1/4 inch thick, tempered, Clear glass should be used.

2.1.2 Tempered Glass

ASTM C1048, Kind FT (fully tempered), Condition A (uncoated), Type I, Class 2 (tinted heat absorbing), Quality q3, 0.25 inch thick, 0.25 percent shading coefficient conforming to ASTM C1048 and GANA Standards Manual. Color must be Clear or Gray as scheduled.

2.1.3 Rated Glazing

Rated glazing is a clear, wireless ceramic type listed for use in non impact locations with fire ratings ranging from 0.33 to 3.0 Hours. Glazing passes the hose stream test and positive pressure test standards. Each lite bears a permanent, factory applied UL label. Typical glazing thickness is 0.1875 inches, with visible transmission of 88% and visible reflection of 9%.

2.2 INSULATING GLASS UNITS

Glazing for exterior windows is a 1 inch insulated glass composite consisting of an exterior layer of 0.25 thick, tinted, tempered glass; 0.5 inch air space; and an interior layer of 0.25 inch thick, Clear, laminated annealed float glass with a 0.25 SHGC and U-value of 0.30 or better. Laminated float glass is an 0.125 inch thick glass with 0.030 inch vinyl interlayer and 0.125 inch thick glass composite with Solar E coating on Surface 3. Tinting requires heat strengthened glass complying with ASTM C1048. Glazing is large missile, impact resistant glass complying with ASTM E1886 and ASTM E1996.

Exterior glass tinting is Gray.

2.3 SETTING AND SEALING MATERIALS

Provide as specified in the GANA Glazing Manual, IGMA TM-3000, IGMA TB-3001, and manufacturer's recommendations, unless specified otherwise herein. Do not use metal sash putty, nonskinning compounds, nonresilient preformed sealers, or impregnated preformed gaskets. Materials exposed to view and unpainted must be gray or neutral color. Sealant testing must be performed by a testing agency qualified according to ASTM C1021.

Submit glass manufacturer's recommendations for setting and sealing materials and for installation of each type of glazing material specified.

2.3.1 Sealants

Provide elastomeric sealants.

2.3.1.1 Elastomeric Sealant

ASTM C920, Type S, Grade NS, Class 12.5, Use G. Use for channel or stop glazing metal sash. Sealants must be chemically compatible with setting blocks, edge blocks, and sealing tapes, with sealants used in manufacture of insulating glass units. Color of sealant must be white.

2.3.2 Joint Backer

Joint backer must have a diameter size at least 25 percent larger than joint width; type and material as recommended in writing by glass and sealant manufacturer.

2.3.3 Glazing Tapes

2.3.3.1 Back-Bedding Mastic Glazing Tapes

Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:

a. AAMA 804.3 tape, where indicated.

b. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.

c. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.

2.3.4 Sealing Tapes

Preformed, semisolid, PVC-based material of proper size and compressibility for the particular condition, complying with ASTM D2287. Use only where glazing rabbet is designed for tape and tape is recommended by the glass or sealant manufacturer. Provide spacer shims for use with compressible tapes. Tapes must be chemically compatible with the product being set.

2.3.5 Setting Blocks and Edge Blocks

Closed-cell neoprene setting blocks must be dense extruded type conforming to ASTM C509 and ASTM D395, Method B, Shore A durometer between 70 and 90. Edge blocking must be Shore A durometer of 50 (plus or minus 5). Provide silicone setting blocks when blocks are in contact with silicone sealant. Profiles, lengths and locations must be as required and recommended in writing by glass manufacturer. Block color must be black.

2.3.6 Accessories

Provide as required for a complete installation, including glazing points, clips, shims, angles, beads, and spacer strips. Provide noncorroding metal accessories. Provide primer-sealers and cleaners as recommended by the glass and sealant manufacturers. Use ASTM C1087 to determine whether priming and other specific joint preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to surface.

PART 3 EXECUTION

Any materials that show visual evidence of biological growth due to the presence of moisture must not be installed on the building project.

3.1 PREPARATION

Preparation, unless otherwise specified or approved, must conform to applicable recommendations in the GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, IGMA TM-3000, and manufacturer's recommendations. Determine the sizes to provide the required edge clearances by measuring the actual opening to receive the glass. Grind smooth in the shop glass edges that will be exposed in finish work. Leave labels in place until the installation is approved, except remove applied labels on insulating glass units as soon as glass is installed. Securely fix movable items or keep in a closed and locked position until glazing compound has thoroughly set.

3.2 GLASS SETTING

Shop glaze or field glaze items to be glazed using glass of the quality and thickness specified or indicated. Glazing, unless otherwise specified or approved, must conform to applicable recommendations in the GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, IGMA TM-3000, and manufacturer's recommendations. Handle and install glazing materials in accordance with manufacturer's instructions. Use beads or stops which are furnished with items to be glazed to secure the glass in place. Verify products are properly installed, connected, and adjusted.

3.2.1 Sheet Glass

Cut and set with the visible lines or waves horizontal.

3.3 CLEANING

Clean glass surfaces and remove labels, paint spots, and other defacement as required to prevent staining. Glass must be clean at the time the work is accepted.

3.4 PROTECTION

Protect glass work immediately after installation. Identify glazed openings with suitable warning tapes, cloth or paper flags, attached with non-staining adhesives. Remove and replace glass units which are broken, chipped, cracked, abraded, or otherwise damaged during construction activities with new units.

-- End of Section --

SECTION 08 91 00

ALUMINUM WALL LOUVERS
06/24 MCBCL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. (AMCA)

AMCA 500-L	(2015) Laboratory Methods of Testing Louvers for Rating
AMCA 511	(2010; R 2016) Certified Ratings Program for Air Control Devices

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2605	(2022) Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7	(2017) Minimum Design Loads for Buildings and Other Structures

ASTM INTERNATIONAL (ASTM)

ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

1.2 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Wall Louvers; G

SD-03 Product Data

Metal Wall Louvers; G

SD-04 Samples

Wall Louver Samples; G

1.3 DELIVERY, STORAGE, AND PROTECTION

Deliver materials to the site in an undamaged condition. Carefully store materials off the ground to provide proper ventilation, drainage, and protection against dampness. Louvers shall be free from nicks, scratches, and blemishes. Replace defective or damaged materials with new.

1.4 DETAIL DRAWINGS

Show all information necessary for fabrication and installation of wall louvers. Indicate materials, sizes, thicknesses, fastenings, and profiles.

1.5 COLOR SAMPLES

Colors of finishes for wall louver samples shall closely approximate colors indicated. Where color is not indicated, submit the manufacturer's standard colors to the Contracting Officer for selection.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Aluminum Sheet

ASTM B209, alloy 3003 or 5005 with temper as required for forming.

2.1.2 Extruded Aluminum

ASTM B221, alloy 6063-T6.

2.2 METAL WALL LOUVERS

Wind driven rain resistant type, stationary louvers with horizontally mounted drainable blades and bird screens. Louver shall be made to withstand a wind load of not less than 145 pounds per square foot. Wall louvers shall bear the AMCA certified ratings program seal for air performance and water penetration in accordance with AMCA 500-L and AMCA 511. The rating shall show a water penetration of 0.10 or less ounce per square foot of free area at a free velocity of 1200 feet per minute. Louver shall have an active Miami-Dade NOA number at the time of contract award and be tested to the following protocols:

a. TAS-201 Large and Small Missile Impact Test

b. TAS-202 Uniform Static Air Pressure Test

c. TAS-203 Cyclic Wind Pressure Test - Maximum Design Pressure Rating +/- 120 psf (5.75 kPa)

2.2.1 Extruded Aluminum Louvers

Louvers shall be fabricated to the following:

a. Frame:

(1) Frame Depth: 6 inches

(2) Wall Thickness: 0.081 inch, nominal

(3) Material: Extruded aluminum, Alloy 6063-T6

b. Blades:

(1) Style: Drainable, horizontally mounted

(2) Wall Thickness: 0.081 inch, nominal

(3) Material: Extruded aluminum, Alloy 6063-T6

c. Minimum Assembly Size: 12 inches wide by 12 inches high

d. Maximum factory assembly size: 88 inches by 120 inches

e. Maximum field assembly size: Unlimited width by 120 inches high

f. Unlimited height by 88 inches width in vertical configuration

2.2.2 Seismic Loads

Louvers shall be factory engineered to withstand the specified seismic loads. Minimum design loads shall be calculated to comply with ASCE 7.

2.2.3 Mullions and Mullion Covers

Same material and finish as louvers. Provide mullions for all louvers more than 5 feet in width at not more than 5 feet on centers. Provide mullions covers on both faces of joints between louvers.

2.2.4 ACCESSORIES

a. Insulated Aluminum Blank-Off Panels: 0.040 (1 mm) aluminum sheet, 2 inch (51 mm) aluminum skin insulated core, factory installed with removable fasteners and neoprene gaskets.

b. Aluminum Filter Racks: Formed channel racks to accept standard thick filters. Unused bottom portion blanked off with 0.040 inch (1 mm) aluminum sheet.

(1) Filter: 1 inch (25 mm) thick.

c. Bird Screen:
(1) Aluminum: Aluminum, 1/2 inch mesh x 0.063 inch (13 mm mesh x 1.6 mm), inter-crimp.

d. Extended Sills:

(1) Formed Aluminum, Alloy 3003. Minimum nominal thickness 0.081 inch (2.1 mm).

2.3 FASTENERS AND ACCESSORIES

Provide stainless steel screws and fasteners for aluminum louvers and zinc-coated or stainless steel screws and fasteners for steel louvers. Provide other accessories as required for complete and proper installation.

2.4 FINISHES

2.4.1 Aluminum

Exposed aluminum surfaces shall be factory finished with an organic coating.

Louver is Slate Gray, AMS 595A 36173, matching the roofing color. as indicated in the Marine Corps Base Camp Lejeune, Base Exterior Architectural Plan, Camp Gieger.

2.4.1.1 Organic Coating

Clean and prime exposed aluminum surfaces. Provide a superior performance finish in accordance with AAMA 2605 with total dry film thickness of not less than 1.2 mil.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Wall Louvers

Install using stops or moldings, flanges, strap anchors, or jamb fasteners as appropriate for the wall construction and in accordance with manufacturer's recommendations.

3.1.2 Screens and Frames

Attach frames to louvers with screws or bolts.

3.2 PROTECTION FROM CONTACT OF DISSIMILAR MATERIALS

3.2.1 Copper or Copper-Bearing Alloys

Paint copper or copper-bearing alloys in contact with dissimilar metal with heavy-bodied bituminous paint or separate with inert membrane.

3.2.2 Aluminum

Where aluminum contacts metal other than zinc, paint the dissimilar metal with a primer and two coats of aluminum paint.

3.2.3 Metal

Paint metal in contact with mortar, concrete, or other masonry materials with alkali-resistant coatings such as heavy-bodied bituminous paint.

3.2.4 Wood

Paint wood or other absorptive materials that may become repeatedly wet and in contact with metal with two coats of aluminum paint or a coat of heavy-bodied bituminous paint.

-- End of Section --

SECTION 09 03 00

LOW PRESSURE BUILDING CLEANING
03/22

PART 1 GENERAL

1.1 SCOPE

Provide labor, material, equipment and services necessary for, and reasonably incidental to, furnishing and installing building cleaning work indicated within the Instruments of Service. Incorporate related accessories and specialties to accomplish a complete and proper installation. Coordinate and schedule this work with the work of other trades to ultimately provide superior workmanship in the finished product.

Unless otherwise so qualified, engage a competent building cleaning trade having five years of experience with work of a similar type, scope, complexity and scale to perform this installation.

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Work Plan

Submit a WORK PLAN summarizing building cleaning procedures, sequencing, analyses, handling and disposal. Describe health and safety precautions, personnel training and work area protection. Incorporate this information into a work plan to ensure worker safety.

SD-03 Product Data

Cleaning Solution

1.3 WORK PLAN

Prepare substrates in accordance with requirements for building cleaning work encountered. Evaluate work in place and confirm substrates are suitable for receiving scheduled work. Select preparation methods that are compatible with substrates and finish materials.

Furnish building cleaning sample assemblies utilizing materials, accessories and methods required for the work. Assembly sizes are 4 feet, 0 inches by 4 feet, 0 inches and located as directed.

Demonstrate execution of building cleaning work. Modify techniques, methods and procedures to provide superior workmanship.

PART 2 PRODUCTS

2.1 Cleaning Solution

Water is clean and potable. Avoid ground water containing soluble salts that creates efflorescence.

Cleaner and stain remover is composed of detergents, wetting agents and buffering agents. Solutions are suited for multiple surfaces including limestone, terra cotta, concrete, EIFS, glass, anodized aluminum, uncoated stainless steel, brick, concrete masonry units, wood, cast stone, unpolished stone, exterior tile, aluminum, painted surfaces and vinyl. Treatment removes leaching, caulk bleed, pollution, vanadium, manganese, metal oxide and mineral staining. Avoid strong acidic cleaners that discolor veneers and mortars.

Furnish accessories and options as recommended by the manufacturer for the specific applications and substrates encountered within the work.

PART 3 EXECUTION

3.1 INSTALLATION

Protect the skin and eyes. Wear goggles, rubber gloves, rubber footwear, long sleeve shirts and long pants. Wear masks or respirators that filter spray mist and organic vapors when working in confined areas.

Store cleaners in a cool, dry place. Separate from other chemicals to eliminate cross contamination potential. Tightly close containers. Perform building cleaning when forecast temperatures are 40 degrees F and rising.

Protect sensitive assemblies and work below with plastic sheeting.

High pressure water cleaning is not permitted. Using greater pressures drives chemicals deep into surfaces, making a complete rinse difficult.

Test spray equipment and check solutions for adverse effects. Coated stainless steel hardware and brass coated items require protection. Protect other surfaces that discolor or adversely react to solutions when tested. Employ low pressure spray controls. Adjust pressures to avoid substrate discoloration and erosion.

Wet a wall in an inconspicuous location. Rinse surfaces below areas being cleaned with fresh water to prevent streaking. Apply cleaning solution at the top of the wall and work down. Restrict the application to a confined area, and immediately rinse with water. Evaluate for adverse effects after drying and before applying solution on the remaining work.

Wet the remaining walls with clean water prior to and during cleaning solution application. Reapply water to dry areas. Use a single, undiluted solution for general cleaning. Use a double undiluted solution for deep cleaning. Allow cleaning solutions to dwell on surfaces for three to five minutes. Do not allow cleaner to dry on surfaces. Rinse with water to flush spent cleaner and dissolved soiling from surfaces and pores. Work from application area bottoms to tops when rinsing. Remove cleaning compounds, weathering discolorations, efflorescence, paint chalking, loose material, debris, soil, dirt, mildew, algae, fungus, rust and similar stains.

Inadequate rinsing leaves residues that may stain cleaned surfaces. Furnish equipment generating 40 to 50 PSI that produces the best water to pressure combination for rinsing surfaces. Use a 25 degree to 45 degree fan spray tip. Heat water within a range of 150 degrees to 180 degrees F to improve cleaning efficiencies. Modify water flow rates and rinsing pressures to accommodate sensitive surfaces. Rinsing at pressures exceeding 50 PSI and using fan tips less than 15 degrees may permanently damage surfaces. Low water flow rates may reduce cleaning productivity and contribute to uneven results.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 22 00

SUPPORTS FOR GYPSUM BOARD
02/10, CHG 2: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A463/A463M	(2015; R 2020; E 2020) Standard Specification for Steel Sheet, Aluminum-Coated, by the Hot-Dip Process
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM C645	(2014; E 2015) Nonstructural Steel Framing Members
ASTM C754	(2020) Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Metal Support Systems; G

Recycled Content for Metal Support Systems; S

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the job site and store in ventilated dry locations permitting easy access for inspection and handling. If materials are stored outdoors, stack materials off the ground, supported on a level platform, and fully protected from the weather. Handle materials carefully to prevent damage. Remove damaged items and provide new items.

PART 2 PRODUCTS

2.1 MATERIALS

Provide steel materials for metal support systems with galvanized coating ASTM A653/A653M, G-60; aluminum coating ASTM A463/A463M, T1-25; or a 55-percent aluminum-zinc coating.

Provide metal support systems containing a minimum of 20 percent recycled content. Provide data identifying percentage of recycled content for metal support systems.

2.1.1 Materials for Attachment of Gypsum Wallboard

2.1.1.1 Suspended Ceiling Systems

ASTM C645.

Suspended ceiling assemblies consist of main runners or carrying channels that are 0.060 inch, 16 gauge cold rolled channels 1.5 inches deep with 0.5 inch flanges. Cross furring members are 0.048 inch, 18 gauge cold rolled channels 0.875 inches deep with 0.5 inch flanges. Cross furring members attach to main runners with 18 gauge galvanized tie wire or prefabricated clips. Suspend ceiling assemblies with 0.106 inch, 12 gauge hangers. Specified parameters are minimums. Provide recommended gauges, cross section dimensions, spacing, wire gauges, hanger patterns and fastener patterns.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Systems for Attachment of Gypsum Wallboard

3.1.1.1 Suspended Ceiling Systems

ASTM C754, except provide framing members 16 inches o.c. unless indicated otherwise.

-- End of Section --

SECTION 09 29 00

GYPSUM BOARD
08/16, CHG 4: 02/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C475/C475M	(2017; R 2022) Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board
ASTM C840	(2020) Standard Specification for Application and Finishing of Gypsum Board
ASTM C954	(2018) Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
ASTM C1002	(2020) Standard Specification for Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
ASTM C1047	(2019) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
ASTM C1396/C1396M	(2017) Standard Specification for Gypsum Board
ASTM C1629/C1629M	(2018a) Standard Classification for Abuse-Resistant Nondecorated Interior Gypsum Panel Products and Fiber-Reinforced Cement Panels
ASTM D1037	(2012) Evaluating Properties of Wood-Base Fiber and Particle Panel Materials
ASTM D2394	(2017) Standard Test Methods for Simulated Service Testing of Wood and Wood-Base Finish Flooring
ASTM D5420	(2016) Standard Test Method for Impact Resistance of Flat, Rigid Plastic Specimen by Means of a Strike Impacted by a Falling Weight (Gardner Impact)

ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E695	(2003; R 2015; E 2015) Measuring Relative Resistance of Wall, Floor, and Roof Construction to Impact Loading

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

GYPSUM ASSOCIATION (GA)

GA 214	(2010) Recommended Levels of Gypsum Board Finish
GA 216	(2010) Application and Finishing of Gypsum Panel Products

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

UL SOLUTIONS (UL)

UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Abuse Resistant Gypsum Board

Accessories

Gypsum Board

Recycled Content for Gypsum Board; S

Recycled Content for Paper Facing and Gypsum Cores; S

VOC Content of Joint Compound; S

SD-06 Test Reports

SD-07 Certificates

Asbestos Free Materials; G

Certify that gypsum board types joint treating materials do not contain asbestos.

Indoor Air Quality for Gypsum Board; S

SD-08 Manufacturer's Instructions

Safety Data Sheets

SD-10 Operation and Maintenance Data

Manufacturer Maintenance Instructions

1.3 CERTIFICATIONS

1.3.1 Indoor Air Quality Certifications

Submit required indoor air quality certifications in one submittal package.

1.3.1.1 Ceiling Systems

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party program that products meet the requirements of this Section. Provide current product certification documentation from certification body. When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein.

1.4 DELIVERY, STORAGE, AND HANDLING

1.4.1 Delivery

Deliver materials in the original packages, containers, or bundles with each bearing the brand name, applicable standard designation, and name of manufacturer, or supplier.

1.4.2 Storage

Keep materials dry by storing inside a sheltered building. Where necessary to store gypsum board outside, store off the ground, properly supported on a level platform, and protected from direct exposure to rain, snow, sunlight, and other extreme weather conditions. Provide adequate ventilation to prevent condensation. Store per manufacturer's recommendations for allowable temperature and humidity range. Do not store gypsum wallboard with materials which have high emissions of volatile organic compounds (VOCs) or other contaminants. Do not store panels near materials that may offgas or emit harmful fumes, such as kerosene heaters, fresh paint, or adhesives. Do not use materials that have visible moisture or biological growth.

1.4.3 Handling

Neatly stack gypsum board flat to prevent sagging or damage to the edges, ends, and surfaces.

1.5 QUALIFICATIONS

Furnish type of gypsum board work specialized by the installer with a minimum of 3 years of documented successful experience.

1.6 SCHEDULING

The gypsum wallboard must be taped, finished and primed before the installation of the highly-emitting materials.

Commence application only after the area scheduled for gypsum board work is completely weathertight. The heating, ventilating, and air-conditioning systems must be complete and in operation prior to application of the gypsum board. If the mechanical system cannot be activated before gypsum board is begun, the gypsum board work may proceed in accordance with an approved plan to maintain the environmental conditions specified below. Apply gypsum board prior to the installation of finish flooring and acoustic ceiling.

1.7 ENVIRONMENTAL REQUIREMENTS

Do not expose the gypsum board to excessive sunlight prior to gypsum board application. Maintain a continuous uniform temperature of not less than 50 degrees F and not more than 80 degrees F for at least one week prior to the application of gypsum board work, while the gypsum board application is being done, and for at least one week after the gypsum board is set. Shield air supply and distribution devices to prevent any uneven flow of air across the plastered surfaces. Provide ventilation to exhaust moist air to the outside during gypsum board application, set, and until gypsum board jointing is dry. In glazed areas, keep windows open top and bottom or side to side 3 to 4 inches. Reduce openings in cold weather to prevent freezing of joint compound when applied. For enclosed areas lacking natural ventilation, provide temporary mechanical means for ventilation. In unglazed areas subjected to hot, dry winds or temperature differentials from day to night of 20 degrees F or more, screen openings with cheesecloth or similar materials. Avoid rapid drying. During periods of low indoor humidity, provide minimum air circulation following gypsum boarding and until gypsum board jointing complete and is dry.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to specifications, standards and requirements specified. Provide gypsum board typesand joint treating materials manufactured from asbestos free materials only. Submit Safety Data Sheets and manufacturer maintenance instructions for gypsum materials including adhesives.

2.1.1 Gypsum Board

ASTM C1396/C1396M. Gypsum board must contain a minimum of 10 percent post-consumer recycled content, or a minimum of 40 percent post-industrial recycled content. Provide data identifying percentage of recycled content for gypsum board. Paper facings must contain a minimum of 100 percent recycled paper content. Gypsum cores must contain a minimum of 95 percent post-industrial recycled gypsum content. Provide data identifying percentage of recycled content for paper facing and gypsum cores. Provide gypsum wall board and panels meeting the emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom

spaces regardless of space type). Provide certification or validation of indoor air quality for gypsum board.

2.1.2 Abuse Resistant Gypsum Board

48 inch wide, 5/8 inch thick, tapered edges.
Reinforced gypsum panel with imbedded fiber mesh or lexan backing tested in accordance with the following tests. Hard body impact test must attain a Level 2 performance in accordance with ASTM C1629/C1629M. Provide fasteners that meet manufacturer requirements and specifications stated within this section. Abuse resistant gypsum board, when tested in accordance with ASTM E84, have a flame spread rating of 75 or less and a smoke developed rating of 100 or less.

2.1.2.1 Soft Body Impact Test

ASTM E695 or ASTM D2394 for impact penetration and deformation. ASTM E695 using a 60 lb leather bag filled with steel pellets, resisting no less than 300 ft. lb. cumulative impact energy before failure or ASTM D2394 using 5.5 inch hemispherical projectile resisting no less than 264 ft. lb. before failure. Provide test specimen stud spacing a minimum 16 inch on center.

2.1.2.2 Hard Body Impact Test

Comply with hard body impact test in accordance with ASTM C1629/C1629M Classification Level 2.

2.1.2.3 Surface Abrasion Test

Comply with test surface abrasion test in accordance with ASTM C1629/C1629M.

2.1.2.4 Indentation Test

ASTM D5420 or ASTM D1037 for indentation resistance. ASTM D5420 using a 32 oz weight with a 5/8 inch hemispherical impacting head dropped once 3 feet creating not more than 0.137 inch indentation or ASTM D1037 using no less than 470 lb weight applied to the 0.438 inch diameter ball to create not more than a 0.0197 inch indentation depth.

2.1.3 Joint Treatment Materials

ASTM C475/C475M. Product must be low emitting VOC types with VOC limits not exceeding 50 g/L. Provide data identifying VOC content of joint compound. Use all purpose joint and texturing compound containing inert fillers and natural binders, including lime compound. Pre-mixed compounds must be free of antifreeze, vinyl adhesives, preservatives, biocides and other slow releasing compounds.

2.1.3.1 All-Purpose Compound

Specifically formulated and manufactured to serve as both a taping and a finishing compound and compatible with tape, substrate and fasteners.

2.1.3.2 Joint Tape

Use cross-laminated, tapered edge, reinforced paper, or fiber glass mesh tape recommended by the manufacturer.

2.1.4 Fasteners

2.1.4.1 Screws

ASTM C1002, Type "G", Type "S" or Type "W" steel drill screws for fastening gypsum board to gypsum board, wood framing members and steel framing members less than 0.033 inch thick. ASTM C954 steel drill screws for fastening gypsum board to steel framing members 0.033 to 0.112 inch thick.

2.1.5 Accessories

ASTM C1047. Fabricate from corrosion protected steel designed for intended use. Accessories manufactured with paper flanges are not acceptable. Flanges must be free of dirt, grease, and other materials that may adversely affect bond of joint treatment.

2.1.6 Water

Provide clean, fresh, and potable water.

PART 3 EXECUTION

3.1 EXAMINATION

3.1.1 Framing

Verify that framing is securely attached and of sizes and spacing to provide a suitable substrate to receive gypsum board. Verify that all blocking, headers and supports are in place to support plumbing fixtures and to receive soap dishes, grab bars, towel racks, and similar items. Do not proceed with work until framing is acceptable for application of gypsum board.

3.1.2 Building Construction Materials

Do not install building construction materials that show visual evidence of biological growth.

3.2 APPLICATION OF GYPSUM BOARD

Apply gypsum board to framing members in accordance with ASTM C840 or GA 216 and the requirements specified. Apply gypsum board with separate panels in moderate contact; do not force in place. Stagger end joints of adjoining panels. Neatly fit abutting end and edge joints. Use gypsum board of maximum practical length; select panel sizes to minimize waste. Cut out gypsum board to make neat, close, and tight joints around openings. In vertical application of gypsum board, provide panels in lengths required to reach full height of vertical surfaces in one continuous piece. Lay out panels to minimize waste; reuse cutoffs whenever feasible. Treat edges of cutouts for plumbing pipes, screwheads, and joints with water-resistant compound as recommended by the gypsum board manufacturer. Provide type of gypsum board for use in each system specified herein as indicated.

3.2.1 Application of Gypsum Board to Steel Framing

Apply in accordance with ASTM C840, System VIII or GA 216.

3.2.2 Control Joints

Install expansion and contraction joints in ceilings in accordance with ASTM C840, System XIII or GA 216.

3.2.3 Application of Abuse Resistant Gypsum Board

Apply in accordance with applicable system of ASTM C840 as specified or GA 216. Follow manufacturers written instructions on how to cut, drill and attach board.

3.3 FINISHING OF GYPSUM BOARD

Tape and finish gypsum board in accordance with ASTM C840, GA 214 and GA 216. Finish above ceilings to Level 1 in accordance with GA 214. Unless otherwise specified, finish all gypsum board to Level 5 in accordance with GA 214. Provide joint, fastener depression, and corner treatment. Tool joints as smoothly as possible to minimize sanding and dust. Do not use self-adhering fiber glass mesh tape with conventional drying type joint compounds; use setting or hardening type compounds only. Provide treatment for water-resistant gypsum board as recommended by the gypsum board manufacturer. Protect workers, building occupants, and HVAC systems from gypsum dust.

3.3.1 Uniform Surface

Wherever gypsum board is to receive eggshell, semigloss or gloss paint finish, or where severe, up or down lighting conditions occur, finish gypsum surface in accordance to GA 214 Level 5. In accordance with GA 214 Level 5, apply a thin skim coat of joint compound to the entire gypsum board surface, after the two-coat joint and fastener treatment is complete and dry.

3.4 SEALING

Seal openings around pipes, fixtures, and other items projecting through gypsum board as specified in Section 07 92 00 JOINT SEALANTS. Apply material with exposed surface flush with gypsum board.

3.5 PATCHING

Patch surface defects in gypsum board to a smooth, uniform appearance, ready to receive finishes.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 30 10

CERAMIC, QUARRY, AND GLASS TILING
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A108/A118/A136.1	(2024) American National Standard Specifications for the Installation of Ceramic Tile
ANSI A137.1	(2019) American National Standards Specifications for Ceramic Tile

ASTM INTERNATIONAL (ASTM)

ASTM A1064/A1064M	(2024) Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
ASTM C33/C33M	(2024a) Standard Specification for Concrete Aggregates
ASTM C144	(2024) Standard Specification for Aggregate for Masonry Mortar
ASTM C150/C150M	(2024) Standard Specification for Portland Cement
ASTM C206	(2014; R 2022) Standard Specification for Finishing Hydrated Lime
ASTM C207	(2024) Standard Specification for Hydrated Lime for Masonry Purposes
ASTM C373	(2018; R 2023)Standard Test Methods for Determination of Water Absorption and Associated Properties by Vacuum Method for Pressed Ceramic Tiles and Glass Tiles and Boil Method for Extruded Ceramic Tiles and Non-tile Fired Ceramic Whiteware Products
ASTM C648	(2020) Standard Test Method for Breaking Strength of Ceramic Tile
ASTM C847	(2018; R 2024) Standard Specification for Metal Lath
ASTM C1026	(2023) Standard Test Method for Measuring

	the Resistance of Ceramic and Glass Tile to Freeze-Thaw Cycling
ASTM C1027	(2009; R 2017) Standard Test Method for Determining Visible Abrasion Resistance of Glazed Ceramic Tile

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

GREEN SEAL (GS)

GS-36	(2013) Adhesives for Commercial Use

MARBLE INSTITUTE OF AMERICA (MIA)

MIA Design Manual	(2016) Dimension Stone Design Manual

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

TILE COUNCIL OF NORTH AMERICA (TCNA)

TCNA Hdbk	(2017) Handbook for Ceramic, Glass, and Stone Tile Installation

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines

UL SOLUTIONS (UL)

UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Porcelain Tile; G

Recycled Content for Porcelain Tile; S

Mosaic Tile; G

Recycled Content for Mosaic Tile; S

Transition Strips; G

Metal Strips; G

Setting-Bed; G

Mortar, Grout, and Adhesive; G

Reinforcing Wire Fabric

Cementitious Backer Units; G

Waterproof Membrane; G

Crack Isolation Membrane; G

SD-04 Samples

Tile; G

Accessories; G

Transition Strips; G

Metal Strips; G

Grout; G

SD-07 Certificates

Indoor Air Quality for Adhesives; S

Indoor Air Quality for Sealants; S

Water Absorption Rates

SD-08 Manufacturer's Instructions

Manufacturer's Approved Cleaning Instructions

SD-10 Operation and Maintenance Data

Porcelain Tile, Data Package 1;

Mosaic Tile, Data Package 1; G

Transition Strips, Data Package 1; G

Metal Strips, Data Package 1; G

1.3 CERTIFICATIONS

1.3.1 Indoor Air Quality Certifications

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party programs that products meet the requirements of this Section. Provide current product certification documentation from certification body.When product does not have certification, provide validation that product meets the indoor air quality product requirements cited in this Section.

1.3.2 Water Absorption Rates Certification

Provide certification for each tile type indicating compliance with the following water absorption (wa) rates per ANSI A137.1 criteria as tested per ASTM C373 requirements.

a. Porcelain and Mosaic Tile (Impervious): Provide water absorption (wa) of 0.5 percent or less.

b. Ceramic Wall Tile (Non-Vitreous): Provide maximum water absorption (wa) of 7.0 percent.

1.4 QUALITY ASSURANCE

Provide installers having a minimum of two years of experience with a company specializing in performing the type of work described. Each type and color of tile to be provided from a single source. Each type and color of mortar, adhesive, and grout to be provided from the same source.

1.5 DELIVERY, STORAGE, AND HANDLING

Ship tiles in sealed packages and clearly marked with the grade, type of tile, producer identification, and country of origin. Deliver materials to the project site in manufacturer's original unopened containers with seals unbroken and labels and hallmarks intact. Protect materials from weather, and store them under cover in accordance with manufacturer's printed instructions. Store and handle tiles per manufacturer's instructions for gauged porcelain tile and gauged porcelain tile panels/slabs.

1.6 ENVIRONMENTAL REQUIREMENTS

Do not perform ceramic tile work unless the substrate and ambient temperature is at least 50 degrees F and rising. Maintain temperature above 50 degrees F while the work is being performed and for at least 7 days after completion of the work. When temporary heaters are used, ventilate the area to the outside to avoid carbon dioxide damage to new tilework.

1.7 WARRANTY

Provide manufacturer's warranty to repair or replace defective tiling materials and workmanship, including tile, mortar and grout products and installation as a system, for a period of one year from date of final

acceptance of the work.

1.8 EXTRA MATERIALS

Supply an extra 2 percent of each type tile used in clean and marked cartons.

PART 2 PRODUCTS

2.1 TILE

Provide tiles that comply with ANSI A137.1 and are standard grade tiles. Provide a minimum breaking strength of 125 lbs. for wall tile and 250 lbs. for floor tile in accordance with ASTM C648. Provide exterior building tile for cold climate projects that is approved by the manufacturer for exterior use when tested in accordance with ASTM C1026. Provide floor tiles with a minimum wet dynamic coefficient of friction (DCOF) value of 0.42when tested in accordance with ANSI A137.1 requirements. Provide glazed floor tile with a Class V-Heavy Commercial classification as rated by the manufacturer when tested in accordance with ASTM C1027 for visible abrasion resistance as related to foot traffic. For materials like tile, accessories, and transition strips submit samples of sufficient size to show color range, pattern, type and joints.

Submit manufacturers' descriptive product data for each type of ceramic, quarry. Include manufacturers' literature, finishes, profiles and thicknesses of materials.

Submit manufacturers' operations and maintenance data for each type o ceramic tiling indicated in accordance with Section 01 78 23 OPERATIONS AND MAINTENANCE DATA.

2.1.1 Porcelain Tile

Provide unglazed through body (surface color and pattern go all the way through the tile body) or glazed color body (body of tile is stained to match the glaze color), rectified porcelain tile and trim pieces. Provide tile with a V2 aesthetic classification. Blend tiles in factory and in a packages to have same color range and continuous blend for installation. Provide nominal tile size(s) as indicated on drawings.

Provide porcelain tiling materials that contain a minimum of 10 percent recycled content. Provide data identifying percentage of recycled content for porcelain tile.

2.1.2 Mosaic Tile

Furnish unglazed mosaic tile composed of porcelain. Provide tile with a V2 aesthetic classification. Blend tiles in factory and in a packages to have same color range and continuous blend for installation. Provide nominal tile size(s) of 2 by 2 inch a mixture of standard sizes in a stock pattern.

Provide mosaic tiling materials that contain a minimum of 3 percent recycled content. Provide data identifying percentage of recycled content for mosaic tile.

2.2 SETTING-BED

Submit manufacturer's catalog data. Compose the setting-bed of the following materials:

2.2.1 Aggregate for Concrete Fill

Conform to ASTM C33/C33M for aggregate fill. Do not exceed one-half the thickness of concrete fill for maximum size of coarse aggregate.

2.2.2 Portland Cement

Conform to ASTM C150/C150M for cement, Type I, white for wall mortar and gray for other uses.

2.2.3 Sand

Conform to ASTM C144 for sand.

2.2.4 Hydrated Lime

Conform to ASTM C206 for hydrated lime, Type S or ASTM C207, Type S.

2.2.5 Metal Lath

Conform to ASTM C847 for flat expanded type metal lath, and weighing a minimum 2.5 pound/square yard.

2.2.6 Reinforcing Wire Fabric

Conform to ASTM A1064/A1064M for wire fabric. Provide 2 by 2 inch mesh, 16/16 wire.

2.3 WATER

Provide potable water.

2.4 MORTAR, GROUT, AND ADHESIVE

Provide non-aerosol adhesive products used on the interior of the building (defined as inside of the weatherproofing system) meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. Provide aerosol adhesives used on the interior of the building meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of GS-36. For products located on the interior of the building (inside of the weatherproofing system, provide certification or validation of indoor air quality for adhesives. Provide bond coat, mortar, and grout supplied from the same manufacturer.

2.4.1 Dry-Set Portland Cement Mortar

TCNA Hdbk.

2.4.2 Furan Mortar

TCNA Hdbk.

2.4.3 Latex-Portland Cement Mortar

TCNA Hdbk.

2.4.4 Ceramic Tile Grout

TCNA Hdbk; petroleum-free and plastic-free standard cement commercial portland cement grout.

2.4.5 Organic Adhesive

TCNA Hdbk, Type I. Water-resistant. Comply with ANSI A108/A118/A136.1.

2.4.6 Epoxy Resin Grout

TCNA Hdbk. Water cleanable epoxy conforming to ANSI A108/A118/A136.1; provide manufacturer proportioned and packaged kit having hardener, resin and colored filler and horizontal and vertical grade products as applicable.

2.4.7 Urethane Grout

TCNA Hdbk; premixed, urethane, water-based grout with color consistency and antimicrobial protection; no color fading, streaking or shading, chemical and stain resistant; and UV stable.

2.4.8 Sealants

Comply with applicable regulations regarding toxic and hazardous materials and as specified. Provide sealant that does not change the color or alter the appearance of the grout. Refer to Section 07 92 00 JOINT SEALANTS.

Provide sealants used on the interior of the building (defined as inside of the weatherproofing system) meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. For products located on the interior of the building (inside of the weatherproofing system), provide certification or validation of indoor air quality for sealants.

2.5 SUBSTRATES

Refer to Section 09 29 00 GYPSUM BOARD for cementitious backer units.

2.5.1 Cementitious Backer Units

Provide cementitious backer unit, for use as tile substrate as indicated, in accordance with TCNA Hdbk. Furnish 1/2 inch thick cementitious backer units.

2.6 MISCELLANEOUS TRIMS

2.6.1 Transition Strips

Provide anodized aluminum transitions between tile and carpet or resilient flooring. Provide types as recommended by flooring manufacturer for both edges and transitions of flooring materials specified. Categorize marble Group A as classified by MIA Design Manual. P Provide transition strips that comply with 36 CFR 1191 requirements.

2.6.2 Metal Strips

Provide trim shapes, height to match tile and setting thickness, designed specifically for flooring, and wall applications. Provide anodized aluminum cove strip where floor tile abuts wall tile for sanitary transition and elimination of cove tile base. Provide extruded square anodized aluminum edging at tile surfaces with exposed outside and inside corners. Provide profiles appropriate for finished floor and wall materials as indicated.

2.7 WATERPROOF MEMBRANE

2.7.1 General

Manufacturer's standard product that complies with ANSI A108/A118/A136.1 and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

2.7.2 Chlorinated-Polyethylene Shower Waterproof Membrane

Nonplasticized, chlorinated polyethylene faced on both sides with nonwoven polyester fabric; 0.040inch nominal thickness.

2.8 CRACK ISOLATION MEMBRANE

2.8.1 General

Manufacturer's standard product that complies with ANSI A108/A118/A136.1 and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

2.8.2 Chlorinated-Polyethylene Crack Isolation Membrane

Nonplasticized, chlorinated polyethylene faced on both sides with nonwoven polyester fabric; 0.030 inch nominal thickness.

2.9 COLOR, TEXTURE, AND PATTERN

Provide color, pattern and texture as indicated; colors listed are not intended to limit the selection of equal colors from other manufacturers.

PART 3 EXECUTION

3.1 PREPARATORY WORK AND WORKMANSHIP

Inspect surface to receive tile in conformance to the requirements of TCNA Hdbk for surface conditions for the type setting bed specified and for workmanship. Provide variations of tiled surfaces that fall within maximum values shown below:

TYPE	WALLS	FLOORS
Dry-Set Mortar	1/8 inch in 8 ft.	1/8 inch in 10 ft.
Organic Adhesives	1/8 inch in 8 ft.	1/16 inch in 3 ft.

TYPE	WALLS	FLOORS
Latex-Portland Cement Mortar	1/8 inch in 8 ft.	1/8 inch in 10 ft.
Epoxy	1/8 inch in 8 ft.	1/8 inch in 10 ft.

3.2 GENERAL INSTALLATION REQUIREMENTS

Do not start tile work until roughing in for mechanical and electrical work has been completed and tested, and built-in items requiring membrane waterproofing have been installed and tested. Close space, in which tile is being set, to traffic and other work. Keep closed until tile is firmly set. Do not start floor tile installation in spaces requiring wall tile until after wall tile has been installed. Apply tile in colors and patterns indicated in the area shown on the drawings. Install tile with the respective surfaces in true even planes to the elevations and grades shown. Provide special shapes as required for sills, jambs, recesses, offsets, external corners, and other conditions to provide a complete and neatly finished installation. Solidly back tile bases and coves with mortar. Do not walk or work on newly tiled floors without using kneeling boards or equivalent protection of the tiled surface. Keep traffic off horizontal portland cement mortar installations for at least 72 hours. Keep all traffic off epoxy installed floors for at least 40 hours after grouting, and heavy traffic off for at least 7 days, unless otherwise specifically authorized by manufacturer. Dimension and draw detail drawings at a minimum scale of 1/4 inch = 1 foot. Include drawings of pattern at inside corners, outside corners, termination points and location of all equipment items such as thermostats, switch plates, mirrors and toilet accessories mounted on surface. Submit drawings showing ceramic tile pattern elevations and floor plans. Submit manufacturer's preprinted installation instructions.

Do not install building construction materials that show visual evidence of biological growth.

3.3 INSTALLATION OF SUBSTRATES

3.3.1 Cementitious Backer Units

Install in accordance with manufacturer's written instructions.

3.4 INSTALLATION OF WALL TILE

Install wall tile in accordance with the TCNA Hdbk, method and with grout joints as recommended by the manufacturer for the type of tile. Install thinner wall tile flush with thicker wall tile applied on same wall and provide installation materials as recommended by the tile and setting materials manufacturer's to achieve flush installation.

3.4.1 Workable or Cured Mortar Bed

Install tile over workable mortar bed or a cured mortar bed at the option of the Contractor. Install a 4 mil polyethylene membrane, metal lath, and scratch coat. Conform to TCNA Hdbk method for workable mortar bed, materials, and installation of tile. Conform to TCNA Hdbk method for cured mortar bed and materials.

3.4.2 Dry-Set Mortar and Latex-Portland Cement Mortar

Use latex-portland cement to install tile in accordance with TCNA Hdbk method . Use latex-portland cement when installing porcelain ceramic tile.

3.4.3 Organic Adhesive

Comply with the requirements of TCNA Hdbk method for organic adhesive installation of ceramic tile.

3.4.4 Ceramic Tile Grout

Prepare and install ceramic tile grout in accordance with TCNA Hdbk method. Provide and apply manufacturer's standard product for sealing grout joints in accordance with manufacturer's recommendations.

3.4.5 Epoxy Resin Grout

Prepare and install epoxy resin grout in accordance with TCNA Hdbk method .

3.4.6 Urethane Grout

Prepare and install urethane grout in accordance with TCNA Hdbk method .

3.5 INSTALLATION OF FLOOR TILE

Install floor tile in accordance with TCNA Hdbk method specified herein and with grout joints as recommended by the manufacturer for the type of tile. Install shower receptors in accordance with TCNA Hdbk method B415.

3.5.1 Workable or Cured Mortar Bed

Install floor tile over a workable mortar bed or a cured mortar bed at the option of the Contractor. Conform to TCNA Hdbk method for workable mortar bed materials and installation. Conform to TCNA Hdbk method for cured mortar bed materials and installation. Provide minimum 1/4 inch to maximum 3/8 inch joints in uniformed width.

3.5.2 Dry-Set and Latex-Portland Cement

Use latex-portland cement mortar to install tile directly over properly cured, plane, clean concrete slabs in accordance with TCNA Hdbk method . Use latex-portland cement when installing porcelain ceramic tile.

3.5.3 Ceramic Tile Grout

Prepare and install ceramic tile grout in accordance with TCNA Hdbk method . Provide and apply manufacturer's standard product for sealing grout joints in accordance with manufacturer's recommendations.

3.5.4 Waterproof and Crack Isolation Membranes

Install as indicated in accordance with manufacturer's written instructions.

3.5.5 Concrete Fill

Provide a 3500 psi concrete fill mix to dry as consistency as practicable. Compose concrete fill by volume of 1 part Portland cement to

3 parts fine aggregate to 4 parts coarse aggregate, and mix with water to as dry a consistency as practicable. Spread, tamp, and screed concrete fill to a true plane, and pitch to drains or levels as shown. Thoroughly damp concrete fill before applying setting-bed material. Reinforce concrete fill with one layer of reinforcement, with the uncut edges lapped the width of one mesh and the cut ends and edges lapped a minimum 2 inch. Tie laps together with 18 gauge wire every 10 inch along the finished edges and every 6 inch along the cut ends and edges. Provide reinforcement with support and secure in the centers of concrete fills. Provide a continuous mesh; except where expansion joints occur, cut mesh and discontinue across such joints. Provide reinforced concrete fill under the setting-bed where the distance between the under-floor surface and the finished tiles floor surface is a minimum of 2 inches, and of the same thickness that the mortar setting-bed over the concrete fill with the thickness required in the specified TCNA Hdbk method .

3.6 INSTALLATION OF MISCELLANEOUS TRIMS

3.6.1 Transition Strips

Install transition strips where indicated, in a manner similar to that of the ceramic tile floor and as recommended by the manufacturer. Provide thresholds full width of the opening. Install head joints at ends not exceeding 1/4 inch in width and grouted full.

3.6.2 Metal Trims

Install trim where indicated. Embed anchoring leg in setting mortar in accordance with manufacturer's instructions. During grouting of tile joints, immediately wipe grout from finish surface.

3.7 EXPANSION JOINTS

Form and seal joints as specified in Section 07 92 00 JOINT SEALANTS.

3.7.1 Walls

Provide expansion joints at control joints in backing material. Wherever backing material changes, install an expansion joint to separate the different materials.

3.7.2 Floors

Provide expansion joints over construction joints, control joints, and expansion joints in concrete slabs in accordance with TCNA Hdbk method EJ171 type to suit conditions. Provide expansion joints where tile abuts restraining surfaces such as perimeter walls, curbs and columns and at intervals of 20 to 25 feet each way in large interior floor areas and 8 to 12 feet each way in large exterior areas or areas exposed to direct sunlight or moisture. Extend expansion joints through setting-beds and fill.

3.8 CLEANING AND PROTECTING

Upon completion, thoroughly clean tile surfaces in accordance with manufacturer's approved cleaning instructions. Do not use acid for cleaning glazed tile. Clean floor tile with resinous grout or with factory mixed grout in accordance with printed instructions of the grout manufacturer. After the grout has set, provide a protective coat of a

noncorrosive soap or other approved method of protection for tile wall surfaces. Cover tiled floor areas with building paper before foot traffic is permitted over the finished tile floors. Provide board walkways on tiled floors that are to be continuously used as passageways by workmen. Replace damaged or defective tiles.

-- End of Section --

SECTION 09 67 23.13

STANDARD RESINOUS FLOORING
11/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D4259 (2018) Standard Practice for Abrading Concrete

1.2 ADMINISTRATIVE REQUIREMENTS

1.2.1 Product Data

Within 30 days of contract award, submit manufacturer's catalog data

1.2.2 Design Mix Data

Within 30 days of contract award, submit design mix data including a complete list of ingredients and admixtures:

Ensure applicable test reports verify the mix has been successfully tested and meets design requirements.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submittals with an "S" are for inclusion in the Sustainability Notebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Manufacturer's Catalog Data; G

SD-04 Samples

Hardboard Mounted; G

SD-05 Design Data

Design Mix Data; G

SD-07 Certificates

Listing of Product Installations; G

Referenced Standards Certificates; G

SD-11 Closeout Submittals

Warranty; G

1.4 DELIVERY, STORAGE, AND HANDLING

Protect materials from weather, soil, and damage during delivery, storage, and construction. Deliver materials in original packages, containers, or bundles bearing brand name and name of material.

Maintain materials used in the installation of floor topping at a temperature between 65 and 85 degrees F.

1.5 QUALITY CONTROL

Prior to commencement of work, submit referenced standards certificates for the following, showing conformance with the referenced standards contained in this section

1.5.1 Qualifications

Submit a listing of product installations for resinous flooring including identification of at least 5 units, similar to those proposed for use, that have been in successful service for a minimum period of 5 years. Identify purchaser, address of installation, service organization, and date of installation.

1.5.2 Sampling

Submit hardboard mounted samples not less than 12-inch square for each required color.

Provide panels showing nominal thickness of finished toppings, color, and texture of finished surfaces. Finished floor toppings and the approved samples are to match in color and texture.

1.6 WARRANTY

Submit a 2 year written warranty for all materials and installation work.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Monolithic, multi-component urethane chemistry resinous flooring system. Urethane Primer with urethane troweled mortar, High performance multi-component solvent free epoxy undercoat, quartz chip double boradcast system. High performance multi component urethane sealers. Overall system thickness, 1/8".

2.2 MATERIALS

2.2.1 Primer

a. Resin: urethane.
b. Formulation Description: Multiple component high solids.
c. Application Method: squeegee, back roll.
d. Thickness of coat(s): 2-3mil.

e. Number of Coats: One.

2.2.2 Quartz Boradcast (body coat)
a. Resin: Urethane.Two-component primer.
b. Formulation Description: Pigmented (2)four part troweled mortar.
c. Application Method: Steel Trowel/Power Trowel.
d. Number of Coats: One.

2.2.3 Second Quartz Boradcast (body coat)
a. Resin: Urethane.Two-component primer.
b. Formulation Description: Pigmented (2)four part troweled mortar.
c. Application Method: Steel Trowel/Power Trowel.
d. Number of Coats: One.

2.2.4 Topcoat
a. Resin: Two-component urethane protective coating.
b. Formulation Description: Two-component UV resistant.
c. Type/Finsh: Clear Gloss.
e. Number of Coats: (2) two.
f. Application: Nap roller.

2.3 Physical Properties

Provide flooring system in which physical properties of topping including aggregate, when tested in accordance with standards or procedures referenced below, are as follows:

1. Tensile Strength: 4,000 psi per ASTM D-638
2. Flexural Strength: 6,250 psi per ASTM D-790
3. VOC limits: 0 g/l
4. Water Absorvtion: 0.04% per ASTM C-413
5. Coefficient of friction: >.79 dry >.65 wet per ASTM D204
6. Bond strength: >300 psi 100% concrete failure per ASTM D-7234
7. Hardness: 80 per ASTM D-2240
8. Compressive strength: 12,500 psi per ASTM C-579
9. Impact Resistance: Exceeds 160 in.-lbs. per ASTM D-4226
11. Abrasion resistance: 10 mg max. weight loss per ASTM D-4060 CS-17
12. Flammability: Class I per ASTM E-648

Cure Rate: 12-16 hours for normal operations

PART 3 EXECUTION

3.1 PREPARATION

Prior to applying resinous flooring material, inspect substrate and immediately report any unsatisfactory conditions that exist and repair.

3.1.1 Safety Precautions

Prior to application in confined spaces of toppings and coatings containing flammable or toxic properties, institute safety precautions and provide forced ventilation to ensure that vapor concentration is kept at acceptable limits as recommended by the manufacturer of the product.

Erect "NO SMOKING" signs, and prohibit smoking or use of spark- or flame-producing devices within 50 feet of any mixing or placing operation

involving flammable materials.

Provide personnel required to handle, mix, or apply toppings containing toxic or flammable properties with such items of personal protective equipment and apparel for eye, skin, and respiratory protection as are recommended by the manufacturer of the product. Ensure all personnel are trained in the appropriate use and wearing of personal protection equipment.

Accomplish sand blasting under approved controlled conditions with respect to sand and dust control to prevent damage to personnel and facility.

3.1.2 Protection of Adjacent Surfaces

In addition to the protection of adjacent surfaces during installation, provide areas used to store and mix materials with a protective covering under the materials. After application of the sealer coats, protect finished flooring during the remainder of the construction period. In areas of expected minimum or moderate traffic, cover floors with 70-pound kraft paper, with strips taped together and edges secured to prevent roll-up. Place vegetable fiberboard, plywood, or other suitable material that does not mar the flooring over the paper to protect areas used as passages by workmen and areas subject to floor damage because of subsequent building operations. Upon completion of construction, remove the protection, clean flooring and, where necessary, repair, reseal, or both, at no additional cost to the Government.

3.1.3 Concrete Subfloor

3.1.3.1 Existing Concrete Floors

Clean existing concrete floors, by mechanical means to remove hard troweled or contaminated areas in conformance with ASTM D4259, and ensure concrete is free of all paint, sealers, curing agents, oil, grease, moisture, dirt, laitance or any other contaminants. Remove any loose or corroded segments of existing concrete and patch with a grouting compound as recommended by the resinous flooring manufacturer. Fill all cracks with an elastomeric jointing compound compatible with the resinous flooring system used.

3.1.4 Mixing Of Materials

Use mechanical equipment for mixing of materials in accordance with the manufacturer's instructions.

3.2 APPLICATION

3.2.1 Areas of Application

Remove equipment prior to installation of material unless directed otherwise by the Contracting Officer. Cover and/or mask surfaces not to receive the epoxy floor topping, such as equipment or cabinets installed prior to surface-preparation efforts and adjacent to the flooring installation. Apply in a uniform, uninterrupted surface except at joints if indicated.

3.2.2 Application

Install all coatings and aggregate in strict accordance with

manufacturer's requirements, including temperature and humidity.

1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.
a. Apply joint sealant to comply with manufacturer's written recommendations.

Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.

Trowel mortar base: Mix mortar material according to manufacturer's recommended procedures. Climatic and non-climatic resinous flooring systems may vary slightly on mode of application. Application should be based upon the following: Uniformly spread mortar over substrate using a specially designed screed box adjusted to manufacturer's recommended height. Metal trowel (hand or power) single mortar coat in thickness indicated for flooring system, grout to fill substrate voids. When cured, sand to remove trowel marks and roughness.

Under Coat: Mix base material according to manufacturer's recommended procedures. Uniformly spread mixed material over previously primed substrate using manufacturer's installation tool. Roll material with strict adherence to manufacturer's installation procedures and coverage rates.

Broadcast: Immediately broadcast vinyl flakes into the body coat. Strict adherence to manufacturer's installation procedures and coverage rates is imperative.

First Sealer: Remove excess un-bonded flakes by lightly brushing and vacuuming the floor surface. Mix and apply sealer with strict adherence to manufacturer's installation procedures.

Second Sealer: Lightly sand first sealer coat. Mix and apply second sealer coat with strict adherence to manufacturer's installation procedures.

3.3 FIELD QUALITY CONTROL

3.3.1 Tolerance

From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base. Broadcast resinous flooring system will contour substrate. Deviation and tolerance are subject to concrete tolerance

3.3.2 Curing, Protection and Cleaning

A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.

B. Close area of application for a minimum of 24 hours.

C. Protect resinous flooring materials from damage and wear during construction operation. Cover flooring with kraft type paper. In high traffic areas use 6 mm (1/4 inch) thick hardboard, plywood, or particle board.

D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

3.3.3 Repairing

Remove and replace damaged or unacceptable portions of completed work with new work to match adjacent surfaces at no additional cost to the Government.

3.4 ADJUSTING AND CLEANING

Clean surfaces of the new work, and adjacent surfaces soiled as a result of the work. Remove all equipment, surplus materials, and rubbish associated with the work from the site.

-- End of Section --

SECTION 09 90 00

PAINTS AND COATINGS
02/21

PART 1 GENERAL

1.1 RELATED REQUIREMENTS

1.1.1 Painting Included

Where a space or surface is indicated to be painted, include the following unless indicated otherwise.

a. Surfaces behind portable objects and surface mounted articles readily detachable by removal of fasteners, such as screws and bolts.

b. New factory finished surfaces that require identification or color coding and factory finished surfaces that are damaged during performance of the work.

c. Existing coated surfaces that are damaged during performance of the work.

1.1.1.1 Exterior Painting

Includes new surfaces, existing coated surfaces, and existing uncoated surfaces, of buildings and appurtenances. Also included are existing coated surfaces made bare by cleaning operations.

1.1.1.2 Interior Painting

Includes new surfaces, existing uncoated surfaces, and existing coated surfaces of buildings and appurtenances as indicated and existing coated surfaces made bare by cleaning operations. Where a space or surface is indicated to be painted, include the following items, unless indicated otherwise.

a. Exposed columns, girders, beams, joists, and metal deck; and

b. Other contiguous surfaces.

1.1.2 Painting Excluded

Do not paint the following unless indicated otherwise.

a. Surfaces concealed and made inaccessible by panelboards, fixed ductwork, machinery, and equipment fixed in place.

b. Surfaces in concealed spaces. Concealed spaces are defined as enclosed spaces above suspended ceilings, furred spaces, attic spaces, crawl spaces, elevator shafts and chases.

c. Steel to be embedded in concrete.

d. Copper, stainless steel, aluminum, anodized aluminum, brass, and lead except existing coated surfaces.

e. Hardware, fittings, and other factory finished items.

1.1.3 Mechanical and Electrical Painting

Includes field coating of interior and exterior new and existing surfaces.

a. Where a space or surface is indicated to be painted, include the following items unless indicated otherwise.

(1) Exposed piping, conduit, and ductwork;

(2) Supports, hangers, air grilles, and registers;

(3) Miscellaneous metalwork and insulation coverings.

b. Do not paint the following, unless indicated otherwise:

(1) New zinc-coated, aluminum, and copper surfaces under insulation

(2) New aluminum jacket on piping

(3) New interior ferrous piping under insulation.

1.1.3.1 Fire Extinguishing Sprinkler Systems

Clean, pretreat, prime, and paint new fire extinguishing sprinkler systems including valves, piping, conduit, hangers, supports, miscellaneous metalwork, and accessories. Apply coatings to clean, dry surfaces, using clean brushes.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)

ACGIH 0100	(2017; Suppl 2020) Documentation of the Threshold Limit Values and Biological Exposure Indices

ASTM INTERNATIONAL (ASTM)

ASTM D235	(2002; R 2012) Mineral Spirits (Petroleum Spirits) (Hydrocarbon Dry Cleaning Solvent)
ASTM D523	(2014; R 2018) Standard Test Method for Specular Gloss
ASTM D4214	(2007; R 2015) Standard Test Method for Evaluating the Degree of Chalking of Exterior Paint Films
ASTM D4263	(1983; R 2018) Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method
ASTM D4444	(2013; R 2018) Standard Test Method for

	Laboratory Standardization and Calibration of Hand-Held Moisture Meters
ASTM D6386	(2016a) Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting
ASTM F1869	(2022) Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

CENTERS FOR DISEASE CONTROL AND PREVENTION (CDC)

Intelligence Bulletin 65	(2013) Occupational Exposure to Carbon Nanotubes and Nanofibers

MASTER PAINTERS INSTITUTE (MPI)

MPI 3	(2016) Primer, Alkali Resistant, Water Based
MPI 4	(2016) Interior/Exterior Latex Block Filler
MPI 9	(2016) Alkyd, Exterior Gloss (MPI Gloss Level 6)
MPI 11	(2016) Latex, Exterior Semi-Gloss, MPI Gloss Level 5
MPI 23	(2015) Primer, Metal, Surface Tolerant
MPI 45	(2016) Primer Sealer, Interior Alkyd
MPI 46	(2016) Undercoat, Enamel, Interior
MPI 47	(2016) Alkyd, Interior, Semi-Gloss (MPI Gloss Level 5)
MPI 50	(2015) Primer Sealer, Latex, Interior
MPI 57	(2012) Varnish, Interior, Polyurethane, Oil Modified, Satin
MPI 72	(2016) Polyurethane, Two-Component, Pigmented, Gloss (MPI Gloss Level 6-7)
MPI 76	(2016) Primer, Alkyd, Quick Dry, for Metal
MPI 79	(2016) Primer, Alkyd, Anti-Corrosive for Metal
MPI 90	(2012) Stain, Semi-Transparent, for Interior Wood
MPI 94	(2016) Alkyd, Exterior, Semi-Gloss (MPI Gloss Level 5)
MPI 101	(2016) Primer, Epoxy, Anti-Corrosive, for

	Metal
MPI 107	(2016) Primer, Rust-Inhibitive, Water Based
MPI 134	(2015) Primer, Galvanized, Water Based
MPI 144	(2016) Latex, Interior, Institutional Low Odor/VOC, (MPI Gloss Level 2)
MPI 145	(2016) Latex, Interior, Institutional Low Odor/VOC, (MPI Gloss Level 3)
MPI 149	(2016) Primer Sealer, Interior, Institutional Low Odor/VOC
MPI 153	(2016) Light Industrial Coating, Interior, Water Based, Semi-Gloss (MPI Gloss Level 5)
MPI 154	(2016) Light Industrial Coating, Interior, Water Based, Gloss (MPI Gloss Level 6)
MPI 163	(2016) Light Industrial Coating, Exterior, Water Based, Semi-Gloss (MPI Gloss Level 5)
MPI ASM	(2019) Architectural Painting Specification Manual
MPI GPS-1-14	(2014) Green Performance Standard GPS-1-14
MPI GPS-2-14	(2014) Green Performance Standard GPS-2-14
MPI MRM	(2015) Maintenance Repainting Manual

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC 7/NACE No.4	(2007) Brush-Off Blast Cleaning
SSPC Glossary	(2011) SSPC Protective Coatings Glossary
SSPC PA 1	(2024) Shop, Field, and Maintenance Coating of Metals
SSPC SP 1	(2015) Solvent Cleaning
SSPC SP 2	(2018) Hand Tool Cleaning
SSPC SP 3	(2024) Power Tool Cleaning
SSPC SP 6/NACE No.3	(2007) Commercial Blast Cleaning
SSPC SP 10/NACE No. 2	(2015) Near-White Blast Cleaning
SSPC VIS 1	(2002; E 2004) Guide and Reference Photographs for Steel Surfaces Prepared by Dry Abrasive Blast Cleaning
SSPC VIS 3	(2004) Guide and Reference Photographs for Steel Surfaces Prepared by Hand and Power Tool Cleaning

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-STD-101	(2014; Rev C) Color Code for Pipelines and for Compressed Gas Cylinders

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FED-STD-313	(2018) Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.1000	Air Contaminants

1.3 DEFINITIONS

1.3.1 Qualification Testing

Qualification testing is the performance of all test requirements listed in the product specification. This testing is accomplished by MPI to qualify each product for the MPI Approved Product List, and may also be accomplished by Contractor's third-party testing lab if an alternative to Batch Quality Conformance Testing by MPI is desired.

1.3.2 Batch Quality Conformance Testing

Batch quality conformance testing determines that the product provided is the same as the product qualified to the appropriate product specification. This testing must be accomplished by an MPI testing lab.

1.3.3 Coating

SSPC Glossary; (1) A liquid, liquefiable, or mastic composition that is converted to a solid protective, decorative, or functional adherent film after application as a thin layer; (2) Generic term for paint, lacquer, enamel.

1.3.4 DFT or dft

Dry film thickness, the film thickness of the fully cured, dry paint or coating.

1.3.5 DSD

Degree of Surface Degradation, the MPI system of defining degree of surface degradation. Five levels are generically defined under the Assessment sections in the MPI MRM, MPI Maintenance Repainting Manual.

1.3.6 EXT

MPI short term designation for an exterior coating system.

1.3.7 INT

MPI short term designation for an interior coating system.

1.3.8 Loose Paint

Paint or coating that can be removed with a dull putty knife.

1.3.9 mil / mils

The English measurement for 0.001 in or one one-thousandth of an inch.

1.3.10 MPI Gloss Levels

MPI system of defining gloss. Seven gloss levels (G1 to G7) are generically defined under the Evaluation sections of the MPI Manuals. Traditionally, Flat refers to G1/G2, Eggshell refers to G3, Semigloss refers to G5, and Gloss refers to G6.

Gloss levels are defined by MPI as follows:

Gloss Level	Description	Units at 60 degree angle	Units at 80 degree angle
G1	Matte or Flat	0 to 5	10 max
G2	Velvet	0 to 10	10 to 35
G3	Eggshell	10 to 25	10 to 35
G4	Satin	20 to 35	35 min
G5	Semi-Gloss	35 to 70	
G6	Gloss	70 to 85	
G7	High Gloss		

Gloss is tested in accordance with ASTM D523. Historically, the Government has used Flat (G1 / G2), Eggshell (G3), Semi-Gloss (G5), and Gloss (G6).

1.3.11 MPI System Number

The MPI coating system number in each MPI Division found in either the MPI Architectural Painting Specification Manual or the Maintenance Repainting Manual and defined as an exterior (EXT/REX) or interior system (INT/RIN).

1.3.12 Paint

SSPC Glossary; (1) Any pigmented liquid, liquefiable, or mastic composition designed for application to a substrate in a thin layer that is converted to an opaque solid film after application. Used for protection, decoration, identification, or to serve some other functional purposes; (2) Application of a coating material.

1.3.13 REX

MPI short term designation for an exterior coating system used in repainting projects or over existing coating systems.

1.3.14 RIN

MPI short term designation for an interior coating system used in repainting projects or over existing coating systems.

1.4 SCHEDULING

Allow paint, polyurethane, varnish, and wood stain installations to cure prior to the installation of materials that adsorb VOCs.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

Samples of specified materials may be taken and tested for compliance with specification requirements.

SD-02 Shop Drawings

Piping Identification

SD-03 Product Data

Coating; G

Product Data Sheets

SD-04 Samples

Color; G

SD-07 Certificates

Indoor Air Quality for Paints and Primers

SD-08 Manufacturer's Instructions

Application Instructions

Mixing

Manufacturer's Safety Data Sheets

SD-10 Operation and Maintenance Data

Coatings, Data Package 1; G

1.6 QUALITY ASSURANCE

1.6.1 Regulatory Requirements

1.6.1.1 Environmental Protection

In addition to requirements specified elsewhere for environmental protection, provide coating materials that conform to the restrictions of the local Air Pollution Control District and regional jurisdiction. Notify Contracting Officer of any paint specified herein which fails to conform.

1.6.1.2 Lead Content

Do not use coatings having a lead content over 0.06 percent by weight of nonvolatile content.

1.6.1.3 Chromate Content

Do not use coatings containing zinc-chromate or strontium-chromate.

1.6.1.4 Asbestos Content

Provide asbestos-free materials.

1.6.1.5 Mercury Content

Provide materials free of mercury or mercury compounds.

1.6.1.6 Silica

Provide abrasive blast media containing no free crystalline silica.

1.6.1.7 Human Carcinogens

Provide materials that do not contain ACGIH 0100 confirmed human carcinogens (A1) or suspected human carcinogens (A2).

1.6.1.8 Carbon Based Fibers / Tubes

Materials must not contain carbon based fibers such as carbon nanotubes or carbon nanofibers. Intelligence Bulletin 65 ranks toxicity of carbon nanotubes on a par with asbestos.

1.6.2 Coating Contractor's Qualification

Submit the name, address, telephone number, and e-mail address of the Contractor that will be performing all surface preparation and coating application. Submit evidence that key personnel have successfully performed surface preparation and application of coatings on a minimum of three similar projects within the past three years. List information by individual and include the following:

a. Name of individual and proposed position for this work.

b. Information about each previous assignment including:

Position or responsibility

Employer (if other than the Contractor)

Name of facility owner

Mailing address and telephone number of facility owner

Name of individual in facility owner's organization who can be contacted as a reference

Location, size and description of structure

Dates work was carried out

Description of work carried out on structure

1.6.3 Approved Products List

The current MPI, "Approved Product List" which lists paint by brand, label, product name and product code as of the date of Contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use a subsequent MPI "Approved Product List", however, only one list may be used for the entire Contract and each coating system is to be from a single manufacturer. Provide all coats on a particular substrate from a single manufacturer. No variation from the MPI Approved Products List is acceptable.

1.6.4 Paints and Coatings Indoor Air Quality Certifications

Provide paint and coating products certified to meet indoor air quality requirements by MPI GPS-1-14, MPI GPS-2-14 or provide certification by other third-party programs. Provide current product certification documentation from certification body.

Provide certification of Indoor Air Quality for Paints and Primers. Submit required indoor air quality certifications in one submittal package.

1.7 PACKAGING, LABELING, AND STORAGE

Provide paints in sealed containers that legibly show the Contract specification number, designation name, formula or specification number, batch number, color, quantity, date of manufacture, manufacturer's formulation number, manufacturer's directions including any warnings and special precautions, and name and address of manufacturer. Furnish pigmented paints in containers not larger than 5 gallons. Store paints and thinners in accordance with the manufacturer's written directions, and as a minimum, stored off the ground, under cover, with sufficient ventilation to prevent the buildup of flammable vapors, and at temperatures between 40 to 95 degrees F. Do not store paint, polyurethane, varnish, or wood stain products with materials that have a high capacity to absorb VOC emissions. Do not store paint, polyurethane, varnish, or wood stain products in occupied spaces.

1.8 SAFETY AND HEALTH

Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis as specified in Section 01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS and in Appendix A of EM 385-1-1. Include in the Activity Hazard Analysis the

potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

1.8.1 Toxic Materials

To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

a. The applicable manufacturer's Safety Data Sheets (SDS) or local regulation.

b. 29 CFR 1910.1000.

c. ACGIH 0100, threshold limit values.

Submit manufacturer's Safety Data Sheets for coatings, solvents, and other potentially hazardous materials, as defined in FED-STD-313.

1.9 ENVIRONMENTAL REQUIREMENTS

Comply, at minimum, with manufacturer recommendations for space ventilation during and after installation. Isolate area of application from rest of building when applying high-emission paints or coatings.

1.9.1 Coatings

Do not apply coating when air or substrate conditions are:

a. Less than 5 degrees F above dew point;

b. Below 50 degrees F or over 95 degrees F, unless specifically pre-approved by the Contracting Officer and the product manufacturer. Do not, under any circumstances, violate the manufacturer's application recommendations.

1.9.2 Post-Application

Vacate space for as long as possible after application. Wait a minimum of 48 hours before occupying freshly painted rooms. Maintain one of the following ventilation conditions during the curing period, or for 72 hours after application:

a. Supply 100 percent outside air 24 hours a day.

b. Supply airflow at a rate of 6 air changes per hour, when outside temperatures are between 55 degrees F and 85 degrees F and humidity is between 30 percent and 60 percent.

c. Supply airflow at a rate of 1.5 air changes per hour, when outside air conditions are not within the range stipulated above.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to the coating specifications and standards referenced in PART 3. Submit Product Data Sheets for specified coatings and solvents. Provide preprinted cleaning and maintenance instructions for all coating systems.

Submit Manufacturer's Instructions on Mixing: Detailed mixing instructions, minimum and maximum application temperature and humidity, pot life, and curing and drying times between coats.

2.2 COLOR SELECTION OF FINISH COATS

Provide colors of finish coats as indicated or specified. Allow Contracting Officer to select colors not indicated or specified. Manufacturers' names and color identification are used for the purpose of color identification only. Named products are acceptable for use only if they conform to specified requirements. Products of other manufacturers are acceptable if the colors are approximately the colors indicated and the product conforms to specified requirements.

Provide color, texture, and pattern of wall coating systems as indicated. Submit manufacturer's samples of paint colors. Cross reference color samples to color scheme as indicated. Submit color stencil codes. Tint each coat progressively darker to enable confirmation of the number of coats.

PART 3 EXECUTION

3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED

Prior to surface preparation and coating applications, remove, mask, or otherwise protect hardware, hardware accessories, machined surfaces, radiator covers, plates, lighting fixtures, public and private property, and other such items not to be coated that are in contact with surfaces to be coated. Following completion of painting, reinstall removed items by workmen skilled in the trades. Restore surfaces contaminated by coating materials, to original condition and repair damaged items.

3.2 SURFACE PREPARATION

Remove dirt, splinters, loose particles, grease, oil, and other foreign matter and substances deleterious to coating performance as specified for each substrate before application of paint or surface treatments. Remove oil and grease prior to mechanical cleaning. Schedule cleaning so that dust and other contaminants will not fall on wet, newly painted surfaces. Refer to MPI ASM and MPI MRM for additional more specific substrate preparation requirements.

3.2.1 Additional Requirements for Preparation of Surfaces With Existing Coatings

Before application of coatings, perform the following on surfaces covered by soundly-adhered coatings, defined as those which cannot be removed with a putty knife:

a. Test existing finishes for lead before sanding, scraping, or removing. If lead is present, refer to paragraph Toxic Materials.

b. Wipe previously painted surfaces to receive solvent-based coatings with a clean, dry cloth saturated with mineral spirits, ASTM D235 or as specified in MPI MRM. Wipe the surfaces dry with a clean, dry, lint free cloth. Wipe immediately preceding the application of the first coat of any coating, unless specified otherwise.

c. Sand existing glossy surfaces to be painted to reduce gloss. Brush,

and wipe clean with a damp cloth to remove dust.

d. The requirements specified are minimum. Comply also with the application instructions of the paint manufacturer and specific surface preparation requirements as outlined in MPI MRM Exterior Surface Preparation and Interior Surface Preparation.

e. Thoroughly clean previously painted surfaces of all grease, dirt, dust or other foreign matter.

f. Remove blistering, cracking, flaking and peeling or otherwise deteriorated coatings.

g. Remove chalk so that when tested in accordance with ASTM D4214, the chalk resistance rating is no less than 8.

h. Roughen slick surfaces. Repair damaged areas such as, but not limited to, nail holes, cracks, chips, and spalls with suitable material to match adjacent undamaged areas.

i. Feather and sand smooth edges of chipped paint.

j. Clean rusty metal surfaces in accordance with SSPC requirements. Use solvent, mechanical, or chemical cleaning methods to provide surfaces suitable for painting.

k. Provide new, proposed coatings that are compatible with existing coatings.

3.2.2 Existing Coated Surfaces with Minor Defects

Sand, spackle, and treat minor defects to render them smooth. Minor defects are defined as scratches, nicks, cracks, gouges, spalls, alligatoring, chalking, and irregularities due to partial peeling of previous coatings. Remove chalking by sanding so that when tested in accordance with ASTM D4214, the chalk rating is not less than 8.

3.2.3 Substrate Repair

a. Repair substrate surface damaged during coating removal;

b. Sand edges of adjacent soundly-adhered existing coatings so they are tapered as smooth as practical to areas involved with coating removal; and

c. Clean and prime the substrate as specified.

3.3 PREPARATION OF METAL SURFACES

3.3.1 Existing and New Ferrous Surfaces

a. Ferrous Surfaces including Shop-coated Surfaces and Small Areas That Contain Rust, Mill Scale and Other Foreign Substances: Solvent clean in accordance with SSPC SP 1 to remove oil and grease. Where shop coat is missing or damaged, clean according to SSPC SP 2, or SSPC SP 3. Brush-off blast remaining surface in accordance with SSPC 7/NACE No.4. Use inhibitor as recommended by coating manufacturer to prevent premature rusting. Protect shop-coated ferrous surfaces from corrosion by treating and touching up corroded areas immediately upon

detection.

b. Surfaces With More Than 20 Percent Rust, Mill Scale, and Other Foreign Substances: Clean entire surface in accordance with SSPC SP 6/NACE No.3.

3.3.2 Final Ferrous Surface Condition:

3.3.2.1 Tool Cleaned Surfaces

Comply with SSPC SP 2 and SSPC SP 3. Use as a visual reference, photographs in SSPC VIS 3 for the appearance of cleaned surfaces.

3.3.2.2 Abrasive Blast Cleaned Surfaces

Comply with SSPC 7/NACE No.4, SSPC SP 6/NACE No.3, and SSPC SP 10/NACE No. 2. Use as a visual reference, photographs in SSPC VIS 1 for the appearance of cleaned surfaces.

3.3.3 Galvanized Surfaces

a. New or Existing Galvanized Surfaces With Only Dirt and Zinc Oxidation Products: Clean with solvent, steam, or non-alkaline detergent solution in accordance with SSPC SP 1. Completely remove coating by brush-off abrasive blast if the galvanized metal has been passivated or stabilized. Do not "passivate" or "stabilize" new galvanized steel to be coated. If the absence of hexavalent stain inhibitors is not documented, test as described in ASTM D6386, Appendix X2, and remove by one of the methods described therein.

3.4 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE

3.4.1 Concrete and Masonry

a. Curing: Allow concrete, stucco and masonry surfaces to cure at least 30 days before painting, and concrete slab on grade to cure at least 90 days before painting.

b. Surface Cleaning: Remove the following deleterious substances.

(1) Dirt, Chalking, Grease, and Oil: Wash new and existing uncoated surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, and 4 quarts of warm water. Then rinse thoroughly with fresh water. Wash existing coated surfaces with a suitable detergent and rinse thoroughly. For large areas, water blasting may be used.

(2) Fungus and Mold: Wash new, existing coated, and existing uncoated surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, one quart 5 percent sodium hypochlorite solution and 3 quarts of warm water. Rinse thoroughly with fresh water.

(3) Paint and Loose Particles: Remove by wire brushing.

(4) Efflorescence: Remove by scraping or wire brushing followed by washing with a 5 to 10 percent by weight aqueous solution of hydrochloric (muriatic) acid. Do not allow acid to remain on the surface for more than five minutes before rinsing with fresh

water. Do not acid clean more than 4 square feet of surface, per workman, at one time.

c. Cosmetic Repair of Minor Defects: Repair or fill mortar joints and minor defects, including but not limited to spalls, in accordance with manufacturer's recommendations and prior to coating application.

d. Allowable Moisture Content: Latex coatings may be applied to damp surfaces, but not to surfaces with droplets of water. Do not apply epoxies to damp vertical surfaces as determined by ASTM D4263 or horizontal surfaces that exceed 3 lbs of moisture per 1000 square feet in 24 hours as determined by ASTM F1869. In all cases follow manufacturer's recommendations. Allow surfaces to cure a minimum of 30 days before painting.

3.4.2 Gypsum Board, Plaster, and Stucco

3.4.2.1 Surface Cleaning

Verify that plaster and stucco surfaces are free from loose matter and that gypsum board is dry. Remove loose dirt and dust by brushing with a soft brush, rubbing with a dry cloth, or vacuum-cleaning prior to application of the first coat material. A damp cloth or sponge may be used if paint is water-based.

3.4.2.2 Repair of Minor Defects

Prior to painting, repair joints, cracks, holes, surface irregularities, and other minor defects with patching plaster or spackling compound and sand smooth.

3.4.2.3 Allowable Moisture Content

Latex coatings may be applied to damp surfaces, but not surfaces with droplets of water. Do not apply epoxies to damp surfaces as determined by ASTM D4263.

3.5 PREPARATION OF WOOD SURFACES

3.5.1 New and Existing Coated Wood Surfaces, Except Floors:

a. Surface Cleaning: Clean wood surfaces of foreign matter. Verify that surfaces are free from dust and other deleterious substances and in a condition approved by the Contracting Officer prior to receiving paint or other finish. Do not use water to clean uncoated wood. Scrape to remove loose coatings. Lightly sand to roughen the entire area of previously enamel-coated wood surfaces.

b. Removal of Fungus and Mold: Wash existing coated surfaces with a solution composed of 3 ounces (2/3 cup) trisodium phosphate, one ounce (1/3 cup) household detergent, one quart 5 percent sodium hypochlorite solution and 3 quarts of warm water. Rinse thoroughly with fresh water.

c. Do not exceed 12 percent moisture content of the wood as measured by a moisture meter in accordance with ASTM D4444, Method A, unless otherwise authorized.

d. Prime or touch up wood surfaces adjacent to surfaces to receive

water-thinned paints before applying water-thinned paints.

e. Cracks and Nailheads: Set and putty stop nailheads and putty cracks after the prime coat has dried.

f. Cosmetic Repair of Minor Defects:

(1) Knots and Resinous Wood: Prior to application of coating, cover knots and stains with two or more coats of 3-pound-cut shellac varnish, plasticized with 5 ounces of castor oil per gallon. Scrape away existing coatings from knotty areas, and sand before treating. Prime before applying any putty over shellacked area.

(2) Open Joints and Other Openings: Fill with whiting putty, linseed oil putty. Sand smooth after putty has dried.

(3) Checking: Where checking of the wood is present, sand the surface, wipe and apply a coat of pigmented orange shellac. Allow to dry before paint is applied.

g. Prime Coat For New Exterior Surfaces: Prime coat wood doors before wood becomes dirty or warped.

3.5.2 Interior Wood Surfaces, Stain Finish

Sand interior wood surfaces to receive stain. Fill oak and other open-grain wood to receive stain with a coat of wood filler not less than 8 hours before the application of stain; remove excess filler and sand the surface smooth.

3.6 APPLICATION

3.6.1 Coating Application

a. Comply with applicable federal, state and local laws enacted to ensure compliance with Federal Clean Air Standards. Apply coating materials in accordance with SSPC PA 1. SSPC PA 1 methods are applicable to all substrates, except as modified herein.

b. At the time of application, paint must show no signs of deterioration. Maintain uniform suspension of pigments during application.

c. Unless otherwise specified or recommended by the paint manufacturer, paint may be applied by brush, roller, or spray. Use trigger operated spray nozzles for water hoses. Use rollers for applying paints and enamels of a type designed for the coating to be applied and the surface to be coated. Wear protective clothing and respirators when applying oil-based paints or using spray equipment with any paints.

d. Only apply paints, except water-thinned types, to surfaces that are completely free of moisture as determined by sight or touch.

e. Thoroughly work coating materials into joints, crevices, and open spaces. Pay special attention to ensure that all edges, corners, crevices, welds, and rivets receive a film thickness equal to that of adjacent painted surfaces.

f. Apply each coat of paint so that dry film is of uniform thickness and

free from runs, drops, ridges, waves, pinholes or other voids, laps, brush marks, and variations in color, texture, and finish. Completely hide all blemishes.

g. Touch up damaged coatings before applying subsequent coats. Broom clean and clear dust from interior areas before and during the application of coating material.

h. Apply paint to new fire extinguishing sprinkler systems including valves, piping, conduit, hangers, supports, miscellaneous metal work, and accessories. Shield sprinkler heads with protective coverings while painting is in progress. Remove sprinkler heads which have been painted and replace with new sprinkler heads. Unfinished spaces include attic spaces, spaces above suspended ceilings, crawl spaces, pipe chases, mechanical equipment room, and space where walls or ceiling are not painted or not constructed of a prefinished material. Upon completion of painting, remove protective covering from sprinkler heads.

i. Piping in Unfinished Areas: Provide primed surfaces with one coat of red alkyd gloss enamel (MPI 9) applied to a minimum dry film thickness of 1.0 mil in attic spaces, spaces above suspended ceilings, crawl spaces, pipe chases, mechanical equipment room, and spaces where walls or ceiling are not painted or not constructed of a prefinished material.

j. Piping in Finished Areas: Provide primed surfaces with two coats of paint to match adjacent surfaces, except provide valves and operating accessories with one coat of red alkyd gloss enamel (MPI 9) applied to a minimum dry film thickness of 1.0 mil or two component gloss polyurethane (MPI 72) in exterior applications.

k. Provide labeling on the surfaces of all feed and cross mains to show the pipe function such as "Sprinkler System", "Fire Department Connection", "Standpipe". For pipe sizes 4-inch and larger provide white painted stenciled letters and arrows, a minimum of 2 in in height and visible from at least two sides when viewed from the floor. For pipe sizes less than 4-inch, provide white painted stenciled letters and arrows, a minimum of 0.75 in in height and visible from the floor.

l. All fire suppression system valves must be marked with permanent tags indicating normally open or normally closed.

m. Drying Time: Allow time between coats, as recommended by the coating manufacturer, to permit thorough drying, but not to present topcoat adhesion problems. Provide each coat in specified condition to receive next coat.

n. Primers, and Intermediate Coats: Do not allow primers or intermediate coats to dry more than 30 days, or longer than recommended by manufacturer, before applying subsequent coats. Follow manufacturer's recommendations for surface preparation if primers or intermediate coats are allowed to dry longer than recommended by manufacturers of subsequent coatings. Cover each preceding coat or surface completely by ensuring visually perceptible difference in shades of successive coats.

o. Finished Surfaces: Provide finished surfaces free from runs, drops,

ridges, waves, laps, brush marks, and variations in colors.

p. Thermosetting Paints: Apply topcoats over thermosetting paints (epoxies and urethanes) within the overcoat window recommended by the manufacturer.

3.6.2 Mixing and Thinning of Paints

Reduce paints to proper consistency by adding fresh paint, except when thinning is mandatory to suit surface, temperature, weather conditions, application methods, or for the type of paint being used. Obtain written permission from the Contracting Officer to use thinners. Verify that the written permission includes quantities and types of thinners to use.

When thinning is allowed, thin paints immediately prior to application with not more than one pint of suitable thinner per gallon. The use of thinner does not relieve the Contractor from obtaining complete hiding, full film thickness, or required gloss. Thinning cannot cause the paint to exceed limits on volatile organic compounds. Do not mix paints of different manufacturers.

3.6.3 Two-Component Systems

Mix two-component systems in accordance with manufacturer's instructions. Follow recommendation by the manufacturer for any thinning of the first coat to ensure proper penetration and sealing for each type of substrate.

3.6.4 Coating Systems

a. Systems by Substrates: Apply coatings that conform to the respective specifications listed in the following Tables:

Table for Exterior Applications	
MPI Division	Substrate Application
MPI Division 3	Exterior Concrete Paint Table
MPI Division 5	Exterior Metal, Ferrous Paint Table

Table for Interior Applications	
MPI Division	Substrate Application

Table for Interior Applications	
MPI Division 3	Interior Concrete Paint Table
MPI Division 4	Interior Concrete Masonry Units Paint Table
MPI Division 5	Interior Metal, Ferrous Paint Table
MPI Division 6	Interior Wood Paint Table
MPI Division 9	Interior Gypsum Board Paint Table

b. Minimum Dry Film Thickness (DFT): Apply paints, primers, varnishes, enamels, undercoats, and other coatings to a minimum dry film thickness of 1.5 mil each coat unless specified otherwise in the Tables. Coating thickness, where specified, refers to the minimum dry film thickness.

c. Coatings for Surfaces Not Specified Otherwise: Coat unspecified surfaces the same as surfaces having similar conditions of exposure.

d. Existing Surfaces Damaged During Performance of the Work, Including New Patches In Existing Surfaces: Coat surfaces with the following:

(1) One coat of primer.

(2) One coat of undercoat or intermediate coat.

(3) One topcoat to match adjacent surfaces.

e. Existing Coated Surfaces To Be Painted: Apply coatings conforming to the respective specifications listed in the Tables herein, except that pretreatments, sealers and fillers need not be provided on surfaces where existing coatings are soundly adhered and in good condition. Do not omit undercoats or primers.

3.7 COATING SYSTEMS FOR METAL

Apply coatings of Tables in MPI Division 5 for Exterior and Interior.

a. Apply specified ferrous metal primer to steel surfaces on the same day that surface is cleaned, to surfaces that meet all specified surface preparation requirements at time of application.

b. Inaccessible Surfaces: Prior to erection, use one coat of specified primer on metal surfaces that will be inaccessible after erection.

c. Shop-primed Surfaces: Touch up exposed substrates and damaged coatings to protect from rusting prior to applying field primer.

d. Surface Previously Coated with Epoxy or Urethane: Apply MPI 101, 1.5 mils DFT immediately prior to application of epoxy or urethane coatings.

e. Pipes and Tubing: The semitransparent film applied to some pipes and tubing at the mill is not to be considered a shop coat. Overcoat

these items with the specified ferrous-metal primer prior to application of finish coats.

f. Exposed Nails, Screws, Fasteners, and Miscellaneous Ferrous Surfaces. On surfaces to be coated with water thinned coatings, spot prime exposed nails and other ferrous metal with latex primer MPI 107.

3.8 COATING SYSTEMS FOR CEMENTITIOUS SUBSTRATES

Apply coatings of Tables in MPI Division 4 for Exterior and Interior.

3.9 COATING SYSTEMS FOR WOOD

a. Apply coatings of Tables in MPI Division 6 for Exterior and Interior.

b. Prior to erection, apply two coats of specified primer to treat and prime wood surfaces which will be inaccessible after erection.

c. Apply stains in accordance with manufacturer's printed instructions.

3.10 PIPING IDENTIFICATION

Piping Identification, Including Surfaces In Concealed Spaces: Provide in accordance with MIL-STD-101. Place stenciling in clearly visible locations. On piping not covered by MIL-STD-101, stencil approved names or code letters, in letters a minimum of 1/2 inch high for piping and a minimum of 2 inches high elsewhere. Stencil arrow-shaped markings on piping to indicate direction of flow using black stencil paint.

3.11 INSPECTION AND ACCEPTANCE

In addition to meeting previously specified requirements, demonstrate mobility of moving components, including swinging and sliding doors, cabinets, and windows with operable sash, for inspection by the Contracting Officer. Perform this demonstration after appropriate curing and drying times of coatings have elapsed and prior to invoicing for final payment.

3.12 WASTE MANAGEMENT

As specified in the Waste Management Plan and as follows. Do not use kerosene or any such organic solvents to clean up water based paints. Properly dispose of paints or solvents in designated containers. Close and seal partially used containers of paint to maintain quality as necessary for reuse. Store in protected, well-ventilated, fire-safe area at moderate temperature. Place materials defined as hazardous or toxic waste in designated containers. Coordinate with manufacturer for take-back program. Set aside scrap to be returned to manufacturer for recycling into new product. When such a service is not available, contact local recyclers to reclaim the materials. Where local options exist for leftover paint recycling, collect all waste paint by type and provide for delivery to recycling or collection facility for reuse by local organizations.

3.13 PAINT TABLES

All DFT's are minimum values.

3.13.1 Exterior Paint Tables

3.13.1.1 MPI Division 3: Exterior Concrete Paint Table

A. Concrete; Vertical Surfaces, Undersides of Balconies and Soffits

(1) New and uncoated existing and Existing, previously painted concrete; vertical surfaces, including undersides of balconies and soffits but excluding tops of slabs

Latex					
New and uncoated existing	Existing, previously painted	Primer	Intermediate	Topcoat	System DFT
MPI EXT 3.1A-G5 (Semigloss)	MPI REX 3.1A-G5 (Semigloss)	MPI 3	MPI 11	MPI 11	3.5 mils

3.13.1.2 MPI Division 5: Exterior Ferrous and Non-Ferrous Paint Table

A. Steel / Ferrous Surfaces

(1) New Steel that has been hand or power tool cleaned to SSPC SP 2 or SSPC SP 3

Alkyd					
New	Existing, uncoated	Primer	Intermediate	Topcoat	System DFT
MPI EXT 5.1Q-G5 (Semigloss	MPI REX 5.1D-G5 (Semigloss)	MPI 23	MPI 94	MPI 94	5.25 mils
Topcoat: Coating to match adjacent surfaces.					

(2) Existing steel that has been spot-blasted to SSPC SP 6/NACE No.3

(a) Surface previously coated with alkyd or latex

Waterborne Light Industrial Coating				
Existing, previously coated with alkyd or latex	Primer	Intermediate	Topcoat	System DFT
MPI REX 5.1C-G5 (Semigloss)	MPI 79	MPI 163	MPI 163	5 mils
Topcoat: Coating to match adjacent surfaces.				

B. Exterior Galvanized Surfaces

(1) New Galvanized surfaces

Waterborne Primer / Latex				
New Galvanized Surfaces	Primer	Intermediate	Topcoat	System DFT
EXT 5.3H-G5 (Semigloss)	MPI 134	MPI 11	MPI 11	4.5 mils
Topcoat: Coating to match adjacent surfaces.				

(2) Galvanized surfaces with slight coating deterioration; little or no rusting

Waterborne Light Industrial Coating

Galvanized Surfaces with slight coating deterioration	Primer	Intermediate	Topcoat	System DFT
MPI REX 5.3J-G5 (Semigloss)	MPI 134	N/A	MPI 163	4.5 mils
Topcoat: Coating to match adjacent surfaces.				

C. Exterior Surfaces, Other Metals (Non-Ferrous)

(1) Surfaces adjacent to painted surfaces; Mechanical, Electrical, Fire extinguishing sprinkler systems including valves, conduit, hangers, supports, exposed copper piping, and miscellaneous metal items not otherwise specified except floors, hot metal surfaces, and new prefinished equipment

Alkyd				
New	Primer	Intermediate	Topcoat	System DFT
MPI EXT 5.1D-G5 (Semigloss)	MPI 79	MPI 94	MPI 94	5.25 mils
Topcoat: Coating to match adjacent surfaces.				

3.13.2 Interior Paint Tables

3.13.2.1 MPI Division 3: Interior Concrete Paint Table

A. Liquid membrane concrete curing and sealing compound is a low VOC, sprayable, water based acrylic polymer resin formulated for curing,

hardening, dustproofing and sealing freshly placed concrete. Material complies with ASTM C 309, Type I, Class A. Confirm that an acceptable bonding substrate is provided for adhesives, floor coatings and elastomeric sealants installed in conjunction with scheduled floor finishes. 3.13.2.2 MPI Division 4: Interior Concrete Masonry Units Paint Table

A. New and uncoated Existing Concrete masonry units in and other high humidity areas

Waterborne Light Industrial Coating					
New, uncoated Existing	Filler	Primer	Intermediate	Topcoat	System DFT
MPI INT 4.2K-G6(Gloss)	MPI 4	N/A	MPI 154	MPI 154	11 mils
Fill all holes in masonry surface					

B. Existing, previously painted, concrete masonry units in toilets, restrooms, shower areas, and other high humidity areas

Waterborne Light Industrial Coating					
Existing, previously painted	Filler	Primer	Intermediate	Topcoat	System DFT
MPI RIN 4.2G-G6(Gloss)	N/A	MPI 154	MPI 154	MPI 154	4.5 mils

3.13.2.3 MPI Division 5: Interior Ferrous and Non-Ferrous Paint Table

A. Interior Steel / Ferrous Surfaces

(1) Metal, Mechanical, Electrical, Fire extinguishing sprinkler systems

including valves, conduit, hangers, supports, Surfaces adjacent to painted surfaces (Match surrounding finish), and miscellaneous metal items not otherwise specified except floors, hot metal surfaces, and new prefinished equipment

Alkyd				
New, uncoated Existing	Primer	Intermediate	Topcoat	System DFT
MPI INT 5.1E-G5 (Semigloss)	MPI 76	MPI 47	MPI 47	5.25 mils
Topcoat: Coating to match adjacent surfaces.				

B. Interior overhead steel structural members and galvanized metal decking coatings are modified alkyd paint with 36% to 49% solids by volume, 3.30 to 3.34 pounds VOC per gallon and flat finish. Coatings settle as a dry powder in approximately ten feet depending on temperature, humidity and air movement. Do not thin. Clean with xylene. Furnish compatible primers.

3.13.2.4 MPI Division 6: Interior Wood Paint Table

A. Interior New and Existing, previously finished or stained Wood Doors; Natural Finish or Stained

Natural finish, oil-modified polyurethane					
New	Existing, previously finished or stained	Primer	Intermediate	Topcoat	System DFT
MPI INT 6.3K-G4	MPI RIN 6.3K-G4	MPI 57	MPI 57	MPI 57	4 mils
Note: Sand between all coats per manufacturers recommendations.					

Stained, oil-modified polyurethane						
New	Existing, previously finished or stained	Stain	Primer	Intermediate	Topcoat	System DFT
MPI INT 6.3E-G4	MPI RIN 6.3E-G4	MPI 90	MPI 57	MPI 57	MPI 57	4 mils

Note: Sand between all coats per manufacturers recommendations.

B. New Wood Doors; Pigmented finish

Alkyd				
New, uncoated Existing	Primer	Intermediate	Topcoat	System DFT
MPI INT 6.3B-G5 (Semigloss)	MPI 45	MPI 47	MPI 47	4.5 mils
Note: Sand between all coats per manufacturers recommendations.				

C. Existing, previously painted Wood Doors; Pigmented finish

Alkyd				
Existing, previously finished	Primer	Intermediate	Topcoat	System DFT
MPI RIN 6.3B-G5 (Semigloss)	MPI 46	MPI 47	MPI 47	4.5 mils
Note: Sand between all coats per manufacturers recommendations.				

3.13.2.5 MPI Division 9: InteriorGypsum Board Paint Table

A. Interior New and Existing, previously painted Wallboard not otherwise specified

Institutional Low Odor / Low VOC Latex, New

Institutional Low Odor / Low VOC Latex				
New	Primer	Intermediate	Topcoat	System DFT
MPI INT 9.2M-G2 (Flat)	MPI 149	MPI 144	MPI 144	4 mils
MPI INT 9.2M-G3 (Eggshell)	MPI 149	MPI 145	MPI 145	4 mils

Topcoat: Coating to match adjacent surfaces. Use flat sheens, Ceiling White color, for ceilings. Use eggshell sheens for walls.				

B. Interior New and Existing, previously painted Wallboard in toilets, restrooms, shower areas

Waterborne Light Industrial Coating					
New, uncoated Existing	Existing, previously painted	Primer	Intermediate	Topcoat	System DFT
MPI INT 9.2L-G5(Semigloss)	MPI RIN 9.2L-G5 (Semigloss)	MPI 50	MPI 153	MPI 153	4 mils
Topcoat: Coating to match adjacent surfaces.					

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 14 00.10

EXTERIOR SIGNAGE
08/17, CHG 1: 11/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN WELDING SOCIETY (AWS)

AWS C1.1M/C1.1	(2019) Recommended Practices for Resistance Welding
AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A924/A924M	(2022a) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM A1011/A1011M	(2023) Standard Specification for Steel Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength
ASTM B26/B26M	(2018; E 2018) Standard Specification for Aluminum-Alloy Sand Castings
ASTM B62	(2017) Standard Specification for Composition Bronze or Ounce Metal Castings
ASTM B108/B108M	(2019) Standard Specification for Aluminum-Alloy Permanent Mold Castings
ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM AMP 500	(2006) Metal Finishes Manual

1.2 GENERAL REQUIREMENTS

All exterior signage must be provided by a single manufacturer. Exterior signage must be of the design, detail, sizes, types, and message content shown on the drawings, must conform to the requirements specified, and must be provided at the locations indicated. Submit exterior signage schedule in electronic media with spread sheet format. Spread sheet must include sign location, sign type, and message. Signs must be complete with lettering, framing as detailed, and related components for a complete installation. Each sample must consist of a complete sign panel with letters and symbols. Samples may be installed in the work, provided each sample is identified and location recorded. Submit three color samples for each material requiring color and 12 inch square sample of sign face color sample.

1.2.1 Wind Load Requirements

Exterior signage must be designed to withstand windloads. Submit design analysis and supporting calculations performed in support of specified signage.

Marine Corps Base Camp Lejeune must resist a 144 mile per hour, ultimate design wind speed, 54 PSF, Risk Category II, Surface Roughness Category C, Exposure Category C lateral load. Comply with UFC 3-301-01 and ASCE 7 as applicable for building system designs and components.

1.2.2 Character Proportions and Heights

Letters and numbers on indicated signs for handicapped-accessible buildings must have a width-to-height ratio between 3:5 and 1:1 and a stroke-width-to-height ratio between 1:5 and 1:10. Characters and numbers on indicated signs must be sized according to the viewing distance from which they are to be read. The minimum height is measured using an upper case letter "X". Lower case characters are permitted.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Approved Detail Drawings; G

SD-03 Product Data

Installation

Exterior Signage; G

Wind Load Requirements

SD-04 Samples

Exterior Signage; G

SD-10 Operation and Maintenance Data

Protection and Cleaning; G

1.4 QUALIFICATIONS

Signs, plaques, and dimensional letters must be the standard product of a manufacturer regularly engaged in the manufacture of the products. Items of equipment must essentially duplicate equipment that has been in satisfactory use at least 2 years prior to bid opening.

1.5 DELIVERY AND STORAGE

Materials must be wrapped for shipment and storage, delivered to the jobsite in manufacturer's original packaging, and stored in a clean, dry area in accordance with manufacturer's instructions.

1.6 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period must be provided.

PART 2 PRODUCTS

2.1 Building Asset Number Signage

Plaques are 0.25 inch painted aluminum plates. Copy is die cut, engineering grade, reflective vinyl. Stud mount plaques with 0.375 inch spacers. Locate in wall mortar joints when applicable.

2.2 ALUMINUM ALLOY PRODUCTS

Aluminum alloy products must conform to ASTM B209 for sheet or plate, ASTM B221 for extrusions and ASTM B26/B26M or ASTM B108/B108M for castings. Aluminum extrusions must be provided at least 1/8 inch thick and aluminum plate or sheet at least 16 gauge thick. Welding for aluminum products must conform to AWS C1.1M/C1.1.

2.3 ORGANIC COATING

Clean, prime and give surfaces a semi-gloss baked enamel or two-component acrylic polyurethane finish in accordance with NAAMM AMP 500, AMP 505, with total dry film thickness not less than 1.2 mils.

2.4 STEEL PRODUCTS

Structural steel products must conform to ASTM A36/A36M. Sheet and strip

steel products must conform to ASTM A1011/A1011M. Welding for steel products must conform to AWS D1.2/D1.2M.

2.5 CAST BRONZE

Fabricate components with sharp corners, flat faces, and accurate profiles. Remove and polish burrs and rough spots. Finish faces to a uniform high luster. Cast bronze must be in accordance with ASTM B62.

2.6 VINYL SHEETING FOR ALPHANUMERIC TEXT AND GRAPHICS

Vinyl sheeting must be 5 to 7 year premium type and must be in accordance with the flammability requirements of ASTM E84 and must be a minimum 0.003 inch film thickness. Film must include a precoated pressure sensitive adhesive backing, Class 1, or positionable pressure sensitive adhesive backing, Class 3.

2.7 ANCHORS AND FASTENERS

Exposed anchor and fastener materials must be compatible with metal to which applied and must match in color and finish and must be non-rusting, non-corroding, and non-staining. Exposed fasteners must be tamper-proof.

2.8 SHOP FABRICATION AND MANUFACTURE

2.8.1 Factory Workmanship

Work must be assembled in the shop, as far as practical, ready for installation at the site. Work that cannot be shop assembled must be given a trial fit in the shop to ensure proper field assembly. Holes for bolts and screws must be drilled or punched. Drilling and punching must produce clean, true lines and surfaces. Welding to or on structural steel must be in accordance with AWS D1.1/D1.1M. Welding must be continuous along the entire area of contact. Exposed welds must be ground smooth. Exposed surfaces of work must have a smooth finish and exposed riveting must be flush. Fastenings must be concealed where practical. Items specified to be galvanized must be by hot-dip process after fabrication if practical. Galvanization must be in accordance with ASTM A123/A123M and ASTM A653/A653M, as applicable. Other metallic coatings of steel sheet must be in accordance with ASTM A924/A924M. Joints exposed to the weather must be formed to exclude water. Drainage and weep holes must be included as required to prevent condensation buildup.

2.8.2 Dissimilar Materials

Where dissimilar metals are in contact, or where aluminum is in contact with concrete, mortar, masonry, wet or pressure-treated wood, or absorptive materials subject to wetting, the surfaces must be protected with a coat of asphalt varnish or a coat of zinc-molybdate primer to prevent galvanic or corrosive action.

2.8.3 Shop Painting

Surfaces of miscellaneous metal work, except nonferrous metal, corrosion resisting steel, and zinc-coated work, must be given one coat of zinc-molybdate primer or an approved rust-resisting treatment and metallic primer in accordance with manufacturer's standard practice. Surfaces of items to be embedded in concrete must not be painted. Upon completion of work, damaged surfaces must be recoated.

2.9 COLOR, FINISH, AND CONTRAST

For buildings required to be handicapped-accessible, the characters and background of signs must be eggshell, matte, or other non-glare finish. Characters and symbols must contrast with their background - either light characters on a dark background or dark characters on a light background.

PART 3 EXECUTION

3.1 INSTALLATION

Signs, plaques, or dimensional letters must be installed in accordance with approved manufacturer's instructions at locations shown on the approved detail drawings; submit drawings showing elevations of each type of sign; dimensions, details, and methods of mounting or anchoring; shape and thickness of materials; and details of construction. A schedule showing the location, each sign type, and message must be included. Signs must be installed plumb and true at mounting heights indicated, and by method shown or specified. Signs mounted on other surfaces must not be installed until finishes on such surfaces have been completed. Submit manufacturer's installation instructions and cleaning instructions.

3.1.1 Anchorage

Anchorage and fastener materials must be in accordance with approved manufacturer's instructions for the indicated substrate. Anchorage not otherwise specified or indicated must include slotted inserts, expansion shields, and powder-driven fasteners when approved for concrete; toggle bolts and through bolts for masonry; machine carriage bolts for steel; lag bolts and screws for wood.

3.1.2 Protection and Cleaning

The work must be protected against damage during construction. Hardware and electrical equipment must be adjusted for proper operation. Frames and other sign surfaces must be cleaned in accordance with manufacturer's instructions. After signs are completed and inspected, cover all project identification, directional, and other signs which may mislead the public. Covering must be maintained until instructed to be removed by the Contracting Officer or until the facility is to be opened for business. Submit six copies of maintenance instructions listing routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guides. The instructions must include simplified diagrams for the equipment as installed. Signs must be cleaned, as required, at time of cover removal.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 14 00.20

INTERIOR SIGNAGE
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF45	(2003; Reaffirmed 2009) Designation System for Aluminum Finishes
AA PK-1	(2015) Pink Sheets: Designations and Chemical Composition Limits for Aluminum Alloys in the Form of Castings & Ingot

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2604	(2017a) Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels

AMERICAN WELDING SOCIETY (AWS)

AWS D1.2/D1.2M	(2014; Errata 1 2014; Errata 2 2020) Structural Welding Code - Aluminum

ASTM INTERNATIONAL (ASTM)

ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

INTERNATIONAL CODE COUNCIL (ICC)

ICC A117.1 COMM	(2017) Standard And Commentary Accessible and Usable Buildings and Facilities

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 101	(2024) Life Safety Code

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act

(ABA) Accessibility Guidelines

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval.Submittals with an "S" are for inclusion in the Sustainability eNotebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Installation; G

Warranty; G

SD-04 Samples

Interior Signage; G

Software; G

SD-10 Operation and Maintenance Data

Approved Manufacturer's Instructions; G

Protection and Cleaning; G

1.3 EXTRA MATERIALS

Provide 3 extra frames and extra stock of the following: blank plates of each color and size for each sign type. Provide 3 extra changeable message strips for each sign type. Provide 3 paper inserts per sign and one copy of the software for user produced signs and inserts after project completion and equipment necessary for removal of signage parts and pieces.

1.4 QUALITY ASSURANCE

1.4.1 Samples

Submit interior signage samples of each of the following sign types showing typical quality, workmanship and color: Directional sign, Standard Room sign, Changeable message strip sign. The samples may be installed in the work, provided each sample is identified and location recorded.

1.4.2 Detail Drawings

Submit detail drawings showing elevations of each type of sign, dimensions, details and methods of mounting or anchoring, mounting height, shape and thickness of materials, and details of construction. Include a schedule showing the location, each sign type, and message.

1.5 DELIVERY, STORAGE, AND HANDLING

Materials must be packaged to prevent damage and deterioration during shipment, handling, storage and installation. Product must be delivered to the jobsite in manufacturer's original packaging and stored in a clean, dry area in accordance with manufacturer's instructions.

1.6 WARRANTY

Warrant the interior signage for a period of 2 years against defective workmanship and material. Warranties must be signed by the authorized representative of the manufacturer. Submit warranty accompanied by the document authenticating the signer as an authorized representative of the guarantor. Guarantee that the signage products and the installation are free from any defects in material and workmanship from the date of delivery.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Signs, plaques, directories, and dimensional letters must be the standard product of a manufacturer regularly engaged in the manufacture of such products that essentially duplicate signs that have been in satisfactory use at least 2 years prior to bid opening. Obtain signage from a single manufacturer with edges and corners of finished letterforms and graphics true and clean.

2.2 ROOM IDENTIFICATION/DIRECTIONAL SIGNAGE SYSTEM

2.2.1 Standard Room Signs

Signs must incorporate an ABS plastic face with applied graphics including all tactile requirements in adherence to ABA and ADA requirements. All signs must have matching appearance and construction utilizing the same manufacturing process to assure consistent look and quality and must conform to the following:

a. Signage must utilize an acrylic sphere for Grade II Braille inserted directly into a scratch resistant, high pressure laminate sign face. Braille dots are to be pressure fit in high tolerance drilled holes. Braille dots must be half hemispherical domes, protruding a minimum of 0.025".

b. End caps must be aluminum style corners.

c. Tactile Lettering must be precision machined, raised 1/32", matte PETG and subsurface colored for scratch resistance.

2.2.2 Changeable Message Strip Signs

Changeable message strip signs must be of same construction as standard room signs to include a clear sleeve that will accept a paper or plastic insert identifying changeable text. The insert must be prepared typeset message mounted on paper card stock. Provide paper and software for creating text and symbols for computers identified by owner for Owner production of paper inserts after project completion. Clear sleeve must be removable without any special tools.

2.2.3 Type of Mounting For Signs

Provide extruded aluminum brackets for hanging, projecting, and double-sided signs. Mounting for framed, hanging, and projecting signs must be by mechanical fasteners. All signs must be provided with appropriate mounting hardware for the wall substrate. Hardware must be finished and architectural in appearance. Some signs may be mounted on glass. A blank backer is required.

2.2.4 Graphics

Signage graphics for modular signs must conform to the following:

2.2.4.1 Subsurface Copy

Copy is transferred to the back face of clear acrylic sheeting forming the panel face to produce precisely formed opaque image. This method bonds all sign elements (color, graphics, lettering, Braille and substrate) into a single unit.

2.2.4.2 First Surface Copy Direct Print or Silkscreened (Non-Tactile)

Message may be applied to panel using the silkscreen process. Silkscreened images must be executed with photo screens prepared from original art. Handcut screens will not be accepted. Original art is defined as artwork that is a first generation reproduction of the specified art. Edges and corners must be clean.

2.2.4.3 Surface Applied Photopolymer

Integral graphics and Braille achieved by photomechanical stratification processes. Photopolymer used for ADA compliant graphics must be of the type that has a minimum durometer reading of 90. Tactile graphics must be raised 1/32 inch from the first surface of plaque by photomechanical stratification process.

2.2.5 Character Proportions and Heights

Letters and numbers on signs conform to 36 CFR 1191.

2.2.6 Tactile Letters, Symbols and Braille

Raised letters and numbers on signs must conform to 36 CFR 1191.

2.3 STAIR SIGNAGE

Provide signs on stairs serving three or more stories with special signage within the enclosure at each floor landing conforming to NFPA 101. Indicate the floor level, the terminus of the top and bottom of the stair enclosure, and the identification of the stair enclosure. Also, state the floor level of, and the direction to, exit discharge. Locate the signage inside the enclosure in a position that is visible when the door is in the open or closed position and install in conformance with 36 CFR 1191. The floor level designation must also be tactile in accordance with ICC A117.1 COMM.

2.4 BUILDING DIRECTORIES

Building directories must be lobby directories or floor directories, and

must be provided with a changeable directory listing consisting of the areas, offices and personnel located within the facility. Dimensions, details, and materials of sign and message content must be as shown on the drawings.

2.5 ALUMINUM ALLOY PRODUCTS

Aluminum extrusions must be at least 1/8 inch thick, and aluminum plate or sheet must be at least 0.0508 inch thick. Extrusions must conform to ASTM B221; plate and sheet must conform to ASTM B209. Where anodic coatings are specified, alloy must conform to AA PK-1 alloy designation 514.0. Exposed anodized aluminum finishes must be as shown. Welding for aluminum products must conform to AWS D1.2/D1.2M.

2.6 Marking and Identification of Fire and Smoke Rated Wall and Floor Assemblies

Identify all fire walls, fire barriers, fire partitions, smoke barriers, smoke partitions or any other wall floor/ceiling required to have protected openings with signs stating the following; "FIRE AND/OR SMOKE BARRIER-DO NOT PENETRATE". For aesthetic reasons, this requirement does not apply to walls inside stairwells or non-industrial areas such as offices, lobbies, etc. that do not have drop ceilings. Do not apply to locations were protected openings are not required.

Apply signs using florescent red or orange paint over stencils. Letters must be a minimum of 4-inches (100 mm) in height. Metal, plastic or paper decal signs are not acceptable. Take care when applying signage to prevent over-spray onto adjacent finishes/surfaces.

In areas with drop ceilings, paint notification on the wall above the drop/finished ceiling. In mechanical, electrical and other similar rooms, place signs at 8-feet (2.4 m) above finished floor level. Space signs at a maximum of 10-feet (3.0 m) intervals. Maximum distance from intersecting walls is 5 feet.

Apply signs onto floors and ceilings along the parameter of enclosing walls.

2.7 ANODIC COATING

Anodized finish must conform to AA DAF45 as follows:

a. Clear (natural) designation AA-M10-C22-A31, Architectural Class II 0.4 mil or thicker.

2.8 ORGANIC COATING

Organic coating must conform to AAMA 2604, with total dry film thickness not less than 1.2 mils.

2.9 FABRICATION AND MANUFACTURE

2.9.1 Factory Workmanship

Holes for bolts and screws must be drilled or punched. Drilling and punching must produce clean, true lines and surfaces. Exposed surfaces of work must have a smooth finish and exposed riveting must be flush.

Fastenings must be concealed where practicable.

2.9.2 Dissimilar Materials

Where dissimilar metals are in contact, the surfaces will be protected to prevent galvanic or corrosive action.

2.10 COLOR, FINISH, AND CONTRAST

Color must be as indicated on the drawings. Finish of all signs must be eggshell, matte, or other non-glare finish as required in handicapped-accessible buildings.

2.11 TYPEFACE

ADA-ABA compliant font for Room Signs.

PART 3 EXECUTION

3.1 INSTALLATION

Signs must be installed plumb and true and in accordance with approved manufacturer's instructions at locations shown on the detail drawings. Submit six copies of operating instructions outlining the step-by-step procedures required for system operation. The instructions must include simplified diagrams for the system as installed, the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and their basic operating features. Each set must be permanently bound and must have a hard cover. The following identification must be inscribed on the covers: the words "OPERATING AND MAINTENANCE INSTRUCTIONS", name and location of the facility, name of the Contractor, and contract number. Mounting height and mounting location must conform to 36 CFR 1191. Required blocking must be installed. Signs on doors or other surfaces must not be installed until finishes on such surfaces have been installed. Signs installed on glass surfaces must be installed with matching blank back-up plates in accordance with manufacturer's instructions.

Do not install items that show visual evidence of biological growth.

3.1.1 Anchorage

Anchorage must be in accordance with approved manufacturer's instructions. In high humidity interior spaces (for example, bathrooms, locker rooms, pools, trainers) and unconditioned spaces, use corrosion-resistant anchors/fasteners or with approval by the manufacturer, waterproof silicone adhesive. Anchorage not otherwise specified or shown must include slotted inserts, expansion shields, and powder-driven fasteners when approved for concrete; toggle bolts and through bolts for masonry; machine carriage bolts for steel; lag bolts and screws for wood. Exposed anchor and fastener materials must be compatible with metal to which applied and must have matching color and finish. At interior applications in heavy traffic areas, firmly attach signage to structure walls with tamper-proof fasteners.

a. Signs mounted to painted gypsum board surfaces must be removable for painting maintenance.

b. Install signs mounted on metal surfaces with magnetic tape.

3.1.2 Protection and Cleaning

Protect the work against damage during construction. Hardware and electrical equipment must be adjusted for proper operation. Glass, frames, and other sign surfaces must be cleaned at completion of sign installation in accordance with the manufacturer's approved instructions and the requirements of Section 01 78 23 OPERATION AND MAINTENANCE DATA, Package 1. Submit six copies of maintenance instructions listing routine procedures, repairs, and guides.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 21 13

TOILET COMPARTMENTS
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF45	(2003; Reaffirmed 2009) Designation System for Aluminum Finishes

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A167	(2011) Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A336/A336M	(2023) Standard Specification for Alloy Steel Forgings for Pressure and High-Temperature Parts
ASTM A385/A385M	(2022) Standard Practice for Providing High-Quality Zinc Coatings (Hot-Dip)
ASTM B36/B36M	(2023) Standard Specification for Brass Plate, Sheet, Strip, and Rolled Bar
ASTM B86	(2023) Standard Specification for Zinc and Zinc-Aluminum (ZA) Alloy Foundry and Die Castings
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM B456	(2017; R 2022) Standard Specification for Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
ASTM D7611/D7611M	(2013; E 2014) Standard Practice for Coding Plastic Manufactured Articles for Resin Identification

INTERNATIONAL CODE COUNCIL (ICC)

ICC A117.1	(2017) Standard And Commentary Accessible and Usable Buildings and Facilities

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)

SAE AMS2460	(2023; Rev B) Plating, Chromium

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-60003	(Basic; Notice 1) Partitions, Toilet, Complete

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Fabrication Drawings

Installation Drawings; G

SD-03 Product Data

Cleaning and Maintenance Instructions

Colors And Finishes

Anchoring Devices and Fasteners

Hardware and Fittings

Brackets

Door Hardware

Pilaster Shoes

Finishes; G

Plastic Identification

Toilet Enclosures

Urinal Screens

SD-04 Samples

Colors and Finishes; G

Hardware and Fittings

Anchoring Devices and Fasteners

SD-07 Certificates

Warranty

1.3 CERTIFICATIONS

1.4 REGULATORY REQUIREMENTS

Comply with to ICC A117.1 code for access for the handicapped operation of toilet compartment door and hardware.

1.5 DELIVERY, STORAGE, AND HANDLING

Deliver materials in the manufacturer's original unopened packages with the brand, item identification, and project reference clearly marked. Store components in a dry location that is adequately ventilated; free from dust, water, other contaminants, and damage during delivery, storage, and construction.

1.6 WARRANTY

Provide manufacturer's warranty to repair or replace defective materials and workmanship for a period of one year from date of final acceptance of the work.

PART 2 PRODUCTS

2.1 SYSTEM REQUIREMENTS

Provide a complete and usable toilet partition system, including toilet enclosures, room entrance screens, urinal screens, system of panels, hardware, and support components. Furnish the partition system from a single manufacturer, with a standard product as shown in the most recent catalog data. Submit Fabrication Drawings for toilet partitions and urinal screens consisting of fabrication and assembly details to be performed in the factory. Submit manufacturer's Cleaning and Maintenance Instructions.

2.1.1 Plastic Identification

Verify that plastic products to be incorporated into the project are labeled in accordance with ASTM D7611/D7611M.

Type 2	High Density Polyethylene (HDPE)

2.2 MATERIALS

2.2.1 Solid Polyethylene Panels (Finish 5)

Provide high density polyethylene (HDPE) suitable for exposed application. Waterproof, non-absorbent and graffiti resistant textured surface with a

Flame Spread Index of 75 or less, and a Smoke Developed Index of 450 or less.

2.2.2 Anchoring Devices and Fasteners

Provide steel anchoring devices and fasteners hot-dipped galvanized after fabrication, in conformance with ASTM A385/A385M and ASTM A123/A123M. Conceal all galvanized anchoring devices.

2.2.3 Brackets

Provide two-ear panel wall brackets, T-style, 1 inch stock. Provide stirrup style panel-to-pilaster brackets.

2.2.4 Hardware and Fittings

2.2.4.1 General Requirements

Provide hardware for the toilet partition system that complies with CID A-A-60003 for the specified type and style of partitions. Provide hardware finish highly resistant to alkalis, urine, and other common toilet room acids. Comply with 36 CFR 1191 of latching devices and hinges for handicap compartments; provide stainless steel devices and hinges with door latches that operate without either tight grasping or twisting of the wrist of the operator. Submit three samples of each item, including anchoring devices and fasteners. Approved hardware samples may be installed in the work if properly identified.

Material	Conformance Standard
Cold-rolled sheet steel	ASTM A336/A336M, commercial quality
Zinc-base alloy	ASTM B86, Alloy AC41-A
Brass	ASTM B36/B36M, Alloy C26800
Aluminum	ASTM B221
Corrosion-resistant steel	ASTM A167, Type 304

2.2.4.2 Finishes

a. Provide chrome plating that complies with ASTM B456.

b. Provide finish that complies with SAE AMS2460, Class I, Type I.

c. Provide aluminum with clear anodic coating that complies with AA DAF45.

d. Provide corrosion-resistant steel with a No. 4 finish.

e. Provide stainless steel with a No. 4 finish.

f. Provide exposed fasteners that match the hardware and fittings.

2.2.5 Door Hardware

2.2.5.1 Hinges

Provide adjustable hinges to hold in-swinging doors open at any angle up to 90 degrees and outswinging doors up to 10 degrees. Provide self-lubricating hinges with the indicated swing. Provide hinges that are semi-concealed and have the following type of return movement:

a. Gravity return movement

2.2.5.2 Latch and Pull

Provide latch and pull that is a combination rubber-faced door strike and keeper equipped with emergency access. Provide surface mounted latch.

2.2.5.3 Coat Hooks

Provide coat hooks that are combination units with hooks and rubber tipped pins.

2.3 PARTITION PANELS AND DOORS

Fabricate partition panels, and pilasters of materials and construction listed:

Provide plastic (HDPE) partition panels, doors and pilasters not less than 1 inch thick.

2.3.1 Toilet Enclosures

Provide toilet enclosures that comply with CID A-A-60003, Type I, Style A, floor supported. Furnish width, length, and height of toilet enclosures as shown. Finish surface of panels are solid polyethylene (Finish 5); water resistant; graffiti resistant; non-absorbent radius beveled edges. Reinforce panels indicated to receive toilet paper holders or grab bars for mounting of the items required, and provide cut outs for through partition toilet accessories. Provide grab bars to withstand a bending stress, shear stress, shear force, and a tensile force induced by 250 lbf. Grab bars cannot rotate within their fittings.

2.3.2 Urinal Screens

Provide urinal screens that comply with CID A-A-60003, Type III, Style F, wall hung. Provide finish for surface of screens as solid polyethylene (Finish 5); water resistant; graffiti resistant; non-absorbent with radius beveled edges; with manufacturer's standard post design of materials matching the thickness and construction of pilasters. Furnish width and height of urinal screens as shown. Provide thickness to match toilet compartment panel construction. Secure wall hung urinal screens with a minimum of three wall stirrup brackets. 42 inches long, continuous flanges. Fabricate screens from the same types of panels and pilasters as the toilet partitions. Use corrosion-resistant steel fittings and fasteners.

2.4 FLOOR-ANCHORED PARTITIONS

Provide pilasters in size indicated that are manufacturer's standard corrosion resistant anchoring assemblies complete with leveling adjustment nuts and pilasters for structural connection to floor. Provide anchoring

device at the bottom of the pilaster consisting of a steel bar not less than 1/2 by 7/8 inch welded to the reinforced face sheets and having not less than two 3/8 inch round anchorage devices for securing to the floor slab. Provide anchorage devices complete with threaded rods, expansion shields, lock washers, and leveling-adjustment nuts. Provide shoes at pilasters to conceal anchorage.

2.5 PILASTER SHOES

Provide shoes at pilasters to conceal floor-mounted anchorage. Provide stainless steel pilaster shoes. Height is a minimum 3 inches.

2.6 HARDWARE

Provide hardware for the toilet partition system that complies with CID A-A-60003 for the specified type and style of partitions. Provide hardware pre-drilled by manufacturer. Use a hardware finish that is highly resistant to alkalis, urine, and other common toilet room acids. Hardware includes: chrome plated nonferrous cast pivot hinges, gravity type, adjustable for door close positioning; nylon bearings; aluminum door latch; door strike and keeper with rubber bumper; and cast alloy chrome plated coat hook and bumper. Provide latching devices and hinges for handicap compartments complying with 36 CFR 1191 and stainless steel door latches that operate without either tight grasping or twisting of the wrist of the operator. Use stainless steel, tamper proof type screws and bolts. Wall mounting brackets are continuous, full height, stainless steel, in accordance with toilet compartment manufacturer's instructions. Provide floor-mounted anchorage consisting of corrosion-resistant anchoring assemblies with threaded rods, lock washers, and leveling adjustment nuts at pilasters for structural connection to floor.

2.7 COLORS AND FINISHES

2.7.1 Colors

Provide color as specified in the drawings. Color listed is not intended to limit the selection of equal colors from other manufacturers.

Color of pilaster shoes matches the core of solid plastic compartments and screens. Submit three samples showing color and a finished edge on two adjacent sides and core construction, each not less than 12 inch square.

2.7.2 Finishes

2.7.2.1 Finishes No. 4, No 4A and No. 5

Provide manufacturer's standard solid polyethylene (Finish 5) formed under high pressure rendering a single component section not less than 1 inch thick. Colors extend throughout the panel thickness.

PART 3 EXECUTION

3.1 PREPARATION

Take field measurements prior to the preparation of drawing and fabrication to ensure proper fits. Verify that field measurements, surfaces, substrates and conditions are as required, and ready to receive work. Verify correct spacing of plumbing fixtures. Verify correct location of built in framing, anchorage, and bracing. Report in writing

to Contracting Officer prevailing conditions that adversely affect satisfactory execution of the work of this section. Do not proceed with work until unsatisfactory conditions have been corrected.

3.2 INSTALLATION

Do not install items that show visual evidence of biological growth. Install partitions rigid, straight, plumb, and level, with the panels centered between the fixtures. Provide a panel clearance of not more than 1/2 inch and secure the panels to walls and pilasters with continuous full height wall brackets. Locate wall brackets so that holes for wall bolts occur in masonry or tile joints. Secure panels to pilasters with brackets matching the wall brackets. Provide for adjustment due to minor floor variations. Locate head rail joints at pilaster center lines. Install adjacent components for consistency of line and plane. Equip each door with hinges, one door latch, and one coat hook and bumper. Align hardware to uniform clearance at vertical edges of doors.

a. Secure panels to hollow plastered walls with toggle bolts using not less than 1/4-20 screws of the length required for the wall thickness. Provide toggle bolts with a load-carrying strength of not less than 600 pounds per anchor.

b. Secure panels to ceramic tile on hollow plastered walls or hollow concrete-masonry walls with toggle bolts using not less than 1/4-20 screws of the length required for the wall thickness. Provide toggle bolts with a load-carrying strength of not less than 600 pounds per anchor.

c. Secure panels to solid masonry or concrete with lead or brass expansion shields designed for use with not less than 1/4-20 screws, with a shield length of not less than 1-1/2 inches. Provide expansion shields with a load-carrying strength of not less than 600 pounds per anchor.

d. Submit Installation Drawings for toilet partitions, room entrance screens, and urinal screens showing plans, elevations, details of construction, hardware, reinforcing and blocking, fittings, mountings and escutcheons. Indicate on drawings the type of partition, location, mounting height, cutouts, and reinforcement required for toilet-room accessories.

3.3 FLOOR-ANCHORED PARTITIONS

Secure pilasters to the floor with the anchorage device specified. Make all leveling devices readily accessible for leveling, plumbing, and tightening the installation. Level tops of doors with tops of pilasters when doors are in a closed position. Expansion shields have a minimum 2 inch penetration into the concrete slab.

3.4 FINAL ADJUSTMENT

After completion of the installation, make final adjustments to the pilaster-leveling devices, door hardware, and other working parts of the partition assembly. Doors have a uniform vertical edge clearance of approximately 3/16 inch and rest open at approximately 30 degrees when unlatched.

3.5 CLEANING

Clean all surfaces and adjacent surfaces soiled as a result of the work, in an approved manner compliant with the manufacturer's recommended cleaning and protection from damage procedures until accepted. Remove all equipment, tools, surplus materials, and work debris from the site.

-- End of Section --

SECTION 10 26 00

WALL AND DOOR PROTECTION
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	(2025a) Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

GREEN SEAL (GS)

GS-36	(2013) Adhesives for Commercial Use

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

UNDERWRITERS LABORATORIES (UL)

UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submittals with an "S" are for inclusion in the Sustainability eNotebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Corner Guards; G

SD-03 Product Data

Corner Guards; G

SD-04 Samples

Finish; G

SD-06 Test Reports

Corner Guards

SD-07 Certificates

Corner Guards

Indoor air quality for adhesives; S

1.3 CERTIFICATIONS

1.3.1 Indoor Air Quality

1.3.1.1 Adhesives and Sealants

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party program that products meet the requirements of this section. Provide current product certification documentation from certification body When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein..

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the project site in manufacturer's original unopened containers with seals unbroken and labels and trademarks intact. Keep materials dry, protected from weather and damage, and stored under cover. Materials must be stored at approximately 70 degrees F for at least 48 hours prior to installation.

1.5 WARRANTY

Provide manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

To the maximum extent possible corner guards must be the standard products of a single manufacturer and must be furnished as detailed. Drawings show general configuration of products required, and items differing in minor details from those shown will be acceptable.

2.2 CORNER GUARDS

2.2.1 Stainless Steel Corner Guards

Stainless steel corner guards must be fabricated of 16 gauge thick material conforming to ASTM A240/A240M, type 302 or 304. Corner guards must extend from floor to ceiling. Edges of corner guards must be finished to a smooth edge with no cut, unfinished edges showing. Install corner guards in locations as shown on the drawings. Refer to drawings for finish.

2.3 TRIM, FASTENERS AND ANCHORS

Provide vinyl trim, fasteners and anchors for resiliant installation as shown. Provide stainless steel trim, fasteners and anchors for stainless steel corner guards. All trim, fastners and anchors must be concealed after installation.

2.4 FINISH

Submit three samples indicating color and texture of materials requiring color and finish.

2.4.1 Stainless Steel Finish

Finish for stainless steel must be in accordance with ASTM A240/A240M, Type 302 or 304, finish number 4.

2.5 ADHESIVES

Adhesive for metal material must be in accordance with manufacturers recommendations. Corner guard must be mechanically fastened. All mounting hardware must be hidden with finished product. Provide sealants and non-aerosol adhesive products used on the interior of the building (defined as inside of the weatherproofing system) that meet either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) the VOC content requirements of SCAQMD Rule 1168, or VOC content requirements of GS-36. Provide certification or validation of indoor air quality for adhesives.

2.6 COLOR

Color must be as indicated on the drawings. Color listed is not intended to limit the selection of equal colors from other manufacturers.

PART 3 EXECUTION

3.1 INSTALLATION

Do not install items that show visual evidence of biological growth.

3.1.1 Corner Guards

Material must be mounted at location indicated in accordance with manufacturer's recommendations.

3.1.2 Stainless Steel Guards

a. Mount guards on external corners of interior walls, partitions and columns as in accordance with manufacturer's recommendations for a mechanically fastened installation.

b. Where corner guards are installed on walls, partitions or columns finished with plaster or ceramic tile on steel or wood stud, anchor corner guards with number 10 1 1/2 inch S/S flat head wood screws. Coat back surfaces of corner guards, where shown, with a non-flammable, sound deadening material. Corner guards must overlap finish plaster surfaces.

c. Where corner guards are installed on exposed structural glazed facing tile units or masonry wall, partitions or columns, anchor corner guards with number 10 X 1 1/2 inch S/S flat head wood screw and AF-8 plastic anchors. Grout spaces solid between guards and backing with portland cement and sand mortar.

d. Where corner guards are installed on gypsum board, clean surfaces and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Remove excess adhesive from the guard edges and allow to cure undisturbed for 24 hours.

e. For wall guards, space brackets at no more than 3 feet on centers and anchor to the wall in accordance with the manufacturer's installation instructions.

-- End of Section --

SECTION 10 28 13

TOILET ACCESSORIES
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-STD-1691	(1994; Rev F) Construction and Material Schedule for Military Medical and Dental Facilities

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Product Schedule; G

Submit product Schedule indicating types, quantities, sizes, and installation locations by room for each toilet accessory item required. Identify locations using room designations indicated on the drawings.

SD-03 Product Data

Recycled content for stainless steel toilet accessories; G

Sanitary Napkin Disposal (SND); G, SS, Surface Mounted

Item A5109 Grab Bar, 1-1/4 inch Dia., SS, 2 Wall, W/C Accessible; G

Hook, Garment, Security; G, Security

Item A5165 Shelf (LS) and (SS), 5 inch Depth, SS, Surface Mounted; G

Shower Curtain Rod (SCR); G, 1 inch Diameter, W/Curtain & Hooks

Toilet Tissue Dispenser (TTD); G, SS, 2-Roll, Surface Mntd

Mirror (WM); G

Foam Soap Dispenser (SD); G

Semi Recessed Waste Receptacle and Paper Towel Dispenser (ITDW); G

Submit catalog numbers, literature, data sheets, construction details, profiles, anchoring and mounting requirements ,including cutouts in other work and substrate preparation, electrical characteristics, and other pertinent data for each toilet accessory item to evaluate function, materials, dimensions and appearance.

SD-10 Operation and Maintenance Data

Sanitary Napkin Disposal (SND); G, SS, Surface Mounted Grab Bar, 1-1/4 inch Dia., SS, 2 Wall, W/C Accessible; G

Hook, Garment, Security; G, Security

Item A5165 Shelf (LS) and (SS), 5 inch Depth, SS, Surface Mounted; G

Shower Curtain Rod (SCR); G, 1 inch Diameter, W/Curtain & Hooks

Toilet Tissue Dispenser (TTD); G, SS, 2-Roll, Surface Mntd

Mirror (WM); G

Foam Soap Dispenser (SD); G

Semi Recessed Waste Receptacle and Paper Towel Dispenser (ITDW); G

Submit Data Package 1 for each toilet accessory item in accordance with Section 01 78 23 OPERATIONS AND MAINTENANCE DATA.

1.3 DELIVERY, STORAGE, AND HANDLING

Wrap toilet accessories for shipment and storage, then deliver to the jobsite in manufacturer's original packaging, and store in a clean, dry area protected from construction damage and vandalism.

1.4 WARRANTY

Provide manufacturer's warranty to repair or replace defective materials and workmanship for a period of one year from date of final acceptance of the work..

PART 2 PRODUCTS

2.1 ACCESSORY ITEMS

Provide toilet accessories where indicated in accordance with Contractor-provided product schedule. Conform to the requirements for accessory items specified herein which are based on MIL-STD-1691 Joint Schedule Numbers (JSN). Provide each accessory item complete with the necessary mounting plates of sturdy construction with corrosion resistant surface.

Provide stainless steel products listed herein manufactured from materials containing a minimum of 50 percent recycled content. Provide data identifying percentage of recycled content for stainless steel toilet accessories.

2.1.1 Anchors and Fasteners

Provide corrosion-resistant anchors and fasteners capable of developing a restraining force commensurate with the strength of the accessory to be mounted and suited for use with the supporting construction. Provide oval heads exposed fasteners with finish to match the accessory. Provide fasteners proposed for use for each type of wall construction and mounting.

2.1.2 Finishes

Except where noted otherwise, provide the following finishes on metal:

Metal	Finish
Stainless steel	No. 4 satin finish
Carbon steel, copper alloy, and brass	Chromium plated, bright

2.1.3 Sanitary Napkin Disposal (SND) , SS, Surface Mounted

Surface mounted sanitary napkin receptacle. Unit made of stainless steel with satin finish and all welded construction. Unit has piano hinge attached at the top and an integral finger depression for opening. For use with disposable paper liners, available separately. Unit may be attached to wall or toilet partition.

Approximate size: 7 inches wide by 4 inches deep by 10 inches high.

2.1.4 Item A5109 Grab Bar, 1-1/4 Inch Diameter, SS, 2 Wall, W/C Accessible

Grab bar of 1-1/4 inch diameter satin finish stainless steel with peened gripping surface for use in toilet stall/room. Snap-on flange covers for concealed mounting are stainless steel and equipped with two screw holes for attachment to wall. Grab bars designed to meet and exceed ADA requirements for structural strength. Grab bars designed to withstand loads of 900 pounds when properly installed. Clearance from wall to grab bar is 1-1/2 inches to meet ADA and ANSI codes.

2.1.5 Hook, Garment, Security

Anti ligature robe hooks have a pivoting ball joint that releases upon application of excessive force and is reset by hand. The mounting flange is fabricated of 0.125 inch, 11 gauge Type 304 stainless steel with a 3 inch diameter and 2.5 inch projection. The hook is a 0.3125 inch diameter stainless steel rod. Secure with three 0.25 inch by 1.5 inch tamper resistant Torx with center pin in the fastener head.

2.1.6 Item A5165 Shelf (LS) and (SS), 5 Inch Depth, SS, Surface Mounted

Surface mounted shelf of 18 gauge stainless steel with all exposed surfaces in satin finish. Shelf has minimum depth of 5 inches. Center bracket and end brackets of stainless steel, welded to shelf. Shelf

length as indicated on drawings.

2.1.7 Shower Curtain Rod (SCR), 1 Inch Diameter, W/Curtain & Hooks

Break away shower curtain rods are supported by one spring mount and one standard mount. Mounts are 3 inches in diameter, 0.125 inch, 11 gauge Type 304 stainless steel fabrications sized to receive shower curtain rods. Springs are 0.032 inch, 22 gauge, Type 301 stainless steel formed to fit inside mounts. Shower rods release from spring mounts under excessive load. Exposed fasteners are countersunk, oval head screws. Hookless shower curtain and liner is 6 feet, 0 inch tall with grommets. Curtains are 100% polyester and incorporate a snap on liner with viewing window above the shoulder. Liners are 100% waterproof with ultrasonic hems and stitch free, allowing rapid water runoff that reduces mildewing.

2.1.8 Toilet Tissue Dispenser (TTD), SS, 2-Roll, Surface Mounted

Double roll toilet paper holders for surface mounting on toilet compartment panels and existing walls are 0.031 inch, 22 gauge Type 304 stainless steel with a plastic, spring loaded rollers having a chrome finish. Brackets project 3.825 inches. Posts are fabricated from 0.5 inch by 1 inch tubing. Bases are 2 inches square by 0.4375 inches deep with concealed 0.050 inch, 18 gauge mounting plates and set screws. Spindles accommodate two rolls up to 5.5 inches in diameter and turn freely for non controlled toilet tissue delivery.

Dimensions are 1 foot, 1.5 inches wide, 2 inches high and the spindle brackets project 3.825 inches.

2.1.9 Mirror (WM)

Mirror frames are 0.050 inch, 18 gauge Type 304 stainless steel angles fabricated into 0.75 inch by 0.625 inch channels with mitered, heilarc welded corners that are ground and polished smooth. Concealed members are corrosion protected steel. Fabricate mirror backs with 0.036 inch, 20 gauge back panels incorporating 0.050 inch, 18 gauge mounting brackets interlocked with frame tops and bottoms. Place filler material at mirror edges, and between mirrors and back panels. Mirrors are first quality, electrolytic copper backing on 0.25 inch plate or float glass, complying with ASTM C 1036 and ASTM C 1503.

WM-1 Approximate size: 2 feet, 0 inches wide by 3 feet, 0 inches high.
WM-2 Approximate size: 2 feet, 6 inches wide by 3 feet, 0 inches high.

2.1.10 Foam Soap Dispenser (SD) Surface Mounted

Foam soap dispensers have chrome plated, ABS plastic valves incorporated into 0.038 inch, 20 gauge Type 304 stainless steel bodies and backs. Wall plates are stainless steel. Units have 40 fluid ounces of capacity, and are top filled through locked openings. Surface mount with a vertical orientation. Valves actuate with no more than 5 pounds of pressure. Furnish tamper resistant sight level indicators. Provide two keys per unit.

Approximate size: 4.8125 inches wide by 8.25 inches high by 2.825 inches deep and valves project 1.6875 inches.

2.1.11 Semi Recessed Waste Receptacle and Paper Towel Dispenser (ITDW)

Semi recessed waste receptacle and paper towel dispenser units hold 800 multi-fold or 600 C-fold paper towels. Waste receptacles accommodate 12 gallon liners. Unit doors, frames, waste containers and cabinets are 18-8 alloy, Type 304 stainless steel. Unit doors and backs are 0.050 inch, 18 guage, and other fabrications are 0.031 inch, 22 gauge. Exposed surfaces are protected by PVC film. Doors are fabricated of double pan construction with fiberboard filler, have full length, 0.1875 inch diameter multi staked, stainless steel piano hinges and are fit with tumbler locks. Provide two keys per unit. Towel dispensing slots have hemmed edges for user safety. Waste containers have hemmed edges and are secured with tumbler locks. Face trims are 1 inch in width and formed from a single piece free of miters, welds and open seams with a 0.25 inch square return to walls. Structural components are of welded construction. Cabinet fasteners and spot welds are concealed. Labeling provides operating instructions.

Outside flange dimensions are 1 foot, 5.25 inches wide, 4 feet, 8 inches high and recessed 1.25 inches into wall substrates. Units project 2.75 inches from wall faces.

PART 3 EXECUTION

3.1 INSTALLATION

Do not install items that show visual evidence of biological growth. Provide the same finish for the surfaces of fastening devices exposed after installation as the attached accessory. Provide oval exposed screw heads. Install accessories at the location and height indicated. Protect exposed surfaces of accessories with strippable plastic or by other means until the installation is accepted. After acceptance of accessories, remove and dispose of strippable plastic protection. Coordinate accessory manufacturer's mounting details with other trades as their work progresses. After installation, thoroughly clean exposed surfaces and restore damaged work to its original condition or replace with new work.

3.1.1 Surface Mounted Accessories

Mount on concealed backplates, unless specified otherwise. Conceal fasteners on accessories without backplates. Install accessories with corrosion-resistant fasteners as required by the construction. Install backplates in the same manner, or provide with lugs or anchors set in mortar, as required by the construction. Fasten accessories mounted on gypsum board and plaster walls without solid backing into the metal or wood studs, or to backplates secured to metal studs.

3.2 CLEANING

Clean material in accordance with manufacturer's recommendations. Do not use alkaline or abrasive agents. Take precautions to avoid scratching or marring exposed surfaces.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 44 16

FIRE EXTINGUISHERS
11/19

PART 1 GENERAL

1.1 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Wall Brackets; G

Schedule; G

SD-03 Product Data

Wall Brackets; G

Replacement Parts List; G

SD-04 Samples

Equipment Samples; G

1.2 DELIVERY, STORAGE, AND HANDLING

Protect materials from weather, soil, and damage during delivery, storage, and construction.

Deliver materials in their original packages, containers, or bundles bearing the brand name and the name and type of the material.

1.2.1 Samples

Provide the following equipment samples: One full-sized sample of each type of wall bracket being installed;

Use approved samples for installation, with proper identification and storage.

1.3 PROJECT SCHEDULE

Coordinatefire protection wall bracket schedule with fire extingushers to ensure proper fit and function. Use same designations indicated on Drawings.

PART 2 PRODUCTS

Submit fabrication drawings consisting of fabrication and assembly details performed in the factory and product data for the following items: Wall Brackets.

2.1 EQUIPMENT

2.1.1 Wall Brackets

Provide running-boardfire extinguisher wall brackets.

2.1.1.1 Identification

Provide lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated by the drawings.

Identify bracket-mounted fire extinguishers with the words "FIRE EXTINGUISHER" in red letter decals applied to mounting surface.

Orientation: Vertical.

PART 3 EXECUTION

3.1 INSTALLATION

Install Fire Extinguisher Wall Brackets where indicated on the drawings. Verify exact locations prior to installation.

Install fire extinguisher wall brackets in locations indicated and in compliance with requirements of authorities having jurisdiction.

Comply with the manufacturer's recommendations for all installations.

3.2 PROTECTION

3.2.1 Repairing

Remove and replace damaged and unacceptable portions of completed work with new work at no additional cost to the Government.

Submit replacement parts list indicating specified items replacement part, replacement cost, and name, address and contact for replacement parts distributor.

3.2.2 Cleaning

Clean all surfaces of the work, and adjacent surfaces which are soiled as a result of the work. Remove from the site all construction equipment, tools, surplus materials and rubbish resulting from the work.

-- End of Section --

SECTION 10 50 00

MISCELLANEOUS SPECIALTIES
02/16

PART 1 GENERAL

1.1 SCOPE

Provide labor, material, equipment and services necessary for, and reasonably incidental to, furnishing and installing miscellaneous specialty work indicated within the Instruments of Service. Incorporate related accessories and specialties to accomplish a complete and proper installation. Coordinate and schedule this work with the work of other trades to ultimately provide superior workmanship in the finished product

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. Submittals with an "S" are for inclusion in the Sustainability Notebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Emergency Key Boxes; G

SD-03 Product Data

Emergency Key Boxes; G

Accessories; G

SD-10 Operation and Maintenance Data

Maintenance; G

1.3 Maintenance

Submit the recommended maintenance practices for each type of installation to be provided.

PART 2 PRODUCTS

2.1 EMERGENCY KEY BOXES

Recessed high security industrial and government emergency key boxes hold up to ten keys or one access card. Provide recess mounting kits. Housings are 0.25 inch, 100% welded steel. Doors are a 0.5 inch thick with interior gasket seals and stainless steel hinges. Locks have 0.125 inch thick stainless steel dust covers with tamper switch mounting capability. Housings are 4 inches high by 5 inches wide by 3.25 inches deep. Flanges are 7 inches wide by 7 inches high. Boxes and locks are UL listed. Locks are double action, rotating tumblers with hardened steel

pins accessed by biased key cuts. Provide Camp Lejeune Fire Department keying.

2.2 ACCESSORIES

Furnish fasteners, accessories and options as recommended by the manufacturer for the specific applications and substrates encountered within the work.

PART 3 EXECUTION

3.1 PREPARATION

Prepare rough openings to accommodate premanufactured assemblies and the recommended means of attachment.

3.2 INSTALLATION

Install miscellaneous specialties plumb, level and within plane of receiving substrates. Adjust movable parts for smooth operation.

3.3 Emergency Key Box Installation

Typical exterior key box wall mounting is adjacent to the main entry providing access to the fire alarm annunciator.

Recess mount key boxes at a height of 4 feet, 8 inches above the finished floor as measured to the top of the box.

The General Contractor coordinates with the AHJ to procure key boxes. Confirm AHJ preferences for mounting locations and heights prior to installation.

-- End of Section --

SECTION 11 24 24

PERMANENT HORIZONTAL FALL PROTECTION, METAL ROOFING
08/20

PART 1 GENERAL

1.1 DESCRIPTION

Standing Seam Metal Roofing (SSMR) fall protection to be used in all SSMRs with slopes greater than 3/12.

1.2 DEFINITIONS

Roof sloping (#/12) refers to the number of inches a roof rises in height for every 12 inches, as measured horizontally from the edge of the roof to the centerline.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

For fabrication showing the complete fall protection system. Layout drawings of each system in relation to the supporting structure indicating the locations of properly labeled components.

SD-03 Product Data

Manufacturer's data and product information indicating the sizes, descriptions, capacities, test certifications, and other descriptive data showing in sufficient detail that the product complies with the contract requirements.

SD-07 Certificates

Installer's Certification

SD-08 Manufacturer's Instructions

Maintenance Procedures: Including parts list and maintenance requirements for all equipment.

Operation Procedures: Indicating proper use of equipment for safe operation of the systems.

1.4 QUALITY CONTROL

After fall protection system is installed, the manufacturer's authorized representative shall inspect and operate the system and make any final adjustments. The manufacturer's authorized representative shall issue a certificate attesting to the system's design and installation, and formally submit to the USG

1.5 QUALIFICATIONS

a. Furnish proof of installer's certification approval by manufacturer in the form of the installer's current certificate issued by the manufacturer.

b. Provide a designer's qualification statement.

1.6 WARRANTY

a. Provide lifetime manufacturer warranty

b. Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Design, furnish, install, and certify a complete and useable permanent fall protection system, inclusive of all components, appurtenances, fasteners, end stops, carriages, and equipment necessary for safety of maintenance workers.

Submit horizontal life line and anchorage connector systems for approval by the designer of record and the installation public works group's cognizant architect or designated fall protection expert. The chosen fall protection system must be compatible with the Base Exterior Architectural Plan, low-maintenance, designed for service in harsh coastal conditions, and compliant with ANSI/ASSP Z359 requirements. The following proprietary systems would meet government requirements, but other options may be proposed by the contractor, subject to final approval by the government:

1) 3M Capital Safety Roofsafe Rail System
2) Miller ShockFusion Horizontal Lifeline Roof System
3) Kee Safety KeeLine Engineered Lifeline Solution

2.1.1 Design Requirements

a. Design must be performed, signed, and sealed by a Professional Engineer from the manufacturer experienced in the design of horizontal lifeline fall arrest systems. Submit qualifications of engineer.

b. Design must provide for access from the roof hatch (where provided) to the roof ridge, allowing for continuous worker tie off to reach the ridge line. For buildings without a roof hatch, design must provide for access from the roof eave (at an acceptable location) to the roof ridge, allowing continous worker tie off to reach the ridge line. D-rings are acceptable for ascent and decent parallel to standing seams, or propose alternative method.

c. Low profile and architecturally pleasing systems are preferred, and will be evaluated higher than more obtrusive designs.

d. Concealed fastners are preferred.

2.1.2 Performance Requirements

a. System must be able to accomodate three (3) users at a time.

b. All fall protection anchorages must be designed for a minimum 3,100 lb nominal live load capacity. Anchorages, including any supporting structure, must be designed to allow future replacement of the horizontal lifeline system or anchorage connectors regardless of the required capacity of the chosen horizontal lifeline system or anchorage connectors. Anchorages that support two or more independent horizontal life line spans at a single point must be designed for the combined load effects of the horizontal life line systems in accordance with ANSI/ASSP Z359.6.

2.2 FINISHES

a. Choice of finishes in powder coated or anodized aluminum alloy are preferred.

b. Color must comply with the MCBCL Base Exterior Architectural Plan (BEAP) and the USG Architect. Submit color samples for approval.

2.3 TESTS, INSPECTIONS, AND VERIFICATIONS

After fall protection system is installed, the manufacturer's authorized representative shall inspect and operate the system and make any final adjustments. The manufacturer's authorized representative shall issue a certificate attesting to the system's design and installation, and formally submit to the USG.

PART 3 EXECUTION

3.1 INSTALLATION

Fall protection system shall be installed under the direction of manufacturer's authorized trained personnel.

3.2 INSPECTION

The manufacturer's authorized representative shall inspect and operate the system and make any final adjustments.

3.3 CLOSEOUT ACTIVITIES

3.3.1 Demonstration

The manufacturer's authorized representative shall issue a certificate attesting to the system's design and installation, and formally submit to the USG.

3.3.2 Training

Train designated US Government personnel on-site regarding proper use of system.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 12 24 13

ROLLER WINDOW SHADES
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM G21	(2015; R 2021; E 2021) Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 701	(2023; ERTA 1 2023) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

UL SOLUTIONS (UL)

UL 325	(2017; Reprint Feb 2020) UL Standard for Safety Door, Drapery, Gate, Louver, and Window Operators and Systems
UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES

SD-02 Shop Drawings

Detailed Drawings; G

Location Schedule; G

SD-03 Product Data

Window Shades; G

Recycled Content for various fiber components; S

SD-04 Samples

Window Shades; G

SD-06 Test Reports

Flammability Requirements; G

SD-07 Certificates

Indoor Air Quality for roller window shades; S

Qualifications

SD-10 Operation and Maintenance Data

Window Shades, Data Package 1; G

SD-11 Closeout Submittals

Submit Data Package 1 for roller window shades, and Data Package 2 for electrical operators, in accordance with Section 01 78 23 OPERATIONS AND MAINTENANCE DATA.

1.3 CERTIFICATES

1.3.1 Indoor Air Quality Certifications

1.3.1.1 Roller Window Shades

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide validation by other third-party program that products meet the requirements of this paragraph. Provide current product certification documentation from certification body.

1.4 QUALITY ASSURANCE

1.4.1 Qualifications

1.4.1.1 Installer's Qualifications

Installer trained and certified by the manufacturer with a minimum of ten years of experience in installing products comparable to those specified in this section.

1.4.2 Flammability Requirements

Passes in accordance with NFPA 701 small and large-scale vertical burn. Materials tested are identical to products proposed for use.

1.4.3 Electrical Requirements

NFPA Article 100 listed and labeled in accordance with UL 325 or other testing agency acceptable to authorities having jurisdiction, marked for intended use, and tested as a system. Individual testing of components is not acceptable in lieu of system testing.

1.4.4 Anti-Microbial Requirements

'No Growth' per ASTM G21 results for fungi ATCC9642, ATCC 9644, ATCC9645.

1.5 DELIVERY, STORAGE, AND HANDLING

Deliver components to the jobsite in the manufacturer's original packaging with the brand or company name, item identification, and project reference clearly marked. Store components in a dry location that is adequately ventilated and free from dust, water, or other contaminants and has easy access for inspection and handling. Store materials flat in a clean dry area with temperature maintained above 50 degrees F. Do not open containers until needed for installation unless verification inspection is required. Handle and store shades in accordance with manufacturer's recommendations.

1.6 WARRANTY

Provide manufacturer's warranty to repair or replace defective materials and workmanship for a period of 10 years from date of final acceptance of the work.

PART 2 PRODUCTS

2.1 WINDOW SHADES

Submit drawings showing plans, elevations, sections, product details, installation details, operational clearances, wiring diagrams and relationship to work. Submit a location schedule showing location, size and quantity of shades. Include the use of same room designations as indicated on the drawings.

Provide product data composed of catalog cuts, brochures, and operating and maintenance instructions on each product to be used. Include styles, profiles and features.

Furnish samples of each type and color of roller shade fabric and roller shade channel. Provide shade material minimum 6 by 6 inches in size. Mark face of material to indicate interior faces.

Mock up: Install shade in area designated by Contracting Officer. Do not proceed with remaining work until the Contracting Officer approves workmanship and operation. Rework mock up as required to produce acceptable work. The approved shade can be used in the installation.

Submit fire resistance data, flame spread and smoke contribution data.

Provide roller tube that operates smoothly and of sufficient diameter and thickness to prevent excessive deflection. Provide brackets that are appropriate for inside mount. Provide shade cloth meeting the performance described in NFPA 701, small scale test. Treat steel features for corrosion resistance.

Provide Various Fiber Components with a minimum of 60 percent recycled content. Provide data identifying percentage of recycled content for various fiber components.
Provide certification of indoor air quality for roller window shades.

2.1.1 Manufacturer's Qualifications

Obtain motor-controlled roller shades through one source from a single manufacturer with a minimum of twenty years of experience and minimum of three projects of similar scope and size in manufacturing products comparable to those specified in this section. Furnish manual and motorized shades produced by the same manufacturer to provide matching appearance.

2.1.2 Manually Operated Shades with Single Rollers

2.1.2.1 Spring Operating Mechanisms

Provide with positive locking mechanism that can stop shade movement at each half-turn of roller and with manufacturer's standard pull.

2.1.2.2 Rollers

Provide corrosion-resistant steel or extruded-aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of shade bands indicated without deflection. Provide with permanently lubricated drive-end assemblies and idle-end assemblies designed to facilitate removal of shade cloth for service.

a. Roller Drive-End Location: Right side of interior face of shade.

b. Direction of Shade cloth Roll: Regular, from back (exterior face) of roller.

c. Shade cloth-to-Roller Attachment: Manufacturer's standard method. Adhesive attachment is not acceptable.

2.1.2.3 Mounting Hardware

Provide corrosion resistant brackets or endcaps compatible with roller assembly, operating mechanism, installation accessories, and mounting location and conditions indicated. Provide hardware that allows for field adjustment or removal of shade roller tube and other operable hardware component without removal of brackets and end or center supports.

2.1.2.4 Shade Cloth

a. Shade Material: Light-filtering fabric: Openness 3 percent and Light-blocking fabric.

b. Shade Cloth Bottom (Hem) Bar: Steel or extruded aluminum. Provide shade bar enclosed in sealed pocket of shade band material.

2.1.2.5 Installation Accessories

a. Front Fascia: L-shaped aluminum extrusion to conceal shade roller and hardware that snaps onto end caps without requiring exposed fasteners of any kind. Fascia can be mounted continuously across two or more shade bands. Provide manufacturers standard height fascia as required to conceal roller and shade band assembly when shade is fully open.

b. Exposed Headbox: Rectangular, extruded-aluminum enclosure including front fascia, top and back covers, endcaps, and removable bottom closure. Provide manufacturers standard height fascia as required to

conceal roller and shade band assembly when shade is fully open.

c. Endcaps: Extruded aluminum with universal design suitable for mounting to window mullions. Provide size compatible with roller size. Provide end cap covers matching fascia/headbox finish.

d. Recessed Shade Pocket: Rectangular, extruded-aluminum enclosure designed for recessed ceiling installation; with front, top, and back formed as one piece, end plates, and removable bottom closure panel. Provide manufacturers standard height fascia as required to conceal roller and shade band assembly when shade is fully open. Provide pocket with lip at lower edge to support acoustical ceiling panel.

e. Closure Panel and Wall Clip: Removable aluminum panel designed for installation at bottom of site-constructed ceiling recess or pocket and for snap-in attachment to wall clip without fasteners.

2.1.2.6 Room Darkening Shades

Provide room darkening (black-out) window shades designed to eliminate all visible light gaps when shades are fully closed and conform with the following:

a. Provide roller tube made of aluminum. Provide shop fabricated light traps consisting of a head box to house the roller shade, and U-shaped channels to serve as guides for the shade along the sides and to receive the bottom edge of the shade along the sill.

b. Provide light trap made of sheet steel having a minimum thickness of 22 gauge or anodized, extruded, aluminum. Provide legs of the channels not less than 1-3/4 inches long and separated by the minimum distance that permits free operation of the shade. Edges of light trap coming into contact with the shade cloth are smooth pile light seal. The exposed face of the head box is hinged or removable for access to the shade roller. The interior or unexposed surfaces of the light trap have a finish coat of flat black enamel. The exposed portions of the light trap have a factory-applied priming coat of gray paint.

c. Provide type of cloth for blackout purposes. Provide shade from a single piece of PVC polyester and PVC fiberglass.

d. Fit the bottom edge of the shade with a steel operating bar. Shades to engage positively with bottom rail through operating bar. Paint bars with flat black enamel.

2.1.3 Manually Operated Shades with Dual Rollers

2.1.3.1 Spring Operating Mechanisms

Provide with positive locking mechanism that can stop shade movement at each half-turn of roller and with manufacturer’s standard pull.

2.1.3.2 Rollers

Provide corrosion-resistant steel or extruded-aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of shade bands indicated without deflection. Provide with permanently lubricated drive-end assemblies and idle-end assemblies

designed to facilitate removal of shade bands for service.

a. Dual Shade-Roller Mounting Configuration: Side by Side.

b. Inside Roller: Drive-End Location: Right side of interior face of shade. Direction of Shade cloth Roll: Regular, from back (exterior face) of roller.

c. Outside Roller: Drive-End Location: Right side of interior face of shade. Direction of Shade cloth Roll: Regular, from back (exterior face) of roller.

d. Shade cloth-to-Roller Attachment: Manufacturer's standard method. Adhesive attachment is not acceptable.

2.1.3.3 Mounting Hardware

Provide corrosion resistant brackets or endcaps compatible with roller assembly, operating mechanism, installation accessories, and mounting location and conditions indicated. Provide hardware that allows for field adjustment or removal of shade roller tube and other operable hardware component without removal of brackets and end or center supports.

2.1.3.4 Inside Shade Cloth

a. Shade Material: Light-blocking fabric.

b. Shade Cloth Bottom (Hem) Bar: Steel or extruded aluminum. Provide shade bar enclosed in sealed pocket of shade cloth material.

2.1.3.5 Outside Shade Cloth

a. Shade Material: Light-filtering fabric: Openness 3 percent.

b. Shade Cloth Bottom (Hem) Bar: Steel or extruded aluminum. Provide shade bar enclosed in sealed pocket of shade cloth material.

2.1.3.6 Installation Accessories

a. Front Fascia: L-shaped aluminum extrusion to conceal shade roller and hardware that snaps onto end caps without requiring exposed fasteners of any kind. Fascia can be mounted continuously across two or more shade bands. Provide manufacturers standard height fascia as required to conceal roller and shade band assembly when shade is fully open.

b. Exposed Headbox: Rectangular, extruded-aluminum enclosure including front fascia, top and back covers, endcaps, and removable bottom closure. Provide manufacturers standard height fascia as required to conceal roller and shade band assembly when shade is fully open.

c. Endcaps: Extruded aluminum with universal design suitable for mounting to window mullions. Provide size compatible with roller size. Provide end cap covers matching fascia/headbox finish.

d. Recessed Shade Pocket: Rectangular, extruded-aluminum enclosure designed for recessed ceiling installation; with front, top, and back formed as one piece, end plates, and removable bottom closure panel. Provide manufacturers standard height fascia as required to conceal roller and shade band assembly when shade is fully open. Provide

pocket with lip at lower edge to support acoustical ceiling panel.

e. Closure Panel and Wall Clip: Removable aluminum panel designed for installation at bottom of site-constructed ceiling recess or pocket and for snap-in attachment to wall clip without fasteners.

2.1.3.7 Room Darkening Shades

Provide room darkening (black-out) window shades designed to eliminate all visible light gaps when shades are fully closed, and conform with the following:

a. Provide roller tube made of aluminum. Provide shop fabricated light traps, consisting of a head box to house the shade roller, and U-shaped channels to serve as guides for the shade along the sides and to receive the bottom edge of the shade along the sill.

b. Provide light trap made of sheet steel having a minimum thickness of 22 gauge or anodized, extruded, aluminum. Provide legs of the channels not less than 1-3/4 inches long and separated by the minimum distance that permits free operation of the shade. Edges of light trap coming into contact with the shade cloth are smooth pile light seal. The exposed face of the head box is hinged or removable for access to the shade roller. The interior or unexposed surfaces of the light trap have a finish coat of flat black enamel. The exposed portions of the light trap have a factory-applied priming coat of gray paint.

c. Provide type of cloth for blackout purposes. Provide shade from a single piece of PVC polyester and PVC fiberglass.

d. Fit the bottom edge of the shade with a steel operating bar. Shades to engage positively with bottom rail through operating bar. Paint bars with flat black enamel.

2.2 COLOR

Provide color, pattern and texture for metal trim and shade fabric as indicated; colors listed are not intended to limit the selection of equal colors from other manufacturers.

PART 3 EXECUTION

3.1 FIELD MEASUREMENTS

After becoming familiar with details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing the work.

3.2 INSTALLATION

Do not install building construction materials that show visual evidence of biological growth.

Provide roller window shades, complete with necessary brackets, fittings, and hardware as indicated.

Perform installation in accordance with the approved detailed drawings and manufacturer's installation instructions. Install units level, plumb,

secure, and at proper height and location relative to window units. Provide and install supplementary or miscellaneous items in total, including clips, brackets, or anchorages incidental to or necessary for a sound, secure, and complete installation. Do not start installation until completion of room painting and finishing operations.

3.3 CLEAN-UP

Upon completion of the installation, clean window treatments and exposed components as recommended by manufacturer. Adjust window treatment for form and appearance and proper operating condition. Repair or replace damaged units as directed by the Contracting Officer. Isolate metal parts from direct contact with concrete, mortar, or dissimilar metals. Ensure shades installed in recessed pockets can be removed without disturbing the pocket. The entire shade, when retracted, is contained inside the pocket. For shades installed outside the jambs and mullions, overlap each jamb and mullion 0.75 inch or more when the jamb and mullion sizes permit. Include all hardware, brackets, anchors, fasteners, and accessories necessary for a complete, finished installation.

-- End of Section --

SECTION 21 13 13

WET PIPE SPRINKLER SYSTEMS, FIRE PROTECTION
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.1	(2020) Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250
ASME B16.3	(2021) Malleable Iron Threaded Fittings, Classes 150 and 300
ASME B16.4	(2021) Gray Iron Threaded Fittings; Classes 125 and 250
ASME B16.21	(2021) Nonmetallic Flat Gaskets for Pipe Flanges

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1013	(2021) Performance Requirements for Reduced Pressure Principle Backflow Prevention Assemblies
ASSE 1015	(2021) Performance Requirements for Double Check Backflow Prevention Assemblies

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA M14	(2024) Manual: Recommended Practice for Backflow Prevention and Cross-Connection Control

ASTM INTERNATIONAL (ASTM)

ASTM A47/A47M	(1999; R 2022; E 2022) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A135/A135M	(2021) Standard Specification for Electric-Resistance-Welded Steel Pipe
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM A183	(2014; R 2020) Standard Specification for Carbon Steel Track Bolts and Nuts
ASTM A536	(2024) Standard Specification for Ductile Iron Castings

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-71	(2018) Gray Iron Swing Check Valves, Flanged and Threaded Ends

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 13	(2025; TIA 24-3) Standard for the Installation of Sprinkler Systems
NFPA 13R	(2025) Standard for the Installation of Sprinkler Systems in Low-Rise Residential Occupancies
NFPA 24	(2025) Standard for the Installation of Private Fire Service Mains and Their Appurtenances
NFPA 101	(2024) Life Safety Code
NFPA 291	(2025) Recommended Practice for Fire Flow Testing and Marking of Hydrants

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES (NICET)

NICET 1014-7	(2012) Program Detail Manual for Certification in the Field of Fire Protection Engineering Technology (Field Code 003) Subfield of Automatic Sprinkler System Layout

UL SOLUTIONS (UL)

UL 199	(2022; Reprint Feb 2025) UL Standard for Safety Automatic Sprinklers for Fire-Protection Service
UL 312	(2022) UL Standard for Safety Check Valves for Fire-Protection Service
UL 405	(2013; Reprint Dec 2024) UL Standard for Safety Fire Department Connection Devices
UL 668	(2025) UL Standard for Safety Hose Valves for Fire-Protection Service

UL Fire Prot Dir UL Product IQ (updated online) at https://productiq.ulprospector.com/en

1.2 SYSTEM DESCRIPTION

Provide wet pipe sprinkler system(s) in areas indicated on the drawings. Except as modified herein, the system must meet the requirements of NFPA 13 and NFPA 13R. Pipe sizes which are not indicated on the Contract drawings must be determined by hydraulic calculations.

1.2.1 Hydraulic Design

1.2.1.1 Basis for Calculations

A waterflow test was performed on September 11 2025 MCB Camp Lejeune - Building G-702 and resulted in a static pressure of 52 psi with a residual pressure of 50 psi while flowing 1,130 gpm. Perform a fire hydrant flow test prior to shop drawing submittal in accordance with NFPA 291. Results must include hydrant elevations relative to the building and hydrant number/identifiers for the tested hydrants, including which were flowed, which had a gauge. This information must be presented in a tabular form if multiple hydrants were flowed. The results must be included with the hydraulic calculations. Hydraulic calculations must be based on flow test noted in this paragraph, unless verified by the NAVFAC Fire Protection Engineer and approved by Contracting Officer. Hydraulic calculations must be based upon the Hazen-Williams formula with a "C" value noted in NFPA 13 for piping.

1.2.1.2 Hydraulic Calculations

a. Water supply curves and system requirements must be plotted on semi-logarithmic graph (N^1.85) paper so as to present a summary of the complete hydraulic calculation.

b. Provide a summary sheet listing sprinklers in the design area and their respective hydraulic reference points, elevations, minimum discharge pressures and minimum flows. Elevations of hydraulic reference points (nodes) must be indicated.

c. Documentation must identify each pipe individually and the nodes connected thereto. Indicate the diameter, length, flow, velocity, friction loss, number and type fittings, total friction loss in the pipe, equivalent pipe length and Hazen-Williams coefficient for each pipe.

d. Where the sprinkler system is supplied by interconnected risers, the sprinkler system must be hydraulically calculated using the hydraulically most demanding single riser. The calculations must not assume the simultaneous use of more than one riser.

e. All calculations must include the backflow preventer manufacturer's stated friction loss at the design flow or 12 psi for reduced pressure backflow preventer, whichever is greater.

f. All calculations must be performed back to the actual location of the flow test, taking into account the direction of flow in the service main at the test location.

g. For gridded systems, calculations must show peaking of demand area friction loss to verify that the hydraulically most demanding area is being used. A flow diagram indicating the quantity and direction of flows must be included.

1.2.1.3 Design Criteria

Hydraulically design the system to discharge a minimum density as indicated on the drawings. Hydraulic calculations must be in accordance with the Area/Density Method of NFPA 13. Add an allowance for exterior hose streams of 250 gpm to the sprinkler system demand at the point of connection to the existing water system.

1.2.2 Sprinkler Coverage

Sprinklers must be uniformly spaced on branch lines. Provide coverage throughout 100 percent of the area noted on the Contract drawings. This includes, but is not limited to, telephone rooms, electrical equipment rooms (regardless of the fire resistance rating of the enclosure), boiler rooms, switchgear rooms, transformer rooms, attached electrical vaults and other electrical and mechanical spaces. Coverage per sprinkler must be in accordance with NFPA 13. Provide sprinklers below all obstructions in accordance with NFPA 13. Exceptions are as follows:

a. Sprinklers may be omitted from small rooms which are exempted for specific occupancies in accordance with NFPA 101.

b. Facilities that are designed in accordance with NFPA 13R.

1.2.3 Qualified Fire Protection Engineer (QFPE)

An individual who is a licensed professional engineer (P.E.) who has passed the fire protection engineering written examination administered by the National Council of Examiners for Engineering and Surveying (NCEES) and has relevant fire protection engineering experience. The QFPE in this section is the same as FPQC in Section 01 45 00. Wherever "Qualified Fire Protection Engineer (QFPE)" of "QFPE" appears in this section, substitute with "Fire Protection Quality Control Specialist (FPQC)". Services of the QFPE must include:

a. Reviewing SD-02, SD-03, and SD-05 submittal packages for completeness and compliance with the provisions of this specification. Working (shop) drawings and calculations must be prepared by, or prepared under the immediate supervision of, the QFPE. The QFPE must affix their professional engineering stamp with signature to the shop drawings, calculations, and material data sheets, indicating approval prior to submitting the shop drawings to the DFPE.

b. Provide a letter documenting that the SD-02, SD-03, and SD-05 submittal package has been reviewed and noting all outstanding comments.

c. Performing in-progress construction surveillance prior to installation of ceilings (rough-in inspection).

d. Witnessing pre-Government and final Government functional performance testing and performing a final installation review.

e. Signing applicable certificates under SD-07.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Partial submittals and submittals not fully complying with NFPA 13 and this specification section must be returned disapproved without review. SD-02, SD-03 and SD-05 must be submitted simultaneously.

Shop drawings (SD-02), product data (SD-03) and calculations (SD-05) must be prepared by the designer and combined and submitted as one complete package. The QFPE must review the SD-02/SD-03/SD-05 submittal package for completeness and compliance with the Contract provisions prior to submission to the Government. The QFPE must provide a Letter of Confirmation that they have reviewed the submittal package for compliance with the contract provisions. This letter must include their professional engineer stamp and signature. Partial submittals and submittals not reviewed by the QFPE must be returned disapproved without review.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualified Fire Protection Engineer (QFPE); G

Sprinkler System Designer; G

Sprinkler System Installer; G

SD-02 Shop Drawings

Shop Drawing; G

SD-03 Product Data

Pipe; G

Fittings; G

Valves, including gate, check, butterfly, and globe; G

Riser Check Valves; G

Relief Valves; G

Sprinklers ; G

Pipe Hangers and Supports ; G

Sprinkler Alarm Switch; G

Valve Supervisory (Tamper) Switch; G

Fire Department Connection; G

Backflow Prevention Assembly; G

Air Vent; G

Hose Valve; G

Nameplates; G

SD-05 Design Data

Hydraulic Calculations; G

SD-06 Test Reports

Test Procedures; G

SD-07 Certificates

Verification of Compliant Installation; G

Request for Government Final Test; G

SD-10 Operation and Maintenance Data

Operating and Maintenance (O&M) Instructions; G

Spare Parts Data; G

SD-11 Closeout Submittals

As-built drawings

1.4 QUALITY ASSURANCE

1.4.1 Preconstruction Submittals

Within 36 days of contract award but no less than 14 days prior to commencing work on site, the prime Contractor must submit the following for review and approval. SD-02, SD-03 and SD-05 submittals received prior to the review and approval of the qualifications will be returned Disapproved Without Review.

1.4.1.1 Shop Drawing

One Copy of the shop drawings, no later than 28 days prior to the start of system installation. Working drawings conforming to the requirements prescribed in NFPA 13 and must be no smaller than the Contract Drawings. Each set of drawings must include the following:

a. A descriptive index with drawings listed in sequence by number. A legend sheet identifying device symbols, nomenclature, and conventions used in the package.

b. Floor plans drawn to a scale not less than 1/8-inch equals 1-foot clearly showing locations of devices, equipment, risers, and other details required to clearly describe the proposed arrangement.

c. Actual center-to-center dimensions between sprinklers on branch lines and between branch lines; from end sprinklers to adjacent walls; from

walls to branch lines; from sprinkler feed mains, cross mains and branch lines to finished floor and roof or ceiling. A detail must show the dimension from the sprinkler and sprinkler deflector to the ceiling in finished areas.

d. Longitudinal and transverse building sections showing typical branch line and cross main pipe routing, elevation of each typical sprinkler above finished floor and elevation of "cloud" or false ceilings in relation to the building ceilings.

e. Plan and elevation views which establish that the equipment will fit the allotted spaces with clearance for installation and maintenance.

f. Riser layout drawings drawn to a scale of not less than 1/2-inch equals 1-foot to show details of each system component, clearances between each other and from other equipment and construction in the room.

g. Details of each type of riser assembly, pipe hanger, and electrical devices and interconnecting wiring. The dimension from the edge of vertical piping to the nearest adjacent wall(s) must be indicated on the drawings when vertical piping is located in stairs or other portions of the means of egress.

h. Details of each type of pipe hanger and related components.

1.4.1.2 Product Data

One copy of annotated catalog data to show the specific model, type, and size of each item. Catalog cuts must also indicate the NRTL listing. The data must be highlighted to show model, size, options, and other pertinent information, that are intended for consideration. Data must be adequate to demonstrate compliance with all contract requirements. Product data for all equipment must be combined into a single submittal.

1.4.1.3 Hydraulic Calculations

Calculations must be as outlined in NFPA 13 except that calculations must be performed by computer using software intended specifically for fire protection system design using the design data shown on the drawings.

1.4.1.4 Operating and Maintenance (O&M) Instructions

Submit in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA as supplemented and modified by this specification section.

Provide one manual and one pdf version on electronic media. The manuals must include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment.

Submit spare parts data for each different item of material and equipment specified. The data must include a complete list of parts and supplies, and a list of parts recommended by the manufacturer to be replaced after 1-year and 3 years of service. Include a list of special tools and test equipment required for maintenance and testing of the products supplied.

1.4.2 Qualifications

1.4.2.1 Sprinkler System Designer

The sprinkler system designer must be certified as a Level III Technician by National Institute for Certification in Engineering Technologies (NICET) in the Water-Based Systems Layout subfield of Fire Protection Engineering Technology in accordance with NICET 1014-7.

1.4.2.2 Sprinkler System Installer

The sprinkler system installer must be regularly engaged in the installation of the type and complexity of system specified in the contract documents, and must have served in a similar capacity for at least three systems that have performed in the manner intended for a period of not less than 6 months.

1.4.3 Regulatory Requirements

Equipment and material must be listed or approved. Listed or approved, as used in this Section, means listed, labeled or approved by a Nationally Recognized Testing Laboratory (NRTL) such as UL Fire Prot Dir or FM APP GUIDE. The omission of these terms under the description of an item or equipment described must not be construed as waiving this requirement. All listings or approvals by testing laboratories must be from an existing ANSI or UL published standard. The recommended practices stated in the manufacturer's literature or documentation are mandatory requirements.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect all equipment delivered and placed in storage from the weather, excessive humidity and temperature variations, dirt and dust, or other contaminants. All pipes must be either capped or plugged until installed.

1.6 EXTRA MATERIALS

Spare sprinklers and wrench(es) must be provided as spare parts in accordance with NFPA 13.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

2.1.1 Standard Products

Provide materials, equipment, and devices listed for fire protection service when so required by NFPA 13 or this specification. Select material from one manufacturer, where possible, and not a combination of manufacturers, for a classification of material. Material and equipment must be standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid.

2.1.2 Nameplates

Major components of equipment must have the manufacturer's name, address, type or style, model or serial number, catalog number, date of installation, installing Contractor's name and address, and the contract number provided on a new name plate permanently affixed to the item or

equipment. Nameplates must be etched metal or plastic, permanently attached by screws to control units, panels or adjacent walls.

2.1.3 Identification and Marking

Pipe and fitting markings must include name or identifying symbol of manufacturer and nominal size. Pipe must be marked with ASTM designation. Valves and equipment markings must have name or identifying symbol of manufacturer, specific model number, nominal size, name of device, arrow indicating direction of flow, and position of installation (horizontal or vertical), except if valve can be installed in either position. Markings must be included on the body casting or on an etched or stamped metal nameplate permanently on the valve or cover plate.

2.1.4 Pressure Ratings

Valves, fittings, couplings, alarm switches, and similar devices must be rated for the maximum working pressures that can be experienced in the system, but in no case less than 175 psi.

2.2 ABOVEGROUND PIPING COMPONENTS

2.2.1 Steel Piping Components

2.2.1.1 Steel Pipe

Except as modified herein, steel pipe must be black as permitted by NFPA 13 and conform to the applicable provisions of ASTM A53/A53M, ASTM A135/A135M or ASTM A153/A153M.

Steel pipe must be minimum Schedule 40 for sizes 2 inches and less; and minimum Schedule 10 for sizes larger than 2 inches. Steel piping with wall thickness less than Schedule 40 must not be threaded.

2.2.1.2 Fittings

Fittings must be welded, threaded, or grooved-end type. Threaded fittings must be cast-iron conforming to ASME B16.4, malleable-iron conforming to ASME B16.3 or ductile-iron conforming to ASTM A536. Plain-end fittings with mechanical couplings, fittings that use steel gripping devices to bite into the pipe, steel press fittings and field welded fittings are not permitted. Fittings, mechanical couplings, and rubber gaskets must be supplied by the same manufacturer. Threaded fittings must use Teflon tape or manufacturer's approved joint compound. Reducing couplings are not permitted except as allowed by NFPA 13.

2.2.1.3 Grooved Mechanical Joints and Fittings

Joints and fittings must be designed for not less than 175 psi service and the product of the same manufacturer. Field welded fittings must not be used. Fitting and coupling housing must be malleable-iron conforming to ASTM A47/A47M, Grade 32510; ductile-iron conforming to ASTM A536, Grade 65-45-12. Rubber gasketed grooved-end pipe and fittings with mechanical couplings are permitted in pipe sizes 2 inches and larger. Gasket must be the flush type that fills the entire cavity between the fitting and the pipe. Nuts and bolts must be heat-treated steel conforming to ASTM A183 and must be cadmium-plated or zinc-electroplated.

2.2.1.4 Flanges

Flanges must conform to NFPA 13 and ASME B16.1. Gaskets must be non-asbestos compressed material in accordance with ASME B16.21, 1/16-inch thick, and full face or self-centering flat ring type.

2.2.2 Flexible Sprinkler Hose

The use of flexible hose is not permitted.

2.2.3 Pipe Hangers and Supports

Provide galvanized pipe hangers and supports in accordance with NFPA 13.

2.2.4 Valves

Provide valves of types approved for fire service. Valves must open by counterclockwise rotation.

2.2.4.1 Control Valve

Manually operated sprinkler control/gate valve must be outside stem and yoke (OS&Y) type or butterfly type and must be listed.

2.2.4.2 Check Valves

Check valves must comply with UL 312. Check valves 4 inches and larger must be of the swing type, have a clear waterway and meet the requirements of MSS SP-71, for Type 3 or 4. Inspection plate must be provided on valves larger than 6 inches.

2.2.4.3 Hose Valve

Valve must comply with UL 668.

2.2.5 Riser Check Valves

Provide riser check valve, pressure gauges and main drain.

2.3 ALARM INITIATING AND SUPERVISORY DEVICES

2.3.1 Sprinkler Alarm Switch

Vane or pressure-type flow switch(es). Connection of switch must be by the fire alarm installer. Vane type alarm actuating devices must have mechanical diaphragm controlled retard device adjustable from 10 to 60 seconds and must instantly recycle.

2.3.2 Valve Supervisory (Tamper) Switch

Switch must be integral to the control valve or suitable for mounting to the type of control valve to be supervised open. The switch must be tamper resistant and contain SPDT (Form C) contacts arranged to transfer upon removal of the housing cover or closure of the valve of more than two rotations of the valve stem.

2.4 BACKFLOW PREVENTION ASSEMBLY

Reduced-pressure principle valve assembly backflow preventer complying

with ASSE 1013, ASSE 1015 and AWWA M14. Each check valve must have a drain. Backflow prevention assemblies must have current "Certificate of Approval from the Foundation for Cross-Connection Control and Hydraulic Research, FCCCHR List" and be listed for fire protection use. Listing of the specific make, model, design, and size in the FCCCHR List is acceptable as the required documentation.

2.4.1 Backflow Preventer Test Connection

Test connection must consist of a series of listed hose valves with 2 1/2-inch National Standard male hose threads with cap and chain.

2.5 FIRE DEPARTMENT CONNECTION

Fire department connection must be projecting type with cast-brass body, matching wall escutcheon lettered "Auto Spkr" with a polished-brass finish. The connection must have individual self-closing clappers, caps with drip drains and chains. Female inlets must have 5-inch diameter Storz connection on a 30 degree galvanized elbow downward facing (non-swivel). Comply with UL 405.

2.6 SPRINKLERS

Sprinklers must comply with UL 199 and NFPA 13. Sprinklers with internal O-rings are not acceptable. Sprinklers in high heat areas including attic spaces or in close proximity to unit heaters must have temperature classification in accordance with NFPA 13. Extended coverage sprinklers are permitted for loading docks, residential occupancies and high-piled storage applications only.

2.6.1 Upright Sprinkler

Upright sprinkler must be brassquick-response type and have a minimum nominal K-factor of 5.6.

2.6.2 Sidewall Sprinkler

Sidewall sprinkler must be the quick-response recessed type. Sidewall sprinkler must have a minimum nominal K-factor of 5.6. Sidewall sprinkler must have a white polyester finish.

2.6.3 Concealed Sprinkler

Concealed sprinkler must be white polyesterquick-response pendent type and have a minimum nominal K-factor of 5.6. Coverplate must be white.

2.6.4 Residential Sprinkler

Residential sprinkler must be concealed pendent or concealed sidewall type with minimum nominal K-factor of 3.0. Residential sprinkler must have a white polyester finish. Sprinkler must comply with UL 199.

2.6.5 Corrosion-Resistant Sprinkler

Corrosion-resistant sprinkler must be the concealed pendent type installed in locations as indicated. Corrosion-resistant coatings must be factory-applied by the sprinkler manufacturer.

2.6.6 Dry Sprinkler Assembly

Dry sprinkler assembly must be of the sidewall type as indicated. Assembly must include an integral escutcheon. Maximum length must not exceed maximum indicated in its listing. Sprinkler must have a white enamel finish.

2.7 ACCESSORIES

2.7.1 Sprinkler Cabinet

Provide spare sprinklers in accordance with NFPA 13 and must be placed in a suitable metal or plastic cabinet of sufficient size to accommodate all the spare sprinklers and wrenches in designated locations. Spare sprinklers must be representative of, and in proportion to, the number of each type and temperature rating of the sprinklers installed as required by NFPA 13. At least one wrench of each type required must be provided.

2.7.2 Pendent Sprinkler Escutcheon

Escutcheon must be one-piece metallic type with a depth of less than 3/4-inch and suitable for installation on pendent sprinklers. The escutcheon must have a factory finish that matches the pendent sprinkler.

2.7.3 Pipe Escutcheon

Provide split hinge metal plates for piping entering walls, floors, and ceilings in exposed spaces. Provide polished stainless steel plates or chromium-plated finish on copper alloy plates in finished spaces. Provide paint finish on metal plates in unfinished spaces.

2.7.4 Sprinkler Guard

Listed guard must be a steel wire cage designed to encase the sprinkler and protect it from mechanical damage. Guards must be provided on sprinklers located within 7 feet of the floor.

2.7.5 Relief Valve

Relief valves must be listed and installed at the riser in accordance with NFPA 13.

2.7.6 Air Vent

Air vents must be of the automatic type and piped to drain to the building exterior.

2.7.7 Identification Sign

Valve identification sign must be minimum 6 inches wide by 2 inches high with enamel baked finish on minimum 18 gage steel or 0.024-inch aluminum with red letters on a white background or white letters on red background. Wording of sign must include, but not be limited to "main drain", "auxiliary drain", "inspector's test", "alarm test", "alarm line", and similar wording as required to identify operational components. Where there is more than one sprinkler system, signage must include specific details as to the respective system.

PART 3 EXECUTION

3.1 VERIFYING ACTUAL FIELD CONDITIONS

Before commencing work, examine all adjoining work on which the contractor's work that is dependent for perfect workmanship according to the intent of this specification section, and report to the Contracting Officer's Representative a condition that prevents performance of first class work. No "waiver of responsibility" for incomplete, inadequate or defective adjoining work will be considered unless notice has been filed before submittal of a proposal.

3.2 INSTALLATION

The installation must be in accordance with the applicable provisions of NFPA 13, NFPA 24 and publications referenced therein. Locate sprinklers in a consistent pattern with ceiling grid, lights, and air supply diffusers. Install sprinkler system over and under ducts, piping and platforms when such equipment can negatively affect or disrupt the sprinkler discharge pattern and coverage.

a. Piping offsets, fittings, and other accessories required must be furnished to provide a complete installation and to eliminate interference with other construction.

b. Wherever the contractor's work interconnects with work of other trades the Contractor must coordinate with other Contractors to insure all Contractors have the information necessary so that they may properly install all necessary connections and equipment. Identify all work items needing access (dampers and similar equipment) that are concealed above hung ceilings by permanent color coded pins/tabs in the ceiling directly below the item.

c. Provide required supports and hangers for piping, conduit, and equipment so that loading will not exceed allowable loadings of structure. Submittal of a bid must be a deemed representation that the contractor submitting such bid has ascertained allowable loadings and has included in his estimates the costs associated in furnishing required supports.

3.2.1 Waste Removal

At the conclusion of each day's work, clean up and stockpile on site all waste, debris, and trash which may have accumulated during the day as a result of work by the contractor and of his presence on the job. Sidewalks and streets adjoining the property must be kept broom clean and free of waste, debris, trash and obstructions caused by work of the contractor, which will affect the condition and safety of streets, walks, utilities, and property.

3.3 ABOVEGROUND PIPING INSTALLATION

The methods of fabrication and installation of the aboveground piping must fully comply with the requirements and recommended practices of NFPA 13 and this specification section.

3.3.1 Protection of Piping Against Earthquake Damage

Seismic restraint is not required.

3.3.2 Piping in Exposed Areas

Install exposed piping without diminishing exit access widths, corridors or equipment access. Exposed horizontal piping, including drain piping, must be installed to provide maximum headroom.

3.3.3 Piping in Finished Areas

In areas with suspended or dropped ceilings and in areas with concealed spaces above the ceiling, piping must be concealed above ceilings. Piping must be inspected, hydrostatically tested and approved before being concealed. Risers and similar vertical runs of piping in finished areas must be concealed.

3.3.4 Pendent Sprinklers

a. Drop nipples to pendent sprinklers must consist of minimum 1-inch pipe with a reducing coupling into which the sprinkler must be threaded.

b. Where sprinklers are installed below suspended or dropped ceilings, drop nipples must be cut such that sprinkler ceiling plates or escutcheons are of a uniform depth throughout the finished space. The outlet of the reducing coupling must not extend below the underside of the ceiling.

c. Recessed pendent sprinklers must be installed such that the distance from the sprinkler deflector to the underside of the ceiling must not exceed the manufacturer's listed range and must be of uniform depth throughout the finished area.

d. Pendent sprinklers in suspended ceilings must be located in the center of the tile (plus or minus 2 inches).e. Where the maximum static or flowing pressure, whichever is greater at the sprinkler, applied other than through the fire department connection, exceeds 100 psi and a branch line above the ceiling supplies sprinklers in a pendent position below the ceiling, the cumulative horizontal length of an unsupported armover to a sprinkler or sprinkler drop must not exceed 12 inches for steel pipe and 6 inches for copper tube.

3.3.5 Upright Sprinklers

Riser nipples or "sprigs" to upright sprinklers must contain no fittings between the branch line tee and the reducing coupling at the sprinkler.

3.3.6 Pipe Joints

Pipe joints must conform to NFPA 13, except as modified herein. Not more than four threads must show after joint is made up. Welded joints will be permitted, only if welding operations are performed as required by NFPA 13 at the Contractor's fabrication shop, not at the project construction site. Flanged joints must be provided where indicated or required by NFPA 13. Grooved pipe and fittings must be prepared in accordance with the manufacturer's latest published specification according to pipe material, wall thickness and size. Grooved couplings, fittings and grooving tools must be products of the same manufacturer. For copper tubing, pipe and groove dimensions must comply with the tolerances specified by the coupling manufacturer. The diameter of grooves made in the field must be measured using a "go/no-go" gauge, vernier or dial

caliper, narrow-land micrometer, or other method specifically approved by the coupling manufacturer for the intended application. Groove width and dimension of groove from end of pipe must be measured and recorded for each change in grooving tool setup to verify compliance with coupling manufacturer's tolerances.

3.3.7 Reducers

Reductions in pipe sizes must be made with one-piece tapered reducing fittings. When standard fittings of the required size are not manufactured, single bushings of the face or hex type will be permitted. Where used, face bushings must be installed with the outer face flush with the face of the fitting opening being reduced. Bushings cannot be used in elbow fittings, in more than one outlet of a tee, in more than two outlets of a cross, or where the reduction in size is less than 1/2-inch.

3.3.8 Pipe Penetrations

a. Cutting structural members for passage of pipes or for pipe-hanger fastenings will not be permitted. Pipes that must penetrate concrete or masonry walls or concrete floors must be core-drilled and provided with pipe sleeves. Each sleeve must be Schedule 40 galvanized steel, ductile-iron or cast-iron pipe and extend through its respective wall or floor and be cut flush with each wall surface. Sleeves must provide required clearance between the pipe and the sleeve per NFPA 13. The space between the sleeve and the pipe must be firmly packed with mineral wool insulation.

b. Where pipes and sleeves penetrate fire walls, fire partitions, or floors, pipes/sleeves must be firestopped in accordance with Section 07 84 00 FIRESTOPPING.

c. In penetrations that are not fire-rated or not a floor penetration, the space between the sleeve and the pipe must be sealed at both ends with plastic waterproof cement that will dry to a firm but pliable mass or with a mechanically adjustable segmented elastomer seal.

3.3.9 Escutcheons

Escutcheons must be provided for pipe penetration in finished areas of ceilings, floors and walls. Escutcheons must be securely fastened to the pipe at surfaces through which piping passes.

3.3.10 Inspector's Test Connection

Unless otherwise indicated, the test connection must consist of 1-inch pipe connected at the riser and floor control assemblies as a combination test and drain valve; a test valve located approximately 7 feet above the floor; a smooth bore brass outlet equivalent to the smallest orifice sprinkler used in the system; and a painted metal identification sign affixed to the valve with the words "Inspector's Test". All test connection piping must be inside of the building and penetrate the exterior wall at the location of the discharge orifice only. The discharge orifice must be located outside the building wall no more than 2 feet above finished grade, terminated at a hard surface or concrete splash block to prevent erosion. Discharge to the exterior must not interfere with exiting from the facility. Water discharge or runoff must not cross the path of egress from the building. Do not discharge to the roof.

Discharge to floor drains, janitor sinks or similar fixtures is not permitted.

Provide concrete splash blocks at all drain and inspector's test connection discharge locations if not discharging to a concrete surface. Splash blocks must be large enough to mitigate erosion and not become dislodged during a full flow of the drain. Ensure all discharged water drains away from the facility and does not cause property damage.

3.3.11 Backflow Preventer

Locate within the building or in a heated enclosure in locations subject to freezing. For heated enclosures, provide a low temperature supervisory alarm connected to the facility fire alarm system. Heat trace is not permitted to be used.

Install backflow preventers so that the bottom of the assembly is a minimum of 6 inches above the finished floor/grade. Install horizontal backflow preventers so that the bottom of the assembly is no greater than 24 inches above the finished floor/grade. Install vertical backflow preventers so that the upper operating handwheel is no more than 6 feet above the finished floor/grade. Clearance around control valve handles must be minimum 6 inches above grade/finished floor and away from walls.

3.3.11.1 Test Connection

Provide downstream of the backflow prevention assembly UL 668 hose valves with 2.5-inch National Standard male hose threads with cap and chain. Provide one valve for each 250 gpm of system demand or fraction thereof. Provide a permanent sign in accordance with paragraph entitled "Identification Signs" which reads, "Test Valve". Indicate location of test header. If an exterior connection, provide a control valve inside a heated mechanical room to prevent freezing.

3.3.12 Drains

a. Main drain piping must be provided to discharge at a safe point outside the building, no more than 2 feet above finished grade. Terminate at a hard surface or a concrete splash block at drain outlet. Discharge to the exterior must not interfere with exiting from the facility. Water discharge or runoff must not cross the path of egress from the building.

b. Auxiliary drains must be provided as required by NFPA 13. Auxiliary drains are permitted to discharge to a floor drain if the drain is sized to accommodate full flow (min 40 gpm). Discharge to service sinks or similar plumbing fixtures is not permitted.

3.3.13 Installation of Fire Department Connection

Connection must be mounted on the exterior wall approximately 3 feet above finished grade. The piping between the connection and the check valve must be provided with an automatic drip in accordance with NFPA 13 and piped to drain to the outside or a floor drain within the same room.

3.3.14 Identification Signs

Signs must be affixed to each control valve, inspector test valve, main drain, auxiliary drain, test valve, and similar valves as appropriate or

as required by NFPA 13. Main drain test results must be etched into main drain identification sign. Hydraulic design data must be etched into the nameplates and permanently affixed to each sprinkler riser as specified in NFPA 13. Provide labeling on the surfaces of all feed and cross mains to show the pipe function (e.g., "Sprinkler System", "Fire Department Connection", "Standpipe") and normal valve position (e.g. "Normally Open", "Normally Closed"). For pipe sizes 4-inch and larger provide white painted stenciled letters and arrows, a minimum of 2 inches in height and visible from at least two sides when viewed from the floor. For pipe sizes less than 4-inch, provide white painted stenciled letters and arrows, a minimum of 0.75-inch in height and visible from the floor.

3.3.15 Sprinkler Gauge

Install sprinkler gauge installation labels on each sprinkler gauge. Label must indicate date installed and test or replace date.

3.4 ELECTRICAL

Except as modified herein, electric equipment and wiring must be in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Alarm signal wiring connected to the building fire alarm control system must be by the fire alarm installer.

3.5 PAINTING

Color code mark piping red.

3.6 FIELD QUALITY CONTROL

3.6.1 Test Procedures

Submit detailed test procedures, prepared and signed by the NICET Level III Fire Sprinkler Technician, and the representative of the installing company, and reviewed by the QFPE60 days prior to performing system tests. Detailed test procedures must list all components of the installed system. Test procedures must include sequence of testing, time estimate for each test, and sample test data forms. The test data forms must be in a check-off format (pass/fail with space to add applicable test data; similar to the forms in NFPA 13). The test procedures and accompanying test data forms must be used for the pre-Government testing and the Government final testing.

a. Provide space to identify the date and time of each test. Provide space to identify the names and signatures of the individuals conducting and witnessing each test.

3.6.2 Pre-Government Testing

3.6.2.1 Verification of Compliant Installation

Conduct inspections and tests to ensure that equipment is functioning properly. Tests must meet the requirements of paragraph entitled "Minimum System Tests" and "System Acceptance" as noted in NFPA 13. The Contractor and QFPE must be in attendance at the pre-Government testing to make necessary adjustments. After inspection and testing is complete, provide a signed Verification of Compliant Installation letter by the QFPE that the installation is complete, compliant with the specification and fully operable. The letter must include the names and titles of the witnesses

to the pre-Government tests. Provide all completion documentation as required by NFPA 13 and the test reports noted below.

a. NFPA 13 Aboveground Material and Test Certificate

b. NFPA 13 Underground Material and Test Certificate

3.6.2.2 Request for Government Final Test

When the verification of compliant installation has been completed, submit a formal request for Government final test to the Designated Fire Protection Engineer (DFPE). Government final testing will not be scheduled until the DFPE has received copies of the request for Government final testing and Verification of Compliant Installation letter with all required reports. Government final testing will not be performed until after the connections to the installation fire alarm reporting system have been completed and tested to confirm communications are fully functional. Submit request for test at least 15 calendar days prior to the requested test date.

3.6.3 Correction of Deficiencies

If equipment was found to be defective or non-compliant with contract requirements, perform corrective actions and repeat the tests. Tests must be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.

3.6.4 Government Final Tests

The tests must be performed in accordance with the approved test procedures in the presence of the DFPE. Furnish instruments and personnel required for the tests. The following must be provided at the job site for Government Final Testing:

a. The manufacturer's technical representative.

b. The contractor's Qualified Fire Protection Engineer (QFPE).

c. Marked-up red line drawings of the system as actually installed.

Government Final Tests will be witnessed by the Designated Fire Protection Engineer, and Qualified Fire Protection Engineer (QFPE). At this time, all required tests noted in the paragraph "Minimum System Tests" must be repeated at their discretion.

3.7 MINIMUM SYSTEM TESTS

The system, including the aboveground piping and system components, must be tested to ensure that equipment and components function as intended. The underground and aboveground interior piping systems and attached appurtenances subjected to system working pressure must be tested in accordance with NFPA 13.

3.7.1 Aboveground Piping

3.7.1.1 Hydrostatic Test

Aboveground piping must be hydrostatically tested in accordance with NFPA 13. There must be no drop in gauge pressure or visible leakage when

the system is subjected to the hydrostatic test. The test pressure must be read from a gauge located at the low elevation point of the system or portion being tested.

3.7.1.2 Backflow Prevention Assembly Forward Flow Test

Each backflow prevention assembly must be tested at system flow demand, including all applicable hose streams, as specified in NFPA 13. The Contractor must provide all equipment and instruments necessary to conduct a complete forward flow test, including 2.5-inch diameter hoses, playpipe nozzles or flow diffusers, calibrated pressure gauges, and pitot tube gauge. The Contractor must provide all necessary supports to safely secure hoses and nozzles during the test. At the system demand flow, the pressure readings and pressure drop (friction loss) across the assembly must be recorded. A metal placard must be provided on the backflow prevention assembly that lists the pressure readings both upstream and downstream of the assembly, total pressure drop, and the system test flow rate determined during the preliminary testing. The pressure drop must be compared to the manufacturer's data and the readings observed during the final inspections and tests.

3.7.2 Main Drain Flow Test

A main drain test must be made to verify the adequacy of the water supply. Static and residual pressures must be recorded on the certificate specified in paragraph SUBMITTALS.

3.8 SYSTEM ACCEPTANCE

Following acceptance of the system, as-built drawings and O&M manuals must be delivered to the Contracting Officer for review and acceptance. Submit six sets of detailed as-built drawings. The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final acceptance test of the system. At least one set of as-built (marked-up) drawings must be provided at the time of, or prior to the final acceptance test.

a. The drawings must be prepared electronically and sized no less than the contract drawings. Furnish one set of CDs or DVDs containing software back-up and CAD based drawings in latest version of AutoCAD, DXF and portable document formats of as-built drawings and schematics.

b. Provide operating and maintenance (O&M) instructions.

3.9 ONSITE TRAINING

Conduct a training course for the responding fire department and operating and maintenance personnel as designated by the Contracting Officer. Training must be performed on two separate days (to accommodate different shifts of Fire Department personnel) for a period of 4 hours of normal working time and must start after the system is functionally complete and after the final acceptance test. The on-site training must cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 22 00 00

PLUMBING, GENERAL PURPOSE
05/24, CHG 1: 11/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.10.1/CSA 4.1	(2019; R 2024) Gas Water Heaters Vol. I, Storage Water Heaters with Input Ratings of 75,000 Btu Per Hour or Less
ANSI Z21.10.3/CSA 4.3	(2019; R 2024) Gas-Fired Water Heaters Vol.III, Storage Water Heaters With Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous
ANSI Z21.22/CSA 4.4	(2015; R 2020) Relief Valves for Hot Water Supply Systems

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ANSI/ASHRAE 18	(2008; R 2013) Methods Of Testing For Rating Drinking Water Coolers With Self-Contained Mechanical Refrigeration

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME A112.1.2	(2012; R 2017; R 2022) Air Gaps in Plumbing Systems (For Plumbing Fixtures and Water-Connected Receptors)
ASME A112.6.1M	(1997; R 2017) Floor Affixed Supports for Off-the-Floor Plumbing Fixtures for Public Use
ASME A112.6.3	(2022) Floor Drains
ASME A112.14.1	(2003; R 2017; R 2022) Backwater Valves
ASME A112.19.2/CSA B45.1	(2024) Standard for Vitreous China Plumbing Fixtures and Hydraulic Requirements for Water Closets and Urinals
ASME A112.19.3/CSA B45.4	(2022) Stainless Steel Plumbing Fixtures
ASME A112.36.2M	(2022) Cleanouts
ASME B1.20.1	(2013; R 2018) Pipe Threads, General Purpose (Inch)

ASME B16.5	(2020) Pipe Flanges and Flanged Fittings NPS 1/2 Through NPS 24 Metric/Inch Standard
ASME B16.15	(2024) Cast Copper Alloy Threaded Fittings Classes 125 and 250
ASME B16.18	(2021) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.34	(2021) Valves - Flanged, Threaded and Welding End
ASME B16.50	(2021) Wrought Copper and Copper Alloy Braze-Joint Pressure Fittings
ASME B31.1	(2024) Power Piping
ASME B31.5	(2022) Refrigeration Piping and Heat Transfer Components
ASME B40.100	(2022) Pressure Gauges and Gauge Attachments
ASME BPVC SEC IV	(2017) BPVC Section IV-Rules for Construction of Heating Boilers
ASME CSD-1	(2024) Control and Safety Devices for Automatically Fired Boilers

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1001	(2021) Performance Requirements for Atmospheric Type Vacuum Breakers
ASSE 1003	(2020) Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems - (ANSI approved 2010)
ASSE 1010	(2021) Performance Requirements for Water Hammer Arresters
ASSE 1011	(2017) Performance Requirements for Hose Connection Vacuum Breakers
ASSE 1012	(2023) Performance Requirements for Backflow Preventer with an Intermediate Atmospheric Vent
ASSE 1013	(2021) Performance Requirements for Reduced Pressure Principle Backflow Prevention Assemblies
ASSE 1016	(2017) Performance Requirements for Automatic Compensating Valves for

	individual Showers and Tub/Shower Combinations
ASSE 1017	(2023) Performance Requirements for Temperature Actuated Mixing Valves for Hot Water Distribution Systems - (ANSI approved 2010)
ASSE 1018	(2023) Performance Requirements for Trap Seal Primer Valves - Potable Water Supplied (ANSI Approved 2002
ASSE 1019	(2023) Performance Requirements for Wall Hydrant with Backflow Protection and Freeze Resistance
ASSE 1020	(2020; R 2025) Performance Requirements for Pressure Vacuum Breaker Assemblies
ASSE 1044	(2023) Performance Requirements for Trap Seal Primer - Drainage Types and Electric Design Types
ASSE 1069	(2020) Performance Requirements for Automatic Temperature Control Mixing Valves
ASSE 1070	(2020) Performance Requirements for Water Temperature Limiting Devices
ASSE 1072	(2020) Performance Requirements for Barrier Type Trap Seal Protection for Floor Drains

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA 10084	(2017) Standard Methods for the Examination of Water and Wastewater
AWWA B300	(2024) Hypochlorites
AWWA B301	(2024) Liquid Chlorine
AWWA C203	(2020) Coal-Tar Protective Coatings and Linings for Steel Water Pipe
AWWA C651	(2023) Standard for Disinfecting Water Mains
AWWA C652	(2019) Disinfection of Water-Storage Facilities
AWWA C700	(2020) Cold-Water Meters - Displacement Type, Metal Alloy Main Case
AWWA C701	(2019) Cold-Water Meters - Turbine Type for Customer Service

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8/A5.8M	(2019) Specification for Filler Metals for Brazing and Braze Welding
AWS B2.2/B2.2M	(2016) Specification for Brazing Procedure and Performance Qualification

ASTM INTERNATIONAL (ASTM)

ASTM A105/A105M	(2023) Standard Specification for Carbon Steel Forgings for Piping Applications
ASTM A193/A193M	(2025) Standard Specification for Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service and Other Special Purpose Applications
ASTM A515/A515M	(2017; R2022) Standard Specification for Pressure Vessel Plates, Carbon Steel, for Intermediate- and Higher-Temperature Service
ASTM A516/A516M	(2017) Standard Specification for Pressure Vessel Plates, Carbon Steel, for Moderate- and Lower-Temperature Service
ASTM A733	(2016; R 2022) Standard Specification for Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B88	(2022) Standard Specification for Seamless Copper Water Tube
ASTM B88M	(2020) Standard Specification for Seamless Copper Water Tube (Metric)
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B370	(2022) Standard Specification for Copper Sheet and Strip for Building Construction
ASTM B813	(2024) Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM B828	(2023) Standard Practice for Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings
ASTM C564	(2020a) Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings
ASTM C920	(2018; R 2024) Standard Specification for

	Elastomeric Joint Sealants
ASTM D1248	(2016) Standard Specification for Polyethylene Plastics Extrusion Materials for Wire and Cable
ASTM D2564	(2020) Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems
ASTM D2665	(2014) Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings
ASTM D2855	(2020) Standard Practice for the Two-Step (Primer and Solvent Cement) Method of Joining Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Pipe and Piping Components with Tapered Sockets
ASTM D3138	(2004; R 2016) Standard Specification for Solvent Cements for Transition Joints Between Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Non-Pressure Piping Components
ASTM D3139	(2019) Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
ASTM D3212	(2020) Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D3311	(2017) Standard Specification for Drain, Waste, and Vent (DWV) Plastic Fittings Patterns
ASTM D4586/D4586M	(2007; R 2018) Standard Specification for Asphalt Roof Cement, Asbestos-Free
ASTM E1	(2014; R 2025) Standard Specification for ASTM Liquid-in-Glass Thermometers
ASTM F409	(2022) Standard Specification for Thermoplastic Accessible and Replaceable Plastic Tube and Tubular Fittings
ASTM F477	(2014; R 2021) Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F891	(2024) Standard Specification for Coextruded Poly (Vinyl Chloride) (PVC) Plastic Pipe with a Cellular Core
ASTM F1760	(2016; R 2025) Standard Specification for Coextruded Poly(Vinyl Chloride) (PVC) Non-Pressure Plastic Pipe Having

Reprocessed-Recycled Content

ASTM F2389 (2024a) Standard Specification for Pressure-rated Polypropylene (PP) Piping Systems

COPPER DEVELOPMENT ASSOCIATION (CDA)

CDA A4015 (2016; 14/17) Copper Tube Handbook

INTERNATIONAL CODE COUNCIL (ICC)

ICC A117.1 (2017) Standard And Commentary Accessible and Usable Buildings and Facilities

ICC IPC (2024) International Plumbing Code

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-25 (2018) Standard Marking System for Valves, Fittings, Flanges and Unions

MSS SP-58 (2025) Pipe Hangers and Supports - Materials, Design and Manufacture, Selection, Application, and Installation

MSS SP-67 (2022) Butterfly Valves

MSS SP-70 (2011) Gray Iron Gate Valves, Flanged and Threaded Ends

MSS SP-71 (2018) Gray Iron Swing Check Valves, Flanged and Threaded Ends

MSS SP-72 (2010a) Ball Valves with Flanged or Butt-Welding Ends for General Service

MSS SP-78 (2011) Cast Iron Plug Valves, Flanged and Threaded Ends

MSS SP-80 (2019) Bronze Gate, Globe, Angle, and Check Valves

MSS SP-85 (2011) Gray Iron Globe & Angle Valves Flanged and Threaded Ends

MSS SP-110 (2010) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250 (2020) Enclosures for Electrical Equipment (1000 Volts Maximum)

NEMA MG 1 (2021) Motors and Generators

NEMA MG 11 (1977; R 2012) Energy Management Guide for

	Selection and Use of Single Phase Motors
NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)	
NFPA 31	(2024; TIA 23-1) Standard for the Installation of Oil-Burning Equipment
NFPA 54	(2024) National Fuel Gas Code
NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems
NSF INTERNATIONAL (NSF)	
NSF 372	(2022) Drinking Water System Components - Lead Content
NSF/ANSI 14	(2024) Plastics Piping System Components and Related Materials
NSF/ANSI/CAN 61	(2024) Drinking Water System Components - Health Effects
PLASTIC PIPE AND FITTINGS ASSOCIATION (PPFA)	
PPFA Fire Man	(2016) Firestopping: Plastic Pipe in Fire Resistive Construction
PLUMBING AND DRAINAGE INSTITUTE (PDI)	
PDI WH 201	(2010) Water Hammer Arresters Standard
SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)	
SAE J1508	(2023) Hose Clamp Specifications
U.S. DEPARTMENT OF ENERGY (DOE)	
Energy Star	Energy Star Energy Efficiency Labeling System (FEMP)
U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)	
PL 93-523	(1974; A 1999) Safe Drinking Water Act
U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)	
21 CFR 175	Indirect Food Additives: Adhesives and Components of Coatings
40 CFR 141.80	National Primary Drinking Water Regulations; Control of Lead and Copper; General Requirements
UL SOLUTIONS (UL)	
UL 174	(2004; Reprint Nov 2024) UL Standard for Safety Household Electric Storage Tank Water Heaters

UL 399 (2017; Reprint May 2019) UL Standard for Safety Drinking Water Coolers

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Plumbing System; G,

SD-03 Product Data

Backflow Prevention Assemblies; G,

Recycled Content for Steel Pipe; S

Recycled Content for Cast Iron Pipe; S

Fixtures

Shower Faucets; G,

Flush Valve Water Closets

Flush Valve Urinals

Wall Hung Lavatories

WaterSense Label for Lavatory Faucet; S

Service Sinks

Water Heaters; G,

Energy Star Label for Gas Storage Water Heater; S

Pumps; G,

Vibration-Absorbing Features; G,

Plumbing System

Thermostatic Mixing Valves

Temperature Controlled Mixing Valve
Point-Of-Use Mixing Valve

Automatic Temperature And Pressure Compensating Valve

Single Supply Line Automatic Temperature Control

SD-06 Test Reports

Tests, Flushing and Disinfection

Test of Backflow Prevention Assemblies; G, .

SD-07 Certificates

Materials and Equipment

Bolts

SD-10 Operation and Maintenance Data

Plumbing System; G,

1.3 SHOP DRAWINGS

Submit Plumbing System Detail drawings consisting of schedules, performance charts, instructions, diagrams, and other information to illustrate the requirements and operations of systems that are not covered by the Plumbing Code. Submit Plumbing System Detail drawings for the complete plumbing system including piping layouts and locations of connections; dimensions for roughing-in, foundation, and support points; schematic diagrams and wiring diagrams or connection and interconnection diagrams. Detail drawings must indicate clearances required for maintenance and operation. Where piping and equipment are to be supported other than as indicated, details must include loadings and proposed support methods. Mechanical drawing plans, elevations, views, and details, must be drawn to scale.

1.4 STANDARD PRODUCTS

Specified materials and equipment must be standard products of a manufacturer regularly engaged in the manufacture of such products. Specified equipment must essentially duplicate equipment that has performed satisfactorily at least 2 years prior to bid opening. Standard products must have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year use must include applications of equipment and materials under similar circumstances and of similar size. The product must have been for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2 year period.

Where equipment is specified to conform to requirements of the ASME Boiler and Pressure Vessel Code, the design, fabrication, and installation must conform to the code and a certificate must be submitted for the equipment.

1.4.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturer's factory or laboratory tests, can be shown.

1.4.2 Service Support

The equipment items must be supported by service organizations. Submit a certified list of qualified permanent service organizations for support of the equipment which includes their addresses and qualifications. These service organizations must be reasonably convenient to the equipment installation and able to render satisfactory service to the equipment on a

regular and emergency basis during the warranty period of the contract.

1.4.3 Manufacturer's Nameplate

Each item of equipment must have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

1.4.4 Modification of References

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction", or words of similar meaning, to mean the Contracting Officer.

1.4.4.1 Definitions

For the International Code Council (ICC) Codes referenced in the contract documents, advisory provisions must be considered mandatory, the word "should" must be interpreted as "must." Reference to the "code official" must be interpreted to mean the "Contracting Officer." For Navy owned property, references to the "owner" must be interpreted to mean the "Contracting Officer." For leased facilities, references to the "owner" must be interpreted to mean the "lessor." References to the "permit holder" must be interpreted to mean the "Contractor."

1.4.4.2 Administrative Interpretations

For ICC Codes referenced in the contract documents, the provisions of Chapter 1, "Administrator," do not apply. These administrative requirements are covered by the applicable Federal Acquisition Regulations (FAR) included in this contract and by the authority granted to the Officer in Charge of Construction to administer the construction of this project. References in the ICC Codes to sections of Chapter 1, must be applied appropriately by the Contracting Officer as authorized by his administrative cognizance and the FAR.

1.5 DELIVERY, STORAGE, AND HANDLING

Handle, store, and protect equipment and materials to prevent damage before and during installation in accordance with the manufacturer's recommendations, and as approved by the Contracting Officer. Replace damaged or defective items.

1.6 REGULATORY REQUIREMENTS

Unless otherwise required herein, plumbing work must be in accordance with ICC IPC.

1.7 PROJECT/SITE CONDITIONS

The Contractor must become familiar with details of the work, verify dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.8 INSTRUCTION TO GOVERNMENT PERSONNEL

Furnish the services of competent instructors to give full instruction to the designated Government personnel in the adjustment, operation, and maintenance, including pertinent safety requirements, of the specified equipment or system. Instructors must be thoroughly familiar with all parts of the installation and must be trained in operating theory as well as practical operation and maintenance work. Submit Plumbing System Operation and Maintenance Data in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

Instruction must be given during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of man-days (8 hours per day) of instruction furnished must be as specified in the individual section. When more than 4 man-days of instruction are specified, use approximately half of the time for classroom instruction. Use other time for instruction with the equipment or system. When significant changes or modifications in the equipment or system are made under the terms of the contract, provide additional instruction to acquaint the operating personnel with the changes or modifications.

1.9 ACCESSIBILITY OF EQUIPMENT

Install all work so that parts requiring periodic inspection, operation, maintenance, and repair are readily accessible. Install concealed valves, expansion joints, controls, dampers, and equipment requiring access, in locations freely accessible through access doors.

PART 2 PRODUCTS

2.1 MATERIALS

Materials for various services must be in accordance with TABLES I and II. Cement pipe must contain recycled content as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE. Steel pipe must contain a minimum of 25 percent recycled content, with a minimum of 16 percent post-consumer recycled content. Provide data identifying percentage of recycled content for steel pipe. Pipe schedules must be selected based on service requirements. Pipe fittings must be compatible with the applicable pipe materials. Plastic pipe, fittings, and solvent cement must meet NSF/ANSI 14 and must be NSF listed for the service intended. Plastic pipe, fittings, and solvent cement used for potable hot and cold water service must bear the NSF seal "NSF-PW." Polypropylene pipe and fittings must conform to dimensional requirements of Schedule 40, Iron Pipe size and must comply with NSF/ANSI 14, NSF/ANSI/CAN 61 and ASTM F2389. Polypropylene piping that will be exposed to UV light must be provided with a Factory applied UV resistant coating. Pipe threads (except dry seal) must conform to ASME B1.20.1. Grooved pipe couplings and fittings must be from the same manufacturer. Material or used in any potable water system intended for human consumption be certified in accordance with NSF 372 with the exception of brazing materials. In line devices such as water meters, building valves, check valves, meter stops, valves, fittings and back flow preventers must comply with PL 93-523 and NSF/ANSI/CAN 61, Section 8. End point devices such as drinking water fountains, lavatory faucets, kitchen and bar faucets, residential ice makers, supply stops and end point control valves used to dispense water for drinking must meet the requirements of NSF/ANSI/CAN 61, Section 9. Hubless cast-iron soil pipe must not be installed underground, under concrete floor slabs, or in crawl

spaces below kitchen floors (for Air Force/Army/Navy projects). Cast-iron pipe must contain a minimum of 95 percent recycled content. Provide data identifying percentage of recycled content for cast iron pipe. Plastic pipe must not be installed in air plenums. Plastic pipe must not be installed in a pressure piping system in buildings greater than three stories including any basement levels.

2.1.1 Pipe Joint Materials

Solder containing lead must not be used with copper pipe. Joints and gasket materials must conform to the following:

a. Brazing Material: Brazing material must conform to AWS A5.8/A5.8M, BCuP-5.

b. Brazing Flux: Flux must be in paste or liquid form appropriate for use with brazing material. Flux must be as follows: lead-free; have a 100 percent flushable residue; contain slightly acidic reagents; contain potassium borides; and contain fluorides.

c. Solder Material: Solder metal must conform to ASTM B32.

d. Solder Flux: Flux must be liquid form, non-corrosive, and conform to ASTM B813, Standard Test 1.

e. PTFE Tape: PTFE Tape, for use with Threaded Metal or Plastic Pipe.

f. Flexible Elastomeric Seals: ASTM D3139, ASTM D3212 or ASTM F477.

g. Solvent Cement for Transition Joints between ABS and PVC Nonpressure Piping Components: ASTM D3138.

h. Plastic Solvent Cement for PVC Plastic Pipe: ASTM D2564 and ASTM D2855.

i. Flanged fittings including, but not limited to, flanges, bolts, nuts and bolt patterns must be in accordance with ASME B16.5 class 150 and must have the manufacturer's trademark affixed in accordance with MSS SP-25. Flange material must conform to ASTM A105/A105M. Blind flange material must conform to ASTM A516/A516M cold service and ASTM A515/A515M for hot service. Bolts must be high strength or intermediate strength with material conforming to ASTM A193/A193M. Submit written certification by the bolt manufacturer that the bolts furnished comply with the specified requirements.

j. Copper tubing must conform to ASTM B88, Type K, L or M.

2.1.2 Miscellaneous Materials

Miscellaneous materials must conform to the following:

a. Water Hammer Arrester: PDI WH 201. Water hammer arrester must be diaphragm or piston type.

b. Copper, Sheet and Strip for Building Construction: ASTM B370.

c. Asphalt Roof Cement: ASTM D4586/D4586M.

d. Hose Clamps: SAE J1508.

e. Supports for Off-The-Floor Plumbing Fixtures: ASME A112.6.1M.

f. Metallic Cleanouts: ASME A112.36.2M.

g. Plumbing Fixture Setting Compound: A preformed flexible ring seal molded from hydrocarbon wax material. The seal material must be nonvolatile nonasphaltic and contain germicide and provide watertight, gastight, odorproof and verminproof properties.

h. Coal-Tar Protective Coatings and Linings for Steel Water Pipelines: AWWA C203.

i. Hypochlorites: AWWA B300.

j. Liquid Chlorine: AWWA B301.

k. Gauges - Pressure and Vacuum Indicating Dial Type - Elastic Element: ASME B40.100.

l. Thermometers: ASTM E1. Mercury must not be used in thermometers.

2.1.3 Pipe Insulation Material

Insulation must be as specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

2.2 PIPE HANGERS, INSERTS, AND SUPPORTS

Pipe hangers, inserts, and supports must conform to MSS SP-58.

2.3 VALVES

Valves must be provided on supplies to equipment and fixtures. Valves 2-1/2 inches and smaller must be bronze with threaded bodies for pipe and solder-type connections for tubing. Valves 3 inches and larger must have flanged iron bodies and bronze trim. Pressure ratings must be based upon the application. Grooved end valves may be provided if the manufacturer certifies that the valves meet the performance requirements of applicable MSS standard." Valves must conform to the following standards:

Description	Standard
Butterfly Valves	MSS SP-67
Cast-Iron Gate Valves, Flanged and Threaded Ends	MSS SP-70
Cast-Iron Swing Check Valves, Flanged and Threaded Ends	MSS SP-71

Ball Valves with Flanged Butt-Welding Ends for General Service	MSS SP-72
Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends	MSS SP-110
Cast-Iron Plug Valves, Flanged and Threaded Ends	MSS SP-78
Bronze Gate, Globe, Angle, and Check Valves	MSS SP-80
Steel Valves, Socket Welding and Threaded Ends	ASME B16.34
Cast-Iron Globe and Angle Valves, Flanged and Threaded Ends	MSS SP-85
Backwater Valves	ASME A112.14.1
Vacuum Relief Valves	ANSI Z21.22/CSA 4.4
Water Pressure Reducing Valves	ASSE 1003
Water Heater Drain Valves	ASME BPVC SEC IV, Part HLW-810: Requirements for Potable-Water Heaters Bottom Drain Valve
Trap Seal Primer Valves	ASSE 1018
Temperature and Pressure Relief Valves for Hot Water Supply Systems	ANSI Z21.22/CSA 4.4
Temperature and Pressure Relief Valves for Automatically Fired Hot Water Boilers	ASME CSD-1 Safety Code No., Part CW, Article 5

2.3.1 Backwater Valves

Backwater valves must be either separate from the floor drain or a combination floor drain, P-trap, and backwater valve, as indicated on drawings. Valves must have cast-iron bodies with cleanouts large enough to permit removal of interior parts. Valves must be of the flap type, hinged or pivoted, with revolving disks. Hinge pivots, disks, and seats must be nonferrous metal. Disks must be slightly open in a no-flow no-backwater condition. Cleanouts must extend to finished floor and be fitted with threaded countersunk plugs.

2.3.2 Wall Faucets

Wall faucets with vacuum-breaker backflow preventer must be brass with 3/4 inch male inlet threads, hexagon shoulder, and 3/4 inch hose connection. Faucet handle must be securely attached to stem.

2.3.3 Wall Hydrants (Frostproof)

ASSE 1019 with vacuum-breaker backflow preventer must have a recessed box, with locking cover. A brass or bronze operating rod must be provided within a galvanized iron casing of sufficient length to extend through the wall so that the valve is inside the building, and the portion of the hydrant between the outlet and valve is self-draining. A brass or bronze valve with coupling and union elbow having metal-to-metal seat must be provided. Valve rod and seat washer must be removable through the face of the hydrant. The hydrant must have 3/4 inch exposed hose thread on spout and 3/4 inch male pipe thread on inlet.

2.3.4 Lawn Faucets

Lawn faucets must be brass, with either straight or angle bodies, and must be of the compression type. Body flange must be provided with internal pipe thread to suit 3/4 inch pipe. Body must be suitable for wrench grip. Faucet spout must have 3/4 inch exposed hose threads. Faucet handle must be securely attached to stem.

2.3.5 Yard Hydrants

Yard box or post hydrants must have valve housings located below frost lines. Water from the casing must be drained after valve is shut off. Hydrant must be bronze with cast-iron box or casing guard. "T" handle key must be provided.

2.3.6 Outlet Boxes

2.3.6.1 Washer Box

One-piece, recessed, high-impact plastic box with quarter turn shut-off valves, water hammer arresters 1/2 inch hot and cold supplies, 2 inch drain.

2.3.6.2 Ice Maker Box

One-piece, recessed, high impact plastic box with quarter turn shut-off valves, 1/2 inch supply.

2.3.7 Relief Valves

Water heaters and hot water storage tanks must have a combination pressure and temperature (P&T) relief valve. The pressure relief element of a P&T relief valve must have adequate capacity to prevent excessive pressure buildup in the system when the system is operating at the maximum rate of heat input. The temperature element of a P&T relief valve must have a relieving capacity which is at least equal to the total input of the heaters when operating at their maximum capacity. Relief valves must be rated according to ANSI Z21.22/CSA 4.4. Relief valves for systems where the maximum rate of heat input is less than 200,000 Btuh must have 3/4 inch minimum inlets, and 3/4 inch outlets. Relief valves for systems where

the maximum rate of heat input is greater than 200,000 Btuh must have 1 inch minimum inlets, and 1 inch outlets. The discharge pipe from the relief valve must be the size of the valve outlet.

2.3.8 Thermostatic Mixing Valves

Each valve must be constructed to control the mixing of hot and cold water and to deliver water at a desired temperature regardless of pressure or input temperature changes. The control element must be of an approved type. The body must be of heavy cast bronze, and interior parts must be brass, bronze, corrosion-resisting steel or copper. The valve must be equipped with necessary stops, check valves, unions, and sediment strainers on the inlets.

2.3.9 Temperature Controlled Mixing Valve

Provide an ASSE 1017 temperature controlled (master mixing valve) to lower temperature per UFC 3-420-01 immediately downstream of the water heater and or storage tank as close to the fixture(s) as possible in order to reduce the amount of stored tempered water in the pipes in accordance with ASSE 1017.

2.3.10 Point-of-Use Mixing Valve

Provide a point-of-use mixing valve in accordance with ASSE 1070 at lavatories, hand-wash sinks, and washfountain locations. Point-of-use mixing valve must limit the tempered water to not greater than 110 degrees F.

2.3.11 Automatic Temperature and Pressure Compensating Valve

Provide automatic temperature and/or pressure compensating valve installed at each individual shower or tub/shower combination in accordance with ASSE 1016. The compensating valve must be integrated with each individual shower or tub/shower combination valve and must be installed at point of use. The valve must be equipped with a device to limit the maximum temperature to 120 degrees F.

2.3.12 Single Supply Line Automatic Temperature Control

Provide ASSE 1069 automatic temperature control valve on single supply line to gang showers or sitz baths to provide tempered water control to multiple fixtures. Valves must be installed where end user does not have means to adjust temperature setting. Temperature setting must be set as indicated with a maximum set point of 120 degrees F.

2.4 FIXTURES

Submit list of fixtures with manufacturer, model, and flow rate. Water closet replacements in major renovations may have a flush valve of up to 1.6 GPF to accommodate existing plumbing capacity. Fixtures for use by the physically handicapped must be in accordance with ICC A117.1. ASME A112.19.3/CSA B45.4 304 stainless steel , nonabsorbent, hard-burned, and vitrified throughout the body must be provided. Porcelain enameled ware must have specially selected, clear white, acid-resisting enamel coating evenly applied on surfaces. No fixture will be accepted that shows cracks, crazes, blisters, thin spots, or other flaws. Fixtures must be equipped with appurtenances such as traps, faucets, stop valves, and drain fittings. Each fixture and piece of equipment requiring connections

to the drainage system, except grease interceptors, must be equipped with a trap. Brass expansion or toggle bolts capped with acorn nuts must be provided for supports, and polished chromium-plated pipe, valves, and fittings must be provided where exposed to view. Fixtures with the supply discharge below the rim must be equipped with backflow preventers. Internal parts of flush valves and flushometer valves, shower mixing valves, shower head face plates, pop-up stoppers of lavatory waste drains, and pop-up stoppers and overflow tees and shoes of bathtub waste drains may contain acetal resin, fluorocarbon, nylon, acrylonitrile-butadiene-styrene (ABS) or other plastic material, if the material has provided satisfactory service under actual commercial or industrial operating conditions for not less than 2 years. Plastic in contact with hot water must be suitable for 180 degrees F water temperature.

2.4.1 Lavatories

Provide public faucet with a maximum flow rate of 0.5 gpm at a maximum flowing pressure of 60 psi. Provide data identifying WaterSense label for lavatory faucet.

2.4.2 Flush Valve Water Closets

2.4.2.1 Flush Valve Water Closet Type and Mount

ASME A112.19.3/CSA B45.4 304 Stainless Steel, siphon jet, elongated bowl, floor-mounted, floor outlet. Top of toilet seat height above floor must be 14 to 15 inches, except 17 to 19 inches for wheelchair water closets. Provide wax bowl ring including plastic sleeve. Provide stainless steel elongated open-front seat.

2.4.2.2 Flush Valve Water Closet Flush and Flow

Water flushing volume of the water closet and flush valve combination must not exceed 1.28 gallons per flush. Water closets must meet the EPA WaterSense product definition and must be EPA WaterSense labeled products.

2.4.2.3 Flush Valve Water Closet Control Valve

Provide external large diameter flush valve including angle control-stop valve, vacuum breaker, tail pieces, slip nuts, and wall plates; exposed to view components must be chromium-plated or polished stainless steel. Flush valves must be nonhold-open type. Mount flush valves not less than 11 inches above the fixture. Mounted height of flush valve must not interfere with the hand rail in ADA stalls.

2.4.3 Flush Valve Urinals

ASME A112.19.3/CSA B45.4 304 stainless steel, wall-mounted, wall outlet, siphon jet, integral trap, and extended side shields. Provide urinal with the rim 24 inches above the floor. Water flushing volume of the urinal and flush valve combination must not exceed 0.5 gallons per flush. Urinals must be EPA WaterSense labeled products.

Provide ASME A112.6.1M concealed chair carriers with vertical steel pipe supports. Provide large diameter flush valve including angle control-stop valve, vacuum breaker, tail pieces, slip nuts, and wall plates; exposed to view components must be chromium-plated or polished stainless steel.

Flush valves must be nonhold-open type. Mount flush valves not less than 11 inches above the fixture.

Provide external large diameter flush valve including angle control-stop valve, vacuum breaker, tail pieces, slip nuts, and wall plates; exposed to view components must be chromium-plated or polished stainless steel. Flush valves must be nonhold-open type. Mount flush valves not less than 11 inches above the fixture. Mounted height of flush valve must not interfere with the hand rail in ADA stalls.

2.4.4 Wall Hung Lavatories

ASME A112.19.3/CSA B45.4 304 stainless steel, ledge back type, minimum dimensions of 19 inches wide by 17 inches front to rear, with supply openings for use with top mounted centerset faucets, and openings for concealed arm carrier installation. Install necessary backing plate in wall cavity. Provide lavatory faucets and accessories meeting the flow rate and product requirements of the paragraph LAVATORIES. Provide ASME A112.6.1M concealed chair carriers with vertical steel pipe supports and concealed arms for the lavatory. Mount lavatory with the front rim 34 inches above floor and with 29 inches minimum clearance from bottom of the front rim to floor. Provide top mounted washerless centerset lavatory faucets. Provide piping covers for P-traps, valves, and exposed drain piping per ADA requirement.

2.4.5 Service Sinks

ASME A112.19.2/CSA B45.1, white vitreous china with integral back and wall hanger supports, minimum dimensions of 22 inches wide by 20 inches front to rear, with two supply openings in 10 inch high back. Provide floor supported wall outlet cast iron P-trap and stainless steel rim guards as recommended by service sink manufacturer. Provide back mounted washerless service sink faucets with vacuum breaker and 0.75 inch external hose threads.

2.4.6 Wheelchair Drinking Water Cooler

ANSI/ASHRAE 18, UL 399, NSF/ANSI/CAN 61, ADA and ICC A117.1. Dual height water cooler with more than a single thickness of metal between the potable water and the refrigerant in the heat exchanger, wall-mounted bubbler style with ASME A112.6.1M concealed chair carrier, air-cooled condensing unit, 8 gph minimum capacity, stainless steel splash receptor, and all stainless steel cabinet, with 27 inch minimum knee clearance from front bottom of unit to floor and 36 inch maximum spout height above floor for ADA side and 38 inches to 43 inches above floor for standing person side and bottle filler. Bubblers must also be controlled by push levers, by push bars, or touch pads one on each side or one on front and both sides of the cabinet.

2.4.7 Shower Faucets

Provide ball joint self-cleaning shower heads. Provide WaterSense labeled showerhead with a maximum flow rate of 1.75 gpm.

2.4.8 Precast Terrazzo Shower Floors

Terrazzo must be made of marble chips cast in white portland cement to produce 3000 psi minimum compressive strength 7 days after casting. Provide floor or wall outlet copper alloy body drain cast integral with

terrazzo, with polished stainless steel strainers.

2.4.9 Precast Terrazzo Mop Sinks

Terrazzo must be made of marble chips cast in white portland cement to produce 3000 psi minimum compressive strength 7 days after casting. Terrazzo can include stainless steel curb cap wall guard additions with minimum dimensions of 24 inches wide by 24 inches length by 12 inches height. Provide floor or wall outlet copper alloy body drain cast integral with terrazzo, with polished stainless steel strainers.

2.5 BACKFLOW PREVENTERS

Backflow prevention devices must be approved by the State or local regulatory agencies. If there is no State or local regulatory agency requirements, the backflow prevention devices must be listed by the Foundation for Cross-Connection Control & Hydraulic Research, or any other approved testing laboratory having equivalent capabilities for both laboratory and field evaluation of backflow prevention devices and assemblies. Reduced pressure principle assemblies, double check valve assemblies, atmospheric (nonpressure) type vacuum breakers, and pressure type vacuum breakers must be meet the above requirements.

Backflow preventers with intermediate atmospheric vent must conform to ASSE 1012. Reduced pressure principle backflow preventers must conform to ASSE 1013. Hose connection vacuum breakers must conform to ASSE 1011. Pipe applied atmospheric type vacuum breakers must conform to ASSE 1001. Pressure vacuum breaker assembly must conform to ASSE 1020. Air gaps in plumbing systems must conform to ASME A112.1.2.

2.6 DRAINS

2.6.1 Floor and Shower Drains

Floor and shower drains must consist of a galvanized body, integral seepage pan, and adjustable perforated or slotted chromium-plated bronze, nickel-bronze, or nickel-brass strainer, consisting of grate and threaded collar. Floor drains must be cast iron except where metallic waterproofing membrane is installed. Drains must be of double drainage pattern for embedding in the floor construction. The seepage pan must have weep holes or channels for drainage to the drainpipe. The seepage pan and weep holes must not be filled or plugged and have pervious materials (such as pea gravel) or a weep hole protection device to allow drainage. The strainer must be adjustable to floor thickness. A clamping device for attaching flashing or waterproofing membrane to the seepage pan without damaging the flashing or waterproofing membrane must be provided when required. Drains must be provided with threaded connection. Between the drain outlet and waste pipe, a neoprene rubber gasket conforming to ASTM C564 may be installed, provided that the drain is specifically designed for the rubber gasket compression type joint. Floor and shower drains must conform to ASME A112.6.3. Provide drain with trap primer connection, trap primer, and connection piping. Primer must meet ASSE 1018.

2.6.1.1 Metallic Shower Pan Drains

Where metallic shower pan membrane is installed, polyethylene drain with corrosion-resistant screws securing the clamping device must be provided. Polyethylene drains must have fittings to adapt drain to waste piping. Polyethylene for floor drains must conform to ASTM D1248. Drains must

have separate cast-iron "P" trap, circular body, seepage pan, and strainer, unless otherwise indicated.

2.6.1.2 Drains and Backwater Valves

Drains and backwater valves installed in connection with waterproofed floors or shower pans must be equipped with bolted-type device to securely clamp flashing.

2.6.2 Shower Faucets and Drain Fittings

Provide single control pressure equalizing bathtub and shower faucets with body mounted from behind the wall with threaded connections. Provide ball joint self-cleaning shower heads. Provide WaterSense labeled showerhead with a maximum flow rate of 1.75 gpm. Provide showerheads meeting the requirements in the paragraph SHOWER FAUCETS. Provide shower valve with ball type control handle.

2.6.3 Area Drains

Area drains must be plain pattern with polished stainless steel perforated or slotted grate and bottom outlet. The drain must be circular or square with a 12 inch nominal overall width or diameter and 10 inch nominal overall depth. Drains must be cast iron with manufacturer's standard coating. Grate must be easily lifted out for cleaning. Outlet must be suitable for inside caulked connection to drain pipe. Drains must conform to ASME A112.6.3.

2.6.4 Trap Seal Protection

2.6.4.1 Potable Water-Supplied Trap Seal Valve

Trap must be supplied with a source of potable water. The trap seal primer valve must conform to ASSE 1018. The discharge from the valve must connect to the trap seal on the inlet side of the trap.

2.6.4.2 Waste Water-Supplied Trap Seal Device

Trap will be supplied with a source of waste water conforming to ASSE 1044. The discharge from the device must connect to the trap above the trap seal on the inlet side of the trap.

2.6.4.3 Barrier-Type Trap Seal Protection Device

Trap must be protected with a barrier-type trap seal protection device conforming to ASSE 1072 and must be installed in accordance with the manufacturer's instructions.

2.7 SHOWER PAN

Shower pan may be copper, or nonmetallic material.

2.8 TRAPS

Unless otherwise specified, traps must be plastic per ASTM F409. Traps must be without a cleanout. Provide traps with removable access panels for easy clean-out at sinks and lavatories. Tubes must be copper alloy with walls not less than 0.032 inch thick within commercial tolerances, except on the outside of bends where the thickness may be reduced slightly

in manufacture by usual commercial methods. Inlets must have rubber washer and copper alloy nuts for slip joints above the discharge level. Swivel joints must be below the discharge level and must be of metal-to-metal or metal-to-plastic type as required for the application. Nuts must have flats for wrench grip. Outlets must have internal pipe thread, except that when required for the application, the outlets must have sockets for solder-joint connections. The depth of the water seal must be not less than 2 inches. The interior diameter must be not more than 1/8 inch over or under the nominal size, and interior surfaces must be reasonably smooth throughout. A copper alloy "P" trap assembly consisting of an adjustable "P" trap and threaded trap wall nipple with cast brass wall flange must be provided for lavatories. The assembly must be a standard manufactured unit and may have a rubber-gasketed swivel joint.

2.9 INTERCEPTORS

2.9.1 Lint Interceptors

Provide Lint Interceptor for laundry areas not in individual dwelling units. Interceptor to have removable lid and removable screen to prevent passage of 1/2 inch minimum size solids into the sanitary drainage system.

2.10 WATER HEATERS

Water heater types and capacities must be as indicated. Each water heater must have replaceable anodes. Each primary water heater must have controls with an adjustable range that includes 90 to 160 degrees F. Each gas-fired water heater and booster water heater must have controls with an adjustable range that includes 120 to 180 degrees F. Hot water systems utilizing recirculation systems must be tied into building off-hour controls. The thermal efficiencies and standby heat losses must conform to TABLE III in PART 3 of this Section for each type of water heater specified. The only exception is that storage water heaters and hot water storage tanks having more than 500 gallons storage capacity need not meet the standard loss requirement if the tank surface area is insulated to R-12.5 and if a standing light is not used. Plastic materials polyetherimide (PEI) and polyethersulfone (PES) are forbidden to be used for vent piping of combustion gases. A factory pre-charged expansion tank must be installed on the cold water supply to each water heater. Expansion tanks must be specifically designed for use on potable water systems and must be rated for 200 degrees F water temperature and 150 psi working pressure. The expansion tank size and acceptance volume must be as indicated.

2.10.1 Automatic Storage Type

Heaters must be complete with control system, temperature gauge, and pressure gauge, and must have ASME rated combination pressure and temperature relief valve.

2.10.1.1 Gas-Fired Type

Gas-fired water heaters must conform to ANSI Z21.10.1/CSA 4.1 when input is 75,000 BTU per hour or less or ANSI Z21.10.3/CSA 4.3 for heaters with input greater than 75,000 BTU per hour. Provide Energy Star labeled gas storage water heater. Provide data identifying Energy Star label for gas storage water heater.

2.10.1.2 Electric Type

Electric type water heaters must conform to UL 174 with dual heating elements. Each element must be 4.5 KW. The elements must be wired so that only one element can operate at a time.

2.10.2 Phenolic Resin Coatings for Heater Tubes

The phenolic resin coating system must be applied at either the coil or coating manufacturer's factory in accordance with manufacturer's standard proven production process. The coating system must be a product specifically intended for use on the material the water heating tubes/coils are made of and must be acceptable for use in potable water systems. The coating system must be capable of withstanding temperatures up to 400 degrees F dry bulb; and meet the requirements of 21 CFR 175.

The entire exterior surface of each coil must be coated with phenolic resin coating system.

2.10.2.1 Standard Product

Provide a phenolic resin coating system that is a standard product of a manufacturer regularly engaged in the manufacturing of products that are of a similar material, design, and workmanship.

Standard products are defined as components and equipment that have been in satisfactory commercial or industrial use in similar applications of similar size for at least 2 years before bid opening. Prior to this 2 year period, these standard products were sold on the commercial market using advertisements in manufacturers' catalogs or brochures. These manufacturers' catalogs, or brochures must have been copyrighted documents or be identified with a manufacturer's document number.

2.10.2.2 Expansion Tank

Provide an ASME potable water expansion tank of steel construction with a NSF/ANSI/CAN 61 Butyl diaphragm separating the air chamber from the water containing container. Tank must have a stainless steel inlet connector. Diaphragm must be FDA approved. Maximum operating temperature 200 degrees F, Maximum Working Pressure: 150 PSIG (10.3 bar).

2.11 PUMPS

2.11.1 Circulating Pumps

Domestic hot water circulating pumps must be electrically driven, single-stage, centrifugal, with mechanical seals, suitable for the intended service. Pump and motor must be supported by the piping on which it is installed. The shaft must be one-piece, heat-treated, corrosion-resisting steel with impeller and smooth-surfaced housing of bronze.

2.11.1.1 Circulating Pump Enclosure

Motor must be totally enclosed, fan-cooled and must have sufficient horsepower for the service required. Each pump motor must be equipped with an across-the-line magnetic controller in a NEMA 250, Type 1 enclosure with "START-STOP" switch in cover.

2.11.1.2 Circulating Pump Size and Efficiency

Integral size motors must be premium efficiency type in accordance with NEMA MG 1. Pump motors smaller than 1 hp Fractional horsepower pump motors must have integral thermal overload protection in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Guards must shield exposed moving parts.

2.11.2 Flexible Connectors

Flexible connectors must be provided at the suction and discharge of each pump that is 1 hp or larger. Connectors must be constructed of neoprene, rubber, or braided bronze, with Class 150 standard flanges. Flexible connectors must be line size and suitable for the pressure and temperature of the intended service.

2.11.3 Sewage Pumps

Provide single type duplex type with automatic controls to alternate the operation from one pump to the other pump and to start the second pump in the event the first pump cannot handle the incoming flow. Provide high water alarm and check valve.

2.12 DOMESTIC WATER SERVICE METER

The requirements for metering and submetering are specified in Section 33 11 00 WATER UTILITY DISTRIBUTION PIPING.

Cold water meters 2 inches and smaller must be positive displacement type conforming to AWWA C700. Cold water meters 2-1/2 inches and larger must be turbine type conforming to AWWA C701. Water meters must be positive displacement, type. Meter register may be round or straight reading type, as provided by the local utility. Meter must be provided with a pulse generator, remote readout register and all necessary wiring and accessories. Meters must be connected to the base wide energy and utility monitoring and control system (if this system exists) using the installation's advanced metering protocols.

2.13 ELECTRICAL WORK

Provide electrical motor driven equipment specified complete with motors, motor starters, and controls as specified herein and in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Provide internal wiring for components of packaged equipment as an integral part of the equipment. Provide high efficiency type, single-phase, fractional-horsepower alternating-current motors, including motors that are part of a system, corresponding to the applications in accordance with NEMA MG 11. Provide motors in accordance with NEMA MG 1 and of sufficient size to drive the load at the specified capacity without exceeding the nameplate rating of the motor.

2.13.1 Electrical Requirements for Motors

Motors must be rated for continuous duty with the enclosure specified. Motor duty requirements must allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motor torque must be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Motor bearings must be fitted with grease supply fittings and grease relief to outside of the enclosure.

2.13.2 Electrical Requirements for Controllers and Contactors

Controllers and contactors must have auxiliary contacts for use with the controls provided. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, must be provided. For packaged equipment, the manufacturer must provide controllers, including the required monitors and timed restart.

2.13.3 Electrical Requirements for Power Wiring

Power wiring and conduit for field installed equipment must be provided under and conform to the requirements of Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

2.14 MISCELLANEOUS PIPING ITEMS

2.14.1 Escutcheon Plates

Provide one piece or split hinge metal plates for piping entering floors, walls, and ceilings in exposed spaces. Provide chromium-plated on copper alloy plates or polished stainless steel finish in finished spaces. Provide paint finish on plates in unfinished spaces.

2.14.2 Pipe Sleeves

Provide where piping passes entirely through walls, ceilings, roofs, and floors. Sleeves are not required where supply drain, waste, and vent (DWV) piping passes through concrete floor slabs located on grade, except where penetrating a membrane waterproof floor.

2.14.2.1 Sleeves in Masonry and Concrete

Provide steel pipe sleeves or schedule 40 PVC plastic pipe sleeves. Sleeves are not required where drain, waste, and vent (DWV) piping passes through concrete floor slabs located on grade. Core drilling of masonry and concrete may be provided in lieu of pipe sleeves when cavities in the core-drilled hole are completely grouted smooth.

2.14.2.2 Sleeves Not in Masonry and Concrete

Provide 26 gage galvanized steel sheet or PVC plastic pipe sleeves.

2.14.3 Pipe Hangers (Supports)

Provide MSS SP-58 Type 1 with adjustable type steel support rods, except as specified or indicated otherwise. Attach to steel joists with Type 19 or 23 clamps and retaining straps. Attach to Steel W or S beams with Type 21, 28, 29, or 30 clamps. Attach to steel angles and vertical web steel channels with Type 20 clamp with beam clamp channel adapter. Attach to horizontal web steel channel and wood with drilled hole on centerline and double nut and washer. Attach to concrete with Type 18 insert or drilled expansion anchor. Provide Type 40 insulation protection shield for insulated piping.

2.14.4 Nameplates

Provide 0.125 inch thick melamine laminated plastic nameplates, black

matte finish with white center core, for equipment, gages, thermometers, and valves; valves in supplies to faucets will not require nameplates. Accurately align lettering and engrave minimum of 0.25 inch high normal block lettering into the white core. Minimum size of nameplates must be 1.0 by 2.5 inches. Key nameplates to a chart and schedule for each system. Frame charts and schedules under glass and place where directed near each system. Furnish two copies of each chart and schedule.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

Piping located in air plenums must conform to NFPA 90A requirements. Piping located in shafts that constitute air ducts or that enclose air ducts must be noncombustible in accordance with NFPA 90A. Installation of plastic pipe where in compliance with NFPA may be installed in accordance with PPFA Fire Man. The plumbing system must be installed complete with necessary fixtures, fittings, traps, valves, and accessories. Submit diagrams, instructions, and other sheets proposed for posting for Plumbing System. Submit for Plumbing System manufacturer's recommendations for the installation of bell and spigot and hubless joints for cast iron soil pipe. Water and drainage piping must be extended 5 feet outside the building, unless otherwise indicated. A full port ball valve and drain must be installed on the water service line inside the building approximately 6 inches above the floor from point of entry. Piping must be connected to the exterior service lines or capped or plugged if the exterior service is not in place. Sewer and water pipes must be laid in separate trenches, except when otherwise shown. Exterior underground utilities must be at least 12 inches below the average local frost depth or as indicated on the drawings. If trenches are closed or the pipes are otherwise covered before being connected to the service lines, the location of the end of each plumbing utility must be marked with a stake or other acceptable means. Valves must be installed with control no lower than the valve body. Avoid the use of combination double wye and one-eighth bend fittings in the horizontal orientation below grade or below slab.

3.1.1 Water Pipe, Fittings, and Connections

3.1.1.1 Utilities

The piping must be extended to fixtures, outlets, and equipment. The hot-water and cold-water piping system must be arranged and installed to permit draining. The supply line to each item of equipment or fixture, except faucets, flush valves, or other control valves which are supplied with integral stops, must be equipped with a shutoff valve to enable isolation of the item for repair and maintenance without interfering with operation of other equipment or fixtures. Supply piping to fixtures, faucets, hydrants, shower heads, and flushing devices must be anchored to prevent movement.

3.1.1.2 Cutting and Repairing

The work must be carefully laid out in advance, and unnecessary cutting of construction must be avoided. Damage to building, piping, wiring, or equipment as a result of cutting must be repaired by mechanics skilled in the trade involved.

3.1.1.3 Protection of Fixtures, Materials, and Equipment

Pipe openings must be closed with caps or plugs during installation. Fixtures and equipment must be tightly covered and protected against dirt, water, chemicals, and mechanical injury. Upon completion of the work, the fixtures, materials, and equipment must be thoroughly cleaned, adjusted, and operated. Safety guards must be provided for exposed rotating equipment.

3.1.1.4 Mains, Branches, and Runouts

Piping must be installed as indicated. Pipe must be accurately cut and worked into place without springing or forcing. Structural portions of the building must not be weakened. Aboveground piping must run parallel with the lines of the building, unless otherwise indicated. Branch pipes from service lines may be taken from top, bottom, or side of main, using crossover fittings required by structural or installation conditions. Supply pipes, valves, and fittings must be kept a sufficient distance from other work and other services to permit not less than 1/2 inch between finished covering on the different services. Bare and insulated water lines must not bear directly against building structural elements so as to transmit sound to the structure or to prevent flexible movement of the lines. Water pipe must not be buried in or under floors unless specifically indicated or approved. Buried domestic waste vent piping must not be less than 2 inch diameter. Changes in pipe sizes must be made with reducing fittings. Use of bushings will not be permitted except for use in situations in which standard factory fabricated components are furnished to accommodate specific accepted installation practice. Change in direction must be made with fittings, except that bending of pipe 4 inches and smaller will be permitted, provided a pipe bender is used and wide sweep bends are formed. The center-line radius of bends must be not less than six diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be acceptable.

3.1.1.5 Pipe Drains

Pipe drains indicated must consist of 3/4 inch hose bibb with renewable seat and full port ball valve ahead of hose bibb. At other low points, 3/4 inch brass plugs or caps must be provided. Disconnection of the supply piping at the fixture is an acceptable drain.

3.1.1.6 Expansion and Contraction of Piping

Allowance must be made throughout for expansion and contraction of water pipe. Each hot-water and hot-water circulation riser must have expansion loops or other provisions such as offsets and changes in direction where indicated and required. Risers must be securely anchored as required or where indicated to force expansion to loops. Branch connections from risers must be made with ample swing or offset to avoid undue strain on fittings or short pipe lengths. Horizontal runs of pipe over 50 feet in length must be anchored to the wall or the supporting construction about midway on the run to force expansion, evenly divided, toward the ends. Sufficient flexibility must be provided on branch runouts from mains and risers to provide for expansion and contraction of piping. Flexibility must be provided by installing one or more turns in the line so that piping will spring enough to allow for expansion without straining. If mechanical grooved pipe coupling systems are provided, the deviation from design requirements for expansion and contraction may be allowed pending approval of Contracting Officer.

3.1.1.7 Thrust Restraint

Plugs, caps, tees, valves and bends deflecting 11.25 degrees or more, either vertically or horizontally, in waterlines 4 inches in diameter or larger must be provided with thrust blocks, where indicated, to prevent movement. Thrust blocking must be concrete of a mix not leaner than: 1 cement, 2-1/2 sand, 5 gravel; and having a compressive strength of not less than 2000 psi after 28 days. Blocking must be placed between solid ground and the fitting to be anchored. Unless otherwise indicated or directed on drawings, the base and thrust bearing sides of the thrust block must be poured against undisturbed earth. The side of the thrust block not subject to thrust must be poured against forms. The area of bearing will be as indicated on drawings. Blocking must be placed so that the joints of the fitting are accessible for repair. Steel rods and clamps, protected by galvanizing or by coating with bituminous paint, must be used to anchor vertical down bends into gravity thrust blocks.

3.1.1.8 Commercial-Type Water Hammer Arresters

Commercial-type water hammer arresters must be provided on hot- and cold-water supplies and must be located as generally indicated, with precise location and sizing to be in accordance with PDI WH 201. Water hammer arresters, where concealed, must be accessible by means of access doors or removable panels. Commercial-type water hammer arresters must conform to ASSE 1010. Vertical capped pipe columns will not be permitted.

3.1.2 Compressed Air Piping (Non-Oil Free)

Compressed air piping must have supply lines and discharge terminals legibly and permanently marked at both ends with the name of the system and the direction of flow.

3.1.3 Joints

Installation of pipe and fittings must be made in accordance with the manufacturer's recommendations. Mitering of joints for elbows and notching of straight runs of pipe for tees will not be permitted. Joints must be made up with fittings of compatible material and made for the specific purpose intended.

3.1.3.1 Threaded

Threaded joints must have American Standard taper pipe threads conforming to ASME B1.20.1. Only male pipe threads must be coated with graphite or with an approved graphite compound, or with an inert filler and oil, or must have a polytetrafluoroethylene tape applied.

3.1.3.2 Unions and Flanges

Unions, flanges and mechanical couplings must not be concealed in walls, ceilings, or partitions. Unions must be used on pipe sizes 2-1/2 inches and smaller; flanges must be used on pipe sizes 3 inches and larger.

3.1.3.3 Copper Tube and Pipe

a. Brazed. Brazed joints must be made in conformance with AWS B2.2/B2.2M, ASME B16.50, and CDA A4015 with flux and are acceptable for all pipe sizes. Copper to copper joints must include the use of

copper-phosphorus or copper-phosphorus-silver brazing metal without flux. Brazing of dissimilar metals (copper to bronze or brass) must include the use of flux with either a copper-phosphorus, copper-phosphorus-silver or a silver brazing filler metal.

b. Soldered. Soldered joints must be made with flux and are only acceptable for piping 2 inches and smaller. Soldered joints must conform to ASME B31.5 and CDA A4015. Soldered joints must not be used in compressed air piping between the air compressor and the receiver.

c. Copper Tube Extracted Joint. Mechanically extracted joints must be made in accordance with ICC IPC.

3.1.3.4 Plastic Pipe

Acrylonitrile-Butadiene-Styrene (ABS) pipe must have joints made with solvent cement. PVC and CPVC pipe must have joints made with solvent cement elastomeric, threading, (threading of Schedule 80 Pipe is allowed only where required for disconnection and inspection; threading of Schedule 40 Pipe is not allowed), or mated flanged.

3.1.4 Dissimilar Pipe Materials

Connections between ferrous and non-ferrous copper water pipe must be made with dielectric unions or flange waterways. Dielectric waterways must have temperature and pressure rating equal to or greater than that specified for the connecting piping. Waterways must have metal connections on both ends suited to match connecting piping. Dielectric waterways must be internally lined with an insulator specifically designed to prevent current flow between dissimilar metals. Dielectric flanges must meet the performance requirements described herein for dielectric waterways. Connecting joints between plastic and metallic pipe must be made with transition fitting for the specific purpose.

3.1.5 Pipe Sleeves and Flashing

Pipe sleeves must be furnished and set in their proper and permanent location.

3.1.5.1 Sleeve Requirements

Unless indicated otherwise, provide pipe sleeves meeting the following requirements:

a. Secure sleeves in position and location during construction. Provide sleeves of sufficient length to pass through entire thickness of walls, ceilings, roofs, and floors.

b. A modular mechanical type sealing assembly may be installed in lieu of a waterproofing clamping flange and caulking and sealing of annular space between pipe and sleeve. The seals must consist of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe and sleeve using galvanized steel bolts, nuts, and pressure plates. The links must be loosely assembled with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut. After the seal assembly is properly positioned in the sleeve, tightening of the bolt must cause the rubber sealing elements to expand and provide a watertight seal between the pipe and the sleeve. Each seal assembly must be sized as

recommended by the manufacturer to fit the pipe and sleeve involved.

c. Sleeves must not be installed in structural members, except where indicated or approved. Rectangular and square openings must be as detailed. Each sleeve must extend through its respective floor, or roof, and must be cut flush with each surface, except for special circumstances. Pipe sleeves passing through floors in wet areas such as mechanical equipment rooms, lavatories, kitchens, and other plumbing fixture areas must extend a minimum of 4 inches above the finished floor.

d. Unless otherwise indicated, sleeves must be of a size to provide a minimum of 1/4 inch clearance between bare pipe or insulation and inside of sleeve or between insulation and inside of sleeve. Sleeves in bearing walls and concrete slab on grade floors must be steel pipe or cast-iron pipe. Sleeves in nonbearing walls or ceilings may be steel pipe, cast-iron pipe, galvanized sheet metal with lock-type longitudinal seam, or plastic.

e. Except as otherwise specified, the annular space between pipe and sleeve, or between jacket over insulation and sleeve, must be sealed as indicated with sealants conforming to ASTM C920 and with a primer, backstop material and surface preparation as specified in Section 07 92 00 JOINT SEALANTS. The annular space between pipe and sleeve, between bare insulation and sleeve or between jacket over insulation and sleeve must not be sealed for interior walls which are not designated as fire rated.

f. Sleeves through below-grade walls in contact with earth must be recessed 1/2 inch from wall surfaces on both sides. Annular space between pipe and sleeve must be filled with backing material and sealants in the joint between the pipe and masonry wall as specified above. Sealant selected for the earth side of the wall must be compatible with dampproofing/waterproofing materials that are to be applied over the joint sealant. Pipe sleeves in fire-rated walls must conform to the requirements in Section 07 84 00 FIRESTOPPING.

3.1.5.2 Flashing Requirements

Pipes passing through roof must be installed through a 16 ounce copper flashing, each within an integral skirt or flange. Flashing must be suitably formed, and the skirt or flange must extend not less than 8 inches from the pipe and must be set over the roof or floor membrane in a solid coating of bituminous cement. The flashing must extend up the pipe a minimum of 10 inches. For cleanouts, the flashing must be turned down into the hub and caulked after placing the ferrule. Pipes passing through pitched roofs must be flashed, using lead or copper flashing, with an adjustable integral flange of adequate size to extend not less than 8 inches from the pipe in all directions and lapped into the roofing to provide a watertight seal. The annular space between the flashing and the bare pipe or between the flashing and the metal-jacket-covered insulation must be sealed as indicated. Flashing for dry vents must be turned down into the pipe to form a waterproof joint. Pipes, up to and including 10 inches in diameter, passing through roof or floor waterproofing membrane may be installed through a cast-iron sleeve with caulking recess, anchor lugs, flashing-clamp device, and pressure ring with brass bolts. Flashing shield must be fitted into the sleeve clamping device. Pipes passing through wall waterproofing membrane must be sleeved as described above. A waterproofing clamping flange must be installed.

3.1.5.3 Waterproofing

Waterproofing at floor-mounted water closets must be accomplished by forming a flashing guard from soft-tempered sheet copper. The center of the sheet must be perforated and turned down approximately 1-1/2 inches to fit between the outside diameter of the drainpipe and the inside diameter of the cast-iron or steel pipe sleeve. The turned-down portion of the flashing guard must be embedded in sealant to a depth of approximately 1-1/2 inches; then the sealant must be finished off flush to floor level between the flashing guard and drainpipe. The flashing guard of sheet copper must extend not less than 8 inches from the drainpipe and must be lapped between the floor membrane in a solid coating of bituminous cement. If cast-iron water closet floor flanges are used, the space between the pipe sleeve and drainpipe must be sealed with sealant and the flashing guard must be upturned approximately 1-1/2 inches to fit the outside diameter of the drainpipe and the inside diameter of the water closet floor flange. The upturned portion of the sheet fitted into the floor flange must be sealed.

3.1.5.4 Optional Counterflashing

Instead of turning the flashing down into a dry vent pipe, or caulking and sealing the annular space between the pipe and flashing or metal-jacket-covered insulation and flashing, counterflashing may be accomplished by utilizing the following:

a. A standard roof coupling for threaded pipe up to 6 inches in diameter.

b. A tack-welded or banded-metal rain shield around the pipe.

3.1.5.5 Pipe Penetrations of Slab on Grade Floors

Where pipes, fixture drains, floor drains, cleanouts or similar items penetrate slab on grade floors, except at penetrations of floors with waterproofing membrane as specified in paragraphs FLASHING REQUIREMENTS and WATERPROOFING, a groove 1/4 to 1/2 inch wide by 1/4 to 3/8 inch deep must be formed around the pipe, fitting or drain. The groove must be filled with a sealant as specified in Section 07 92 00 JOINT SEALANTS.

3.1.5.6 Pipe Penetrations

Provide sealants for all pipe penetrations. All pipe penetrations must be sealed to prevent infiltration of air, insects, and vermin.

3.1.6 Fire Seal

Where pipes pass through fire walls, fire-partitions, fire-rated pipe chase walls or floors above grade, a fire seal must be provided as specified in Section 07 84 00 FIRESTOPPING.

3.1.7 Supports

3.1.7.1 General

Hangers used to support piping 2 inches and larger must be fabricated to permit adequate adjustment after erection while still supporting the load. Pipe guides and anchors must be installed to keep pipes in accurate alignment, to direct the expansion movement, and to prevent buckling,

swaying, and undue strain. Piping subjected to vertical movement when operating temperatures exceed ambient temperatures must be supported by variable spring hangers and supports or by constant support hangers. In the support of multiple pipe runs on a common base member, a clip or clamp must be used where each pipe crosses the base support member. Spacing of the base support members must not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run. Threaded sections of rods must not be formed or bent.

3.1.7.2 Pipe Hangers, Inserts, and Supports

Installation of pipe hangers, inserts and supports must conform to MSS SP-58 except as modified herein.

a. Types 5, 12, and 26 must not be used.

b. Type 3 must not be used on insulated pipe.

c. Type 18 inserts must be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustment may be used if they otherwise meet the requirements for type 18 inserts.

d. Type 19 and 23 C-clamps must be torqued per MSS SP-58 and must have both locknuts and retaining devices furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

e. Type 20 attachments used on angles and channels must be furnished with an added malleable-iron heel plate or adapter.

f. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

g. Type 39 saddles must be used on insulated pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Type 39 saddles must be welded to the pipe.

h. Type 40 shields must:

(1) Be used on insulated pipe less than 4 inches.

(2) Be used on insulated pipe 4 inches and larger when the temperature of the medium is 60 degrees F or less.

(3) Have a high density insert for all pipe sizes. High density inserts must have a density of 8 pcf or greater.

i. Horizontal pipe supports must be spaced as specified in MSS SP-58 and a support must be installed not over 1 foot from the pipe fitting joint at each change in direction of the piping. Pipe supports must be spaced not over 5 feet apart at valves. Operating temperatures in determining hanger spacing for PVC or CPVC pipe must be 120 degrees F for PVC and 180 degrees F for CPVC. Horizontal pipe runs must include allowances for expansion and contraction.

j. Vertical pipe must be supported at each floor, except at slab-on-grade, at intervals of not more than 15 feet nor more than 8 feet from end of risers, and at vent terminations. Vertical pipe risers must include allowances for expansion and contraction.

k. Type 35 guides using steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides must be provided to allow longitudinal pipe movement. Slide materials must be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered. Lateral restraints must be provided as needed. Where steel slides do not require provisions for lateral restraint the following may be used:

(1) On pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher, a Type 39 saddle, welded to the pipe, may freely rest on a steel plate.

(2) On pipe less than 4 inches a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

(3) On pipe 4 inches and larger carrying medium less that 60 degrees F a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

l. Pipe hangers on horizontal insulated pipe must be the size of the outside diameter of the insulation. The insulation must be continuous through the hanger on all pipe sizes and applications.

m. Where there are high system temperatures and welding to piping is not desirable, the type 35 guide must include a pipe cradle, welded to the guide structure and strapped securely to the pipe. The pipe must be separated from the slide material by at least 4 inches or by an amount adequate for the insulation, whichever is greater.

n. Hangers and supports for plastic pipe must not compress, distort, cut or abrade the piping, and must allow free movement of pipe except where otherwise required in the control of expansion/contraction.

3.1.7.3 Structural Attachments

Attachment to building structure concrete and masonry must be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors must be applied with a safety factor not less than 5. Supports must not be attached to metal decking. Supports must not be attached to the underside of concrete filled floor or concrete roof decks unless approved by the Contracting Officer. Masonry anchors for overhead applications must be constructed of ferrous materials only.

3.1.8 Welded Installation

Plumbing pipe weldments must be as indicated. Changes in direction of piping must be made with welding fittings only; mitering or notching pipe to form elbows and tees or other similar type construction will not be permitted. Branch connection may be made with either welding tees or forged branch outlet fittings. Branch outlet fittings must be forged, flared for improvement of flow where attached to the run, and reinforced against external strains. Beveling, alignment, heat treatment, and inspection of weld must conform to ASME B31.1. Weld defects must be removed and repairs made to the weld, or the weld joints must be entirely removed and rewelded. After filler metal has been removed from its original package, it must be protected or stored so that its characteristics or welding properties are not affected. Electrodes that have been wetted or that have lost any of their coating must not be used.

3.1.9 Pipe Cleanouts

Pipe cleanouts must be the same size as the pipe except that cleanout plugs larger than 4 inches will not be required. A cleanout installed in connection with cast-iron soil pipe must consist of a long-sweep 1/4 bend or one or two 1/8 bends extended to the place shown. An extra-heavy cast-brass or cast-iron ferrule with countersunk cast-brass head screw plug must be caulked into the hub of the fitting and must be flush with the floor. Cleanouts in connection with other pipe, where indicated, must be T-pattern, 90-degree branch drainage fittings with cast-brass screw plugs, except plastic plugs must be installed in plastic pipe. Plugs must be the same size as the pipe up to and including 4 inches. Cleanout tee branches with screw plug must be installed at the foot of soil and waste stacks, at the foot of interior downspouts, on each connection to building storm drain where interior downspouts are indicated, and on each building drain outside the building. Cleanout tee branches may be omitted on stacks in single story buildings with slab-on-grade construction or where less than 18 inches of crawl space is provided under the floor. Cleanouts on pipe concealed in partitions must be provided with chromium plated bronze, nickel bronze, nickel brass or stainless steel flush type access cover plates. Round access covers must be provided and secured to plugs with securing screw. Square access covers may be provided with matching frames, anchoring lugs and cover screws. Cleanouts in finished walls must have access covers and frames installed flush with the finished wall. Cleanouts installed in finished floors subject to foot traffic must be provided with a chrome-plated cast brass, nickel brass, or nickel bronze cover secured to the plug or cover frame and set flush with the finished floor. Heads of fastening screws must not project above the cover surface. Where cleanouts are provided with adjustable heads, the heads must be plastic.

3.2 WATER HEATERS AND HOT WATER STORAGE TANKS

3.2.1 Relief Valves

No valves must be installed between a relief valve and its water heater or storage tank. The P&T relief valve must be installed where the valve actuator comes in contact with the hottest water in the heater. Whenever possible, the relief valve must be installed directly in a tapping in the tank or heater; otherwise, the P&T valve must be installed in the hot-water outlet piping. A vacuum relief valve must be provided on the cold water supply line to the hot-water storage tank or water heater and mounted above and within 6 inches above the top of the tank or water heater.

3.2.2 Installation of Gas-Fired Water Heater

Installation must conform to NFPA 54 for gas fired and NFPA 31 for oil fired. Storage water heaters that are not equipped with integral heat traps and having vertical pipe risers must be installed with heat traps directly on both the inlet and outlet. Circulating systems need not have heat traps installed. An acceptable heat trap may be a piping arrangement such as elbows connected so that the inlet and outlet piping make vertically upward runs of not less than 24 inches just before turning downward or directly horizontal into the water heater's inlet and outlet fittings. Commercially available heat traps, specifically designed by the manufacturer for the purpose of effectively restricting the natural tendency of hot water to rise through vertical inlet and outlet piping during standby periods may also be approved.

3.2.3 Heat Traps

Piping to and from each water heater and hot water storage tank must be routed horizontally and downward a minimum of 24 inches before turning in an upward direction.

3.2.4 Connections to Water Heaters

Connections of metallic pipe to water heaters must be made with dielectric unions or flanges. Use of dielectric nipples is prohibited unless internally lined and specifically designed to limit current flow between dissimilar metals.

3.2.5 Expansion Tank

A pre-charged expansion tank must be installed on the cold water supply between the water heater inlet and the cold water supply shut-off valve. The Contractor must adjust the expansion tank air pressure, as recommended by the tank manufacturer, to match incoming water pressure.

3.3 FIXTURES AND FIXTURE TRIMMINGS

Polished chromium-plated pipe, valves, and fittings must be provided where exposed to view. Angle stops, straight stops, stops integral with the faucets, or concealed type of lock-shield, and loose-key pattern stops for supplies with threaded, sweat or solvent weld inlets must be furnished and installed with fixtures. Where connections between copper tubing and faucets are made by rubber compression fittings, a beading tool must be used to mechanically deform the tubing above the compression fitting. Exposed traps and supply pipes for fixtures and equipment must be connected to the rough piping systems at the wall, unless otherwise specified under the item. Floor and wall escutcheons must be as specified. Drain lines and hot water lines of fixtures for handicapped personnel must be insulated and do not require polished chrome finish. Plumbing fixtures and accessories must be installed within the space shown.

3.3.1 Fixture Connections

Where space limitations prohibit standard fittings in conjunction with the cast-iron floor flange, special short-radius fittings must be provided. Connections between earthenware fixtures and flanges on soil pipe must be made gastight and watertight with a closet-setting compound or neoprene gasket and seal. Use of natural rubber gaskets or putty will not be permitted. Fixtures with outlet flanges must be set the proper distance from floor or wall to make a first-class joint with the closet-setting compound or gasket and fixture used.

3.3.2 Flushometer Valves

Flushometer valves must be secured to prevent movement by anchoring the long finished top spud connecting tube to wall adjacent to valve with approved metal bracket. Flushometer valves for water closets must be installed 39 inches above the floor, except at water closets intended for use by the physically handicapped where flushometer valves must be mounted at approximately 30 inches above the floor and arranged to avoid interference with grab bars. In addition, for water closets intended for handicap use, the flush valve handle must be installed on the wide side of the enclosure. Bumpers for water closet seats must be installed on the

flushometer stop.

3.3.3 Height of Fixture Rims Above Floor

Lavatories must be mounted with rim 31 inches above finished floor. Wall-hung drinking fountains and water coolers must be installed with rim 42 inches above floor. Wall-hung service sinks must be mounted with rim 28 inches above the floor. Installation of fixtures for use by the physically handicapped must be in accordance with ICC A117.1.

3.3.4 Shower Bath Outfits

The area around the water supply piping to the mixing valves and behind the escutcheon plate must be made watertight by caulking or gasketing.

3.3.5 Fixture Supports

Fixture supports for off-the-floor lavatories, urinals, water closets, and other fixtures of similar size, design, and use, must be of the chair-carrier type. The carrier must provide the necessary means of mounting the fixture, with a foot or feet to anchor the assembly to the floor slab. Adjustability must be provided to locate the fixture at the desired height and in proper relation to the wall. Support plates, in lieu of chair carrier, must be fastened to the wall structure only where it is not possible to anchor a floor-mounted chair carrier to the floor slab.

3.3.5.1 Support for Solid Masonry Construction

Chair carrier must be anchored to the floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate must be imbedded in the masonry wall.

3.3.5.2 Support for Concrete-Masonry Wall Construction

Chair carrier must be anchored to floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate must be fastened to the concrete wall using through bolts and a back-up plate.

3.3.5.3 Support for Steel Stud Frame Partitions

Chair carrier must be used. The anchor feet and tubular uprights must be of the heavy duty design; and feet (bases) must be steel and welded to a square or rectangular steel tube upright. Wall plates, in lieu of floor-anchored chair carriers, must be used only if adjoining steel partition studs are suitably reinforced to support a wall plate bolted to these studs.

3.3.6 Backflow Prevention Devices

Plumbing fixtures, equipment, and pipe connections must not cross connect or interconnect between a potable water supply and any source of nonpotable water. Backflow preventers must be installed where indicated and in accordance with ICC IPC at all other locations necessary to preclude a cross-connect or interconnect between a potable water supply and any nonpotable substance. In addition backflow preventers must be installed at all locations where the potable water outlet is below the flood level of the equipment, or where the potable water outlet will be located below the level of the nonpotable substance. Backflow preventers

must be located so that no part of the device will be submerged. Backflow preventers must be of sufficient size to allow unrestricted flow of water to the equipment, and preclude the backflow of any nonpotable substance into the potable water system. Bypass piping must not be provided around backflow preventers. Access must be provided for maintenance and testing. Each device must be a standard commercial unit.

3.3.7 Access Panels

Access panels must be provided for concealed valves and controls, or any item requiring inspection or maintenance. Access panels must be of sufficient size and located so that the concealed items may be serviced, maintained, or replaced.

3.3.8 Sight Drains

Sight drains must be installed so that the indirect waste will terminate 2 inches above the flood rim of the funnel to provide an acceptable air gap.

3.3.9 Traps

Each trap must be placed as near the fixture as possible, and no fixture must be double-trapped. Traps installed on cast-iron soil pipe must be cast iron. Traps installed on steel pipe or copper tubing must be recess-drainage pattern, or brass-tube type. Traps installed on plastic pipe may be plastic conforming to ASTM D3311. Traps for acid-resisting waste must be of the same material as the pipe.

3.3.10 Shower Pans

Before installing shower pan, subfloor must be free of projections such as nail heads or rough edges of aggregate. Drain must be a bolt-down, clamping-ring type with weepholes, installed so the lip of the subdrain is flush with subfloor.

3.3.10.1 General

The floor of each individual shower, the shower-area portion of combination shower and drying room, and the entire shower and drying room where the two are not separated by curb or partition, must be made watertight with a shower pan fabricated in place. The shower pan material must be cut to size and shape of the area indicated, in one piece to the maximum extent practicable, allowing a minimum of 6 inches for turnup on walls or partitions, and must be folded over the curb with an approximate return of 1/4 of curb height. The upstands must be placed behind any wall or partition finish. Subflooring must be smooth and clean, with nailheads driven flush with surface, and must be sloped to drain. Shower pans must be clamped to drains with the drain clamping ring.

3.3.10.2 Nonplasticized Polyvinyl Chloride (PVC) Shower Pans

Nonplasticized PVC must be turned up behind walls or wall surfaces a distance of not less than 6 inches in room areas and 3 inches above curb level in curbed spaces with sufficient material to fold over and fasten to outside face of curb. Corners must be pig-ear type and folded between pan and studs. Only top 1 inch of upstand must be nailed to hold in place. Nails must be galvanized large-head roofing type. Approved duct tape must be used on metal framing or studs to secure pig-ear fold and membrane. Where no backing is provided between studs, the membrane slack must be

taken up by pleating and stapling or nailing to studding at top inch of upstand. To adhere the membrane to vertical surfaces, the back of the membrane and the surface to which it is to be applied must be coated with adhesive that becomes dry to the touch in 5 to 10 minutes, after which the membrane must be pressed into place. Trim for drain must be exactly the size of drain opening. Bolt holes must be pierced to accommodate bolts with a tight fit. Adhesive must be used between pan and subdrain. Clamping ring must be bolted firmly. A small amount of gravel or porous materials must be placed at weepholes so that holes remain clear when setting bed is poured. Membrane must be solvent welded with PVC solvent cement. Surfaces to be solvent welded must be clean (free of grease and grime). Sheets must be laid on a flat surface with an overlap of about 2 inches. Top edge must be folded back and surface primed with a PVC primer. PVC cement must be applied and surfaces immediately placed together, while still wet. Joint must be lightly rolled with a paint roller, then as the joint sets must be rolled firmly but not so hard as to distort the material. In long lengths, about 2 or 3 feet at a time must be welded. On wood subflooring, two layers of 15 pound felt must be installed prior to installation of shower pan to ensure a smooth surface installation.

3.4 VIBRATION-ABSORBING FEATURES

Mechanical equipment, including pumps, must be isolated from the building structure by approved vibration-absorbing features, unless otherwise shown. Submit details of vibration-absorbing features, including arrangement, foundation plan, dimensions and specifications. Each foundation must include an adequate number of standard isolation units. Each unit must consist of machine and floor or foundation fastening, together with intermediate isolation material, and must be a standard product with printed load rating. Piping connected to mechanical equipment must be provided with flexible connectors.

3.5 WATER METER REMOTE READOUT REGISTER

The remote readout register must be mounted at the location indicated or as directed by the Contracting Officer.

3.6 IDENTIFICATION SYSTEMS

3.6.1 Identification Tags

Identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and valve number must be installed on valves, except those valves installed on supplies at plumbing fixtures. Tags must be 1-3/8 inch minimum diameter, and marking must be stamped or engraved. Indentations must be black, for reading clarity. Tags must be attached to valves with No. 12 AWG, copper wire, chrome-plated beaded chain, or plastic straps designed for that purpose.

3.6.2 Pipe Color Code Marking

Color code marking of piping must be as specified in Section 09 90 00 PAINTS AND COATINGS.

3.6.3 Color Coding Scheme for Locating Hidden Utility Components

Scheme must be provided in buildings having suspended grid ceilings. The color coding scheme must identify points of access for maintenance and

operation of operable components which are not visible from the finished space and installed in the space directly above the suspended grid ceiling. The operable components must include valves, dampers, switches, linkages and thermostats. The color coding scheme must consist of a color code board and colored metal disks. Each colored metal disk must be approximately 3/8 inch in diameter and secured to removable ceiling panels with fasteners. The fasteners must be inserted into the ceiling panels so that the fasteners will be concealed from view. The fasteners must be manually removable without tools and must not separate from the ceiling panels when panels are dropped from ceiling height. Installation of colored metal disks must follow completion of the finished surface on which the disks are to be fastened. The color code board must have the approximate dimensions of 3 foot width, 30 inches height, and 1/2 inch thickness. The board must be made of wood fiberboard and framed under glass or 1/16 inch transparent plastic cover. Unless otherwise directed, the color code symbols must be approximately 3/4 inch in diameter and the related lettering in 1/2 inch high capital letters. The color code board must be mounted and located in the mechanical or equipment room. The color code system must be as indicated below:

Color	System	Item	Location

3.7 ESCUTCHEONS

Escutcheons must be provided at finished surfaces where bare or insulated piping, exposed to view, passes through floors, walls, or ceilings, except in boiler, utility, or equipment rooms. Escutcheons must be fastened securely to pipe or pipe covering and must be satin-finish, corrosion-resisting steel, polished chromium-plated zinc alloy, or polished chromium-plated copper alloy. Escutcheons must be either one-piece or split-pattern, held in place by internal spring tension or setscrew.

3.8 PAINTING

Painting of pipes, hangers, supports, and other iron work, either in concealed spaces or exposed spaces, is specified in Section 09 90 00 PAINTS AND COATINGS.

3.8.1 Painting of New Equipment

New equipment painting must be factory applied or shop applied, and must be as specified herein, and provided under each individual section.

3.8.1.1 Factory Painting Systems

Manufacturer's standard factory painting systems may be provided subject to certification that the factory painting system applied will withstand 125 hours in a salt-spray fog test, except that equipment located outdoors must withstand 500 hours in a salt-spray fog test. Salt-spray fog test must be in accordance with ASTM B117, and for that test the acceptance criteria must be as follows: immediately after completion of the test, the paint must show no signs of blistering, wrinkling, or cracking, and no loss of adhesion; and the specimen must show no signs of rust creepage beyond 0.125 inch on either side of the scratch mark.

The film thickness of the factory painting system applied on the equipment

must not be less than the film thickness used on the test specimen. If manufacturer's standard factory painting system is being proposed for use on surfaces subject to temperatures above 120 degrees F, the factory painting system must be designed for the temperature service.

3.8.1.2 Shop Painting Systems for Metal Surfaces

Clean, pretreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except metal surfaces subject to temperatures in excess of 120 degrees F must be cleaned to bare metal.

Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Color of finish coat must be aluminum or light gray.

a. Temperatures Less Than 120 Degrees F: Immediately after cleaning, the metal surfaces subject to temperatures less than 120 degrees F must receive one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of one mil; and two coats of enamel applied to a minimum dry film thickness of one mil per coat.

b. Temperatures Between 120 and 400 Degrees F: Metal surfaces subject to temperatures between 120 and 400 degrees F must receive two coats of 400 degrees F heat-resisting enamel applied to a total minimum thickness of 2 mils.

c. Temperatures Greater Than 400 Degrees F: Metal surfaces subject to temperatures greater than 400 degrees F must receive two coats of 600 degrees F heat-resisting paint applied to a total minimum dry film thickness of 2 mils.

3.9 TESTS, FLUSHING AND DISINFECTION

Submit test reports in booklet form showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, completion and testing of the installed system. Each test report must indicate the final position of controls.

3.9.1 Plumbing System

The following tests must be performed on the plumbing system in accordance with ICC IPC, except that the drainage and vent system final test must include the smoke test. The Contractor has the option to perform a peppermint test in lieu of the smoke test. If a peppermint test is chosen, the Contractor must submit a testing procedure and reasons for choosing this option in lieu of the smoke test to the Contracting Officer for approval.

a. Drainage and Vent Systems Test. The final test must include a smoke test.

b. Building Sewers Tests.

c. Water Supply Systems Tests.

3.9.1.1 Test of Backflow Prevention Assemblies

Certification of proper operation must be submitted and must be as accomplished in accordance with state regulations by an individual certified by the state to perform such tests. If no state requirement exists, the Contractor must have the manufacturer's representative test the device to ensure the unit is properly installed and performing as intended. The Contractor must provide written documentation of the tests performed and signed by the individual performing the tests. Backflow prevention assembly must be tested using gauges specifically designed for the testing of backflow prevention assemblies.

Backflow prevention assembly test gauges must be tested annually for accuracy in accordance with the requirements of State or local regulatory agencies. If there is no State or local regulatory agency requirements, gauges must be tested annually for accuracy in accordance with the requirements of University of Southern California's Foundation of Cross Connection Control and Hydraulic Research or the American Water Works Association Manual of Cross Connection (Manual M-14), or any other approved testing laboratory having equivalent capabilities for both laboratory and field evaluation of backflow prevention assembly test gauges. Report form for each assembly must include, as a minimum, the following:

Data on Device	Data on Testing Firm
Type of Assembly	Name
Manufacturer	Address
Model Number	Certified Tester
Serial Number	Certified Tester No.
Size	Date of Test
Location	
Test Pressure Readings	Serial Number and Test Data of Gauges

If the unit fails to meet specified requirements, the unit must be repaired and retested.

3.9.1.2 Shower Pans

After installation of the pan and finished floor, the drain must be temporarily plugged below the weep holes. The floor area must be flooded with water to a minimum depth of 1 inch for a period of 24 hours. Any drop in the water level during test, except for evaporation, will be reason for rejection, repair, and retest.

3.9.1.3 Compressed Air Piping (Nonoil-Free)

Piping systems must be filled with oil-free dry air or gaseous nitrogen to 150 psig and hold this pressure for 2 hours with no drop in pressure.

3.9.2 Defective Work

If inspection or test shows defects, such defective work or material must be replaced or repaired as necessary and inspection and tests must be repeated. Repairs to piping must be made with new materials. Caulking of screwed joints or holes will not be acceptable.

3.9.3 System Flushing

3.9.3.1 During Flushing

Before operational tests or disinfection, potable water piping system must be flushed with potable water. Sufficient water must be used to produce a water velocity that is capable of entraining and removing debris in all portions of the piping system. This requires simultaneous operation of all fixtures on a common branch or main in order to produce a flushing velocity of approximately 4 fps through all portions of the piping system. In the event that this is impossible due to size of system, the Contracting Officer (or the designated representative) must specify the number of fixtures to be operated during flushing. Contractor must provide adequate personnel to monitor the flushing operation and to ensure that drain lines are unobstructed in order to prevent flooding of the facility. Contractor must be responsible for any flood damage resulting from flushing of the system. Flushing must be continued until entrained dirt and other foreign materials have been removed and until discharge water shows no discoloration. All faucets and drinking water fountains, to include any device considered as an end point device by NSF/ANSI/CAN 61, Section 9, must be flushed a minimum of 0.25 gallons per 24 hour period, ten times over a 14 day period.

3.9.3.2 After Flushing

System must be drained at low points. Strainer screens must be removed, cleaned, and replaced. After flushing and cleaning, systems must be prepared for testing by immediately filling water piping with clean, fresh potable water. Any stoppage, discoloration, or other damage to the finish, furnishings, or parts of the building due to the Contractor's failure to properly clean the piping system must be repaired by the Contractor. When the system flushing is complete, the hot-water system must be adjusted for uniform circulation. Flushing devices and automatic control systems must be adjusted for proper operation according to manufacturer's instructions. Flow rates on fixtures must not exceed those stated in PART 2 of this Section. Unless more stringent local requirements exist, lead levels must not exceed limits established by 40 CFR 141.80 (c)(1). The water supply to the building must be tested separately to ensure that any lead contamination found during potable water system testing is due to work being performed inside the building.

3.9.4 Operational Test

Upon completion of flushing and prior to disinfection procedures, the Contractor must subject the plumbing system to operating tests to demonstrate satisfactory installation, connections, adjustments, and functional and operational efficiency. Such operating tests must cover a period of not less than 8 hours for each system and must include the following information in a report with conclusion as to the adequacy of the system:

a. Time, date, and duration of test.

b. Water pressures at the most remote and the highest fixtures.

c. Operation of each fixture and fixture trim.

d. Operation of each valve, hydrant, and faucet.

e. Pump suction and discharge pressures.

f. Temperature of each domestic hot-water supply.

g. Operation of each floor and roof drain by flooding with water.

h. Operation of each vacuum breaker and backflow preventer.

i. Complete operation of each water pressure booster system, including pump start pressure and stop pressure.

j. Compressed air readings at each compressor and at each outlet. Each indicating instrument must be read at 1/2 hour intervals. The report of the test must be submitted in quadruplicate. The Contractor must furnish instruments, equipment, and personnel required for the tests; the Government will furnish the necessary water and electricity.

3.9.5 Disinfection

After all system components are provided and operational tests are complete, the entire domestic hot- and cold-water distribution system must be disinfected. Before introducing disinfecting chlorination material, entire system must be flushed with potable water until any entrained dirt and other foreign materials have been removed.

Water chlorination procedure must be in accordance with AWWA C651 and AWWA C652 as modified and supplemented by this specification. The chlorinating material must be hypochlorites or liquid chlorine. The chlorinating material must be fed into the water piping system at a constant rate at a concentration of at least 50 parts per million (ppm). Feed a properly adjusted hypochlorite solution injected into the system with a hypochlorinator, or inject liquid chlorine into the system through a solution-feed chlorinator and booster pump until the entire system is completely filled.

3.9.5.1 Water Chlorination Monitoring

Test the chlorine residual level in the water at 6 hour intervals for a continuous period of 24 hours. If at the end of a 6 hour interval, the chlorine residual has dropped to less than 25 ppm, flush the piping including tanks with potable water, and repeat the above chlorination procedures. During the chlorination period, each valve and faucet must be opened and closed several times. After the second 24 hour period, verify that no less than 25 ppm chlorine residual remains in the treated system. The 24 hour chlorination procedure must be repeated until no less than 25 ppm chlorine residual remains in the treated system.

3.9.5.2 Water Chlorination Flushing

Upon the specified verification, the system including tanks must then be flushed with potable water until the residual chlorine level is reduced to

less than one part per million. During the flushing period, each valve and faucet must be opened and closed several times.

3.9.5.3 Sample Testing

Take additional samples of water in disinfected containers, for bacterial examination, at locations specified by the Contracting Officer. Test these samples for total coliform organisms (coliform bacteria, fecal coliform, streptococcal, and other bacteria) in accordance with AWWA 10084. The testing method used must be EPA approved for drinking water systems and must comply with applicable local and state requirements.

3.9.5.4 Disinfection Acceptance

Disinfection must be repeated until bacterial tests indicate the absence of coliform organisms (zero mean coliform density per 100 milliliters) in the samples for at least 2 full days. The system will not be accepted until satisfactory bacteriological results have been obtained.

3.10 POSTED INSTRUCTIONS

Framed instructions under glass or in laminated plastic, including wiring and control diagrams showing the complete layout of the entire system, must be posted where directed. Condensed operating instructions explaining preventive maintenance procedures, methods of checking the system for normal safe operation, and procedures for safely starting and stopping the system must be prepared in typed form, framed as specified above for the wiring and control diagrams and posted beside the diagrams. The framed instructions must be posted before acceptance testing of the systems.

3.11 PERFORMANCE OF WATER HEATING EQUIPMENT

Standard rating condition terms are as follows:

DP = Draw pattern

EF = Energy factor, minimum overall efficiency.

ET = Minimum thermal efficiency with 70 degrees F delta T.

SL = Standby loss is maximum (Btu/h) based on a 70 degrees F temperature difference between stored water and ambient requirements.

UEF = Uniform energy factor

V = Rated volume in gallons

Q = Nameplate input rate in kW (Btu/h)

3.11.1 Storage Water Heaters

3.12 TABLES

TABLE I

PIPE AND FITTING MATERIALS FOR DRAINAGE, WASTE, VENT AND CONDENSATE DRAIN PIPING SYSTEMS

Item #	Pipe and Fitting Materials	SERVICE A	SERVICE B	SERVICE C	SERVICE D	SERVICE E	SERVICE F	SERVICE G
20	Polyvinyl Chloride plastic drain, waste and vent pipe and fittings, ASTM D2665, ASTM F891, (Sch 40) ASTM F1760	X	X	X	X	X	X	X

SERVICE:

A - Underground Building Soil, Waste and Storm Drain
B - Aboveground Soil, Waste, Drain In Buildings
C - Underground Vent
D - Aboveground Vent
E - Interior Rainwater Conductors Aboveground
F - Corrosive Waste And Vent Above And Belowground
G - Condensate Drain Aboveground

* - Hard Temper

TABLE II					
PIPE AND FITTING MATERIALS FOR PRESSURE PIPING SYSTEMS					
Item #	Pipe and Fitting Materials	SERVICE A	SERVICE B	SERVICE C	SERVICE D
8	Seamless copper water tube, ASTM B88, ASTM B88M	X**	X**	X**	X***
10	Wrought copper and bronze solder-joint pressure fittings, ASME B16.22 for use with Item 8	X	X	X	
33	Fittings: brass or bronze; ASME B16.15, and ASME B16.18 ASTM B828	X	X		
36	Nipples, pipe threaded ASTM A733	X	X	X	

TABLE II					
PIPE AND FITTING MATERIALS FOR PRESSURE PIPING SYSTEMS					
Item #	Pipe and Fitting Materials	SERVICE A	SERVICE B	SERVICE C	SERVICE D
	SERVICE: A - Cold Water Service Aboveground B - Hot and Cold Water Distribution 180 degrees F Maximum Aboveground C - Compressed Air Lubricated D - Cold Water Service Belowground Indicated types are minimum wall thicknesses. ** - Type L - Hard *** - Type K - Hard temper with brazed joints only or type K-soft temper without joints in or under floors **** - In or under slab floors only brazed joints				

-- End of Section --

SECTION 23 03 00.00 20

BASIC MECHANICAL MATERIALS AND METHODS
08/24 MCBCL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus

INTERNATIONAL CODE COUNCIL (ICC)

ICC IFGC	(2021) International Fuel Gas Code
ICC IMC	(2024) International Mechanical Code
ICC IPC	(2024) International Plumbing Code

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(2021) Motors and Generators
NEMA MG 10	(2017) Energy Management Guide for Selection and Use of Fixed Frequency Medium AC Squirrel-Cage Polyphase Induction Motors
NEMA MG 11	(1977; R 2012) Energy Management Guide for Selection and Use of Single Phase Motors

1.2 SUBMITTALS

Government approval is required for all submittals.

1.3 RELATED REQUIREMENTS

This section applies to all sections of Divisions: 21, FIRE SUPPRESSION; 22, PLUMBING; and 23, HEATING, VENTILATING, AND AIR CONDITIONING of this project specification, unless specified otherwise in the individual section.

1.4 QUALITY ASSURANCE

1.4.1 Material and Equipment Qualifications

Provide materials and equipment that are standard products of manufacturers regularly engaged in the manufacture of such products, which are of a similar material, design and workmanship. Standard products must have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year use must include applications of equipment and

materials under similar circumstances and of similar size. The product must have been for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2 year period.

1.4.2 Alternative Qualifications

Products having less than a two-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturer's factory or laboratory tests, can be shown.

1.4.3 Service Support

The equipment items must be supported by service organizations. Submit a certified list of qualified permanent service organizations for support of the equipment which includes their addresses and qualifications. These service organizations must be reasonably convenient to the equipment installation and able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.4.4 Manufacturer's Nameplate

For each item of equipment, provide a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

1.4.5 Modification of References

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction", or words of similar meaning, to mean the Contracting Officer.

1.4.5.1 Definitions

For the International Code Council (ICC) Codes referenced in the contract documents, advisory provisions must be considered mandatory, the word "should" is interpreted as "must." Reference to the "code official" must be interpreted to mean the "Contracting Officer." For Navy owned property, references to the "owner" must be interpreted to mean the "Contracting Officer." For leased facilities, references to the "owner" must be interpreted to mean the "lessor." References to the "permit holder" must be interpreted to mean the "Contractor."

1.4.5.2 Administrative Interpretations

For ICC Codes referenced in the contract documents, the provisions of Chapter 1, "Administrator," do not apply. These administrative requirements are covered by the applicable Federal Acquisition Regulations (FAR) included in this contract and by the authority granted to the Officer in Charge of Construction to administer the construction of this project. References in the ICC Codes to sections of Chapter 1, must be applied appropriately by the Contracting Officer as authorized by his administrative cognizance and the FAR.

1.5 DELIVERY, STORAGE, AND HANDLING

Handle, store, and protect equipment and materials to prevent damage before and during installation in accordance with the manufacturer's recommendations, and as approved by the Contracting Officer. Replace damaged or defective items.

1.6 ELECTRICAL REQUIREMENTS

Furnish motors, controllers, disconnects and contactors with their respective pieces of equipment. Motors, controllers, disconnects and contactors must conform to and have electrical connections provided under Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Furnish internal wiring for components of packaged equipment as an integral part of the equipment. Controllers and contactors shall have a maximum of 120 volt control circuits, and must have auxiliary contacts for use with the controls furnished. When motors and equipment furnished are larger than sizes indicated, the cost of additional electrical service and related work must be included under the section that specified that motor or equipment. Power wiring and conduit for field installed equipment must be provided under and conform to the requirements of Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

1.6.1 Motor Voltage

Provide motors rated for the voltage supplied. Motors shall be suitable for use at 90% to 110% of the nominal supplied voltage and shall have a service factor of at least 1.1 at that nominal supplied voltage. Motors indicated to be "Usable at 208 Volts" or "Usable at 200 Volts" are not permitted to be utilized on electrical systems with a nominal supplied voltage of 208 volts.

1.6.2 Single Phase Motor Efficiency

Unless otherwise specified, single-phase fractional-horsepower alternating-current motors must be high efficiency types corresponding to the applications listed in NEMA MG 11.

1.6.3 Poly Phase Motor Efficiency

Unless other specified polyphase squirrel-cage induction motors must be premium efficiency with continuous ratings that meet or exceed energy efficient ratings in accordance with Table 12-12 of NEMA MG 1 and corresponding to the applications listed in NEMA MG 10

1.6.4 Three-Phase Motor Protection

Provide controllers for motors rated three horsepower and larger with electronic phase-voltage monitors designed to protect motors from phase-loss, undervoltage, and overvoltage. Provide protection for motors from immediate restart by a time adjustable restart relay.

1.7 INSTRUCTION TO GOVERNMENT PERSONNEL

When specified in other sections, furnish the services of competent instructors to give full instruction to the designated Government personnel in the adjustment, operation, and maintenance, including pertinent safety requirements, of the specified equipment or system. Instructors must be thoroughly familiar with all parts of the installation

and must be trained in operating theory as well as practical operation and maintenance work.

Instruction must be given during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of man-days (8 hours per day) of instruction furnished must be as specified in the individual section. When more than 4 man-days of instruction are specified, use approximately half of the time for classroom instruction. Use other time for instruction with the equipment or system.

When significant changes or modifications in the equipment or system are made under the terms of the contract, provide additional instruction to acquaint the operating personnel with the changes or modifications.

1.8 ACCESSIBILITY

Install all work so that parts requiring periodic inspection, operation, maintenance, and repair are readily accessible. Install concealed valves, expansion joints, controls, dampers, and equipment requiring access, in locations freely accessible through access doors.

1.9 EQUIPMENT INVENTORY UPDATE

Submit information for each piece of equipment removed and supplied for use of Camp Lejeune to update the Maximo equipment inventory. For the purposes of this paragraph, inventoried equipment is defined as equipment listed on the Maximo Equipment Inventory Update form.

1.9.1 Requirements

The contractor shall prepare and submit one Maximo Equipment Inventory Update form for each individual item of inventoried equipment that is demolished, removed, replaced, or installed. (ex: three new condensing units would require the submission of three Equipment Inventory Update forms. The replacement of two existing air handling units with two new air handling units would require the submission of two Equipment Inventory Update forms). The contractor shall prepare and submit a VAV/TAB Room Number List for each VAV/Tab model installed in a single building. Only one Maximo Equipment Inventory Update form is required for each model of VAV or TAB in a single building.

1.9.1.1 Demolition of all equipment in a structure or facility

When all the inventoried equipment in a building or structure is demolished or removed, and not replaced, an Equipment Inventory Update form is not required.

1.9.2 Standards

The contractor shall provide accurate, complete, and legible information on all required forms. All required forms shall be completed and delivered to the Contracting Officer on or before the Beneficial Occupancy Date. All information on Equipment Inventory Update forms shall be obtained by visual inspection of equipment data plate(s).

1.9.3 Form Preparation

Each required Maximo Equipment Inventory Update form shall contain the

following information:

(1) The name and telephone number of an individual who can be contacted for clarification or additional information pertaining to the data on the form.

(2) The date of data collection

(3) The building or structure identification number and the specific location of the equipment within the structure (ex: 3d deck mech room)

(4) A check adjacent to the description of the new or replacement item, and a check adjacent to the supplemental description if applicable (ex: circulating pump and HVAC or steam)

(5) The Maximo number or serial number of the demolished or removed item, if applicable

(6) All applicable data from the equipment data plate

Each Room Number List form shall contain the following information:

(1) The name and telephone number of the individual providing the information

(2) The date the form was completed

(3) The building or structure identification number

(4) A check in the box adjacent to each applicable room number

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

3.1 Manufacturer's Recommendations

All material and equipment shall be installed in accordance with the manufacturer's recommendations for the intended purpose. Use the more stringent methods when manufacturer's recommendations, and plan & specification requirements differ. The contractor shall notify the government of any conflicts between manufacturer's recommendations and plans & specification requirements.

3.2 International Construction Codes

All material, equipment and installation shall be in accordance with the ICC IFGC, ICC IPC, and ICC IMC unless noted otherwise on the drawings and/or specifications. The contractor shall notify the government of any conflicts between ICC code requirements and contract requirements.

3.3 PAINTING OF NEW EQUIPMENT

New equipment painting must be factory applied or shop applied, and must be as specified herein, and provided under each individual section.

3.3.1 Factory Painting Systems

Manufacturer's standard factory painting systems may be provided subject to certification that the factory painting system applied will withstand 125 hours in a salt-spray fog test, except that equipment located outdoors must withstand 500 hours in a salt-spray fog test. Salt-spray fog test must be in accordance with ASTM B117, and for that test the acceptance criteria must be as follows: immediately after completion of the test, the paint must show no signs of blistering, wrinkling, or cracking, and no loss of adhesion; and the specimen must show no signs of rust creepage beyond 0.125 inch on either side of the scratch mark.

The film thickness of the factory painting system applied on the equipment must not be less than the film thickness used on the test specimen. If manufacturer's standard factory painting system is being proposed for use on surfaces subject to temperatures above 120 degrees F, the factory painting system must be designed for the temperature service.

3.3.2 Shop Painting Systems for Metal Surfaces

Clean, pretreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except metal surfaces subject to temperatures in excess of 120 degrees F must be cleaned to bare metal.

Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Color of finish coat must be aluminum or light gray.

a. Temperatures Less Than 120 Degrees F: Immediately after cleaning, the metal surfaces subject to temperatures less than 120 degrees F must receive one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of 1 mil; and two coats of enamel applied to a minimum dry film thickness of 1 mil per coat.

b. Temperatures Between 120 and 400 Degrees F: Metal surfaces subject to temperatures between 120 and 400 degrees F must receive two coats of 400 degrees F heat-resisting enamel applied to a total minimum

thickness of 2 mils.

c. Temperatures Greater Than 400 Degrees F: Metal surfaces subject to temperatures greater than 400 degrees F must receive two coats of 600 degrees F heat-resisting paint applied to a total minimum dry film thickness of 2 mils.

MAXIMO EQUIPMENT INVENTORY UPDATE

Employee: _____ Phone: _____ Date: ____/____/____

Bldg: _____ Specific Location: _____

__ AC, Computer Room
__ AC, Package
__ AC, Package Terminal
__ Assembly, Trap line
__ Backflow Preventer
__ Boiler
__ Chiller, Air Cooled Recip
__ Chiller, Air Cooled Screw
__ Chiller, Air Cooled Scroll
__ Chiller, Water Cooled Recip
__ Chiller, Water Cooled Screw
__ Compressor, Control Air
__ Compressor, Industrial Air
__ Dryer, Refrigerated Air
__ Exchanger, Heat
__ Evaporator, Freezer
__ Evaporator, Refrigerator
__ Fan, Exhaust
__ Generator
__ Heater, Space
__ Heater, Unit
__ Heat Pump, Geo-Thermal
__ Heat Pump, Indoor Unit
__ Heat Pump, Outdoor Unit
__ Heat Pump, Package
__ Heat Pump, Package Terminal
__ Pump, Circulating, Chilled Water
__ Pump, Circulating, Domestic Water
__ Pump, Circulating, Dual Temp Water
__ Pump, Circulating, Heating Water
__ Pump, Condensate
__ Pump, Sump
__ Regulator, Temperature
__ Tank, Hot Water Storage
__ Tower, Cooling
__ Unit, Air Handling
__ Unit, AC Condensing
__ Unit, Freezer Condensing
__ Unit, Refrigerator Condensing
__ Unit, Fan Coil
__ Unit, TAB (Attach Room No. List)
__ Unit, VAV (Attach Room No. List)
__ Valve, Pressure Reducing
__ Valve, Steam Pilot
__ Water Heater

Demolished/Removed Equipment

Maximo no: _____ or Ser no: _____

New Equipment

Manufacturer: _____

Model no: _____

Ser no: _____

Type: __Elec __Oil __LP Gas __Nat Gas __Steam __Water __Air

Motor Data: HP____ Volts____ Phase____ RLA_____ RPM____ Frame____

Tons____ No. of Motors____ no. of Belts____ Belt size(s)____ CFM____

KW____ Refrig type_____ Refrig Qty_____ Filter Size(s)_____

-- End of Section --

SECTION 23 05 15

COMMON PIPING FOR HVAC
05/22, CHG 1: 02/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC 325	(2017) Steel Construction Manual

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME A112.19.2/CSA B45.1	(2024) Standard for Vitreous China Plumbing Fixtures and Hydraulic Requirements for Water Closets and Urinals
ASME B31.3	(2022; Errata 2023) Process Piping

ASTM INTERNATIONAL (ASTM)

ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A563	(2021; E 2022a) Standard Specification for Carbon and Alloy Steel Nuts
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B370	(2022) Standard Specification for Copper Sheet and Strip for Building Construction
ASTM B749	(2020) Standard Specification for Lead and Lead Alloy Strip, Sheet and Plate Products
ASTM C67/C67M	(2025) Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile
ASTM C109/C109M	(2023) Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or (50-mm) Cube Specimens)
ASTM C404	(2024) Standard Specification for Aggregates for Masonry Grout
ASTM C476	(2023) Standard Specification for Grout for Masonry
ASTM C553	(2024) Standard Specification for Mineral

	Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM D2308	(2007; R 2013) Standard Specification for Thermoplastic Polyethylene Jacket for Electrical Wire and Cable
ASTM E814	(2024) Standard Test Method for Fire Tests of Penetration Firestop Systems
ASTM F104	(2011; R 2020) Standard Classification System for Nonmetallic Gasket Materials

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 515	(2017) Standard for the Testing, Design, Installation, and Maintenance of Electrical Resistance Heat Tracing for Industrial Applications

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(2025) Pipe Hangers and Supports - Materials, Design and Manufacture, Selection, Application, and Installation

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-C-18480	(1982; Rev B; Notice 2 2009; Notice 3 2022) Coating Compound, Bituminous, Solvent, Coal-Tar Base

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-1922	(Rev A; Notice 1; Notice 2; Notice 3; Notice 4) Shield, Expansion (Caulking Anchors, Single Lead)
CID A-A-1923	(Rev A; Notice 1; Notice 2; Notice 3; Notice 4) Shield, Expansion (Lag, Machine and Externally Threaded Wedge Bolt Anchors)
CID A-A-1924	(Rev A; Notice 3) Shield, Expansion (Self Drilling Tubular Expansion Shell Bolt Anchors
CID A-A-1925	(Rev A; Notice 1; Notice 2; Notice 3; Notice 4) Shield Expansion (Nail Anchors)
CID A-A-55614	(Basic; Notice 2) Shield, Expansion (Non-Drilling Expansion Anchors)
CID A-A-55615	(Basic; Notice 1; Notice 2; Notice 3; Notice 4) Shield, Expansion (Wood Screw and Lag Bolt Self-Threading Anchors

UL SOLUTIONS (UL)

UL 1479 (2015; Reprint Apr 2025) UL Standard for Safety Fire Tests of Penetration Firestops

1.2 GENERAL REQUIREMENTS

a. Section 23 30 00 HVAC AIR DISTRIBUTION applies to work specified in this section

e. Include with Equipment Foundation Data for piping systems all plan dimensions of foundations and relative elevations, equipment weight and operating loads, horizontal and vertical loads, horizontal and vertical clearances for installation, and size and location of anchor bolts.

f. Submit Fabrication Drawings for pipes, valves and specialties consisting of fabrication and assembly details to be performed in the factory.

g. Submit Material, Equipment, and Fixture Lists for pipes, valves and specialties including manufacturer's style or catalog numbers, specification and drawing reference numbers, warranty information, and fabrication site information. Provide a complete list of construction equipment to be used.

j. Submit Record Drawings for pipes, valves and accessories providing current factual information including deviations and amendments to the drawings, and concealed and visible changes in the work.

k. Submit Connection Diagrams for pipes, valves and specialties indicating the relations and connections of devices and apparatus by showing the general physical layout of all controls, the interconnection of one system (or portion of system) with another, and internal tubing, wiring, and other devices.

l. Submit Coordination Drawings for pipes, valves and specialties showing coordination of work between different trades and with the structural and architectural elements of work. Detail all drawings sufficiently to show overall dimensions of related items, clearances, and relative locations of work in allotted spaces. Indicate on drawings where conflicts or clearance problems exist between various trades.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Material, Equipment, and Fixture Lists; G

SD-02 Shop Drawings

Record Drawings; G

Connection Diagrams; G

Coordination Drawings; G

Fabrication Drawings; G

SD-03 Product Data

Miscellaneous Materials; G

Supporting Elements; G

Equipment Foundation Data; G

SD-07 Certificates

List of Qualified Permanent Service Organizations; G,

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G

1.4 QUALITY ASSURANCE

1.4.1 Material and Equipment Qualifications

Provide materials and equipment that are standard products of manufacturers regularly engaged in the manufacture of such products, which are of a similar material, design and workmanship. Provide standard products in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year use includes applications of equipment and materials under similar circumstances and of similar size. Ensure the product has been for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2 year period.

1.4.2 Service Support

Ensure the equipment items are supported by service organizations. Submit a certified list of qualified permanent service organizations for support of the equipment which includes their addresses and qualifications. Select service organizations that are reasonably convenient to the equipment installation and able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.4.3 Manufacturer's Nameplate

Provide a nameplate on each item of equipment bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent is not acceptable.

1.4.4 Modification of References

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of

similar meaning, to mean the Contracting Officer.

1.4.4.1 Definitions

For the International Code Council (ICC) Codes referenced in the contract documents, advisory provisions are considered mandatory, the word "should" is interpreted as "shall." Reference to the "code official" is interpreted to mean the "Contracting Officer." For Navy owned property, interpret references to the "owner" to mean the "Contracting Officer." For leased facilities, references to the "owner" is interpreted to mean the "lessor." References to the "permit holder" are interpreted to mean the "Contractor."

1.4.4.2 Administrative Interpretations

For ICC Codes referenced in the contract documents, the provisions of Chapter 1, "Administrator," do not apply. These administrative requirements are covered by the applicable Federal Acquisition Regulations (FAR) included in this contract and by the authority granted to the Officer in Charge of Construction to administer the construction of this project. References in the ICC Codes to sections of Chapter 1, are applied as appropriate by the Contracting Officer and as authorized by his administrative cognizance and the FAR.

1.5 DELIVERY, STORAGE, AND HANDLING

Handle, store, and protect equipment and materials to prevent damage before and during installation in accordance with the manufacturer's recommendations, and as approved by the Contracting Officer. Replace damaged or defective items.

1.6 INSTRUCTION TO GOVERNMENT PERSONNEL

When specified in other sections, furnish the services of competent instructors to give full instruction to the designated Government personnel in the adjustment, operation, and maintenance, including pertinent safety requirements, of the specified equipment or system. Provide instructors thoroughly familiar with all parts of the installation and trained in operating theory as well as practical operation and maintenance work.

Give instruction during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of man-days (8 hours per day) of instruction furnished is as specified in the individual section. When more than four man-days of instruction are specified, use approximately half of the time for classroom instruction. Use other time for instruction with the equipment or system.

When significant changes or modifications in the equipment or system are made under the terms of the contract, provide additional instruction to acquaint the operating personnel with the changes or modifications.

1.7 ACCESSIBILITY

Install all work so that parts requiring periodic inspection, operation, maintenance, and repair are readily accessible. Install concealed valves, expansion joints, controls, dampers, and equipment requiring access, in locations freely accessible through access doors.

PART 2 PRODUCTS

2.1 ELECTRICAL HEAT TRACING

Provide heat trace systems for pipes, valves, and fittings that are in accordance with IEEE 515 and be UL listed. System include all necessary components, including heaters and controls to prevent freezing.

Provide self-regulating heaters consisting of two 16 AWG tinned-copper bus wires embedded in parallel in a self-regulating polymer core that varies its power output to respond to temperature along its length. Ensure heater is able to be crossed over itself without overheating. Obtain approval before used directly on plastic pipe. Cover heater with a radiation cross-linked modified polyolefin dielectric jacket in accordance with ASTM D2308.

Provide heater with self-regulating factor of at least 90 percent, in order to provide energy conservation and to prevent overheating.

Operate heater on line voltages as shown on plans.

Size Heater according to the following table:

Pipe Size

(Inch, Diameter)	Minus 10 degrees F	Minus 20 degrees F
3 inches or less	5 watts per foot (wpf)	5 wpf
4 inch	5 wpf	8 wpf
6 inch	8 wpf	8 wpf
8 inch	2 strips/5 wpf	2 strips/8 wpf
12 inch	2 strips/8 wpf	2 strips/8 wpf

Control systems by an ambient sensing thermostat set at 40 degrees F either directly or through an appropriate contactor.

2.2 MISCELLANEOUS MATERIALS

Submit equipment and performance data for miscellaneous materials consisting of corrosion resistance, life expectancy, gage tolerances, and grade line analysis.

2.2.1 Bituminous Coating

Ensure the bituminous coating is a solvent cutback, heavy-bodied material to produce not less than a 12-mil dry-film thickness in one coat, and is recommended by the manufacturer to be compatible with factory-applied coating and rubber joints.

For previously coal-tar coated and uncoated ferrous surfaces underground, use bituminous coating solvent cutback coal-tar type, conforming to

MIL-C-18480.

2.2.2 Bolting

Ensure flange and general purpose bolting is hex-head and conforms to ASTM A307, Grade B (bolts, for flanged joints in piping systems where one or both flanges are cast iron). Heavy hex-nuts conform to ASTM A563. Square-head bolts and nuts are not acceptable. Ensure threads are coarse-thread series.

2.2.3 Elastomer Caulk

Use two-component polysulfide- or polyurethane-base elastomer caulking material, conforming to ASTM C920.

2.2.4 Escutcheons

Manufacture escutcheons from nonferrous metals and chrome-plated except when AISI 300 series corrosion-resistant steel is provided. Ensure metals and finish conforms to ASME A112.19.2/CSA B45.1.

Use one-piece escutcheons where mounted on chrome-plated pipe or tubing, and one-piece of split-pattern type elsewhere. Ensure all escutcheons have provisions consisting of internal spring-tension devices for maintaining a fixed position against a surface.

2.2.5 Flashing

Ensure sheetlead conforms to ASTM B749, UNS Alloy Number L50049 (intended for use in laboratories and shops in general application).

Ensure sheet copper conforms to ASTM B370 and be not less than 16 ounces per square foot weight.

2.2.6 Flange Gaskets

Provide compressed non-asbestos sheets, conforming to ASTM F104, coated on both sides with graphite or similar lubricant, with nitrile composition, binder rated to 750 degrees F.

2.2.7 Grout

Provide shrink-resistant grout as a premixed and packaged metallic-aggregate, mortar-grouting compound conforming to ASTM C404 and ASTM C476.

Ensure shrink-resistant grout is a combination of pre-measured and packaged epoxy polyamide or amine resins and selected aggregate mortar grouting compound conforming to the following requirements:

Tensile strength		1,900 psi, minimum
Compressive strength	ASTM C109/C109M	14,000 psi, minimum
Shrinkage, linear		0.00012 inch per inch, maximum
Water absorption	ASTM C67/C67M	0.1 percent, maximum
Bond strength to		1,000 psi, minimum steel in shear

minimum

2.2.8 Pipe Thread Compounds

Use polytetrafluoroethylene tape not less than 2 to 3 mils thick in potable and process water and in chemical systems for pipe sizes to and including 1-inch ips. Use polytetrafluoroethylene dispersions and other suitable compounds for all other applications upon approval by the Contracting Officer; however, do not use lead-containing compounds in potable water systems.

2.3 SUPPORTING ELEMENTS

Submit equipment and performance data for the supporting elements consisting of corrosion resistance, life expectancy, gage tolerances, and grade line analysis.

Provide all necessary piping systems and equipment supporting elements, including but not limited to: building structure attachments; supplementary steel; hanger rods, stanchions, and fixtures; vertical pipe attachments; horizontal pipe attachments; anchors; guides; and spring-cushion, variable, or constant supports. Ensure supporting elements are suitable for stresses imposed by systems pressures and temperatures and natural and other external forces normal to this facility without damage to supporting element system or to work being supported.

Ensure supporting elements conform to requirements of ASME B31.3, and MSS SP-58, except as noted.

Ensure attachments welded to pipe are made of materials identical to that of pipe or materials accepted as permissible raw materials by referenced code or standard specification.

Ensure supporting elements exposed to weather are hot-dip galvanized or stainless steel. Select materials of such a nature that their apparent and latent-strength characteristics are not reduced due to galvanizing process. Electroplate supporting elements in contact with copper tubing with copper.

Type designations specified herein are based on MSS SP-58. Ensure masonry anchor group-, type-, and style-combination designations are in accordance with CID A-A-1922, CID A-A-1923, CID A-A-1924, CID A-A-1925 , CID A-A-55614, and CID A-A-55615. Provide support elements, except for supplementary steel, that are cataloged, load rated, commercially manufactured products.

2.3.1 Building Structure Attachments

2.3.1.1 Anchor Devices, Concrete and Masonry

Ensure anchor devices conform to CID A-A-1922, CID A-A-1923, CID A-A-1924, CID A-A-1925, CID A-A-55614, and CID A-A-55615

For cast-in, floor mounted, equipment anchor devices, provide adjustable positions.

Do not use powder-actuated anchoring devices to support any mechanical systems components.

2.3.1.2 C-Clamps

Do not use C-clamps.

2.3.1.3 Inserts, Concrete

Use concrete MSS SP-58 Type 18 inserts When applied to piping in sizes 2 inches ips and larger and where otherwise required by imposed loads, insert and wire a 1-foot length of 1/2-inch reinforcing rod through wing slots. Submit proprietary-type continuous inserts for approval.

2.3.2 Horizontal Pipe Attachments

2.3.2.1 Single Pipes

Support piping in sizes to and including 2-inch ips by MSS SP-58 Type 6 solid malleable iron pipe rings, except that, use split-band-type rings in sizes up to 1-inch ips.

Support piping in sizes through 8-inch ips inclusive by MSS SP-58 Type 1 attachments.

Use MSS SP-58 Type 1 and Type 6 assemblies on vapor-sealed insulated piping and have an inside diameter larger than pipe being supported to provide adequate clearance during pipe movement.

Where thermal movement of a point in a piping system 4 inches and larger would cause a hanger rod to deflect more than 4 degrees from the vertical or where a horizontal point movement exceeds 1/2 inch, use MSS SP-58 Type 41 pipe rolls.

Use MSS SP-58 Type 40 shields on all insulated piping. Ensure area of the supporting surface is such that compression deformation of insulated surfaces does not occur. Roll away longitudinal and transverse shield edges from the insulation.

Provide insulated piping without vapor barrier on roll supports with MSS SP-58 Type 39 saddles.

Provide spring supports as indicated.

2.3.2.2 Parallel Pipes

Use trapeze hangers fabricated from structural steel shapes, with U-bolts, in congested areas and where multiple pipe runs occur. Ensure structural steel shapes conform to supplementary steel requirements.

2.3.3 Vertical Pipe Attachments

Ensure vertical pipe attachments are MSS SP-58 Type 8.

Include complete fabrication and attachment details of any spring supports in shop drawings.

2.3.4 Hanger Rods and Fixtures

Use only circular cross section rod hangers to connect building structure attachments to pipe support devices. Use pipe, straps, or bars of equivalent strength for hangers only where approved by the Contracting

Officer.

Provide turnbuckles, swing eyes, and clevises as required by support system to accommodate temperature change, pipe accessibility, and adjustment for load and pitch. Rod couplings are not acceptable.

2.3.5 Supplementary Steel

Where it is necessary to frame structural members between existing members or where structural members are used in lieu of commercially rated supports, design and fabricate such supplementary steel in accordance with AISC 325.

PART 3 EXECUTION

3.1 SUPPORTING ELEMENTS INSTALLATION

Install supporting elements in accordance with the referenced codes and standards.

Support piping from building structure. Do not support piping from roof deck or from other pipe.

Run piping parallel with the lines of the building. Space and install piping and components so that a threaded pipe fitting may be removed between adjacent pipes and so that there is no less than 1/2 inch of clear space between the finished surface and other work and between the finished surface of parallel adjacent piping. Arrange hangars on different adjacent service lines running parallel with each other in line with each other and parallel to the lines of the building.

Install piping support elements at intervals specified hereinafter, at locations not more than 3 feet from the ends of each runout, and not over 1 foot from each change in direction of piping.

Base load rating for all pipe-hanger supports on insulated weight of lines filled with water and forces imposed. Deflection per span is not exceed slope gradient of pipe. Ensure supports are in accordance with the following minimum rod size and maximum allowable hanger spacing for specified pipe. For concentrated loads such as valves, reduce the allowable span proportionately:

PIPE SIZE INCHES	ROD SIZE INCHES	STEEL PIPE FEET	COPPER PIPE FEET
1 and smaller	3/8	8	6
1-1/4 to 1-1/2	3/8	10	8
2	3/8	10	8
2-1/2 to 3-1/2	1/2	12	12
4 to 5	5/8	16	14
6	3/4	16	16
8 to 12	7/8	20	20

PIPE SIZE INCHES	ROD SIZE INCHES	STEEL PIPE FEET	COPPER PIPE FEET
14 to 18	1	20	20
20 and over	1-1/4	20	20

Install vibration isolation supports where needed.

Support vertical risers independently of connected horizontal piping, whenever practicable, with fixed or spring supports at the base and at intervals to accommodate system range of thermal conditions. Ensure risers have guides for lateral stability. For risers subject to expansion, install only one rigid support at a point approximately one-third down from the top. Place clamps under fittings unless otherwise specified. Support carbon-steel pipe at each floor and at not more than 15-foot intervals for pipe 2 inches and smaller and at not more than 20-foot intervals for pipe 2-1/2 inches and larger.

3.2 PENETRATIONS

Install effective sound stopping and adequate operating clearance to prevent structure contact where piping penetrates walls, floors, or ceilings into occupied spaces adjacent to equipment rooms; where similar penetrations occur between occupied spaces; and where penetrations occur from pipe chases into occupied spaces. Occupied spaces include space above ceilings where no special acoustic treatment of ceiling is provided. Finish penetrations to be compatible with surface being penetrated.

Accomplish sound stopping and vapor-barrier sealing of pipe shafts and large floor and wall openings by packing to high density with properly supported fibrous-glass insulation or, where ambient or surface temperatures do not exceed 120 degrees F, by foaming-in-place with self-extinguishing, 2-pound density polyurethane foam to a depth not less than 6 inches. Finish foam with a rasp. Ensure vapor barrier is not less than 1/8-inch thick vinyl coating applied to visible and accessible surfaces. Where high temperatures and fire stopping are a consideration, use only mineral wool with openings covered by 16-gage sheet metal.

3.3 SLEEVES

Install sleeves where piping passes through roofs, masonry, concrete walls and floors.

Continuously braze sleeves passing through steel decks to the deck.

Ensure sleeves that extend through floors, roofs, load bearing walls, and fire barriers are continuous and fabricated from Schedule 40 steel pipe, with welded anchor lugs. Form all other sleeves by molded linear polyethylene liners or similar materials that are removable. Ensure diameter of sleeves is large enough to accommodate pipe, insulation, and jacketing without touching the sleeve and provides a minimum 3/8-inch clearance. Install a sleeve size to accommodate mechanical and thermal motion of pipe precluding transmission of vibration to walls and the generation of noise.

Pack the space between a pipe, bare or insulated, and the inside of a pipe sleeve or a construction surface penetration solid with a mineral fiber conforming to ASTM C553 Type V (flexible blanket), to 1,000 degrees F.

Install this packing wherever the piping passes through firewalls, equipment room walls, floors, and ceilings connected to occupied spaces, and other locations where sleeves or construction-surface penetrations occur between occupied spaces. Where sleeves or construction surface penetrations occur between conditioned and unconditioned spaces, fill the space between a pipe, bare or insulated, and the inside of a pipe sleeve or construction surface penetration with an elastomer caulk to a depth of 1/2 inch. Ensure all caulked surfaces are oil- and grease-free.

Ensure through-penetration fire stop materials and methods are in accordance with ASTM E814 and UL 1479.

Caulk exterior wall sleeves watertight with lead and oakum or mechanically expandable chloroprene inserts with mastic-sealed metal components.

3.4 ESCUTCHEONS

Install escutcheons at all penetrations of piping into finished areas. Where finished areas are separated by partitions through which piping passes, install escutcheons on both sides of the partition. Where suspended ceilings are installed, install plates at the underside only of such ceilings. For insulated pipes, select plates large enough to fit around the insulation. Use chrome-plated escutcheons in all occupied spaces and of size sufficient to effectively conceal openings in building construction. Firmly attach escutcheons with setscrews.

3.5 FLASHINGS

Install flashings at penetrations of building boundaries by mechanical systems and related work.

3.6 HEAT TRACE CABLE INSTALLATION

Field apply heater tape and cut to fit as necessary, linearly along the length of pipe after piping has been pressure tested and approved by the Contracting Officer. Secure the heater to piping with cable ties . Label thermal insulation on the outside, "Electrical Heat Trace."

Install power connection, end seals, splice kits and tee kit components in accordance with IEEE 515 to provide a complete workable system. Terminate connection to the thermostat and ends of the heat tape in a junction box. Ensure cable and conduit connections are raintight.

3.7 DISINFECTION

Flush piping with potable water until visible grease, dirt and other contaminants are removed (visual inspection).

3.8 HEAT TRACE CABLE TESTS

Test heat trace cable system in accordance with IEEE 515 after installation and before and after installation of the thermal insulation. Test heater cable using a 1000 vdc megger. Minimum insulation resistance is 20 to 1000 megohms regardless of cable length.

3.9 OPERATION AND MAINTENANCE

Provide Operation and Maintenance Manuals consistent with manufacturer's standard brochures, schematics, printed instructions, general operating

procedures and safety precautions. Submit test data that is clear and readily legible.

3.10 PAINTING OF NEW EQUIPMENT

Factory or shop apply new equipment painting, as specified herein, and provided under each individual section.

3.10.1 Factory Painting Systems

Manufacturer's standard factory painting systems may be provided subject to certification that the factory painting system applied withstands 125 hours in a salt-spray fog test, except that equipment located outdoors withstand 500 hours in a salt-spray fog test. Conduct salt-spray fog test is in accordance with ASTM B117, and for that test the acceptance criteria is as follows: immediately after completion of the test, the inspected paint shows no signs of blistering, wrinkling, or cracking, and no loss of adhesion; and the specimen shows no signs of rust creepage beyond 0.125 inch on either side of the scratch mark.

Ensure the film thickness of the factory painting system applied on the equipment is not less than the film thickness used on the test specimen. If manufacturer's standard factory painting system is being proposed for use on surfaces subject to temperatures above 120 degrees F, design the factory painting system for the temperature service.

3.10.2 Shop Painting Systems for Metal Surfaces

Clean, pretreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except clean to bare metal, surfaces subject to temperatures in excess of 120 degrees F.

Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Selected color of finish coat is aluminum or light gray.

a. Temperatures Less Than 120 Degrees F: Immediately after cleaning, the metal surfaces subject to temperatures less than 120 degrees F receives one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of one mil; and two coats of enamel applied to a minimum dry film thickness of one mil per coat.

b. Temperatures Between 120 and 400 Degrees F: Metal surfaces subject to temperatures between 120 and 400 degrees F Receives two coats of 400 degrees F heat-resisting enamel applied to a total minimum thickness of 2 mils.

c. Temperatures Greater Than 400 Degrees F: Metal surfaces subject to temperatures greater than 400 degrees F receives two coats of 600 degrees F heat-resisting paint applied to a total minimum dry film thickness of 2 mils.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 05 48.19

BRACING FOR HVAC
05/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 355.2	(2007) Qualification of Post-Installed Mechanical Anchors in Concrete and Commentary
ACI 355.4	(2011) Qualification of Post-Installed Adhesive Anchors in Concrete (ACI 355.4) and Commentary

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC 325	(2017) Steel Construction Manual

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7-16	(2017; Errata 2018; Supp 1 2018) Minimum Design Loads and Associated Criteria for Buildings and Other Structures

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA C105/A21.5	(2018) Polyethylene Encasement for Ductile-Iron Pipe Systems
AWWA C116/A21.16	(2015) Protective Fusion-Bonded Coatings for the Interior and Exterior Surfaces of Ductile-Iron and Gray Iron Fittings
AWWA C153/A21.53	(2019) Ductile-Iron Compact Fittings for Water Service
AWWA C213	(2015) Fusion-Bonded Epoxy Coating for the Interior and Exterior of Steel Water Pipelines

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M	(2019) Standard Specification for Carbon Structural Steel
ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A325	(2014) Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
ASTM A490	(2014a) Standard Specification for Structural Bolts, Alloy Steel, Heat Treated, 150 ksi Minimum Tensile Strength
ASTM A500/A500M	(2023) Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM A536	(2024) Standard Specification for Ductile Iron Castings
ASTM A563	(2021; E 2022a) Standard Specification for Carbon and Alloy Steel Nuts
ASTM A603	(2019) Standard Specification for Zinc-Coated Steel Structural Wire Rope
ASTM D1785	(2015; E 2018) Standard Specification for Poly(Vinyl Chloride) (PVC), Plastic Pipe, Schedules 40, 80, and 120
ASTM D2665	(2014) Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings
ASTM E488/E488M	(2022) Standard Test Methods for Strength of Anchors in Concrete Elements
ASTM F891	(2024) Standard Specification for Coextruded Poly (Vinyl Chloride) (PVC) Plastic Pipe with a Cellular Core
ASTM F1554	(2020) Standard Specification for Anchor Bolts, Steel, 36, 55, and 105-ksi Yield Strength

FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA)

FEMA P-414	(January 2004) Installing Seismic Restraints for Duct and Pipe

ICC EVALUATION SERVICE, INC. (ICC-ES)

ICC ES AC193	(2012) Acceptance Criteria for Mechanical Anchors in Concrete Elements

METAL FRAMING MANUFACTURERS ASSOCIATION (MFMA)

MFMA-4	(2004) Metal Framing Standards Publication

NSF INTERNATIONAL (NSF)

NSF/ANSI 61	(2020) Drinking Water System Components - Health Effects

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1981	(2008) Seismic Restraint Manual Guidelines for Mechanical Systems, 3rd Edition

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-301-01	(2023; with Change 6, 2026) Structural Engineering
UFC 4-010-01	(2018) DoD Minimum Antiterrorism Standards for Buildings

VIBRATION ISOLATION AND SEISMIC CONTROL MANUFACTURERS ASSOCIATION (VISCMA)

VISCMA 412	(2014) Installing Seismic Restraints for Mechanical Equipment

1.2 SYSTEM DESCRIPTION

1.2.1 General Requirements

Apply the requirements for seismic protection measures described in this section and on the drawings to the mechanical equipment and mechanical systems both inside and outside of the building along with exterior utilities and systems listed below. Where there is a conflict between the specifications and the drawings, the specifications will take precedence. Accomplish resistance to lateral forces induced by earthquakes without consideration of friction resulting from gravity loads.

1.2.2 Mechanical Equipment

Mechanical equipment to be seismically protected must include the following items to the extent required on the drawings or in other sections of these specifications:

Equipment/Components with Ip = 1.0

Expansion Air Separator Tanks	Valves and Fittings for Piping
Heat Exchangers	Steam-fed Kitchen Appliances
Water Chiller Units	

	Air Handling Units
Pumps with Motors	
	Split System DX Units
Flash Tanks	Unit Heaters
	Exhaust, Return and Misc. Fans
	Pumps
	Unitary HVAC Systems
	Fan Coil Units
	Instrumentation and Control for HVAC

Equipment/Components with Ip = 1.5 (Designated Seismic Systems)
Insert edited list here similar to one above for Ip = 1.0

1.2.3 Mechanical Systems

Mechanical systems to be seismically protected must include the following items to the extent required on the drawings or in this or other sections of these specifications:

Mechanical systems with Ip = 1.0

a. All Piping and Ducts Inside the Building Except as Specifically Stated Below Under "Items Not Covered By This Section".

b. Chilled Water Distribution Systems Outside of Buildings.

c. Steam, Water, and Gas Piping Outside of Buildings.

d. All Water Supply Systems Outside of Buildings.

g. Heat Distribution Systems (Supply, Return, steam and Condensate Return) Outside of Buildings.

h. Refrigerant Piping Outside the Building.

m. Ductwork Outside of Buildings.

o.

Mechanical systems with Ip = 1.5 (Designated Seismic Systems)
Insert edited list here similar to one above for Ip = 1.0

1.2.4 Contractor Designed Bracing

Submit copies of the design calculations with the drawings. Calculations must be approved, certified, stamped and signed by a registered Professional Structural Engineer. Calculations must verify the capability of structural members to which bracing is attached for carrying the load from the brace. Design the bracing in accordance with UFC 3-301-01, , UFC 4-010-01 and additional data furnished by the Contracting Officer. Resistance to lateral forces induced by earthquakes must be accomplished without consideration of friction resulting from gravity loads. UFC 3-301-01 uses parameters for the building, not for the equipment in the building; therefore, corresponding adjustments to the formulas must be required. Loadings determined using UFC 3-301-01 are based on strength design; therefore, AISC 325 Specifications must be used for the design. The bracing for the mechanical equipment designated in paragraph 1.2.2 and systems designated in paragraph 1.2.3 must be developed by the Contractor.

1.2.5 Items Not Covered By This Section

1.2.5.1 Items Requiring No Seismic Restraints

Seismic restraints are not required for the following items:

a. Gas piping less than 1 inch nominal pipe size.

b. Piping in boiler and mechanical equipment rooms less than 1-1/4 inches nominal pipe size.

c. All other piping equal to or less than 3inches nominal pipe size.

d. Rectangular air handling ducts less than 6 square feet in cross sectional area.

e. Round air handling ducts less than 28 inches in diameter.

f. Piping suspended by individual hangers 12 inches or less in length from the top of pipe to the bottom of the supporting structural member where the hanger is attached, except as noted below.

g. Ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of the supporting structural member, except as

noted below.

In exemptions f. and g. all hangers must meet the length requirements. If the length requirement is exceeded by one hanger in the run, brace the entire run. Seismically protect interior piping and ducts not listed above in accordance with the provisions of this specification.

Non-critical items may require seismic restraints if adjacent to critical equipment or systems that must remain operational after an earthquake and could be compromised by impact with non-critical adjacent components.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submittals with an "S" are for inclusion in the Sustainability eNotebook, in conformance to Section 01 33 29 SUSTAINABILITY REPORTING. When shown in this specification, detailed shop drawings for all required equipment, piping and ductwork with calculations certified by a registered structural engineer will be provided. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Coupling and Bracing

Flexible Couplings or Joints

Equipment Restraint

Contractor Designed Bracing; G

SD-03 Product Data

Coupling and Bracing; G

Flexible Couplings Or Joints; G

Equipment Restraint; G

Contractor Designed Bracing; G

Snubbers

Anchor Bolts

Vibration Isolators

SD-05 Design Data

Design Calculations

SD-06 Test Reports

Anchor Bolts; G

PART 2 PRODUCTS

2.1 GENERAL DESIGN REQUIREMENTS

Submit detailed seismic restraint drawings for mechanical equipment, duct systems, piping systems and any other mechanical systems along with calculations, catalog cuts, templates, and erection and installation details, as appropriate, for the items listed below. Indicate thickness, type, grade, class of metal, and dimensions; and show construction details, reinforcement, anchorage, and installation with relation to the building construction. Calculations must be stamped, by a registered structural engineer, and verify the capability of structural members to which bracing is attached for carrying the load from the brace. Include drawing for Mission Critical Equipment indicating the equipment location in the facility sufficient to be used for the installation. Design must be based on actual equipment and system layout. Design must include calculated dead loads, static seismic loads and capacity of materials utilized for the connection of the equipment or system to the structure. Analysis must detail anchoring methods.

2.2 EQUIPMENT RESTRAINT

Equipment must be rigidly or flexibly mounted as indicated in the specifications and/or drawings depending on vibration isolation requirements as follows below.

Roof mounted equipment such as cooling towers and condensers, both vibration isolated and nonisolated, must have support members designed and anchored to building structural steel or concrete as required for seismic restraint and wind loads.

2.2.1 Rigidly (Base and Suspended) Mounted Equipment

HVAC equipment furnished under this contract must be rigidly mounted using cast-in-place anchor bolts or post-installed anchors that are qualified for earthquake loading in accordance with ACI 355.2 and ACI 355.4. Anchor bolts must conform to ASTM F1554. For any rigid equipment which is rigidly anchored, provide flexible joints for piping, ductwork, electrical conduit, etc., that are capable of accommodating displacements equal to the full width of the joint in both orthogonal directions. Suspended equipment bracing attachments must be located just above the center of gravity to minimize swinging. Use the ratio of the overturning moment from seismic forces to the resisting moment due to gravity loads to determine if overturning forces need to be considered in the sizing of anchor bolts. Provide calculations to verify the adequacy of the anchor bolts for combined shear and overturning.

Roof mounted HVAC equipment roof curbs, framing and attachment to equipment and structure must be designed and braced to withstand seismic loads. Designated Seismic Systems (DSS) assigned to Seismic Design Category (SDC) C, D, E, or F and Risk Category IV components needed for continued operation after an earthquake must have two nuts provided on each anchor bolt.

2.2.2 Nonrigid or Flexibly-Mounted Equipment

Select vibration isolation devices so that the maximum movement of equipment from the static deflection point is 1/4 inch. Equipment

flexibly mounted on vibration isolators must have a bumper restraint or snubber in each horizontal direction and vertical restraints must be provided where required to resist overturning. Isolator housing and restraints must be constructed of ductile materials. A viscoelastic pad or similar material of appropriate thickness must be used between the bumper and components to limit the impact load. Restraints must be designed to resist the calculated horizontal lateral and vertical forces.

Spring vibration isolators must be seismically rated, restrained isolators for equipment subject to load variations and large external forces. The seismically rated housing must be sized to meet or exceed the force requirements applicable to the project and meet the required isolation criteria. Spring vibration isolator manufacturer's will be a member of VISCMA. Design force, Fp, must be doubled for vibration isolators with an air gap greater than 0.25 inches as specified in ASCE 7-16, Chapter 13. Housed springs must not be used for seismic restraint applications because they cannot resist uplift.

2.3 BOLTS AND NUTS

Hex head bolts, and heavy hexagon nuts must be ASTM A325 or ASTM A490 bolts and ASTM A563 nuts. Provide bolts and nuts galvanized in accordance with ASTM A153/A153M when used underground or exposed to weather.

2.4 FLEXIBLE JOINTS

Flexible joints must have same pressure and temperature ratings as adjoining pipe. Braided hoses must not be used where there is torsional or axial movement unless manufacturer allows it.

2.4.1 Braided Hose Expansion Joint

Braided hose expansion joint(s) must be installed in the locations indicated on the drawings and as required to accommodate any thermal expansion, contraction or seismic movement of the piping system. Joints must consist of two parallel sections of corrugated metal hose, compatible braid, and 180 degree return bend with inlet and outlet connections. Field fabricated loops are not acceptable. Braided hose expansion joint(s) must be installed in the locations indicated on the drawings and as required to accommodate any thermal expansion, contraction or seismic movement of the piping system. Joints must consist of two parallel sections of corrugated metal hose, compatible braid, and 180 degree return bend with inlet and outlet connections. Field fabricated loops must not be acceptable. Braided hose in a 60 degree flexible V loop arrangement must be used for small diameter pipe connections to coils in variable-air-volume (VAV)terminal units and fan coil units installed in suspended ductwork whether braced or unbraced.

All braided hose expansion joints must be manufactured in accordance with the documented manufacturers weld procedure specifications. The procedure qualification record must be used to document the execution of this procedure and must follow the general "guidelines" of ASME Section IX. Each individual welder must conform to the in-house procedure qualification record and be qualified prior to each production lot. The testing of each individual welder must be documented in a welding procedure qualification record.

2.4.1.1 Corrugated Hose

Corrugated hose must be Type 304 stainless steel . Braid must be Type 304 stainless steel for any series 300 stainless steel hose . Fittings materials of construction and end fitting type must be consistent with pipe material and equipment/ pipe connection fittings. Copper fittings must not be attached to stainless steel hose.

2.4.1.2 Flexible Hose Expansion Loops

Flexible hose expansion loops must have a factory supplied, hanger / support lug located at the bottom of the 180deg return. Flexible hose expansion loop(s) must be rated with an operating pressure which is the same as the adjoining pipe. The operating pressure must be based on burst pressure with a 4 to 1 safety factor. For steam service, the operating pressure must be based on burst pressure with a 8 to 1 safety factor.

2.4.2 Double Ball Flexible Expansion Joint

Install flexible expansion joints manufactured of ductile iron conforming to the material requirements of ASTM A536 and AWWA C153/A21.53 in the locations indicated on the drawings. Provide foundry certification of material upon request. Each flexible expansion joint must be pressure tested prior to shipment against its own restraint to a minimum of 350 psi (250 psi for flexible expansion joints 2 inch and 30 inches diameter and larger.) A minimum 2:1 safety factor, determined from the published pressure rating, must apply. Factory Mutual Approval for the 3 inch through 12 inch sizes is required. Each flexible expansion joint must consist of an expansion joint designed and cast as an integral part of a ball and socket type flexible joint, having a minimum per ball deflection of: 20°, 2" - 12"; 15°, 14" - 36"; 12°, 42"-48" and 4-inches minimum expansion. Additional expansion sleeves must be available and easily added or removed at the factory or in the field. Both standardized mechanical joint and flange end connections must be available.

2.4.2.1 Internal Surfaces

Line all internal surfaces (wetted parts) with a minimum of 15 mils of fusion bonded epoxy conforming to the applicable requirements of AWWA C213. Sealing gaskets must be constructed of EPDM. The coating must meet NSF/ANSI 61.

2.4.2.2 Exterior Surfaces

Coat exterior surfaces with a minimum of 6 mils of fusion bonded epoxy conforming to the applicable requirements of AWWA C116/A21.16. Include appropriately sized polyethylene sleeves, meeting AWWA C105/A21.5, for direct buried applications.

2.4.3 Double Ball Flexible Expansion Joint Gravity Drain (Non-Pressurized)

Flexible expansion joints gravity drain must be installed in the locations indicated on the drawings and must be manufactured of pvc. All connections whether solvent weld or mechanical must be restrained to allow movement to be transferred to expansion joint. Each ball must allow up to 15 degrees deflection.

End connection outside diameters must be compatible with ASTM D1785, ASTM D2665 and ASTM F891 PVC pipe and are to be solvent welded.

2.5 SWAY BRACING MATERIALS

Material used for members listed in this section and on the drawings, must be structural steel conforming with the following:

a. Plates, rods, and rolled shapes, ASTM A36/A36M.

b. Wire rope, ASTM A603 pre-stretched. Class B galv coating Ferrule clamps must be qualified by testing for use in seismic applications per VISCMA 412. A minimum of two clamps are required on each end of wire rope.

c. Tubes, ASTM A500/A500M, Grade B.

d. Pipes, ASTM A53/A53M, Grade B.

e. Angles, ASTM A36/A36M.

f. Channels (Struts) with in-turned lips and associated hardware for fastening to channels at random points conforming to MFMA-4

2.6 MULTIDIRECTIONAL SEISMIC SNUBBERS

Install multidirectional seismic snubbers employing elastomeric pads on floor- or slab-mounted equipment and large piping as detailed on drawings. These snubbers must provide 1/4 inch free vertical and horizontal movement from the static deflection point. Snubber medium must consist of multiple pads of cotton duct and neoprene or other suitable materials arranged around a flanged steel trunnion so both horizontal and vertical forces are resisted by the snubber medium.

PART 3 EXECUTION

3.1 COUPLING AND BRACING

a. Submit detail drawings, as specified here and throughout this specification, along with catalog cuts, templates, and erection and installation details, as appropriate, for the items listed. Submittals must be complete in detail; must indicate thickness, type, grade, class of metal, and dimensions; and must show construction details, reinforcement, anchorage, and installation with relation to the building construction.

b. Provide coupling installation conforming to the details shown on the drawings. Provisions of this paragraph apply to all piping within a 5 foot line around outside of building unless buried in the ground. Piping grouped for support on trapeze-type hangers must be braced at the most frequent interval as determined by applying the requirements of this specification to each piping run on the common support.

c. Size bracing components as required for the total load carried by the common supports. Bracing rigidly attached to pipe flanges, or similar, must not be used where it would interfere with thermal expansion of piping.

d. Adjust isolators and restraints after piping systems has been filled and equipment is at its operating weight, following the manufacturer's written instructions.

e. Install cables at a 45-degree slope. Where interference is present, the slope may be minimum of 30 degrees or a maximum of 60 degrees per VISCMA 412.

3.2 BUILDING DRIFT

Provide joints capable of accommodating seismic displacements for vertical piping between floors of the building, where pipes pass through a building seismic or expansion joint, or where rigidly supported pipes connect to equipment with vibration isolators. Provide horizontal piping across expansion joints to accommodate the resultant of the drifts of each building unit in each orthogonal direction. For threaded piping, provide swing joints made of the same piping material. For piping with manufactured ball joints the seismic drift must be 0.015 feet per foot of height above the base where the seismic separation occurs; this drift value must be used in place of the expansion given in the manufacturer's selection table.

3.3 FLEXIBLE COUPLINGS OR JOINTS

3.3.1 Building Piping

Provide flexible couplings or joints in building piping at bottom of all pipe risers for pipe larger than 3-1/2 inches in diameter. Laterally brace flexible couplings or joints without interfering with the action of the flexible coupling or joint. Cast iron waste and vent piping need only comply with these provisions when caulked joints are used. Flexible bell and spigot pipe joints using rubber gaskets may be used at each branch adjacent to tees and elbows for underground waste piping inside of building to satisfy these requirements.

3.4 PIPE SLEEVES

Size pipe sleeves in interior non-fire rated walls as indicated on the drawings to provide clearances that will permit differential movement of piping without the piping striking the pipe sleeve.

3.5 SPREADERS

Provide spreaders between adjacent piping runs to prevent contact during seismic activity whenever pipe or insulated pipe surfaces are less than 4 inches apart. Apply spreaders at same interval as sway braces at an equal distance between the sway braces. If rack type hangers are used where the pipes are restrained from contact by mounting to the rack, spreaders are not required for pipes mounted in the rack. Apply spreaders to surface of bare pipe and over insulation on insulated pipes utilizing high-density inserts and pipe protection shields in accordance with the requirements of Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

3.6 SWAY BRACES FOR PIPING

Provide sway braces to prevent movement of the pipes under seismic loading. Provide braces in both the longitudinal and transverse directions, relative to the axis of the pipe. Provide sufficient braces for equipment to resist a horizontal force as specified in UFC 3-301-01 without exceeding safe working stress of bracing components. Provide bracing that does not interfere with thermal expansion requirements for the pipes as described in other sections of these specifications. For

seismic analysis of horizontal pipes, the equivalent static force must be considered to act concurrently with the full dead load of the pipe, including contents.

3.6.1 Transverse Sway Bracing

Provide transverse sway bracing for steel and copper pipe at intervals not to exceed those shown on the drawings. All runs (length of pipe between end joints) must have a minimum of transverse bracing at each end. Provide transverse sway bracing for pipes of materials other than steel and copper at intervals not to exceed the hanger spacing as specified in Section 22 00 00 PLUMBING, GENERAL PURPOSE.

3.6.2 Longitudinal Sway Bracing

Provide longitudinal sway bracing at 40 foot intervals unless otherwise indicated. All runs (length of pipe between end joints) must have one longitudinal brace minimum. Construct sway braces in accordance with the drawings. Do not use branch lines, walls, or floors as sway braces.

3.6.3 Vertical Runs

Run is defined as length of pipe between end joints. Do not brace vertical runs of piping no more than 10 foot vertical intervals. Braces for vertical runs must be above the center of gravity of the segment being braced. Flexible couplings must be provided at the bottoms of risers for pipes larger than 3.5 in. (89 mm) in diameter. Flexible couplings and expansion joints must be braced laterally and longitudinally unless such bracing would interfere with the action of the couplings or joints. When pipes enter buildings, flexible couplings must be provided to allow for relative movement between the soil and building. Construct all sway braces in accordance with the drawings. Attach sway braces to the structural system. Do not connect to branch lines, walls, or floors.

3.6.4 Clamps and Hangers

Apply clamps or hangers on uninsulated pipes directly to pipe. Insulated piping must have clamps or hangers applied over insulation in accordance with Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

Hanger rod stiffener angle or strut bracing must be securely attached by a series of attachment clamps manufactured from a one piece metal stamping and must include all require attachment hardware and locking nuts. Attachment clamps made from aluminum or cast iron must not be used in seismic applications. Do not weld vertical braces to hanger rods.

3.7 SWAY BRACES FOR DUCTS

3.7.1 Braced Ducts

Provide bracing details and spacing for rectangular and round ducts in accordance with SMACNA 1981. However, the design seismic loadings for these items must not be less than loadings obtained using the procedures in UFC 3-301-01. Bracing must not attach to duct joints. Use shortest screws possible when penetrating ductwork to minimize airflow noise inside duct.

3.7.2 Unbraced Ducts

Attach hangers for unbraced ducts to the duct within 2 inches of the top of the duct with a minimum of two #10 sheet metal screws in accordance with FEMA P-414. Use shortest screws possible when penetrating ductwork to minimize airflow noise inside duct. Install unbraced ducts with a 6 inch minimum clearance to vertical ceiling hanger wires.

3.8 EQUIPMENT

3.8.1 General

Ensure housekeeping pads have adequate space to mount equipment and seismic restraint devices allowing adequate edge distance and embedment depth for restraint anchor bolts. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength. Install neoprene grommet washers or till the gap with epoxy on equipment anchor bolts where clearance between anchor and equipment support hole exceeds 0.125 inches.

3.8.2 Controls

Ensure that controls for critical equipment that must remain operational after an earthquake are certified per paragraph 3.11 SPECIAL TESTING FOR SEISMIC-RESISTING EQUIPMENT and are served by emergency power as required.

3.9 ANCHOR BOLTS

3.9.1 Cast-in-Place Anchor Bolts

Use templates to locate cast-in-place bolts accurately and securely in formwork. Anchor bolts must have an embedded straight length equal to at least 12 times nominal diameter of the bolt. Anchor bolts that exceed the normal depth of equipment foundation piers or pads must either extend into concrete floor or the foundation or be increased in depth to accommodate bolt lengths.

3.9.2 Drilled-In Anchor Bolts

Drill holes with rotary impact hammer drills Drill bits must be of diameters as specified by the anchor manufacturer. Unless otherwise shown on the Drawings, all holes must be drilled perpendicular to the concrete surface. Where anchors are permitted to be installed in cored holes, use core bits with matched tolerances as specified by the manufacturer. Properly clean cored hole per manufacturer's instructions. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Exercise care in coring or drilling to avoid damaging existing reinforcing or embedded items. Notify the COR if reinforcing steel or other embedded items are encountered during drilling. Take precautions as necessary to avoid damaging prestressing tendons, electrical and telecommunications conduit, and gas lines. Unless otherwise specified, do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength. Perform anchor installation in accordance with manufacturer instructions.

3.9.2.1 Wedge Anchors, Heavy-Duty Sleeve Anchors, and Undercut Anchors

Protect threads from damage during anchor installation. Heavy-duty sleeve

anchors must be installed with sleeve fully engaged in part to be fastened. Set anchors to manufacturer's recommended torque, using a torque wrench. Following attainment of 10% of the specified torque, 100% of the specified torque must be reached within 7 or fewer complete turns of the nut. If the specified torque is not achieved within the required number of turns, the anchor must be removed and replaced unless otherwise directed by the Engineer.

3.9.2.2 Cartridge Injection Adhesive Anchors

Where approved for seismic application, clean all holes per manufacturer instructions to remove loose material and drilling dust prior to installation of adhesive. Inject adhesive into holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive. Follow manufacturer recommendations to ensure proper mixing of adhesive components. Sufficient adhesive must be injected in the hole to ensure that the annular gap is filled to the surface. Remove excess adhesive from the surface. Shim anchors with suitable device to center the anchor in the hole. Do not disturb or load anchors before manufacturer specified cure time has elapsed.

3.9.2.3 Capsule Anchors

Where approved for seismic application, perform drilling and setting operations in accordance with manufacturer instructions. Clean all holes to remove loose material and drilling dust prior to installation of adhesive. Remove water from drilled holes in such a manner as to achieve a surface dry condition. Capsule anchors must be installed with equipment conforming to manufacturer recommendations. Do not disturb or load anchors before manufacturer specified cure time has elapsed.

Observe manufacturer recommendations with respect to installation temperatures for cartridge injection adhesive anchors and capsule anchors.

3.10 ANCHOR BOLT TESTING

Test in place expansion and chemically bonded anchors not more than 24 hours after installation of the anchor, conducted by an independent testing agency; testing must be performed on random anchor bolts as described below.

3.10.1 Torque Wrench Testing

Perform torque wrench testing on not less than 50 percent of the total installed applied torque expansion anchors and at least one anchor for every piece of equipment containing more than two anchors. The test torque must equal the minimum required installation torque as required by the bolt manufacturer. Calibrate torque wrenches at the beginning of each day the torque tests are performed. Recalibrate torque wrenches for each bolt diameter whenever tests are run on bolts of various diameters. Apply torque between 20 and 100 percent of wrench capacity. Reach the test torque within one half turn of the nut, except for 3/8 inch sleeve anchors which must reach their torque by one quarter turn of the nut. If any anchor fails the test, test similar anchors not previously tested until 20 consecutive anchors pass. Failed anchors must be retightened and retested to the specified torque; if the anchor still fails the test it must be replaced.

3.10.2 Pullout Testing

Test expansion and chemically bonded anchors by applying a pullout load using a hydraulic ram attached to the anchor bolt. Testing must be in accordance with ASTM E488/E488M or ICC ES AC193. At least 10 percent of each type and size of anchors, but not less than 3 per day must be tested. Apply the load to the anchor without removing the nut; when that is not possible, the nut must be removed and a threaded coupler must be installed of the same tightness as the original nut. Check the test setup to verify that the anchor is not restrained from withdrawing by the baseplate, the test fixture, or any other fixtures. The support for the testing apparatus must be at least 1.5 times the embedment length away from the bolt being tested. Load each tested anchor to 1 times the design tension value for the anchor. The anchor must have no observable movement at the test load. If any anchor fails the test, similar type and size anchors not previously tested must be tested until 10 percent of those type consecutive anchors pass. Remove and replace failed anchors. Fill empty anchor holes and patch failed anchor locations with high-strength non-shrink, nonmetallic grout.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 05 93

TESTING, ADJUSTING, AND BALANCING FOR HVAC
11/15

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. (AMCA)

AMCA 203	(1990; R 2011) Field Performance Measurements of Fan Systems

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 62.1	(2016) Ventilation for Acceptable Indoor Air Quality

ASSOCIATED AIR BALANCE COUNCIL (AABC)

AABC MN-1	(2002; 6th ed) National Standards for Total System Balance
AABC MN-4	(1996) Test and Balance Procedures

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)

NEBB MASV	(2006) Procedural Standards for Measurements and Assessment of Sound and Vibration
NEBB PROCEDURAL STANDARDS	(2015) Procedural Standards for TAB (Testing, Adjusting and Balancing) Environmental Systems

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1780	(2002) HVAC Systems - Testing, Adjusting and Balancing, 3rd Edition
SMACNA 1858	(2004) HVAC Sound And Vibration Manual - First Edition
SMACNA 1972 CD	(2012) HVAC Air Duct Leakage Test Manual - 2nd Edition

1.2 DEFINITIONS

a. AABC: Associated Air Balance Council

b. COTR: Contracting Officer's Technical Representative

c. DALT: Duct air leakage test

d. DALT'd: Duct air leakage tested

e. HVAC: Heating, ventilating, and air conditioning; or heating, ventilating, and cooling

f. NEBB: National Environmental Balancing Bureau

g. Out-of-tolerance data: Pertains only to field acceptance testing of Final DALT or TAB report. When applied to DALT work, this phase means "a leakage rate measured during DALT field acceptance testing which exceeds the leakage rate allowed by Appendix D REQUIREMENTS FOR DUCT AIR LEAK TESTING." When applied to TAB work this phase means "a measurement taken during TAB field acceptance testing which does not fall within the range of plus 5 to minus 5 percent of the original measurement reported on the TAB Report for a specific parameter."

h. Season of maximum heating load: The time of year when the outdoor temperature at the project site remains within plus or minus 30 degrees Fahrenheit of the project site's winter outdoor design temperature, throughout the period of TAB data recording.

i. Season of maximum cooling load: The time of year when the outdoor temperature at the project site remains within plus or minus 5 degrees Fahrenheit of the project site's summer outdoor design temperature, throughout the period of TAB data recording.

j. Season 1, Season 2: Depending upon when the project HVAC is completed and ready for TAB, Season 1 is defined, thereby defining Season 2. Season 1 could be the season of maximum heating load, or the season of maximum cooling load.

k. Sound measurements terminology: Defined in AABC MN-1, NEBB MASV, or SMACNA 1858 (TABB).

l. TAB: Testing, adjusting, and balancing (of HVAC systems)

m. TAB'd: HVAC Testing/Adjusting/Balancing procedures performed

n. TAB Agency: TAB Firm

o. TAB team field leader: TAB team field leader

p. TAB team supervisor: TAB team engineer

q. TAB team technicians: TAB team assistants

r. TABB: Testing Adjusting and Balancing Bureau

1.2.1 Similar Terms

In some instances, terminology differs between the Contract and the TAB Standard primarily because the intent of this Section is to use the industry standards specified, along with additional requirements listed herein to produce optimal results.

The following table of similar terms is provided for clarification only.

Contract requirements take precedent over the corresponding AABC, NEBB, or TABB requirements where differences exist.

SIMILAR TERMS			
Contract Term	AABC Term	NEBB Term	TABB Term
TAB Standard	National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning Systems	Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems	International Standards for Environmental Systems Balance
TAB Specialist	TAB Engineer	TAB Supervisor	TAB Supervisor
Systems Readiness Check	Construction Phase Inspection	Field Readiness Check & Preliminary Field Procedures	Field Readiness Check & Prelim. Field Procedures

1.3 WORK DESCRIPTION

The work includes duct air leakage testing (DALT) and testing, adjusting, and balancing (TAB) of new heating, ventilating, and cooling (HVAC) air and water distribution systems including equipment and performance data, ducts, and piping which are located within, on, under, between, and adjacent to buildings.

Perform TAB in accordance with the requirements of the TAB procedural standard recommended by the TAB trade association that approved the TAB Firm's qualifications. Comply with requirements of AABC MN-1, NEBB PROCEDURAL STANDARDS, or SMACNA 1780 (TABB) as supplemented and modified by this specification section. All recommendations and suggested practices contained in the TAB procedural standards are considered mandatory.

Conduct DALT and TAB of the indicated existing systems and equipment and submit the specified DALT and TAB reports for approval. Conduct DALT testing in compliance with the requirements specified in SMACNA 1972 CD, except as supplemented and modified by this section. Conduct DALT and TAB work in accordance with the requirements of this section.

1.3.1 Air Distribution Systems

Test, adjust, and balance systems (TAB) in compliance with this section. Obtain Contracting Officer's written approval before applying insulation to exterior of air distribution systems as specified under Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

1.3.2 Water Distribution Systems

TAB systems in compliance with this section. Obtain Contracting Officer's written approval before applying insulation to water distribution systems as specified under Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. At Contractor's option and with Contracting Officer's written

approval, the piping systems may be insulated before systems are TAB'd.

Terminate piping insulation immediately adjacent to each flow control valve, automatic control valve, or device. Seal the ends of pipe insulation and the space between ends of pipe insulation and piping, with waterproof vapor barrier coating.

After completion of work under this section, insulate the flow control valves and devices as specified under Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

1.3.3 TAB SCHEMATIC DRAWINGS

Show the following information on TAB Schematic Drawings:

1. A unique number or mark for each piece of equipment or terminal.

2. Air quantities at air terminals.

3. Air quantities and temperatures in air handling unit schedules.

4. Water quantities and temperatures in thermal energy transfer equipment schedules.

5. Water quantities and heads in pump schedules.

6. Water flow measurement fittings and balancing fittings.

7. Ductwork Construction and Leakage Testing Table that defines the DALT test requirements, including each applicable HVAC duct system ID or mark, duct pressure class, duct seal class, and duct leakage test pressure. This table is included in the file for Graphics for Unified Facilities Guide Specifications: http://www.wbdg.org/ffc/dod/unified-facilities-guide-specifications-ufgs/forms-gra

The Testing, Adjusting, and Balancing (TAB) Specialist must review the Contract Plans and Specifications and advise the Contracting Officer of any deficiencies that would prevent the effective and accurate TAB of the system, including records of existing conditions, and systems readiness check. The TAB Specialist must provide a Design Review Report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

Submit three copies of the TAB Schematic Drawings and Report Forms to the Contracting Officer, no later than 21 days prior to the start of TAB field measurements.

1.3.4 Related Requirements

Requirements for price breakdown of HVAC TAB work are specified in Section 01 20 00 PRICE AND PAYMENT PROCEDURES.

Requirements for construction scheduling related to HVAC TAB work are specified in Section 01 32 16.00 20 SMALL PROJECT CONSTRUCTION PROGRESS SCHEDULES.

Section 23 30 00 HVAC AIR DISTRIBUTION applies to work specified in this section.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Records of Existing Conditions; G

Independent TAB Agency and Personnel Qualifications; G

TAB Design Review Report; G

SD-02 Shop Drawings

TAB Schematic Drawings and Report Forms; G

SD-03 Product Data

Equipment and Performance Data; G

TAB Related HVAC Submittals; G

A list of the TAB Related HVAC Submittals, no later than days after the approval of the TAB team engineer and assistant.

SD-06 Test Reports

Completed Pre-Final DALT Report; G

Certified Final DALT Report; G

Prerequisite HVAC Work Checkout List For Proportional Balancing; G

Certified Final TAB Report for Proportional Balancing; G

Prerequisite HVAC Work Checkout List For Season 1; G

Certified Final TAB Report for Season 1; G

Prerequisite HVAC Work Checkout List For Season 2; G

Certified Final TAB Report for Season 2; G

TAB Design Review Report; G

SD-07 Certificates

Independent TAB Agency and Personnel Qualifications; G

DALT and TAB Submittal and Work Schedule; G

TAB Pre-Field Engineering Report; G

Instrument Calibration Certificates; G

DALT and TAB Procedures Summary; G

Completed Pre-Final DALT Work Checklist; G

Advance Notice of Pre-Final DALT Field Work; G

Advance Notice of TAB Field Work for Proportional Balancing; G

Advance Notice of TAB Field Work for Season 1; G

Advance Notice of TAB Field Work for Season 2 G

1.5 QUALITY ASSURANCE

1.5.1 Independent TAB Agency and Personnel Qualifications

To secure approval for the proposed agency, submit information certifying that the TAB agency is a first tier subcontractor who is not affiliated with any other company participating in work on this contract, including design, furnishing equipment, or construction. Further, submit the following, for the agency, to Contracting Officer for approval:

a. Independent AABC or NEBB or TABB TAB agency:

TAB agency: AABC registration number and expiration date of current certification; or NEBB certification number and expiration date of current certification; or TABB certification number and expiration date of current certification.

TAB team supervisor: Name and copy of AABC or NEBB or TABB TAB supervisor certificate and expiration date of current certification.

TAB team field leader: Name and documented evidence that the team field leader has satisfactorily performed full-time supervision of TAB work in the field for not less than 3 years immediately preceding this contract's bid opening date.

TAB team field technicians: Names and documented evidence that each field technician has satisfactorily assisted a TAB team field leader in performance of TAB work in the field for not less than one year immediately preceding this contract's bid opening date.

Current certificates: Registrations and certifications are current, and valid for the duration of this contract. Renew Certifications which expire prior to completion of the TAB work, in a timely manner so that there is no lapse in registration or certification. TAB agency or TAB team personnel without a current registration or current certification are not to perform TAB work on this contract.

b. TAB Team Members: TAB team approved to accomplish work on this contract are full-time employees of the TAB agency. No other personnel is allowed to do TAB work on this contract.

c. Replacement of TAB team members: Replacement of members may occur if each new member complies with the applicable personnel qualifications and each is approved by the Contracting Officer.

1.5.1.1 TAB Standard

Perform TAB in accordance with the requirements of the standard under which the TAB Firm's qualifications are approved, i.e., AABC MN-1, NEBB PROCEDURAL STANDARDS, or SMACNA 1780 unless otherwise specified herein. All recommendations and suggested practices contained in the TAB Standard are considered mandatory. Use the provisions of the TAB Standard, including checklists, report forms, etc., as nearly as practical, to satisfy the Contract requirements. Use the TAB Standard for all aspects of TAB, including qualifications for the TAB Firm and Specialist and calibration of TAB instruments. Where the instrument manufacturer calibration recommendations are more stringent than those listed in the TAB Standard, adhere to the manufacturer's recommendations.

All quality assurance provisions of the TAB Standard such as performance guarantees are part of this contract. For systems or system components not covered in the TAB Standard, TAB procedures must be developed by the TAB Specialist. Where new procedures, requirements, etc., applicable to the Contract requirements have been published or adopted by the body responsible for the TAB Standard used (AABC, NEBB, or TABB), the requirements and recommendations contained in these procedures and requirements are considered mandatory, including the latest requirements of ASHRAE 62.1.

1.5.1.2 Qualifications

a. TAB Firm

The TAB Firm must be either a member of AABC or certified by the NEBB or the TABB and certified in all categories and functions where measurements or performance are specified on the plans and specifications, including TAB of environmental systems .

Certification must be maintained for the entire duration of duties specified herein. If, for any reason, the firm loses subject certification during this period, the Contractor must immediately notify the Contracting Officer and submit another TAB Firm for approval. Any firm that has been the subject of disciplinary action by either the AABC, the NEBB, or the TABB within the five years preceding Contract Award is not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections to be performed by the TAB Firm will be considered invalid if the TAB Firm loses its certification prior to Contract completion and must be performed by an approved successor.

These TAB services are to assist the prime Contractor in performing the quality oversight for which it is responsible. The TAB Firm must be a prime subcontractor of the Contractor and be financially and corporately independent of the mechanical subcontractor, reporting directly to and paid by the Contractor.

b. TAB Specialist

The TAB Specialist must be either a member of AABC,an experienced technician of the Firm certified by the NEBB, or a Supervisor certified by the TABB. The certification must be maintained for the entire duration of duties specified herein. If, for any reason, the

Specialist loses subject certification during this period, immediately notify the Contracting Officer and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC, the NEBB, or the TABB within the five years preceding Contract Award is not eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB Specialist will be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by the approved successor.

c. TAB Specialist Responsiblities

TAB Specialist responsibilities include all TAB work specified herein and in related sections under his direct guidance. The TAB specialist is required to be onsite on a daily basis to direct TAB efforts. The TAB Specialist must participate in the commissioning process.

1.5.1.3 TAB Related HVAC Submittals

The TAB Specialist must prepare a list of the submittals from the Contract Submittal Register that relate to the successful accomplishment of all HVAC TAB. Accompany the submittals identified on this list with a letter of approval signed and dated by the TAB Specialist when submitted to the Government. Ensure that the location and details of ports, terminals, connections, etc., necessary to perform TAB are identified on the submittals.

1.5.2 Responsibilities

The Contractor is responsible for ensuring compliance with the requirements of this section. The following delineation of specific work responsibilities is specified to facilitate TAB execution of the various work efforts by personnel from separate organizations. This breakdown of specific duties is specified to facilitate adherence to the schedule listed in the paragraph TAB SUBMITTAL AND WORK SCHEDULE.

1.5.2.1 Contractor

a. TAB personnel: Ensure that the DALT work and the TAB work is accomplished by a group meeting the requirements specified in the paragraph TAB PERSONNEL QUALIFICATION REQUIREMENTS.

b. Pre-DALT/TAB meeting: Attend the meeting with the TAB Supervisor, and ensure that a representative is present for the sheetmetal contractor, mechanical contractor, electrical contractor, and automatic temperature controls contractor.

c. HVAC documentation: Furnish one complete set of the following HVAC-related documentation to the TAB agency:

(1) Contract drawings and specifications

(2) Approved submittal data for equipment

(3) Construction work schedule

(4) Up-to-date revisions and change orders for the previously listed items

d. Submittal and work schedules: Ensure that the schedule for submittals and work required by this section and specified in the paragraph TAB SUBMITTAL AND WORK SCHEDULE is met.

e. Coordination of supporting personnel:

Provide the technical personnel, such as factory representatives or HVAC controls installer required by the TAB field team to support the DALT and the TAB field measurement work.

Provide equipment mechanics to operate HVAC equipment and ductwork mechanics to provide the field designated test ports to enable TAB field team to accomplish the DALT and the TAB field measurement work. Ensure these support personnel are present at the times required by the TAB team, and cause no delay in the DALT and the TAB field work.

Conversely, ensure that the HVAC controls installer has required support from the TAB team field leader to complete the controls check out.

f. Deficiencies: Ensure that the TAB Agency supervisor submits all Design/Construction deficiency notifications directly to the Contracting officer within 3 days after the deficiency is encountered. Further, ensure that all such notification submittals are complete with explanation, including documentation, detailing deficiencies.

g. Prerequisite HVAC work: Complete check out and debugging of HVAC equipment, ducts, and controls prior to the TAB engineer arriving at the project site to begin the TAB work. Debugging includes searching for and eliminating malfunctioning elements in the HVAC system installations, and verifying all adjustable devices are functioning as designed. Include as prerequisite work items, the deficiencies pointed out by the TAB team supervisor in the design review report.

h. Prior to the TAB field team's arrival, ensure completion of the applicable inspections and work items listed in the TAB team supervisor's pre-field engineering report. Do not allow the TAB team to commence TAB field work until all of the following are completed.

(1) HVAC system installations are fully complete.

(2) HVAC prerequisite checkout work lists specified in the paragraph PRE-FIELD TAB ENGINEERING REPORT are completed, submitted, and approved. Ensure that the TAB Agency gets a copy of the approved prerequisite HVAC work checklist.

(3) DALT field checks for all systems are completed.

(4) HVAC system filters are clean for both Season 1 and Season 2 TAB field work.

i. Advance notice: Furnish to the Contracting Officer with advance written notice for the commencement of the DALT field work and for the commencement of the TAB field work.

j. Insulation work: For required DALT work , ensure that insulation is not installed on ducts to be DALT'd until DALT work on the subject

ducts is complete. Later, ensure that openings in duct and machinery insulation coverings for TAB test ports are marked, closed and sealed.

1.5.2.2 TAB Agency

Provide the services of a TAB team which complies with the requirements of the paragraph INDEPENDENT TAB AGENCY PERSONNEL QUALIFICATIONS. The work to be performed by the TAB agency is limited to testing, adjusting, and balancing of HVAC air and water systems to satisfy the requirements of this specification section.

1.5.2.3 TAB Team Supervisor

a. Overall management: Supervise and manage the overall TAB team work effort, including preliminary and technical DALT and TAB procedures and TAB team field work.

b. Pre-DALT/TAB meeting: Attend meeting with Contractor.

c. Design review report: Review project specifications and accompanying drawings to verify that the air systems and water systems are designed in such a way that the TAB engineer can accomplish the work in compliance with the requirements of this section. Verify the presence and location of permanently installed test ports and other devices needed, including gauge cocks, thermometer wells, flow control devices, circuit setters, balancing valves, and manual volume dampers.

d. Support required: Specify the technical support personnel required from the Contractor other than the TAB agency; such as factory representatives for temperature controls or for complex equipment. Inform the Contractor in writing of the support personnel needed and when they are needed. Furnish the notice as soon as the need is anticipated, either with the design review report, or the pre-field engineering report, the during the DALT or TAB field work.

e. Pre-field DALT preliminary notification: Monitor the completion of the duct installation of each system and provide the necessary written notification to the Contracting Officer.

f. Pre-field engineering report: Utilizing the following HVAC-related documentation; contract drawings and specifications, approved submittal data for equipment, up-to-date revisions and change orders; prepare this report.

g. Prerequisite HVAC work checklist: Ensure the Contractor gets a copy of this checklist at the same time as the pre-field engineering report is submitted.

h. Technical assistance for DALT work.

(1) Technical assistance: Provide immediate technical assistance to TAB field team.

(2) DALT field visit: Near the end of the DALT field work effort, visit the contract site to inspect the HVAC installation and the progress of the DALT field work. Conduct a site visit to the extent necessary to verify correct procedures are being implemented and to confirm the accuracy of the Pre-final DALT Report data which has been reported. Also, perform sufficient

evaluation to allow the TAB supervisor to issue certification of the final report. Conduct the site visit full-time for a minimum of one 8 hour workday duration.

i. Final DALT report: Certify the DALT report. This certification includes the following work:

(1) Review: Review the Pre-final DALT report data. From these field reports, prepare the Certified Final DALT report.

(2) TAB Verification: Verify adherence, by the TAB field team, to the procedures specified in this section.

j. Technical Assistance for TAB Work: Provide immediate technical assistance to the TAB field team for the TAB work.

(1) TAB field visit: At the midpoint of the Season 1 and Season 2 TAB field work effort, visit the contract site to inspect the HVAC installation and the progress of the TAB field work. Conduct site visit full-time for a minimum of one 8 hour workday duration.

(2) TAB field visit: Near the end of the TAB field work effort, visit the contract site to inspect the HVAC installation and the progress of the TAB field work. Conduct site visit full-time for a minimum of one 8 hour workday duration. Review the TAB final report data and certify the TAB final report.

k. Certified TAB report: Certify the TAB report. This certification includes the following work:

(1) Review: Review the TAB field data report. From this field report, prepare the certified TAB report.

(2) Verification: Verify adherence, by the TAB field team, to the TAB plan prescribed by the pre-field engineering report and verify adherence to the procedures specified in this section.

l. Design/Construction deficiencies: Within 3 working days after the TAB Agency has encountered any design or construction deficiencies, the TAB Supervisor must submit written notification directly to the Contracting Officer, with a separate copy to the Contractor, of all such deficiencies. Provide in this submittal a complete explanation, including supporting documentation, detailing deficiencies. Where deficiencies are encountered that are believed to adversely impact successful completion of TAB, the TAB Agency must issue notice and request direction in the notification submittal.

m. TAB Field Check: The TAB team supervisor must attend and supervise Season 1 and Season 2 TAB field check.

1.5.2.4 TAB Team Field Leader

a. Field manager: Manage, in the field, the accomplishment of the work specified in Part 3, EXECUTION.

b. Full time: Be present at the contract site when DALT field work or TAB field work is being performed by the TAB team; ensure day-to-day TAB team work accomplishments are in compliance with this section.

c. Prerequisite HVAC work: Do not bring the TAB team to the contract site until a copy of the prerequisite HVAC Checklist, with all work items certified by the Contractor to be working as designed, reaches the office of the TAB Agency.

1.5.3 Sequencing and Scheduling

1.5.3.1 DALT and TAB Submittal and Work Schedule

Comply with additional requirements specified in Appendix C: DALT AND TAB SUBMITTAL AND WORK SCHEDULE included at the end of this section.

a. TAB Design Review Report

Submit typed report describing omissions and deficiencies in the HVAC system's design that would preclude the TAB team from accomplishing the duct leakage testing work and the TAB work requirements of this section. Provide a complete explanation including supporting documentation detailing the design deficiency. State that no deficiencies are evident if that is the case.

b. Pre-Field DALT Preliminary Notification

Notification: On completion of the installation of each duct system indicated to be DALT'd, notify the Contracting Officer in writing within 7 calendar days after completion.

1.5.3.2 TAB Pre-Field Engineering Report

Submit report containing the following information:

a. Step-by-step TAB procedure:

(1) Strategy: Describe the method of approach to the TAB field work from start to finish. Include in this description a complete methodology for accomplishing each seasonal TAB field work session.

(2) Air System Diagrams: Use the contract drawings and duct fabrication drawings if available to provide air system diagrams in the report showing the location of all terminal outlet supply, return, exhaust and transfer registers, grilles and diffusers. Use a key numbering system on the diagrams which identifies each outlet contained in the outlet airflow report sheets. Show intended locations of all traverses and static pressure readings.

(3) Procedural steps: Delineate fully the intended procedural steps to be taken by the TAB field team to accomplish the required TAB work of each air distribution system and each water distribution system. Include intended procedural steps for TAB work for subsystems and system components.

b. Pre-field data: Submit AABC or NEBB or SMACNA 1780 data report forms with the following pre-field information filled in:

(1) Design data obtained from system drawings, specifications, and approved submittals.

(2) Notations detailing additional data to be obtained from the contract site by the TAB field team.

(3) Designate the actual data to be measured in the TAB field work.

(4) Provide a list of the types of instruments, and the measuring range of each, which are anticipated to be used for measuring in the TAB field work. By means of a keying scheme, specify on each TAB data report form submitted, which instruments will be used for measuring each item of TAB data. If the selection of which instrument to use, is to be made in the field, specify from which instruments the choice will be made. Place the instrument key number in the blank space where the measured data would be entered.

c. Prerequisite HVAC work checkout list: Provide a list of inspections and work items which are to be completed by the Contractor. This list must be acted upon and completed by the Contractor and then submitted and approved by the Contracting Officer prior to the TAB team coming to the contract site.

At a minimum, a list of the applicable inspections and work items listed in the NEBB PROCEDURAL STANDARDS, Section III, "Preliminary TAB Procedures" under paragraphs titled, "Air Distribution System Inspection" and "Hydronic Distribution System Inspection" must be provided for each separate system to be TAB'd.

1.5.4 Subcontractor Special Requirements

Perform all work in this section in accordance with the paragraph SUBCONTRACTOR SPECIAL REQUIREMENTS in Section 01 30 00 ADMINISTRATIVE REQUIREMENTS, stating that all contract requirements of this section must be accomplished directly by a first tier subcontractor. No work may be performed by a second tier subcontractor.

1.5.5 Instrument Calibration Certificates

It is the responsibility of the TAB firm to provide instrumentation that meets the minimum requirements of the standard under which the TAB Firm's qualifications are approved for use on a project. Instrumentation must be in proper operating condition and must be applied in accordance with the instrumentation's manufacturer recommendations.

All instrumentation must bear a valid NIST traceable calibration certificate during field work and during government acceptance testing. All instrumentation must be calibrated within no later than one year of the date of TAB work or government acceptance testing field work.

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

3.1 WORK DESCRIPTIONS OF PARTICIPANTS

Comply with requirements of this section as specified in Appendix A WORK DESCRIPTIONS OF PARTICIPANTS.

3.2 PRE-DALT/TAB MEETING

Meet with the Contracting Officer's technical representative (COTR) to

develop a mutual understanding relative to the details of the DALT work and TAB work requirements. Ensure that the TAB supervisor is present at this meeting. Requirements to be discussed include required submittals, work schedule, and field quality control.

3.3 DALT PROCEDURES

3.3.1 Instruments, Consumables and Personnel

Provide instruments, consumables and personnel required to accomplish the DALT field work. Follow the same basic procedure specified below for TAB Field Work, including maintenance and calibration of instruments, accuracy of measurements, preliminary procedures, field work, workmanship and treatment of deficiencies. Calibrate and maintain instruments in accordance with manufacturer's written procedures.

3.3.2 Advance Notice of Pre-Final DALT Field Work

On completion of the installation of each duct system indicated to be DALT'd, notify the Contracting Officer in writing prior to the COTR's duct selection field visit.

3.3.3 Ductwork To Be DALT'd

From each duct system indicated as subject to DALT, the COTR will randomly select sections of each completed duct system for testing by the Contractor's TAB Firm. Sections of duct systems subject to DALT will include 100 percent of main ducts, branch main ducts, branch ducts and plenums for supply, return, exhaust, and plenum ductwork.

3.3.4 DALT Testing

Perform DALT on the HVAC duct sections of each system as selected by the COTR. Use the duct class, seal class, leakage class and the leak test pressure data indicated on the drawings, to comply with the procedures specified in SMACNA 1972 CD.

In spite of specifications of SMACNA 1972 CD to the contrary, DALT ductwork of construction class of 3-inch water gauge static pressure and below if indicated to be DALT'd. Complete DALT work on the COTR selected ductwork within 48 hours after the particular ductwork was selected for DALT. Separately conduct DALT work for large duct systems to enable the DALT work to be completed in 48 hours.

3.3.5 Completed Pre-Final DALT Report

After completion of the DALT work, prepare a Pre-final DALT Report meeting the additional requirements specified in Appendix B REPORTS - DALT and TAB. Data required by those data report forms shall be furnished by the TAB team. Prepare the report neatly and legibly; the Pre-final DALT report shall provide the basis for the Final DALT Report.

TAB supervisor shall review, approve and sign the Pre-Final DALT Report and submit this report within one day of completion of DALT field work. Verbally notify the COTR that the field check of the Pre-Final DALT Report data can commence.

3.3.6 Quality Assurance - COTR DALT Field Acceptance Testing

In the presence of the COTR and TAB team field leader, verify for accuracy Pre-final DALT Report data selected by the COTR. For each duct system, this acceptance testing shall be conducted on a maximum of 50 percent of the duct sections DALT'd.

Further, if any data on the Pre-final DALT report form for a given duct section is out-of-tolerance, then field acceptance testing shall be conducted on data for one additional duct section, preferably in the same duct system, in the presence of the COTR.

3.3.7 Additional COTR Field Acceptance Testing

If any of the duct sections checked for a given system are determined to have a leakage rate measured that exceeds the leakage rate allowed by SMACNA Leak Test Manual for an indicated duct construction class and sealant class, terminate data checking for that section. The associated Pre-final DALT Report data for the given duct system will be disapproved. Make the necessary corrections and prepare a revised Pre-final DALT Report. Reschedule a field check of the revised report data with the COTR.

3.3.8 Certified Final DALT Report

On successful completion of all field checks of the Pre-Final DALT Report data for all systems, the TAB Supervisor shall assemble, review, approve, sign and submit the Final DALT Report in compliance with Appendix B REPORTS - DALT and TAB to the Contracting Officer for approval.

3.3.9 Prerequisite for TAB Field Work

Do not commence TAB field work prior to the completion and approval, for all systems, of the Final DALT Report.

3.4 TAB PROCEDURES

3.4.1 TAB Field Work

Test, adjust, and balance the HVAC systems until measured flow rates (air and water flow) are within plus or minus 5 percent of the design flow rates as specified or indicated on the contract documents.

That is, comply with the the requirements of AABC MN-1 or SMACNA 1780 (TABB) and SMACNA 1858 (TABB),except as supplemented and modified by this section.

Provide instruments and consumables required to accomplish the TAB work. Calibrate and maintain instruments in accordance with manufacturer's written procedures.

Test, adjust, and balance the HVAC systems until measured flow rates (air and water flow) are within plus or minus 5 percent of the design flow rates as specified or indicated on the contract documents. Conduct TAB work, including measurement accuracy, and sound measurement work in conformance with the AABC MN-1 and AABC MN-4, or NEBB TABES and NEBB MASV, or SMACNA 1780 (used by TABB) and SMACNA 1858 sound measurement procedures, except as supplemented and modified by this section. The only water flow and air flow reporting which can be deferred until the Season 2 is that data which would be affected in terms of accuracy due to outside

ambient conditions.

3.4.2 Preliminary Procedures

Use the approved pre-field engineering report as instructions and procedures for accomplishing TAB field work. TAB engineer is to locate, in the field, test ports required for testing. It is the responsibility of the sheet metal contractor to provide and install test ports as required by the TAB engineer.

3.4.3 TAB Air Distribution Systems

3.4.3.1 Units With Coils

Report heating and cooling performance capacity tests for hot water, chilled water, DX and steam coils for the purpose of verifying that the coils meet the indicated design capacity. Submit the following data and calculations with the coil test reports:

a. For air handlers with capacities greater than 7.5 tons (90,000 Btu) cooling, such as factory manufactured units, central built-up units and rooftop units, conduct capacity tests in accordance with AABC MN-4, procedure 3.5, "Coil Capacity Testing."

   Do not determine entering and leaving wet and dry bulb temperatures by single point measurement, but by the average of multiple readings in compliance with paragraph 3.5-5, "Procedures", (in subparagraph d.) of AABC MN-4, Procedure 3.5, "Coil Capacity Testing."

   Submit part-load coil performance data from the coil manufacturer converting test conditions to design conditions; use the data for the purpose of verifying that the coils meet the indicated design capacity in compliance with AABC MN-4, Procedure 3.5, "Coil Capacity Testing," paragraph 3.5.7, "Actual Capacity Vs. Design Capacity" (in subparagraph c.).

b. For units with capacities of 7.5 tons (90,000 Btu) or less, such as fan coil units, duct mounted reheat coils associated with VAV terminal units, and unitary units, such as through-the-wall heat pumps:

   Determine the apparent coil capacity by calculations using single point measurement of entering and leaving wet and dry bulb temperatures; submit the calculations with the coil reports.

3.4.3.2 Air Handling Units

Air handling unit systems including fans (air handling unit fans, exhaust fans and winter ventilation fans), coils, ducts, plenums, mixing boxes, terminal units, variable air volume boxes, and air distribution devices for supply air, return air, outside air, mixed air relief air, and makeup air.

3.4.3.3 Makeup Air Units (DOAS)

Makeup air unit systems including fans, coils, ducts, plenums, registers, diffusers, grilles, and louvers for supply air, return air, outside air, and mixed air.

3.4.3.4 Fan Coils

Fan coil unit systems including fans, coils, ducts, plenums, and air distribution devices for supply air, return air, and outside air.

3.4.3.5 Exhaust Fans

Exhaust fan systems including fans, ducts, plenums, grilles, and hoods for exhaust air.

3.4.4 TAB Water Distribution Systems

3.4.4.1 Chilled Water

Chilled water systems including chillers, condensers, cooling towers, pumps, coils, system balance valves and flow measuring devices.

For water chillers, report data as required by AABC, NEBB and TABB standard procedures, including refrigeration operational data.

3.4.4.2 Heating Hot Water

Heating hot water systems including boilers, hot water converters (e.g., heat exchangers), pumps, coils, system balancing valves and flow measuring devices.

3.4.5 TAB Work on Performance Tests With Seasonal Limitations

3.4.5.1 Performance Tests

Accomplish proportional balancing TAB work on the air distribution systems and water distribution systems, in other words, accomplish adjusting and balancing of the air flows and water flows, any time during the duration of this contract, subject to the limitations specified elsewhere in this section. However, accomplish, within the following seasonal limitations, TAB work on HVAC systems which directly transfer thermal energy.

3.4.5.2 Season Of Maximum Load

Visit the contract site for at least two TAB work sessions for Season 1 and Season 2 field measures. Visit the contract site during the season of maximum heating load and visit the contract site during the season of maximum cooling load, the goal being to TAB the operational performance of the heating systems and cooling systems under their respective maximum outdoor environment-caused loading. During the seasonal limitations, TAB the operational performance of the heating systems and cooling systems.

3.4.5.3 Ambient Temperatures

On each tab report form used for recording data, record the outdoor and indoor ambient dry bulb temperature range and the outdoor and indoor ambient wet bulb temperature range within which the report form's data was recorded. Record these temperatures at beginning and at the end of data taking.

3.4.6 Workmanship

Conduct TAB work on the HVAC systems until measured flow rates are within plus or minus 5 percent of the design flow rates as specified or indicated

on the contract documents. This TAB work includes adjustment of balancing valves, balancing dampers, and sheaves. Further, this TAB work includes changing out fan sheaves and pump impellers if required to obtain air and water flow rates specified or indicated. If, with these adjustments and equipment changes, the specified or indicated design flow rates cannot be attained, contact the Contracting Officer for direction.

3.4.7 Deficiencies

Strive to meet the intent of this section to maximize the performance of the equipment as designed and installed. However, if deficiencies in equipment design or installation prevent TAB work from being accomplished within the range of design values specified in the paragraph WORKMANSHIP, provide written notice as soon as possible to the Contractor and the Contracting Officer describing the deficiency and recommended correction.

Responsibility for correction of installation deficiencies is the Contractor's. If a deficiency is in equipment design, call the TAB team supervisor for technical assistance. Responsibility for reporting design deficiencies to Contractor is the TAB team supervisor's.

3.4.8 TAB Reports

Additional requirements for TAB Reports are specified in Appendix B REPORTS - DALT and TAB

3.4.9 Quality Assurance - COTR TAB Field Acceptance Testing

3.4.9.1 TAB Field Acceptance Testing

During the field acceptance testing, verify, in the presence of the COTR, random selections of data (water, air quantities, air motion,) recorded in the TAB Report. Points and areas for field acceptance testing are to be selected by the COTR. Measurement and test procedures are the same as approved for TAB work for the TAB Report.

Field acceptance testing includes verification of TAB Report data recorded for the following equipment groups:

Group 1: All chillers, boilers, return fans, computer room units, and air handling units (rooftop and central stations).

Group 2: 25 percent of the VAV terminal boxes and associated diffusers and registers.

Group 3: 25 percent of the supply diffusers, registers, grilles associated with constant volume air handling units.

Group 4: 25 percent of the return grilles, return registers, exhaust grilles and exhaust registers.

Group 5: 25 percent of the supply fans, exhaust fans, and pumps.

Further, if any data on the TAB Report for Groups 2 through 5 is found not to fall within the range of plus 5 to minus 5 percent of the TAB Report data, additional group data verification is required in the presence of the COTR. Verify TAB Report data for one additional piece of equipment in that group. Continue this additional group data verification until out-of-tolerance data ceases to be found.

3.4.9.2 Additional COTR TAB Field Acceptance Testing

If any of the acceptance testing measurements for a given equipment group is found not to fall within the range of plus 5 to minus 5 percent of the TAB Report data, terminate data verification for all affected data for that group. The affected data for the given group will be disapproved. Make the necessary corrections and prepare a revised TAB Report. Reschedule acceptance testing of the revised report data with the COTR.

3.4.9.3 Prerequisite for Approval

Compliance with the field acceptance testing requirements of this section is a prerequisite for the final Contracting Officer approval of the TAB Report submitted.

3.5 MARKING OF SETTINGS

Upon the final TAB work approval, permanently mark the settings of HVAC adjustment devices including valves, gauges, splitters, and dampers so that adjustment can be restored if disturbed at any time. Provide permanent markings clearly indicating the settings on the adjustment devices which result in the data reported on the submitted TAB report.

3.6 MARKING OF TEST PORTS

The TAB team is to permanently and legibly mark and identify the location points of the duct test ports. If the ducts have exterior insulation, make these markings on the exterior side of the duct insulation. Show the location of test ports on the as-built mechanical drawings with dimensions given where the test port is covered by exterior insulation.

3.7 APPENDICES

Appendix A WORK DESCRIPTIONS OF PARTICIPANTS
Appendix B REPORTS - DALT and TAB
Appendix C DALT AND TAB SUBMITTAL AND WORK SCHEDULE
Appendix D REQUIREMENTS FOR DUCT AIR LEAK TESTING

Appendix A

WORK DESCRIPTIONS OF PARTICIPANTS

The Contractor is responsible for ensuring compliance with all requirements of this specification section. However, the following delineation of specific work items is provided to facilitate and co-ordinate execution of the various work efforts by personnel from separate organizations.

1. Contractor

a. HVAC documentation: Provide pertinent contract documentation to the TAB Firm, to include the following: the contract drawings and specifications; copies of the approved submittal data for all HVAC equipment, air distribution devices, and air/water measuring/balancing devices; the construction work schedule; and other applicable documents requested by the TAB Firm. Provide the TAB Firm copies of contract revisions and modifications as they occur.

b. Schedules: Ensure the requirements specified under the paragraph "DALT and TAB Schedule" are met.

c. Pre-DALT and TAB meeting: Arrange and conduct the Pre-DALT and TAB meeting. Ensure that a representative is present for the sheet metal contractor, the mechanical contractor, the electrical contractor, and the automatic temperature controls contractor.

d. Coordinate Support: Provide and coordinate support personnel required by the TAB Firm in order to accomplish the DALT and TAB field work. Support personnel may include factory representatives, HVAC controls installers, HVAC equipment mechanics, sheet metal workers, pipe fitters, and insulators. Ensure support personnel are present at the work site at the times required.

e. Correct Deficiencies: Ensure the notifications of Construction Deficiencies are provided as specified herein. Refer to the paragraph CONSTRUCTION DEFICIENCIES. Correct each deficiency as soon as practical with the Contracting Officer, and submit revised schedules and other required documentation.

f. Pre-TAB Work Checklists: Complete check out and debugging of HVAC equipment, ducts, and controls prior to the TAB engineer arriving at the project site to begin the TAB work. Debugging includes searching for and eliminating malfunctioning elements in the HVAC system installations, and verifying all adjustable devices are functioning as designed. Include as pre-TAB work checklist items, the deficiencies pointed out by the TAB team supervisor in the design review report.

   Prior to the TAB field team's arrival, ensure completion of the applicable inspections and work items listed in the TAB team supervisor's DALT and TAB Work Procedures Summary. Do not allow the TAB team to commence TAB field work until all of the following are completed.

g. Give Notice of Testing: Submit advance notice of proportional balancing, Season 1, and Season 2 TAB field work accompanied by completed prerequisite HVAC Work List

h. Insulation work: Ensure that no insulation is shall not be installed on ducts to be DALT'd until DALT work on the subject ducts is complete.

Ensure the duct and piping systems are properly insulated and vapor sealed upon the successful completion and acceptance of the DALT and TAB work.

2. TAB Team Supervisor

a. Overall management: Supervise and manage the overall TAB team work effort, including preliminary and technical DALT and TAB procedures and TAB team field work.

b. Schedule: Ensure the requirements specified under the paragraph "DALT and TAB Schedule" are met.

c. Submittals: Provide the submittals specified herein.

d. Pre-DALT/TAB meeting: Attend meeting with Contractor. Ensure TAB personnel that will be involved in the TAB work under this contract attend the meeting.

e. Design Review Report: Submit typed report describing omissions and deficiencies in the HVAC system's design that would preclude the TAB team from accomplishing the duct leakage testing work and the TAB work requirements of this section. Provide a complete explanation including supporting documentation detailing the design deficiency. State that no deficiencies are evident if that is the case.

f. Support required: Specify the technical support personnel required from the Contractor other than the TAB agency; such as factory representatives for temperature controls or for complex equipment. Inform the Contractor in writing of the support personnel needed and when they are needed. Furnish the notice as soon as the need is anticipated, either with the design review report, or the DALT and TAB Procedures Summary, the during the DALT or TAB field work.

Ensure the Contractor is properly notified and aware of all support personnel needed to perform the TAB work. Maintain communication with the Contractor regarding support personnel throughout the duration of the TAB field work, including the TAB field acceptance testing checking.

Ensure all inspections and verifications for the Pre-Final DALT and Pre-TAB Checklists are completely and successfully conducted before DALT and TAB field work is performed.

g. Advance Notice: Monitor the completion of the duct system installations and provide the Advance Notice for Pre-Final DALT field work as specified herein.

h. Technical Assistance: Provide technical assistance to the DALT and TAB field work.

i. Deficiencies Notification: Ensure the notifications of Construction Deficiencies are provided as specified herein. Comply with requirements of the paragraph CONSTRUCTION DEFICIENCIES. Resolve each deficiency as soon as practical and submit revised schedules and other

required documentation.

j. Procedures: Develop the required TAB procedures for systems or system components not covered in the TAB Standard.

3. TAB Team Field Leader

a. Field manager: Manage, in the field, the accomplishment of the work specified in Part 3, EXECUTION.

b. Full time: Be present at the contract site when DALT field work or TAB field work is being performed by the TAB team; ensure day-to-day TAB team work accomplishments are in compliance with this section.

c. Prerequisite HVAC work: Do not bring the TAB team to the contract site until a copy of the prerequisite HVAC work list, with all work items certified by the Contractor to be working as designed, reaches the office of the TAB Agency.

Appendix B

REPORTS - DALT and TAB

All submitted documentation must be typed, neat, and organized. All reports must have a waterproof front and back cover, a title page, a certification page, sequentially numbered pages throughout, and a table of contents. Tables, lists, and diagrams must be titled. Generate and submit for approval the following documentation:

1. DALT and TAB Work Execution Schedule

Submit a detailed schedule indicating the anticipated calendar date for each submittal and each portion of work required under this section. For each work entry, indicate the support personnel (such as controls provider, HVAC mechanic, etc.) that are needed to accomplish the work. Arrange schedule entries chronologically.

2. DALT and TAB Procedures Summary

Submit a detailed narrative describing all aspects of the DALT and TAB field work to be performed. Clearly distinguish between DALT information and TAB information. Include the following:

a. A list of the intended procedural steps for the DALT and TAB field work from start to finish. Indicate how each type of data measurement will be obtained. Include what Contractor support personnel are required for each step, and the tasks they need to perform.

b. A list of the project's submittals that are needed by the TAB Firm in order to meet this Contract's requirements.

c. The schematic drawings to be used in the required reports, which may include building floor plans, mechanical room plans, duct system plans, and equipment elevations. Indicate intended TAB measurement locations, including where test ports need to be provided by the Contractor.

d. The data presentation forms to be used in the report, with the preliminary information and initial design values filled in.

e. A list of DALT and TAB instruments to be used, edited for this project, to include the instrument name and description, manufacturer, model number, scale range, published accuracy, most recent calibration date, and what the instrument will be used for on this project.

f. A thorough checklist of the work items and inspections that need to be accomplished before DALT field work can be performed. The Contractor must complete, submit, and receive approval of the Completed Pre-Final DALT Work Checklist before DALT field work can be accomplished.

g. A thorough checklist of the work items and inspections that need to be accomplished before the Season 1 TAB field work can be performed. The Contractor must complete, submit, and receive approval of the Completed Season 1 Pre-TAB Work Checklist before the Season 1 TAB field work can be accomplished.

h. A thorough checklist of the work items and inspections that need to be

accomplished before the Season 2 TAB field work can be performed. The Contractor must complete, submit, and receive approval of the Completed Season 2 Pre-TAB Work Checklist before the Season 2 TAB field work can be accomplished.

i. The checklists specified above shall be individually developed and tailored specifically for the work under this contract. Refer to NEBB PROCEDURAL STANDARDS, Section III, "Preliminary TAB Procedures" under the paragraphs titled, "Air Distribution System Inspection" and "Hydronic Distribution System Inspection" for examples of items to include in the checklists.

3. Design Review Report

Submit report containing the following information:

a. Review the contract specifications and drawings to verify that the TAB work can be successfully accomplished in compliance with the requirements of this section. Verify the presence and location of permanently installed test ports and other devices needed, including gauge cocks, thermometer wells, flow control devices, circuit setters, balancing valves, and manual volume dampers.

b. Submit a typed report describing omissions and deficiencies in the HVAC system's design that would preclude the TAB team from accomplishing the DALT work and the TAB work requirements of this section. Provide a complete explanation including supporting documentation detailing the design deficiency. If no deficiencies are evident, state so in the report.

4. Completed Pre-Final DALT Work Checklist

Report the data for the Pre-Final DALT Report meeting the following requirements:

a. Submit a copy of the approved DALT and TAB Procedures Summary: Provide notations describing how actual field procedures differed from the procedures listed.

b. Report format: Submit a comprehensive report for the DALT field work data using data presentation forms equivalent to the "Air Duct Leakage Test Summary Report Forms" located in the SMACNA 1972 CD. In addition, submit in the report, a marked duct shop drawing which identifies each section of duct tested with assigned node numbers for each section. Node numbers shall be included in the completed report forms to identify each duct section.

c. Calculations: Include a copy of all calculations prepared in determining the duct surface area of each duct test section. Include in the DALT reports copy(s) of the calibration curve for each of the DALT test orifices used for testing.

d. Instruments: List the types of instruments actually used to measure the data. Include in the listing each instrument's unique identification number, calibration date, and calibration expiration date. Instruments are to be calibrated within one year of the date of use in the field; instrument calibration is to be traceable to the measuring standards of the National Institute of Standards and Technology.

e. TAB Supervisor Approval: Include on the submitted report the typed name of the TAB supervisor and the dated signature of the TAB supervisor.

5. Final DALT Report

On successful completion of all COTR field checks of the Pre-final DALT Report data for all systems, the TABS Supervisor shall assemble, review, sign and submit the Final DALT Report to the Contracting Officer for approval.

6. TAB Reports: Submit TAB Report for Proportional Balancing, Season 1, and Season 2 in the following manner:

a. Procedure Summary: Submit a copy of the approved DALT and TAB Procedures Summary. When applicable, provide notations describing how actual field procedures differed from the procedures listed.

b. Report format: Submit the completed data forms approved in the pre-field TAB Engineering Report completed by TAB field team, reviewed, approved and signed by the TAB supervisor. Bind the report with a waterproof front and back cover. Include a table of contents identifying by page number the location of each report. Report forms and report data shall be typewritten. Handwritten report forms or report data are not acceptable.

c. Temperatures: On each TAB report form reporting TAB work accomplished on HVAC thermal energy transfer equipment, include the indoor and outdoor dry bulb temperature range and indoor and outdoor wet bulb temperature range within which the TAB data was recorded. Include in the TAB report continuous time versus temperature recording data of wet and dry bulb temperatures for the rooms, or zones, as designated in the following list:

Two Sleeping Rooms per floor and teh 2nd floor Laundry Room

(1) Data shall be measured and compiled on a continuous basis for the period in which TAB work affecting those rooms is being done.

(2) Data shall be measured/recorded only after the HVAC systems installations are complete, the systems fully balanced and the HVAC systems controls operating in fully automatic mode. Provide a detailed explanation wherever a final measurement did not achieve the required value.

(3) Data may be compiled using direct digital controls trend logging where available. Otherwise, the Contractor shall temporarily install calibrated time versus temperature/humidity recorders for this purpose. The HVAC systems and controls shall have been fully operational a minimum of 24 hours in advance of commencing data compilation. The specified data shall be included in the Season I and Season 2 TAB Report.

d. Air System Diagrams: Provided updated diagrams with final installed locations of all terminals and devices, any numbering changes, and actual test locations.

e. Air Static Pressure Profiles: Report static pressure profiles for air

duct systems including: DOAS-1 and DOAS-2. Report static pressure data for all supply, return, relief, exhaust and outside air ducts for the systems listed. The static pressure report data shall include, in addition to AABC or NEBB or TABB required data, the following:

(1) Report supply fan, return fan, relief fan, and exhaust fan inlet and discharge static pressures.

(2) Report static pressure drop across chilled water coils, DX coils, hot water coils, steam coils, electric resistance heating coils and heat reclaim devices installed in unit cabinetry or the system ductwork.

(3) Report static pressure drop across outside air, return air, and supply air automatic control dampers, both proportional and two-position, installed in unit cabinetry.

(4) Report static pressure drop across air filters, acoustic silencers, moisture eliminators, air flow straighteners, air flow measuring stations or other pressure drop producing specialty items installed in unit cabinetry, or in the system ductwork. Examples of these specialty items are smoke detectors, white sound generators, RF shielding, wave guides, security bars, blast valves, small pipes passing through ductwork, and duct mounted humidifiers.

Do not report static pressure drop across duct fittings provided for the sole purpose of conveying air, such as elbows, transitions, offsets, plenums, manual dampers, and branch takes-offs.

(5) Report static pressure drop across outside air and relief/exhaust air louvers.

(6) Report static pressure readings of supply air, return air, exhaust/relief air, and outside air in duct at the point where these ducts connect to each air moving unit.

f. Duct Transverses: Report duct traverses for main and branch main supply, return, exhaust, relief and outside air ducts. The TAB Agency shall evaluate and report findings on the duct traverses taken. Evaluate the suitability of the duct traverse measurement based on satisfying the qualifications for a pitot traverse plane as defined by AMCA 203, "Field Measurements", Section 8, paragraph 8.3, "Location of Traverse Plane".

g. Instruments: List the types of instruments actually used to measure the tab data. Include in the listing each instrument's unique identification number, calibration date, and calibration expiration date.

Instrumentation, used for taking wet bulb temperature readings shall provide accuracy of plus or minus 5 percent at the measured face velocities. Submit instrument manufacturer's literature to document instrument accuracy performance is in compliance with that specified.

h. Performance Curves: The TAB Supervisor shall include, in the TAB Reports, factory pump curves and fan curves for pumps and fans TAB'd on the job.

i. Calibration Curves: The TAB Supervisor shall include, in the TAB Reports, a factory calibration curve for installed flow control balancing valves, flow venturis and flow orifices TAB'd on the job.

j. Data From TAB Field Work: After completion of the TAB field work, prepare the TAB field data for TAB supervisor's review and approval signature, using the reporting forms approved in the pre-field engineering report. Data required by those approved data report forms shall be furnished by the TAB team. Except as approved otherwise in writing by the Contracting Officer, the TAB work and thereby the TAB report shall be considered incomplete until the TAB work is accomplished to within the accuracy range specified in the paragraph WORKMANSHIP.

Appendix C

DALT AND TAB SUBMITTAL AND WORK SCHEDULE

Perform the following items of work in the order listed adhering to the dates schedule specified below. Include the major items listed in this schedule in the project network analysis schedule required by Section 01 32 16.00 20 SMALL PROJECT CONSTRUCTION PROGRESS SCHEDULES.

Submit TAB Agency and TAB Personnel Qualifications: Within 42 calendar days after date of contract award.

Submit the DALT and TAB Work Execution Schedule: within 14 days after receipt of the TAB agency and TAB personnel qualifications approval. Revise and re-submit this schedule 28 days prior to commencement of DALT work and 28 days prior to the commencement of TAB Season 1 work and TAB Season 2 work.

Submit the DALT and TAB Work Procedures Summary: within 14 days after receipt of the initial approved DALT and TAB Work Execution Schedule.

Meet with the COTR at the Pre-DALT/TAB Meeting: Within 28 calendar days after receipt of the approved initial DALT/TAB Execution Schedule.

Submit Design Review Report: Within 56 calendar days after the receipt of the approved initial DALT and TAB Work Execution Schedule.

Advance Notice of Pre-Final DALT Field Work: After the completed installation of the HVAC duct system to be DALT'd, submit to the Contracting Officer an Advance Notice of Pre-Final DALT Field Work accompanied by the completed Pre-Final DALT Work Checklist for the subject duct system.

Ductwork Selected for DALT: Within 14 calendar days after receiving an acceptable completed Pre-Final DALT Work Checklist, the Contracting Officer's technical representative (COTR) will select the project ductwork sections to be DALT'd.

DALT Field Work: Within 48 hours of COTR's selection, complete DALT field work on selected project ductwork.

Submit Pre-Final DALT Report: Within two working days after completion of DALT field work, submit Pre-final DALT Report. Separate Pre-final DALT reports may be submitted to allow phased testing from system to system.

Quality Assurance - COTR DALT Field Checks: Upon approval of the Pre-final DALT Report, the COTR's DALT field check work shall be scheduled with the Contracting Officer.

Submit Final DALT Report: Within 14 calendar days after completion of successful DALT Work Field Check, submit Season 1 TAB report.

Advance Notice of Season 1 TAB Field Work: At a minimum of 14 calendar days prior to Season 1 TAB Field Work, submit advance notice of TAB field work accompanied by completed Season 1 Pre-TAB Work Checklist.

Season 1 TAB Field Work: At a minimum of 84 calendar days prior to CCD, and when the ambient temperature is within Season 1 limits, accomplish Season 1 TAB field work.

Submit Season 1 TAB Report: Within 14 calendar days after completion of Season 1 TAB field work, submit initial Season 1 TAB report.

Season 1 Quality Assurance - COTR TAB Field Check: 30 calendar days after initial Season 1 TAB report is approved by the Contracting Officer, conduct Season 1 field check.

Complete Season 1 TAB Work: Prior to CCD, complete all TAB work except Season 2 TAB work and submit final.

Receive the approved TAB report: Within 21 calendar days, receive the report from Contracting Officer approved TAB report.

Advance Notice of Season 2 TAB Field Work: At a minimum of 126 calendar days after CCD, submit advance notice of Season 2 TAB field work accompanied by completed Season 2 Pre-TAB Work Checklist.

Season 2 TAB Field Work: Within 14 calendar days after date of advance notice of Season 2 TAB field work and when the ambient temperature is within Season 2 limits, accomplish Season 2 TAB field work.

Submit Season 2 TAB Report: Within 14 calendar days after completion of Season 2 TAB field work, submit Season 2 TAB report.

Season 2 Quality Assurance - COTR TAB Field Checks: 28 calendar days after the Season 2 TAB report is approved by the Contracting Officer, conduct Season 2 field check.

Complete Season 2 TAB Work: Within 14 calendar days after the completion of Season 2 TAB field data check, complete all TAB work.

Receive the approved TAB report: Within calendar 21 days, receive the report from Contracting Officer.

Appendix D			
REQUIREMENTS FOR DUCT AIR LEAK TESTING			
		SYSTEMS	
		Dedicated Outside Air System, DOAS-1,2	Fan Coil Unit, FCU-__
Duct System Static Pressure, in inches W.C.	for Supply	3	1
	for Return	-	-1
	for Exhaust	-1	-
	for Outside Air	-1	-
System Oval/Round Duct and Rectangular Duct SMACNA Seal Class	for Supply	A	A
	for Return	A	A
	for Exhaust	A	A
	for Outside Air	A	A
System Oval/Round Duct SMACNA Leak Class	for Supply	6	6
	for Return	-	6
	for Exhaust	6	-
	for Outside Air	6	-

Appendix D			
REQUIREMENTS FOR DUCT AIR LEAK TESTING			
		SYSTEMS	
		Dedicated Outside Air System, DOAS-1,2	Fan Coil Unit, FCU-__
System Rectangular Duct SMACNA Leak Class	for Supply	12	12
	for Return	-	24
	for Exhaust	24	-
	for Outside Air	24	-
Duct Test Pressure, in inches W.C.	for Supply	3	1
	for Return	-	1
	for Exhaust	1	-
	for Outside Air	1	-

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 07 00

THERMAL INSULATION FOR MECHANICAL SYSTEMS
08/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only. At the discretion of the Government, the manufacturer of any material supplied will be required to furnish test reports pertaining to any of the tests necessary to assure compliance with the standard or standards referenced in this specification.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings
ASHRAE 90.1 - SI	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	(2025a) Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
ASTM A580/A580M	(2023) Standard Specification for Stainless Steel Wire
ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM C195	(2007; R 2024) Standard Specification for Mineral Fiber Thermal Insulating Cement
ASTM C450	(2008) Standard Practice for Fabrication of Thermal Insulating Fitting Covers for NPS Piping, and Vessel Lagging
ASTM C533	(2017; R 2023) Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation
ASTM C534/C534M	(2025) Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
ASTM C547	(2022a) Standard Specification for Mineral Fiber Pipe Insulation
ASTM C552	(2022) Standard Specification for Cellular

	Glass Thermal Insulation
ASTM C553	(2024) Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
ASTM C585	(2010) Standard Practice for Inner and Outer Diameters of Thermal Insulation for Nominal Sizes of Pipe and Tubing
ASTM C591	(2022) Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
ASTM C592	(2024) Standard Specification for Mineral Fiber Blanket Insulation and Blanket-Type Pipe Insulation (Metal-Mesh Covered) (Industrial Type)
ASTM C610	(2017; R 2023) Standard Specification for Molded Expanded Perlite Block and Pipe Thermal Insulation
ASTM C612	(2014; R 2019) Standard Specification for Mineral Fiber Block and Board Thermal Insulation
ASTM C647	(2008; R 2013) Properties and Tests of Mastics and Coating Finishes for Thermal Insulation
ASTM C755	(2019b) Standard Practice for Selection of Water Vapor Retarders for Thermal Insulation
ASTM C795	(2008; R 2023) Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel
ASTM C916	(2020) Standard Specification for Adhesives for Duct Thermal Insulation
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM C921	(2010; R 2015) Standard Practice for Determining the Properties of Jacketing Materials for Thermal Insulation
ASTM C1126	(2024) Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation
ASTM C1136	(2023) Standard Specification for Flexible, Low Permeance Vapor Retarders for Thermal Insulation
ASTM C1290	(2016; R 2021) Standard Specification for Flexible Fibrous Glass Blanket Insulation

	Used to Externally Insulate HVAC Ducts
ASTM C1710	(2011) Standard Guide for Installation of Flexible Closed Cell Preformed Insulation in Tube and Sheet Form
ASTM D882	(2012) Tensile Properties of Thin Plastic Sheeting
ASTM D2863	(2019) Standard Test Method for Measuring the Minimum Oxygen Concentration to Support Candle-Like Combustion of Plastics (Oxygen Index)
ASTM D5590	(2017; R 2021) Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E96/E96M	(2024a) Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials
ASTM E2231	(2021) Standard Practice for Specimen Preparation and Mounting of Pipe and Duct Insulation Materials to Assess Surface Burning Characteristics

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

GREEN SEAL (GS)

GS-36	(2013) Adhesives for Commercial Use

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(2025) Pipe Hangers and Supports - Materials, Design and Manufacture, Selection, Application, and Installation

MIDWEST INSULATION CONTRACTORS ASSOCIATION (MICA)

MICA Insulation Stds	(8th Ed) National Commercial & Industrial Insulation Standards

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems
NFPA 90B	(2024) Standard for the Installation of Warm Air Heating and Air Conditioning Systems
NFPA 96	(2024) Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)

TAPPI T403 OM	(2022) Bursting Strength of Paper

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-A-3316	(1987; Rev C; Am 2 1990) Adhesives, Fire-Resistant, Thermal Insulation
MIL-A-24179	(1969; Rev A; Am 2 1980; Notice 1 1987; Notice 2 2020) Adhesive, Flexible Unicellular-Plastic Thermal Insulation
MIL-PRF-19565	(1988; Rev C) Coating Compounds, Thermal Insulation, Fire- and Water-Resistant, Vapor-Barrier

UL SOLUTIONS (UL)

UL 94	(2023; Reprint Jan 2024) UL Standard for Safety Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
UL 723	(2018; Reprint Jun 2025) UL Standard for Safety Test for Surface Burning Characteristics of Building Materials
UL 2818	(2022) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SYSTEM DESCRIPTION

1.2.1 General

Provide field-applied insulation and accessories on mechanical systems as

specified herein; factory-applied insulation is specified under the piping, duct or equipment to be insulated. Provide insulation of heat distribution systems and chilled water systems outside of buildings as specified in Section 33 61 14 EXTERIOR BURIED PREINSULATED WATER PIPING. Provide field applied insulation materials required for use on Government-furnished items as listed in the SPECIAL CONTRACT REQUIREMENTS.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

Submit the three SD types, SD-02 Shop Drawings, SD-03 Product Data, and SD-08 Manufacturer's Instructions at the same time for each system.

SD-02 Shop Drawings

MICA Plates; G

Pipe Insulation Systems and Associated Accessories

Duct Insulation Systems and Associated Accessories

Equipment Insulation Systems and Associated Accessories

Recycled content for insulation materials; S

SD-03 Product Data

Pipe Insulation Systems; G

Duct Insulation Systems; G

Equipment Insulation Systems; G

SD-04 Samples

Thermal Insulation; G

Display Samples; G

SD-07 Certificates

Indoor air quality for adhesives; S

SD-08 Manufacturer's Instructions

Pipe Insulation Systems; G

Duct Insulation Systems; G

Equipment Insulation Systems; G

1.4 CERTIFICATIONS

1.4.1 Adhesives and Sealants

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party programs that products meet the requirements of this Section. Provide current product certification documentation from certification body. When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein.

1.5 QUALITY ASSURANCE

1.5.1 Installer Qualification

Qualified installers must have successfully completed three or more similar type jobs within the last 5 years.

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver materials in the manufacturer's unopened containers. Protect materials delivered and placed in storage from weather, humidity, dirt, dust and other contaminants. The Contracting Officer may reject insulation material and supplies that become dirty, dusty, wet, or contaminated by some other means. Attach manufacturer's stamp or label giving the name of the manufacturer and brand, and a description of the material, date codes, and approximate shelf life (if applicable) to packages or standard containers of insulation, jacket material, cements, adhesives, and coatings delivered for use, and samples required for approval. Insulation packages and containers must be asbestos free.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Provide materials which are the standard products of manufacturers regularly engaged in the manufacture of such products and that essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening and is an acceptable product per this specification. Submit a complete list of materials, including manufacturer's descriptive technical literature, performance data, catalog cuts, and installation instructions. Include the product number, k-value, thickness and furnished accessories including adhesives, sealants and jackets for each mechanical system requiring insulation. The product data must be copyrighted, have an identifying or publication number, and have been published prior to the issuance date of this solicitation. Submit materials furnished under this section together in a booklet.

2.1.1 Insulation System

Provide insulation systems in accordance with the approved MICA National Insulation Standards plates as supplemented by this specification. Provide field-applied insulation for heating, ventilating, and cooling (HVAC) air distribution systems and piping systems that are located within, on, under, and adjacent to buildings; and for plumbing systems. Provide CFC and HCFC free insulation.

2.1.2 Surface Burning Characteristics

Unless otherwise specified, insulation must have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Determine flame spread, and smoke developed indexes, by ASTM E84 or UL 723. Test insulation in the same density and installed thickness as the material to be used in the actual construction. Prepare and mount test specimens according to ASTM E2231.

2.2 MATERIALS

Provide insulation that meets or exceed the requirements of ASHRAE 90.1 - IP. Ensure insulation exterior is cleanable, grease resistant, non-flaking and non-peeling. Provide compatible materials that do not contribute to corrosion, soften, or otherwise attack surfaces to which applied in either wet or dry state. Use materials on stainless steel surfaces meeting ASTM C795 requirements. Do not use calcium silicate on chilled or cold water systems. Use asbestos free materials. Provide product recognized under UL 94 (if containing plastic) and listed in FM APP GUIDE.

2.2.1 Adhesives

Provide non-aerosol adhesive products used on the interior of the building (defined as inside of the weatherproofing system) that meet either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168 (HVAC duct sealants must meet limit requirements of "Other" category within SCAQMD Rule 1168 sealants table). Provide aerosol adhesives used on the interior of the building that meet either emissions requirements of CDPH SECTION 01350 (use the office or classroom requirements, regardless of space type) or VOC content requirements of GS-36. Provide certification or validation of indoor air quality for adhesives.

2.2.1.1 Acoustical Lining Insulation Adhesive

Provide a nonflammable, fire-resistant adhesive conforming to ASTM C916, Type I.

2.2.1.2 Mineral Fiber Insulation Cement

Provide cement in accordance with ASTM C195.

2.2.1.3 Lagging Adhesive

Lagging is the material used for thermal insulation, especially around a cylindrical object. This may include the insulation as well as the cloth/material covering the insulation. To resist mold/mildew, use lagging adhesive meeting ASTM D5590 with 0 growth rating. Provide nonflammable and fire-resistant lagging adhesives that have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Ensure adhesive is MIL-A-3316, Class 1, pigmented white and suitable, as listed by the manufacturer,for bonding fibrous glass cloth to faced and unfaced fibrous glass insulation board; for bonding cotton brattice cloth to faced and unfaced fibrous glass insulation board; for sealing edges of and bonding glass tape to joints of fibrous glass board; for bonding lagging cloth to thermal insulation; or Class 2 for attaching fibrous glass insulation to metal surfaces. Apply

lagging adhesives in strict accordance with the manufacturer's recommendations for pipe and duct insulation.

2.2.1.4 Contact Adhesive

Adhesives may be any of, but not limited to, the neoprene based, rubber based, or elastomeric type that have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Ensure adhesive does not adversely affect, initially or in service, the insulation to which it is applied, nor cause any corrosive effect on metal to which it is applied. Ensure that any solvent dispersing medium or volatile component of the adhesive has no objectionable odor and does not contain any benzene or carbon tetrachloride. Ensure dried adhesive does not emit nauseous, irritating, or toxic volatile matters or aerosols when the adhesive is heated to any temperature up to 212 degrees F. The dried adhesive must be nonflammable and fire resistant. Flexible Elastomeric Adhesive: Comply with MIL-A-24179, Type II, Class I. Provide product listed in FM APP GUIDE.

2.2.2 Caulking

ASTM C920, Type S, Grade NS, Class 25, Use A.

2.2.3 Corner Angles

Nominal 0.016 inch aluminum 1 by 1 inch with factory applied kraft backing. Aluminum must be ASTM B209, Alloy 3003, 3105, or 5005.

2.2.4 Fittings

Fabricated Fittings are the prefabricated fittings for flexible elastomeric pipe insulation systems in accordance with ASTM C1710. Together with the flexible elastomeric tubes, they provide complete system integrity for retarding heat gain and controlling condensation drip from chilled-water and refrigeration systems. Flexible elastomeric, fabricated fittings provide thermal protection (0.25 k) and condensation resistance (0.05 Water Vapor Transmission factor). For satisfactory performance, use properly installed protective vapor retarder/barriers and vapor stops on high relative humidity and below ambient temperature applications to reduce movement of moisture through or around the insulation to the colder interior surface.

2.2.5 Finishing Cement

ASTM C450: Mineral fiber hydraulic-setting thermal insulating and finishing cement. All cements that may come in contact with Austenitic stainless steel must comply with ASTM C795.

2.2.6 Fibrous Glass Cloth and Glass Tape

Provide fibrous glass cloth, with 20X20 maximum mesh size, and glass tape with maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Provide tape consisting of 4 inch wide rolls. Provide Class 3 tape that is 4.5 ounces/square yard. Elastomeric Foam Tape: Black vapor-retarder foam tape with acrylic adhesive containing an anti-microbial additive.

2.2.7 Staples

Outward clinching type Type 304 or 316 stainless steel.

2.2.8 Jackets

2.2.8.1 Aluminum Jackets

Provide aluminum jackets consisting of corrugated, embossed or smooth sheet, 0.016 inch nominal thickness; ASTM B209, Temper H14, Temper H16, Alloy 3003, 5005, or 3105. Do not use corrugated aluminum jacket outdoors. Aluminum jacket securing bands must be Type 304 stainless steel, 0.015 inch thick, 1/2 inch wide for pipe under 12 inch diameter and 3/4 inch wide for pipe over 12 inch and larger diameter. Aluminum jacket circumferential seam bands must be 2 by 0.016 inch aluminum matching jacket material. Ensure bands for insulation below ground are 3/4 by 0.020 inch thick stainless steel, or fiberglass reinforced tape. The jacket may, at the option of the Contractor, be provided with a factory fabricated Pittsburgh or "Z" type longitudinal joint. When the "Z" joint is used, use bands at the circumferential joints that are designed by the manufacturer to seal the joints and hold the jacket in place.

2.2.8.2 Polyvinyl Chloride (PVC) Jackets

Polyvinyl chloride (PVC) jacket and fitting covers must have high impact strength, ultraviolet (UV) resistant rating or treatment and moderate chemical resistance. The minimum thickness for a Standard jacket is 0.020 inch and where high abuse resistance is required use Heavy Duty PVC jacket 0.030 inch. Standard PVC fittings will have an initial core thickness (before thermoforming) of 0.025 inch and heavy duty fittings will have an initial core thickness of 0.030 inch.

2.2.8.3 Vapor Barrier/Weatherproofing Jacket

Provide laminated self-adhesive vapor barrier/weatherproofing jacket, greater than 3 plies standard grade, silver, white, black and embossed or greater than 8 ply (minimum 2.9 mils adhesive); with less than 0.02 permeability when tested in accordance with ASTM E96/E96M, using the water transmission rate test method; heavy duty, white or natural; and UV resistant. Flexible Elastomeric exterior foam with factory applied, UV Jacket made with a cold weather acrylic adhesive. Construction of laminate designed to provide UV resistance, high puncture, tear resistance and excellent Water Vapor Transmission (WVT) rate.

2.2.8.4 Vapor Barrier/Vapor Retarder

Apply the following criteria to determine which system is required.

a. On ducts, equip piping and equipment operating below 85 degrees F or located outside with a vapor barrier.

b. Install ducts, pipes and equipment that are located inside and that always operate above 85 degrees F with a vapor retarder where required as stated in paragraph VAPOR RETARDER REQUIRED.

2.2.9 Vapor Retarder Required

ASTM C921, Type I, minimum puncture resistance 50 Beach units on all

surfaces except concealed ductwork, where a minimum puncture resistance of 25 Beach units is acceptable. Minimum tensile strength, 35 pounds/inch width. ASTM C921, Type II, minimum puncture resistance 25 Beach units, tensile strength minimum 20 pounds/inch width. Use jackets on insulation exposed in finished areas that have white finish suitable for painting without sizing. Based on the application, insulation materials that require manufacturer or fabricator applied pipe insulation jackets are cellular glass, when all joints are sealed with a vapor barrier mastic, and mineral fiber. Ensure all non-metallic jackets have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Flexible elastomerics require (in addition to vapor barrier skin) vapor retarder jacketing for high relative humidity and below ambient temperature applications.

2.2.9.1 White Vapor Retarder All Service Jacket (ASJ)

ASJ is for use on hot/cold pipes, ducts, or equipment indoors or outdoors if covered by a suitable protective jacket. Provide product which meets all physical property and performance requirements of ASTM C1136, Type I, except a minimum burst strength of 85 psi. ASTM D2863 Limited Oxygen Index (LOI) is a minimum of 31.

In addition, do not use paper or other moisture-sensitive material for the outer exposed surface or the inner-most surface contacting the insulation. Ensure the outer exposed surface is white and has an emittance no less than 0.80.

2.2.9.2 Vapor Retarder/Vapor Barrier Mastic Coatings

2.2.9.2.1 Vapor Barrier

The vapor barrier must be self adhesive (minimum 2 mils adhesive, 3 mils embossed) greater than 3 plies standard grade, silver, white, black and embossed white jacket for use on hot/cold pipes. Ensure permeability is less than 0.02 when tested in accordance with ASTM E96/E96M. Provide products meeting UL 723 or ASTM E84 flame and smoke requirements and that are UV resistant.

2.2.9.2.2 Vapor Retarder

Provide fire and water resistant vapor retarder coating appropriately selected for either outdoor or indoor service. Color must be white. Ensure the water vapor permeance of the compound is in accordance with ASTM C755. Provide nonflammable, fire resistant coating. To resist mold/mildew, provide coating meeting ASTM D5590 with 0 growth rating. Ensure coating meets MIL-PRF-19565 Type II (if selected for indoor service) and is Qualified Products Database listed. Determine all other application and service properties pursuant to ASTM C647.

2.2.9.3 Laminated Film Vapor Retarder

ASTM C1136, Type I, maximum moisture vapor transmission 0.02 perms, minimum puncture resistance 50 Beach units on all surfaces except concealed ductwork; where Type II, maximum moisture vapor transmission 0.02 perms, a minimum puncture resistance of 25 Beach units is acceptable. Provide vapor retarder with a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84. Flexible Elastomeric exterior foam with factory applied UV Jacket. Construction of laminate designed to provide UV resistance, high

puncture, tear resistance and an excellent WVT rate.

2.2.9.4 Polyvinylidene Chloride (PVDC) Film Vapor Retarder

Provide PVDC film vapor retarder with a maximum moisture vapor transmission of 0.02 perms, minimum puncture resistance of 150 Beach units, a minimum tensile strength in any direction of 30 lb/inch when tested in accordance with ASTM D882, and a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84.

2.2.9.5 Polyvinylidene Chloride Vapor Retarder Adhesive Tape

Requirements must meet the same as specified for Laminated Film Vapor Retarder above.

2.2.9.6 Vapor Barrier/Weather Barrier

Ensure the vapor barrier is greater than 3 ply self adhesive laminate -white vapor barrier jacket- superior performance (permeability less than 0.02 when tested in accordance with ASTM E96/E96M). Provide vapor barrier meeting UL 723 or ASTM E84 25 flame and 50 smoke requirements; and UV resistant. Minimum burst strength 185 psi in accordance with TAPPI T403 OM . Tensile strength 68 lb/inch width (PSTC-1000). Provide tape as specified for laminated film vapor barrier above.

2.2.10 Vapor Retarder Not Required

ASTM C921, Type II, Class D, minimum puncture resistance 50 Beach units on all surfaces except ductwork, where Type IV, maximum moisture vapor transmission 0.10, a minimum puncture resistance of 25 Beach units is acceptable. Provide jacket with a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84.

2.2.11 Wire

Soft annealed ASTM A580/A580M Type 302, 304 or 316 stainless steel, 16 or 18 gauge.

2.2.12 Insulation Bands

Provide 1/2 inch wide; 26 gauge stainless steel insulation bands.

2.2.13 Sealants

Choose sealants from the butyl polymer type, the styrene-butadiene rubber type, or the butyl type of sealants. Provide sealants with a maximum permeance of 0.02 perms based on Procedure B for ASTM E96/E96M, and a maximum flame spread index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E84.

2.3 PIPE INSULATION SYSTEMS

Conform insulation materials to Table 1 and minimum insulation thickness as listed in Table 2 and meet or exceed the requirements of ASHRAE 90.1 - SIASHRAE 90.1 - IP. Limit pipe insulation materials to those listed herein and meeting the following requirements:

2.3.1 Recycled Materials

Provide insulation materials containing the following minimum percentage of recycled material content by weight:

Rock Wool: 75 percent slag of weight
Fiberglass: 20 percent glass cullet
Rigid Foam: 9 percent recovered material
Phenolic Rigid Foam: 9 percent recovered material

Provide data identifying percentage of recycled content for insulation materials.

2.3.2 Aboveground Cold Pipeline (-30 to 60 deg. F)

Provide insulation for outdoor, indoor, exposed or concealed applications, as follows:

2.3.2.1 Cellular Glass

ASTM C552, Type II, and Type III. Supply the insulation from the fabricator with (paragraph WHITE VAPOR RETARDER ALL SERVICE JACKET (ASJ)) ASJ vapor retarder and installed with all longitudinal overlaps sealed and all circumferential joints ASJ taped or supply the insulation unfaced from the fabricator and install with all longitudinal and circumferential joints sealed with vapor barrier mastic.

2.3.2.2 Flexible Elastomeric Cellular Insulation

Closed-cell, foam- or expanded-rubber materials containing anti-microbial additive, complying with ASTM C534/C534M, Grade 1, Type I or II. Type I, Grade 1 for tubular materials. Type II, Grade 1, for sheet materials. Ensure Type I and II have vapor retarder/vapor barrier skin on one or both sides of the insulation, and require an additional exterior vapor retarder covering for high relative humidity and below ambient temperature applications.

2.3.2.3 Polyisocyanurate Insulation

ASTM C591, Type I. Polyisocyanurate insulation may only be used on systems operating at temperatures not to exceed 140 degrees F. Supply the insulation with a factory applied vapor retarder/barrier that complies with Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. The insulation and all covering must pass the flame spread index of 25 and the smoke developed index of 50 when tested in accordance with ASTM E84.

2.3.3 Aboveground Hot Pipeline (Above 60 deg. F)

Provide insulation for outdoor, indoor, exposed or concealed applications meeting the following requirements. Supply the insulation with manufacturer's recommended factory-applied jacket/vapor barrier.

2.3.3.1 Mineral Fiber

ASTM C547, Types I, II or III, supply the insulation with manufacturer's recommended factory-applied jacket.

2.3.3.2 Calcium Silicate

ASTM C533, Type I indoor only, or outdoors above 250 degrees F pipe temperature. Supply insulation with the manufacturer's recommended factory-applied jacket/vapor barrier.

2.3.3.3 Cellular Glass

ASTM C552, Type II and Type III. Supply the insulation with manufacturer's recommended factory-applied jacket.

2.3.3.4 Flexible Elastomeric Cellular Insulation

Closed-cell, foam- or expanded-rubber materials containing anti-microbial additive, complying with ASTM C534/C534M, Grade 1, Type I or II to 220 degrees F service. Type I for tubular materials. Type II for sheet materials.

2.3.3.5 Phenolic Insulation

ASTM C1126 Type III to 250 degrees F service must comply with ASTM C795. Supply the insulation with manufacturer's recommended factory-applied jacket/vapor barrier.

2.3.3.6 Perlite Insulation

ASTM C610

2.3.3.7 Polyisocyanurate Insulation

ASTM C591, Type I. Supply the insulation with a factory applied vapor retarder/barrier that complies with Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. The insulation and all covering must pass the flame spread index of 25 and the smoke developed index of 50 when tested in accordance with ASTM E84.

2.4 DUCT INSULATION SYSTEMS

2.4.1 Factory Applied Insulation

Provide factory-applied ASTM C552, cellular glass thermal ASTM C534/C534M Grade 1, Type II, flexible elastomeric closed cell insulation according to manufacturer's recommendations for insulation with insulation manufacturer's standard reinforced fire-retardant vapor barrier, with identification of installed thermal resistance (R) value and out-of-package R value.

2.4.2 Field Applied Insulation

2.4.2.1 General

Calculate the minimum thickness in accordance with ASHRAE 90.1 - IP.

2.4.3 Rigid Insulation

Mineral-Fiber Board Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C612, Type IA or Type IB; 3.0 pcf. Provide insulation with factory applied ASJandfactory-applied FSK jacket. Minimum thickness in accordance with ASHRAE 90.1 - IPTables 3 and 4

2.4.4 Blanket Insulation

Mineral-Fiber Blanket Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C553, Type II and ASTM C1290, Type III with factory-applied FSK jacket; 3/4 pcf. Minimum thickness in accordance with ASHRAE 90.1 - IPTables 3 and 4.

2.4.5 Duct Insulation Jackets

2.4.5.1 All-Purpose Jacket

Provide insulation with insulation manufacturer's standard reinforced fire-retardant jacket with or without integral vapor barrier as required by the service. In exposed locations, provide jacket with a white surface.

2.4.5.2 Metal Jackets

2.4.5.2.1 Aluminum Jackets

ASTM B209, Temper H14, minimum thickness of 27 gauge (0.016 inch), with factory-applied polyethylene and kraft paper moisture barrier on inside surface. Provide smooth surface jackets for jacket outside dimension 8 inches and larger. Provide corrugated surface jackets for jacket outside dimension 8 inches and larger. Provide stainless steel bands, minimum width of 1/2 inch.

2.4.5.2.2 Stainless Steel Jackets

ASTM A240/A240M; Type 304, minimum thickness of 33 gauge (0.010 inch), smooth surface with factory-applied polyethylene and kraft paper moisture barrier on inside surface. Provide stainless steel bands, minimum width of 1/2 inch.

2.4.5.3 Vapor Barrier/Weatherproofing Jacket

Provide vapor barrier/weatherproofing jacket that is laminated self-adhesive (minimum 2 mils adhesive, 3 mils embossed) less than 0.02 permeability, (greater than 3 ply, standard grade, silver, white, black and embossed or greater than 8 ply (minimum 2.9 mils adhesive), heavy duty white or natural).

2.4.6 Weatherproof Duct Insulation

Provide ASTM C552, cellular glass thermal insulation ASTM C534/C534M Grade 1, Type II, flexible elastomeric cellular insulation, and weatherproofing as specified in manufacturer's instruction. Multi-ply, Polymeric Blend Laminate Jacketing: Construction of laminate designed to provide UV resistance, high puncture, tear resistance and an excellent WVT rate.

2.5 EQUIPMENT INSULATION SYSTEMS

Insulate equipment and accessories as specified in Tables 5 and 6. In outside locations, provide insulation 1/2 inch thicker than specified. Increase the specified insulation thickness for equipment where necessary to equal the thickness of angles or other structural members to make a smooth, exterior surface. Submit a booklet containing manufacturer's published installation instructions for the insulation systems. The instructions must be copyrighted, have an identifying or publication

number, and have been published prior to the issuance date of this solicitation. A booklet is also required by paragraphs titled: Pipe Insulation Systems and Duct Insulation Systems.

PART 3 EXECUTION

3.1 APPLICATION - GENERAL

Apply insulation to unheated and uncooled piping and equipment. Do not compress flexible elastomeric cellular insulation at joists, studs, columns, ducts, and hangers. The insulation must not pull apart after a one hour period; replace any insulation found to pull apart after one hour.

3.1.1 Display Samples

Submit and display, after approval of materials, actual sections of installed systems, properly insulated in accordance with the specification requirements. Such actual sections must remain accessible to inspection throughout the job and will be reviewed from time to time for controlling the quality of the work throughout the construction site. Identify each material used by indicating on an attached sheet the specification requirement for the material and the material by each manufacturer intended to meet the requirement. The Contracting Officer will inspect display sample sections at the jobsite. Keep approved display sample sections on display at the jobsite during the construction period. Upon completion of construction, the display sample sections will be closed and sealed.

3.1.1.1 Pipe Insulation Display Sections

Include as a minimum an elbow or tee, a valve, dielectric waterways and flanges, a hanger with protection shield and insulation insert, or dowel as required, at support point, method of fastening and sealing insulation at longitudinal lap, circumferential lap, butt joints at fittings and on pipe runs, and terminating points for each type of pipe insulation used on the job, and for hot pipelines and cold pipelines, both interior and exterior, even when the same type of insulation is used for these services.

3.1.1.2 Duct Insulation Display Sections

Display sample sections for rigid and flexible duct insulation used on the job. Use a temporary covering to enclose and protect display sections for duct insulation exposed to weather

3.1.2 Installation

Except as otherwise specified, install material in accordance with the manufacturer's written instructions. Do not apply insulation materials until tests and heat tracing specified in other paragraphs of this specification are completed. Remove material such as rust, scale, dirt and moisture from surfaces to receive insulation. Keep insulaton clean and dry. Do not remove insulation from its shipping containers until the day it is ready to use and return to like containers or equally protect from dirt and moisture at the end of each workday. Thoroughly clean insulation that becomes dirty prior to use. If insulation becomes wet or if cleaning does not restore the surfaces to like new condition, reject the insulation, and immediately remove from the jobsite. Stagger joints on multi layer insulation. Mix mineral fiber thermal insulating cement with demineralized water when used on stainless steel surfaces. Install

insulation, jacketing and accessories in accordance with MICA Insulation Stds plates except where modified herein or on the drawings.

3.1.3 Firestopping

Where pipes and ducts pass through fire walls, fire partitions, above grade floors, and fire rated chase walls, seal the penetration with fire stopping materials as specified in Section 07 84 00 FIRESTOPPING. The protection of ducts at point of passage through firewalls must be in accordance with NFPA 90A and NFPA 90B. All other penetrations, such as piping, conduit, and wiring, through firewalls must be protected with a material or system of the same hourly rating that is listed by UL, FM, or a NRTL.

3.1.4 Installation of Flexible Elastomeric Cellular Insulation

Install flexible elastomeric cellular insulation with seams and joints sealed with rubberized contact adhesive. Do not use flexible elastomeric cellular insulation on surfaces greater than 220 degrees F. Stagger seams when applying multiple layers of insulation. Protect insulation exposed to weather with metal jacketing as recommended by the manufacturer after the adhesive is dry and cured.

3.1.4.1 Adhesive Application

Apply a brush coating of adhesive to both butt ends to be joined and to both slit surfaces to be sealed. Allow the adhesive to set until dry to touch but tacky under slight pressure before joining the surfaces. Ensure insulation seals at seams and joints are not capable of being pulled apart one hour after application. Replace insulation that can be pulled apart one hour after installation.

3.1.4.2 Adhesive Safety Precautions

Use natural cross-ventilation, local (mechanical) pickup, or general area (mechanical) ventilation to prevent an accumulation of solvent vapors, keeping in mind the ventilation pattern must remove any heavier-than-air solvent vapors from lower levels of the workspaces. Gloves and spectacle-type safety glasses are recommended in accordance with safe installation practices.

3.1.5 Welding

Welding is not permitted on piping, duct or equipment without written approval of the Contracting Officer. The capacitor discharge welding process may be used for securing metal fasteners to duct.

3.1.6 Pipes/Ducts/Equipment That Require Insulation

Insulation is required on all pipes, ducts, or equipment, except for omitted items as specified.

3.2 PIPE INSULATION SYSTEMS INSTALLATION

3.2.1 Pipe Insulation

3.2.1.1 General

Install pipe insulation on aboveground hot and cold pipeline systems as specified below to form a continuous thermal retarder/barrier, including straight runs, fittings and appurtenances unless specified otherwise. Install full length units of insulation using a single cut piece to complete a run. Do not use cut pieces or scraps abutting each other. Omit pipe insulation on the following:

a. Air chambers.

b. Adjacent insulation.

c. ASME stamps.

d. Access plates of fan housings.

3.2.1.2 Pipes Passing Through Walls, Roofs, and Floors

Provide continuous pipe insulation through the sleeve.

Provide an aluminum jacket or vapor barrier/weatherproofing self adhesive jacket (minimum 2 mils adhesive, 3 mils embossed) less than 0.0000 permeability, greater than 3 ply standard grade, silver, white, black and embossed with factory applied moisture retarder over the insulation wherever penetrations require sealing.

3.2.1.2.1 Penetrate Interior Walls

Provide aluminum jacket or vapor barrier/weatherproofing - self adhesive jacket (minimum 2 mils adhesive, 3 mils embossed) less than 0.02 permeability, greater than 3 plies standard grade, silver, white, black and embossed which extends 2 inches beyond either side of the wall and secure on each end with a band.

3.2.1.2.2 Penetrating Floors

Extend the aluminum jacket from a point below the backup material to a point 10 inches above the floor with one band at the floor and one not more than 1 inch from the end of the aluminum jacket.

3.2.1.2.3 Penetrating Waterproofed Floors

Extend the aluminum jacket from below the backup material to a point 2 inches above the flashing with a band 1 inch from the end of the aluminum jacket.

3.2.1.2.4 Penetrating Exterior Walls

Continue the aluminum jacket required for pipe exposed to weather through the sleeve to a point 2 inches beyond the interior surface of the wall.

3.2.1.2.5 Penetrating Roofs

Insulate pipe as required for interior service to a point flush with the top of the flashing and sealed with flashing sealant. Tightly butt the insulation for exterior application to the top of flashing and interior insulation. Extend the exterior aluminum jacket 2 inches down beyond the end of the insulation to form a counter flashing. Seal the flashing and counter flashing underneath with metal jacketing/flashing sealant.

3.2.1.2.6 Hot Water Pipes Supplying Lavatories or Other Similar Heated Service

Terminate the insulation on the backside of the finished wall. Protect the insulation termination with two coats of vapor barrier coating with a minimum total thickness of 1/16 inch applied with glass tape embedded between coats (if applicable). Extend the coating out onto the insulation 2 inches and seal the end of the insulation. Overlap glass tape seams 1 inch. Caulk the annular space between the pipe and wall penetration with approved fire stop material. Cover the pipe and wall penetration with a properly sized (well fitting) escutcheon plate. Ensure the escutcheon plate overlaps the wall penetration at least 3/8 inches.

3.2.1.2.7 Domestic Cold Water Pipes Supplying Lavatories or Other Similar Cooling Service

Terminate the insulation on the finished side of the wall (i.e., insulation must cover the pipe throughout the wall penetration). Protect the insulation with two coats of weather barrier mastic (breather emulsion type weatherproof mastic impermeable to water and permeable to air) with a minimum total thickness of 1/16 inch. Extend the mastic out onto the insulation 2 inches and seal the end of the insulation. Caulk the annular space between the outer surface of the pipe insulation and the wall penetration with an approved fire stop material having vapor retarder properties. Cover the pipe and wall penetration with a properly sized (well fitting) escutcheon plate. Ensure the escutcheon plate overlaps the wall penetration by at least 3/8 inches.

3.2.1.3 Pipes Passing Through Hangers

Ensure insulation, whether hot or cold application, is continuous through hangers. Support all horizontal pipes 2 inches and smaller on hangers with the addition of a Type 40 protection shield to protect the insulation in accordance with MSS SP-58. Whenever insulation shows signs of being compressed, or when the insulation or jacket shows visible signs of distortion at or near the support shield, install insulation inserts as specified below for piping larger than 2 inches, or factory insulated hangers (designed with a load bearing core) can be used.

3.2.1.3.1 Horizontal Pipes Larger Than 2 Inches at 60 Degrees F and Above

Supported on hangers in accordance with MSS SP-58, and Section 22 00 00 PLUMBING, GENERAL PURPOSE.

3.2.1.3.2 Horizontal Pipes Larger Than 2 Inches and Below 60 Degrees F

Supported on hangers with the addition of a Type 40 protection shield in accordance with MSS SP-58. Install an insulation insert of cellular glass, prefabricated insulation pipe hangers, or perlite above 80 degrees F above each shield. Ensure insert covers no less than the bottom

180-degree arc of the pipe. Provide inserts that are the same thickness as the insulation, and extend 2 inches on each end beyond the protection shield. When insulation inserts are required in accordance with the above, and the insulation thickness is less than 1 inch, wooden or cork dowels or blocks may be installed between the pipe and the shield to prevent the weight of the pipe from crushing the insulation, as an option to installing insulation inserts. Ensure the insulation jacket is continuous over the wooden dowel, wooden block, or insulation insert.

3.2.1.3.3 Vertical Pipes

Supported with either Type 8 or Type 42 riser clamps with the addition of two Type 40 protection shields in accordance with MSS SP-58 covering the 360-degree arc of the insulation. Install an insulation insert of cellular glass or calcium silicate between each shield and the pipe. Ensure the insert covers the 360-degree arc of the pipe. Provide inserts that are the same thickness as the insulation, and extend 2 inches on each end beyond the protection shield. When insulation inserts are required in accordance with the above, and the insulation thickness is less than 1 inch, wooden or cork dowels or blocks may be installed between the pipe and the shield to prevent the hanger from crushing the insulation, as an option instead of installing insulation inserts. Ensure the insulation jacket is continuous over the wooden dowel, wooden block, or insulation insert. Support the vertical weight of the pipe with hangers located in a horizontal section of the pipe. When the pipe riser is longer than 30 feet, support the weight of the pipe additionally with hangers in the vertical run of the pipe that are directly clamped to the pipe, penetrating the pipe insulation. Use insulated hangers and seal the insulation jacket as indicated herein for anchors in a similar service.

3.2.1.3.4 Inserts

Covered with a jacket material of the same appearance and quality as the adjoining pipe insulation jacket, overlap the adjoining pipe jacket 1-1/2 inches, and seal as required for the pipe jacket. Use jacket material to cover inserts in flexible elastomeric cellular insulation conforming to ASTM C1136, Type 1, and is allowed to be of a different material than the adjoining insulation material.

3.2.1.4 Flexible Elastomeric Cellular Pipe Insulation

Flexible elastomeric cellular pipe insulation shall be permissible on a case by case basis for chilled water piping and domestic cold water piping. Use tubular form flexible elastomeric cellular pipe insulation for pipe sizes 6 inches and less. Grade 1, Do not stretch Type II sheet insulation used on pipes larger than 6 inches around the pipe. On pipes larger than 12 inches, adhere the insulation directly to the pipe on the lower 1/3 of the pipe. Stagger seams when applying multiple layers of insulation. Insulate sweat fittings with miter-cut pieces the same size as on adjacent piping. Insulate screwed fittings with sleeved fitting covers fabricated from miter-cut pieces and overlap and seal to the adjacent pipe insulation. Type II requires an additional exterior vapor retarder/barrier covering for high relative humidity and below ambient temperature applications.

3.2.1.5 Pipes in High Abuse Areas

In high abuse areas such as janitor closets and traffic areas in equipment rooms, kitchens, and mechanical rooms, utilize welded PVC , aluminum or

flexible laminate cladding (comprised of elastomeric, plastic or metal foil laminate) laminated self-adhesive (minimum 2 mils adhesive, 3 mils embossed) vapor barrier/weatherproofing jacket, - less than 0.02 permeability; (greater than 3 ply, standard grade, silver, white, black and embossed) aluminum jackets. Protect pipe insulation to the 6 foot level.

3.2.1.6 Pipe Insulation Material and Thickness

Pipe insulation materials must be as listed in Table 1 and must meet or exceed the requirements of ASHRAE 90.1 - IP. All refrigerant piping must be insulated in accordance with Section 23 23 00 REFRIGERANT PIPING. Insulate these refrigerant lines according to the temperature of the pipe contents while the Variable Refrigerant Flow (VRF) system is fully operating following the temperature parameters as stated in Table 1 and Table 2 of this specification.

TABLE 1					
Insulation Material for Piping					
Service					
	Material	Specification	Type	Class	VR/VB Req'd
Chilled Water (Supply & Return Piping, 40 F nominal)					
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		Yes
	Polyisocyanurate	ASTM C591	I	2	Yes
Heating Hot Water Supply & Return, Heated Oil (Max 250 F)					
	Mineral Fiber	ASTM C547	I	1	No
	Calcium Silicate	ASTM C533	I		No
	Cellular Glass	ASTM C552	II	2	No
	Flexible Elastomeric Cellular	ASTM C534/C534M	I	2	No
	Polyisocyanurate Max temp	ASTM C591	I	2	Yes
Cold Domestic Water Piping, Makeup Water, and Condenser Water Piping					
	Cellular Glass	ASTM C552	II	2	No
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		No
Hot Domestic Water Supply & Recirculating Piping (Max 200 F)					
	Mineral Fiber	ASTM C547	I	1	No
	Cellular Glass	ASTM C552	II	2	No
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		No
	Faced Phenolic Foam	ASTM C1126	III		Yes
Refrigerant Suction Piping (35 degrees F nominal)					

TABLE 1					
Insulation Material for Piping					
Service					
	Material	Specification	Type	Class	VR/VB Req'd
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		No
	Cellular Glass	ASTM C552	II	1	Yes
Exposed Lavatory Drains, Exposed Domestic Water Piping & Drains to Areas for Handicapped Personnel					
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		No
Condensate Drain Located Inside Building					
	Cellular Glass	ASTM C552	II	2	No
	Flexible Elastomeric Cellular	ASTM C534/C534M	I		No
Note: VR/VB = Vapor Retarder/Vapor Barrier. For Chilled Water piping and Domestic Cold Water piping, Flexible Elastomeric insulation is only permissible when rigid insulation is not practical and must be verified by Base Engineering Technician.					

TABLE 2							
Piping Insulation Thickness (inch)							
Service							
	Material	Conductivity K-value (Btu-in/ hr-ft^2-deg F)	Tube And Pipe Size (inch)				
			<1	1-<1.5	1.5-<4	4-<8	> or = >8
Chilled Water (Supply & Return, Dual Temperature Piping, 40 Degrees F nominal)							
	Polyisocyanurate	0.18	0.5	1	1	1	1.5
Heating Hot Water Supply & Return, Heated Oil (Max 250 F)							
	Mineral Fiber	0.27	2.5	2.5	2.5	3	3

TABLE 2							
Piping Insulation Thickness (inch)							
Service							
	Material	Conductivity K-value (Btu-in/ hr-ft^2-deg F)	Tube And Pipe Size (inch)				
			<1	1-<1.5	1.5-<4	4-<8	> or = >8
	Calcium Silicate	0.37	4	4	4	4	4
	Cellular Glass		3.5	3.5	3.5	4	4
	Faced Phenolic Foam	0.24	2.5	2.5	2.5	3	3
	Polyisocyanurate Max temp 140F	0.23	1	1	1.5	1.5	1.5
Cold Domestic Water Piping, Makeup Water, and Condenser Water							
	Cellular Glass	0.30	1.5	1.5	1.5	1.5	1.5
	Flexible Elastomeric Cellular	0.235	1	1	1	N/A	N/A
Hot Domestic Water Supply & Recirculating Piping (Max 200 F)							
	Mineral Fiber	0.26	1.5	1.5	2	2	2
Refrigerant Suction Piping (35 degrees F nominal)							
	Flexible Elastomeric Cellular	0.235	1	1	1	N/A	N/A
	Cellular Glass	0.29	1.5	1.5	1.5	1.5	1.5
Exposed Lavatory Drains, Exposed Domestic Water Piping & Drains to Areas for Handicapped Personnel							
	Flexible Elastomeric Cellular		0.5	0.5	0.5	0.5	0.5
Condensate Drain Located Inside Building							
	Cellular Glass	0.30	1.5	1.5	1.5	1.5	1.5

TABLE 2							
Piping Insulation Thickness (inch)							
Service							
	Material	Conductivity K-value (Btu-in/ hr-ft^2-deg F)	Tube And Pipe Size (inch)				
			<1	1-<1.5	1.5-<4	4-<8	> or = >8
	Flexible Elastomeric Cellular	0.235	1	1	1	N/A	N/A

3.2.2 Aboveground Cold Pipelines

Insulate the following cold pipelines for minus 30 to plus 60 degrees F in accordance with Table 2 except those piping listed in subparagraph Pipe Insulation in PART 3 as to be omitted. This includes but is not limited to the following:

a. Make-up water.

b. Horizontal and vertical portions of interior roof drains.

c. Refrigerant suction lines.

d. Chilled water.

e. Dual temperature water, i.e. HVAC hot/chilled water.

f. Air conditioner condensate drains.

g. Brine system cryogenics.

h. Condenser water piping where pipe temperature may fall below ambient dew point.

i. Exposed lavatory drains and domestic water lines serving plumbing fixtures for handicap persons.

j. Domestic cold and chilled drinking water.

3.2.2.1 Insulation Material and Thickness

Determine insulation thickness for cold pipelines using Table 2.

3.2.2.2 Factory or Field applied Jacket

Cover insulation with a factory applied vapor retarder jacket/vapor barrier or field applied seal welded PVC jacket or greater than 3 ply laminated self-adhesive (minimum 2 mils adhesive, 3 mils embossed) vapor barrier/weatherproofing jacket - less than 0.02 permeability, standard grade, sliver, white, black and embossed for use with Mineral Fiber, Cellular Glass, and Phenolic Foam Insulated Pipe. For insulation inside the building, to be protected with an aluminum jacket, PVC jacket or fittings (installed over a vapor retarder jacket), or greater than 3 ply vapor barrier/weatherproofing self-adhesive (minimum 2 mils adhesive, 3 mils embossed) product, less than 0.02 permeability, standard grade, Embossed Silver, White & Black, install the insulation and vapor retarder jacket as specified herein. Install the aluminum jacket, PVC jacket or fittings (installed over a vapor retarder jacket), or greater than 3 ply vapor barrier/weatherproofing self-adhesive (minimum 2 mils adhesive, 3 mils embossed) product, less than 0.02 permeability, standard grade, embossed silver, White & Black, as specified for piping exposed to weather, except sealing of the laps of the aluminum jacket is not required. In high abuse areas such as janitor closets and traffic areas in equipment rooms, kitchens, and mechanical rooms, provide aluminum jackets, PVC jacket or fittings (installed over a vapor retarder jacket), or greater than 3 ply vapor barrier/weatherproofing self-adhesive (minimum 2 mils adhesive, 3 mils embossed) product, less than 0.02 permeability, standard grade, embossed silver, white & black, for pipe insulation to the 6 ft level.

3.2.2.3 Installing Insulation for Straight Runs Hot and Cold Pipe

Apply insulation to the pipe with tight butt joints. Seal all butted joints and ends with joint sealant and seal with a vapor retarder coating, greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape or PVDC adhesive tape.

3.2.2.3.1 Longitudinal Laps of the Jacket Material

Overlap not less than 1-1/2 inches. Provide butt strips 3 inches wide for circumferential joints.

3.2.2.3.2 Laps and Butt Strips

Secure with adhesive and staple on 4 inch centers if not factory self-sealing. If staples are used, seal in accordance with paragraph STAPLES below. Note that staples are not required with cellular glass systems.

3.2.2.3.3 Factory Self-Sealing Lap Systems

May be used when the ambient temperature is between 40 and 120 degrees F during installation. Install the lap system in accordance with manufacturer's recommendations. Use a stapler only if specifically recommended by the manufacturer. Where gaps occur, replace the section or repair the gap by applying adhesive under the lap and then stapling.

3.2.2.3.4 Staples

Coat all staples, including those used to repair factory self-seal lap systems, with a vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate jacket - 0.0000 perm adhesive tape. Coat all seams, except those on factory self-seal systems, with vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape.

3.2.2.3.5 Breaks and Punctures in the Jacket Material

Patch by wrapping a strip of jacket material around the pipe and secure it with adhesive, staple, and coat with vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape. Extend the patch not less than 1-1/2 inches past the break.

3.2.2.3.6 Penetrations Such as Thermometers

Fill the voids in the insulation and seal with vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape.

3.2.2.3.7 Flexible Elastomeric Cellular Pipe Insulation

Install by slitting the tubular sections and applying them onto the piping or tubing. Alternately, whenever possible slide un-slit sections over the open ends of piping or tubing. Secure all seams and butt joints and seal with adhesive. When using self seal products, secure only the butt joints with adhesive. Push insulation on the pipe, never pulled. Stretching of insulation may result in open seams and joints. Clean cut all edges. Rough or jagged edges of the insulation are not be permitted. Use proper tools such as sharp knives. Do not stretch Grade 1, Type II sheet insulation around the pipe when used on pipe larger than 6 inches. On pipes larger than 12 inches, adhere sheet insulation directly to the pipe on the lower 1/3 of the pipe.

3.2.2.4 Insulation for Fittings and Accessories

a. Butt pipe insulation tightly to the insulation of the fittings and accessories. Seal the butted joints and ends with joint sealant and seal with a vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape.

b. Place precut or preformed insulation around all fittings and accessories and conform to MICA plates except as modified herein: 5 for anchors; 10, 11, and 13 for fittings; 14 for valves; and 17 for flanges and unions. Insulation must be the same insulation as the pipe insulation, including same density, thickness, and thermal conductivity. Where precut/preformed is unavailable, rigid preformed pipe insulation sections may be segmented into the shape required. Use insulation of the same thickness and conductivity as the adjoining pipe insulation. If nesting size insulation is used, overlap the insulation 2 inches or one pipe diameter. Elbows insulated using segments must conform to MICA Tables 12.20 "Mitered Insulation Elbow'. Submit a booklet containing completed MICA Insulation Stds plates detailing each insulating system for each pipe, duct, or equipment insulating system, after approval of materials and prior to applying insulation.

(1) Ensure MICA plates detail the materials to be installed and the specific insulation application. Submit all MICA plates required showing the entire insulating system, including plates required to show insulation penetrations, vessel bottom and top heads, legs, and skirt insulation as applicable. Present all variations of insulation systems including locations, materials, vaporproofing, jackets and insulation accessories.

(2) If the Contractor elects to submit detailed drawings instead of edited MICA Plates, ensure the detail drawings are technically equivalent to the edited MICA Plate submittal.

c. Upon completion of insulation installation on flanges, unions, valves, anchors, fittings and accessories, terminations, seams, joints and insulation not protected by factory vapor retarder jackets or PVC fitting covers must be protected with PVDC or greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape or two coats of vapor retarder coating with a minimum total thickness of 1/16 inch, applied with glass tape embedded between coats. Overlap tap seams 1 inch. Extend the coating out onto the adjoining pipe insulation 2 inches. Protect fabricated insulation with a factory vapor retarder jacket with either greater than 3 ply laminate jacket - less than 0.0000 perm adhesive tape, standard grade, silver, white, black and embossed or PVDC adhesive tape or two coats of vapor retarder coating with a minimum thickness of 1/16 inch and with a 2 inch wide glass tape embedded between coats. Where fitting insulation butts to pipe insulation, seal the joints with a vapor retarder coating and a 4 inch wide ASJ tape which matches the jacket of the pipe insulation.

d. Insulate anchors attached directly to the pipe for a sufficient distance to prevent condensation but no less than 6 inches from the insulation surface.

e. Mark insulation to show the location of unions, strainers, and check valves.

3.2.2.5 Optional PVC Fitting Covers

At the option of the Contractor, premolded, one or two piece PVC fitting covers may be used in lieu of the vapor retarder and embedded glass tape. Factory precut insulation inserts or premolded insulation segments must be used under the fitting covers for elbows, tees and other miscellaneous configurations. Insulation inserts must be the same installed insulation thickness. One insert must be installed for each inch of pipe insulation. The installed and compressed insert must have the same thermal performance as the pipe insulation. Premolded insulation segments must be the same insulation as the pipe insulation including same density, thickness, and thermal conductivity. PVC fitting covers must be secured by PVC vapor retarder tape, adhesive, seal welding or with tacks made for securing PVC covers. For above ambient pipe temperatures, secure PVC covers using tacks. As an option circumferential joints can be covered with PVC vapor retarder tape. For below ambient conditions seal system using PVC vapor retarder tape, and vapor retarder mastic with vapor dams. Longitudinal seams may be sealed with vapor retarder mastic, PVC vapor retarder tape or solvent weld adhesive to obtain a continuous vapor seal. For severe service conditions install PVC jackets over the existing ASJ jacket and seal using a solvent weld adhesive.

3.2.3 Aboveground Hot Pipelines

3.2.3.1 General Requirements

Insulate all hot pipe lines above 60 degrees F, except those piping listed in subparagraph Pipe Insulation in PART 3 as to be omitted, in accordance with Table 2. This includes but is not limited to the following:

a. Domestic hot water supply & re-circulating system.

b. Condensate & compressed air discharge.

c. Hot water heating.

d. Heated oil.

e. Water defrost lines in refrigerated rooms.

Cover insulation, in accordance with manufacturer's recommendations, with a factory applied Type I jacket or field applied aluminum where required or seal welded PVC.

3.2.3.2 Insulation for Fittings and Accessories

Butt pipe insulation tightly to the insulation of the fittings and accessories. Seal butted joints and ends with joint sealant. Mark insulation to show the location of unions, strainers, check valves and other components that would otherwise be hidden from view by the insulation.

3.2.3.2.1 Precut or Preformed

Place precut insulation inserts or preformed insulation inserts around all fittings and accessories. Insulation inserts must be the same installed insulation thickness as the pipe insulation. One insert must be installed for each inch of pipe insulation thickness. The installed and compressed insert must have the same thermal performance as the pipe insulation. Preformed insulation inserts must be the same insulation as the pipe insulation including same density, thickness, and thermal conductivity.

3.2.3.2.2 Rigid Preformed

Where precut/preformed is unavailable, rigid preformed pipe insulation sections may be segmented into the shape required. Use insulation that is the same thickness and conductivity as the adjoining pipe insulation. If nesting size insulation is used, do not overlap insulation 2 inches or one pipe diameter. Elbows insulated using segments must conform to MICA Tables 12.20 "Mitered Insulation Elbow".

3.2.4 Piping Exposed to Weather

Insulate and jacket piping exposed to weather as specified for the applicable service inside the building. After this procedure, apply a laminated self-adhesive (minimum 2 mils adhesive, 3 mils embossed) vapor barrier/weatherproofing jacket - less than 0.02 permeability (greater than 3 ply, standard grade, silver, white, black and embossed aluminum jacket, stainless steel or PVC jacket.

PVC jacketing requires no factory-applied jacket beneath it, however apply

an all service jacket if factory applied jacketing is not furnished.

3.2.4.1 Aluminum Jacket

Provide chilled water piping exposed to weather with aluminum insulation jacket with SS draw bands. The jacket for hot piping may be factory applied. Overlap the jacket no less than 2 inches at longitudinal and circumferential joints and secure with bands at no more than 12 inch centers. Overlap longitudinal joints down to shed water and locate at 4 or 8 o'clock positions. Seal joints on piping 60 degrees F and below with metal jacketing/flashing sealant while overlapping to prevent moisture penetration. Where jacketing on piping 60 degrees F and below abuts an un-insulated surface, caulk joints to prevent moisture penetration. Seal joints on piping above 60 degrees F with a moisture retarder.

3.2.4.2 Insulation for Fittings

Insulate and finish flanges, unions, valves, fittings, and accessories as specified for the applicable service. Apply two coats of breather emulsion type weatherproof mastic (impermeable to water, permeable to air) recommended by the insulation manufacturer with glass tape embedded between coats. Overlap tap no less than 1 inch and the adjoining aluminum jacket no less than 2 inches. Factory preformed aluminum jackets may be used in lieu of the above. Provide molded PVC fitting covers when PVC jackets are used for straight runs of pipe.PVC fitting covers must be sealed based upon the pipe temperature in combination with ambient conditions and if the pipe insulation will be exposed to severe service conditions. For below ambient conditions, the pipe insulation and insulation fittings must be covered and sealed with a vapor barrier or weatherproofing jacket with a minimum 0.02 permeability as defined per ASTM C1136 before installing the PVC jacket and fitting cover. When in doubt as to the pipe temperature or service conditions, secure the PVC jacket using a weld adhesive using the manufacturer's recommended adhesive.

3.2.4.3 PVC Jacket

Provide ultraviolet resistant PVC jacket that is adhesive welded weather tight with manufacturer's recommended adhesive. Include provision for thermal expansion.

3.2.4.4 Stainless Steel Jackets

ASTM A240/A240M; Type 304, minimum thickness of 33 gauge (0.010 inch), smooth surface with factory-applied polyethylene and kraft paper moisture barrier on inside surface. Provide stainless steel bands, minimum width of 1/2 inch.

3.3 DUCT INSULATION SYSTEMS INSTALLATION

Except for oven hood exhaust duct insulation, install corner angles on external corners of insulation on ductwork in exposed finished spaces before covering with jacket. Air conditioned spaces are defined as those spaces directly supplied with cooled conditioned air (or provided with a cooling device such as a fan-coil unit) and heated conditioned air (or provided with a heating device such as a unit heater, radiator or convector).

3.3.1 Duct Insulation Minimum Thickness

Duct insulation minimum thickness in accordance with Table 4.

Table 4 - Minimum Duct Insulation (inches)	
Cold Air Ducts	2.0
Relief Ducts	2.0
Fresh Air Intake Ducts	2.0
Warm Air Ducts	2.0
Relief Ducts	2.0
Fresh Air Intake Ducts	2.0

3.3.2 Insulation and Vapor Retarder/Vapor Barrier for Cold Air Duct

Provide insulation and vapor retarder/vapor barrier for the following cold air ducts and associated equipment.

a. Supply ducts.

b. Return air ducts.

c. Relief ducts.

d. Flexible run-outs (field-insulated).

e. Plenums.

f. Duct-mounted coil casings.

g. Coil headers and return bends.

h. Coil casings.

i. Fresh air intake ducts.

j. Filter boxes.

k. Mixing boxes (field-insulated).

l. Supply fans (field-insulated).

m. Site-erected air conditioner casings.

n. Ducts exposed to weather.

o. Combustion air intake ducts.

p. Exhaust ducts passing through concealed spaces, unconditioned spaces, or semi-heated spaces exhausting conditioned air.

Use insulation for rectangular ducts that is flexible type where concealed, minimum density 3/4 pcf, and rigid type where exposed, minimum

density 3 pcf. Provide insulation for both concealed or exposed round/oval ducts that is flexible type, minimum density 3/4 pcf or a semi rigid board, minimum density 3 pcf, formed or fabricated to a tight fit, edges beveled and joints tightly butted and staggered. Provide insulation for all exposed ducts with either a white, paint-able, factory-applied Type I jacket or a field applied vapor retarder/vapor barrier jacket coating finish as specified. Ensure the total field applied dry film thickness is approximately 1/16 inch. Provide insulation on all concealed duct with a factory-applied Type I or II vapor retarder/vapor barrier jacket. Continue duct insulation through sleeves and prepare openings except firewall penetrations. Duct insulation terminating at fire dampers, must be continuous over the damper collar and retaining angle of fire dampers, which are exposed to unconditioned air and which may be prone to condensate formation. Provide duct insulation and vapor retarder/vapor barrier to cover the collar, neck, and un-insulated surfaces of diffusers, registers and grills. Apply vapor retarder/vapor barrier materials to form a complete unbroken vapor seal over the insulation. Seal sheet metal duct in accordance with Section 23 30 00 HVAC AIR DISTRIBUTION.

3.3.2.1 Installation on Concealed Duct

a. For rectangular, oval or round ducts, attach flexible insulation by applying adhesive around the entire perimeter of the duct in 6 inch wide strips on 12 inch centers.

b. For rectangular and oval ducts, 24 inches and larger, additionally secure insulation to bottom of ducts using mechanical fasteners. Space fasteners on 16 inch centers and no more than 16 inches from duct corners.

c. For rectangular, oval and round ducts, provide mechanical fasteners on sides of duct risers for all duct sizes. Space fasteners on 16 inch centers and no more than 16 inches from duct corners.

d. Impale insulation on the mechanical fasteners (self stick pins) where used and press thoroughly into the adhesive. Take care to ensure vapor retarder/vapor barrier jacket joints overlap 2 inches. Do not compress insulation to a thickness less than that specified. Carry insulation over standing seams and trapeze-type duct hangers.

e. Where mechanical fasteners are used, install self-locking washers and trim and bend the pin over.

f. Secure jacket overlaps with staples and tape as necessary to ensure a secure seal. Coat staples, tape and seams with a brush coat of vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate (minimum 2 mils adhesive, 3 mils embossed) - less than 0.0000 perm adhesive tape.

g. Cover breaks in the jacket material with patches of the same material as the vapor retarder jacket. Do not extend patches less than 2 inches beyond the break or penetration in all directions and secure with tape and staples. Seal staples and tape joints with a brush coat of vapor retarder coating or PVDC adhesive tape or greater than 3 ply laminate (minimum 2 mils adhesive, 3 mils embossed) - less than 0.0000 perm adhesive tape.

h. At jacket penetrations such as hangers, thermometers, and damper

operating rods, fill voids in the insulation and seal the penetration with a brush coat of vapor retarder coating or PVDC adhesive tape greater than 3 ply laminate (minimum 2 mils adhesive, 3 mils embossed) - less than 0.0000 perm adhesive tape.

i. Seal insulation terminations and pin punctures and flash with a reinforced vapor retarder coating finish or tape with a brush coat of vapor retarder coating.. Ensure the coating overlaps the adjoining insulation and un-insulated surface 2 inches. Extend pin puncture coatings 2 inches from the puncture in all directions.

j. Where insulation standoff brackets occur, extend insulation under the bracket and terminate the jacket at the bracket.

3.3.2.2 Installation on Exposed Duct Work

a. For rectangular ducts, secure rigid insulation to the duct by mechanical fasteners on all four sides of the duct, space no more than 12 inches apart and no more than 3 inches from the edges of the insulation joints. Provide a minimum of two rows of fasteners for each side of duct 12 inches and larger. Provide one row for each side of duct less than 12 inches. Provide mechanical fasteners that are corrosion resistant as G60 coated galvanized steel, and indefinitely sustain a 50 lb tensile dead load test perpendicular to the duct wall.

b. Form duct insulation with minimum jacket seams. Fasten each piece of rigid insulation to the duct using mechanical fasteners. When the height of projections is less than the insulation thickness, bring insulation up to standing seams, reinforcing, and other vertical projections and do not carry over. Continue vapor retarder/barrier jacket across seams, reinforcing, and projections. When height of projections is greater than the insulation thickness, carry over insulation and jacket . Apply insulation with joints tightly butted. Neatly bevel insulation around name plates and access plates and doors.

c. Impale insulation on the fasteners; install self-locking washers and trim and bend the pin over.

d. Seal joints in the insulation jacket with a 4 inch wide strip of tape. Seal taped seams with a brush coat of vapor retarder coating.

e. Cover breaks and ribs or standing seam penetrations in the jacket material with a patch of the same material as the jacket. Do not extend patches less than 2 inches beyond the break or penetration and secure with tape and staple. Seal staples and joints with a brush coat of vapor retarder coating.

f. At jacket penetrations such as hangers, thermometers, and damper operating rods, fill the voids in the insulation and seal the penetrations with a flashing sealant.

g. Seal and flash insulation terminations and pin punctures with a reinforced vapor retarder coating finish. Ensure coating overlaps the adjoining insulation and un-insulated surface 2 inches. Extend pin puncture coatings 2 inches from the puncture in all directions.

h. Insulation for both concealed or exposed round or oval ducts must be flexible type, minimum density 3/4 pcf or a semi rigid board, minimum density 3 pcf, formed or fabricated to a tight fit, edges beveled and

joints tightly butted and staggered. Insulation for all exposed ducts must be provided with either a white, factory-applied Type I jacket or a field applied vapor retarder or vapor barrier jacket coating finish as specified, the total field applied dry film thickness must be approximately 1/16 inch.

i. Insulate oval and round ducts, flexible type, with factory Type I jacket insulation with minimum density of 3/4 pcf, attach in accordance with MICA standards.

3.3.3 Insulation for Warm Air Duct

Provide insulation and vapor barrier for the following warm air ducts and associated equipment:.

a. Supply ducts.

b. Return air ducts.

c. Relief air ducts

d. Flexible run-outs (field insulated).

e. Plenums.

f. Duct-mounted coil casings.

g. Coil-headers and return bends.

h. Coil casings.

i. Fresh air intake ducts.

j. Filter boxes.

k. Mixing boxes.

l. Supply fans.

m. Site-erected air conditioner casings.

n. Ducts exposed to weather.

o. Exhaust ducts passing through concealed spaces, unconditioned spaces, or semi-heated spaces exhausting conditioned air.

Provide insulation for rectangular ducts that is flexible type where concealed, and rigid type where exposed. Provide insulation on exposed ducts with a white, paint-able, factory-applied Type II jacket, or finish with adhesive finish. Use flexible type insulation for round ducts, with a factory-applied Type II jacket. Provide insulation on concealed duct with a factory-applied Type II jacket. Accomplish adhesive finish where indicated to be used by applying two coats of adhesive with a layer of glass cloth embedded between the coats. Ensure total dry film thickness is approximately 1/16 inch. Continue duct insulation through sleeves and prepare openings. Terminate duct insulation at fire dampers and flexible connections.

3.3.3.1 Installation on Concealed Duct

a. For rectangular, oval and round ducts, attach insulation by applying adhesive around the entire perimeter of the duct in 6 inch wide strips on 12 inch centers.

b. For rectangular and oval ducts 24 inches and larger, secure insulation to the bottom of ducts using mechanical fasteners. Space fasteners on 18 inch centers and no more than 18 inches from duct corner.

c. For rectangular, oval and round ducts, provide mechanical fasteners on sides of duct risers for all duct sizes. Space fasteners on 18 inch centers and no more than 18 inches from duct corners.

d. Impale insulation on the mechanical fasteners where used. Do not compress insulation to a thickness less than that specified. Carry insulation over standing seams and trapeze-type hangers.

e. Install self-locking washers where mechanical fasteners are used and trim and bend the pin over.

f. Do not overlap insulatio jacket less than 2 inches at joints and secure the lap and staple on 4 inch centers.

3.3.3.2 Installation on Exposed Duct

a. For rectangular ducts, secure the rigid insulation to the duct using mechanical fasteners on all four sides of the duct, space no more than 16 inches apart and no more than 6 inches from the edges of the insulation joints. Provide a minimum of two rows of fasteners for each side of duct 12 inches and larger and a minimum of one row for each side of duct less than 12 inches.

b. Form duct insulation with factory-applied jacket with minimum jacket seams, and fasten each piece of rigid insulation to the duct using mechanical fasteners. When the height of projection is less than the insulation thickness, bring insulation up to standing seams, reinforcing, and other vertical projections and do not carry over the projection. Continue jacket across seams, reinforcing, and projections. Where the height of projections is greater than the insulation thickness, carry insulation and jacket over the projection.

c. Impale insulation on the fasteners; install self-locking washers and trim and bend the pin over.

d. Seal joints on jacketed insulation with a 4 inch wide strip of tape and brush with vapor retarder coating.

e. Cover breaks and penetrations in the jacket material with a patch of the same material as the jacket. Extend patches no less than 2 inches beyond the break or penetration and secure with adhesive and staple.

f. Seal insulation terminations and pin punctures with tape and brush with vapor retarder coating.

g. Insulate oval and round ducts, flexible type, with factory Type I jacket insulation, minimum density of 3/4 pcf attach by staples spaced no more than 16 inches and no more than 6 inches from the degrees of joints. Seal joints in accordance with item "d." above.

3.3.4 Ducts Handling Air for Dual Purpose

For air handling ducts for dual purpose below and above 60 degrees F, insulate ducts as specified for cold air duct.

3.3.5 Insulation for Evaporative Cooling Duct

Insulate evaporative cooling supply duct located in spaces not evaporatively cooled. Use material and installation requirements as specified for duct insulation for warm air duct.

3.3.6 Duct Test Holes

After duct systems have been tested, adjusted, and balanced, repair breaks in the insulation and jacket in accordance with the applicable section of this specification for the type of duct insulation to be repaired. After the insulation is repaired, identify on the outside of the insulation with marker, sticker, or other means "TAB test ports."

3.3.7 Duct Exposed to Weather

3.3.7.1 Installation

Insulate and finish ducts exposed to weather as specified for the applicable service for exposed duct inside the building. After the above is accomplished, further finish the insulation as detailed in the following subparagraphs.

3.3.7.2 Round Duct

Laminated self-adhesive (minimum 2 mils adhesive, 3 mils embossed) vapor barrier/weatherproofing jacket - Less than 0.02 permeability, (greater than 3 ply, standard grade, silver, white, black and embossed or greater than 8 ply, heavy duty, white and natural) membrane must be applied overlapping material by 3 inches no bands or caulking needed - see manufacturer's recommended installation instructions. Aluminum jacket with factory applied moisture retarder must be applied with the joints lapped no less than 3 inches and secured with bands located at circumferential laps and at no more than 12 inch intervals throughout. Lap horizontal joints down to shed water and located at 4 or 8 o'clock position. Seal joints with metal jacketing sealant to prevent moisture penetration. Where jacketing abuts an un-insulated surface, seal joints with metal jacketing sealant.

3.3.7.3 Fittings

Finish fittings and other irregular shapes as specified for rectangular ducts.

3.3.7.4 Rectangular Ducts

Apply two coats of weather barrier mastic reinforced with fabric or mesh for outdoor application to the entire surface. Ensure each coat of weatherproof mastic has a minimum thickness of 1/16 inch. Ensure exterior is a metal jacketing applied for mechanical abuse and weather protection, and secure with screws or vapor barrier/weatherproofing jacket less than 0.02 permeability greater than 3 ply, standard grade, silver, white, black, and embossed or greater than 8 ply, heavy duty white and natural.

Apply membrane overlapping material by 3 inches. No bands or caulking needed-see manufacturing recommend installation instructions.

3.3.8 Kitchen Exhaust Duct Insulation

NFPA 96 for ovens, . Provide insulation with 3/4 inch wide, minimum 0.15 inch thick galvanized steel bands spaced not over 12 inches o.c.; or 16 gauge galvanized steel wire with corner clips under the wire; or with heavy welded pins spaced not over 12 inches apart each way. Do not use adhesives.

3.4 EQUIPMENT INSULATION SYSTEMS INSTALLATION

3.4.1 General

Provide removable insulation sections to cover parts of equipment that must be opened periodically for maintenance including vessel covers, fasteners, flanges and accessories. Omit equipment insulation on the following:

a. Hand-holes.

b. Boiler manholes.

c. Cleanouts.

d. ASME stamps.

e. Manufacturer's nameplates.

f. Duct Test/Balance Test Holes.

3.4.2 Insulation for Cold Equipment

Cold equipment below 60 degrees F: Furnish insulation on equipment handling media below 60 degrees F including the following:

a. Pumps.

b. Refrigeration equipment parts that are not factory insulated.

c. Drip pans under chilled equipment.

d. Cold water storage tanks.

e. Water softeners.

f. Duct mounted coils.

g. Cold and chilled water pumps.

h. Pneumatic water tanks.

i. Roof drain bodies.

j. Air handling equipment parts that are not factory insulated.

k. Expansion and air separation tanks.

3.4.2.1 Insulation Type

Provide insulation suitable for the temperature encountered. Provide material and thicknesses as shown in Table 5:

TABLE 5		
Insulation Thickness for Cold Equipment (inches)		
Equipment handling media at indicated temperature		
	Material	Thickness (inches)
35 to 60 degrees F		
	Cellular Glass	1.5
	Flexible Elastomeric Cellular	1
1 to 34 degrees F		
	Cellular Glass	3
	Flexible Elastomeric Cellular	1.5
Minus 30 to 0 degrees F		
	Cellular Glass	3.5
	Flexible Elastomeric Cellular	1.75

3.4.2.2 Pump Insulation

a. Insulate pumps by forming a box around the pump housing. Construct the box by forming the bottom and sides using joints that do not leave raw ends of insulation exposed. Join joints between sides and between sides and bottom by adhesive with lap strips for rigid mineral fiber and contact adhesive for flexible elastomeric cellular insulation. Ensure box conforms to the requirements of MICA Insulation Stds plate No. 49 when using flexible elastomeric cellular insulation. Ensure joints between top cover and sides fit tightly forming a female shiplap joint on the side pieces and a male joint on the top cover, thus making the top cover removable.

b. Protect exposed insulation corners with corner angles.

c. Upon completion of installation of the insulation, including removable sections, apply two coats of vapor retarder coating with a layer of glass cloth embedded between the coats. The total dry thickness of the finish must be 1/16 inch. Provide a parting line between the box and the removable sections allowing the removable sections to be removed without disturbing the insulation coating. Apply flashing sealant to parting line, between equipment and removable section insulation, and at all penetrations.

3.4.2.3 Other Equipment

a. Form or fabricate insulation to fit the equipment. To ensure a tight fit on round equipment, bevel edges and tightly butt and stagger joints.

b. Secure insulation in place with bands or wires at intervals as recommended by the manufacturer but no more than 12 inch centers except adhere flexible elastomeric cellular with contact adhesive. Protect insulation corners under wires and bands with suitable corner angles.

c. Install cellular glass in accordance with manufacturer's instructions. Seal joints and ends with joint sealant, and seal with a vapor retarder coating.

d. Use removable insulation on heads of heat exchangers. Fabricate removable section joints using a male-female shiplap type joint. Finish the entire surface of the removable section by applying two coats of vapor retarder coating with a layer of glass cloth embedded between the coats. The total dry thickness of the finish must be 1/16 inch.

e. Protect exposed insulation corners with corner angles.

f. Apply insulation on equipment with ribs over 6 by 6 inches by 12 gauge welded wire fabric which has been cinched in place, or if approved by the Contracting Officer, spot weld to the equipment over the ribs. Secure insulation to the fabric with J-hooks and 2 by 2 inches washers or securely band or wire in place on 12 inch centers.

3.4.2.4 Vapor Retarder/Vapor Barrier

Upon completion of installation of insulation, caulk penetrations. Apply two coats of vapor retarder coating or vapor barrier jacket over insulation, including removable sections, with a layer of open mesh synthetic fabric embedded between the coats. Ensure the total dry thickness of the finish is 1/16 inch. Apply flasing sealant or vapor barrier tape to parting line between equipment and removable section insulation.

3.4.3 Insulation for Hot Equipment

Furnish insulation on equipment handling media above 60 degrees F including the following:

a. Converters.

b. Heat exchangers.

c. Hot water generators.

d. Water heaters.

e. Pumps handling media above 130 degrees F.

f. Fuel oil heaters.

g. Hot water storage tanks.

h. Air separation tanks.

i. Surge tanks.

j. Flash tanks.

k. Feed-water heaters.

l. Unjacketed boilers or parts of boilers.

m. Boiler flue gas connection from boiler to stack (if inside).

n. Induced draft fans.

o. Fly ash and soot collectors.

p. Condensate receivers.

3.4.3.1 Insulation

Provide insulation suitable for the temperature encountered. Insulate shell and tube-type heat exchangers for the temperature of the shell medium.

Determine insulation thickness for hot equipment using Table 6:

TABLE 6		
Insulation Thickness for Hot Equipment (inches)		
Equipment handling steam or media at indicated pressure or temperature limit		
	Material	Thickness (inches)
15 psig or 250 degrees F		
	Rigid Mineral Fiber	2
	Flexible Mineral Fiber	2
	Calcium Silicate/Perlite	4
	Cellular Glass	3
	Faced Phenolic Foam	1.5
	Flexible Elastomeric Cellular (<200 F)	1
200psig or 400 degrees F		
	Rigid Mineral Fiber	3
	Flexible Mineral Fiber	3
	Calcium Silicate/Perlite	4
	Cellular Glass	4
600 degrees F		

TABLE 6		
Insulation Thickness for Hot Equipment (inches)		
Equipment handling steam or media at indicated pressure or temperature limit		
	Material	Thickness (inches)
	Rigid Mineral Fiber	5
	Flexible Mineral Fiber	6
	Calcium Silicate/Perlite	6
	Cellular Glass	6
600 degrees F: Thickness necessary to limit the external temperature of the insulation to 120 F. Submit heat transfer calculations to substantiate insulation and thickness selection.		

3.4.3.2 Insulation of Boiler Stack and Diesel Engine Exhaust Pipe

Inside mechanical Room, bevel insulation neatly around openings and provide sheet metal insulation stop strips around such openings. Apply a skim coat of hydraulic setting cement directly to insulation. Apply a flooding coat of adhesive over hydraulic setting cement, and while still wet, press a layer of glass cloth or tape into adhesive and seal laps and edges with adhesive. Coat glass cloth with adhesive. When dry, apply a finish coat of adhesive at can-consistency so that when dry no glass weave is observed. Provide metal jackets for stacks and exhaust pipes that are located above finished floor and spaces outside mechanical room. Apply metal jackets directly over insulation and secure with 3/4 inch wide metal bands spaced on 18 inch centers. Do not insulate name plates. Provide insulation type and thickness in accordance with the following Table 7.

TABLE 7						
Insulation and Thickness for Boiler Stack and Diesel Engine Exhaust Pipe						
Service & Surface Temperature Range (Degrees F)						
	Material	Outside Diameter (Inches)				
		0.25 - 1.25	1 - 1.67	3.5-5	6 - 10	> or = 11 - 36
Boiler Stack (Up to 400 degrees F)						

TABLE 7						
Insulation and Thickness for Boiler Stack and Diesel Engine Exhaust Pipe						
Service & Surface Temperature Range (Degrees F)						
	Material	Outside Diameter (Inches)				
		0.25 - 1.25	1 - 1.67	3.5-5	6 - 10	> or = 11 - 36
	Mineral Fiber ASTM C585 Class B-3, ASTM C547 Class 1, or ASTM C612 Class 1	N/A	N/A	3	3.5	4
	Calcium Silicate ASTM C533, Type 1	N/A	N/A	3	3.5	4
	Cellular Glass ASTM C552, Type II	1.5	1.5	1.5	2	2.5
Boiler Stack (401 to 600 degrees F)						
	Mineral Fiber ASTM C547 Class 2, ASTM C592 Class 1, or ASTM C612 Class 3	N/A	N/A	4	4	5
	Calcium Silicate ASTM C533, Type I or II	N/A	N/A	4	4	4
	Mineral Fiber and Cellular Glass Assembly:					
	Mineral Fiber ASTM C547 Class 2, ASTM C592 Class 1, or ASTM C612 Class 3	1	1	1	1	2
	Cellular Glass ASTM C552, Type II	2	2	2	2	2
Boiler Stack (601 to 800 degrees F)						

TABLE 7						
Insulation and Thickness for Boiler Stack and Diesel Engine Exhaust Pipe						
Service & Surface Temperature Range (Degrees F)						
	Material	Outside Diameter (Inches)				
		0.25 - 1.25	1 - 1.67	3.5-5	6 - 10	> or = 11 - 36
	Mineral Fiber ASTM C547 Class 3, ASTM C592 Class 1, or ASTM C612 Class 3	N/A	N/A	4	4	6
	Calcium Silicate ASTM C533, Type I or II	N/A	N/A	4	4	6
	Mineral Fiber and Cellular Glass Assembly:					
	Mineral Fiber ASTM C547 Class 2, ASTM C592 Class 1, or ASTM C612 Class 3	2	2	2	3	3
	Cellular Glass ASTM C552, Type II	2	2	2	2	2
Diesel Engine Exhaust (Up to 700 degrees F)						
	Calcium Silicate ASTM C533, Type I or II	3	3.5	4	4	4
	Cellular Glass ASTM C552, Type II	2.5	3.5	4	4.5	6
Diesel Engine Exhaust (700 to 1200 degrees F)						
	Calcium Silicate ASTM C533, Type I or II	N/A	N/A	6.5	6.5	7.5

3.4.3.3 Insulation of Pumps

Insulate pumps by forming a box around the pump housing. Construct the box by forming the bottom and sides using joints that do not leave raw ends of insulation exposed. Band bottom and sides to form a rigid housing that does not rest on the pump. Ensure joints between top cover and sides fit tightly. The top cover must have a joint forming a female shiplap joint on the side pieces and a male joint on the top cover, making the top cover removable. Apply two coats of Class I adhesive over insulation, including removable sections, with a layer of glass cloth embedded between the coats. Provide a parting line between the box and the removable sections allowing the removable sections to be removed without disturbing the insulation coating. The total dry thickness of the finish must be 1/16 inch. Apply caulking to parting line of the removable sections and penetrations.

3.4.3.4 Other Equipment

a. Form or fabricate insulation to fit the equipment. To ensure a tight fit on round equipment, bevel edges and tightly butt and stagger joints.

b. Secure insulation in place with bands or wires at intervals as recommended by the manufacturer but no greater than 12 inch centers except adhere flexible elastomeric cellular. Protect insulation corners under wires and bands with suitable corner angles.

c. On high vibration equipment, set cellular glass insulation in a coating of bedding compound as recommended by the manufacturer, and seal joints with bedding compound. Fill mineral fiber joints with finishing cement.

d. Provide removable insulation on heads of heat exchangers. Fabricate the removable section joint using a male-female shiplap type joint. Finish the entire surface of the removable section as specified.

e. Protect exposed insulation corners with corner angles.

f. On equipment with ribs, such as boiler flue gas connection, draft fans, and fly ash or soot collectors, apply insulation over 6 by 6 inch by 12 gauge welded wire fabric which has been cinched in place, or if approved by the Contracting Officer, spot weld to the equipment over the ribs. Secure insulation to the fabric with J-hooks and 2 by 2 inch washers or securely band or wire in place on 12 inch (maximum) centers.

g. On equipment handling media above 600 degrees F, apply insulation in two or more layers with staggered joints.

h. Upon completion of installation of insulation, caulk penetrations. Apply two coats of adhesive over insulation, including removable sections, with a layer of glass cloth embedded between the coats. The total dry thickness of the finish must be 1/16 inch. Apply caulking to parting line between equipment and removable section insulation.

3.4.4 Equipment Handling Dual Temperature Media

Below and above 60 degrees F: insulate equipment handling dual temperature media as specified for cold equipment.

3.4.5 Equipment Exposed to Weather

3.4.5.1 Installation

Insulate equipment exposed to weather and finish in accordance with the requirements for ducts exposed to weather in paragraph DUCT INSULATION INSTALLATION.

3.4.5.2 Optional Panels

At the option of the Contractor, prefabricated metal insulation panels may be used in lieu of the insulation and finish previously specified. Thermal performance must be equal to or better than that specified for field applied insulation. Provide panels that are the standard catalog product of a manufacturer of metal insulation panels. Provide fastenings, flashing, and support system conforming to published recommendations of the manufacturer for weatherproof installation and that prevent moisture from entering the insulation. Design panels to accommodate thermal expansion and to support a 250 pound walking load without permanent deformation or permanent damage to the insulation. Exterior metal cover sheet must be aluminum and exposed fastenings must be stainless steel or aluminum.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 09 00

INSTRUMENTATION AND CONTROL FOR HVAC
02/25 MCBCL

PART 1 GENERAL

1.1 SUMMARY

Provide a complete Direct Digital Control (DDC) system, except for the Front End, suitable for the control of the heating, ventilating and air conditioning (HVAC) and other building-level systems as indicated and shown and in accordance with Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS, and other referenced Sections.

1.1.1 BACnet Direct Digital Control Systems for HVAC Description:

a. Remove entire existing system and provide entire new BACnet DDC system(s) including associated equipment and accessories.

b. All new devices are accessible using a Web browser interface and communicate using ASHRAE 135 BACnet communications without the use of gateways, unless gateways are shown on the design drawings and specifically requested by the Government. Where gateways are allowed, they must support ASHRAE 135, including all object properties and read-write services shown on Government approved interoperability schedules. Manufacturer's products, including design, materials, fabrication, assembly, inspection, and testing shall be in accordance with ASHRAE 135, ASME B31.1, and NFPA 70, except where indicated otherwise.

1.1.2 System Requirements

Provide systems meeting the requirements this Section and other Sections referenced by this Section, and which have the following characteristics:

a. The system implements the control sequences of operation shown in the Contract Drawings using DDC hardware to control mechanical and electrical equipment.

b. The system meet the requirements of this specification as a stand-alone system and does not require connection to any other system.

c. Control sequences reside in DDC hardware in the building. The building control network is not dependent upon connection to a Utility Monitoring and Control System (UMCS) Front End or to any other system for performance of control sequences. To the greatest extent practical, the hardware performs control sequences without reliance on the building network.

d. The hardware is installed such that individual control equipment can be replaced by similar control equipment from other equipment manufacturers with no loss of system functionality.

e. All necessary documentation, configuration information, programming tools, programs, drivers, and other software are licensed to and otherwise remain with the Government such that the Government or their

agents are able to perform repair, replacement, upgrades, and expansions of the system without subsequent or future dependence on the Contractor, Vendor or Manufacturer.

f. Sufficient documentation and data, including rights to documentation and data, are provided such that the Government or their agents can execute work to perform repair, replacement, upgrades, and expansions of the system without subsequent or future dependence on the Contractor, Vendor or Manufacturer.

g. Hardware is installed and configured such that the Government or their agents are able to perform repair, replacement, and upgrades of individual hardware without further interaction with the Contractor, Vendor or Manufacturer.

1.1.3 Verification of Dimensions

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.1.4 Drawings

The Government will not indicate all offsets, fittings, and accessories that may be required on the drawings. Carefully investigate the mechanical, electrical, and finish conditions that could affect the work to be performed, arrange such work accordingly, and provide all work necessary to meet such conditions.

1.2 RELATED SECTIONS

Related work specified elsewhere:

a. Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS

b. Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 135	(2020; Interpretation 1-8 2021; Errata 1-2 2021; Addenda CD 2021; Addenda BY-CE 2022; Interpretation 9-10 2022) BACnet—A Data Communication Protocol for Building Automation and Control Networks
ASHRAE 135.1	(2023) Method of Test for Conformance to BACnet

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B31.1	(2024) Power Piping

ASTM INTERNATIONAL (ASTM)

ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus

CONSUMER ELECTRONICS ASSOCIATION (CEA)

CEA-709.1-D	(2014) Control Network Protocol Specification

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41.1	(2002; R 2008) Guide on the Surges Environment in Low-Voltage (1000 V and Less) AC Power Circuits
IEEE C62.41.2	(2002) Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits
IEEE C62.45	(2002; R 2008) Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

UL SOLUTIONS (UL)

UL 506	(2017; Reprint Jan 2022) UL Standard for Safety Specialty Transformers
UL 508A	(2018; Reprint Jul 2022) UL Standard for Safety Industrial Control Panels
UL 1449	(2021; Reprint Oct 2025) UL Standard for Safety Surge Protective Devices

1.4 DEFINITIONS

The following list of definitions includes terms used in Sections referenced by this Section and are included here for completeness.The definitions contained in this Section may disagree with how terms are defined or used in other documents, including documents referenced by this Section. The definitions included here are the authoritative definitions for this Section and all Sections referenced by this Section.

1.4.1 BACnet

Building Automation and Control Network; the common name for the

communication standard ASHRAE 135. The standard defines methods and protocol for cooperating building automation devices to communicate over a variety of LAN technologies.

1.4.2 BACnet/IP

An extension of BACnet, Annex J, defines this mechanism using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP subnetworks that share the same BACnet network number. See also "BACnet Broadcast Management Device".

1.4.3 BACnet Internetwork

Two or more BACnet networks, possibly using different LAN technologies, connected with routers. In a BACnet internetwork, there exists only one message path between devices.

1.4.4 BACnet Network

One or more BACnet segments that have the same network address and are interconnected by bridges at the physical and data link layers.

1.4.5 BACnet Segment

One or more physical segments of BACnet devices on a BACnet network, connected at the physical layer by repeaters.

1.4.6 BBMD

BACnet Broadcast Management Device (BBMD). A communications device, typically combined with a BACnet router. A BBMD forwards BACnet broadcast messages to BACnet/IP devices and other BBMDs connected to the same BACnet/IP network. Every IP subnetwork that is part of a BACnet/IP network must have only one BBMD. See also "BACnet/IP".

1.4.7 BAS

Building Automation Systems, including DDC (Direct Digital Controls) used for facility automation and energy management.

1.4.8 BAS Owner

The regional or local user responsible for managing all aspects of the BAS operation, including: network connections, workstation management, technical support, control parameters, and daily operation. The BAS Owner for this project is Camp Lejeune FRCS Cyber Operation Group. Point of contact:

Public Works Division/FRCS Cyber Ops
1110 Ash Street
MCB Camp Lejeune, NC 28547
(910) 450-6891

1.4.9 BIBBs

BACnet Interoperability Building Blocks. A collection of BACnet services used to describe supported tasks. BIBBs are often described in terms of "A" (client) and "B" (server) devices. The "A" device uses data provided by the "B" device, or requests an action from the "B" device.

1.4.10 BI

BACnet International, formerly two organizations: the BACnet Manufacturers Association (BMA) and the BACnet Interest Group - North America (BIG-NA).

1.4.11 BI/BTL

BACnet International/BACnet Testing Laboratories (Formerly BMA/BTL). The organization responsible for testing products for compliance with the BACnet standard, operated under the direction of BACnet International.

1.4.12 Bridge

Network hardware that connects two or more network (or BACnet internetwork) segments at the physical and data link layers. A bridge may also filter messages.

1.4.13 Broadcast

A message sent to all devices on a network segment.

1.4.14 Device

Any control system component, usually a digital controller, that contains a BACnet Device Object and uses BACnet to communicate with other devices. See also "Digital Controller".

1.4.15 Device Object

Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.

1.4.16 Device Profile

A collection of BIBBs determining minimum BACnet capabilities of a device, defined in ASHRAE Standard 135-2004, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing BIBBs supported.

1.4.17 Digital Controller

An electronic controller, usually with internal programming logic and digital and analog input/output capability, which performs control functions. In most cases, synonymous with a BACnet device described in this specification. See also "Device".

1.4.17.1 Terminal Device Controllers

Terminal device controllers typically are controllers with less control features, may have integrated actuators, and may be mounted directly on equipment (with enclosures).

1.4.17.2 Field Controllers

Field controllers typically have a greater capability for input/output and customization, do not have integral actuators, are mounted in an enclosure not on the equipment and are used for equipment such as VAV air handlers.

1.4.17.3 Plant Controllers

Plant controllers are typically used to control various equipment in mechanical rooms such as pumps, heat exchangers, and chillers.

1.4.17.4 Supervisory Building Controller (SBC)

The Supervisory Building Controller is used to coordinate all equipment in a building, input scheduling, and is used as a connection point for transferring configuration files to the other controllers. The SBC shall communicate with other controllers and equipment through a BACnet MS/TP bus. Depending on approvals and capabilities, the SBC may be used as a point of connection between the Camp Lejeune EMCS network (IP) and the building level control network (BACnet MS/TP).

1.4.18 Direct Digital Control (DDC)

Digital controllers performing control logic. Usually the controller directly senses physical values, makes control decisions with internal programs, and outputs control signals to directly operate switches, valves, dampers, and motor controllers.

1.4.19 DDC System

A network of digital controllers, communication architecture, and user interfaces. A DDC system may include programming, sensors, actuators, switches, relays, factory controls, operator workstations, and various other devices, components, and attributes.

1.4.20 Energy Management & Control System (EMCS)

The EMCS at Camp Lejeune is an enterprise system that actively receives energy and building condition information from multiple sources and provides load shedding, electric metering, alarming, trending, scheduling, set point adjustment and device status of all supervisory building controllers for maintenance personnel. The EMCS receives real time electrical utility pricing data and automatically manages to Camp Lejeune's energy target. The existing EMCS consists of Niagara FX N4 supervisor (JCI FX web supervisor).

1.4.21 Ethernet

A family of local-area-network technologies providing high-speed networking features over various media.

1.4.22 Firmware

Software programmed into read only memory (ROM), flash memory, electrically erasable programmable read only memory (EEPROM), or erasable programmable read only memory (EPROM) chips.

1.4.23 Gateway

Communication hardware and software connecting two or more different protocols, similar to human language translators. The Gateway translates one protocol into equivalent concepts for the other protocol. In BACnet applications, a Gateway has BACnet on one side and non-BACnet protocols on the other side.

1.4.24 Global ID

An identification number assigned to each Supervisory Building Controller. The Global ID includes assigned MSTP Trunk Instance Numbers and a range of BACnet Instance Numbers to be used for the Field Controllers. The Global ID is assigned by the BAS Owner.

1.4.25 Half Router

A device that participates as one partner in a BACnet point-to-point (PTP) connection. Two half-routers in an active PTP connection combine to form a single router.

1.4.26 Hub

A common connection point for devices on a network.

1.4.27 Internet Protocol (IP, TCP/IP, UDP/IP)

A communication method, the most common use is the World Wide Web. At the lowest level, it is based on Internet Protocol (IP), a method for conveying and routing packets of information over various LAN media. Two common protocols using IP are User Datagram Protocol (UDP) and Transmission Control Protocol (TCP). UDP conveys information to well-known "sockets" without confirmation of receipt. TCP establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.

1.4.28 Input/Output (I/O)

Physical inputs and outputs to and from a device, although the term sometimes describes software, or "virtual" I/O. See also "Points".

1.4.29 I/O Expansion Unit

An I/O expansion unit provides additional point capacity to a digital controller.

1.4.30 IP subnet

Internet protocol (IP) identifies individual devices with a 32-bit number divided into four groups from 0 to 255. Devices are often grouped and share some portion of this number. For example, one device has IP address 209.185.47.68 and another device has IP address 209.185.47.82. These two devices share Class C subnet 209.185.47.00

1.4.31 ISSM

Information Systems Security Manager

1.4.32 Local-Area Network (LAN)

A communication network that spans a limited geographic area and uses the same basic communication technology throughout.

1.4.33 LonTalk

CEA-709.1-D. A communication protocol developed by Echelon Corp. LonTalk is not permitted.

1.4.34 MAC Address

Media Access Control address. The physical node address that identifies a device on a Local Area Network.

1.4.35 Master-Slave/Token-Passing (MS/TP)

One of the LAN options for BACnet. MSTP uses twisted-pair wiring for relatively low speed and low cost communication (up to 4,000 ft at 76.8K bps).

1.4.36 Native BACnet Device

A device that uses BACnet as its primary, if not only, method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.

1.4.37 Network

Communication technology for data communications. BACnet approved network types are BACnet over Internet Protocol (IP), Point to Point (PTP) Ethernet, MS/TP, and LonTalk®. In general, networks within the building, all controllers and equipment will be BACnet MS/TP, unless noted otherwise.

1.4.38 Network Number

A site-specific number assigned to each network segment to identify for routing. This network number must be unique throughout the BACnet internetwork.

1.4.39 Object

The concept of organizing BACnet information into standard components with various associated properties. Examples include analog input objects and binary output objects.

1.4.40 Object Identifier

An object property used to identify the object, including object type and instance. Object Identifiers must be unique within a device.

1.4.41 Object Properties

Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.

1.4.42 Peer-to-Peer

Peer-to-peer refers to devices where any device can initiate and respond to communication with other devices. Peer-to-Peer configurations must be reviewed and approved by Camp Lejeune Public Works Department.

1.4.43 Performance Verification Test (PVT)

The procedure for determining if the installed BAS meets design criteria prior to final acceptance. The PVT is performed after installation, testing, and balancing of mechanical systems. The PVT is performed by the Contractor.

1.4.44 PID

Proportional, integral, and derivative control; three parameters used to control modulating equipment to maintain a setpoint. Derivative control is often not required for HVAC systems (leaving "PI" control).

1.4.45 PICS

Protocol Implementation Conformance Statement (PICS), describing the BACnet capabilities of a device. See BACnet, Annex A for the standard format and content of a PICS statement.

1.4.46 Points

Physical and virtual inputs and outputs. See also "Input/Output".

1.4.47 PTP

Point-to-Point protocol connects individual BACnet devices or networks using serial connections like modem-to-modem links.

1.4.48 Repeater

A network component that connects two or more physical segments at the physical layer.

1.4.49 Router

A BACnet router is a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN. If a router is connected directly to the MCEN, it must be listed on the approved DIACAP equipment list and must be Marine Corps DADMS listed and approved.

1.4.50 Stand-Alone Control

Refers to devices performing equipment-specific and small system control without communication to other devices or computers for physical I/O, excluding outside air and other common shared conditions. Devices are located near controlled equipment, with physical input and output points limited to 64 or less per device, except for complex individual equipment or systems. Failure of any single device or communications will not cause other network devices to fail. Internal time clocks and onboard scheduling are required to allow for stand-alone control if not connected to a Supervisory Building Controller. BACnet "Smart" actuators (B-SA profile) and sensors (B-SS profile) communicating on a network with a parent device

are exempt from stand-alone requirements. Provide stand-alone control routines to provide for energy saving sequences such as free cooling. Provide stand-alone control routines that operate without connection to the BACnet/IP and MS/TP networks during a loss of communication.

1.4.51 Supervisory Building Controller

Supervisory Controller that is the main interface for the building control system.

1.4.52 TAB

Testing, adjusting, and balancing (of HVAC systems).

1.5 ADMINISTRATIVE REQUIREMENTS

1.5.1 FRCS Required Training

It is the contractor's sole responsibility to ensure any contractor personnel or subcontractor who will be performing any work pertaining to any new or existing SBC:

a. Attend mandatory FRCS provided training at the frequency prescribed by FRCS.

b. Maintain valid credentials throughout the duration of the project.

FRCS training is typically conducted every two weeks at a location designated by FRCS. Contact the BAS Owner to schedule training and to obtain login credentials. The contractor shall bear the sole responsibility for any delays or mobilizations that may occur must the contractor or subcontractor fail to fulfil the qualifications required to maintain valid credentials. FRCS will not provide unscheduled training under any circumstances. Temporary credentials will not be provided.

1.5.2 DDC Pre-Installation Meeting

Prior to starting the installation, meet with the Contracting Officer's Technical Representative (COTR) and the BAS owner to develop a mutual understanding relative to the details of the DDC system requirements. Requirements to be discussed include, but not limited to, required submittals, work schedule, field quality control, BAS Supervisory controller configuration requirements, and project DDC Specification requirements. Ensure that a representative from the controls contractor and the controls contractor's installation team or subcontractor is present. Contractor shall provide minimum fifteen days notice to COTR when scheduling pre-installation meeting.

1.5.3 Pre-PVT Meeting

A Pre-PVT meeting to review the Pre-PVT Checklist is required to coordinate all aspects of the PVT and shall include the Contractor's QA representative, the Contractor's PVT administrator, the Contracting Officer's representative, and the BAS Owner.

1.5.4 Overhead Inspection by BAS Owner

Prior to closing in any ceiling that contains any DDC component above it, meet with the COTR and the BAS Owner for a site inspection. Mutiple

overhead inspections may be required based on construction schedule. Provide minimum 14 days notice to COTR when scheduling each overhead inspection.

1.5.5 Final Inspection by BAS Owner

After receiving approval of the Controls System Operators Manual, meet with the COTR and the BAS Owner for a final site inspection. Provide minimum 14 days notice to COTR when scheduling the final inspection.

1.5.6 Project Sequence

The control system work for this project shall proceed in the following order:

a. Preparatory meeting for controls work.

b. Submit and receive approval on the Shop Drawings, Product Data, and Certificates specified under the paragraph SUBMITTALS.

c. DDC Pre-Installation Meeting.

d. Submit and receive approval for PVT Plan.

e. Pre-PVT Meeting.

f. Perform the control system installation work, including all field check-outs and tuning.

g. Overhead Inspection by BAS Owner.

h. Provide support to TAB personnel as specified under the paragraph TEST AND BALANCE SUPPORT.

i. Perform final tuning of all PID loops after TAB field acceptance testing is complete.

j. Perform the PVT.

k. Submit and receive approval for the PVT Report.

l. Submit and receive approval for As-Built Control Drawings.

m. Submit and receive approval of the Controls System Operators Manual specified under the paragraph CONTROLS SYSTEM OPERATORS MANUALS.

n. Final inspection by BAS Owner.

o. Submit and receive approval for Trends.

p. PVT Report Field Acceptance Test for Season 1.

q. Submit and receive approval on the Training Documentation specified under the paragraph INSTRUCTION TO GOVERNMENT PERSONNEL and VFD Service Support. Submit at least 30 days before training.

r. Deliver the final Controls System Operators Manuals and VFD Service Manuals.

s. Conduct the Phase I Training and VFD on-site/hands-on training.

t. Conduct the Phase II Training.

u. Submit and receive approval of Closeout Submittals.

v. PVT Report Field Acceptance Test for Season 2.

1.6 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Control System Drawings Title Sheet; G

List Of I/O Points; G

Control System Components List; G

Control System Schematics; G

Hvac Equipment Control Ladder Diagrams; G

Sequence Of Operations; G

Component Wiring Diagrams; G

Terminal Strip Diagrams; G

Bacnet Communication Architecture Schematic (Network Riser); G

Control Panel Layout; G

SD-06 Test Reports

Existing Conditions Report; G

Control Contractor's Performance Verification Testing Plan; G

Equipment Supplier's Performance Verification Testing Plan; G

Performance Verification Testing Report; G

Trends; G

Bus Waveform Report; G

SD-07 Certificates

Contractor's Qualifications; G

Contractor's Training Certifications; G

SD-10 Operation and Maintenance Data

Comply with requirements for data packages in Section 01 78 23 OPERATION AND MAINTENANCE DATA and in Section 01 78 24.00 20

FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI), except as supplemented and modified in this specification.

Controls System Operators Manuals; G, Data Package 4

SD-11 Closeout Submittals

Training Documentation; G

Warranty Information; G

1.7 QUALITY ASSURANCE

1.7.1 Standard Products

Provide material and equipment that are standard manufacturer's products currently in production and supported by a local service organization.

1.7.2 Finish of New Equipment

New equipment finishing shall be factory provided. Manufacturer's standard factory finishing shall be proven to withstand 125 hours in a salt-spray fog test. Equipment located outdoors shall be proven to withstand 500 hours in a salt-spray fog test.

Salt-spray fog test shall be according to ASTM B117, with acceptance criteria as follows: immediately after completion of the test, the finish shall show no signs of degradation or loss of adhesion beyond 0.125 inch on either side of the scratch mark.

1.7.3 Verification of Dimensions

The contractor shall verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing work.

1.7.4 Modification of References

The advisory provisions in ASME B31.1, NFPA 70 and the manufacturer's recommendations are mandatory. Substitute "shall" for "should" wherever it appears and interpret all references to the "authority having jurisdiction" and "owner" to mean the Contracting Officer.

1.7.5 Subcontractor Special Requirements

Perform all work in this section in accordance with the paragraph SUBCONTRACTOR SPECIAL REQUIREMENTS in Section 01 30 00 ADMINISTRATIVE REQUIREMENTS. The paragraph specifies that all contract requirements of this section shall be accomplished directly by a first tier subcontractor. No work required shall be accomplished by a second tier subcontractor.

1.7.6 Contractor's Qualifications

Submit documentation certifying the controls Contractor performing the work has completed at least three DDC systems installations of a similar design to this project, and programmed similar sequences of operation for at least two years. Personnel performing the installation, programming, checkout, commissioning and training shall, at a minimum, have obtained all Contractor's Training Certifications required by the manufacturer for the tasks they are performing. Tasks include any activity required to

execute and complete the contracted work. Certifications for each person shall be submitted prior to the beginning of the contracted work. Certifications shall be made available at any time upon the request from Camp Lejeune.

1.8 DELIVERY, STORAGE, AND HANDLING

Store and protect products from the weather, humidity, and temperature variations, dirt and dust, and other contaminants, within the storage condition limits published by the equipment manufacturer, and as approved by the Contracting Officer. Replace damaged or defective items.

PART 2 PRODUCTS

Provide products meeting the requirements of Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS for BACnet, other referenced Sections, and this Section.

2.1 DDC SYSTEM

a. Provide a networked DDC system for stand-alone control in compliance with the latest revision of the ASHRAE 135. Include all programming, objects, and services required to meet the sequence of control. Provide BACnet MS/TP communications between the DDC system and native BACnet devices furnished with HVAC equipment and plant equipment including boilers, chillers, and variable frequency drives. Devices provided shall be certified in the BACnet Testing Laboratories (BTL) Product Listing and in accordance with ASHRAE 135.1 Method of Test for Conformance to BACnet. Controls provided integral to equipment shall be part of the DDC system and shall fully comply with this specification. Coordinate integration of integral controls into the system as a whole. BACnet over IP is not permitted within the DDC system.

b. Assist the Government in interfacing the new DDC system with the site's existing server and operator workstation and software. Create graphics, scheduling, alarming, and trending.

2.2 GENERAL PRODUCT REQUIREMENTS

Units of the same type of equipment must be products of a single manufacturer. Each major component of equipment must have the manufacturer's name and address, and the model and serial number in a conspicuous place. Materials and equipment must be standard products of a manufacturer regularly engaged in the manufacturing of these and similar products. The standard products must have been in a satisfactory commercial or industrial use for two years prior to use on this project. The two year use must include applications of equipment and materials under similar circumstances and of similar size. DDC Hardware not meeting the two-year field service requirement is acceptable provided it has been successfully used by the Contractor in a minimum of two previous projects. The equipment items must be supported by a service organization. Items of the same type and purpose must be identical, including equipment, assemblies, parts and components.

2.3 OPERATION ENVIRONMENT

Provide continuous protection of components from the following conditions:

a. Pressure: Pressure conditions normally encountered in the installed location.

b. Vibration: Vibration conditions normally encountered in the installed location.

c. Temperature:

(1) Products installed indoors: Ambient temperatures in the range of 32 to 112 degrees F and temperature conditions outside this range normally encountered at the installed location.

(2) Products installed outdoors or in unconditioned indoor spaces: Ambient temperatures in the range of -35 to +151 degrees F and temperature conditions outside this range normally encountered at the installed location.

d. Humidity: 10 to 95 percent relative humidity, noncondensing and humidity conditions outside this range normally encountered at the installed location.

2.4 WIRELESS CAPABILITY

Wireless networking is not authorized for this project as a default. Do not use any wireless communication unless approved by the ISSM which is done on a case-by-case basis. Any device with wireless communication capability is considered to be using wireless communication, regardless of whether or not the device is actively communicating wirelessly, except when wireless communication has been physically permanently disabled (such as through the removal of the wireless transceiver).

Wireless connections must follow all DoD, USN, and USMC requirements and be approved by the PWD ISSM.

2.4.1 Wireless IP Communications

Do not install wireless IP networks, including:

a. Wireless access points

b. Ad-hoc wireless networks

c. WiFi Direct communication

2.4.2 Non-IP Wireless Communication

Non-IP Wireless networking is not authorized for this project.

2.5 ELECTRICAL POWER AND CONTROL WIRING

2.5.1 Transformers

Transformers shall conform to UL 506. For control power other than terminal level equipment, provide a fuse or circuit breaker on the secondary side of each transformer.

2.5.2 Surge and Transient Protection

Provide each control cabinet with surge and transient power protection. Surge protection is not required for small terminal unit controllers such as VAV controllers. Surge and transient protection shall consist of the following devices, installed externally to the controllers.

2.5.2.1 Power-Line Surge Protection

Provide surge suppressors on the incoming power at each direct digital controller or grouped terminal controllers and shall be installed externally to the device or devices being protected. Surge suppressors shall be rated in accordance with UL 1449, have a fault indicating light, and conform to the following:

a. The device shall be a transient voltage surge suppressor, hard-wire type individual equipment protector for 120 VAC/1 phase/2 wire plus ground.

b. The device shall react within 5 nanoseconds and automatically reset.

c. The voltage protection threshold, line to neutral, shall be no more than 211 volts.

d. The device shall have an independent secondary stage equal to or greater than the primary stage joule rating.

e. The primary suppression system components shall be pure silicon avalanche diodes.

f. The secondary suppression system components shall be silicon avalanche diodes or metal oxide varistors.

g. The device shall have an indication light to indicate the protection components are functioning.

h. All system functions of the transient suppression system shall be individually fused and not short circuit the AC power line at any time.

i. The device shall have an EMI/RFI noise filter with a minimum attenuation of 13 dB at 10 kHz to 300 MHz.

j. The device shall comply with IEEE C62.41.1 and IEEE C62.41.2, Class "B" requirements and be tested according to IEEE C62.45.

k. The device shall be capable of operating between minus 20 degrees F and plus 122 degrees F.

2.5.2.2 Communication Line Surge Protection

Provide surge and transient protection for all DDC controllers and all DDC network related devices connected to phone lines, network communication lines, lines from exterior equipment, and lines from other buildings including mechanical buildings in accordance with the following:

a. The device shall provide continuous, non-interrupting protection.

b. The protection shall react within 5 nanoseconds using only solid-state silicon avalanche technology.

c. The device shall be installed at the distance recommended by its manufacturer.

d. Include the location of the surge and transient protection devices on the control drawing network riser.

e. The device shall be located in an enclosure.

f. Surge and transient protection devices must be located at the point where the communication line exists the building and at the exterior equipment location.

2.5.3 Wiring

Provide complete electrical wiring for the DDC System, including wiring to transformer primaries. Run all control wiring in rigid or flexible conduit, metallic tubing, or covered metal raceways, unless noted otherwise. Control circuit wiring shall not run in the same conduit as power wiring over 100 volts. Circuits operating at more than 100 volts shall be in accordance with Section 26 20 00, INTERIOR DISTRIBUTION SYSTEM. Run all circuits over 100 volts in conduit, metallic tubing, covered metal raceways, or armored cable. Follow cable manufacturer's recommendations or requirements based on the cable usage, such as outdoors and/or underground.

2.5.3.1 Power Wiring

The following requirements are for field-installed wiring:

a. Wiring for 24 V circuits shall be insulated copper 18 AWG minimum and rated for 300 VAC service.

b. Wiring for 120 V circuits shall be insulated copper 12 AWG minimum and rated for 600 VAC service.

2.5.3.2 Analog Signal Wiring and Binary Wiring

Provide in accordance with control manufacturer's recommendations and the following: Field-installed analog signal wiring shall be 18 AWG single or multiple twisted pair. Each cable shall be 100 percent shielded and have a drain wire. Each wire shall have insulation rated for 300 VAC service. Cables shall have an overall aluminum-polyester or tinned-copper cable-shield tape. All binary input and output wiring shall be 18 AWG.

2.5.3.3 MS/TP Communication Bus

a. Provide system manufacturer's recommended or preferred cabling.

b. Follow cable manufacturer's recommendations or requirements based on the cable usage, such as outdoors and/or underground.

c. Splices in communication cable are not allowed. Segments of communication cable between field devices shall be solid lengths with no splices.

2.5.3.4 Conduit

Except for flexible conduit, all conduit for controls less than 100 volts

shall be colored blue. All conduit to be blue must be pre-tinted by the manufacturer. Painting or wrapping of conduit is not permitted. Junction box cover plates, cable/wire trough covers, etc., for controls shall be blue. Fittings and boxes do not need to be blue. The requirement for blue colored conduit may be waived for designated exposed areas at the discretion of BAS Owner and Public Works Department.

PART 3 EXECUTION

3.1 DESIGN REQUIREMENTS

3.1.1 Control System Drawings Title Sheet

Provide a title sheet for the control system drawing set. Include the project title, project location, contract number, the controls contractor preparing the drawings, an index of the control drawings in the set, and a legend of the symbols and abbreviations used throughout the control system drawings. The Title Block of each drawing must include the Drawing revision, i.e. Submittal, Revision 1, Revision 2, As-Built, etc., including the date.

3.1.2 List of I/O Points

Also known as a Point Schedule, provide for each input and output point physically connected to a digital controller: point name, point description, point type (Analog Output (AO), Analog Input (AI), Binary Output (BO), Binary Input (BI)), point sensor range, point actuator range, point address, BACnet object, associated BIBBS (where applicable), and point connection terminal number and cable type (18/2, 18/3, etc). Typical schedules for multiple identical equipment are allowed unless otherwise requested in design or contract criteria. All points shall adhere to the Camp Lejeune Standard naming conventions.

3.1.3 Control System Components List

Provide a complete list of control system components installed on this project. Include for each controller and device: control system schematic name, control system schematic designation, device description, manufacturer, model, part number, firmware version, serial number, physical location (e.g. Building 4, room 112 overhead), and power requirements (i.e. AC/DC voltage and power draw). For sensors, include point name, sensor range, and operating limits. For valves, include body style, Cv, design flow rate, pressure drop, valve characteristic (linear or equal percentage), and pipe connection size. For actuators, include point name, spring or non-spring return, modulating or two-position action, normal (power fail) position, nominal control signal operating range (0-10 volts DC or 4-20 milliamps), and operating limits.

3.1.4 Control System Schematics

Provide control system schematics. Typical schematics for multiple identical equipment are allowed unless otherwise requested in design or contract criteria. Include the following:

a. Location of each input and output device. Specify room number for remote devices.

b. Flow diagram for each piece of HVAC equipment.

c. Name or symbol for each control system component, such as V-1 for a valve.

d. Setpoints, with differential or proportional band values.

e. Written sequence of operation for the HVAC equipment.

f. Valve and Damper Schedules, with normal (power fail) position.

g. Control cabinet general layout, include all devices, point count, cable type (18/2, 18/3, etc), 24VAC VA power requirement for all devices including those powered from the cabinet.

3.1.5 HVAC Equipment Control Ladder Diagrams

Provide HVAC equipment control ladder diagrams. Indicate required electrical interlocks. Ladder diagram schematics shall include 120 VAC and low voltage devices in each panel. Ladder diagram schematics shall also include all field devices (sensors, relays, actuators, etc.) and any connection point to controlled equipment or devices.

3.1.6 Sequence of Operations

Provide HVAC control system sequence of operation and control logic diagrams in the same format as the Contract Drawings. Within these drawings, refer to devices by their unique identifiers. Submit sequences of operation and control logic diagrams for each HVAC system

3.1.7 Component Wiring Diagrams

Provide a wiring diagram for each type of input device and output device. Indicate how each device is wired and powered; showing typical connections at the digital controller and power supply. Show for all field connected devices such as control relays, motor starters, actuators, sensors, and transmitters.

3.1.8 Terminal Strip Diagrams

Provide a diagram of each terminal strip. Indicate the terminal strip location, termination numbers, and associated point names.

3.1.9 BACnet Communication Architecture Schematic (Network Riser)

Provide a schematic showing the project's entire BACnet communication network complete with wire sizes, including Internet Protocol (IP), Media Access Control (MAC), BACnet network, Device ID, field bus address, BBMDs, any devices using BACnet FDR, and Firmware version / Operating System, LAN devices including routers and bridges, gateways, controllers, workstations, and field interface devices. Show connection to existing networks and include the existing network in the riser diagram. Include all external network capabilities. Include surge protection device at all locations on the riser when the field controller communication trunk is leaving or entering a building and at all external equipment (such as chillers).

3.1.10 Control Panel Layout

Provide a detailed panel layout for each control panel, relay panel, etc. The layout shall include all components to be installed in the panel

including controllers, terminal strips, transformers, wireway, etc.

3.2 DEMOLITION

Remove and/or demolish all existing controls, cabling, conductors, conduit, controllers, power circuits and cabinets that are no longer needed after new work is installed. Contractor shall inform government prior to start of demolition and shall give the government the option to salvage any existing equipment. Contractor shall remove all unused existing conduit and shall not reuse any existing conduit. Any existing systems to remain, must remain functional and operate properly after all demolition is complete.

3.3 EXISTING CONDITIONS

3.3.1 Existing Conditions Survey

Perform a field survey, including testing and inspection of the equipment to be controlled and submit an Existing Conditions Report documenting the current status and its impact on the Contractor's ability to meet this specification. For those items considered nonfunctional, document the deficiency in the report including explanation of the deficiencies and estimated costs to correct the deficiencies. As part of the report, define the scheduled need date for connection to existing equipment. Make written requests and obtain Government approval prior to disconnecting any controls and obtaining equipment downtime.

3.3.2 Existing Equipment Downtime

Make written requests and obtain Government approval prior to disconnecting any controls and obtaining equipment downtime.

3.3.3 Existing Control System Devices

Inspect, calibrate, and adjust as necessary to place in proper working order all existing devices which are to be reused.

3.4 INSTALLATION

Fully install and test the control system in accordance Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS for BACnet or Niagara BACnet systems, and this Section.

Perform the installation under the supervision of competent technicians regularly employed in the installation of DDC systems. All material and equipment shall be installed in accordance with the manufacturer's recommendations for the intended purpose and NFPA 70. Maintain a copy of the manufacture's recommendations on the Contruction Site. Use the more stringent methods when manufacturer's recommendations, and plans & specification requirements differ. Use the "Preferred" method when alternative methods are given. The word "should" will be considered to mean "shall". Bring any conflicts between manufacturer's recommendations and plans and specification requirements to the Government's attention. All equipment shall be installed level and plumb.

3.4.1 Wiring Criteria

a. Run circuits operating at more than 100 volts in rigid or flexible

conduit, metallic tubing, covered metal raceways, or armored cable.

b. Run all control wiring in blue rigid or flexible conduit, blue metallic tubing, or covered metal raceways, unless noted otherwise. All control wiring located inside mechanical rooms shall be in conduit or metallic tubing. All conduit and junction box covers, cable/wire trough covers, etc., shall be blue in color.

c. Do not run binary control circuit wiring in the same conduit as power wiring over 100 volts. Where analog signal wiring requires conduit, do not run in the same conduit with AC power circuits or control circuits operating at more than 100 volts.

d. Provide circuit and wiring protection required by NFPA 70.

e. Minimum conduit size is 3/4-inch. Maximum conduit fill is 40% or the cable manufacturer's recommended amount, whichever is less. Provide insulated throat at all conduit terminations to protect wiring from burrs. Support conduit by pipe straps, wall brackets, threaded rod conduit hangers, or ceiling trapeze. Plastic cable ties are not acceptable. Fasten by wood screws to wood; by toggle bolts on hollow masonry units; by concrete inserts or expansion bolts on concrete or brick; and by machine screws, welded threaded studs, or spring-tension clamps on steel work. Threaded C-clamps may be used on rigid steel conduit only. Do not weld conduits or pipe straps to steel structures. Do not exceed one-fourth proof test load for load applied to fasteners. Provide vibration resistant and shock-resistant fasteners attached to concrete ceiling. The use of masonry screws to support conduit is not permitted.

f. Do not bury aluminum-sheathed cable or aluminum conduit in concrete.

g. Input/output identification: Permanently label each field-installed wire, cable, and pneumatic tube at each end with descriptive text using a commercial wire marking system, minimum 9 point font. Labels shall fully encircle the wire, cable, or tube. The single line text shall run parallel to the wire, cable, or tube and shall be repeated so as to be viewable without twirling or twisting the wire. Locate the markers within 2 inches of each termination. Label shall include type of network and destination of cable (ex. BACnet/AHU-1). Match the names and I/O number to the project's point list. Similarly label all power wiring serving control devices, including the word "power" and panel board and circuit number, or transformer location in the label. Number each pneumatic tube every six feet. Label all terminal blocks with alpha/numeric labels. All wiring and the methods shall be in accordance with UL 508A.

h. Permanently display controller wiring diagram for each controller on the inside of the control cabinet door. Diagram shall be neatly lettered and taped or adhered with sticky back label.

i. Conduit identification: All conduits shall be labeled within 36 inches from terminations, boxes, bends or wall penetrations. Labels shall be 3/8 inches bold black lettering on white background and indicate what system the conduit contains. Apply labels every 10 feet of line of sight or a distance agreed upon by Camp Lejeune Public Works Department. Provide label for each side of a wall pentration by the conduit. The agreed upon distance shall be for a single building or project only. Label shall be visible and legible, while standing on

the floor, from up to three sides with a minimum dimension of 1.9 inches x 4 inches. Conduit that includes power circuits shall be labeled with source panel and circuit, and destination cabinet or equipment. When MSTP is installed within conduit, label conduit with trunk number and to and from device (ie. MSTP-01 From VAV 1-1 to VAV 1-2).

Provide a label at each control panel on the 120 VAC conduit. The label shall contain the source panel and circuit identifier.

Label Example: SF-C, SF-S, SF-O (3 cables, Supply Fan Command, Supply Fan Status, Supply Fan Output).

Label Example: ZN-T/ZN-H/ZN-Q (1 cable, Zone Temperature, Zone Humidity, Zone Quality).

j. Each terminal device shall have its own terminal conduit run. Device boxes or devices or panels shall not be used as "pass thru" for wiring.

k. Conduit to equipment and devices shall be run tight to walls, and ceilings. Avoid conduit on the floor, i.e. conduit shall not block access to or past equipment. Flex conduit is to be used only when EMT or rigid conduit is not able to satisfy the application such as a transition to a sensor or equipment. Flex conduit shall be limited to a maximum length of 3 ft.

l. For controller power, provide new 120 VAC circuits, with ground if not defined on the electrical drawings. Provide each circuit with a dedicated breaker, and run wiring in its own conduit, separate from any control wiring. Connect the controller's ground wire to the electrical panel ground; conduit grounds are not acceptable. Include a label on the 120 VAC circuit conduit at each control panel. The label is to include the source panel and circuit identification. The label size shall be a minimum of 1.9 inches by 4 inches, 3/8 inch black lettering on white background.

m. Supervisory Building Controllers (SBC) shall be powered from a dedicated transformer for the SBC only. Each control cabinet shall have a dedicated 24 volt transformer. The 120 VAC power branch circuit shall be dedicated to the DDC control system. Factory provided transformers in equipment must be used as a source of power only for the control devices intended by the equipment manufacturer.

n. Surge Protection: Install surge protection according to manufacturer's instructions. Multiple controllers fed from a common power supply may be protected by a common surge protector, properly sized for the total connected devices.

o. All terminations in panels shall be made at a terminal block if not connected directly to a panel device, ie Field Controller, Supervisory Controller, relays, transmitters, etc. No wire nuts are allowed in panels, VAV boxes, control panels, relay panels, raceways, or any other type of enclosure shall follow this requirement. High and low voltage wires must not land on the same terminal block unless they are separated and of a different color and/or clearly identified.

p. Grounding: Ground controllers and cabinets to a good earth ground as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Conduit grounding is not acceptable; all grounding shall have a direct path to

the building earth ground. Ground sensor drain wire shields at the controller end.

q. The Contractor shall be responsible for correcting all associated MS/TP and SA bus wiring, auxiliary bus wiring, termination, end of line, and ground loop problems.

r. Run wiring in panel enclosures in covered wire track.

s. Control cabinets, wiring boxes, cable/wiring troughs, panel enclosures, etc., must be clean of all debris, metal shavings, etc.

t. Low voltage cable must not be supported directly from "all thread" rod. If cabling/wiring is permitted to be run without conduit/raceway it must be supported using a retaining device such as a bridle ring or J hook, and where appropriate connected to the all thread rod using a standoff device. Openly installed cabling/wiring must be approved by Camp Lejeune Public Works Department.

u. For serviceability, allow a minimum of 2 inches of exposed wire or cable from any termination point, i.e. between wireway and field controller terminations.

v. Wireway inside panels and junction boxes shall be maximum 40% filled.

3.4.2 Accessibility

Install all equipment so that parts requiring periodic inspection, operation, maintenance, and repair are readily accessible. Install digital controllers, data ports, and concealed actuators, valves, dampers, air flow stations and like equipment in locations freely accessible through access doors. Install power surge protection such that it is replaceable without removing other components.

3.4.3 Component Identification Labeling

Using an electronic hand-held label maker with white tape and bold black block lettering, provide an identification label on the exterior of each new control panel, control device, actuator, and sensor. Also provide labels on the exterior of each new control actuator indicating the (full) open and (full) closed positions. For labels located outdoors, use exterior grade label tape, and provide labels on both the inside and outside of the panel door or device cover. Acceptable alternatives are white plastic labels with engraved bold black block lettering permanently attached to the control panel, control device, actuator, and sensor. Have the labels and wording approved by the BAS Owner prior to installation. Devices with field adjustable setpoints, such as Air Filter Status, Duct Pressure Safety Limit, etc., must have the field adjusted setpoint and date included on the label. Components mounted above a ceiling or service hatch must also have the component identification visible from below. Examples: "A VAV controller, exhaust fan relay, Differential Pressure Transmitter, etc., identification would be included on the ceiling grid, or service hatch, in the area of the controller or field device." Supervisory Controller: Provide a removable label (not permanent marker) with the Global ID(s), IP Address and all login credentials. Niagara JACE must include login credentials for both the Station and Platform.

3.4.4 Network Communication Lines

Network connections by the Government are required for each new supervisory controller back to the telecom room. Provide the Contracting Officer at least 120 days advance notice of need. Provide one inch conduit and two(2) green Cat 6 cables from the point of connection of the BAS to the point of connection to the MCEN (most likely in the telephone equipment room). The conduit for these runs MCEN homeruns shall be the only controls conduit that is not blue in color. For each run, provide an additional 20 feet of extra cable, coiled up in the telecom closet. Cables must be terminated and tested.

3.4.5 Dielectric Isolation

Provide dielectric isolation where dissimilar metals are used for connection and support. Install control system in a matter that provides clearance for control system maintenance by maintaining access space required to calibrate, remove, repair, or replace control system devices. Install control system such that it does not interfere with the clearance requirements for mechanical and electrical system maintenance.

3.4.6 Penetrations in Building Exterior

Make all penetrations through and mounting holes in the building exterior watertight.

3.5 TEST AND BALANCE SUPPORT

The controls contractor shall coordinate with and provide on-site support to the test and balance (TAB) personnel specified under Section 23 05 93 TESTING, ADJUSTING AND BALANCING. This support shall include:

a. On-site operation and manipulation of control systems during the testing and balancing.

b. Control setpoint adjustments for balancing all relevant mechanical systems, including VAV boxes.

c. Tuning control loops and sensors with setpoints and adjustments determined by TAB personnel.

3.6 INTERFACE WITH EXISTING EMCS

Provide 16 hours of assistance to the Government with interfacing the BAS to the Base wide EMCS. The Government will make the final connection of the BAS to the MCEN. This 16 hours does not include completion or corrections to the installed BAS as defined in the contract documents. This 16 hours is for assisting the interface and for making revisions to the BAS that may be needed outside of the contract requirements. Approved As-Build control drawings must be available for the EMCS operator performing the interacing. Graphics shall be created prior to interface with existing EMCS.

3.7 CONTROLS SYSTEM OPERATORS MANUALS

Provide four electronic and printed copies of a Controls System Operators Manual. Manual copies must be placed in the following locations:

a. Submitted to the ROICC.

b. On the submitted and approved notebook computer.

c. In the storage cabinet.

d. Delievered to the BAS Owner.

The manual shall be specific to the project, written to actual project conditions, and provide a complete and concise depiction of the installed work. Provide information in detail to clearly explain all operation requirements for the control system.

Provide with each manual: CDs of the project's control system drawings, control programs, data bases, graphics, and all items listed below. Include gateway back-up data and configuration tools where applicable. Provide CDs in jewel case with printed and dated project-specific labels on both the CD and the case. For text and drawings, use Adobe Acrobat or MS Office file types. When approved by the Government, AutoCAD and Visio files are allowed. Give files descriptive English names and organize in folders.

Provide printed manuals in sturdy 3-ring binders with a title sheet on the outside of each binder indicating the project title, project location, contract number, and the controls contractor name, address, and telephone number. Each binder shall include a table of contents and tabbed dividers, with all material neatly organized. Manuals shall include the following:

a. A copy of the as-built control system (shop) drawings set, with all items specified under the paragraph SUBMITTALS. Indicate all field changes and modifications. As-Built Control Drawings shall be marked "As-Built" on the cover page and in the title block of each page. Revisions must be dated, may be hand or CAD annotated.

b. A copy of the project's mechanical design drawings, including any official modifications and revisions.

c. A copy of the project's approved Product Data submittals provided under the paragraph SUBMITTALS.

d. A copy of the project's approved Equipment Supplier's PVT Plan, Controls Contractor's PVT Plan, and PVT Report.

e. A copy of the project's approved final TAB Report.

f. Printouts of all control system programs, including controller setup pages if used. Include plain-English narratives of application programs, flowcharts, and source code.

g. Printouts of all physical input and output object properties, including tuning values, alarm limits, calibration factors, and set points.

h. A table entitled "AC Power Table" listing the electrical power source for each controller. Include the building electrical panel number, panel location, and circuit breaker number.

i. The DDC manufacturer's hardware and software manuals in both print and CD format with printed project-specific labels. Include installation and technical manuals for all controller hardware, operator manuals

for all controllers, programming manuals for all controllers, operator manuals for all workstation software, installation and technical manuals for the workstation and notebook, and programming manuals for the workstation and notebook software.

j. A list of qualified control system service organizations for the work provided under this contract. Include their addresses and telephone numbers.

k. A written statement entitled "Technical Support" stating the control system manufacturer or authorized representative will provide toll-free telephone technical support at no additional cost to the Government for a minimum of two years from project acceptance, will be furnished by experienced service technicians, and will be available during normal weekday working hours. Include the toll-free technical support telephone number.

l. A written statement entitled "Software Upgrades" stating software and firmware patches and updates will be provided upon request at no additional cost to the Government for a minimum of two years from project acceptance. Include a table of all DDC system software and firmware provided under this contract, listing the original release dates, version numbers, part numbers, and serial numbers.

m. Submit any and all updated field controller files, and BACnet Building Controller data base during the acceptance and warranty periods or as a result of a latent defect. Include in Warranty Information.

3.7.1 Storage Cabinets

In each mechanical room provide a wall-mounted storage cabinet with hinged doors. In addition to the number of manuals specified above, provide an additional copy of the manuals in this mechanical room storage cabinet. Provide cabinets large enough to hold the entire set of Controls System Operators Manuals, and the HVAC operation and maintenance manuals provided under Division 23 Heating, Ventilating, and Air Conditioning. Locate cabinets adjacent to DDC control panels where applicable. Have each cabinet's proposed installation site approved in advance by the Contracting Officer and the BAS Owner. Prominently label each cabinet with the wording "OPERATION AND MAINTENANCE MANUALS." Prominently label each binder with the wording "MECHANICAL ROOM COPY - DO NOT REMOVE."

3.8 PERFORMANCE VERIFICATION TESTING

3.8.1 General

The PVT must demonstrate compliance of the control system work with the contract requirements. The PVT shall be performed by the Controls Contractor and Equipment Suppliers. If the project is phased, provide separate testing for each phase.

3.8.2 PVT and Commissioning

PVT testing is a Government quality assurance function that includes systems trending and field tests. Commissioning is a quality control function that is the Commissioning Team’s responsibility to the extent required by this contract.

3.8.3 PVT of Equipment with Packaged Controls

Controls Contractor and Equipment Supplier(s) must share and coordinate PVT testing responsibilities for equipment provided with on-board factory packaged controls such as boiler controllers, dedicated outside air systems (DOAS’s), and packaged pumping systems.

3.8.3.1 Controls Contractor Responsibilities

The Controls Contractor must provide a PVT Plan separate from Equipment Supplier's Performance Verification Testing Plan and perform PVT testing concurrent with Equipment Suppliers’ testing for equipment provided with on-board factory packaged controls to demonstrate the following:

a. Equipment enabling and disabling.

b. Equipment standard and optional control points necessary to accomplish functionality regardless if specified in contract documents or not.

c. Equipment standard and optional alarms critical to safe operation regardless if specified in contract documents or not.

d. All control points added by Controls Contractor in addition to onboard factory packaged controls regardless if specified in contract documents or not.

3.8.3.2 Equipment Supplier Responsibilities

Each Equipment Supplier must provide PVT Plans separate from Controls Contractor’s Performance Verification Testing Plan and perform PVT testing concurrent with Controls Contractor’s testing for their equipment provided with on-board factory packaged controls to demonstrate the following:

a. Equipment standard and optional control features necessary to accomplish functionality regardless if specified in contract documents or not.

b. Equipment standard and optional operation modes necessary to accomplish functionality regardless if specified in contract documents or not.

c. Equipment standard and optional alarm conditions for safe operation regardless if specified in contract documents or not.

3.8.4 Sensor Accuracy Checks

Include a one-point accuracy check of each sensor in the PVT procedures.

3.8.5 Performance Verification Testing Plan

Submit a detailed PVT Plan of the proposed testing for Government approval. Develop the PVT Plan specifically for the control system and equipment with packaged controls in this contract. The PVT Plan shall be a clear list of test items arranged in a logical sequence. It shall include each and all sequences of all controllers. Include sequence tested, intended test procedure, required assisted personnel (such as the mechanical contractor), the expected response, and the pass/fail criteria for every component tested. Include pass/fail column for test, and space for comments, signature and date lines for Contractor's PVT administrator

and Contractor's QA representative. The PVT plan shall include the prescriptive pre-PVT check list in addition to the Contractor generated controller specific testing sequences. Propose criteria for the trends, i.e., change of state, change of value with the trigger value, time intervals in the PVT Plan submission for approval. Prepare the following PVT plans:

a. Control Contractor's Performance Verification Testing Plan

b. Equipment Supplier's Performance Verification Testing Plan

3.8.6 PVT Sample Size

Test all controllers unless otherwise directed.

3.8.7 Control Contractor's Pre-PVT Checklist

Submit the following as a part of the PVT Plan and the PVT Report. Each item shall include a column for the Contractor's initial/date. This form may be a general form applicable to all controllers and submitted only once in the PVT Plan. Each controller shall have an individual checklist with controller title and identified in the PVT Report.

a. Verify all mechanical installation work is successfully completed and started up by the appropriate personnel.

b. Verify all required control system components, wiring, and accessories are installed.

c. Verify the installed control system architecture matches approved drawings.

d. Verify all control circuits operate at the proper voltage and are free from grounds or faults.

e. Verify all required surge protection is installed.

f. Verify the A/C Power Table specified in the paragraph CONTROLS SYSTEM OPERATORS MANUALS is accurate.

g. Verify all DDC network communications function properly, including uploading and downloading programming changes.

h. Verify each digital controller’s programming is backed up.

i. Verify all wiring, components, and panels are properly labeled.

j. Verify all required points are programmed into devices.

k. Verify all valve and actuator zero and span adjustments are set properly. List each device and span for that device. label device with span setting and adjustment date.

l. Verify all sensor readings are accurate and calibrated. List each sensor, sensor reading, and measured value. Label device with calibrated value and the calibration date.

m. Verify each control valve and actuator goes to normal position upon loss of power. List each device and normal position.

n. Verify each controller works properly in stand-alone mode by disconnecting the BACnet bus.

3.8.8 Conducting PVT

a. Conduct PVT after approval of the PVT Plan. Notify the Contracting Officer of the planned PVT at least 15 days prior to testing. Provide an estimated time table required to perform the testing. Furnish personnel, equipment, instrumentation, and supplies necessary to perform all aspects of the PVT. Ensure that testing personnel are regularly employed in the testing and calibration of DDC systems. Using the project's as-built control system (shop) drawings, the project's mechanical design drawings, and the approved PVT Plan, conduct the PVT.

b. During testing, identify any items that do not meet the contract requirements and if time permits, conduct immediate repairs and re-test. Otherwise, deficiencies shall be investigated, corrected, and re-tested later. Document each deficiency and corrective action taken.

c. If re-testing is required, follow the procedures for the initial PVT. The Government may require re-testing of any control system components affected by the original failed test.

3.8.9 Controller Capability and Labeling

Test the following for each controller:

a. Memory: Demonstrate that programmed data, parameters, and trend/ alarm history collected during normal operation is not lost during power failure.

b. Direct Connect Interface: Demonstrate the ability to connect directly to each type of digital controller with a portable electronic device like a notebook computer or PDA. Show that maintenance personnel interface tools perform as specified in the manufacturer's technical literature.

c. Stand Alone Ability: Demonstrate controllers provide stable and reliable stand-alone operation using default values for values normally read over the network.

d. Wiring and AC Power: Demonstrate the ability to disconnect any controller safely from its power source using the AC Power Table. Demonstrate the ability to match wiring labels easily with the control drawings. Demonstrate the ability to locate a controller's location using the BACnet Communication Architecture Schematic and floor plans.

e. Nameplates and Tags: Show the nameplates and tags are accurate and permanently attached to control panel doors, devices, sensors, and actuators.

3.8.10 Workstation and Software Operation

For every user workstation or notebook provided:

a. Show points lists agree with naming conventions.

b. Show that graphics are complete.

c. Show the UPS operates as specified.

3.8.11 BACnet Communications and Interoperability Areas

a. Data Presentation: On each BACnet Operator Workstation, demonstrate graphic display capabilities.

b. Reading of Any Property: Demonstrate the ability to read and display any used readable object property of any device on the network.

c. Setpoint and Parameter Modifications: Show the ability to modify all setpoints and tuning parameters in the sequence of control or listed on project schedules. Modifications are made with BACnet messages and write services initiated by an operator using workstation graphics, or by completing a field in a menu with instructional text.

d. Peer-to-Peer Data Exchange: Show all BACnet devices are installed and configured to perform BACnet read/write services directly (without the need for operator or workstation intervention), to implement the project sequence of operation, and to share global data.

e. Alarm and Event Management: Show that alarms/events are installed and prioritized according to the BAS Owner. Demonstrate time delays and other logic is set up to avoid nuisance tripping, e.g., no status alarms during unoccupied times or high supply air during cold morning start-up. Show that operators with sufficient privilege can read and write alarm/event parameters for all standard BACnet event types. Show that operators with sufficient privilege can change routing (BACnet notification classes) for each alarm/event including the destination, priority, day of week, time of day, and the type of transition involved (types of transition include but are not limited to the following: TO-OFF NORMAL and TO-NORMAL).

f. Schedule Lists: Show that schedules are configured for start/stop, mode change, occupant overrides, and night setback as defined in the sequence of operations.

g. Schedule Display and Modification: Show the ability to display any schedule with start and stop times for the calendar year. Show that all calendar entries and schedules are modifiable from any connected workstation by an operator with sufficient privilege.

h. Archival Storage of Data: Show that data archiving is handled by the operator workstation/server, and local trend archiving and display is accomplished with BACnet Trend Log objects.

i. Modification of Trend Log Object Parameters: Show that an operator with sufficient privilege can change the logged data points, sampling rate, and trend duration.

j. Device and Network Management: Show the following capabilities:

(1) Display of Device Status Information

(2) Display of BACnet Object Information

(3) Silencing Devices that are Transmitting Erroneous Data

(4) Time Synchronization

(5) Remote Device Reinitialization

(6) Backup and Restore Device Programming and Master Database(s)

(7) Configuration Management of Half-Routers, Routers and BBMDs

3.8.12 Execution of Sequence of Operation

Demonstrate that the HVAC system operates properly through the complete sequence of operation. Use read/write property services to globally read and modify parameters over the internetwork.

3.8.13 Control Loop Stability and Accuracy

For all control loops tested, give the Government trend graphs of the control variable over time, demonstrating that the control loop responds to a 20 percent sudden change of the control variable set point without excessive overshoot and undershoot. If the process does not allow a 20 percent set point change, use the largest change possible. Show that once the new set point is reached, it is stable and maintained. Control loop trend data shall be in real-time with the time between data points 30 seconds or less.

3.8.14 Performance Verification Testing Report

Upon successful completion of the PVT and prior to the Government taking use and possession of the facility, submit a single PVT Report to the Government. Do not submit the report until all problems are corrected and successfully re-tested. The report shall include the annotated PVT Plan used during the PVT. Where problems were identified, explain each problem and the corrective action taken. Include a written certification that the installation and testing of the control system is complete and meets all of the contract's requirements.

3.8.15 PVT Acceptance Testing Season One

Season 1 is determined by the outdoor conditions that are occurring once the project HVAC and DDC controls are initially completed and ready for PVT. Conversely, Season 2 is defined as the opposite outdoor conditions from Season 1. Season 1 could be either the season of maximum heating load, or the season of maximum cooling load. The season of maximum cooling load is the time of year when the outdoor temperature at the project site remains above 85 degrees Fahrenheit dry bulb and 76 degress Fahrenheit wet bulb for at least 8 consecutive hours during the period of DDC data recording. The season of maximum cooling load shall fall within June, July, August, or September. The Season of maximum heating load is the time of year when the outdoor temperature at the project site remains below 45 degrees Fahrenheit for at least 8 consecutive hours during the period of DDC data recording.

After acceptance of the PVT Report and Trends, demonstrate proper and stable operation of the DDC System. Contractor shall provide minimum fifteen days notice to COTR and BAS Owner when scheduling field acceptance testing. During the field acceptance testing, verify, in the presence of the COTR and BAS owner, random selections of sequences reported in the PVT Report. Equipment, controllers, devices, and sequences for field

acceptance testing are to be selected by the COTR. As-built control drawings must be for use and verification at acceptance testing. Field acceptance testing includes verification of the PVT for the following equipment groups:

Group 1: All pumps, chillers, boilers, return fans, computer room units, and air handling units (rooftop and central stations).

Group 2: 50 percent of terminals such as VAV and fan coil units.

Group 3: 100 percent of supply fans, and exhaust fans.

If any of the acceptance testing is found to not operate correctly, terminate verification for the given group. Make the necessary corrections and prepare a revised PVT Report and Trends. Reschedule acceptance testing of the revised report with the COTR. After successful field acceptance testing, submit the revised controller files and BACnet Building Controller database within 15 calendar days.

3.8.16 PVT Acceptance Testing Season 2

A minimum of 3 months after initial acceptance of the DDC system and in the opposite season of heating and cooling, demonstrate proper and stable operation of the DDC system. Contractor shall provide minimum fifteen days notice to COTR and BAS Owner when scheduling field acceptance testing. During the field acceptance testing, verify, in the presence of the COTR and BAS owner, random selections of sequences reported in the PVT Report. Equipment, controllers, devices, and sequences for field acceptance testing are to be selected by the COTR. Field acceptance testing includes verification of the PVT for the following equipment groups:

Group 1: All pumps, chillers, boilers, return fans, computer room units, and air handling units (rooftop and central stations).

Group 2: 50 percent of terminals such as VAV and fan coil units.

Group 3: 100 percent of supply fans, and exhaust fans.

If any of the acceptance testing is found to not operate correctly, terminate verification for the given group. Make the necessary corrections and prepare a revised PVT Report. Reschedule acceptance testing of the revised report with the COTR. After successful field acceptance testing, submit the revised controller files and BACnet Building Controller database within 15 calendar days.

3.8.17 Prerequisite for Approval

Compliance with the field acceptance testing requirements of this section is a prerequisite for the final Contracting Officer approval of the PVT Report submitted.

3.9 TRENDS

Trends shall be reported on all points requiring trending as indicated on contract drawings. Trends shall be reported on all central plant equipment and primary air handling unit controllers, and all terminal controllers such as VAV boxes and fan coil units. Include 72 hour trends during which the system is operated continuously. Data from all points must be from a single consecutive 72 hour period without any gaps in time Monday through

Friday. Data may not be from Saturday or Sunday unless prior written authorization is obtained from the Contracting Officer.

Unless trending capability exists within the building control system, temporarily install hardware on the building control network to perform trending. Remove the temporary hardware at the completion of all acceptance activities.

Use the building control system Niagara Trend Log Objects to trend all points shown as requiring a trend on the Point Schedule for the entire trending period.

If resubmission is required, all points must be trended. Partial trends will not be accepted.

Additional trends or points shall be provided if requested by Camp Lejeune or a commissioning agent.

Trends shall demonstrate stable operation of the PID loop controls and ability to maintain all temperatures within +/- 1.0 degree F of setpoint. Any alarms that activate during the trending period will result in trend data disapproval regardless of the cause of the alarm.

3.9.1 Trend Report Format

Trend data must be submitted in Microsoft Excel (.xlsx) format. Mutiple workbooks are acceptable, but trend data must be grouped and formatted as follows:

a. Column A on every worksheet must contain the date (MM/DD/YYYY) and time (HH:MM:SS) on every row containing data.

b. For every point, row 1 shall contain the point name (see Attachment 2). Row 2 shall contain the corresponding point name as given on the contract drawings. Row 3 shall contain the unit of measure.

c. All chilled water equipment (e.g. chiller, pumps, etc.) shall be on a single worksheet.

d. All heating hot water equipment (e.g. boilers, pumps, etc.) shall be on a single worksheet.

e. All domestic hot water equipment (e.g. water heater, recirculation pump, etc.) shall be on a single worksheet.

f. All unitary exhaust fans shall be on a single worksheet.

g. Each central piece of equipment (e.g. AHU, DOAS, RTU, etc.) shall be on its own worksheet.

h. Terminal units such as VAV's and Fan Coil Units shall be grouped by the central unit source and shall be on a single worksheet.

i. Packaged terminal air conditioners or heat pumps shall be grouped by floor and shall be on a single worksheet.

j. VRF units shalled be grouped by branch box serving the fan coils and shall be on a single worksheet.

Trend data from the groups described above must be on separate worksheets. Do not mix equipment from the described groups on a single worksheet.

3.10 BUS WAVEFORM REPORT

3.10.1 Bus Waveform Report

Provide printed waveform of the MS/TP bus(es) after all devices are online and operational. Use an oscilloscope to test and record the wave form of each bus segment complete with graphic scale. This waveform is useful in identifying and troubleshooting bus problems such as inappropriate taps, grounds, end of line terminations and poor connections. Identify each waveform graphic with bus segment name/number, location/building, date and time, and instrument used. Include the resistor sizes needed at each Bus End of Line (EOL). Include a list of the EOL devices. Waveform must be field verified by the BAS Owner prior to BOD.

3.10.2 Bus Waveform Field Acceptance Testing

Contractor shall provide minimum fifteen days notice to COTR and BAS Owner when scheduling field verification. During the field acceptance testing, verify, in the presence of the COTR, the bus waveform. If the bus waveform does not match the report, terminate field acceptance testing. Make the necessary corrections and prepare a revised Bus Waveform Report. Reschedule acceptance testing of the revised report data with the COTR.

3.10.3 Prerequisite for Approval

Compliance with the field acceptance testing requirements of this section is a prerequisite for the final Contracting Officer approval of the Bus Waveform Report submitted.

3.11 TRAINING REQUIREMENTS

Provide a qualified instructor (or instructors) with two years minimum field experience with the installation and programming of similar BACnet DDC systems. Orient training to the specific systems installed. Coordinate training times and location with the Contracting Officer and BAS Owner after receiving approval of the training course documentation. Training shall take place at the job site or a nearby Government-furnished location. A training day shall occur during normal working hours, last no longer than 8 hours and include a one-hour break for lunch and two additional 15-minute breaks. The project's approved Controls System Operators Manual shall be used as the training text. The Contractor shall ensure the manuals are submitted, approved, and available to hand out to the trainees before the start of training.

3.11.1 Training Documentation

Submit training documentation for review 30 days minimum before training. Documentation shall include an agenda for each training day, objectives, a synopses of each lesson, and the instructor's background and qualifications. The training documentation can be submitted at the same time as the project's Controls System Operators Manual.

3.11.2 Phase I Training - Fundamentals

The Phase I training session shall last one day and be conducted in a classroom environment with complete audio-visual aids provided by the

contractor. Provide each trainee a printed 8.5 by 11 inch hard-copy of all visual aids used. Upon completion of the Phase I Training, each trainee must fully understand the project's DDC system fundamentals. Approved As-Built control drawings must be used for training. The training session shall include the following:

a. BACnet fundamentals (objects, services, addressing) and how/where they are used on this project.

b. This project's list of control system components.

c. This project's list of points and objects.

d. This project's device and network communication architecture.

e. This project's sequences of control.

f. Alarm capabilities.

g. Trending capabilities.

h. Troubleshooting communication errors.

i. Troubleshooting hardware errors.

3.11.3 Phase II Training - Operation

Provide Phase II Training shortly after completing Phase I Training. The Phase II training session shall last one day and be conducted at the DDC system workstation, at a notebook computer connected to the DDC system in the field, and at other site locations as necessary. Upon completion of the Phase II Training, each trainee must fully understand the project's DDC system operation. The training session shall include the following:

a. A walk-through tour of the mechanical system and the installed DDC components (components include but are not limited to the following: controllers, valves, dampers, surge protection, switches, thermostats, and sensors).

b. A discussion of the components and functions at each DDC panel.

c. Logging-in and navigating at each operator interface type.

d. Using each operator interface to find, read, and write to specific controllers and objects.

e. Modifying and downloading control program changes.

f. Modifying setpoints.

g. Creating, editing, and viewing trends.

h. Creating, editing, and viewing alarms.

i. Creating, editing, and viewing operating schedules and schedule objects.

j. Backing-up and restoring programming and data bases.

k. Modifying graphic text, backgrounds, dynamic data displays, and links to other graphics.

l. Creating new graphics and adding new dynamic data displays and links.

m. Alarm and Event management.

n. Adding and removing network devices.

-- End of Section --

SECTION 23 09 13

INSTRUMENTATION AND CONTROL DEVICES FOR HVAC
02/25 MCBCL

PART 1 GENERAL

1.1 SUMMARY

This section provides for the instrumentation control system components excluding direct digital controllers, network controllers, gateways, etc. that are necessary for a completely functional automatic control system. When combined with a Direct Digital Control (DDC) system, the Instrumentation and Control Devices covered under this section must be a complete system suitable for the control of the heating, ventilating and air conditioning (HVAC), plumbing, and other building-level systems as specified and indicated.

a. Install hardware to perform the control sequences as specified and indicated and to provide control of the equipment as specified and indicated.

b. Install hardware such that individual control equipment can be replaced by similar control equipment from other equipment manufacturers with no loss of system functionality.

c. Install and configure hardware such that the Government or their agents are able to perform repair, replacement, and upgrades of individual hardware without further interaction with the installing Contractor.

1.1.1 Verification of Dimensions

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.1.2 Drawings

The Government will not indicate all offsets, fittings, and accessories that may be required on the drawings. Carefully investigate the mechanical, electrical, plumbing, and finish conditions that could affect the work to be performed, arrange such work accordingly, and provide all work necessary to meet such conditions.

1.2 RELATED SECTIONS

Related work specified elsewhere.

Section 01 30 00 ADMINISTRATIVE REQUIREMENTS

Section 23 30 00 HVAC AIR DISTRIBUTION

Section 23 05 15 COMMON PIPING FOR HVAC

Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC

Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. (AMCA)

AMCA 500-D	(2018) Laboratory Methods of Testing Dampers for Rating

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.5	(2020) Pipe Flanges and Flanged Fittings NPS 1/2 Through NPS 24 Metric/Inch Standard
ASME B16.34	(2021) Valves - Flanged, Threaded and Welding End

ASTM INTERNATIONAL (ASTM)

ASTM A126	(2004; R 2023) Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 72	(2025; TIA 25-1; TIA 25-2; TIA 25-3; TIA 25-4; ERTA 25-1; ERTA 25-2) National Fire Alarm and Signaling Code
NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1966	(2020) HVAC Duct Construction Standards Metal and Flexible, 4th Edition

1.4 SUBMITTALS

Submit detailed and annotated manufacturer's data, drawings, and specification sheets for each item listed, that clearly show compliance with the project specifications.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Sensors And Input Hardware; G

Output Hardware; G

Duct Smoke Detectors; G

Variable Frequency (Motor) Drives; G

SD-06 Test Reports

Vfd Start-Up Test Documentation; G

SD-10 Operation and Maintenance Data

Comply with requirements for data packages in Section 01 78 23 OPERATION AND MAINTENANCE DATA and in Section 01 78 24.00 20 FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI), except as supplemented and modified in this specification.

Vfd Service Manuals; G, Data Package 4

1.5 QUALITY ASSURANCE

Quality Assurance requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

1.6 DELIVERY, STORAGE, AND HANDLING

Delivery, storage, and handling requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

PART 2 PRODUCTS

2.1 EQUIPMENT

2.1.1 General Requirements

All products used to meet this specification must meet the indicated requirements, but not all products specified here will be required by every project. All products must meet the requirements both Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and this Section.

2.1.2 Operation Environment Requirements

Unless otherwise specified, provide products rated for continuous operation under the following conditions:

2.1.2.1 Pressure

Pressure conditions normally encountered in the installed location.

2.1.2.2 Vibration

Vibration conditions normally encountered in the installed location.

2.1.2.3 Temperature

a. Products installed indoors: Ambient temperatures in the range of 32 to 112 degrees F and temperature conditions outside this range normally encountered at the installed location.

b. Products installed outdoors or in unconditioned indoor spaces: Ambient temperatures in the range of -35 to +151 degrees F and temperature conditions outside this range normally encountered at the installed location.

2.1.2.4 Humidity

10 to 95 percent relative humidity, non-condensing and also humidity conditions outside this range normally encountered at the installed location.

2.2 WIRELESS CAPABILITY

Wireless capability requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

2.3 SENSORS AND INPUT HARDWARE

Coordinate sensor types with the BAS Owner to keep them consistent with existing installations.

2.3.1 Field-Installed Temperature Sensors

Where feasible, provide the same sensor type throughout the project. Avoid using transmitters unless absolutely necessary.

2.3.1.1 Thermistors

Precision thermistors may be used in applications below 200 degrees F. Sensor accuracy over the application range shall be 0.36 degree F or less between 32 to 150 degrees F. Stability error of the thermistor over five years shall not exceed 0.25 degrees F cumulative. A/D conversion resolution error shall be kept to 0.1 degrees F. Total error for a thermistor circuit shall not exceed 0.5 degrees F.

2.3.1.2 Resistance Temperature Detectors (RTDs)

Provide RTD sensors with platinum elements compatible with the digital controllers. Encapsulate sensors in epoxy, series 300 stainless steel, anodized aluminum, or copper. Temperature sensor accuracy shall be 0.1 percent (1 ohm) of expected ohms (10k ohms) at 32 degrees F. Temperature sensor stability error over five years shall not exceed 0.25 degrees F cumulative. Direct connection of RTDs to digital controllers without transmitters is preferred. When RTDs are connected directly, lead resistance error shall be less than 0.25 degrees F. The total error for a RTD circuit shall not exceed 0.5 degrees F.

2.3.1.3 Temperature Sensor Details

a. Room Type: Provide the sensing element components within a decorative protective cover suitable for surrounding decor. .

b. Duct Probe Type: Ensure the probe is long enough to properly sense the air stream temperature.

c. Duct Averaging Type: Continuous averaging sensors shall be one foot in length for each 4 square feet of duct cross-sectional area, and a minimum length of 6 feet.

d. Pipe Immersion Type: Provide minimum three-inch immersion. Provide each sensor with a corresponding pipe-mounted sensor well, unless indicated otherwise. Sensor wells shall be stainless steel when used in steel piping, and brass when used in copper piping. Provide the sensor well with a heat-sensitive transfer agent between the sensor and the well interior.

e. Outside Air Type: Provide the sensing element on the building's north side with a protective weather shade that positions the sensor approximately 3 inches off the wall surface, does not inhibit free air flow across the sensing element, and protects the sensor from snow, ice, and rain.

2.3.2 Supervisory Controller MCEN Network Homerun

All conduits shall be 1 inch inside diameter. No bends in conduit shall exceed 90 degrees. All bends shall be sweeping. Pull boxes shall be installed after every two 90 degree bends, after any number of bends that add up to 180 degrees or greater, or on any straight run exceeding 100 feet. All pull boxes shall be "straight through" (i.e. conduits enter and exit on opposite sides of the pull box.) Pull boxes shall not be substituted for 90 degree bend requirements. All conduits shall have a vinyl bushing installed at termination points, All conduits shall have a ground bushing at the telecommunication distribution area bonded to the telecommunication bonding bus bar. See Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC paragraph Network Communication Lines for additional requirements.

2.3.3 Transmitters

Provide transmitters with 4 to 20 mA or 0 to 10 VDC linear output scaled to the sensed input. Transmitters shall be matched to the respective sensor, factory calibrated, and sealed. Size transmitters for an output near 50 percent of its full-scale range at normal operating conditions. The total transmitter error shall not exceed 0.1 percent at any point across the measured span. Supply voltage shall be 12 to 24 volts AC or DC. Transmitters shall have non-interactive offset and span adjustments. For temperature sensing, transmitter drift shall not exceed 0.03 degrees F a year.

2.3.3.1 Relative Humidity Transmitters

Provide transmitters with an accuracy equal to plus or minus 3 percent from 0 to 90 percent scale, and less than one percent drift per year. Sensing elements shall be the polymer type.

2.3.3.2 Pressure Transmitters

Provide transmitters integral with the pressure transducer. Size transmitters for an output near 50 percent of its full-scale range at normal operating conditions.

2.3.4 Current Transducers

Provide current transducers to monitor motor amperage, unless current switches are shown on design drawings or point tables. Provide a VFD rated current sensor where applicable.

2.3.5 Motor Run Status

Unless otherwise noted, provide current switches to indicate run status of pumps and fans. Sensitivity of the switch on belt and coupler driven equipment must distinguish between loaded motor and unloaded motor such as a fan with a broken belt. Provide label indicating calibration date affixed to the device.

2.3.6 Pneumatic to Electric Transducers

Pneumatic to electronic transducers shall convert a 0 to 20 psig signal to a proportional 4 to 20 mA or 0 to 10 VDC signal (operator scaleable). Supply voltage shall be 24 VDC. Accuracy and linearity shall be 1.0 percent or better.

2.3.7 Air Quality Sensors

Provide power supply for each sensor.

2.3.7.1 CO2 Sensors

Provide photo-acoustic type CO2 sensors with integral transducers and linear output. The devices shall read CO2 concentrations between 0 and 2000 ppm with full scale accuracy of at least plus or minus 100 ppm.

2.3.7.2 Air Quality Sensors

Provide full spectrum air quality sensors using a hot wire element based on the Taguchi principle. The sensor shall monitor a wide range of gaseous volatile organic components common in indoor air contaminants like paint fumes, solvents, cigarette smoke, and vehicle exhaust. The sensor shall automatically compensate for temperature and humidity, have span and calibration potentiometers, operate on 24 VDC power with output of 0-10 VDC, and have a service rating of 32 to 140 degrees F and 5 to 95 percent relative humidity.

2.3.8 Input Switches

2.3.8.1 Timed Local Overrides

Provide buttons or switches to override the DDC occupancy schedule programming for each major building zone during unoccupied periods, and to return HVAC equipment to the occupied mode. This requirement is waived for zones clearly intended for 24 hour continuous operation.

2.3.8.2 Emergency Shut Down Switches (ATFP)

Anti Terrorism Force Protection emergency shut down switches must be two action to prevent accidental initiation, such as a mushroom push button with a cover. Switches shall have the following attributes:

a. Switches shall not be keyed.

b. Switches shall be blue with a red latching mushroom push button.

c. Switches shall be twist or rotary reset.

d. Switch(es) to be provided with a different color than fire alarm pull stations.

2.3.9 Freeze Protection Thermostats

Provide special purpose thermostats with flexible capillary elements 20 feet minimum length for coil face areas up to 40 square feet. Provide longer elements for larger coils at 1-foot of element for every 4 square feet of coil face area, or provide additional thermostats. Provide switch contacts rated for the respective motor starter's control circuit voltage. Include auxiliary contacts for the switch's status condition. A freezing condition at any 18-inch increment along the sensing element's length shall activate the switch. The thermostat shall be equipped with a manual push-button reset switch so that when tripped, the thermostat requires manual resetting before the HVAC equipment can restart. Provide with factory fabricated mounting rings.

2.3.10 Air Flow Measurement Stations

Air flow measurement stations shall have an array of velocity sensing elements and straightening vanes inside a flanged sheet metal casing. The velocity sensing elements shall be the RTD or thermistor type, traversing the ducted air in at least two directions. The air flow pressure drop across the station shall not exceed 0.08 inch water gage at a velocity of 2,000 fpm. The station shall be suitable for air flows up to 5,000 fpm, and a temperature range of 40 to 120 degrees F. The station's measurement accuracy over the range of 125 to 2,500 fpm shall be plus or minus 3 percent of the measured velocity. Station transmitters shall provide a linear, temperature-compensated 4 to 20 mA or 0 to 10 VDC output. The output shall be capable of being accurately converted to a corresponding air flow rate in cubic feet per minute. Transmitters shall be a 2-wire, loop powered device. The output error of the transmitter shall not exceed 0.5 percent of the measurement.

2.3.11 Air Flow Measurement for Terminal Devices

Air flow measurement for terminal devices such as variable air volume boxes, with or without fan power shall have an array of pressure sensing elements than sense total pressure and static pressure. The flow measurement shall be integral to the device controller and shall be by differential pressure sensor. The air flow shall measure flows down to 300 fpm with an accuracy of 5 percent of reading.

2.3.12 Liquid Flow Meters

Insertion electromagnetic flow meter suitable for measuring electrically conductive liquids in hydronic applications. Provide with grounding ring.

a. Accuracy: ± 1.0% of reading from 2 - 20 ft/s, ± 0.02 ft/s below 2 ft/s.

b. Flow Range: 0.1 ft/s to 20 ft/s (200:1 turndown).

c. Liquid Temperature Range: 15°F to 250°F.

d. Wetted Metal Components: 316 Stainless Steel.

e. Liquid Process Connection: Flange.

f. Display: Display gallons per minute. Must be NEMA 4 rated. Display must be able to be read without openiing any enclosure.

2.3.13 Energy Metering

2.3.13.1 Hot Water Solar Collector Meters

BACnet output or may be a combination of temperature sensors and water flow meter monitored by a DDC controller with the DDC system calculating the BTU transfer. Water flow can be measured by orifice or venturi meter selected for the anticipated system flow rate. Temperature sensors shall be placed in both the supply to and the return from the solar collector array.

2.3.13.2 Electrical Meters

Provide enhanced power and energy meter with built-in integrator and power supply for the CTs. Meter shall have onboard data logging capability as well as output to SBC via native BACnet MS/TP. Place meter indoors at building Main Distribution Panel (MDP). This meter shall be provided in addition to any other power meters required by Division 26 (Electrical) or Division 33 (Utilities).

Electrical meter shall monitor and trend the following points:

a. Power (3-phase total & per phase): Real (kW), Reactive (kVAR), and Apparent (kVA)

b. Power Factor: 3-phase average & per phase

c. Present Power Demand: Real (kW), Reactive (kVAR), and Apparent (kVA)

d. Peak Power Demand: Real (kW), Reactive (kVAR), and Apparent (kVA)

e. Current: 3-phase average and per phase

f. Voltage: Line-Line and Line-Neutral (3-phase average & per phase)

g. Frequency

h. Accumulated Net Energy: Real (kWh), Reactive (kVARh), and Apparent (kVAh)

i. Accumulated Real Energy by phase (kWh)

2.4 OUTPUT HARDWARE

2.4.1 Control Dampers

Provide factory manufactured aluminum dampers where indicated. Dampers shall be opposed blade for rectangular applications 10-inches and taller, and single blade for round dampers and rectangular dampers shorter than 10-inches. Control dampers shall comply with SMACNA 1966 except as modified or supplemented by this specification. Published damper leakage rates and respective pressure drops shall have been verified by tests in compliance with AMCA 500-D requirements.

Provide damper assembly frames constructed of minimum thickness galvanized steel channels with mitered and welded corners. Damper axles shall be 0.5 inches minimum diameter plated steel rods supported in the damper frame by stainless steel or bronze bearings. Blades mounted vertically shall be supported by thrust bearings.

Dampers shall be rated for not less than 2000 fpm air velocity. The pressure drop through each damper when full-open shall not exceed 0.04 inches water gage at 1000 fpm face velocity. Damper assemblies in ductwork shall be constructed to meet SMACNA Seal Class "A" construction requirements.

Provide the damper operating linkages outside of the air stream, including crank arms, connecting rods, and other hardware that transmits motion from the damper actuators to the dampers, shall be adjustable. Additionally, operating linkages shall be designed and constructed to have a 2 to 1 safety factor when loaded with the maximum required damper operating force. Linkages shall be brass, bronze, galvanized steel, or stainless steel.

Provide access doors or panels in hard ceilings and walls for access to all concealed damper operators and damper locking setscrews.

For field-installed control dampers, a single damper section shall have blades no longer than 48 inches and no higher than 72 inches. The maximum damper blade width shall be 12 inches. Larger sized dampers shall be built using a combination of sections.

Frames shall be at least 2 inches wide. Flat blades shall have edges folded for rigidity. Blades shall be provided with compressible gasket seals along the full length of the blades to prevent air leakage when closed.

The damper frames shall be provided with jamb seals to minimize air leakage. Seals shall be suitable for an operating temperature range of minus 40 degrees F to 200 degrees F.

The leakage rate of each damper when full-closed shall be no more than 3 cfm per sq. foot of damper face area at 1.0 inches water gage static pressure.

2.4.2 Control Valves

2.4.2.1 Valve Assembly

Valve bodies shall be designed for 125 psig minimum working pressure or 150 percent of the operating pressure, whichever is greater. Valve stems shall be Type 316 stainless steel. Valve leakage ratings shall be 0.01 percent of rated Cv value. Class 125 copper alloy valve bodies and Class 150 steel or stainless steel valves shall meet the requirements of ASME B16.5. Cast iron valve components shall meet the requirements of ASTM A126 Class B or C.

2.4.2.2 Butterfly Valves

Butterfly valves shall be the threaded lug type suitable for dead-end service and for modulation to the fully-closed position, with stainless steel shafts supported by bearings, non-corrosive discs geometrically interlocked with or bolted to the shaft (no pins), and EPDM seats suitable for temperatures from minus 20 degrees F to plus 250 degrees F. Valves shall have a means of manual operation independent of the actuator.

2.4.2.3 Two-Way Valves

Two-way modulating valves shall have an equal percentage characteristic.

2.4.2.4 Three-Way Valves

Three-way valves shall have an equal percentage characteristic.

2.4.2.5 Valves for Chilled Water, Condenser Water, and Glycol Fluid Service

a. Bodies for valves 1-1/2 inches and smaller shall be brass or bronze, with threaded or union ends. Bodies for valves from 2 inches to 3 inches inclusive shall be of brass, bronze, or iron. Bodies for 2 inch valves shall have threaded connections. Bodies for valves from 2-1/2 to 3 inches shall have flanged connections.

b. Internal valve trim shall be brass or bronze, except that valve stems shall be stainless steel.

c. Provide modulating valves sized for 2 psi minimum and 4 psi maximum differential across the valve at the design flow rate.

d. Valves 4 inches and larger shall be butterfly valves, unless indicated otherwise.

2.4.2.6 Valves for Hot Water Service

Valves for hot water service below 250 Degrees F:

a. Bodies for valves 1-1/2 inches and smaller shall be brass or bronze, with threaded or union ends. Bodies for valves from 2 inches to 3 inches inclusive shall be of brass, bronze, or iron. Bodies for 2 inch valves shall have threaded connections. Bodies for valves from 2-1/2 to 3 inches shall have flanged connections.

b. Internal trim (including seats, seat rings, modulation plugs, valve stems, and springs) of valves controlling water above 210 degrees F shall be Type 316 stainless steel.

c. Internal trim for valves controlling water 210 degrees F or less shall be brass or bronze. Valve stems shall be Type 316 stainless steel.

d. Non-metallic parts of hot water control valves shall be suitable for a minimum continuous operating temperature of 250 degrees F or 50 degrees F above the system design temperature, whichever is higher.

e. Provide modulating valves sized for 2 psi minimum and 4 psi maximum differential across the valve at the design flow rate.

f. Valves 4 inches and larger shall be butterfly valves, unless indicated otherwise.

2.4.2.7 Valves for High Temperature Hot Water Service

Valves for hot water service 250 Degrees F and above:

a. Valve bodies shall conform to ASME B16.34 Class 300. Valve and actuator combination shall be normally closed. Bodies shall be carbon steel, globe type with welded ends on valves 1 inch and larger. Valves

smaller than 1 inch shall have socket-weld ends. Packing shall be virgin polytetrafluoroethylene (PTFE).

b. Internal valve trim shall be Type 316 stainless steel.

c. Provide modulating valves sized for 2 psi minimum and 4 psi maximum differential across the valve at the design flow rate.

2.4.3 Actuators

Provide direct-drive electric actuators for all control applications, except where indicated otherwise. All actuators shall include a feedback loop for detecting actuator faults. The actuator shall report actual position back to the control system. Binary actuators shall provide open/closed status, at a minimum. Modulating actuators and process shall provide position feedback expressed (directly or through span conversion) as percent open/closed. Actuator status shall be derived from actuator position; however, effect may be used in cases where direct feedback is not practical such as VAV coils and dampers.

Use airflow sensors as a feedback loop for damper actuators. Use differential temperature as a feedback mechanism for VAV coil valve actuation.

2.4.3.1 Electric Actuators

Each actuator shall deliver the torque required for continuous uniform motion and shall have internal end switches to limit the travel, or be capable of withstanding continuous stalling without damage. Actuators shall function properly within 85 to 110 percent of rated line voltage. Provide actuators with hardened steel running shafts and gears of steel or copper alloy. Fiber or reinforced nylon gears may be used for torques less than 16 inch-pounds. Provide two-position actuators of single direction, spring return, or reversing type. Provide modulating actuators capable of stopping at any point in the cycle, and starting in either direction from any point. Actuators shall be equipped with a switch for reversing direction, and a button to disengage the clutch to allow manual adjustments. Provide the actuator with a hand crank for manual adjustments, as applicable. Thermal type actuators may only be used on terminal fan coil units, terminal VAV units, convectors, and unit heaters. Spring return actuators shall be provided on all control dampers and all control valves except terminal fan coil units, terminal VAV units, convectors, and unit heaters; unless indicated otherwise. Each actuator shall have distinct markings indicating the full-open and full-closed position, and the points in-between. Actuators mounted outdoors shall be outdoor rated so that they do not require a weatherproof enclosure.

2.4.4 Output Signal Conversion

2.4.4.1 Electronic-to-Pneumatic Transducers

Electronic to pneumatic transducers shall convert a 4 to 20 mA or 0 to 10 VDC digital controller output signal to a proportional 0 to 20 psig pressure signal (operator scaleable). Accuracy and linearity shall be 1.0 percent or better. Transducers shall have feedback circuit that converts the pneumatic signal to a proportional 4 to 20 mA or 0 to 10 VDC signal.

2.4.5 Output Switches

2.4.5.1 Control Relays

Field installed and DDC panel relays shall be double pole, double throw, UL listed, with contacts rated for the intended application, indicator light, and dust proof enclosure. The indicator light shall be lit when the coil is energized and off when coil is not energized. Relays shall be the socket type, plug into a fixed base, and replaceable without tools or removing wiring. Encapsulated "PAM" type relays may be used for terminal control applications.

2.5 ELECTRICAL POWER AND CONTROL WIRING

Electrical power and control wiring requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

2.6 FIRE PROTECTION DEVICES

2.6.1 Duct Smoke Detectors

Provide duct smoke detectors in HVAC ducts in accordance with NFPA 72 and NFPA 90A, except as indicated otherwise. Provide UL listed or FM approved detectors, designed specifically for duct installation.

Furnish detectors under Section 28 31 76 INTERIOR FIRE ALARM AND MASS NOTIFICATION SYSTEM and install under this section. Connect new detectors to the building fire alarm panel.

Provide photoelectric type detectors. Detectors shall detect both visible and invisible particles of combustion, and shall not be susceptible to undesired operation by changes to relative humidity. Provide each detector with an approved duct housing mounted exterior to the duct, and an integral perforated sampling tube extending across the width of the duct. The detector housing shall have indicator lamps that light when the detector is powered and when the detector is activated. Each detector shall have an integral test port remote keyed test device. Connect new detectors to the building's existing fire alarm control panel. Provide control and power modules required for the operation of the detectors in their own new control unit. A ground fault, break, or open condition in the electrical circuitry to any detector or its control or power unit shall cause activation of a trouble signal at the building fire alarm panel. Electrical supervision of wiring used exclusively for air-handling unit shutdown is not required, provided a break in the wiring would cause shutdown of the associated unit. Equipment and devices shall be compatible and operable in all respects with, and shall in no way impair the reliability or operational functions of, the existing fire alarm system. The building's existing fire alarm control panel was manufactured by Simplex. Provide descriptive zone labels at the existing fire alarm panel indicating which new air-handling unit detectors they serve and their location. Label zones modified in order to accomplish the work.

2.7 VARIABLE FREQUENCY (MOTOR) DRIVES

Provide variable frequency drives (VFDs) as indicated. VFDs shall convert 208 or 480 volt (plus or minus 10 percent), three phase, 60 hertz (plus or minus 2Hz), utility grade power to adjustable voltage/frequency, three phase, AC power for stepless motor control from 5 percent to 200 percent

of base speed. VFDs shall be UL listed as delivered to the end user. The VFD shall meet the requirements specified in NFPA 70. Each VFD shall also meet the following:

a. The VFD shall use sine coded Pulse Width Modulation (PWM) technology. PWM calculations shall be performed by the VFD microprocessor.

b. The VFD shall be capable of automatic control by a remote 0 to 10 VDC signal, by network command, or manually by the VFD control panel.

2.7.1 VFD Quality Assurance

VFDs shall be the manufacturer's current standard production unit with at least 10 identical units successfully operating in the field.

2.7.2 VFD Service Support

a. Warranty: Provide the VFDs with a minimum 24-month full parts and labor warranty. The warranty shall start when the contract's HVAC system is accepted by the Government. Include warranty documentation, dates, and contact information with the VFD on-site service manuals.

b. VFD Service Manuals: Provide the VFDs with all necessary installation, operation, maintenance, troubleshooting, service, and repair manuals in English including related factory technical bulletins. Provide the documents factory bound, in sturdy 3-ring binders, or hard bound covers. Provide a title sheet on the outside of each binder indicating the project title, project location, installing contractor, contract number, and the VFD manufacturer, address, and telephone number. Each binder shall include a table of contents and tabbed dividers, with all material neatly organized. The documentation provided shall be specifically applicable to this project, shall be annotated to reflect the actual project conditions, and shall provide a complete and concise depiction of the installed work. Provide a storage cabinet on or near the VFD large enough to hold all of the documentation. Have the cabinet's proposed installation site approved in advance by the Contracting Officer. Prominently label the cabinet "VFD OPERATION AND MAINTENANCE MANUALS." Clearly label each manual with the wording "MECHANICAL ROOM COPY - DO NOT REMOVE".

c. Technical Support: Provide the VFDs with manufacturer's technical telephone support in English, readily available during normal working hours, and free of charge for the life of the equipment.

d. Initial Start-Up: Provide the VFDs with factory-trained personnel for the on-site start-up of the HVAC equipment and associated VFD. The personnel shall be competent in the complete start-up, operation, and repair of the particular model VFD installed. The factory start-up representative shall perform the factory's complete recommended start-up procedures and check-out tests on the VFD. Include a copy of the VFD start-up test documentation with the VFD on-site service manuals.

e. Provide the VFDs with on-site/hands-on training for the user and maintenance personnel. Provide a capable and qualified instructor with minimum two years field experience with the operation and maintenance of similar VFDs. The training shall occur during normal working hours and last not less than 2 hours. Coordinate the training time with the

Contracting Officer and the end user. The VFD service manuals shall be used during the training. The contractor shall ensure the manuals are on-site before the start of training. The training shall cover all operational aspects of the VFD.

2.7.3 VFD Features

VFDs shall have the following features:

a. A local operator control keypad capable of:

(1) Remote/Local operator selection with password access.

(2) Run/Stop and manual speed commands.

(3) All programming functions.

(4) Scrolling through all display functions.

b. Digital display capable of indicating:

(1) VFD status.

(2) Frequency.

(3) Motor RPM.

(4) Phase current.

(5) Fault diagnostics in descriptive text.

(6) All programmed parameters.

(7) Load power.

c. Standard PI loop controller with input terminal for controlled variable and parameter settings.

d. User interface terminals for remote control of VFD speed, speed feedback, and an isolated form C SPDT relay, which energizes on a drive fault condition.

e. An isolated form C SPDT auxiliary relay which energizes on a run command.

f. A metal NEMA 1 enclosure for indoors, NEMA 4 with heater for outdoors.

g. An adjustable carrier frequency with 16 KHz minimum upper limit.

h. A built in DC buss reactor with 3 percent minimum impedance to protect the VFDs DC buss capacitors and rectifier section diodes.

i. HOA/Bypass Switches

2.7.4 Programmable Parameters

VFDs shall include the following operator programmable parameters:

a. Upper and lower limit frequency.

b. Acceleration and deceleration rate.

c. Variable torque volts per Hertz curve.

d. Starting voltage level.

e. Starting frequency level.

f. Display speed scaling.

g. Enable/disable auto-restart feature.

h. Enable/disable soft stall feature.

i. Motor overload level.

j. Motor stall level.

k. Jump frequency and hysteresis band.

l. PWM carrier frequency.

2.7.5 Protective Features

VFDs shall have the following protective features:

a. An electronic adjustable inverse time current limit with consideration for additional heating of the motor at frequencies below 45Hz, for the protection of the motor.

b. An electronic adjustable soft stall feature, allowing the VFD to lower the frequency to a point where the motor will not exceed the full-load amperage when an overload condition exists at the requested frequency. The VFD will automatically return to the requested frequency when load conditions permit.

c. A separate electronic stall at 110 percent VFD rated current, and a separate hardware trip at 190 percent current.

d. Ground fault protection that protects the output cables and motor from grounds during both starting and continuous running conditions.

e. The ability to restart after the following faults:

(1) Overcurrent (drive or motor).

(2) Power outage.

(3) Phase loss.

(4) Over voltage/Under voltage.

f. The ability shut down if inadvertently started into a rotating load without damaging the VFD or the motor.

g. The ability to keep a log of a minimum of four previous fault conditions, indicating the fault type and time of occurrence in descriptive text.

h. The ability to sustain 110 percent rated current for 60 seconds.

i. The ability to shutdown safely or protect against and record the following fault conditions:

(1) Over current (and an indication if the over current was during acceleration, deceleration, or running).

(2) Over current internal to the drive.

(3) Motor overload at start-up.

(4) Over voltage from utility power.

(5) Motor running overload.

(6) Over voltage during deceleration.

(7) VFD over heat.

(8) Load end ground fault.

(9) Abnormal parameters or data in VFD EEPROM.

2.7.6 Minimum Operating Conditions

VFDs shall be designed and constructed to operate within the following service conditions:

a. Ambient Temperature Range, 0 to 120 degrees F.

b. Non-condensing relative humidity to 90 percent.

2.7.7 Additional Features

Provide VFDs with the following additional features:

a. BACnet communication interface port.

PART 3 EXECUTION

3.1 INSTALLATION

Perform the installation under the supervision of competent technicians regularly employed in the installation of DDC systems. All material and equipment shall be installed in accordance with the manufacturer's recommendations for the intended purpose and NFPA 70. Maintain a copy of the manufacture's recommendations on the Construction Site. Use the more stringent methods when manufacturer's recommendations, and plans & specification requirements differ. Use the "Preferred" method when alternative methods are given. The word "should" will be considered to mean "shall". Bring any conflicts between manufacturer's recommendations and plans & specification requirements to the Government's attention. All equipment shall be installed level and plumb.

3.1.1 Demolition

Demolition requirements are specified in Section 23 09 00 INSTRUMENTATION

AND CONTROL FOR HVAC.

3.1.2 Wiring Criteria

Wiring criteria requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.3 Accessibility

Accessibility requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.4 Component Identification Labeling

Component identification labeling requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.5 Digital Controllers

a. Install as stand alone control devices (see definitions in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC).

b. Locate control cabinets at the locations shown on the drawings. If not shown on the drawings, install in the most accessible space, close to the controlled equipment.

c. Controllers must be installed in a manfacturer's required/recommended enclosure for each type of controller.

d. Provide a dedicated analog output to each output device, such as variable frequency driven pump motors, in an alternating arrangement.

e. Equipment such as VFD's must have hardwired enable (start/stop), speed command, and status points from the controller. Software points are not allowable. Additionally, this equipment shall have a BACnet interface for monitoring.

3.1.6 Hand-Off-Auto Switches

Hand-Off-Auto switches must be physical three position switches. Switches must be accessible from the exterior of any device. Wire safety controls such as smoke detectors, freeze protection thermostats,and emergency shut down switches to protect the equipment during both hand and auto operation.

3.1.7 Emergency Shut Down Switches (ATFP)

Quantity and location as shown on the drawings. Switches must be hardwired such that all fans and dampers that circulate air between rooms, or between inside and outside must shut down/close regardless of equipment HOA switch position and without the use of software. ATFP circuit must be energized to allow equipment to operate; i.e. activation of the emergency shut down switch will de-energize the circuit and open relays at the equipment. Additionally, activation of the switch must signal the DDC system to shut all air moving equipment off/closed and initiate an alarm. Reset of the DDC system must be manual.

3.1.8 Safety and Shutdown Circuit Monitoring

All safety or shutdown circuits, or any circuit that can disable a system,

shall be monitored by the DDC system as separate inputs for each circuit. This shall include, but is not limited to, Low Temperature Limit, Duct Mounted Smoke Detector, Discharge Air High Pressure Limit, Boiler Emergency Pushbutton, Carbon Monoxide, Gas Detection, ATFP, etc. Supervisory controller alarm reporting shall be configured for each individual circuit alarm.

3.1.9 Temperature Sensors

Install temperature sensors in locations that are accessible and provide a good representation of sensed media. Installations in dead spaces are not acceptable. Calibrate sensors according to manufacturer's instructions. Only use sensors in their intended application as described by the manufacturer's written instructions.

3.1.10 Room Temperature Sensors

Mount the sensors on interior walls to sense the average room temperature at the locations indicated. Avoid locations near heat sources such as copy machines or locations by supply air outlet drafts. Mount the center of the sensor 54 inches above the floor to meet ADA requirements.

3.1.11 Duct Temperature Sensors

a. Probe Type: Provide a gasket between the sensor housing and the duct wall. Seal the duct penetration air tight. Seal the duct insulation penetration vapor tight.

b. Averaging Type (and coil freeze protection thermostats): Weave the capillary tube sensing element in a serpentine fashion perpendicular to the flow, across the duct or air handler cross-section, using durable non-metal supports. Prevent contact between the capillary and the duct or air handler internals. Provide a duct access door at the sensor location. The access door shall be hinged on the side, factory insulated, have cam type locks, and be as large as the duct will permit, maximum 18 by 18 inches. For sensors inside air handlers, the sensors shall be fully accessible through the air handler's access doors without removing any of the air handler's internals.

3.1.12 Immersion Temperature Sensors

Provide thermowells for sensors measuring piping, tank, or pressure vessel temperatures. Locate wells to sense continuous flow conditions. Do not install wells using extension couplings. Where piping diameters are smaller than the length of the wells, provide wells in piping at elbows to sense flow across entire area of well. Wells shall not restrict flow area to less than 70 percent of pipe area. Increase piping size as required to avoid restriction. Provide thermal conductivity material within the well to fully coat the inserted sensor.

3.1.13 Outside Air Temperature & Humidity Sensors

Provide outside air temperature and humidity sensors in weatherproof enclosures on the north side of the building, away from exhaust hoods and other areas that may affect the reading. Provide a shield to shade the sensor from direct sunlight.

3.1.14 Energy Meters

Provide and locate energy meters as indicated. Connect each meter output to the DDC system, to measure both instantaneous and accumulated usage.

3.1.15 Damper Actuators

Mount actuators outside the air stream in accessible areas.

3.1.16 Pressure Sensors

Locate pressure sensors as indicated.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 09 23.02

BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS
02/25 MCBCL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 135	(2020; Interpretation 1-8 2021; Errata 1-2 2021; Addenda CD 2021; Addenda BY-CE 2022; Interpretation 9-10 2022) BACnet—A Data Communication Protocol for Building Automation and Control Networks

UNDERWRITERS LABORATORIES (UL)

UL 916	(2015; Reprint Oct 2021) UL Standard for Safety Energy Management Equipment

1.2 DEFINITIONS

For definitions related to this section, see Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

1.3 SUBMITTALS

Submit detailed and annotated manufacturer's data, drawings, and specification sheets for each item listed, that clearly show compliance with the project specifications.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Direct Digital Controllers; G

Bacnet Gateways; G

Notebook Computer; G

Notebook Computer Software; G

Bacnet Operator Workstation; G

1.4 QUALITY CONTROL

Quality Control requirements are specified in Section 23 09 00

INSTRUMENTATION AND CONTROL FOR HVAC.

PART 2 PRODUCTS

All products used to meet this specification must meet the indicated requirements, but not all products specified here will be required by every project. All products must meet the requirements both Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and this Section.

2.1 DDC SYSTEM

2.1.1 Supervisory Building Controller (SBC)

ASHRAE 135 building controller that is the main interface for the building control system. Provide a JACE based on the Niagara N4 platform. The JACE (JAVA Application Control Engine) shall be minimally based on a Tridium 8000 with expanded memory and embedded "Niagara Workbench or Workplace" software. The latest software revision available at the time the PVT Report is submitted must be installed.

Any device implementing the Niagara Framework is a Niagara Framework Supervisory Gateway and must meet these requirements. In addition to the general requirements for all DDC Hardware, Niagara Framework Supervisory Gateway Hardware must:

a. Be direct digital control hardware.

b. Have an unrestricted interoperability license and its Niagara Compatibility Statement (NiCS) must follow the Tridium Open NiCS Specification.

c. Manage communications between a field control network and the Niagara Framework Monitoring and Control Software, and between itself and other Niagara Framework Supervisory Gateways. Niagara Framework Supervisory Gateway Hardware must use Fox protocol for communication with other Niagara Framework Components, regardless of the manufacturer of the other components.

d. Be fully programmable using the Niagara Framework Engineering Tool and must support the following:

(1) Time synchronization, Calendar, and Scheduling using Niagara Scheduling Objects.

(2) Alarm generation and routing using the Niagara Alarm Service.

(3) Trending using the Niagara History Service and Niagara Trend Log Objects.

(4) Integration of field control networks using the Niagara Framework Engineering Tool.

(5) Configuration of integrated field control system using the Niagara Framework Engineering Tool when supported by the field control system.

e. Meet the following minimum hardware requirements:

(1) Two 10/100/1000 Mbps Ethernet Port(s)

(2) One or more MS/TP ports.

(3) Central Processing Unit of 1000 Mhz or higher.

(4) Embedded operating system.

f. Provide access to field control network data and supervisory functions via web interface and support a minimum of 16 simultaneous users. Note: implementation of this capability may not be required on all projects.

g. Submit a backup of each Niagara Framework Supervisory Gateway. The backup must be sufficient to restore a Niagara Framework Supervisory Gateway to the final as-built condition such that a new Niagara Framework Supervisory Gateway loaded with the backup is indistinguishable in functionality from the original.

2.1.1.1 Niagara Framework Engineering Tool

The Niagara Framework Engineering Tool must be Niagara Workbench or an equivalent Niagara Framework engineering tool software and must:

a. Have an unrestricted interoperability license and its Niagara Compatibility Statement (NiCS) must follow the Tridium Open NiCS Specification.

b. Be capable of performing network configuration for Niagara Framework Supervisory Gateways and Niagara Framework Monitoring and Control Software.

c. Be capable of programming and configuring of Niagara Framework Supervisory Gateways and Niagara Framework Monitoring and Control Software.

d. Be capable of discovery of Niagara Framework Supervisory Gateways and all points mapped into each Niagara Framework Supervisory Gateway and making these points accessible to Niagara Framework Monitoring and Control Software.

2.1.1.2 Supervisory Controller MCEN Network Homerun

See Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC paragraph Network Communication Lines for requirements.

2.1.2 EMCS Interface

The EMCS at Camp Lejeune is comprised of two separate systems. Both of the systems communicate over the basewide Marine Corps Enterprise Network (MCEN). One uses the Johnson Controls Network Automation Engine (NAE), Network Control Engine (NCE), Supervisory Network Engine (SNE) or Supervisory Network Control Engine (SNC) to the ADX server. The second system uses a Niagara FX N4 web supervisor with a JACE in the building communicating using Fox protocol. Because of IT security and permissions, only these systems and equipment are permitted as part of the EMCS.

2.1.2.1 Supervisory Building Controller

Provide a JACE. This will serve as both the Supervisory Building Controller and the connection point between the buildings DDC and the EMCS. Provide a five year service license on all Supervisory Controllers. Provide a reserve of 10% of additional points and additional devices on the Supervisory Controller license at the final project acceptance.

The contractor shall assign the BAS Owner as the owner and manager of all licenses including 3rd party drivers.

2.1.2.2 Palo Alto Firewall

For any building provided with a new Supervisory controller, contractor shall also provide a Palo Alto Firewall Model PAN-PA-220R. Contractor shall also provide a five year government support option for the Palo Alto firewall complete with all licenses.

2.1.3 Direct Digital Controllers

a. Direct digital controllers shall be UL 916 rated.

b. Field Controllers:

(1) Acceptable DDC field controllers are Facility Explorer, Metasys or Distech.

c. Except for VAV's, all direct digital controllerss shall have an on board password protected display screen pre-programmed with the device's associated points. Display screens shall only be accessible after opening an enclosure door. Display screens that are accessible from an enclosure exterior are not permitted.

d. Include BACnet PICS for each controller/device type, including smart sensors (B-SS) and smart actuators (B-SA).

2.1.3.1 I/O Point Limitation

The total number of I/O hardware points used by a single stand-alone digital controller, including I/O expansion units, shall not exceed 64, except for complex individual equipment or systems. Place I/O expansion units in the same cabinet as the digital controller. The field controller must have one spare Configurable Output and one spare Universal Input available per system upon project completion, i.e. AHU, ERU, DOAS, HW System, CHW System and other building primary systems. VAV controllers and programmable thermostats are excluded.

2.1.3.2 Environmental Limits

Controllers shall be suitable for, or placed in protective enclosures suitable for the environment (temperature, humidity, dust, and vibration) where they are located.

2.1.3.3 Stand-Alone Controllers

Provide stand-alone direct digital controllers with internal time clocks if not connected to a Supervisory Building Controller. Each piece of equipment shall be controlled by a single controller to provide stand-alone control in the event of any building communication failure.

All I/O points specified for a piece of equipment shall be integral to its controller and serial connected expansion modules. Provide stable and reliable stand-alone control using default values or other method for values normally read over the network.

2.1.3.4 Internal Clock

Provide internal clocks and scheduling for all Direct Digital Controllers. Provide controllers with BTL listed profiles for all BACnet Building Controllers (B-BC) and BACnet Advanced Application Controllers (B-AAC) using BACnet time synchronization services. This includes but is not limited to VAV Controllers, Fan Coil controllers, Heat Pump controllers and any terminal controllers. BACnet Application specific controllers (B-ASC) will only be accepted for dedicated small exhaust system control such as restroom and mechanical room exhaust fans. Automatically synchronize system clocks daily from an operator-designated controller. The system shall automatically adjust for daylight saving time.

2.1.3.5 Memory

Provide sufficient memory for each controller to support the required control, communication, trends, alarms, and messages. Protect programs residing in memory with EEPROM, flash memory, or by an uninterruptible power source (battery or uninterruptible power supply). The backup power source shall have capacity to maintain the memory during a 72-hour continuous power outage. Rechargeable power sources shall be constantly charged while the controller is operating under normal line power. Batteries shall be replaceable without soldering. Trend and alarm history collected during normal operation shall not be lost during power outages less than 72 hours long.

2.1.3.6 Immunity to Power Fluctuations

Controllers shall operate at 90 percent to 110 percent nominal voltage rating.

2.1.3.7 Transformer

The controller power supply shall be fused or current limiting and rated at 125 percent power consumption. Each transformer must singularly serve the connected load, i.e. do not wire transfomers in parallel on the load side. Transformer shall be mounted in the upper portion of the control panel to
aid in heat dissipation. The 120 volt power feed must also enter in the upper portion of the cabinet - power shall not be brought in from the bottom of the panel.

2.1.3.8 Wiring Terminations

Use screw terminal wiring terminations for all field-installed controllers. Provide field-removable modular terminal strip or a termination card connected by a ribbon cable for all controllers other than terminal units.

2.1.3.9 Input and Output Interface

Provide hard-wired input and output interface for all controllers as follows:

a. Protection: Shorting an input or output point to itself, to another point, or to ground shall cause no controller damage. Input or output point contact with sources up to 24 volts AC or DC for any duration shall cause no controller damage.

b. Binary Inputs: Binary inputs shall monitor on and off contacts from a "dry" remote device without external power, and external 5-24 VDC voltage inputs.

c. Pulse Accumulation Inputs: Pulse accumulation inputs shall conform to binary input requirements and accumulate pulses at a resolution suitable to the application.

d. Analog Inputs: Analog inputs shall monitor low-voltage (0-10 VDC), current (4-20 mA), or resistance (thermistor or RTD) signals.

e. Binary Outputs: Binary outputs shall send a pulsed 24 VDC low-voltage signal for modulation control, or provide a maintained open-closed position for on-off control. Where appropriate, provide a method to select normally open or normally closed operation.

f. Analog Outputs: Analog outputs shall send modulating 0-10 VDC or 4-20 mA signals to control output devices.

g. Tri-State Outputs: Tri-State outputs shall provide three-point floating control of terminal unit electronic actuators.

2.1.3.10 Digital Controller BACnet Internetwork

Provide intermediate gateways, only when requested by the Government and shown on the contract drawings, to connect existing non-BACnet devices to the BACnet internetwork. Controller and operator interface communication shall conform to ASHRAE 135, BACnet. If a controller becomes non-responsive, the remaining controllers shall continue operating and not be affected by the failed controller.

2.1.3.11 Communications Ports

a. Direct-Connect Interface Ports: Provide at least one extra communication port at each local BACnet network for direct connecting a notebook computer or BACnet hand-held terminal so all network BACnet objects and properties may be viewed and edited by the operator.

2.1.3.12 BACnet Gateways

Provide BACnet communication ports, whenever available as a plant equipment OEM standard option, for DDC integration via a single communication cable. Typical BACnet controlled plant equipment includes, but is not limited to, boilers, chillers, and variable frequency motor drives. Include the following information in the submittal:

a. BACnet and workstation display information

b. Bi-directional communication ability

c. Compliance with interoperability schedule

d. Expansion capacity

e. Handling of alarms, events, scheduling and trend data

f. Single device capability (not depending on multiple devices for exchanging information from either side of the gateway)

Provide gateways to connect BACnet to legacy systems, existing non-BACnet devices, and existing non-BACnet DDC controlled plant equipment, only when specifically requested and approved by the Government, and shown on the Government approved BACnet Communication Architecture Schematic. Provide with each gateway an interoperability schedule, showing each point or event on the legacy side that the BACnet "client" will read, and each parameter that the BACnet network will write to. Describe this interoperability in terms of BACnet services, or Interoperability Building Blocks (BIBBS), defined in ASHRAE 135 Annex K. Provide two-year minimum warranty for each gateway, including parts and labor.

The following minimum capabilities are required:

a. Gateways shall be able to read and view all readable object properties listed in the interoperability schedule on the non-BACnet network to the BACnet network and vice versa where applicable.

b. Gateways shall be able to write to all writeable object properties listed in the interoperability schedule on the non-BACnet network from the BACnet network and vice versa where applicable.

c. Gateways shall provide single-pass (only one protocol to BACnet without intermediary protocols) translation from the non-BACnet protocol to BACnet and vice versa.

d. Gateways shall meet the requirements of Data Sharing Read Property (DS-RP-B), Data Sharing Write Property (DS-WP-B), Device Management Dynamic Device Binding-B (DM-DDB-B), and Device Management Communication Control (DM-DCC-B) BIBBs, in accordance with ASHRAE 135.

e. Gateways shall include all hardware, software, software licenses, and configuration tools for operator-to-gateway communications. Provide backup programming and parameters on CD media and the ability to modify, download, backup, and restore gateway configuration.

2.1.3.13 Digital Controller Cabinet

Provide each digital controller including gateways, in a factory fabricated locked cabinet enclosure. Lock shall accept CAT102 keys.

Cabinets located indoors shall protect against dust and have a minimum NEMA 1 rating, except where indicated otherwise. Cabinets located outdoors or in damp environments shall protect against all outdoor conditions and have a minimum NEMA 4 rating. Mechanical rooms that contain steam service or equipment including new steam boiler rooms are considered damp environments. Outdoor control panels and controllers must be able to withstand extreme ambient conditions, without malfunction or failure, whether or not the controlled equipment is running. If necessary, provide a thermostatically controlled panel heater in freezing locations, and an internal ventilating fan in locations exposed to direct sunlight. Cabinets shall have a hinged lockable door and an offset removable metal back plate, except controllers integral with terminal units, like those mounted on VAV boxes. Provide like-keyed locks for all hinged panels provided and a set of two keys at each panel, with one key inserted in the lock. All

devices must be mounted only to the cabinet backplane with adequate space allowed for serviceability and proper heat dissipation from devices. The Supervisory controller cabinet door position (closed/open) shall be monitored with a door switch and BACnet programmable relay such as the Functional Devices RIBTW2401B-BC. An "open" door status shall initiate an alarm to the EMCS Server.

2.1.3.14 Main Power Switch and Receptacle

Provide each control cabinet with a main external power on/off switch located inside the cabinet. Also, provide each cabinet with a separate 120 VAC duplex convenience receptacle.

2.1.4 DDC Software

2.1.4.1 Programming

Provide programming to execute the sequence of operation indicated. Provide all programming, tools, interfaces, cables, etc. to configure and program all controllers. All software shall be licensed to Marine Corps Base, Camp Lejeune Complex for unrestricted use on Camp Lejeune Complex and reproduction for use on Camp Lejeune Complex. Software keys and "dongles" are not permitted. Provide programming routines in simple, easy-to-follow logic with detailed text comments describing what the logic does and how it corresponds to the project's written sequence of operation. All logic programming and control functions shall be closed loop, command and feedback for fault detection and alarming when status does not match the command.

a. Graphic-based programming shall use a library of function blocks made from pre-programmed code designed for BAS control. Function blocks shall be assembled with interconnecting lines, depicting the control sequence in a flowchart. If providing a computer with device programming tools as part of the project, graphic programs shall be viewable in real time showing present values and logical results from each function block.

b. Menu-based programming shall be done by entering parameters, definitions, conditions, requirements, and constraints.

c. For line-by-line and text-based programming, declare variable types (variable types include but are not limited to the following: local, global, real, and integer) at the beginning of the program. Use descriptive comments frequently to describe the programming.

d. If providing a computer with device programming tools as part of the project, provide a means for detecting program errors and testing software strategies with a simulation tool. Simulation may be inherent within the programming software suite, or provided by physical controllers mounted in a NEMA 1 test enclosure. The test enclosure shall contain one dedicated controller of each type provided under this contract, complete with power supply and relevant accessories.

2.1.4.2 Parameter Modification

All writeable object properties, and all other programming parameters needed to comply with the project specification shall be adjustable for devices at any network level, including those accessible with web-browser communication, and regardless of programming methods used to create the

applications.

2.1.4.3 Short Cycling Prevention

Provide setpoint differentials and minimum on/off times to prevent equipment short cycling.

2.1.4.4 Equipment Status Delay

Provide an adjustable delay from when equipment is commanded on or off and when the control program looks to the status input for confirmation.

2.1.4.5 Run Time Accumulation

Use the Elapsed Time Property to provide re-settable run time accumulation for each Binary Output Object connected to mechanical loads greater than 1 HP, electrical loads greater than 10 KW, or wherever else specified.

2.1.4.6 Timed Local Override

Provide an adjustable override time for each push of a timed local override button.

2.1.4.7 Time Synchronization

Provide time synchronization, including adjustments for leap years, daylight saving time, and operator time adjustments.

2.1.4.8 Scheduling

Provide operating schedules as indicated, with equipment assigned to groups. Changing the schedule of a group shall change the operating schedule of all equipment in the group. Groups shall be capable of operator creation, modification, and deletion. Provide capability to view and modify schedules in a seven-day week format. Provide capability to enter holiday and override schedules one full year at a time.

2.1.4.9 Object Property Override

Allow writeable object property values to accept overrides to any valid value. Where specified or required for the sequence of control, the Out-Of-Service property of Objects shall be modifiable using BACnet's write property service. When documented, exceptions to these requirement are allowed for life, machine, and process safeties.

2.1.4.10 Alarms and Events

Alarms and events shall be capable of having programmed time delays and high-low limits. When a web server is connected to the BACnet internetwork, alarms/events shall report to web server as defined by an authorized operator. Otherwise alarms/events shall be stored within a device on the BACnet network until connected to a user interface device and retrieved. Provide alarms/events in agreement with the point schedule, sequence of operation, and the BAS Owner. At a minimum, provide programming to initiate alarms/events any time a piece of equipment fails to operate, a control point is outside normal range or condition shown on schedules, communication to a device is lost, a device has failed, or a controller has lost its memory.

2.1.4.11 Trending

Provide BACnet trending all object present values, set points, and other parameters indicated for trending on project schedules or at the request of Camp Lejeune or commissioning agents. Trends may be associated into groups, and a trend report may be set up for each group. Trends are stored within a device on the BACnet network, with operator selectable trend intervals from 10 seconds up to 24 hours. The minimum number of consecutive trend values stored at one time shall be 100 per variable. When trend memory is full, the most recent data shall overwrite the oldest data.

The BACnet system shall allow for Change-Of-Value (COV) subscription based trending at user defined thresholds.

The B-BC shall upload trends automatically upon reaching 3/4 of the device buffer limit (via Notification_Threshold property), by operator request, or by time schedule for archiving. Archived and real-time trend data shall be available for viewing numerically and graphically for at the workstation and connected notebook computers.

Additionally, provide daily trend on geothermal well field supply and return temperatures. Allocate sufficient memory to store 24 months data.

2.1.4.12 Device Diagnostics

Each controller shall have diagnostic LEDs for power, communication, and device fault condition. The DDC system shall recognize and report a non-responsive controller.

2.1.4.13 Power Loss

Upon restoration of power, the DDC system shall perform an orderly restart and restoration of control.

2.1.5 Notebook Computer

Provide a notebook computer for each building, complete with the project's installed DDC software, applications database, final archived field controller programs and Supervisory controller database, and graphics to fully troubleshoot and program the project's devices. Provide the notebook computer with aballistic nylon carrying case with shoulder strap, or backpack,and all necessary cables and interface hardware needed for setup and direct communication with the controllers and control system components. Direct communication shall not be through the Supervisory controller.

At a minimum the notebook computer shall include: Common Access Card Reader, Windows based operating system, minimum 2.7 GHz processor base speed with 3 MB Cache, discrete switchable graphics card with minimum 1 GB dedicated memory, 1 Terabyte hard drive, 32 GB DDR3 RAM, 2 USB 3.0 ports, 10/100/1000 network interface card, 802.11 b/g/n WLAN, 17-inch display, keyboard with numeric keypad, 6-hour battery with charger, internal or external 8X DVD+/-R/RW drive with double layer support with DVD creator software, and Microsoft Office Home and Business bundled software. Provide all original licenses, installation media, documentation, and recovery CDs capable of restoring the original configuration. Provide a means to connect the notebook computer directly to the installed field bus. Provide the manufacturer's 3-year accidental damage protection with

3-day on site response for 2 year warranty with the Government listed as the warranty owner.

When submitting the notebook computer, provide itemized list indicating the following information for all components submitted with the notebook computer:

a. Description

b. Quantity

c. Manufacturer

d. Part Number

e. Serial Number

2.1.6 Notebook Computer Software

2.1.6.1 Password Protection

System shall support role based access. At a minimum, OS administrator, auditor, DDC operator and user roles must be defined. The system must be capable of enforcing role based access by location (e.g., Bob may alter operating parameters for Building 1 but not Building 2. Building 2 is Alice's responsibility).

Workstation shall be capable of DoD Common Access Card (CAC) login in addition to traditional username and password.

The lowest level only allow viewing graphics. The second level allows viewing graphics and changing space temperature setpoints. The third level allows the previous level's capability, plus changing operating schedules. The fourth level allows access to all functions except passwords. The highest level provides all administrator rights and allows full access to all programming, including setting new passwords and access levels. Provide the BAS Owner with the highest level password access. Provide automatic log out if no keyboard or mouse activity is detected after a user-defined time delay.

2.1.6.2 Notebook Computer DDC Software

Provide the workstation software with the manufacturer's installation CDs and licenses. Configure the software according to the DDC system manufacturer's specifications, cybersecurity requirements, and in agreement with BACnet Operator Workstation (B-OWS) device standards found in ASHRAE 135, Annex L. Include BACnet PICS for Operator Workstation software.

The workstation software shall permit complete monitoring, modification, archiving, programming and troubleshooting interface with the DDC system including supervisory controller and field controllers. Software shall include, but not limited to, Niagara Workplace, FX Workbench, JCI SCT, CCT/PCT, Distech EC-gfx or any controls manufacturer Supervisory controller and field controller programming software used to program the system. The operator interface with the software shall be menu-driven with appropriate displays and menu commands to manipulate the DDC system's objects, point data, operating schedules, control routines, system configuration, trends, alarms, messages, graphics, and reports. Trends

shall be capable of graphic display in real time, with variables plotted as functions of time. Each alarmed point shall be capable of displaying its alarm history, showing when it went into alarm, if and when it was acknowledged, and when it went out of alarm. The modification of DDC system parameters and object properties shall be accomplished with "fill in the blank" and/or "point and drag" methods. Modifications shall download to the appropriate controllers at the operator's request.

2.1.6.3 Web-Based User Interface (UI) and Graphics

Provide web-based graphics fully compatible with Internet Explorer 9+, Safari, Firefox, and Google Chrome. Web-based user interface shall be browser agnostic and shall not rely on proprietary client side scripting to function.

Graphic displays shall have full-screen resolution when viewed on the workstation and notebook computers. Dynamic data on graphics pages shall refresh within 10 seconds using an Internet connection, or 30 seconds using a dial-up modem connection. Web-based user interface shall not rely on additional third-party browser "plug-in" software like Adobe Flash. Java client side applets may be used if appropriately signed. If Java client side runtimes are used they shall not require deprecated or otherwise unsupported Java runtime environments.

The graphics shall show the present value and object name for each of the project's I/O points on at least one graphic page. Arrange point values and names on the graphic displays in their appropriate physical locations with respect to the floor plan or equipment graphic displayed. Graphics shall allow the operator to monitor current status, view zone and equipment summaries, use point-and-click navigation between graphic pages, and edit setpoints and parameters directly from the screens. Items in alarm shall be displayed using a different color or other obvious visual indicator.
Provide graphics with the following:

a. Graphic Types: Provide at least one graphic display for each piece of HVAC equipment, building floor, and controlled zone. Indicate dynamic point values, operating statuses, alarm conditions, and control setpoints on each display. Provide summary pages where appropriate.

   (1) Building Elevation: For buildings more than one story, provide an elevation view of the building with links to each of the building's floor plans. Simulate the building's architecture and include the building number and floor numbers. If possible, use an actual photograph of the building.

   (2) Building Floor Plans: Provide a floor plan graphic for each of the building's floors and roof with dynamic display of space temperature and other important data. If used, indicate and provide links to sub-plan areas. If possible, use the project's electronic drawing files for the graphic backgrounds. Provide clear names for important areas, such as "Main Conference Room." Include room names and numbers where applicable. Include features such as stairwells, elevators, and main entrances. Where applicable, include the mechanical room, HVAC equipment, and control component locations, with corresponding links to the equipment graphics.

   (3) Sub-plan Areas: Where a building's floor plan is too large to

adequately display on the screen, sub-divide the plan into distinct areas, and provide a separate graphic display for each area. Provide same level of detail requested in building floor plan section above.

(4) HVAC Equipment: Provide a graphic display for each piece of HVAC equipment, such as a fan coil unit, VAV terminal, or air handling unit. Equipment shall be represented by a two or three-dimensional drawing. Where multiple pieces of equipment combine to form a system, such as a central chiller plant or central heating plant, provide one graphic to depict the entire plant. Indicate the equipment, piping, ductwork, dampers, and control valves in the installed location. Include labels for equipment, piping, ductwork, dampers, and control valves. Show the direction of air and water flow. Include dynamic display of applicable object data with clear names in appropriate locations.

(5) Sequence of Operation: Provide a graphic screen displaying the written out full sequence of operation for each piece of HVAC equipment. Provide a link to the sequence of operation displays on their respective equipment graphics. Include dynamic real-time data within the text for setpoints and variables.

b. Graphic Title: Provide a prominent, descriptive title on each graphic page.

c. Dynamic Update: When the workstation is on-line, all graphic I/O object values shall update with change-of-value services, or by operator selected discrete intervals.

d. Graphic Linking: Provide forward and backward linking between floor plans, sub-plans, and equipment.

e. Graphic Editing: Provide installed software to create, modify, and delete the DDC graphics. Include the ability to store graphic symbols in a symbol directory and import these symbols into the graphics.

f. Dynamic Point Editing: Provide full editing capability for deleting, adding, and modifying dynamic points on the graphics.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Demolition

Demolition requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.2 BACnet Naming and Addressing

Coordinate with the BAS Owner and provide unique naming and addressing consistent with existing buildings already loaded on the EMCS server. All DDC controllers shall have a Camp Lejeune unique instance number and all Supervisory Building Controllers shall have a Camp Lejeune unique name. Names are managed by the Government.

3.1.2.1 MAC Address

Every BACnet device shall have an assigned and documented MAC Address unique to its network. For Ethernet networks, document the MAC Address assigned at its creation. For MS/TP networks, assign addresses from 0-127. Do not use the controls manufacturer reserved addresses for field controllers. This is typically 0-3. Also the BACnet Instance ID for MAC Address 127, Trunk 1, is reserved for the Supervisory controller. Supervisory Controller Global ID and instance numbers are to be obtained from the BAS Owner to ensure duplicates do not occur.

For MS/TP, assign from 01 to 127 unless reserved by the manufacturer. Correlate address with the provided instance number range starting with the lowest number. If there are reserved addresses, do not use the instance number that correlates to those addresses.

Example: Assigned Global ID is 600. If the first trunk address is 04, the instance number will be 158348. If the first trunk address is 05, the instance number will be 158349. If the manufacturer has reserved addresses 01-03, addresses 01-03 and instance numbers 158345-158347 shall not be used.

3.1.2.2 Network Numbering

Assign unique numbers to each new network installed on the BACnet internetwork. Provide ability for changing the network number; either by device switches, network computer, or field operator interface. The BACnet internetwork (all possible connected networks) can contain up to 65,534 possible unique networks.

3.1.2.3 Device Object Identifier Property Number

Assign unique Device "Object_Identifier" property numbers or device instances for each device on the BACnet internetwork. Provide for future modification of the device instance number; either by device switches, network computer, or field interface. Instance numbers must be field assignable. BACnet allows up to 4,194,302 possible unique devices per internetwork.

3.1.2.4 Device Object Name Property Text

Each object on the Camp Lejeune EMCS has a unique point name, which is made up of the object or short name stored in the controller and the equipment identifier, which is stored in the supervisory building controller (SBC). The long point name combines this object name with the name stored in the SBC that describes the controller or location of the object. The device object name property field shall support 32 minimum printable characters. The point name follows the general convention:

Building.Equipment.Object Name

Example: HP512.AHU-3.DA-T. See Attachments one through three for equipment names, object names, object groupings, and area names.

3.1.2.5 Object Name Property Text (Other than Device Objects)

The object name identifies the specific point. Only object names on the approved Camp Lejeune list shall be used. From the example above, the point name is: "DA-T". See Attachment for the approved Camp Lejeune list.

If object name is not in the approved list, then contractor shall send a Request For Information (RFI) to their COTR. The object name property field shall support 32 minimum printable characters.

3.1.2.6 Object Description

The controller shall also store an alpha numeric description of the object name. The controller shall support a minimum of 30 printable characters. From the example above the object description is: "Discharge Air Temperature". Both short names and long names shall be populated in the database.

3.1.2.7 List of Attachments

Attachment 1 - Not Used

Attachment 2 - Object Names

Attachment 3 - NOT USED

Attachment 4 - Niagara BAS Alarms Policy

Attachment 5 - Trend (History)

3.1.3 Minimum BACnet Object Requirements

a. Use of Standard BACnet Objects in accordance with existing Camp Lejeune Standards: For the following points and parameters, use standard BACnet objects, where all relevant object properties can be read using BACnet's Read Property Service, and all relevant object properties can be modified using BACnet's Write Property Service:

(1) All device physical inputs

(2) All device physical outputs

(3) All set points

(4) All PID tuning parameters

(5) All calculated pressures, flow rates, and consumption values

(6) All alarms

(7) All trends

(8) All schedules

(9) All equipment and lighting circuit operating status

b. BACnet Object Description Property: The Object Description property shall support 32 minimum printable characters. For each object, complete the description property field using a brief, narrative, plain English description specific to the object and project application. For example: "HW Pump 1 Proof." Document compliance, length restrictions, and whether the description is writeable in the device PICS.

c. Analog Input, Output, and Value Objects: Support and provide

Description and Device_Type text strings matching signal type and engineering units shown on the points list.

d. Binary Input, Output, and Value Objects: Support and provide Inactive_Text and Active_Text property descriptions matching conditions shown on the points list.

e. Calendar Object: For devices with scheduling capability, provide at least one Calendar Object with ten-entry capacity that incorporates Federal Holidays. All operators may view Calendar Objects; authorized operators may make modifications from a workstation. Enable the writeable Date List property and support all calendar entry data types.

f. Schedule Object: Use Schedule Objects for all building system scheduling. All operators may view schedule entries; authorized operators may modify schedules from a workstation.

g. Loop Object or Equal: Use Loop Objects or equivalent BACnet objects in each applicable field device for PID control. Regardless of program method or object used, allow authorized operators to adjust the Update Interval, Setpoint, Proportional Constant, Integral Constant, and Derivative Constant using BACnet read/write services.

h. Setpoints: All setpoints must be BACnet exposed for auto discovery purposes if needed.

3.1.4 Minimum BACnet Service Requirements

a. Command Priorities

(1) Use commandable BACnet objects to control machinery and systems, providing the priority levels listed below. If the sequence of operation requires a different priority, obtain approval from the Contracting Officer.

Priority Level	Application
1	Manual-Life Safety
2	Automatic-Life Safety
3	(User Defined)
4	(User Defined)
5	Critical Equipment Control
6	Minimum On/Off
7	(User Defined)
8	Manual Operator
9	(User Defined)
10	(User Defined)
11	Load Shedding

Priority Level	Application
12	(User Defined)
13	(User Defined)
14	(User Defined)
15	(User Defined)
16	(User Defined)

b. Alarming

(1) Alarm Priorities: Coordinate alarm and event notification with the BAS Owner.

(2) Notification Class: Enable writeable Priority, Ack Required, and Recipient List properties of Notification Class objects.

(3) Event Notification Message Texts: Use condition specific narrative text and numerical references for alarm and event notification.

c. Updating Displayed Property Values

(1) Allow workstations to display property values at discrete polled intervals, or based on receipt of confirmed and unconfirmed Change of Value notifications. The COV increment shall be adjustable by an operator using BACnet services, and polled intervals shall be adjustable at the operator workstation.

3.1.5 Local Area Networks

Connection of new networks with existing networks will be done by the BAS Owner. Network numbers and device instance numbers shall remain unique when joining networks. Do not change existing network addressing without Government approval. See also "BACnet Naming and Addressing".

3.1.6 BACnet Routers and Protocol Gateways

Provide the quantity of BACnet routers necessary for communications shown on the BACnet Communication Architecture schematic. Provide BACnet routers with BACnet Broadcast Message Device (BBMD) capability on each BACnet internetwork communicating across an IP network. Configure BBMD tables to enable unicast forwarding of broadcast messaging across Layer-3 IP subnets.

3.1.7 Plant Controllers

Equipment such as VFD's, chillers, and boilers shall have hardwired enable(start/stop), and status points from the plant controller, VFD's shall also have a hardwired speed command. Additionally, this equipment shall have a BACnet interface for monitoring.

3.1.8 Digital Controllers

a. Install as stand alone control devices (see definitions in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC).

b. Locate control cabinets at the locations shown on the drawings. If not shown on the drawings, install in the most accessible space, close to the controlled equipment.

c. Controllers must be installed in a manfacturer's required/recommended enclosure for each type of controller.

d. Provide a dedicated analog output to each output device, such as variable frequency driven pump motors in an alternating arrangement.

e. Equipment such as VFD's must have hardwired enable (start/stop), speed command and status points from the controller. Software points are not allowable. Additionally, this equipment shall have a BACnet interface for monitoring.

3.1.9 Wiring Criteria

Wiring criteria requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.10 Accessibility

Accessibility requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.11 Component Identification Labeling

Component identification labeling requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

-- End of Section --

SECTION 23 21 13.00 20

LOW TEMPERATURE WATER (LTW) HEATING SYSTEM
04/06, CHG 2: 11/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B1.1	(2003; R 2018) Unified Inch Screw Threads (UN and UNR Thread Form)
ASME B1.20.1	(2013; R 2018) Pipe Threads, General Purpose (Inch)
ASME B16.1	(2020) Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250
ASME B16.5	(2020) Pipe Flanges and Flanged Fittings NPS 1/2 Through NPS 24 Metric/Inch Standard
ASME B16.9	(2018) Factory-Made Wrought Buttwelding Fittings
ASME B16.18	(2021) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.21	(2021) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.24	(2022) Cast Copper Alloy Pipe Flanges, Flanged Fittings, and Valves Classes 150, 300, 600, 900, 1500, and 2500
ASME B16.34	(2021) Valves - Flanged, Threaded and Welding End
ASME B16.36	(2020) Orifice Flanges
ASME B16.39	(2020) Standard for Malleable Iron Threaded Pipe Unions; Classes 150, 250, and 300
ASME B18.2.2	(2022) Nuts for General Applications: Machine Screw Nuts, and Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)
ASME B31.9	(2020) Building Services Piping

ASME B40.100	(2022) Pressure Gauges and Gauge Attachments
ASME BPVC SEC VIII D1	(2023) BPVC Section VIII-Rules for Construction of Pressure Vessels Division 1

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1003	(2020) Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems - (ANSI approved 2010)
ASSE 1017	(2023) Performance Requirements for Temperature Actuated Mixing Valves for Hot Water Distribution Systems - (ANSI approved 2010)

AMERICAN WELDING SOCIETY (AWS)

AWS Z49.1	(2021) Safety in Welding, Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A194/A194M	(2024) Standard Specification for Carbon Steel, Alloy Steel, and Stainless Steel Nuts for Bolts for High-Pressure or High-Temperature Service, or Both
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B88	(2022) Standard Specification for Seamless Copper Water Tube
ASTM D2308	(2007; R 2013) Standard Specification for Thermoplastic Polyethylene Jacket for Electrical Wire and Cable
ASTM F1007	(2018) Standard Specification for Pipeline Expansion Joints of the Packed Slip Type for Marine Application
ASTM F1120	(1987; R 2019) Standard Specification for Circular Metallic Bellows Type Expansion Joints for Piping Applications

ASTM F1199	(2021) Standard Specification for Cast (All Temperatures and Pressures) and Welded Pipe Line Strainers (150 psig and 150 degrees F Maximum)

COPPER DEVELOPMENT ASSOCIATION (CDA)

CDA A4015	(2016; 14/17) Copper Tube Handbook

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 515	(2017) Standard for the Testing, Design, Installation, and Maintenance of Electrical Resistance Heat Tracing for Industrial Applications

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(2025) Pipe Hangers and Supports - Materials, Design and Manufacture, Selection, Application, and Installation
MSS SP-67	(2022) Butterfly Valves
MSS SP-69	(2003; Notice 2012) Pipe Hangers and Supports - Selection and Application (ANSI Approved American National Standard)
MSS SP-70	(2011) Gray Iron Gate Valves, Flanged and Threaded Ends
MSS SP-72	(2010a) Ball Valves with Flanged or Butt-Welding Ends for General Service
MSS SP-80	(2019) Bronze Gate, Globe, Angle, and Check Valves
MSS SP-85	(2011) Gray Iron Globe & Angle Valves Flanged and Threaded Ends
MSS SP-110	(2010) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 2	(2000; R 2020) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 V
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA MG 1	(2021) Motors and Generators

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-V-12003	(1980; Rev F; Am 1; CANC Notice 1) Valves, Plug, Cast-Iron or Steel, Manually Operated

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-1689	(Rev B) Tape, Pressure-Sensitive Adhesive, (Plastic Film)
CID A-A-50560	(Basic) Pumps, Centrifugal, Water Circulating, Electric-Motor-Driven
CID A-A-59617	(Basic, Notice 1) Unions, Brass or Bronze, Threaded Pipe Connections and Solder-Joint Tube Connections

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.144	Safety Color Code for Marking Physical Hazards
29 CFR 1910.219	Mechanical Power Transmission Apparatus

1.2 RELATED REQUIREMENTS

Section 23 03 00.00 20 BASIC MECHANICAL MATERIALS AND METHODS applies to this section with additions and modifications specified herein.

1.3 SYSTEM DESCRIPTION

Except as specified otherwise, equipment and piping components shall be suitable for use in low temperature water heating system. Except as modified herein, the pressure temperature limitations shall be as specified in the referenced standards and specifications. Pressures in this specification are pressures in pounds per square inch above atmospheric pressure, and temperatures are in degrees Fahrenheit (F).

1.3.1 Hot Water Heating System

Submit plan, elevations, dimensions, capacities, and ratings. Include the following:

d. Pumps

e. Valves

f. Expansion tanks

g. Flow measuring equipment

h. Backflow preventer

i. Air separating tank

l. Converters

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Hot water heating system

SD-03 Product Data

Pumps

Include pump speed and characteristic curve for performance of impeller selected for each pump. Curves shall indicate capacity vs head, efficiency, and brake power for full range, from shut-off to free delivery.

Expansion tanks

Flow measuring equipment

External air separation tanks

Hot water heating pipe

Combination Strainer And Pump Suction Diffuser

SD-06 Test Reports

Hydrostatic test of piping system

Auxiliary equipment and accessory tests

Submit test reports in accordance with the paragraph entitled "Field Quality Control."

SD-07 Certificates

Backflow preventer certification

Report of prior installations

Welding procedures

Welder's qualifications

1.5 QUALITY ASSURANCE

1.5.1 Standard Commercial Product for Terminal Units

Terminal units provided shall comply with features called out in this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the terminal units being

furnished. A standard commercial product is a product which has been sold or is currently being offered for sale, on the commercial market through advertisements or manufacturer's catalogs, or brochures. Provide Institute of Boiler and Radiator Manufacturer (IBR) or Steel Boiler Institute (SBI) rating for required capacity.

1.5.2 Welding

1.5.2.1 Report of Prior Installations

Submit a Certificate of Full Approval or a current Certificate of Approval for each design, size, and make of backflow preventer being provided for the project. Certificate shall be from the Foundation for Cross-Connection Control and Hydraulic Research, University of Southern California, and shall attest that this design, size, and make of backflow preventer has satisfactorily passed the complete sequence of performance testing and evaluation for the respective level of approval. A Certificate of Provisional Approval is not acceptable in lieu of the above.

1.5.2.2 Welding Procedures

Before performing welding, submit three copies of welding procedure specification for all metals to be used in the work, together with proof of welder's qualification as outlines in ASME B31.9.

1.5.2.3 Welder's Qualifications

Before welder or operator performs welding, submit three copies of Welder's Performance Qualification Record in conformance with ASME B31.9 showing that the welder was tested under the approved procedure specification submitted by the Contractor. In addition, submit each welder's assigned number, letter, or symbol used to identify the work of the welder.

1.5.2.4 Identification of Welder's Work

Ensure that each welder's assigned number, letter or symbol is affixed immediately upon completion of the weld. To welders making defective welds after passing a qualification test, give a requalification test. Upon failing to pass the test, do not permit welder to work in this contract.

1.5.2.5 Previous Qualifications

Welding procedures, welders, and welding operators previously qualified by test may be accepted for this contract without requalification subject to the approval and provided that all the conditions specified in ASME B31.9 are met before a procedure can be used.

1.5.3 Brazing and Soldering

1.5.3.1 Brazing Procedure

ASME B31.9. Brazing procedure for joints shall be as outlined in CDA A4015.

1.5.3.2 Soldering, Soldering Preparation, and Procedures for Joints

ASME B31.9 and as outlined in CDA A4015.

1.5.4 Backflow Preventer Certification

Submit a Certificate of Full Approval or a current Certificate of Approval for backflow preventers.

1.6 SAFETY STANDARDS

1.6.1 Welding

Safety in welding and cutting of pipe shall conform to AWS Z49.1.

1.6.2 Guards

Couplings, motor shafts, gears and other moving parts shall be guarded, in accordance with OSHA 29 CFR 1910.219. Guards shall be cast iron or expanded metal. Guard parts shall be rigid and removable without disassembling the guarded unit.

PART 2 PRODUCTS

2.1 ELECTRICAL HEAT TRACING

Provide heat trace systems for all exterior pipes, valves, and fittings that are in accordance with IEEE 515 and be UL listed. System include all necessary components, including heaters and controls to prevent freezing.

Provide self-regulating heaters consisting of two 16 AWG tinned-copper bus wires embedded in parallel in a self-regulating polymer core that varies its power output to respond to temperature along its length. Ensure heater is able to be crossed over itself without overheating. Obtain approval before used directly on plastic pipe. Cover heater with a radiation cross-linked modified polyolefin dielectric jacket in accordance with ASTM D2308.

Provide heater with self-regulating factor of at least 90 percent, in order to provide energy conservation and to prevent overheating.

Operate heater on line voltages as shown on plans.

Size Heater according to the following table:

Pipe Size

(Inch, Diameter)	Minus 10 degrees F	Minus 20 degrees F
3 inches or less	5 watts per foot (wpf)	5 wpf
4 inch	5 wpf	8 wpf
6 inch	8 wpf	8 wpf
8 inch	2 strips/5 wpf	2 strips/8 wpf
12 inch	2 strips/8 wpf	2 strips/8 wpf

Control systems by an ambient sensing thermostat set at 40 degrees F either directly or through an appropriate contactor.

2.2 PIPE AND FITTINGS

2.2.1 Hot Water Heating Pipe (Supply and Return)

ASTM A53/A53M electric resistance welded or seamless Schedule 40 Black steel pipe or ASTM B88 Type L hard drawn Copper tubing. Above ground piping 4 inch and smaller must be Type L copper. Piping larger than 4 inches shall be Type L copper or Schedule 40 Black steel pipe.

2.2.2 Fittings

Provide fittings compatible with the pipe being provided and shall conform to the following requirements.

2.2.2.1 Steel, Cast Iron, or Bronze

Sizes 2 1/2 inches and above. Steel fitting butt welding type ASME B16.9 or ASME B16.5 flanged type. Cast iron fittings flanged type ASME B16.1. Bronze fittings up to 8 inch size flanged type ASME B16.24.

2.2.2.2 Fittings for Copper Tubing

ASME B16.18 cast bronze solder joint type or ASME B16.22 wrought copper solder joint type. Fittings may be flared or compression joint type.

2.2.3 Unions

2.2.3.1 Steel Pipe

Provide ASME B16.39, malleable iron unions, threaded connections.

2.2.3.2 Copper Tubing

Provide CID A-A-59617, bronze unions, solder joint end.

2.2.3.3 Dielectric Union

Provide insulated union with galvanized steel female pipe-threaded end and a copper solder joint end conforming with ASME B16.39, Class 1, dimensional, strength and pressure requirements. Union shall have a water-impervious insulation barrier capable of limiting galvanic current to one percent of the short-circuit current in a corresponding bimetallic joint. When dry, insulation barrier shall be able to withstand a 600-volt breakdown test.

2.2.4 Flanges

Remove raised faces when used with flanges having a flat face.

2.2.4.1 Steel Flanges

ASME B16.5 forged steel, welding type.

2.2.4.2 Bronze Screwed Flanges

ASME B16.24.

2.2.5 Drains and Overflows

2.2.5.1 Steel Pipe

ASTM A53/A53M, Seamless Schedule 40, Malleable iron or forged steel fittings, screwed or welded joints.

2.2.5.2 Copper Tubing

ASTM B88, Type L, hard drawn, cast brass or wrought copper fittings, Grade Sb5 solder joints.

2.2.6 Valves

Valves shall have rising stems and shall open when turned counterclockwise.

2.2.6.1 Gate Valves

a. Bronze Gate Valves: MSS SP-80, 2 inches and smaller, wedge disc, inside screw type not less than Class 150. Use solder joint ends with copper tubing.

b. Steel Gate Valves: ASME B16.34, provide with open stem and yoke type with solid wedge or flexible wedge disc and heat and corrosion-resistant steel trim.

c. Cast Iron Gate Valves: MSS SP-70, 2 1/2 inches and larger, open stem and yoke type with bronze trim.

2.2.6.2 Globe and Angle Valves

a. Bronze Globe and Angle Valves: MSS SP-80, 2 inches and smaller, Class 200, except use Class 150 with solder ends for copper tubing. Valves shall have renewable seat and discs except solder end valves which shall have integral seats.

b. Steel Globe and Angle Valves: ASME B16.34, provide with heat and corrosion-resistant trim.

c. Cast Iron Globe and Angle Valves: MSS SP-85, 2 1/2 inches and larger, with bronze trim, tapped drains and brass plug.

2.2.6.3 Check Valves

a. Bronze Check Valves: MSS SP-80, 2 inches and smaller, regrinding swing check type, Class 200.

b. Steel Swing Check Valves: ASME B16.34, regrinding swing check type, Class 200.

(1) Swing check valves shall have bolted caps.

(2) Lift check valves 2 1/2 inches and larger shall have pressure seal caps.

c. Cast Iron Check Valves: ASME B16.34, 2 1/2 inches and larger, bronze trim, non-slam, eccentric disc type for centrifugal pump discharge service.

2.2.6.4 Temperature Regulating Valves

Provide ASSE 1017 copper alloy body with adjustable range thermostat.

2.2.6.5 Water Pressure-Reducing Valves

ASSE 1003.

2.2.6.6 Plug Valves

MIL-V-12003, except that a replaceable valve seat will not be required. Type II - non-lubricated, lift-plug valves.

2.2.6.7 Ball Valves

Flanged or butt-welding ends ball valve shall conform to MSS SP-72, bronze . Threaded, socket-welding, solder joint, grooved and flared ends shall conform to MSS SP-110.

2.2.6.8 Flow Control Balancing Valves

Copper alloy or cast iron body, copper alloy or stainless internal working parts, and integral pointer that indicates the degree of valve opening. Valves shall be suitable for 125 psig at 190 degrees F hot water. Valve shall function as a service valve when in fully closed position. Valve body shall have factory-installed tappings for differential pressure meter connections for verification of pressure differential across valve orifice. Meter connections shall have positive check valves or shutoff valves. Each valve shall have metal tag showing the gallons per minute flow for each differential pressure reading.

2.2.6.9 Butterfly Valves

Conform with MSS SP-67, Type I - Tight shut off valve, and flanged valve ends. Valve body material shall be cast iron and shall be bubble tight for shutoff at 150 psig. Flanged and flangeless type valves shall have Type 300 series corrosion resistant steel stems and corrosion resistant or bronze discs with molded elastomer disc seals. Flow conditions shall be for the regulation from maximum flow to complete shutoff by way of throttling effect. Valves shall be provided in closed system. Valves smaller than 8 inches shall have throttling handles. Valves 8 inches and larger shall have totally enclosed manual gear operators with adjustable balance return stops and indicators. Valves shall have a minimum of 7 locking positions and shall be suitable for water temperatures up to 200 degrees F.

2.2.6.10 Butterfly Valves 2 Inches and Smaller

Valves shall be one-piece and three-piece design with male or female threaded or soldered end connections and shall be bubble tight for shutoff at 150 psig. Stem and disc assembly shall be of 300 series corrosion resistant steel. Disc seal assembly shall be of 300 series corrosion resistant steel. Disc seal shall be suitable for the liquid being used in the system in which the valve is to be installed. Valves shall be suitable for water temperature up to 200 degrees F and shall be capable of operating at the rated pressure of 150 psig. Valves shall be designed for throttling service use by valve lever and indicator adjustment.

2.2.6.11 Relief Valves

Bronze body, teflon seat, stainless steel stem and springs, automatic, direct pressure actuated, capacities ASME certified and labelled.

2.2.6.12 Valve Operating Mechanisms

Provide power operators and extension stems where indicated and as specified.

c. Power Operators: Shall be electric . Power operated valves shall open and close at rates no slower than 10 inches per minute for gate valves and 4 inches per minute for globe and angle valves. Valves shall open fully or close tightly without requiring further attention when the actuating control is moved to the open or close position. A predetermined thrust exerted on the stem during operation resulting from an obstruction in the valve shall cause the motor to automatically stop. Power operators shall be complete with all gearing and controls necessary for the size of valve being provided. Power operators shall be designed to operate on the electric power supply indicated.

d. Extension Stem: Corrosion resisting steel designed for rising and non-rising stems. Provide in length required to connect the valve stem and the operating mechanism and of sufficient cross section to transfer the torque required to operate the valve.

2.2.6.13 Balancing Valves

Balancing valves shall be calibrated bronze body balancing valves with integral ball valve and venturi or valve orifice and valve body pressure taps for flow measurement based on differential pressure readings. Valve pressure taps and meter connections shall have seals and built-in check valves with threaded connections for a portable meter. Meter shall be provided by the same manufacturer and be capable of reading system pressures and shall meet the requirements of the paragraph entitled "Flow Measuring Equipment." Valves shall have internal seals to prevent leakage around rotating element and be suitable for full shut-off rated pressure. Valves shall have an operator with integral pointer and memory stop. Balancing valves shall be selected for the required flows as indicated on the plans.

2.2.7 End Connections

2.2.7.1 Flexible Connectors

Provide flexible pipe connectors on piping connected to equipment. Flexible section shall consist of rubber, tetrafluoroethylene resin, corrosion-resistant steel, bronze, monel, or galvanized steel. Material provided and configuration shall be suitable for pressure, temperature, and circulating medium. Flexible section shall have flanged ends and shall be suitable for service intended. Flexible section may be reinforced with metal retaining rings, with built-in braided wire reinforcement and restriction bolts or with wire braid cover suitable for service intended.

2.2.7.2 Steel Piping

Screwed or socket welded for 2 inches and smaller and flanged or butt

welded for 2 1/2 inches and larger.

a. Screwed Joints With Taper Threads: ASME B1.20.1.

b. Flanged Joints: Bolting and gaskets shall be as follows:

(1) Bolting: Bolt and stud material ASTM A307, Grade B, and nut material ASTM A194/A194M, Grade 2. Bolt, stud, and nut dimensions ASME B18.2.2 threads ASME B1.1coarse type with Class 2A fit for bolts and studs, and Class 2B fit for nuts. Bolts or bolt studs shall extend completely through the nuts and may have reduced shanks of a diameter not less than the diameter at root of threads. Carbon steel bolts shall have American Standard regular square or heavy hexagon heads and shall have American Standard heavy semifinished hexagonal nuts conforming to ASME B18.2.2.

(2) Gaskets: ASME B16.21, Nonasbestos compressed material 1/16 inch thickness full face or self-centering flat ring type and suitable for pressure and temperature of the piping system.

c. Butt Weld Joints: ASME B31.9. Backing rings shall conform to ASME B31.9. Ferrous rings shall not exceed 0.05 percent sulfur; for alloy pipe, backing rings shall be of material compatible with the chemical composition of the parts to be welded and preferably of the same composition. Provide continuous machined or split band backing rings.

d. Socket Weld Joints: ASME B31.9.

2.2.7.3 Joints for Copper Tubing

a. Solder conforming to ASTM B32 alloy grade Sb5 or Sn96. Solder and flux shall be lead free (less than 0.2 percent of lead).

b. Copper Tube Extracted Joint: An extracted mechanical tee joint may be made in copper tube. Make joint with an appropriate tool by drilling a pilot hole and drawing out the tube surface to form a collar having a minimum height of three times the thickness of the tube wall. To prevent the branch tube from being inserted beyond the depth of the extracted joint, provide dimpled depth stops. Notch the branch tube for proper penetration into fitting to assure a free flow joint. Braze extracted joints using a copper phosphorous classification brazing filler metal. Soldered joints shall not be permitted.

2.2.8 Expansion Joints

2.2.8.1 Packless Type

Provide ASTM F1120, Type III with fabricated corrosion-resistant steel bellows.

2.2.8.2 Guided Slip-Tube Type

Provide ASTM F1007, Type IV internally-externally guided, injected semiplastic type packing.

2.2.9 Instrumentation

2.2.9.1 Pressure and Vacuum Gauges

Provide ASME B40.100 with restrictor.

2.2.9.2 Indicating Thermometers

Thermometers shall be dial type with an adjustable angle suitable for the service. Provide thermowell sized for each thermometer in accordance with the thermowell specification. Fluid-filled thermometers (mercury is not acceptable) shall have a nominal scale diameter of 5 inches. Construction shall be stainless-steel case with molded glass cover, stainless-steel stem and bulb. Stem shall be straight, length as required to fit well. Bimetal thermometers shall have a scale diameter of 3 1/2 inches. Case shall be hermetic. Case and stem shall be constructed of stainless steel. Bimetal stem shall be straight and of a length as required to fit the well.

2.2.9.3 Pressure/Temperature Test Ports

Pressure/Temperature Test Ports shall have brass body and EPDM and/or Neoprene valve seals. Ports shall be rated for service between 35 and 275 degrees F and up to 500 psig. Ports shall be provided in lengths appropriate for the insulation thickness specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS and installed to allow a minimum of 12 inches of access for probe insertion. Provide with screw-on cap attached with a strap or chain to prevent loss when removed. Ports shall be 1/4 inch NPT and accept 1/8 inch diameter probes.

2.2.10 Miscellaneous Pipeline Components

2.2.10.1 Air Vent

Provide float type air vent in hydronic systems. Vent shall be constructed of brass or semi-steel body, copper float, and stainless steel valve and valve seat. Design air vent to suit system operating temperature and pressure. Provide isolating valve to permit service without draining the system. Pipe discharge of vent to a drain.

2.2.10.2 Combination Strainer and Pump Suction Diffuser

Angle type body with removable strainer basket and internal straightening vanes, a suction pipe support, and a blowdown outlet and plug. Strainer shall be in accordance with ASTM F1199, except as modified and supplemented by this specification. Unit body shall have arrows clearly cast on the sides indicating the direction of flow.

Strainer screen shall be made of minimum 22 gauge monel, with small perforations numbering not less than 400 per square inch to provide a net free area through the basket of at least 3.30 times that of the entering pipe. Flow shall be into the screen and out through the perforations. Provide an auxiliary disposable fine mesh strainer which shall be removed 30 days after start-up. Provide warning tag for operator indicating scheduled date for removal.

Casing shall have connection sizes to match pump suction and pipe sizes, and be provided with adjustable support foot or support foot boss to relieve piping strains at pump suction. Provide unit casing with blowdown

port and plug. Provide a magnetic insert to remove debris from system.

2.2.10.3 Hangers and Supports

Design and fabrication of pipe hangers, supports, and welding attachments shall conform to MSS SP-58 and ASME B31.9. Hanger types and supports for bare and covered pipe shall conform to MSS SP-69 for the temperature range. If ferrous materials are used, provide hot dipped galvanized hangers, inserts and supports.

2.2.10.4 Pipe Sleeves

Sleeves in masonry and concrete walls, floors, and roof slabs shall be ASTM A53/A53M, Schedule 40 or Standard Weight, hot-dip galvanized steel pipe. Sleeves in partitions shall be zinc-coated sheet steel having a nominal weight of not less than 0.906 pound per square foot.

2.2.10.5 Escutcheon Plates

Provide one piece or split hinge metal plates for piping passing through floors, walls, and ceilings in exposed spaces. Provide polished stainless steel plates or chromium-plated finish on copper alloy plates in finished spaces and paint finish on metal plates in unfinished spaces.

2.3 CENTRAL MECHANICAL EQUIPMENT

2.3.1 Boilers

Provide as specified in Section 23 52 43.00 20 LOW PRESSURE WATER HEATING BOILERS UNDER 800,000 BTU/HR OUTPUT.

2.4 PIPING SYSTEM EQUIPMENT

2.4.1 Pumps

Provide hot water circulating pumps, CID A-A-50560, Service A. Pump casing and flange shall be made of close-grained cast iron. Shaft shall be carbon or alloy steel with lubricated bearings and impeller shall be bronze. Select pumps so that the operating point on selected impeller-curve will lie at or to the left of shutoff side of, and not more than 5 percent below, point of maximum efficiency for impeller. Provide motors of open type conforming to NEMA MG 1 and suitable for electrical characteristic as indicated. Motor starters shall conform to NEMA ICS 2 across the line type with NEMA ICS 6general purpose enclosure.

2.4.2 Expansion Tanks

Provide welded steel, constructed and tested hydrostatically in accordance with ASME BPVC SEC VIII D1. Tank shall be equipped with all necessary fittings. The tank and fittings shall be pressure rated at least equal to the test pressure of the total system. Zinc coat the tank inside and out after fabrication by the hot dip process ASTM A123/A123M.

2.4.3 External Air Separation Tanks

Provide tank constructed of steel, designed for not less than 75 psig, and constructed and tested in accordance with the requirements of ASME BPVC SEC VIII D1. Provide tangential inlet and outlet connections,

flanged for sizes 2 1/2 inches and larger. Each unit shall have an internal design suitable for creating the required vortex and subsequent air separation. Provide with automatic air release device and galvanized steel strainer. Provide a blow down connection with a gate valve and piped to nearest floor drain.

2.4.4 Flow Measuring Equipment

Orifice or venturi type. Flow metering equipment including pitot tubes, venturis, orifice plates, flanges, and indicating meters shall be the product of one and the same manufacturer. Provide flowmeters of permanent type . Flowmeters shall be suitable for service in which they are to be installed. Primary elements of flowmeters shall conform to ASME recommendations for flowmeters. Provide bronze, monel, or stainless steel materials for wetted parts of flow meters.

a. Orifices: Square-edge type, made of corrosion and erosion resistant metal and mounted between pipe flanges having factory-made pressure taps provided with shutoff valves. Orifice flanges shall conform to ASME B16.36.

b. Tubular Flowmeters: Flow measuring elements consisting of venturi tubes or pitot tubes where indicated. Locations and arrangement of piping, both upstream and downstream of flow measuring elements shall conform to the manufacturer's published literature. Provide each flow measuring element with an integral tab, or a metal tag on a corrosion-resistant steel wire, extending outside pipe covering, and stamped or printed in a visible position with manufacturer's name and address; serial number of meter to which it is to be connected; name, number, or location of equipment served; specified rate of flow; and multiplier to be applied to meter reading. Provide taps with shutoff valves and quick connecting hose fittings for portable meters or double ferrule compression fittings for connection to tubing for permanently located meters or recorders. Tubes shall be calibrated in accordance with ASME recommendations.

(1) Venturi Tubes: Certified by the manufacturer for the actual piping configuration and any necessary piping changes required for certification without additional cost to the Government. Throat diameter for each venturi tube shall be designed so that at specified rate of flow the scale reading will fall between 50 percent and 80 percent of full scale value. Select venturi tube sizes from the manufacturer's latest published tables of flow versus differential pressure. Unrecovered head loss at maximum flow shall not exceed 10 percent. Provide bronze or cast iron tubes with bronze-lined throats, with flanged, threaded, or welded ends to suit piping system. Provide bodies of fabricated steel and fittings of the same class as piping in which installed. Two integral meter taps shall be provided in each venturi tube. Connections for attachment to portable flow meter hoses shall be readily accessible and not over 6 feet above a floor or permanent platform.

(2) Pitot Tube Assemblies: Provide corrosion-resistant materials. Tubes shall be capable of measuring liquid flow through tube elements providing an averaged, interpolated flow measurement from a single, fixed position. Provide self cleaning elements and impact tube designed to rotate when turned by the operator to protect pressure-sensing elements of tube when not in use.

Location and total amount of pitot tubes required for system flow measurement shall be as recommended by the manufacturer and as indicated.

c. Meters: Designed for a full scale pressure differential of 50 inches water gage for tubular type or 100 inches water gage for orifice type. Dials shall have square root or linear scales with developed length of not less than 12 inches. Provide flush mounted panel meters that read directly in gallons per minute. Dials of portable meters shall have square root scales reading from 0 to 100 gpm for use with multiplier stamped on orifice or tubular type. Provide meters designed for not less than 200 psi and protected against pressure surges. Meter bodies shall have taps for venting and draining.

(1) Permanently Mounted Meters: Each meter shall be connected completely as indicated and as specified and provided with the following: three valve manifold equalizer lines, two block valves, two vent and drain valves, and an integral pulsation damper. Overall accuracy of meters shall be plus or minus 2 percent of full scale flow over a range from 20 to 100 percent of full scale flow.

2.5 TERMINAL UNITS

2.5.1 Heating and Ventilating Units

Provide fan-coil units as specified in Section 23 30 00 HVAC AIR DISTRIBUTION.

2.6 ELECTRICAL EQUIPMENT

Provide complete with motors, motor starters, thermal overload protection, and controls. Equipment and wiring shall be in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

2.7 CONTROLS

Provide controls as specified in Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

2.8 INSULATION

Provide shop and field applied insulation as specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

2.9 ASBESTOS PROHIBITION

Asbestos and asbestos containing products are prohibited.

PART 3 EXECUTION

3.1 PREPARATION

Provide storage for equipment and material at the project site. All parts shall be readily accessible for inspection, repair, and renewal. Protect material and equipment from the weather.

3.2 INSTALLATION

Piping fabrication, assembly, welding, soldering, and brazing shall conform to ASME B31.9. Piping shall follow the general arrangement shown. Route piping and equipment within buildings out of the way of lighting fixtures and doors, windows, and other openings. Run overhead piping in buildings in inconspicuous positions. Provide adequate clearances from walls, ceilings, and floors to permit welding of joints and application of insulation. Make provision for expansion and contraction of pipe lines. Make changes in size of water lines with reducing fittings. Do not bury, conceal, or insulate until piping has been inspected, tested, and approved. Do not run piping concealed in walls, partitions, underground, or under the floor except as otherwise indicated. Where pipe passes through building structure, locate pipe joints and expansion joints where they may be inspected. Provide flanged joints where necessary for normal maintenance and where required to match valves and equipment. Furnish gaskets, packing, and thread compounds suitable for the service. Provide long radius ells where possible to reduce pressure drops. Pipe bends in lieu of welding fittings may be used where space permits. Pipe bends shall have a uniform radius of at least five times the pipe diameter and shall be free from appreciable flattening, wrinkling, or thinning of the pipe. Do not use mitering of pipe to form elbows, notching straight runs to form full sized tees, or any similar construction. Make branch connections over 2 inches with welding tees except factory made forged welding branch outlets or nozzles having integral reinforcements conforming to ASME B31.9 may be used, provided the nominal diameter of the branch is at least one pipe size less than the nominal diameter of the run. Branch connections 2 inches and under can be threaded or welded. Run vertical piping plumb and straight and parallel to walls. Provide sleeves for lines passing through building structure. Provide a fire seal where pipes pass through fire wall, fire partitions, fire rated pipe chase walls, or floors above grade. Install piping connected to equipment with flexibility for thermal stresses and for vibration, and support and anchor so that strain from weight and thermal movement of piping is not imposed on the equipment.

3.2.1 Hangers and Supports

Unless otherwise indicated, horizontal and vertical piping attachments shall conform to MSS SP-58. Band and secure insulation protection shields without damaging pipe insulation. Continuous inserts and expansion bolts may be used.

3.2.2 Grading of Pipe Lines

Unless otherwise indicated, install horizontal lines of hot water piping to grade down in the direction of flow with a pitch of not less than one inch in 30 feet, except in loop mains and main headers where the flow may be in either direction.

3.2.3 Pipe Sleeves

Provide sleeves where pipes and tubing pass through masonry or concrete walls, floors, roof, and partitions. Annular space between pipe, tubing, or insulation and the sleeve shall not be less than 1/4 inch. Hold sleeves securely in proper position and location before and during construction. Sleeves shall be of sufficient length to pass through entire thickness of walls, partitions, or slabs. Sleeves in floor slabs shall extend 2 inches above finished floor. Firmly pack space between pipe or

tubing and sleeve with oakum and caulk on both ends of the sleeve with plastic waterproof cement which will dry to a firm but pliable mass, or provide a mechanically adjustable segmented elastomeric seal. Seal both ends of penetrations through fire walls and fire floors to maintain fire resistive integrity with UL listed fill, void, or cavity material.

3.2.4 Flashing for Buildings

Provide flashing where pipes pass through building roofs, and make outside walls tight and waterproof.

3.2.5 Unions and Flanges

Provide unions and flanges to permit easy disconnection of piping and apparatus. Each connection having a screwed-end valve shall have a union. Place unions and flanges no farther apart than 100 feet. Install unions downstream of valves and at equipment or apparatus connections. Provide unions on piping under 2 inches in diameter, and provide flanges on piping 2 inches and over in diameter. Provide dielectric unions or flanges between ferrous and non-ferrous piping, equipment, and fittings; except that bronze valves and fittings may be used without dielectric couplings for ferrous-to-ferrous or non-ferrous-to-non-ferrous connections.

3.2.6 Changes in Pipe Size

Provide reducing fittings for changes in pipe size; reducing bushings are not permitted. In horizontal lines, provide eccentric reducing fittings to maintain the top of the lines in the same plane.

3.2.7 Cleaning of Pipe

Thoroughly clean each section of pipe, fittings, and valves free of foreign matter before erection. Prior to erection, hold each piece of pipe in an inclined position and tap along its full length to loosen sand, mill scale and other foreign matter. For pipe 2 inches and larger, draw wire brush, of a diameter larger than that of the inside of the pipe, several times through the entire length of pipe. Before making final connections to apparatus, wash out interior of piping thoroughly with water. Plug or cap open ends of mains during shutdown periods. Do not leave lines open where foreign matter might enter the pipe.

3.2.8 Valves

Install valves in conformance with ASME B31.9. Provide gate valves unless otherwise directed. Install valves with stems horizontal or above. Locate or equip stop valves to permit operation from floor level, or provide with safe access in the form of walkways or ladders. Install valves in positions accessible for operation and repair.

3.2.8.1 Globe Valves

Install globe valves so that the pressure is below the disk and the stem horizontal.

3.2.8.2 Relief Valves

Provide valves on pressure tanks, low pressure side of reducing valves, heat exchangers, and expansion tanks. Select system relief valve so that capacity is greater than make-up pressure reducing valve capacity. Select

equipment relief valve capacity to exceed rating of connected equipment. Pipe relief valve outlet to the nearest floor drain.

3.2.9 Pressure Gage

Provide a shut-off valve between pressure gages and the line.

3.2.10 Thermometers

Provide thermometers and thermal sensing elements of control valves with a separable socket. Install separable sockets in pipe lines in such a manner to sense the temperature of flowing the fluid and minimize obstruction to flow.

3.2.11 Strainers

Provide strainers, with meshes suitable for the services, where indicated, or where dirt might interfere with the proper operation of valve parts, orifices, or moving parts of equipment.

3.2.12 Pumps

Select pumps for specified fluid temperatures, are non-overloading in parallel or individual operation, and operate within 25 percent of midpoint of published maximum efficiency curve. Support piping adjacent to pump such that no weight is carried on pump casings. Install close coupled and base mounted pumps on concrete base, with anchor bolts, set and level, and grout in place and provide supports under elbows on pump suction and discharge line sizes 4 inches and over. Lubricate pump before start-up.

3.2.13 Equipment Foundations

Locate equipment foundations as shown on the drawings. Size, weight, and design shall preclude shifting of equipment under operating conditions. Foundations shall meet the requirements of the equipment manufacturer. Concrete shall conform to Section 03 30 00 CAST-IN-PLACE CONCRETE, and grout shall be approved non-shrinking.

3.2.14 Equipment Installation

Install equipment in accordance with installation instructions of the manufacturers. Grout equipment mounted on concrete foundations before installing piping. Install piping in such a manner as not to place a strain on the equipment. Do not bolt flanged joints tight unless they match. Grade, anchor, guide, and support piping without low pockets.

3.2.15 Cleaning of Systems

As installation of the various system components is completed, fill, start, and vent prior to cleaning. Place terminal control valves in open position. Add cleaner to closed system at concentration as recommended by manufacturer. Apply heat while circulating, slowly raising temperature to 160 degrees F and maintain for 12 hours minimum. Remove heat and circulate to 100 degrees F or less; drain systems as quickly as possible and refill with clean water. Circulate for 6 hours at design temperatures, then drain. Refill with clean water and repeat until system cleaner is removed. Use neutralizer agents on recommendation of system cleaner supplier and approval of Contracting Officer. Remove, clean, and

replace strainer screens. Inspect, remove sludge, and flush low points with clean water after cleaning process is completed. Include disassembly of components as required. Preliminary or final tests are not permitted until cleaning is approved.

3.2.16 Painting of Piping and Equipment

Provide in accordance with Section 09 90 00 PAINTS AND COATINGS.

3.2.17 Identification of Piping

Identify piping in accordance with OSHA 29 CFR 1910.144, except that labels or tapes may be used in lieu of painting or stenciling. Spacing of identification marking on runs shall not exceed 50 feet. Materials for labels and tapes shall conform to CID A-A-1689, and shall be general purpose type and color class. Painting and stenciling shall conform to Section 09 90 00 PAINTS AND COATINGS.

3.2.18 Heat Trace Cable

Field apply heater tape and cut to fit as necessary, linearly along the length of pipe after piping has been pressure tested and approved by the Contracting Officer. Secure the heater to piping with cable ties . Label thermal insulation on the outside, "Electrical Heat Trace."

Install power connection, end seals, splice kits and tee kit components in accordance with IEEE 515 to provide a complete workable system. Terminate connection to the thermostat and ends of the heat tape in a junction box. Ensure cable and conduit connections are raintight.

3.3 FIELD QUALITY CONTROL

Perform inspections and tests as specified herein to demonstrate that piping and equipment, as installed, is in compliance with contract requirements. Start up and operate the system. During this time, periodically clean the various strainers until no further accumulation of foreign material occurs. Exercise care so that minimum loss of water occurs when strainers are cleaned. Adjust safety and automatic control instruments to place them in proper operation and sequence.

3.3.1 Hydrostatic Test of Piping System

Test piping system hydrostatically using water not exceeding 100 degrees F. Conduct tests in accordance with the requirements of ASME B31.9 and as follows. Test piping system after all lines have been cleaned and before applying insulation covering. Remove or valve off from the system, gages, and other apparatus which may be damaged by the test before the tests are made. Install calibrated test pressure gage in the system to observe any loss in pressure. Maintain test pressure for a sufficient length of time to enable an inspection of each joint and connection. Perform tests after installation and prior to acceptance.Notify the Contracting Officer in writing 14 days prior to the time scheduled for the tests.

3.3.2 Auxiliary Equipment and Accessory Tests

Observe and check pumps, accessories, and equipment during operational and capacity tests for leakage, malfunctions, defects, noncompliance with referenced standards, or overloading.

3.3.2.1 Backflow Preventers

Backflow preventers shall be tested by locally approved and certified backflow assembly testers. A copy of the test report shall be provided to the Contracting Officer prior to placing the domestic water system into operation, or no later than 5 days after the test.

3.3.2.2 Heat Trace Cable

Test heat trace cable system in accordance with IEEE 515 after installation and before and after installation of the thermal insulation. Test heater cable using a 1000 vdc megger. Minimum insulation resistance is 20 to 1000 megohms regardless of cable length.

3.4 TESTING, ADJUSTING, AND BALANCING

Test, adjust, and balance the hydronic system in accordance with Section 23 05 93 TESTING, ADJUSTING AND BALANCING FOR HVAC.

3.4.1 Markings of Settings

Following final acceptance of the balancing report, the settings of all valves, splitters, dampers, and other adjustment devices shall be permanently marked so that adjustment can be restored if disturbed at anytime.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 23 00

REFRIGERANT PIPING
08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI 710 I-P	(2009) Performance Rating of Liquid-Line Driers
AHRI 720	(2002) Refrigerant Access Valves and Hose Connectors
AHRI 750 I-P	(2016) Performance Rating of Thermostatic Refrigerant Expansion Valves
AHRI 760 I-P	(2014) Performance Rating of Solenoid Valves for Use with Volatile Refrigerants
AHRI 1370 I-P	(2017) Performance Rating of Electronic Expansion Valves

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 15 & 34	(2022) ASHRAE Standard 34-2016 Safety Standard for Refrigeration Systems/ASHRAE Standard 34-2016 Designation and Safety Classification of Refrigerants-ASHRAE Standard 34-2016
ASHRAE 17	(2015) Method of Testing Capacity of Thermostatic Refrigerant Expansion Valves
ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(2018) Standard for Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B31.1	(2024) Power Piping
ASME B31.5	(2022) Refrigeration Piping and Heat Transfer Components

ASME B40.100	(2022) Pressure Gauges and Gauge Attachments

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8/A5.8M	(2019) Specification for Filler Metals for Brazing and Braze Welding
AWS A5.31/A5.31M	(2012) Specification for Fluxes for Brazing and Braze Welding
AWS BRH	(2007; 5th Ed) Brazing Handbook
AWS Z49.1	(2021) Safety in Welding, Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B62	(2017) Standard Specification for Composition Bronze or Ounce Metal Castings
ASTM B75/B75M	(2020) Standard Specification for Seamless Copper Tube
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B280	(2020) Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service
ASTM B813	(2024) Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM D520	(2025) Standard Specification for Zinc Dust Pigment
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(2025) Pipe Hangers and Supports - Materials, Design and Manufacture,

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Refrigerant Piping System; G

SD-03 Product Data

Refrigerant Piping System

Qualifications

Refrigerant Piping Tests

SD-06 Test Reports

Refrigerant Piping Tests

SD-07 Certificates

Service Organization

SD-10 Operation and Maintenance Data

Maintenance; G

Operation and Maintenance Manuals; G

1.3 QUALITY ASSURANCE

1.3.1 Qualifications

Submit 4 copies of qualified procedures, and list of names and identification symbols of qualified welders and welding operators, prior to non-factory welding operations.

1.3.2 Contract Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. Carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions.

1.4 DELIVERY, STORAGE, AND HANDLING

Protect stored items from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Proper protection and care of all material both before and during installation is the Contractor's responsibility. Replace any materials found to be damaged at the Contractor's expense. During installation, cap piping and similar

openings to keep out dirt and other foreign matter.

1.5 MAINTENANCE

1.5.1 General

Submit Data Package 2 plus operation and maintenance data complying with the requirements of Section 01 78 23 OPERATION AND MAINTENANCE DATA and as specified herein.

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS

a. Provide materials and equipment which are standard products of a manufacturer regularly engaged in the manufacturing of such products, that are of a similar material, design and workmanship and that have been in satisfactory commercial or industrial use for 2 years prior to bid opening.

b. The 2 year use must include applications of equipment and materials under similar circumstances and of similar size. The 2 years' experience must be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown.

c. Products must be supported by a service organization. System components must be environmentally suitable for the indicated locations. Submit a certified list of qualified permanent service organizations for support of the equipment which includes their addresses and qualifications. The service organizations must be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

d. Exposed equipment moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel must be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Install safety devices so that proper operation of equipment is not impaired. Welding and cutting safety requirements must be in accordance with AWS Z49.1.

e. Provide the manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component. Highlight the data to show information such as, but not limited to, material, size, options, performance charts, and curves in adequate detail to demonstrate compliance with contract requirements. Include the manufacturer's recommended installation instructions and procedures in the data provided. Provide data for the following components as a minimum:

   (1) Piping and Fittings
   (2) Valves
   (3) Piping Accessories
   (4) Pipe Hangers, Inserts, and Supports

2.2 REFRIGERANT PIPING SYSTEM

Provide refrigerant piping, valves, fittings, and accessories in accordance with ASHRAE 15 & 34 and ASME B31.5, except as specified herein. Refrigerant piping, valves, fittings, and accessories must be compatible with the fluids used and capable of withstanding the pressures and temperatures of the service. Refrigerant piping, valves, and accessories used for refrigerant service must be cleaned, dehydrated, and sealed (capped or plugged) prior to shipment from the manufacturer's plant. Submit drawings, at least 5 weeks prior to beginning construction, provided in adequate detail to demonstrate compliance with contract requirements. Drawings must consist of:

a. Piping layouts which identify all valves and fittings.

b. Plans and elevations which identify clearances required for maintenance and operation.

2.3 PIPE, FITTINGS AND END CONNECTIONS (JOINTS)

2.3.1 Copper Tubing

Provide copper tubing conforming to ASTM B280 annealed or hard drawn as required. Copper tubing must bear the product identification markings in accordance with ASTM B280, "ACR" must be present on copper tubing. Copper tubing must be soft annealed where bending is required and hard drawn where no bending is required. Soft annealed copper tubing must not be used in sizes larger than 1-3/8 inches. Joints must be brazed except that joints on lines 7/8 inchand smaller may be flared. Cast copper alloy fittings for flared copper tube must conform to ASME B16.26 and ASTM B62. Wrought copper and bronze solder-joint pressure fittings must conform to ASME B16.22 and ASTM B75/B75M. Joints and fittings for brazed joint must be wrought-copper or forged-brass sweat fittings. Cast sweat-type joints and fittings are not allowed for brazed joints. Brass or bronze adapters for brazed tubing may be used for connecting tubing to flanges and to threaded ends of valves and equipment.

2.3.2 Solder

Solder must conform to ASTM B32, grade Sb5, tin-antimony alloy for service pressures up to 150 psig. Solder flux must be liquid or paste form, non-corrosive and conform to ASTM B813.

2.3.3 Brazing Filler Metal

Filler metal must conform to AWS A5.8/A5.8M, Type BAg-5 with AWS Type FB3-A or Type FB3-C flux, except Type BCuP-3, BCuP-4, or BCuP-5 may be used for brazing copper-to-copper joints. BAlSi-4 with AWS Type FB1-A flux may be used when joining copper piping to aluminum components.

2.3.4 Brazing Flux

Brazing flux must conform to AWS A5.31/A5.31M, Type FB3-A or Type FB3-C when using Type BAg-5 filler metal. Type FB1-A is to be used with Type BAlSi-4 filler metal.

2.3.5 Press Fittings

Press fittings are not acceptable for use in refrigerant piping systems.

2.4 VALVES

Valves must be designed, manufactured, and tested specifically for refrigerant service. The valve material and all internal components must be compatible with the specific refrigerant and lubricant used. Valve bodies must be of brass or bronze construction. Valves 1 inch and smaller must have brazed or socket welded connections. Do not use threaded end connections, except in pilot pressure or gauge lines where maintenance disassembly is required and welded flanges cannot be used. Internal parts must be removable for inspection or replacement without applying heat or breaking pipe connections. Valve stems exposed to the atmosphere must be stainless steel or corrosion resistant metal plated carbon steel. Direction of flow must be legibly and permanently indicated on the valve body. Control valve inlets must be fitted with integral or adapted strainer or filter where recommended or required by the manufacturer. Purge, charge and receiver valves must be of manufacturer's standard configuration.

2.4.1 Refrigerant Stop Valves

Valve must be the globe or full-port ball type with a back-seating stem especially packed for refrigerant service. Valve packing must be replaceable under line pressure. Provide valve with a wrench operator and a seal cap. Valve must be the straight or angle pattern design as indicated.

2.4.2 Check Valves

Valve must be the swing or lift type as required to provide positive shutoff at the differential pressure indicated. Valve must be provided with resilient seat.

2.4.3 Liquid Solenoid Valves

Provide valves that comply with AHRI 760 I-P and are suitable for continuous duty with applied voltages 15 percent under and 5 percent over nominal rated voltage at maximum and minimum encountered pressure and temperature service conditions. Valves must be direct-acting or pilot-operating type, packless, except that packed stem, seal capped, manual lifting provisions must be furnished. Provide solenoid coils that are moisture-proof, UL approved, totally encapsulated or encapsulated and metal jacketed as required. Valves must have safe working pressure of 610 psi and a maximum operating pressure differential of at least 200 psi at 85 percent rated voltage. Valves must have an operating pressure differential suitable for the refrigerant used.

2.4.4 Expansion Valves

Provide valve conforming to AHRI 750 I-P and ASHRAE 17. Valve must be the diaphragm and spring-loaded type with internal or external equalizers, and bulb and capillary tubing. Provide valve with an external superheat adjustment along with a seal cap. Internal equalizers may be utilized where flowing refrigerant pressure drop between outlet of the valve and inlet to the evaporator coil is negligible and pressure drop across the evaporator is less than the pressure difference corresponding to 2 degrees

F of saturated suction temperature at evaporator conditions. Bulb charge must be determined by the manufacturer for the application and such that liquid will remain in the bulb at all operating conditions. Do not use gas limited liquid charged valves and other valve devices for limiting evaporator pressure without a distributor or discharge tube or effective means to prevent loss of control when bulb becomes warmer than valve body. Pilot-operated valves must have a characterized plug to provide required modulating control. A de-energized solenoid valve may be used in the pilot line to close the main valve in lieu of a solenoid valve in the main liquid line. Provide an isolatable pressure gauge in the pilot line, at the main valve. Automatic pressure reducing or constant pressure regulating expansion valves may be used only where indicted or for constant evaporator loads.

2.4.5 Electronic Expansion Valves

Valve must conform to AHRI 1370 I-P and ASHRAE 17. The valve must prevent the return of liquid to the compressor in the event of power loss or low superheat.

2.4.6 Safety Relief Valves

Valve must be the two-way type, unless indicated otherwise. Valve must bear the ASME code symbol. Valve capacity must be certified by the National Board of Boiler and Pressure Vessel Inspectors. Valve must be of an automatically reseating design after activation.

2.4.7 Evaporator Pressure Regulators, Direct-Acting

Valve must include a diaphragm/spring assembly, external pressure adjustment with seal cap, and pressure gauge port. Valve must maintain a constant inlet pressure by balancing inlet pressure on diaphragm against an adjustable spring load. Pressure drop at system design load must not exceed the pressure difference corresponding to a 2 degrees F change in saturated refrigerant temperature at evaporator operating suction temperature. Spring must be selected for indicated maximum allowable suction pressure range.

2.4.8 Refrigerant Access Valves

Provide refrigerant access valves and hose connections in accordance with AHRI 720.

2.5 PIPING ACCESSORIES

2.5.1 Filter Driers

Driers must conform to AHRI 710 I-P. Sizes 5/8 inch and larger must be the full flow, replaceable core type. Sizes 1/2 inch and smaller must be the sealed type. Cores must be of suitable desiccant that will not plug, cake, dust, channel, or break down, and must remove water, acid, and foreign material from the refrigerant. Constructfilter driers so that none of the desiccant will pass into the refrigerant lines. Minimum bursting pressure must be 1,500 psi.

2.5.2 Sight Glass and Liquid Level Indicator

2.5.2.1 Assembly and Components

Assembly must be pressure- and temperature-rated and constructed of materials suitable for the service. Glass must be borosilicate type. Ferrous components subject to condensation must be electro-galvanized.

2.5.2.2 Gauge Glass

Gauge glass must include top and bottom isolation valves fitted with automatic checks, and packing followers; red-line or green-line gauge glass; elastomer or polymer packing to suit the service; and gauge glass guard.

2.5.2.3 Bull's-Eye and Inline Sight Glass Reflex Lens

Provide bull's-eye and inline sight glass reflex lens for dead-end liquid service. For pipe line mounting, provide two plain lenses in one body suitable for backlighted viewing.

2.5.2.4 Moisture Indicator

Indicator must be a self-reversible action, moisture reactive, color changing media. Indicator must be furnished with full-color-printing tag containing color, moisture, and temperature criteria. Unless otherwise indicated, the moisture indicator must be an integral part of each corresponding sight glass.

2.5.3 Vibration Dampeners

Dampeners must be of the all-metallic bellows and woven-wire type.

2.5.4 Flexible Pipe Connectors

Connector must be a composite of interior corrugated phosphor bronze or Type 300 Series stainless steel, as required for fluid service, with exterior reinforcement of bronze, stainless steel or monel wire braid. Assembly must be constructed with a safety factor of not less than 4 at300 degrees F. Unless otherwise indicated, the length of a flexible connector must be as recommended by the manufacturer for the service intended.

2.5.5 Strainers

Strainers used in refrigerant service must have brass or cast-iron body, Y-or angle-pattern, cleanable, not less than 60-mesh noncorroding screen of an area to provide net free area not less than ten times the pipe diameter with pressure rating compatible with the refrigerant service. Screens must be stainless steel or monel and reinforced spring-loaded where necessary for bypass-proof construction.

2.5.6 Pressure and Vacuum Gauges

Provide gauges conforming to ASME B40.100 with throttling type needle valve or a pulsation dampener and shut-off valve. Gauge must be a minimum of 3-1/2 inches in diameter with a range from 0 psig to approximately 1.5 times the maximum system working pressure. Select each gauge range so that at normal operating pressure, the needle is within the middle-third of the range.

2.5.7 Pipe Hangers, Inserts, and Supports

Provide pipe hangers, inserts, guides, and supports conforming to MSS SP-58.

2.5.8 Escutcheons

Escutcheons must be chromium-plated iron or chromium-plated brass, either one piece or split pattern, held in place by internal spring tension or set screws.

2.6 FABRICATION

2.6.1 Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, must be factory finished with the manufacturer's standard finish, except that items located outside of buildings must have weather resistant finishes that will withstand 3000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen must show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used must be coated with a zinc-rich coating conforming to ASTM D520, Type I.

2.6.2 Factory Applied Insulation

Factory installed insulation must be in accordance with ASHRAE 90.1 - IP. Refrigerant suction lines between the cooler and each compressor must be insulated with not less than 1/2 inch thick unicellular plastic foam. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors must have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces must have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes must be determined by ASTM E84. Test insulation in the same density and installed thickness as the material to be used in the actual construction. Test material supplied by a manufacturer with a jacket as a composite material. Provide jackets, facings, and adhesives that have a flame spread index less than 25 and a smoke developed index less than 50 when tested in accordance with ASTM E84.

PART 3 EXECUTION

3.1 INSTALLATION

Pipe and fitting installation must conform to the requirements of ASME B31.1. Cut pipe accurately to measurements established at the jobsite, and work into place without springing or forcing, completely clearing all windows, doors, and other openings. Cutting or other weakening of the building structure to facilitate piping installation is not permitted without written approval. Cut pipe or tubing square, remove by reaming, and permit free expansion and contraction without causing damage to the building structure, pipe, joints, or hangers.

3.1.1 Directional Changes

Make changes in direction with fittings, except that bending of pipe 4 inches and smaller is permitted, provided a pipe bender is used and wide weep bends are formed. Mitering or notching pipe or other similar construction to form elbows or tees is not permitted. The centerline radius of bends must not be less than 6 diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be accepted.

3.1.2 Functional Requirements

Install piping 1/2 inch/10 feet of pipe in the direction of flow to ensure adequate oil drainage. Properly cap or plug open ends of refrigerant lines or equipment during installation to keep moisture, dirt, or other foreign material out of the system. Piping must remain capped until installation. Equipment piping must be in accordance with the equipment manufacturer's recommendations and the contract drawings. Equipment and piping arrangements must fit into space allotted and allow adequate acceptable clearances for installation, replacement, entry, servicing, and maintenance.

3.1.3 Fittings and End Connections

3.1.3.1 Brazed Connections

Perform brazing in accordance with AWS BRH, except as modified herein. During brazing, fill the pipe and fittings with a pressure regulated inert gas, such as nitrogen, to prevent the formation of scale. Before brazing copper joints, clean both the outside of the tube and the inside of the fitting with a wire fitting brush until the entire joint surface is bright and clean. Do not use brazing flux on copper-to-copper connections. Remove surplus brazing material at all joints. Make steel tubing joints in accordance with the manufacturer's recommendations. Paint joints in steel tubing with the same material as the baked-on coating within 8 hours after joints are made. Protect tubing against oxidation during brazing by continuous purging of the inside of the piping using nitrogen. Support piping prior to brazing and do not spring or force.

3.1.4 Valves

3.1.4.1 General

Install refrigerant stop valves on each side of each piece of equipment such as compressors condensers, evaporators, receivers, and other similar items in multiple-unit installation, to provide partial system isolation as required for maintenance or repair. Install stop valves with stems horizontal unless otherwise indicated. Install ball valves must be installed with stems positioned to facilitate operation and maintenance. Isolating valves for pressure gauges and switches must be external to thermal insulation. Safety switches must not be fitted with isolation valves. Filter dryers having access ports may be considered a point of isolation. Purge valves must be provided at all points of systems where accumulated non-condensable gases would prevent proper system operation. Valves must be furnished to match line size, unless otherwise indicated or approved.

3.1.4.2 Expansion Valves

Install expansion valves with the thermostatic expansion valve bulb located on top of the suction line when the suction line is less than 2-1/8 inches in diameter and at the 4 o'clock or 8 o'clock position on lines larger than 2-1/8 inches. Fasten the bulb securely with two clamps. Insulate ehe bulb . Install the bulb in a horizontal portion of the suction line, if possible, with the pigtail on the bottom. If the bulb must be installed in a vertical line, the bulb tubing must be facing up.

3.1.4.3 Valve Identification

Tag each system valve, including those which are part of a factory assembly. Tags must be in alphanumeric sequence, progressing in direction of fluid flow. Tags must be embossed, engraved, or stamped plastic or nonferrous metal of various shapes, sized approximately 1-3/8 inch diameter, or equivalent dimension, substantially attached to a component or immediately adjacent thereto. Attach tags with nonferrous, heavy duty, bead or link chain, 14 gauge annealed wire, nylon cable bands or as approved. Reference tag numbers in Operation and Maintenance Manuals and system diagrams.

3.1.5 Vibration Dampers

Provide vibration damper in the suction and discharge lines on spring mounted compressors. Install vibration dampers parallel with the shaft of the compressor and anchor firmly at the upstream end on the suction line and the downstream end in the discharge line.

3.1.6 Strainers

Provide strainers immediately ahead of solenoid valves and expansion devices. Strainers may be an integral part of an expansion valve.

3.1.7 Filter Dryer

Provide a liquid line filter dryer on each refrigerant circuit located such that all liquid refrigerant passes through a filter dryer. Size dryers in accordance with the manufacturer's recommendations for the system in which it is installed. Install dryers such that it can be isolated from the system, the isolated portion of the system evacuated, and the filter dryer replaced. Install dryers in the horizontal position except replaceable core filter dryers may be installed in the vertical position with the access flange on the bottom.

3.1.8 Sight Glass

Install a moisture indicating sight glass in all refrigerant circuits down stream of all filter dryers and where indicated. Provide full line size sight glasses.

3.1.9 Discharge Line Oil Separator

Provide discharge line oil separator in the discharge line from each compressor. Connect the oil return line to the compressor as recommended by the compressor manufacturer.

3.1.10 Accumulator

Provide accumulators in the suction line to each compressor.

3.1.11 Flexible Pipe Connectors

Install connectors perpendicular to line of motion being isolated. Fit piping for equipment with bidirectional motion with two flexible connectors, in perpendicular planes. Install reinforced elastomer flexible connectors in accordance with manufacturer's instructions. Provide piping guides and restraints related to flexible connectors as required.

3.1.12 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports must conform to MSS SP-58, except as modified herein. Do not use pipe hanger types 5, 12, and 26. Fabricate hangers used to support piping 2 inches and larger to permit adequate adjustment after erection while still supporting the load. Support piping subjected to vertical movement, when operating temperatures exceed ambient temperatures, by variable spring hangers and supports or by constant support hangers.

3.1.12.1 Hangers

Do not use Type 3 on insulated piping. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

3.1.12.2 Inserts

Secure Type 18 inserts to concrete forms before concrete is placed. Continuous inserts which allow more adjustments may be used if they otherwise meet the requirements for Type 18 inserts.

3.1.12.3 C-Clamps

Torque Type 19 and 23 C-clamps in accordance with MSS SP-58 and have both locknuts and retaining devices, furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

3.1.12.4 Angle Attachments

Furnish Type 20 attachments used on angles and channels with an added malleable-iron heel plate or adapter.

3.1.12.5 Saddles and Shields

Where Type 39 saddle or Type 40 shield are permitted for a particular pipe attachment application, the Type 39 saddle, connected to the pipe, must be used on all pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Use Type 40 shields on all piping less than 4 inches and all piping 4 inches and larger carrying medium less than 60 degrees F. Use a high-density insulation insert of cellular glass under the Type 40 shield for piping 2 inches and larger.

3.1.12.6 Horizontal Pipe Supports

Space horizontal pipe supports as specified in MSS SP-58 and install a support no more than 1 foot from the pipe fitting joint at each change in

direction of the piping. Space pipe supports no more than 5 feet apart at valves. Pipe hanger loads suspended from steel joist with hanger loads between panel points in excess of 50 pounds must have the excess hanger loads suspended from panel points.

3.1.12.7 Vertical Pipe Supports

Support vertical pipe at each floor, except at slab-on-grade, and at intervals of not more than 15 feet not more than 8 feet from end of risers, and at vent terminations.

3.1.12.8 Pipe Guides

Provide Type 35 guides using, steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides where required to allow longitudinal pipe movement. Provide lateral restraints as required. Provide slide materials that are suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered.

3.1.12.9 Steel Slides

Where steel slides do not require provisions for restraint of lateral movement, an alternate guide method may be used. On piping 4 inches and larger, usea Type 39 saddle. On piping under 4 inches, a Type 40 protection shield may be attached to the pipe or insulation and freely rest on a steel slide plate.

3.1.12.10 High Temperature Guides with Cradles

Where there are high system temperatures and welding to piping is not desirable, the Type 35 guide must include a pipe cradle, welded to the guide structure and strapped securely to the pipe. Separate the pipe from the slide material by at least 4 inches, or by an amount adequate for the insulation, whichever is greater.

3.1.12.11 Multiple Pipe Runs

In the support of multiple pipe runs on a common base member, use a clip or clamp where each pipe crosses the base support member. Spacing of the base support members must not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run.

3.1.12.12 Structural Attachments

Attachment to building structure concrete and masonry must be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors must be applied with a safety factor not less than 5. Do not attach supports to metal decking. Construct masonry anchors for overhead applications of ferrous materials only. Provide structural steel brackets required to support piping, headers, and equipment, but not shown, under this section.

3.1.13 Pipe Alignment Guides

Provide pipe alignment guides where indicated for expansion loops, offsets, and bends and as recommended by the manufacturer for expansion joints, not to exceed 5 feet on each side of each expansion joint, and in lines 4 inches or smaller not more than 2 feet on each side of the joint.

3.1.14 Pipe Anchors

Provide anchors wherever necessary or indicated to localize expansion or to prevent undue strain on piping. Provide anchors consisting of heavy steel collars with lugs and bolts for clamping and attaching anchor braces, unless otherwise indicated. Install anchor braces in the most effective manner to secure the desired results using turnbuckles where required. Do not attach supports, anchors, or stays where they will injure the structure or adjacent construction during installation or by the weight of expansion of the pipeline. Where pipe and conduit penetrations of vapor barrier sealed surfaces occur, immediately anchor these items adjacent to each penetrated surface, to provide essentially zero movement within penetration seal. Submit detailed drawings of pipe anchors for approval before installation.

3.1.15 Building Surface Penetrations

Do not install sleeves in structural members except where indicated or approved. Provide galvanized sheet metal sleeves in non-load bearing surfaces conforming to ASTM A653/A653M, Coating Class G-90, 20 gauge. Provide uncoated carbon steel pipe sleeves in load bearing surfaces conforming to ASTM A53/A53M, Standard weight. Apply sealants to moisture and oil-free surfaces and elastomers to not less than 1/2 inch depth. Do not install sleeves in structural members.

3.1.15.1 General Service Areas

Extend each sleeve through its respective wall, floor, or roof, and cut flush with each surface. Provide pipes passing through concrete or masonry wall or concrete floors or roofs with pipe sleeves fitted into place at the time of construction. Provide sleeves that allow a minimum of 1/4 inch all-around clearance between bare pipe and sleeves or between jacketed-insulation and sleeves. Except in pipe chases or interior walls, seal the annular space between pipe and sleeve or between jacket over-insulation and sleeve in accordance with Section 07 92 00 JOINT SEALANTS.

3.1.15.2 Waterproof Penetrations

Install pipes passing through roof or floor waterproofing membrane through a 17 ounce copper sleeve, or a 0.032 inch thick aluminum sleeve, each within an integral skirt or flange. Form flashing sleeve, and extend skirt or flange greater than 8 inches from the pipe and set over the roof or floor membrane in a troweled coating of bituminous cement. Extend the flashing sleeve up the pipe a minimum of 2 inches above the roof or floor penetration. Seal the annular space between the flashing sleeve and the bare pipe or between the flashing sleeve and the metal-jacket-covered insulation as indicated. Seal penetrations by either one of the following methods.

3.1.15.2.1 Waterproofing Clamping Flange

Pipes up to and including 10 inches in diameter passing through roof or floor waterproofing membrane may be installed through a cast iron sleeve with caulking recess, anchor lugs, flashing clamp device, and pressure ring with brass bolts. Clamp waterproofing membrane into place and place sealant in the caulking recess.

3.1.15.2.2 Modular Mechanical Type Sealing Assembly

In lieu of a waterproofing clamping flange and caulking and sealing of annular space between pipe and sleeve or conduit and sleeve, a modular mechanical type sealing assembly may be installed. Provide seals consisting of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe/conduit and sleeve with corrosion protected carbon steel bolts, nuts, and pressure plates. Loosely assemble links with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut. After the seal assembly is properly positioned in the sleeve, tighten the bolt to cause the rubber sealing elements to expand and provide a watertight seal between the pipe/conduit and the sleeve. Size each seal assembly as recommended by the manufacturer to fit the pipe/conduit and sleeve involved. The Contractor electing to use the modular mechanical type seals must provide sleeves of the proper diameters.

3.1.15.3 Fire-Rated Penetrations

Seal penetration of fire-rated walls, partitions, and floors as specified in Section 07 84 00 FIRESTOPPING.

3.1.15.4 Escutcheons

Provide escutcheons for finished surfaces where exposed piping, bare or insulated, pass through floors, walls, or ceilings, except in boiler, utility, or equipment rooms. Where sleeves project slightly from floors, use special deep-type escutcheons. Secure escutcheon to pipe or pipe covering.

3.1.16 Access Panels

Provide access panels for all concealed valves, vents, controls, and items requiring inspection or maintenance. Provide access panels of sufficient size and locate so that the concealed items may be serviced and maintained or completely removed and replaced. Provide access panels as specified in Section 08 31 00 ACCESS DOORS AND PANELS.

3.1.17 Field Applied Insulation

Field installed insulation is specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as defined differently herein.

3.1.18 Field Painting

Painting required for surfaces not otherwise specified, and finish painting of items only primed at the factory are specified in Section 09 90 00 PAINTS AND COATINGS.

3.1.18.1 Color Coding

Color coding for piping identification is specified in Section 09 90 00 PAINTS AND COATINGS.

3.1.18.2 Color Coding Scheme

Provide a color coding scheme for locating hidden piping in accordance with Section 22 00 00 PLUMBING, GENERAL PURPOSE.

3.1.19 Identification Tags

Provide identification tags made of brass, engraved laminated plastic or engraved anodized aluminum indicating service and item number on all valves and dampers. Tags must be 1-3/8 inch minimum diameter and marking must be stamped or engraved. Indentations must be black for reading clarity. Attach tags to valves with No. 12 AWG copper wire, chrome-plated beaded chain or plastic straps designed for that purpose.

3.2 CLEANING AND ADJUSTING

Clean uncontaminated system(s) by evacuation and purging procedures currently recommended by refrigerant and refrigerant equipment manufacturers, and as specified herein, to remove small amounts of air and moisture. Systems containing moderate amounts of air, moisture, contaminated refrigerant, or any foreign matter are considered contaminated systems. Restore contaminated systems to clean condition including disassembly, component replacement, evacuation, flushing, purging, and re-charging, using currently approved refrigerant and refrigeration manufacturer's procedures. Restore contaminated systems at no additional cost to the Government as determined by the Contracting Officer. Do not use water in any procedure or test.

3.3 TRAINING COURSE

a. Submit a schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training. Conduct a training course for 6 members of the operating staff as designated by the Contracting Officer. The training period must consist of a total 4 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests.

b. Cover all of the items contained in the approved operation and maintenance manuals.

c. Submit 6 complete copies of an operation manual in bound 8 1/2 by 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. Include the manufacturer's name, model number, and parts list in the booklets. Include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features in the manuals.

d. Submit 6 complete copies of maintenance manual in bound 8 1/2 x 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. Include piping layouts and simplified wiring and control diagrams of the system as installed in the manuals.

3.4 REFRIGERANT PIPING TESTS

After all components of the refrigerant system have been installed and connected, subject the entire refrigeration system to pneumatic, evacuation, and startup tests as described herein. Submit a schedule, at least 2 weeks prior to the start of related testing, for each test. Identify the proposed date, time, and location for each test. Conduct tests in the presence of the Contracting Officer. Water and electricity

required for the tests will be furnished by the Government. Provide all material, equipment, instruments, and personnel required for the test. Provide the services of a qualified technician, as required, to perform all tests and procedures indicated herein. Coordinate field tests with Section 23 05 93 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS. Submit 6 copies of the tests report in bound 8 1/2 by 11 inch booklets documenting all phases of the tests performed. Include initial test summaries, all repairs/adjustments made, and the final test results in the report.

3.4.1 Preliminary Procedures

Prior to pneumatic testing, isolate equipment which has been factory tested and refrigerant charged as well as equipment which could be damaged or cause personnel injury by imposed test pressure, positive or negative, from the test pressure, or remove from the system. Remove safety relief valves and rupture discs that are not part of factory sealed systems, and cap or plug openings.

3.4.2 Pneumatic Test

Provide pressure control and excess pressure protection at the source of test pressure. Valves must be wide open, except those leading to the atmosphere. Test gas must be dry nitrogen, with minus 70 degree F dewpoint and less than 5 ppm oil. Apply test pressure in two stages before any refrigerant pipe is insulated or covered. In accordance with ASME B31.5, a preliminary test not to exceed 25 psi must be applied as a means of locating major leaks. Every joint being tested must be coated with a thick soap or color indicating solution. The second stage test pressure must be at least 110 percent of the design pressure, but cannot exceed 130 percent of the design pressure of any component in the system. For large systems that are not completely visible, the pressure in the system must be gradually increased to one-half of the test pressure after which the pressure must be increased in steps of one-tenth of the test pressure, until the required test pressure has been reached. The test pressure must be continuously maintained for at leas 24 hours, after which it can be reduced to the leak test pressure. A correction factor of 0.3 psi will be allowed for each degree F change between test space initial and final ambient temperature, plus for increase and minus for a decrease. The leak test pressure must be the design pressure, or a pressure specified in the engineering design. To repair leaks, the joint must be taken apart, thoroughly cleaned, and reconstructed as a new joint. Joints repaired by caulking, re-melting, or back-welding/brazing are not acceptable. Following repair, the entire system must be retested using the pneumatic tests described above. Reassemble the entire system once the pneumatic tests are satisfactorily completed.

3.4.3 Evacuation Test

Following satisfactory completion of the pneumatic tests, relieve the pressure and evacuate the entire system to an absolute pressure of 300 micrometers. During evacuation of the system, the ambient temperature must be higher than 35 degrees F. Do not evacuate no more than one system at one time by one vacuum pump. Once the desired vacuum has been reached, close the vacuum line and allow the system to stand for 1 hour. If the pressure rises over 500 micrometers after the 1 hour period, evacuate the system again down to 300 micrometers and let set for another 1 hour period. Do not charge the system until a vacuum of at least 500 micrometers is maintained for a period of 1 hour without the assistance of

a vacuum line. If during the testing the pressure rises above 500 micrometers, continue to repeat the evacuation procedures until all residual moisture has been removed. During evacuation, record pressures by a thermocouple-type, electronic-type, or a calibrated-micrometer type gauge.

3.4.4 System Charging and Startup Test

Following satisfactory completion of the evacuation tests, charge the system with the required amount of refrigerant by raising pressure to normal operating pressure and in accordance with manufacturer's procedures. Following charging, the system must operate with high-side and low-side pressures and corresponding refrigerant temperatures, at design or improved values. Test the entire system tested for leaks. Test fluorocarbon systems with halide torch or electronic leak detectors.

3.4.5 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system must be immediatelyisolated from the remainder of the system and the refrigerant pumped into the system receiver or other suitable container. The refrigerant must not be discharged into the atmosphere.

3.4.6 Contractor's Responsibility

At all times during the installation and testing of the refrigeration system, take steps to prevent the release of refrigerants into the atmosphere. The steps must include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time will the allowable leak rate exceed the leak rates allowed in Section 608 of the Clean Air Act: 30 percent of the full charge per year for industrial refrigeration, 20 percent of the full charge per year for commercial refrigeration, and 10 percent of the full charge per year for comfort cooling. Any system leaks within the first year must be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

-- End of Section --

SECTION 23 24 00

HYDRONIC PIPE CLEANING AND FLUSHING PROCEDURES

08/10

PART 1 GENERAL

1.1 PERFORMANCE REQUIREMENTS

Cleaning and flushing shall remove organic soil, hydrocarbons, flux, pipe mill varnish, pipe compounds, iron oxide, and like deleterious substances. Removal of tightly adherent mill scale is not required.

1.2 DELIVERY, STORAGE, AND HANDLING

Handle and store detergent to protect equipment, environment and persons. Store detergent according to manufacturer's recommendations.

1.3 ENVIRONMENTAL REQUIREMENTS

All chemicals shall be acceptable for discharge into sanitary sewer.

1.4 SUBMITTALS

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Cleaning Detergent

Water Treatment Chemicals and Chemical Supplier

PART 2 PRODUCTS

2.1 MATERIALS

The cleaning compound/detergent shall be an alkaline phosphate or non-phosphate detergent/surfactant/specific to remove organic soil, hydrocarbons, flux, pipe mill varnish, pipe compounds, iron oxide, and like deleterious substances, with or without inhibitor, suitable for system wetted metals without deleterious effects.

Cleaning compound/detergent shall not contain corrosion inhibitors such as sodium nitrite, molybdate, etc. The only corrosion inhibitor that may be used in conjunction with detergent is sodium sulfite (an oxygen scavenger).

Suggested detergent is trisodium phosphate.

Sodium sulfite, sodium lauroly sarcosinate, and dipotossium phosphate are used for water treatment.

PART 3 EXECUTION

3.1 PROTECTION

Do not exceed service factor amperage on pump motor.

3.1.1 Special Techniques

a. Use existing steam heating system to maintain a water temperature of 120F.

b. Close terminal unit service valves and open bypass valve. Flushing bypass should connect upstream of the terminal unit supply service valve and downstream of the return service valve. If necessary, provide temporary piping or hose to bypass terminal unit. Remove any component which may be damaged. In lieu of providing a bypass, three-way valves may be driven 100 percent to bypass. If three-way valves are utilized, do not close service valves.

c. Fill system with water and detergent solution to manufacture's specified water/detergent concentration, heat to 120F. Test both systems to determine system volume using fluorescent dye and fluorometric analysis.

d. Operate system pump, hot water pump and circulate solution for a minimum of 48 hrs, while maintaining 120 F. From bottom of air/solids separator, bleed water as necessary while filling system thru standard fill station ensuring to maintain the manufacturer's specified water/detergent concentration. Modulate drain to maintain system pressure. Do not exceed service factor amperage on pump motor. Throttle discharge valve as necessary. The pump start up strainer shall remain in place. Periodically clean the pump strainer. Also, periodically check and clean terminal unit strainers during the 48 hours of cleaning.

e. Open terminal device service valves, three-way valves, and close bypass valves. Flush each terminal device. Ensure to clean all strainers before opening terminal device service valves. Repeat "Step d" for the terminal devices for a minimum of 48 hour.

f. Drain system and thoroughly flush with fresh water. Demonstrate to Government that system water runs clear. Coordinate with Construction Manager to provide sample water opacity.

g. Clean all strainers. Remove pump startup strainer.

h. The water shall be treated to the following chemical parameters:

Sodium sulfite:	30-100 ppm
Sodium lauroyl sarcosinate:	30-100 ppm
pH:	8.5 - 9.5 (use Dipotassium Phosphate as pH buffer)

The water chemical levels shall be retested in one day, one week and four weeks following initial treatment. If the chemical levels are not within the range specified above, additional treatment shall be conducted to bring the levels within range.

Prepare a report documenting the water system volume, pH, and sulfite concentration levels for the initial treatment and the subsequent three retests and necessary treatment. Submit report to government contracting officer and the Camp Lejeune mechanical design branch.

Provide material safety data sheets (MSDS) for treatment chemicals and permanently locate a copy in each mechanical room.

Provide one plastic sign no smaller than 12"x12" square with engraved lettering ½" in height. Sign shall be located in the mechanical room. It shall be hung on the wall in an area with an unobstructed view and near the respective chemical shot feeder.

The sign shall state the respective system volume (determined from testing and verified by hand calculations) and the following:

"This hydronic system is treated to the following chemical parameters:

Sodium sulfite:	30-100 ppm
Sodium lauroyl sarcosinate:	30-100 ppm
pH*:	8.5 - 9.5

System Volume:

*use Dipotassium Phosphate as pH buffer"

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 25 00

CHEMICAL TREATMENT OF WATER FOR MECHANICAL SYSTEMS
05/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B40.100	(2022) Pressure Gauges and Gauge Attachments

ASTM INTERNATIONAL (ASTM)

ASTM D596	(2001; R 2018) Standard Guide for Reporting Results of Analysis of Water
ASTM D2688	(2015; E 2016) Standard Test Method for Corrosivity of Water in the Absence of Heat Transfer (Weight Loss Methods)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Water Analysis; G

Spare Parts

Field Instructions

Tests; G

Training Course; G

1.3 MAINTENANCE MATERIAL SUBMITTALS

Submit spare parts data for each different item of material and equipment specified, after approval of the detail drawings, not later than 3 months prior to the date of beneficial occupancy. Include a complete list of parts and supplies, with source of supply, with the data.

1.4 QUALITY CONTROL

1.4.1 Safety

Ensure exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel are insulated, fully enclosed, guarded, or fitted with other types of safety devices. Install safety devices so that proper operation of equipment is not impaired..

1.4.2 Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. Carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect all equipment delivered and placed in storage from the weather, humidity and temperature variations, dirt and dust, or other contaminants.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

2.1.1 Summary

This section covers the provisions and installation procedures necessary for a complete and totally functional water system(s) chemical treatment. Provide and install the system with all necessary System Components, Accessories, Piping Components, and Supplemental Components/Services.
.

2.1.2 Standard Products

a. Provide materials and equipment which are standard products of a manufacturer regularly engaged in the manufacturing of such products, that are of a similar material, design and workmanship and that have been in satisfactory commercial or industrial use for two years' prior to bid opening.

b. Include in the two-year use all applications of equipment and materials under similar circumstances and of similar size. Ensure the two years' experience has been satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a two-year field service record are acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown.

c. All products are required to be supported by a service organization. Submit a certified list of qualified permanent service organizations for support of the equipment, including their addresses and qualifications. These service organizations are required to be reasonably convenient to the equipment installation and able to render

satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

d. The selected service organization provides the chemicals required, the concentrations required, and the water treatment equipment sizes and flow rates required. The company provides all chemicals required for the chilled and hot water systems and fills the systems with chemicals to the levels specified. The chemical is required to meet the requirements of this specification as well as the recommendations from the manufacturers of the condenser and cooling tower. Acid treatment chemicals are not allowed to be used.

2.1.3 Water Analysis

Conditions of make-up water to be supplied to the hot and chilled water systems reported in accordance with ASTM D596 are as follows:

Date of Sample	____
Temperature	____ degrees C
Silica (SiO 2)	____ ppm (mg/L)
Insoluble	____ ppm (mg/L)
Iron, total (Fe)	____ ppm (mg/L)
Aluminum (Al)	____ ppm (mg/L)
Calcium (Ca)	____ ppm (mg/L)
Magnesium (Mg)	____ ppm (mg/L)
Carbonate (HCO 3)	____ ppm (mg/L)
Sulfate (SO 4)	____ ppm (mg/L)
Chloride (Cl)	____ ppm (mg/L)
Nitrate (NO 3)	____ ppm (mg/L)
Turbidity	____ ntu
pH	____
Residual Chlorine	____ ppm (mg/L)
Total Alkalinity	____ ppm (mg/L)
Non-Carbonate Hardness	____ ppm (mg/L)
Total Hardness	____ ppm (mg/L)
Dissolved Solids	____ ppm (mg/L)

Conductivity	____ Micromho/cm

2.2 EQUIPMENT

2.2.1 Nameplates

Provide a nameplate for each major component of equipment that includes the manufacturer's name, address, type or style, and catalog or serial number securely attached to the item of equipment.

2.2.2 Gauges

Provide gauges that conform to ASME B40.100, Class 1, 2, or 3, Style X, Type I or III as required, 4-1/2 inches in diameter with phenolic or metal case.

2.3 COMPONENTS

2.3.1 Chilled Water System

Provide a 5 gallon shot feeder on the chilled water piping as indicated. Furnish the feeder with an air vent, gauge glass, funnel, valves, fittings, and piping.

2.3.1.1 Chilled Water Treatment

Treat chilled water with either a borax/nitrite type treatment or a molybdate type treatment.

2.3.1.2 Chilled Water Test Kits

Provide one test kit of each type required to determine the water quality as outlined within the operation and maintenance manuals (e.g. pH and nitrite or molybdate).

2.3.2 Low and Medium Temperature Hot Water

2.3.2.1 Chemical Feeder

Provide a 5 gallon shot feeder on the hot water piping as indicated. Base the size and capacity of feeder upon local requirements and water analysis. Furnish the feeder with an air vent, gauge glass, funnel, valves, fittings, and piping.

2.3.2.2 Low and Medium Temperature Hot Water Treatment

Treat hot water with either a borax/nitrite type treatment or a molybdate type treatment. Both types of treatment are acceptable to use with glycol. Maintain borax/nitrite treatment at the limits of 600 to 1000 ppm nitrite, 40 - 50 ppm copper corrosion inhibitor (TT or MBT) and pH of 8.5 to 9.5. Maintain molybdate treatment at the limits of 100 to 125 ppm molybdate, 40 - 50 ppm copper corrosion inhibitor (TT or MBT) and pH of 8.0 to 9.0.

2.3.2.3 Test Kit Requirements

Provide one test kit of each type required to determine the water quality as outlined within the operation and maintenance manuals (e.g. pH and nitrite or molybdate).

2.3.3 Test Kit

Provide one test kit of each type required to determine the water quality as outlined within the operation and maintenance manuals (e.g. pH, hardness and sulfite).

2.3.4 Supplemental Components/Services

Ensure drain and makeup water piping complies with the requirements of Section 22 00 00 PLUMBING, GENERAL PURPOSE. Connect drains to sanitary sewer systems by means of an indirect waste connection.

PART 3 EXECUTION

3.1 EXAMINATION

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy, before performing any work.

3.2 INSTALLATION

Provide all chemicals, equipment and labor necessary to bring all system waters in conformance with the specified requirements. Perform all work in accordance with the manufacturer's published diagrams, recommendations, and equipment warranty requirements.

3.2.1 Piping

Fabricate all connections between dissimilar metals using dielectric unions.

3.3 FIELD QUALITY CONTROL

3.3.1 Tests

If the waters of the mechanical systems are not in conformance with the specified requirements or in accordance with manufacturer's recommendations, the contractor is required to direct the water treatment company to take corrective action to achieve compliance. Perform daily operational tests in the directed frequencies to maintain required control to prevent corrosion, scaling and damage to equipment during operation. Submit test schedules, at least 2 weeks prior to the start of related testing, for the chilled/hot water quality tests. Identify the date, time, frequency and collection location for each test within the schedules.

3.3.2 Chilled Water Testing (monthly)

Perform the following tests on chilled water on a monthly basis.

pH	____
Nitrite or Molybdate	____ ppm (mg/L)
Conductivity	____ micromho/cm

3.3.3 Hot Water Quality Testing

3.3.3.1 Low and Medium Temperature Systems (monthly)

Complete and record monthly testing for the following parameters.

pH	____
Nitrite or Molybdate	____ ppm (mg/L)

3.3.4 Quality Assurance Testing

Conduct QA testing periodically by an independent water treatment lab/consultant to verify to managers that the mechanical and water treatment systems are being maintained properly. Provide the QA evaluation reports to the government COR.

3.3.4.1 Chilled Water Quality Assurance Testing (quarterly)

Perform the following tests quarterly on chilled water.

pH	____
Nitrite or Molybdate	____ ppm (mg/L)
Conductivity	____ micromho/cm
Iron (total, as Fe(2)O(3))	____ ppm (mg/L)
Written evaluation summary	

3.3.4.2 Hot Water Quality Assurance Testing

a. Complete quarterly testing of Low and Medium Temperature Systems and record the following parameters.

pH	____
Nitrite or Molybdate	____ ppm (mg/L)
Iron (total, as Fe(2)O(3))	____ ppm (mg/L)

Written evaluation summary	

b. Have an independent consultant analyze the hot water once a month for a period of 1 year. Include the following information recorded in accordance with ASTM D596 in the monthly report.

pH	____
Sulfite (Na2SO3)	____ ppm (mg/L)
Hardness(as CaCO3)	____ ppm (mg/L)
Iron (total, as Fe(2)O(3))	____ ppm (mg/L)
Written evaluation summary	

3.3.5 Corrosion Testers

Install corrosion coupon and rack systems to verify corrosion control in the systems. Install testers or coupons in flowing system water through a sidestream or rack system. Test both mild steel and copper metal samples in the corrosion testers in accordance with ASTM D2688. Replace and analyze samples every 3 months. Rates of corrosion less than 3 mpy for steel and 0.2 mpy for copper are acceptable. Install corrosion testers on the piping systems of the following systems.

Chilled water system
Hot water loop

3.4 CLOSEOUT ACTIVITIES

3.4.1 Training Course

Submit a schedule, at least 2 weeks prior to the date of the proposed training course that identifies the date, time, and location for the training. Conduct a training course for the operating staff as designated by the Contracting Officer. Conduct the training to include a total of 8 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests. Submit field instructions, at least 2 weeks prior to construction completion, including equipment layout, wiring and control diagrams, piping, valves and control sequences, and typed condensed operation instructions. Include within the condensed operation instructions all preventative maintenance procedures, methods of checking the system for normal and safe operation, and procedures for safely starting and stopping the system. Frame the posted instructions under glass or laminated plastic and post where indicated by the Contracting Officer. Ensure the field instructions cover all of the items contained in the Operation and Maintenance Manuals as well as demonstrations of routine maintenance operations.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 30 00

HVAC AIR DISTRIBUTION
02/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. (AMCA)

AMCA 201	(2002; R 2011) Fans and Systems
AMCA 210	(2025) Laboratory Methods of Testing Fans for Certified Aerodynamic Performance Rating
AMCA 300	(2014) Reverberant Room Method for Sound Testing of Fans
AMCA 301	(2014) Methods for Calculating Fan Sound Ratings from Laboratory Test Data
AMCA 500-D	(2018) Laboratory Methods of Testing Dampers for Rating
AMCA 511	(2010; R 2016) Certified Ratings Program for Air Control Devices

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI 260 I-P	(2012) Sound Rating of Ducted Air Moving and Conditioning Equipment
AHRI 410	(2001; Addendum 1 2002; Addendum 2 2005; Addendum 3 2011) Forced-Circulation Air-Cooling and Air-Heating Coils
AHRI 430	(2009) Central-Station Air-Handling Units
AHRI 1060 I-P	(2014) Performance Rating of Air-to-Air Heat Exchangers for Energy Recovery Ventilation Heat Equipment

AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA)

ABMA 9	(2015) Load Ratings and Fatigue Life for Ball Bearings
ABMA 11	(2014; R 2020) Load Ratings and Fatigue Life for Roller Bearings

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 52.2	(2025) Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size
ASHRAE 62.1	(2016) Ventilation for Acceptable Indoor Air Quality
ASHRAE 70	(2023) Method of Testing the Performance of Air Outlets and Inlets
ASHRAE 84	(2024) Method of Testing Air-to-Air Heat/Energy Exchangers

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A240/A240M	(2025a) Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
ASTM A924/A924M	(2022a) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B766	(2023) Standard Specification for Electrodeposited Coatings of Cadmium
ASTM C553	(2024) Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
ASTM C1071	(2025) Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)
ASTM D520	(2025) Standard Specification for Zinc Dust Pigment
ASTM D1654	(2008; R 2016; E 2017) Standard Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D3359	(2017) Standard Test Methods for Rating Adhesion by Tape Test
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

ASTM E2016	(2022) Standard Specification for Industrial Woven Wire Cloth
ASTM G21	(2015; R 2021; E 2021) Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

INTERNATIONAL CODE COUNCIL (ICC)

ICC IMC	(2024) International Mechanical Code

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)

IEC 60034-30-1	(2014) Rotating Electrical Machines – Part 30-1: Efficiency Classes of Line Operated AC Motors (IE Code)

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO 21940-11	(2016) Mechanical vibration -- Rotor balancing -- Part 11: Procedures and Tolerances for Rotors with Rigid Behavior

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 00001	(2024) Motors and Generators
NEMA MG 10	(2017) Energy Management Guide for Selection and Use of Fixed Frequency Medium AC Squirrel-Cage Polyphase Induction Motors
NEMA MG 10009	(2022) Energy Management Guide for Selection and Use of Single-Phase Motors

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(2025) Standard for Fire Doors and Other Opening Protectives
NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems
NFPA 701	(2023; ERTA 1 2023) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

ANSI/SMACNA 006	(2020) HVAC Duct Construction Standards

	Metal and Flexible
SMACNA 1819	(2022) Fire, Smoke and Radiation Damper Installation Guide for HVAC Systems, 5th Edition

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 82	Protection of Stratospheric Ozone

UL SOLUTIONS (UL)

UL 6	(2022) UL Standard for Safety Electrical Rigid Metal Conduit-Steel
UL 181	(2013; Reprint Dec 2021) UL Standard for Safety Factory-Made Air Ducts and Air Connectors
UL 555	(2006; Reprint Aug 2016) UL Standard for Safety Fire Dampers
UL 586	(2009; Reprint Sep 2022) UL Standard for Safety High-Efficiency Particulate, Air Filter Units
UL 705	(2017; Reprint Sep 2024) UL Standard for Safety Power Ventilators
UL 900	(2015; Reprint Aug 2022) UL Standard for SafetyStandard for Air Filter Units
UL 1995	(2015; Reprint Aug 2022) UL Standard for Safety Heating and Cooling Equipment
UL Bld Mat Dir	(updated continuously online) Building Materials Directory
UL Fire Resistance	(2014) Fire Resistance Directory

1.2 SYSTEM DESCRIPTION

Furnish ductwork, piping offsets, fittings, and accessories as required to provide a complete installation. Coordinate the work of the different trades to avoid interference between piping, equipment, structural, and electrical work. Provide complete, in place, all necessary offsets in piping and ductwork, and all fittings, and other components, required to install the work as indicated and specified.

1.2.1 Mechanical Equipment Identification

The number of charts and diagrams must be equal to or greater than the number of mechanical equipment rooms. Where more than one chart or diagram per space is required, mount these in edge pivoted, swinging leaf, extruded aluminum frame holders which open to 170 degrees.

1.2.1.1 Charts

Provide chart listing of equipment by designation numbers and capacities such as flow rates, pressure and temperature differences, heating and cooling capacities, horsepower, pipe sizes, and voltage and current characteristics.

1.2.1.2 Diagrams

Submit proposed diagrams, at least 2 weeks prior to start of related testing. provide neat mechanical drawings provided with extruded aluminum frame under 1/8-inch glass or laminated plastic, system diagrams that show the layout of equipment, piping, and ductwork, and typed condensed operation manuals explaining preventative maintenance procedures, methods of checking the system for normal, safe operation, and procedures for safely starting and stopping the system. After approval, post these items where directed.

1.2.2 Service Labeling

1.2.2.1 Equipment Labeling

Label equipment as indicated below with labels made of self-sticking, plastic film designed for permanent installation. Provide labels in accordance with the typical examples below:

SERVICE	LABEL AND TAG DESIGNATION
Air handling unit Number	AHU - #
Dedicated Outdoor Air System Number	DOAS - #
Exhaust Fan Number	EF - #
Heat Exchanger Unit Number	HX - #
Unit Heater Number	UH - #

1.2.2.2 Pipe Labeling

Identify similar services with different temperatures or pressures. Where pressures could exceed 125 pounds per square inch, gage, include the maximum system pressure in the label. Color coding of all piping systems must be in accordance with ASME A13.1 . Label and arrow piping in accordance with the following:

a. Each point of entry and exit of pipe passing through walls.

b. Each change in direction, i.e., elbows, tees.

c. In congested or hidden areas and at all access panels at each point required to clarify service or indicated hazard.

d. In long straight runs, locate labels at distances within eyesight of each other not to exceed 75 feet. All labels must be visible and legible from the primary service and operating area.

e.

For Bare or Insulated Pipes	
for Outside Diameters of	Lettering
1/2 thru 1-3/8 inch	1/2 inch
1-1/2 thru 2-3/8 inch	3/4 inch
2-1/2 inch and larger	1-1/4 inch

1.2.2.3 Ductwork Labeling

Label ductwork with 2 inch lettering indicating the type of ductwork, associated air handling device and arrow indiccating direction of airflow. Coordinate ductwork labeling with any duct insulation and painting requirements to assure labeling is visible on final installation. Duct labels are to be black text on white background, produced by either paint/stenciling or made of self-sticking, plastic film designed for permanent installation. Locations of ductwork labels are to be in accordance with the following:

a. Each point of entry and exit of ductwork passing through walls.

b. In congested or hidden areas and at all access panels at each point required to clarify service.

c. In long straight runs, locate labels at distances within eyesight of each other not to exceed 75 feet.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Insulated Nonmetallic Flexible Duct Runouts

Duct Connectors

Duct Access Doors; G

Fire Dampers; G

Manual Balancing Dampers; G

Gravity Backdraft and Relief Dampers; G

Diffusers

Registers and Grilles

Louvers

Air Vents, Penthouses, and Goosenecks

In-Line Centrifugal Fans

Propeller Type Sidewall Fans

Air Handling Units; G

Energy Recovery Devices; G

Test Procedures

Diagrams; G

Indoor Air Quality for Duct Sealants; S

SD-06 Test Reports

Performance Tests; G

Damper Acceptance Test; G

SD-07 Certificates

Bolts

Ozone Depleting Substances Technician Certification

SD-08 Manufacturer's Instructions

Manufacturer's Installation Instructions

Operation and Maintenance Training

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G

Fire Dampers; G

Manual Balancing Dampers; G

In-Line Centrifugal Fans; G

Propeller Type Sidewall Fans; G

Air Handling Units; G

Energy Recovery Devices; G

SD-11 Closeout Submittals

Indoor Air Quality During Construction; S

1.4 QUALITY ASSURANCE

Except as otherwise specified, approval of materials and equipment is

based on manufacturer's published data.

a. Where materials and equipment are specified to conform to the standards of the Underwriters Laboratories, the label of or listing with reexamination in UL Bld Mat Dir, and UL 6 is acceptable as sufficient evidence that the items conform to Underwriters Laboratories requirements. In lieu of such label or listing, submit a written certificate from any nationally recognized testing agency, adequately equipped and competent to perform such services, stating that the items have been tested and that the units conform to the specified requirements. Outline methods of testing used by the specified agencies.

b. Where materials or equipment are specified to be constructed or tested, or both, in accordance with the standards of the ASTM International (ASTM), the ASME International (ASME), or other standards, a manufacturer's certificate of compliance of each item is acceptable as proof of compliance.

c. Conformance to such agency requirements does not relieve the item from compliance with other requirements of these specifications.

d. Where products are specified to meet or exceed the specified energy efficiency requirement of FEMP-designated or ENERGY STAR covered product categories, equipment selected must have as a minimum the efficiency rating identified under "Energy-Efficient Products" at http://femp.energy.gov/procurement.

1.4.1 Prevention of Corrosion

Protect metallic materials against corrosion. Provide rust-inhibiting treatment and standard finish for the equipment enclosures. Do not use aluminum in contact with earth, and where connected to dissimilar metal. Protect aluminum by approved fittings, barrier material, or treatment. Provide hot-dip galvanized ferrous parts such as anchors, bolts, braces, boxes, bodies, clamps, fittings, guards, nuts, pins, rods, shims, thimbles, washers, and miscellaneous parts not of corrosion-resistant steel or nonferrous materials in accordance with ASTM A123/A123M for exterior locations and cadmium-plated in conformance with ASTM B766 for interior locations. Provide written certification from the bolt manufacturer that the bolts furnished comply with the requirements of this specification. Include illustrations of product markings, and the number of each type of bolt to be furnished in the certification.

1.4.2 Asbestos Prohibition

Do not use asbestos and asbestos-containing products.

1.4.3 Ozone Depleting Substances Technician Certification

All technicians working on equipment that contain ozone depleting refrigerants must be certified as a Section 608 Technician to meet requirements in 40 CFR 82, Subpart F. Provide copies of technician certifications to the Contracting Officer at least 14 calendar days prior to work on any equipment containing these refrigerants.

1.4.4 Detail Drawings

Submit detail drawings showing equipment layout, including assembly and

installation details and electrical connection diagrams; ductwork layout showing the location of all supports and hangers, typical hanger details, gauge reinforcement, reinforcement spacing rigidity classification, and static pressure and seal classifications. Include any information required to demonstrate that the system has been coordinated and functions properly as a unit on the drawings and show equipment relationship to other parts of the work, including clearances required for operation and maintenance. Submit drawings showing bolt-setting information, and foundation bolts prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Submit function designation of the equipment and any other requirements specified throughout this Section with the shop drawings.

1.4.5 Test Procedures

Conduct performance tests as required in Section 23 05 93 Testing, Adjusting and Balancing for HVAC and Section 23 09 00 Instrumentation and Control for HVAC.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect stored equipment at the jobsite from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Additionally, cap or plug all pipes until installed.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Except for the fabricated duct, plenums and casings specified in paragraphs "Metal Ductwork" and "Plenums and Casings for Field-Fabricated Units",
provide components and equipment that are standard products of manufacturers regularly engaged in the manufacturing of products that are of a similar material, design and workmanship. This requirement applies to all equipment, including diffusers, registers, fire dampers, and balancing dampers.

a. Standard products are defined as components and equipment that have been in satisfactory commercial or industrial use in similar applications of similar size for at least two years before bid opening.

b. Prior to this two year period, these standard products must have been sold on the commercial market using advertisements in manufacturers' catalogs or brochures. These manufacturers' catalogs, or brochures must have been copyrighted documents or have been identified with a manufacturer's document number.

c. Provide equipment items that are supported by a service organization. In product categories covered by ENERGY STAR or the Federal Energy Management Program, provide equipment that is listed on the ENERGY STAR Qualified Products List or that meets or exceeds the FEMP-designated Efficiency Requirements.

2.2 IDENTIFICATION PLATES

In addition to standard manufacturer's identification plates, provide engraved laminated phenolic identification plates for each piece of mechanical equipment. Identification plates are to designate the function

of the equipment. Submit designation with the shop drawings. Provide identification plates that are layers, black-white-black, engraved to show white letters on black background. Letters must be upper case. Identification plates that are 1-1/2-inches high and smaller must be 1/16-inch thick, with engraved lettering 1/8-inch high; identification plates larger than 1-1/2-inches high must be 1/8-inch thick, with engraved lettering of suitable height. Identification plates 1-1/2-inches high and larger must have beveled edges. Install identification plates using a compatible adhesive.

2.3 EQUIPMENT GUARDS AND ACCESS

Fully enclose or guard belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts exposed to personnel contact according to OSHA requirements. Properly guard or cover with insulation of a type specified, high temperature equipment and piping exposed to contact by personnel or where it creates a potential fire hazard. The requirements for catwalks, operating platforms, ladders, and guardrails are specified in Section 08 31 00 ACCESS DOORS AND PANELS.

2.4 ELECTRICAL WORK

a. Provide motors, controllers, integral disconnects, contactors, and controls with their respective pieces of equipment, except controllers indicated as part of motor control centers. Provide electrical equipment, including motors and wiring, as specified in Section 26 20 00INTERIOR DISTRIBUTION SYSTEM. Provide manual or automatic control and protective or signal devices required for the operation specified and control wiring required for controls and devices specified, but not shown. For packaged equipment, include manufacturer provided controllers with the required monitors and timed restart.

b. For single-phase motors, provide high-efficiency type, including motors that are part of a system, in accordance with NEMA MG 10009 and NEMA MG 00001. Provide premium efficiency type for alternating current motors in accordance with NEMA MG 00001.

c. For polyphase motors, provide either ECM or squirrel-cage medium induction motors. Utilize the best equipment for the given mechanical equipment characteristics, including motors that are part of a system, and that meet the efficiency ratings for premium efficiency motors in accordance with NEMA MG 00001 or NEMA MG 10009. Select premium efficiency polyphase motors in accordance with NEMA MG 10.

d. Provide motors in accordance with NEMA MG 00001 and of sufficient size to drive the load at the specified capacity without exceeding the nameplate rating of the motor. Provide motors rated for continuous duty with the enclosure specified. Provide motor duty that allows for maximum frequency start-stop operation and minimum encountered interval between start and stop. Provide motor torque capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Provide motor starters complete with thermal overload protection and other necessary appurtenances. Fit motor bearings with grease supply fittings and grease relief to outside of the enclosure.

e. Where two-speed or variable-speed motors are indicated, solid-state variable-speed controllers are allowed to accomplish the same

function. Use solid-state variable-speed controllers for motors rated 10 hp or less and adjustable frequency drives for larger motors. Provide variable frequency drives for motors as specified.

2.4.1 Electronically Commutated Motors

Provide ECM Motors of a sufficient size for the duty to be performed while not exceeding the full-load rating when the driven equipment is operating at specified capacity under the most severe loading conditions.

2.4.1.1 Design Requirements

a. Provide Electronically Commutated Motors (ECM) designed as a DC brushless motor for variable speed or constant speed motor control. ECM design must allow for factory setting of the unit's fan flow. ECM must maintain respective constant fan speed at all set points regardless of external pressures that are within design ranges. Motor must be permanently lubricated with ball bearings with an L-10 rated life of not less than standards in accordance with ABMA 9 or ABMA 11.

b. ECM will be complete with and be operated by a single-phase or three-phase integrated controller/inverter. AC power will be rectified, filtered and then converted to DC power. This will ensure variable speed operation at DC power.

c. ECM controller must be capable of accepting a 0-10VDC or a 4-20mA signal for manual/automatic control.

d. Ensure efficiency is a minimum of 70 percent over the motors entire operating range.

2.4.1.2 Electrically Driven Equipment

When electrically driven equipment differs from that indicated, make adjustments to the motor size, wiring and conduit systems, disconnect devices, and circuit protection to accommodate the equipment installed, at no additional cost to the Government. Provide control and protective devices in accordance with NFPA 70 requirements.

2.4.1.3 Voltage Ratings

Provide at a minimum, motors with the following voltage ratings:

MOTOR SIZE		FED FROM POWER SOURCE	MOTOR VOLTAGE RATING
MOTOR TYPE	HORSE POWER		
Fractional horsepower, single-phase	3/4 and smaller	120/208-volt, 120/240-volt, 480/277-volt, 3-phase, 4-wire	115-volt, 200-volt, 230-volt, 277-volt 1-phase 50/60-hertz

MOTOR SIZE		FED FROM POWER SOURCE	MOTOR VOLTAGE RATING
MOTOR TYPE	HORSE POWER		
Integer horsepower, single-phase	1	120/208-volt, 120/240-volt, 277/480-volt, 3-phase, 4-wire	115-volt, 200-volt, 230-volt, 277-volt 1-phase 50/60-hertz
Integer horsepower, single-phase	2 and 3	120/208-volt, 120/240-volt, 3-phase, 4-wire	200-volt, 230-volt, 1-phase 50/60-hertz
Integer horsepower, three-phase	1 thru 5	120/208-volt, 120/240-volt, 277/480-volt, 3-phase, 4-wire	200-volt, 230-volt, 460-volt, 3-phase 50/60-hertz
Integer horsepower, three-phase	7.5 and above	277/480-volt, 3-phase, 4-wire	460-volt, 3-phase 50/60-hertz

2.4.1.4 Temperature Rating and Insulation

Provide motors designed for continuous operation at the rated full load in an ambient temperature of 40 degrees C, 104 degrees F, with an insulation level of at least Class B.

2.4.1.5 Motor Enclosures

2.4.1.5.1 Indoor Type Enclosures

a. For motors installed in indoor, clean, dry, non-hazardous locations, provide the following: Open-type drip-proof enclosures.

b. For motors installed in indoor, wet, non-hazardous locations, provide the following: Open splash-proof enclosures.

c. For motors installed in indoor, non-hazardous locations where it is necessary to protect the motor from dirt, moisture, chemical fumes, or other harmful ingredients in the surrounding atmosphere, provide either of the following type of enclosure: Totally enclosed fan-cooled enclosures for exterior cooling by means of a fan or fans integral with the machine.

2.5 ANCHOR BOLTS

Provide anchor bolts for equipment placed on concrete equipment pads or on concrete slabs. Bolts to be of the size and number recommended by the equipment manufacturer and located by means of suitable templates. Installation of anchor bolts must not degrade the surrounding concrete.

2.6 SEISMIC ANCHORAGE

Provide seismic bracing for HVAC systems components in accordance with

23 05 48.19SEISMIC BRACING FOR MECHANICAL SYSTEMS

2.7 PAINTING

Paint equipment units in accordance with approved equipment manufacturer's standards unless specified otherwise. Field retouch only if approved. Otherwise, return equipment to the factory for refinishing.

2.8 FACTORY PAINTING

Factory paint new equipment, which are not of galvanized construction. Paint with a corrosion resisting paint finish according to ASTM A123/A123M or ASTM A924/A924M. Clean, phosphatize and coat internal and external ferrous metal surfaces with a paint finish which has been tested according to ASTM B117, ASTM D1654, and ASTM D3359. Submit evidence of satisfactory paint performance for a minimum of 125 hours for units to be installed indoors , refer to paragraph Corrosion Protection for Coastal Installations for equipment installed within 5 miles of a sea (salt) water coastline. Provide rating of failure at the scribe mark that is not less than 6, average creepage not greater than 1/8 inch. Provide rating of the inscribed area that is not less than 10, no failure. On units constructed of galvanized steel that have been welded, provide a final shop docket of zinc-rich protective paint on exterior surfaces of welds or welds that have burned through from the interior according to ASTM D520 Type I.

Field paint factory painting that has been damaged prior to acceptance by the Contracting Officer in compliance with the requirements of paragraph FIELD PAINTING OF MECHANICAL EQUIPMENT.

2.9 CORROSION PROTECTION FOR COASTAL INSTALLATIONS

Provide air handling coils with aluminum fins on copper tubes or micro channel coils or otherwise custom treated for corrosion protection. Coils on all outdoor equipment must pass ASTM B117 6000 hour salt spray test as installed unless otherwise noted on plans. For equipment installed within 1000 feet of the ocean corrosion resistance mush pass ASTM B117 6000 hour salt spray test as installed

For packaged equipment (outdoor heat pumps, air conditioning units, air handling units) less than 5 ton capacity, such equipment must be provided with the manufacturer's seacoast/coastal anti-corrosion options.

Heat transfer ratings of equipment must be indicated within the equipment submittals with consideration for the deratings associated with the corrosion protection systems as installed.

2.10 INDOOR AIR QUALITY

Provide equipment and components that comply with the requirements of ASHRAE 62.1 unless more stringent requirements are specified herein.

2.11 DUCT SYSTEMS

2.11.1 Metal Ductwork

Provide metal ductwork construction, including all fittings and components, that complies with ANSI/SMACNA 006, as supplemented and modified by this specification .

a. Construct ductwork meeting the requirements for the duct system static pressure as indicated on the Ductwork Construction and Leakage Testing Table provided on the drawings.

b. Provide radius type elbows with a centerline radius of 1.5 times the width or diameter of the duct where space permits. Otherwise, elbows having a minimum radius equal to the width or diameter of the duct or square elbows with factory fabricated turning vanes are allowed.

c. Provide branch duct supply take-offs and return connections to main ductwork using 45 degree branch connections or conical tap connections as indicated on the drawings.

d. Provide ductwork that meets the requirements of Seal Class A.

e. Provide sealants that conform to fire hazard classification specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS and are suitable for the range of air distribution and ambient temperatures to which it is exposed. Do not use pressure sensitive tape as a sealant. Provide duct sealant products that meet either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or Volatile Organic Compounds (VOC) content requirements of SCAQMD Rule 1168 (HVAC duct sealants are classified as "Other" within the SCAQMD Rule 1168 sealants table). The VOC emittance must be 420 g/l or less. Provide validation of indoor air quality for duct sealants.

f. Make spiral lock seam duct, and flat oval with duct sealant and lock with not less than 3 equally spaced drive screws or other approved methods indicated in ANSI/SMACNA 006. Apply the sealant to the exposed male part of the fitting collar so that the sealer is on the inside of the joint and fully protected by the metal of the duct fitting. Apply one brush coat of the sealant over the outside of the joint to at least 2 inch band width covering all screw heads and joint gap. Dents in the male portion of the slip fitting collar are not acceptable.

g. Fabricate outdoor air intake ducts and plenums with watertight soldered or brazed joints and seams. Slope bottom of outdoor air intake plenums at 1/2 inch per foot.

2.11.1.1 Insulated Nonmetallic Flexible Duct Runouts

Use flexible duct runouts only where indicated. Runout length is indicated on the drawings, and is not to exceed 5 feet. Provide runouts that are preinsulated, factory fabricated, and that comply with NFPA 90A and UL 181. Provide either field or factory applied vapor barrier. Provide not less than 20 ounce/square yard glass fabric duct connectors coated on both sides with neoprene. Where high velocity units are supplied with vertical air inlets, use a streamlined, vaned and mitered elbow transition piece for connection to the flexible duct or hose. Provide a die-stamped elbow and not a flexible connector as the last elbow to these units other than the vertical air inlet type. Insulated flexible connectors are allowed as runouts. Provide insulated material and vapor barrier that conform to the requirements of Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. Do not expose the insulation material surface to the air stream.

2.11.1.2 General Service Duct Connectors

Provide a flexible duct connector approximately 6 inches in width where sheet metal connections are made to fans or where ducts of dissimilar metals are connected. For round/oval ducts, secure the flexible material by stainless steel or zinc-coated, iron clinch-type draw bands. For rectangular ducts, install the flexible material locked to metal collars using normal duct construction methods. Provide a composite connector system that complies with NFPA 701 and is classified as "flame-retardant fabrics" in UL Bld Mat Dir.

2.11.2 Duct Access Doors

Provide hinged access doors conforming to ANSI/SMACNA 006 in ductwork and plenums where indicated and at all air flow measuring primaries, automatic dampers, fire dampers, coils, thermostats, and other apparatus requiring service and inspection in the duct system. Provide access doors upstream and downstream of air flow measuring primaries and heating and cooling coils. Provide doors that are a minimum 15 by 18 inches, unless otherwise shown. Where duct size does not accommodate this size door, make the doors as large as practicable. Equip doors 24 by 24 inches or larger with fasteners operable from inside and outside the duct. Use insulated type doors in insulated ducts.

2.11.3 Fire Dampers

Use 1.5 hour rated fire dampers unless otherwise indicated. Provide fire dampers that conform to the requirements of NFPA 90A and UL 555. Perform the fire damper test as outlined in NFPA 90A. Provide automatic operating fire dampers with a dynamic rating suitable for the maximum air velocity and pressure differential to which it is subjected. Provide fire dampers approved for the specific application, and install according to their listing. Equip fire dampers with a steel sleeve or adequately sized frame installed in such a manner that disruption of the attached ductwork, if any, does not impair the operation of the damper. Equip sleeves or frames with perimeter mounting angles attached on both sides of the wall or floor opening. Construct ductwork in fire-rated floor-ceiling or roof-ceiling assembly systems with air ducts that pierce the ceiling of the assemblies in conformance with UL Fire Resistance. Provide curtain type with damper blades out of the air stream fire dampers. Install dampers that do not reduce the duct or the air transfer opening cross-sectional area. Install dampers so that the centerline of the damper depth or thickness is located in the centerline of the wall, partition or floor slab depth or thickness. Unless otherwise indicated, comply with the installation details given in SMACNA 1819 and in manufacturer's instructions for fire dampers. Perform acceptance testing of fire dampers according to paragraph DAMPER ACCEPTANCE TEST and NFPA 80.

2.11.4 Manual Balancing Dampers

a. Furnish factory manufactured and assembled manual balancing dampers with accessible locking-type quadrant operators. Manufacturer must publish damper data sheets and dampers must be sold on the open market. Use chromium plated operators (with all exposed edges rounded) in finished portions of the building where ductwork is exposed.

b. Furnish stand-off mounting brackets, bases, or adapters, not less than the thickness of the insulation, to provide clearance between the duct surface and the operator. Stand-off mounting items are to be integral

with the operator or standard accessory of the damper manufacturer. For duct widths greater than 30 inches, provide locking regulator at each end of the damper shaft.

c. Dampers installed in ductwork with an air velocity over 1500 feet per minute, or pressure class greater than 2 inches must be rated for the design velocity and pressure class indicated.

2.11.4.1 Single Blade Round Dampers

a. May be furnished up to 20 inches in diameter.

b. Provide a minimum 3/8 inch square continuous full length galvanized or plated steel axle shaft that supports the entire blade diameter and extends through the standoff bracket and quadrant operator. Firmly affix the axle shaft to the blade. Spring-loaded positioners are not permitted.

c. Must be factory fabricated in a frame with a minimum length of 6 inches made of galvanized steel with straightening ribs; minimum of 22 gage up to 8 inch diameter, and 20 gage above 8 inch diameter. Damper frames are to be mounted end to end with round duct. Supple the axle shaft on both ends with a pressed in elastomeric bearing/seal, for low infiltration/exfiltration air leakage.

d. Provide galvanized steel damper blade; minimum of 22 gage up to 8 inch diameter, and 20 gage above 8 inch diameter.

2.11.4.2 Single Blade Rectangular Dampers

a. May be furnished up to 12 inches in height for rectangular ducts.

b. Provide square galvanized or plated steel axle shaft(s) that support the blade at both ends and extends through the standoff bracket and quadrant operator; minimum 3/8 inch up to 19 inch blade length, and 1/2 inch over 19 inch blade length. Firmly affix the axle shaft(s) to the blade. Spring-loaded positioners are not permitted. Provide, at the duct wall shaft penetration, an elastomeric seal for low infiltration/exfiltration air leakage.

c. Must be factory fabricated in a frame with a minimum length 3 inches made of galvanized steel; minimum of 24 gage up to 19 inch blade length, and 22 gage over 19 inch blade length. Damper frames are to be mounted inside the duct. Support axle shaft on both ends with a bearing in the frame.

d. Provide damper blades made of galvanized steel with roll formed or broke stiffener(s); minimum of 20 gage up to 19 inch blade length, and 18 gage over 19 inch blade length.

2.11.4.3 Multi-blade Rectangular Dampers

a. Furnish for round ducts larger than 20 inch and rectangular duct greater than 12 inches in height, except flanged duct system. Furnish square to round transitions for application in round duct.

b. Provide 1/2 inch galvanized or plated steel axle shafts that support each blade at both ends. Extend the operator shaft through the standoff bracket and quadrant operator. An elastomeric seal for low

infiltration/exfiltration air leakage must be at the duct wall shaft penetration.

c. Must be factory fabricated in a frame with a minimum length of 5 inches made of minimum 16 gage galvanized steel. Damper frames are to be mounted inside the duct. Support axle shafts on both end with a bearing in the frame. Blade linkage must be galvanized or plated steel and concealed in the frame, out of the air stream.

d. Provide opposed blades made of galvanized steel with roll formed or broke stiffeners(s); minimum of 16 gage.

2.11.4.4 Rectangular Dampers for Flanged Duct

a. Provide for flanged duct systems.

b. Must be multi-blade rectangular.

c. Provide 1/2 inch galvanized or plated steel axle shafts that support each blade at both ends. Extend the operator shaft through the standoff bracket and quadrant operator.

d. Must be factory fabricated in a frame with a minimum length of 3 inches made galvanized steel with a thickness to match the duct and at least 16 gage, or 20 gage with additional reinforcing such as a C channel. Mount damper frames end to end with the duct. Support axle shafts on both ends with a pressed in elastomeric bearing/seal for low infiltration/exfiltration air leakage. Provide galvanized or plated steel blade linkage, concealed in a frame, out of the air stream.

e. Provide opposed blades made of galvanized steel with roll formed or broker stiffeners(s); minimum of 16 gage.

2.11.5 Automatic Balancing Dampers

Provide pressure independent automatic balancing dampers at locations as shown on the plans or in accordance with drawing schedules. Automatic balancing dampers must operate without a required power supply and be field adjustable to design airflows without the use of tools using a slide setpoint indicator on the face of the damper. Automatic balancing dampers must be rated for operation with air temperatures ranging from25 degrees to 140 degrees F. Automatic air balancing dampers must provide airflow within 10 percent of setpoint at air pressures from0.2 inch to 1.2 inch water column when tested in accordance with AMCA 500-D.

2.11.6 Gravity Backdraft and Relief Dampers

Provide gravity balanced backdraft dampers where indicated on plans or as required on equipment schedules. Backdraft dampers must be constructed for horizontal or vertical mounting as required for the application. Backdraft dampers must be testing and rated for the required application in accordance with AMCA 500-D.

Damper blades are to be equipped with neoprene blade seals mechanically locked into the blade edge.

Equip with adjustable counterbalancing weights to allow operation of the blades such that "start to open" occurs at 0.02 inch w.g. and the damper achieves fully open position at 12.5 pascals.

Where backdraft dampers are provided as an accessory option to a fan, such backdraft dampers must be installed meeting all manufacturer's recommendations. The installer must demonstrate that the damper closes once the fan ceases operation.

2.11.7 Diffusers, Registers, and Grilles

Provide factory-fabricated units of aluminum that distribute the specified quantity of air evenly over space intended without causing noticeable drafts, air movement faster than 50 fpm in occupied zone, or dead spots anywhere in the conditioned area. Provide outlets for diffusion, spread, throw, and noise level as required for specified performance. Certify performance according to ASHRAE 70. Provide sound rated and certified inlets and outlets according to ASHRAE 70. Provide units with sound ratings at design conditions not exceeding the ASHRAE Applications Handbook, Noise and Vibration Control Chapter - table "Design Guidelines for HVAC-Related Background Sound in Rooms" refer to drawing air device schedule for maximum permissible sound rating by device. Provide diffusers and registers with volume damper with accessible operator, unless otherwise indicated; or if standard with the manufacturer, an automatically controlled device is acceptable. Where the inlet and outlet openings are located less than 7 feet above the floor, protect them by a grille or screen according to NFPA 90A.

2.11.7.1 Diffusers

Provide diffuser types indicated. Furnish ceiling mounted units with anti-smudge devices, unless the diffuser unit minimizes ceiling smudging through design features. Provide diffusers with air deflectors of the type indicated. Install ceiling mounted units with rims tight against ceiling. Provide sponge rubber gaskets between ceiling and surface mounted diffusers for air leakage control. Provide suitable trim for flush mounted diffusers. For connecting the duct to diffuser, provide duct collar that is airtight and does not interfere with volume controller. Provide return or exhaust units that are similar to supply diffusers.

2.11.7.2 Perforated Plate Diffusers

Provide adjustable air pattern controls as indicated on the drawings. Provide diffuser faceplates that do not sag or deflect when operating under design conditions.

2.11.7.3 registers And Grilles

Double-deflection supply registers. Provide manufacturer-furnished volume dampers. Provide volume dampers of the group-operated, opposed-blade type and key adjustable by inserting key through face of register. Operating mechanism must not project through any part of the register face. Automatic volume control devices are acceptable. Provide exhaust and return registers as specified for supply registers, except provide exhaust and return registers that have a single set of nondirectional face bars or vanes having the same appearance as the supply registers.

2.11.8 Louvers

Provide louvers for installation in exterior walls that are associated with the air supply and distribution system as specified in Section

08 91 00 METAL WALL LOUVERS.

2.11.9 Air Vents, Penthouses, and Goosenecks

Fabricate air vents, penthouses, and goosenecks from galvanized steel or aluminum sheets with galvanized or aluminum structural shapes. Provide sheet metal thickness, reinforcement, and fabrication that conform to ANSI/SMACNA 006. Accurately fit and secure louver blades to frames. Fold or bead edges of louver blades for rigidity and baffle these edges to exclude driving rain. Provide air vents, penthouses, and goosenecks with bird screen.

2.11.10 Bird Screens and Frames

Provide bird screens that conform to ASTM E2016, No. 2 mesh, aluminum or stainless steel. Provide "medium-light" rated aluminum screens. Provide "light" rated stainless steel screens. Provide removable type frames fabricated from either stainless steel or extruded aluminum.

2.11.11 Clothes Dryer Exhaust Ductwork

Ductwork serving clothes dryer exhaust must be constructed of materials in accordance with ICC IMC

2.12 AIR SYSTEMS EQUIPMENT

2.12.1 Fans

Test and rate fans according to AMCA 210. Calculate system effect on air moving devices in accordance with AMCA 201 where installed ductwork differs from that indicated on drawings. Install air moving devices to minimize fan system effect. Where system effect is unavoidable, determine the most effective way to accommodate the inefficiencies caused by system effect on the installed air moving device. The sound power level of the fans must not exceed 85 dBA when tested according to AMCA 300 and rated in accordance with AMCA 301. Provide all fans with an AMCA seal. Connect fans to the motors either directly or indirectly with V-belt drive. Use V-belt drives designed for not less than 140 percent of the connected driving capacity. Provide belt driven fans less than 5 hp with adjustable pitch motor sheaves selected such that the pitch adjustment is at the middle of the adjustment range at fan design condition. Provide fixed pitch motor sheaves for motors 5 hp and above sized to produce fan design condition. Provide replacement sheaves as needed to achieve system air balance. Provide motors for V-belt drives with adjustable rails or bases. Provide removable metal guards for all exposed V-belt drives, and provide speed-test openings at the center of all rotating shafts. Provide fans with personnel screens or guards on both suction and supply ends, except that the screens need not be provided, unless otherwise indicated, where ducts are connected to the fan. Provide fan and motor assemblies with vibration-isolation supports or mountings as indicated on the drawings. Use vibration-isolation units that are standard products with published loading ratings. Select each fan to produce the capacity required at the fan static pressure indicated. Provide units with sound ratings at design conditions that will not result in objectional background noise in accordance with the ASHRAE Applications Handbook, chapter Noise and Vibration Control, table "Design Guidelines for HVAC-Related Background Sound in Rooms" refer to drawing fan schedule for maximum permissible sound rating by device. Obtain the sound power level values according to AMCA 300. Provide power ventilators that conform to UL 705 and have a UL

label.

2.12.1.1 In-Line Centrifugal Fans

Provide in-line fans with centrifugal backward inclined blades, stationary discharge conversion vanes, internal and external belt guards, and adjustable motor mounts. Mount fans in a welded tubular casing. Provide a fan that axially flows the air in and out. Streamline inlets with conversion vanes to eliminate turbulence and provide smooth discharge air flow. Enclose and isolate fan bearings and drive shafts from the air stream. Provide precision, self aligning ball or roller type fan bearings that are sealed against dust and dirt and are permanently lubricated. Provide L50 rated bearing life at not less than 200,000 hours as defined by ABMA 9 and ABMA 11. Provide motors with opendrip-proof enclosure.

2.12.1.2 Propeller Type Sidewall Fans

Provide propeller type fans, assembled on a reinforced metal panel with venturi opening spun into panel. Provide direct or V-belt driven fans with wheels less than 24 inches in diameter and provide V-belt driven fans with wheels 24 inches in diameter and larger. Provide fans with wall mounting collar. Provide lubricated bearings. Equip fans with wheel and motor side metal or wire guards which have a corrosion-resistant finish. Provide drip-proof type motor enclosure. Install motor operated backdraft dampers where indicated.

2.12.2 Coils

Provide fin-and-tube type coils constructed of seamless copper tubes and aluminum fins mechanically bonded or soldered to the tubes... Provide casing and tube support sheets that are not lighter than 16 gauge galvanized steel, formed to provide structural strength. When required, provide multiple tube supports to prevent tube sag. Mount coils for counterflow service. Rate and certify coils to meet the requirements of AHRI 410. Provide factory applied phenolic, vinyl or epoxy/electrodeposition coating.

2.12.2.1 Water Coils

Install water coils with a pitch of not less than 1/8 inch/foot of the tube length toward the drain end. Use headers constructed of cast iron, welded steel or copper. Furnish each coil with a plugged vent and drain connection extending through the unit casing. Provide removable water coils with drain pans. Pressure test coils in accordance with UL 1995.

2.12.3 Air Filters

List air filters according to requirements of UL 900, except list high efficiency particulate air filters of 99.97 percent efficiency by the DOP Test method under the Label Service to meet the requirements of UL 586.

2.12.3.1 Extended Surface Pleated Panel Filters

Provide 2 inch depth, sectional, disposable type filters of the size indicated with a MERV of 8 when tested according to ASHRAE 52.2. Provide initial resistance at 500 fpm that does not exceed 0.36 inches water gauge. Provide UL Class 2 filters, and nonwoven cotton and synthetic fiber mat media. Attach a wire support grid bonded to the media to a moisture resistant fiberboard frame. Bond all four edges of the filter media to

the inside of the frame to prevent air bypass and increase rigidity.

2.12.3.2 Extended Surface Nonsupported Pocket Filters

Provide 30 inch depth, sectional, replaceable dry media type filters of the size indicated with a MERV of 13 when tested according to ASHRAE 52.2. Provide initial resistance at 500 fpm that does not exceed 0.45 inches water gauge. Provide UL Class 1 filters. Provide fibrous glass media, supported in the air stream by a wire or non-woven synthetic backing and secured to a galvanized steel metal header. Provide pockets that do not sag or flap at anticipated air flows. Install each filter with an extended surface pleated panel filter as a prefilter in a factory preassembled, side access housing or a factory-made sectional frame bank, as indicated.

2.12.3.3 Cartridge Type Filters

Provide 12 inch depth, sectional, replaceable dry media type filters of the size indicated with a MERV of 13 when tested according to ASHRAE 52.2. Provide initial resistance at 500 fpm that does not exceed 0.56 inches, water gauge. Provide UL class 1 filters, and pleated microglass paper media with corrugated aluminum separators, sealed inside the filter cell to form a totally rigid filter assembly. Fluctuations in filter face velocity or turbulent airflow have no effect on filter integrity or performance. Install each filter in a factory preassembled side access housing, or a factory-made sectional frame bank, as indicated.

2.12.3.4 Sectional Cleanable Filters

Provide 2 inch thick cleanable filters. Provide viscous adhesive in 5 gallon containers in sufficient quantity for 12 cleaning operations and not less than one quart for each filter section. Provide one washing and charging tank for every 100 filter sections or fraction thereof; with each washing and charging unit consisting of a tank and single drain rack mounted on legs and drain rack with dividers and partitions to properly support the filters in the draining position.

2.12.3.5 Replaceable Media Filters

Provide the dry-media type replaceable media filters, of the size required to suit the application. Provide filtering media that is not less than 2 inches thick fibrous glass media pad supported by a structural wire grid or woven wire mesh. Enclose pad in a holding frame of not less than 16 gauge galvanized steel, equipped with quick-opening mechanism for changing filter media. Base the air flow capacity of the filter on net filter face velocity not exceeding 300 fpm, with initial resistance of 0.13 inches water gauge. Provide MERV that is not less than 8 when tested according to ASHRAE 52.2.

2.12.3.6 Filter Gauges

Provide dial type filter gauges, diaphragm actuated draft for all filter stations, including those filters which are furnished as integral parts of factory fabricated air handling units. Provide gauges that are at least 3-7/8 inches in diameter, with white dials with black figures, and with a minimum range of 1 inch of water beyond the specified final resistance for the filter bank on which each gauge is applied. Provide each gauge with a screw operated zero adjustment and two static pressure tips with integral compression fittings, two molded plastic vent valves, two 5 foot minimum

lengths of 1/4 inch diameter aluminum tubing, and all hardware and accessories for gauge mounting.

2.13 AIR HANDLING UNITS

2.13.1 Factory-Fabricated Air Handling Units

Provide single-zone draw-through type units as indicated. Units must include fans, coils, airtight insulated casing, prefilters, adjustable V-belt drives, belt guards for externally mounted motors, access sections where indicated, combination sectional filter-mixing box, vibration-isolators, and appurtenances required for specified operation. Provide fan and motor assemblies with vibration-isolation supports or mountings as indicated on the drawings. Physical dimensions of each air handling unit must be suitable to fit space allotted to the unit with the capacity indicated. Provide air handling unit that is rated in accordance with AHRI 430 and AHRI certified for cooling.

2.13.1.1 Casings

Provide the following:

a. Casing sections 2 inch double wall type, constructed of a minimum 22 gauge galvanized steel, aluminum, or stainless steel conforming to ASTM A240/A240M, Type 304. Make the inner casing of double wall units a minimum 20 gauge solid galvanized steel . Design and construct casing with an integral insulated structural galvanized steel or aluminum frame such that exterior panels are non-load bearing.

   Incorporate a standing seam or thermoplastic polyolefin (TPO) on the exterior of outdoor unit roofs to ensure a rigid roof construction and prevent water infiltration. Roof assembly must be sloped not less than 1:100 for drainage and is to overhang all walls by 1.5 inch minimum to prevent sheeting from roof to side panels. Rain gutters are to also be provided over all doors shorter than total unit height to direct rain away from door assembly. Where outdoor units are shipped in multiple sections, provide standing-seam joiners at each split with adhesive, hardware, and cover strips for field joining by the installing contractor.

   Unit casing (wall/floor/roof panels and doors) must be able to withstand up to 1.5 times design static pressure, or 8-inch water gauge and not exceed 0.0042 per inch of panel span (L/240) when measured at the panel midpoint. Air leakage to be guaranteed at no more than 1 percent of the design volume at 1.5 times the design operating pressure or 50 cubic feet per minute, whichever is greater. Specified air leakage accomplished without the use of caulk. Total estimated air leakage reported for each unit in cubic feet per minute or as a percentage of supply air.

b. Casing panel inner liners must not extend to the exterior of the unit or contact the exterior frame. A mid-span, no-through-metal, internal thermal break is provided for all unit casing panels . Individually removable exterior panel sections are removable with standard tools. Removal must not affect the structural integrity of the unit. Furnish casings with access sections, according to paragraph AIR HANDLING UNITS, inspection doors, and access doors must be capable of opening a minimum of 90 degrees.

c. Insulated, fully gasketed, double-wall type inspection and access doors, of a minimum 22 gauge galvanized steel, 0.040 inch aluminum, or 22 gauge stainless steel conforming to ASTM A240/A240M. Provide rigid doors with heavy duty hinges and latches. Inspection doors must be a minimum 12 inches wide by 12 inches high. Access doors must be a minimum 24 inches wide, the full height of the unit casing or a minimum of 6 foot, whichever is less. Install a minimum 8 by 8 inches sealed glass window suitable for the intended application in all access doors.

d. Double-wall insulated type drain pan (thickness equal to exterior casing) constructed of 20 gauge stainless steel conforming to ASTM A240/A240M, Type 304, conforming to ASHRAE 62.1. Construct drain pans water tight, treated to prevent corrosion, and designed for positive condensate drainage. When 2 or more cooling coils are used, with one stacked above the other, condensate from the upper coils must not flow across the face of lower coils. Provide intermediate drain pans or condensate collection channels and downspouts, as required to carry condensate to the unit drain pan out of the air stream and without moisture carryover. Construct drain pan to allow for easy visual inspection, including underneath the coil without removal of the coil and to allow complete and easy physical cleaning of the pan underneath the coil without removal of the coil. Provide coils that are individually removable from the casing. Drain connections must be of the same material as the primary drain pan and extend a minimum of 2-1/2 inch beyond the base to ensure adequate room for field piping of condensate traps.

e. Casing insulation that conforms to NFPA 90A. Insulate double-wall casing sections handling conditioned air with not less than 2 inches of the same insulation specified for single-wall casings. Foil-faced insulation is not an acceptable substitute for use with double wall casing. Seal double wall insulation completely by inner and outer panels.

f. Factory applied fibrous glass insulation that conforms to ASTM C1071, except that the minimum thickness and density requirements do not apply, and that meets the requirements of NFPA 90A. Make air handling unit casing insulation uniform over the entire casing. Foil-faced insulation is not an acceptable substitute for use on double-wall access doors and inspection doors and casing sections.

g. Duct liner material, coating, and adhesive that conforms to fire-hazard requirements specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. Protect exposed insulation edges and joints where insulation panels are butted with a metal nosing strip or coat to meet erosion resistance requirements of ASTM C1071.

h. A latched and hinged inspection door, in the fan and coil sections. Plus additional inspection doors, access doors and access sections where indicated.

2.13.1.2 Heating and Cooling Coils

Provide coils as specified in paragraph AIR SYSTEMS EQUIPMENT.

2.13.1.3 Air Filters

Provide air filters as specified in paragraph AIR SYSTEMS EQUIPMENT for

types and thickness indicated.

2.13.1.4 Fans

Provide the following:

a. Fans that are double-inlet, centrifugal type with each fan in a separate scroll. Dynamically balance fans and shafts prior to installation into air handling unit, then after it has been installed in the air handling unit, statically and dynamically balance the entire fan assembly. Mount fans on steel shafts, accurately ground and finished.

b. Fan bearings that are sealed against dust and dirt and are precision self-aligning ball or roller type, with L50 rated bearing life at not less than 200,000 hours as defined by ABMA 9 and ABMA 11. Provide bearings that are permanently lubricated or lubricated type with lubrication fittings readily accessible at the drive side of the unit. Support bearings by structural shapes, or die formed sheet structural members, or support plates securely attached to the unit casing. Do not fasten bearings directly to the unit sheet metal casing. Furnish fans and scrolls with coating indicated.

c. Fans that are driven by a unit-mounted, or a floor-mounted motor connected to fans by V-belt drive complete with belt guard for externally mounted motors. Furnish belt guards that are the three-sided enclosed type with solid or expanded metal face. Design belt drives for not less than a 1.3 service factor based on motor nameplate rating.

d. Where fixed sheaves are required, the use of variable pitch sheaves is allowed during air balance, but replace them with an appropriate fixed sheave after air balance is completed. Select variable pitch sheaves to drive the fan at a speed that produces the specified capacity when set at the approximate midpoint of the sheave adjustment. Furnish motors for V-belt drives with adjustable bases, and with opensplashproof enclosures.

e. Motor starters of across-the-line type with general-purpose enclosure. Select unit fan or fans to produce the required capacity at the fan static pressure with sound power level as indicated. Obtain the sound power level values according to AMCA 300 or AHRI 260 I-P.

2.13.1.5 Fan Arrays

Air handling units utilizing fan arrays are to comply with the following requirements:

a. Fans require Class II (minimum) construction with single inlet, direct drive ACMA Arrangement 4 fans installed either in a modular fashion in the field or pre-assembled on a prefabricated frame. Fans must be dynamically balanced and internally isolated to minimize vibration. Fan performance rated in accordance with AMCA 210.

b. Fan array plenum type fans driven by variable speed drives unless otherwise indicated; where indicated fans are driven by brushless DC electronically commutated motor (ECM) with external rotor and integrated maintenance free, permanently lubricated ball bearings and

statically and dynamically balanced in accordance with ISO 21940-11. The ECM must be closed, protection level IP 54, thermal class 155; motor efficiency class complies with IEC 60034-30-1 IE3 Premium efficiency.

c. Fan array controller provided by the air handling unit manufacturer to control the fan array modulating individual fan speed and number of active fans to provide the required airflows with minimum energy consumption.

d. Ensure the fan quantity allows achieving design airflow even with at least one fan out of operation. .

e. Ensure that each fan in fan systems with more than one fan is equipped with a backdraft damper. This safety measure helps protect against individual fan failure. .

f. Fan systems having more than one fan, and which do not include backdraft dampers require one blank-off plate, which may be used in the case of failure of a single fan to then replace the fan and prevent backflow through that location.

2.13.1.6 Access Sections and Filter/Mixing Boxes

Provide access sections where indicated and furnish with access doors as shown. Construct access sections and filter/mixing boxes in a manner identical to the remainder of the unit casing and equip with access doors. Design mixing boxes to minimize air stratification and to promote thorough mixing of the air streams.

2.13.1.7 Dampers

Provide dampers integral to factory fabricated air handling units constructed in accordance with 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC. Dampers connecting the air handling unit to the outdoors (outdoor air, exhaust air, relief Air) must be AMCA 511 leakage classification 1A.

2.14 ENERGY RECOVERY DEVICES

Provide energy recovery ventilator unit that is factory-fabricated for indoor installation, consisting of a flat plate cross-flow heat exchanger, cooling coil, supply air fan and motor and exhaust air fan and motor. The casing must be 20 gauge G90, galvanized steel, double wall construction with one inch insulation. Provide fibrous desiccant cross-flow type heat exchanger core capable of easy removal from the unit for sensible and latent heat exchangers. Heat exchanger must include condensate drain pan with means to connect to piping to drain condensate. Sensible only, fixed plate, cross-flow heat exchangers are also an option depending on the design requirements.

2.14.1 Energy Recovery Performance

Energy recover equipment must comply with ASHRAE Design Guide for Dedicated Outdoor Air Systems (DOAS).

The manufacturer must provide certified performance data in accordance with ASHRAE 84 and AHRI 1060 I-P. Independent performance test results must be used to rate the product in accordance with the AHRI Air-to-Air

Energy Recovery Ventilation Equipment Program.

2.14.2 Plate Total Energy Exchanger

Provide enthalpy plate energy exchanger that must transfer both sensible and latent energy between outgoing and incoming air streams in a cross or counter flow arrangement with no moving parts. The enthalpy plate exchanger media must be coated with hydrophilic resin or impregnated with a polymeric desiccant. The material must allow the exchange water by direct vapor transfer using molecular transport without the need of condensation. The frame supporting enthalpy matrix must be constructed of G90 Galvanized material with end caps constructed of 18 gauge galvanized plates. The enthalpy plate exchanger must operate at temperatures between minus 40 degrees F and 140 degrees F. The enthalpy plate exchanger must have a warranty of at least 5 years against manufacturing defects.

The enthalpy plate exchanger must bear the AHRI 1060 Certified Product Seal. Sensible, latent and total effectiveness along with pressure drop, exhaust air transfer ratio (EATR) and outdoor air correction factor (OACF) rating must be clearly documented with performance tests conducted in accordance with ASHRAE 84 and per the official AHRI laboratory. The enthalpy plate exchanger must withstand pressure differentials of minimum 2.5 kPa 10 inches water gauge. Following UL 1995, the enthalpy plate exchanger must be a UL Recognized Component and bear the UL Certification Mark (tested under UL723 with success by the UL laboratory). The exchanger must have a flame spread rating not more than 25 and a smoke developed rating not more than 50 when tested in accordance with ASTM E84. The membrane must not promote the growth of mold or bacteria and must have successfully passed ASTM G21 testing. Provide heat exchanger core capable of easy removal from the unit. Enthalpy plate exchangers must be cleanable outside of cabinet.

2.15 SUPPLEMENTAL COMPONENTS/SERVICES

2.15.1 Chilled Water Piping

The requirements for chilled, condenser, or dual service water piping and accessories are specified in Section 23 64 26 CHILLED WATER PIPING SYSTEMS

2.15.2 Refrigerant Piping

The requirements for refrigerant piping are specified in Section 23 23 00 REFRIGERANT PIPING.

2.15.3 Water or Steam Heating System Accessories

The requirements for water or steam heating accessories such as expansion tanks and steam traps are specified in Section 23 21 13.00 20 LOW TEMPERATURE WATER (LTW) HEATING SYSTEM.

2.15.4 Condensate Drain Lines

Provide and install condensate drainage for each item of equipment that generates cooling coil condensate in accordance with Section 22 00 00 PLUMBING, GENERAL PURPOSE.

2.15.5 Backflow Preventers

The requirements for backflow preventers are specified in Section 22 00 00

PLUMBING, GENERAL PURPOSE.

2.15.6 Insulation

The requirements for shop and field applied insulation are specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

2.15.7 Controls

The requirements for controls are specified in Section 23 05 93 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS and Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

PART 3 EXECUTION

3.1 EXAMINATION

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing the work.

3.2 INSTALLATION

a. Install materials and equipment in accordance with the requirements of the contract drawings and approved manufacturer's installation instructions. Accomplish installation by workers skilled in this type of work. Perform installation so that there is no degradation of the designed fire ratings of walls, partitions, ceilings, and floors.

b. No installation is permitted to block or otherwise impede access to any existing machine or system. Install all hinged doors to swing open a minimum of 120 degrees. Provide an area in front of all access doors that clears a minimum of 3 feet. In front of all access doors to electrical circuits, clear the area the minimum distance to energized circuits as specified in OSHA Standards, part 1910.333 (Electrical-Safety Related work practices)and an additional 3 feet.

c. Except as otherwise indicated, install emergency switches and alarms in conspicuous locations. Mount all indicators, to include gauges, meters, and alarms in order to be easily visible by people in the area.

3.2.1 Condensate Drain Lines

Provide water seals in the condensate drain from all units . Provide a depth of each seal of 2 inches plus the number of inches, measured in water gauge, of the total static pressure rating of the unit to which the drain is connected. Provide water seals that are constructed of 2 tees and an appropriate U-bend with the open end of each tee plugged. Provide pipe cap or plug cleanouts where indicated. Connect drains indicated to connect to the sanitary waste system using an indirect waste fitting. Insulate air conditioner drain lines as specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS.

3.2.2 Equipment and Installation

Provide frames and supports for tanks, compressors, pumps, valves, air handling units, fans, coils, dampers, and other similar items requiring supports. Floor mount or ceiling hang air handling units as indicated. Anchor and fasten as detailed. Set floor-mounted equipment on not less

than 6 inch concrete pads or curbs doweled in place unless otherwise indicated assuring mounting height accommodates depth of condensate drain water seal (trap) where applicable. Make concrete foundations heavy enough to minimize the intensity of the vibrations transmitted to the piping, duct work and the surrounding structure, as recommended in writing by the equipment manufacturer. In lieu of a concrete pad foundation, build a concrete pedestal block with isolators placed between the pedestal block and the floor. Make the concrete foundation or concrete pedestal block a mass not less than three times the weight of the components to be supported. Provide the lines connected to the pump mounted on pedestal blocks with flexible connectors. Submit foundation drawings as specified in paragraph DETAIL DRAWINGS. Provide concrete for foundations as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE.

3.2.3 Access Panels

Install access panels for concealed valves, vents, controls, dampers, and items requiring inspection or maintenance of sufficient size, and locate them so that the concealed items are easily serviced and maintained or completely removed and replaced. Provide access panels as specified in Section 08 31 00 ACCESS DOORS AND PANELS.

3.2.4 Flexible Duct

Install pre-insulated flexible duct in accordance with the latest printed instructions of the manufacturer to ensure a vapor tight joint. Provide hangers, when required to suspend the duct, of the type recommended by the duct manufacturer and set at the intervals recommended.

3.2.5 Metal Ductwork

Install according to ANSI/SMACNA 006 unless otherwise indicated. Install duct supports for sheet metal ductwork according to ANSI/SMACNA 006, unless otherwise specified. Do not use friction beam clamps indicated in ANSI/SMACNA 006. Anchor risers on high velocity ducts in the center of the vertical run to allow ends of riser to move due to thermal expansion. Erect supports on the risers that allow free vertical movement of the duct. Attach supports only to structural framing members and concrete slabs. Do not anchor supports to metal decking unless a means is provided and approved for preventing the anchor from puncturing the metal decking. Where supports are required between structural framing members, provide suitable intermediate metal framing. Where C-clamps are used, provide retainer clips.

3.2.6 Clothes Dryer Exhaust Ductwork

Clothes dryer exhaust duct work to be installed in accordance with ICC IMC and the dryer manufacturer's installation requirements. For single domestic/residential clothes dryer ducts, dryer duct to be supported at 4 foot intervals and secured in place. The insert end of the duct is to extend into the adjoining duct or fitting in the direction of airflow. Ducts are not be joined with screws or fasteners that protrude more than 1/8 inch into the inside of the duct. For multiple clothes dryers refer to ICC IMC for installation requirements.

3.2.7 Dust Control

To prevent the accumulation of dust, debris and foreign material during construction, perform temporary dust control protection. Protect the

distribution system (supply and return) with temporary seal-offs at all inlets and outlets at the end of each day's work. Keep temporary protection in place until system is ready for startup.

3.2.8 Insulation

Provide thickness and application of insulation materials for ductwork, piping, and equipment according to Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS. Externally insulate outdoor air intake ducts and plenums up to the point where the outdoor air reaches the conditioning unit.

3.2.9 Duct Test Holes

Provide holes with closures or threaded holes with plugs in ducts and plenums as indicated or where necessary for the use of pitot tube in balancing the air system. Plug insulated duct at the duct surface, patched over with insulation and then marked to indicate location of test hole if needed for future use.

3.2.10 Power Roof Ventilator Mounting

Provide foamed 1/2 inch thick, closed-cell, flexible elastomer insulation to cover width of roof curb mounting flange. Where wood nailers are used, predrill holes for fasteners.

3.2.11 Power Transmission Components Adjustment

Test V-belts and sheaves for proper alignment and tension prior to operation and after 72 hours of operation at final speed. Uniformly load belts on drive side to prevent bouncing. Make alignment of direct driven couplings to within 50 percent of manufacturer's maximum allowable range of misalignment.

3.3 EQUIPMENT PADS

Provide equipment pads to the dimensions shown or, if not shown, to conform to the shape of each piece of equipment served with a minimum 3-inch margin around the equipment and supports. Allow equipment bases and foundations, when constructed of concrete or grout, to cure a minimum of 28 calendar days before being loaded.

3.4 CUTTING AND PATCHING

Install work in such a manner and at such time that a minimum of cutting and patching of the building structure is required. Make holes in exposed locations, in or through existing floors, by drilling and smooth by sanding. Use of a jackhammer is permitted only where specifically approved. Make holes through masonry walls to accommodate sleeves with an iron pipe masonry core saw.

3.5 CLEANING

Thoroughly clean surfaces of piping and equipment that have become covered with dirt, plaster, or other material during handling and construction before such surfaces are prepared for final finish painting or are enclosed within the building structure. Before final acceptance, clean mechanical equipment, including piping, ducting, and fixtures, and free from dirt, grease, and finger marks. When the work area is in an occupied space such as office, laboratory or warehouse protect all furniture and

equipment from dirt and debris. Incorporate housekeeping for field construction work which leaves all furniture and equipment in the affected area free of construction generated dust and debris; and, all floor surfaces vacuum-swept clean.

3.6 PENETRATIONS

Provide sleeves and prepared openings for duct mains, branches, and other penetrating items, and install during the construction of the surface to be penetrated. Cut sleeves flush with each surface. Place sleeves for round duct 15 inches and smaller. Build framed, prepared openings for round duct larger than 15 inches and square, rectangular or oval ducts. Sleeves and framed openings are also required where grilles, registers, and diffusers are installed at the openings. Provide one inch clearance between penetrating and penetrated surfaces except at grilles, registers, and diffusers. Pack spaces between sleeve or opening and duct or duct insulation with mineral fiber conforming with ASTM C553, Type 1, Class B-2.

3.6.1 Sleeves

Fabricate sleeves, except as otherwise specified or indicated, from 20 gauge thick mill galvanized sheet metal. Refer to design details on the drawings for sleeves in bearing walls or partitions.

3.6.2 Framed Prepared Openings

Fabricate framed prepared openings from 20 gauge galvanized steel, unless otherwise indicated.

3.6.3 Insulation

Provide duct insulation in accordance with Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS continuous through sleeves and prepared openings except firewall penetrations. Terminate duct insulation at fire dampers and flexible connections. For duct handling air at or below 60 degrees F, provide insulation continuous over the damper collar and retaining angle of fire dampers, which are exposed to unconditioned air.

3.6.4 Closure Collars

Provide closure collars of a minimum 4 inches wide, unless otherwise indicated, for exposed ducts and items on each side of penetrated surface, except where equipment is installed. Install collar tight against the surface and fit snugly around the duct or insulation. Grind sharp edges smooth to prevent damage to penetrating surface. Fabricate collars for round ducts 15 inches in diameter or less from 20 gauge galvanized steel. Fabricate collars for square and rectangular ducts, or round ducts with minimum dimension over 15 inches from 18 gauge galvanized steel. Fabricate collars for square and rectangular ducts with a maximum side of 15 inches or less from 20 gauge galvanized steel. Install collars with fasteners a maximum of 6 inches on center. Attach to collars a minimum of 4 fasteners where the opening is 12 inches in diameter or less, and a minimum of 8 fasteners where the opening is 20 inches in diameter or less.

3.6.5 Firestopping

Where ducts pass through fire-rated walls, fire partitions, and fire rated chase walls, seal the penetration with fire stopping materials as specified in Section 07 84 00 FIRESTOPPING.

3.7 FIELD PAINTING OF MECHANICAL EQUIPMENT

Clean, pretreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except clean to bare metal on metal surfaces subject to temperatures in excess of 120 degrees F. Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Provide aluminum or light gray finish coat.

3.7.1 Temperatures less than 120 degrees F

Immediately after cleaning, apply one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of one mil; and two coats of enamel applied to a minimum dry film thickness of one mil per coat to metal surfaces subject to temperatures less than 120 degrees F.

3.7.2 Temperatures between 120 and 400 degrees F

Apply two coats of 400 degrees F heat-resisting enamel applied to a total minimum thickness of two mils to metal surfaces subject to temperatures between 120 and 400 degrees F.

3.7.3 Temperatures greater than 400 degrees F

Apply two coats of 315 degrees C 600 degrees F heat-resisting paint applied to a total minimum dry film thickness of two mils to metal surfaces subject to temperatures greater than 400 degrees F.

3.7.4 Finish Painting

The requirements for finish painting of items only primed at the factory, and surfaces not specifically noted otherwise, are specified in Section 09 90 00 PAINTS AND COATINGS.

3.8 IDENTIFICATION SYSTEMS

Provide identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and item number on all valves and dampers. Provide tags that are 1-3/8 inch minimum diameter with stamped or engraved markings. Make indentations black for reading clarity. Attach tags to valves with No. 12 AWG 0.0808-inch diameter corrosion-resistant steel wire, copper wire, chrome-plated beaded chain or plastic straps designed for that purpose.

3.8.1 Identification of Hidden Utility Components

Provide labeling for equipment installed above the ceiling that requires periodic inspection or servicing. The labeling must be stick-on adhesive type with black lettering on white or clear background with lettering a minimum of 1/2" in height. For lay-in ceiling applications, locate stick-on on ceiling grid T-Bars closest to equipment such that recommended ceiling tile to be removed for servicing/access is direction above the label. For equipment located above hard ceilings, labeling is to be provided on the provided access door. The operable equipment requiring

identification include, valves, dampers.

3.9 DUCTWORK LEAK TESTS

The requirements for ductwork leak tests are specified in Section 23 05 93 TESTING, ADJUSTING AND BALANCING FOR HVAC.

3.10 DAMPER ACCEPTANCE TEST

Submit the proposed schedule, at least 2 weeks prior to the start of test. Perform the damper acceptance test in accordance with NFPA 80. Operate all fire dampers and smoke dampers with the air handling and distribution system operating at maximum air flow conditions, prior to the occupancy of the building to verify that they function properly. Test each fire damper with a fusible link by manually releasing the damper. Visually inspect the mechanism. Reset all fire dampers after acceptance testing.

3.11 TESTING, ADJUSTING, AND BALANCING

The requirements for testing, adjusting, and balancing are specified in Section 23 05 93 TESTING, ADJUSTING AND BALANCING FOR HVAC. Begin testing, adjusting, and balancing only when the air supply and distribution, including controls, has been completed, with the exception of performance tests.

3.12 PERFORMANCE TESTS

Conduct performance tests as required in Section 23 05 93 Testing, Adjusting and Balancing for HVAC and Section 23 09 00 Instrumentation and Control for HVAC.

3.13 CLEANING AND ADJUSTING

Provide a temporary bypass for water coils to prevent flushing water from passing through coils. Thoroughly clean ducts, plenums, and casing of debris and blow free of small particles of rubbish and dust and then vacuum clean before installing outlet faces. Wipe equipment clean, with no traces of oil, dust, dirt, or paint spots. Temporary filters must be provided and used when any air distribution system is in operation during construction. Provide new filters after all construction dirt has been removed from the building, and the ducts, plenums, casings, and other items specified have been vacuum cleaned. Perform and document that proper "Indoor Air Quality During Construction" procedures have been followed; provide documentation showing that after construction ends, and prior to occupancy, new filters were provided and installed. Maintain system in this clean condition until final acceptance. Properly lubricate bearings with oil or grease as recommended by the manufacturer. Tighten belts to proper tension. Adjust control valves and other miscellaneous equipment requiring adjustment to setting indicated or directed. Adjust fans to the speed indicated by the manufacturer to meet specified conditions. Maintain all equipment installed under the contract until close out documentation is received, the project is completed and the building has been documented as beneficially occupied.

3.14 OPERATION AND MAINTENANCE

3.14.1 Operation and Maintenance Manuals

Submit six manuals at least 2 weeks prior to field training. Submit data complying with the requirements specified in Section 01 78 23 OPERATION AND MAINTENANCE DATA. Submit Data Package 3 for the items/units listed under SD-10 Operation and Maintenance Data

3.14.2 Operation And Maintenance Training

Conduct a training course for the members of the operating staff as designated by the Contracting Officer. Make the training period consist of a total of 16 hours of normal working time and start it after all work specified herein is functionally completed and the Performance Tests have been approved. Conduct field instruction that covers all of the items contained in the Operation and Maintenance Manuals as well as demonstrations of routine maintenance operations. Submit the proposed On-site Training schedule concurrently with the Operation and Maintenance Manuals and at least 14 days prior to conducting the training course.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 52 43.00 20

LOW PRESSURE WATER HEATING BOILERS (UNDER 800,000 BTU/HR OUTPUT)
05/15, CHG 2: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.13/CSA 4.9	(2022) Gas-Fired Low Pressure Steam and Hot Water Boilers

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME BPVC SEC IV	(2017) BPVC Section IV-Rules for Construction of Heating Boilers
ASME CSD-1	(2024) Control and Safety Devices for Automatically Fired Boilers

ASTM INTERNATIONAL (ASTM)

ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

NATIONAL BOARD OF BOILER AND PRESSURE VESSEL INSPECTORS (NBBI)

NBBI NB-23 PART 1	(2023) National Board Inspection Code - Part 1 Installation

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 00001	(2024) Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 31	(2024; TIA 23-1) Standard for the Installation of Oil-Burning Equipment
NFPA 54	(2024) National Fuel Gas Code
NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 211	(2019) Standard for Chimneys, Fireplaces, Vents, and Solid Fuel-Burning Appliances

UL SOLUTIONS (UL)

UL 296	(2017; Reprint Nov 2022) UL Standard for Safety Oil Burners
UL 726	(1995; Reprint Sep 2024) UL Standard for Safety Oil-Fired Boiler Assemblies
UL 795	(2016; Reprint May 2022) UL Standard for Safety Commercial-Industrial Gas Heating Equipment

1.2 RELATED REQUIREMENTS

Section 23 03 00.00 20 BASIC MECHANICAL MATERIALS AND METHODS BASIC MECHANICAL MATERIALS AND METHODS, applies to this section, with the additions and modifications specified herein.

1.3 DESIGN REQUIREMENTS

Boiler must be suitable for installation in the space shown with ample room for opening doors and cleaning and removal and replacement of tubes. Boiler must have an output as indicated. Boiler must be designed and tested in accordance with ASME BPVC SEC IV, ASME CSD-1, NFPA 54, NFPA 31, NFPA 70 and ANSI Z21.13/CSA 4.9. Boiler must be installed in accordance with NBBI NB-23 PART 1. Paint boiler in accordance with manufacturer's recommendations. Provide a thermostatically controlled three-way mixing valve on boiler suitable for operating conditions of the boiler.

1.3.1 Boiler Installation Requirements

1.3.1.1 Location

Install Boiler(s) and associated hot water pumps in a mechanical room inside the facility in accordance with NBBI NB-23 PART 1. Provide ample clearance around boilers to allow access for inspection, maintenance and repair. Passageways around all sides of boilers must have an unobstructed minimum width of 36 inches or the clearances recommended by the boiler manufacturer whichever is greater.

1.3.1.2 Combustion Air

Provide supply of air for combustion and ventilation. In accordance with NFPA 54, NFPA 211 and manufacturer's installation manual, calculate the amount of combustion air necessary to operate the boiler. Install and locate properly sized combustion air dampers and louvers.

1.3.1.3 Sequence of Operation

Local, manual starting of boilers is required. Remote starting and stopping of the boiler by the HVAC control system is not permitted. This is to ensure that an operator witness the initial firing of the boiler at the beginning of each heating season to verify proper operation of the boiler and to promote proper maintenance.

1.3.2 Detail Drawings

1.3.2.1 Drawings

Show boiler hot water isolation valves, emergency disconnect switch, and complete boiler gas train on the contract drawings.

1.3.2.2 Fuel Train / Wiring Diagram

Submit fuel train and wiring diagram.

1.4 SAFETY STANDARDS

Hot water boilers, burners and supplementary control devices, safety interlocks, or limit controls required under this specification, must meet requirements of the following standards as applicable:

a. Oil-Fired Units: UL 726, NFPA 31, NFPA 70, ASME CSD-1.

b. Gas-Fired Units: ASME CSD-1, NFPA 54, NFPA 70, ANSI Z21.13/CSA 4.9 or UL 795.

c. Combination Gas- and Oil-Fired Units: ASME CSD-1, NFPA 54, NFPA 31, NFPA 70, UL 726, ANSI Z21.13/CSA 4.9, UL 795 or UL 296.

d. All Units: ASME BPVC SEC IV, NFPA 70 and ASME CSD-1.

Controls not covered by the above must have a UL label, UL listing mark, or must be listed in the Factory Mutual Approval Guide.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

Submittals for this Section must be delivered to the project Contracting Officer, who will forward two complete sets of copies to the appropriate approving official for review and approval.

SD-02 Shop Drawings

Fuel Train

Wiring Diagram

SD-03 Product Data

Boilers

Boiler Trim and Control Equipment

Stack, Breeching, and Supports

SD-06 Test Reports

Operational Tests

SD-07 Certificates

Boilers

Boiler Trim and Control Equipment

Boiler manufacturer's certificate of boiler performance including evidence that the burners provided must be a make, model, and type certified and approved by the manufacturer of the boiler being provided.

SD-08 Manufacturer's Instructions

Boilers

Feedwater Treatment Feeder

SD-10 Operation and Maintenance Data

Boilers, Data Package 4

Submit in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

SD-11 Closeout Submittals

Posted Operating Instructions for Heating Water Boilers

PART 2 PRODUCTS

2.1 BOILERS

Provide hot water heating boiler complete with firing equipment, combustion chamber, insulation with steel jacket, safety and operating controls, integral electrical wiring and other appurtenances, to make the boiler a complete, self-contained, fully-automatic unit, ready for service upon completion of utility connections. Gas fired boilers greater than 300,000 Btuh input must have a thermal efficiency of at least 90 percent when fired at the maximum and minimum capacities which are provided and allowed by the controls.

2.1.1 General Requirements

Design, construction, installation, testing, and operation of boiler and appurtenances must comply with NBBI NB-23 PART 1, ASME BPVC SEC IV, ASME CSD-1, NFPA 54, NFPA 31, ANSI Z21.13/CSA 4.9, and the manufacturer's instructions.

2.1.2 Features

Provide a commercial, full condensing type boiler, with a combustion system consisting of gas valve and combustion blower designed to work in concert and have sealed combustion chamber. The boiler must be capable of a 5:1 turndown ratio to provide maximum system flexibility. Provide direct spark ignition. The boiler must be capable of low gas pressure operation and low NOx operation.

2.1.3 Construction

Construct the boiler with a heavy gauge steel outer jacket assembly, primed, and pre-painted on both sides. The outer jacket assembly must be completely independent of the combustion chamber.

2.1.4 Heat Exchanger

Construct the heat exchanger(s) of 316L stainless steel and be designed for a 160 psi working pressure in accordance with ASME BPVC SEC IV and bear the ASME "H" stamp. The heat exchanger shall be of gasketless design and shall be designed to drain condensation from the heat exchanger assembly. Provide a burner/flame observation port.

2.1.5 Controls

Provide each hot water heating boiler with a digital operating control system with multi-color graphic LCD display and include a BACnet control interface to allow the boiler to be connected to the building DDC system as specified in specification section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS. Provide a control system that includes, as a minimum, the following features:

a. Sequencer for controlling the boilers for "Lead Lag" and "Efficiency Optimization".

b. System pump control for controling a variable speed boiler pump to keep a constant delta T at all modulation rates.

2.2 BOILER TRIM AND CONTROL EQUIPMENT

Provide in accordance with ASME CSD-1 and ASME BPVC SEC IV and additional requirements specified below.

2.2.1 Emergency Disconnect Switch

Provide and locate on wall outside boiler room entrance or just inside door, when boiler room door is on building exterior as required by ASME CSD-1 to allow rapid and complete shutdown of the boiler in the event of an emergency. Emergency switch must be a pushbutton type safety switch as indicated on plans.

2.2.2 Relief Valves

Provide relieving capacity for the full output of boiler installed. Safety relief-valve piping must conform to ASTM A53/A53M, schedule 40 steel pipe and be piped full-size to a floor drain .

2.2.3 Pressure and Altitude Gage or Combination Pressure/Altitude Gage

Provide one located on supply water piping and one on return water piping.

2.2.4 Thermometer

Provide thermometer with a scale equivalent to 1.5 times outlet water temperature. Provide one located on supply water piping and one on return water piping.

2.2.5 Drain Tapping

Provide drain valve and piping to a floor drain .

2.2.6 Make-up Water Station

2.2.6.1 Pressure Reducing Station

Provide a water pressure-reducing valve and relief valve, or a combination of the two in the makeup water line to the boiler to maintain a water pressure of 12 psig in the hot water system. Provide a 3/4 inch globe valve by-pass around this valve.

2.2.6.2 Backflow Preventers

Section 22 00 00 PLUMBING, GENERAL PURPOSE. Locate upstream of by-pass.

2.2.7 Feedwater Treatment Feeder

Provide floor mounted, Type II - Shot-Type Feeder (manual, intermittent feed), as indicated for use with pressures up to 200 psig maximum.

2.2.8 Combustion Regulator

Provide adjustable temperature, thermostatic immersion type that must limit boiler water temperature to a maximum of 250 degrees F. Control must actuate burner through an electric relay system to maintain boiler water temperature within normal prescribed limits at loads within rated capacity of boiler.

2.2.9 Air Vent Valve

Provide with screwed connection, stainless steel disk, and stainless steel seats to vent entrapped air.

2.2.10 High Temperature Limit Switch

Provide adjustable immersible aquastat type with a temperature setting above that of the combustion regulator and below that of the lowest relief valve setting. Aquastat must function to cause a safety shutdown by closing fuel valves, and shutting down burner equipment , activating a red indicating light, and sounding an alarm in the event that boiler water temperature rises to the high temperature limit setting. A safety shutdown due to high temperature must require manual reset before operation can resume and prevent recycling of burner equipment. Pre-set high temperature limit devices that cannot be easily tested are not allowed.

2.2.11 Low Water Level Cutoff Switch

Low water level cutoff must cause a safety shutdown by closing fuel valves, and shutting down burner equipment , activating a red indicating light, and sounding an alarm in the event that water level drops below the lowest safe permissible water level established by the boiler manufacturer and ASME BPVC SEC IV. A safety shutdown due to low water must require manual reset before operation can resume and prevent recycling of burner equipment.

2.2.12 Boiler Safety Control Circuits

Provide boiler safety control circuits, including control circuits for burner and draft fan, must be single-phase, two-wire one-side grounded, and not over 120 volts. Provide safety control switching in ungrounded conductors. Provide overcurrent protection. In addition to circuit grounds, ground metal parts which do not carry current to a grounding conductor.

2.2.13 Indicating Lights

Each safety interlock requiring a manual reset must have an individually labeled red indicating light. Non-recycling control interlocks must have the reset located on the control itself. Red indicating lights on the control panel may be omitted if the burner combustion control system has a Keyboard Display Module installed that will identify the lockout information required in Item c. below. Indicating lights must have colors as follows:

a. Amber: Ignition on

b. Green: Main fuel safety shut-off valves open

c. Red (One for Each): Safety lockout, flame failure, low water level, and high temperature

d. Blue: Draft

2.2.14 Alarm Bell

Provide alarm bell, electrically operated, with a manual disconnect switch. Disconnect switch must be type and wired so that switching off alarm following a safety shutdown will not prevent alarm from sounding again upon recurrence of a subsequent safety shutdown condition.

2.2.15 Post-Combustion Purge

Provide controls and wiring necessary to ensure operation of draft fan for a period of not less than 15 seconds or of sufficient duration to provide four complete air changes in the boiler combustion chamber (whichever is greater) following shutdown of burner upon satisfaction of heat demand and in accordance with ASME CSD-1 . Upon completion of post-combustion purge period, draft fan must automatically shutdown until next restart.

2.2.16 Draft

Comply with boiler manufacturer's recommendations.

2.2.17 Stack, Breeching, and Supports

Provide each boiler with its own dedicated direct vent for both the intake and combustion air. Concentric vents are acceptable but must be done in accordance with the manufacturer's written instructions. The piping must be CPVC or Polypropylene with sealed vent material. The total combined length of the combined exhaust venting length shall not exceed 100 equivalent feet. The total combined length of the combined air intake length shall not exceed 100 equivalent feet.

2.2.18 Stack Thermometer

Provide flue gas dial type thermometer with scale calibrated from 150 to 750 degrees F and mounted in flue gas outlet.

2.3 ELECTRIC MOTORS

Electric motors must meet requirements of NEMA MG 00001. Motors less than 1 hp must meet NEMA High Efficiency requirements. Motors 1 hp and larger must meet NEMA Premium Efficiency requirements. Motors which are an integral part of the packaged boiler system must be the highest efficiency available by the manufacturer of the packaged boiler. Motors must be variable speed.

PART 3 EXECUTION

3.1 EQUIPMENT INSTALLATION

Install equipment in accordance with manufacturer's installation instructions and NBBI NB-23 PART 1. Grout equipment mounted on concrete foundations before installing piping. Install piping in such a manner as not to place a strain on equipment. Do not bolt flanged joints tight unless they match. Grade, anchor, guide, and support piping without low pockets. Feedwater treatment feeders must be mounted so that the top of the feeder is no higher than 48 inches above the finished floor.

3.2 EQUIPMENT FOUNDATIONS

Locate equipment foundations as indicated, designed, and made of sufficient size and weight to preclude shifting of equipment under operating conditions or under abnormal conditions that could be imposed upon the equipment. Foundations must meet requirements of the equipment manufacturer. Concrete and grout must conform to Section 03 30 00 CAST-IN-PLACE CONCRETE.

3.3 FIELD QUALITY CONTROL

Perform and furnish everything required for inspections and tests as specified herein to demonstrate that boiler and auxiliary equipment, as installed, are in compliance with contract requirements. Start-up and operate the system. During this time, clean strainers until no further accumulation of foreign material occurs. Exercise care to minimize loss of water when strainers are cleaned. Adjust safety and automatic control instruments as necessary to place them in proper operation and sequence. Test instrumentation must be calibrated and have full scale readings from 1.5 to 2 times test values.

3.3.1 Operational Tests

Furnish the services of an engineer or technician approved by the boiler manufacturer of installation, startup, operational and safety testing. This person must remain on the job until each boiler has been successfully operated. Furnish and perform everything required for inspections and tests of the boiler and auxiliary equipment. Test instrumentation must be calibrated and have full-scale reading from 1.5 to 2 times test values. Demonstrate proper operability of combustion control, flame safeguard control and safety interlocks. Provide a detailed description of all boiler startup and operational tests in the Commissioning Plan.

3.3.1.1 Preliminary Operational Test

Operate the boilers continuously for a period of at least 8 hours to demonstrate proper operability of the combustion control, flame safeguard control, and safety interlocks.

3.3.1.2 Acceptance Operational Test and Inspection

Prior to requesting an acceptance test, conduct a satisfactory operational test for at least 8 hours, and provide a certified statement that the equipment is installed per all requirements of this guide. Contracting Officer, upon receipt of the notice from the Contractor, will request a boiler inspection by a Naval Facilities Engineering and Expeditionary Warfare Center (EXWC) NAVFAC boiler inspector. Fifteen days advance notice is required for scheduling inspector to conduct acceptance operational test and inspection.

3.4 SCHEDULE

Some metric measurements in this section are based on mathematical conversion of inch-pound measurements, and not on metric measurements commonly agreed on by the manufacturers or other parties. The inch-pound and metric measurements shown are as follows:

Products	Inch-Pound	Metric
a. Alarm Bell Diameter	= 4 inches	= 100 mm
b. Stack Thermometer Scale Range	= 150-750 degrees F	= 66-399 degrees C

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 64 10

WATER CHILLERS, VAPOR COMPRESSION TYPE
05/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI 550/590 I-P	(2023) Performance Rating Of Water-Chilling and Heat Pump Water-Heating Packages Using the Vapor Compression Cycle
AHRI 580	(2014; R2022) Performance Rating of Non-condensable Gas Purge Equipment for Use with Low Pressure Centrifugal Liquid Chillers

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ANSI/ASHRAE 15 & 34	(2022) ASHRAE Standard 15-Safety Standard for Refrigeration Systems and ANSI/ASHRAE Standard 34-Designation and Safety Classification of Refrigerants

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME BPVC SEC VIII D1	(2023) BPVC Section VIII-Rules for Construction of Pressure Vessels Division 1

AMERICAN WELDING SOCIETY (AWS)

AWS Z49.1	(2021) Safety in Welding, Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM D520	(2025) Standard Specification for Zinc Dust Pigment
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

ASTM F104 (2011; R 2020) Standard Classification System for Nonmetallic Gasket Materials

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 00001 (2024) Motors and Generators

NEMA MG 10009 (2022) Energy Management Guide for Selection and Use of Single-Phase Motors

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 82 Protection of Stratospheric Ozone

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Verification of Dimensions

System Performance Tests

Demonstrations

Refrigerant

Water Chiller - Field Acceptance Test Plan

Scroll Type Water Chiller

SD-06 Test Reports

Field Acceptance Testing

Water Chiller - Field Acceptance Test Report

Factory Tests

System Performance Tests

Factory Test Schedule; G

Startup Report

SD-07 Certificates

Refrigeration System; G

Refrigeration Technician Certification

SD-08 Manufacturer's Instructions

Water Chiller - Installation Instructions; G

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G

Training Course Schedule; G

SD-11 Closeout Submittals

Indoor Air Quality During Construction; S

1.3 CERTIFICATIONS

1.3.1 Refrigeration Technician Certification

All technicians working on equipment that contain Class I or II refrigerants must be certified as a Section 608 Technician to meet requirements in 40 CFR 82, Subpart F. Provide copies of technician certifications to the Contracting Officer at least 14 calendar days prior to work on any equipment containing these refrigerants.

1.4 SAFETY REQUIREMENTS

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel must be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Install safety devices so that proper operation of equipment is not impaired. Welding and cutting safety requirements must be in accordance with AWS Z49.1.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect stored items from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Proper protection and care of all material both before and during installation is the Contractor's responsibility. Any materials found to be damaged must be replaced at the Contractor's expense. During installation, piping and similar openings must be capped to keep out dirt and other foreign matter.

1.6 PROJECT REQUIREMENTS

1.6.1 Verification of Dimensions

The Contractor must become familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS

Materials and equipment must be standard Commercial cataloged products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. These products must have a two year record of satisfactory field service prior to bid opening. The two year record of service must include applications of equipment and materials under similar circumstances and of similar size. Products having less than a two year record of satisfactory field service is acceptable if a certified record of satisfactory field service for not less than 6000 hours can be shown. The 6000 hour service record must not

include any manufacturer's prototype or factory testing. Satisfactory field service must have been completed by a product that has been, and presently is being sold or offered for sale on the commercial market through the following copyrighted means: advertisements, manufacturer's catalogs, or brochures.

2.2 MANUFACTURER'S STANDARD NAMEPLATES

Major equipment including chillers, compressors, compressor drivers, condensers, water coolers, receivers, refrigerant leak detectors, heat exchanges, fans, and motors must have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment. Plates must be durable and legible throughout equipment life. Fix plates in prominent locations with nonferrous screws or bolts.

Nameplates are required on major components if the manufacturer needs to provide specific engineering and manufacturing information pertaining to the particular component. Should replacement of this component be required, nameplate information must insure correct operation of the unit after replacement of this component.

2.3 ELECTRICAL WORK

a. Provide motors, controllers, integral disconnects, contactors, and controls with their respective pieces of equipment, except controllers indicated as part of motor control centers. Provide electrical equipment, including motors and wiring, as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Manual or automatic control and protective or signal devices required for the operation specified and control wiring required for controls and devices specified, but not shown, must be provided. For packaged equipment, the manufacturer must provide controllers including the required monitors and timed restart.

b. For single-phase motors, provide high-efficiency type, fractional-horsepower alternating-current motors, electronically commutated motors, including motors that are part of a system, in accordance with NEMA MG 10009.

c. For polyphase motors, provide squirrel-cage medium induction motors, including motors that are part of a system, and that meet the efficiency ratings for premium efficiency motors in accordance with NEMA MG 00001.

d. Provide motors in accordance with NEMA MG 00001 and of sufficient size to drive the load at the specified capacity without exceeding the nameplate rating of the motor. Motors must be rated for continuous duty with the enclosure specified. Motor duty requirements must allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motor torque must be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Provide motor starters complete with thermal overload protection and other necessary appurtenances. Motor enclosure type may be either TEAO or TEFC.

e. Use adjustable frequency drives for all variable-speed motor applications. Provide variable frequency drives for motors as

specified.

f. Provide inverter duty premium efficiency motors for use with variable frequency drives.

g. Provide electrical heat trace system in accordance with Section 23 64 26 CHILLED WATER PIPING SYSTEMS and per manufacturer installation instructions. Provide caution labels on insulation exterior aluminum jacket. Provide a 120v dedicated electrical circuit to supply power to the heat trace system for chiller piping, components and accessories. Electrical jumper from equipment connection is not allowed.

h. Provide one (1) 120v electrical GFICI receptacle for future service and maintenance with 25 feet of the chiller location.

2.4 SELF-CONTAINED WATER CHILLER, VAPOR COMPRESSION TYPE

Unless necessary for delivery purposes, units must be assembled, leak-tested, charged (refrigerant and oil), and adjusted at the factory. In lieu of delivery constraints, a chiller may be assembled, leak-tested, charged (refrigerant and oil), and adjusted at the job site by a factory representative. Unit components delivered separately must be sealed and charged with a nitrogen holding charge. Unit assembly must be completed in strict accordance with manufacturer's recommendations. Parts weighing 50 pounds or more which must be removed for inspection, cleaning, or repair, such as motors, gear boxes, cylinder heads, casing tops, condenser, and cooler heads, must have lifting eyes or lugs. Chiller must include all customary auxiliaries deemed necessary by the manufacturer for safe, controlled, automatic operation of the equipment. Provide chiller with a single point wiring connection for incoming power supply, unless noted otherwise on the drawings. Chiller must operate within capacity range and speed recommended by the manufacturer. Chiller must operate at partial load conditions without increased vibration over normal vibration at full load, and must be capable of continuous operation down to the specified minimum capacity.

2.4.1 Scroll Type Water Chiller

Chiller must be certified for performance per AHRI 550/590 I-P. If specified performance is outside of the Application Rating Conditions of AHRI 550/590 I-P, Table 2 then the chiller's performance must be rated in accordance with AHRI 550/590 I-P. In addition, project specific performance data must be based on the project site elevation above sea level, and clearly noted as such on the submittal. Chiller must conform to ANSI/ASHRAE 15 & 34. As a minimum, chiller must include the following components as defined in paragraph CHILLER COMPONENTS.

a. Refrigerant and oil

b. Structural base

c. Chiller refrigerant circuit per compressor

d. Controls package

e. Scroll, reciprocating, or rotary screw compressor

f. Compressor driver, electric motor

g. Compressor driver connection

h. Water cooler (evaporator)

i. Air-cooled condenser coil

j. Receiver

2.5 CHILLER COMPONENTS

2.5.1 Refrigerant

Refrigerants must be one of the fluorocarbon gases. Refrigerants must have number designations and safety classifications in accordance with ANSI/ASHRAE 15 & 34. CFC-based refrigerants are prohibited. Refrigerants must have an Ozone Depletion Potential (ODP) no greater than 0.0 and a maximum Global Warming Potential (GWP) of 700. Provide SDS sheets for all refrigerants.

2.5.2 Structural Base

Chiller and individual chiller components must be provided with a factory-mounted structural steel base (welded or bolted) or support legs. Chiller and individual chiller components must be isolated from the building structure by means of molded neoprene isolation pads. vibration isolators with published load ratings. Vibration isolators must have isolation characteristics as recommended by the manufacturer for the unit supplied and the service intended.

2.5.3 Chiller Refrigerant Circuit

Chiller refrigerant circuit must be completely piped and factory leak tested in accordance with ANSI/ASHRAE 15 & 34. For multicompressor units, not less than two independent refrigerant circuits must be provided. Circuit must include as a minimum a combination filter and drier, combination sight glass and moisture indicator, an electronic or thermostatic expansion valve with external equalizer or float valve, charging ports, compressor service valves for field-serviceable compressors, and superheat adjustment.

2.5.4 Controls Package

Provide chillers with a complete factory-mounted, microprocessor based operating and safety control system. Controls package must contain as a minimum a digital display, an on-auto-off switch, variable frequency motor controller, disconnect switches, power wiring, and control wiring. Controls package must provide operating controls, monitoring capabilities, programmable setpoints, safety controls, and BAS interfaces as defined below.

2.5.4.1 Operating Controls

Chiller must be provided with the following adjustable operating controls as a minimum.

a. Leaving chilled water temperature control

b. Adjustable timer or automated controls to prevent a compressor from short cycling

c. Automatic lead/lag controls (adjustable) for multi-compressor units

d. Load limiting

e. System capacity control to adjust the unit capacity in accordance with the system load and the programmable setpoints. Controls must automatically re-cycle the chiller on power interruption.

f. Startup and head pressure controls for air-cooled condensers to allow system operation at all ambient temperatures down to 0 degrees F.

g. Fan sequencing for air-cooled condenser

2.5.4.2 Monitoring Capabilities

During normal operations, the control system must be capable of monitoring and displaying the following operating parameters. Access and operation of display must not require opening or removing any panels or doors.

a. Entering and leaving chilled water temperatures

b. Chilled water flow

c. Entering and leaving condenser water pressure

d. Self diagnostic

e. Operation status

f. Operating hours

g. Number of starts

h. Compressor status (on or off)

i. Compressor load (percent)

j. Refrigerant discharge and suction pressures

k. Magnetic bearing levitation status (if applicable)

l. Magnetic bearing temperatures (if applicable)

m. Oil pressure (if applicable)

2.5.4.3 Configurable Setpoints

The control system must be capable of being configured directly at the unit's interface panel. No parameters may be capable of being changed without first entering a security access code. The programmable setpoints must include the following as a minimum:

a. Leaving Chilled Water Temperature

b. Time Clock/Calendar Date

2.5.4.4 Safety Controls with Manual Reset

Chiller must be provided with the following safety controls which automatically shutdown the chiller and which require manual reset.

a. Low chilled water temperature protection

b. High condenser refrigerant discharge pressure protection

c. Low evaporator pressure protection

d. Chilled water flow detection

e. High motor winding temperature protection

f. Low oil flow protection (if applicable)

g. Magnetic bearing controller (MBC), Internal fault (if applicable)

h. MBC, High bearing temperature (if applicable)

i. MBC, Communication fault (if applicable)

j. MBC, Power supply fault (if applicable)

k. Motor current overload and phase loss protection

2.5.4.5 Safety Controls with Automatic Reset

Chiller must be provided with the following safety controls which automatically shutdown the chiller and which provide automatic reset.

a. Over/under voltage protection

b. Chilled water flow interlock

c. MBC, Vibration (if applicable)

d. MBC, No levitation (if applicable)

e. Phase reversal protection

2.5.4.6 Remote Alarm

During the initiation of a safety shutdown, a chiller's control system must be capable of activating a remote alarm bell. In coordination with the chiller, the Contractor must provide an alarm circuit (including transformer if applicable) and a minimum 4 inch diameter alarm bell. Alarm circuit must activate bell in the event of machine shutdown due to the chiller's monitoring of safety controls. The alarm bell must not sound for a chiller that uses low-pressure cutout as an operating control.

2.5.4.7 Utility Monitoring and Control System Interface

Provide a Utility Monitoring and Control System (UMCS) interface meeting the requirements of Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and the requirements of Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS. The interface must provide all system operating conditions, capacity controls, and safety shutdown

conditions as network points. In addition, the following points must be overridable via the network interface:

a. Unit Start/Stop

b. Leaving Chilled Water Temperature Setpoint

2.5.5 Compressor(s)

2.5.5.1 Scroll Compressor(s)

Compressors must be of the hermetically sealed design. Compressors must be mounted on vibration isolators to minimize vibration and noise. Rotating parts must be statically and dynamically balanced at the factory to minimize vibration. Lubrication system must be centrifugal pump type equipped with a means for determining oil level and an oil charging valve. Crankcase oil heater must be provided. Provide continuous compressor unloading to 10 percent of full-load capacity by way of variable speed compressor motor controller or variable unloading of the scroll.

2.5.6 Compressor Driver, Electric Motor

Components such as motors, starters, variable speed drives, and wiring must be in accordance with paragraph ELECTRICAL WORK. Variable frequency drive must be unit mounted as indicated with variable frequency drive type, wiring, and accessories coordinated with the chiller manufacturer.

2.5.7 Compressor Driver Connections

Each machine driven through speed-increasing gears must be so designed as to assure self-alignment, interchangeable parts, proper lubrication system, and minimum unbalanced forces. Bearings must be of the sleeve or roller type. Gear cases must be oil tight. Shaft extensions must be provided with seals to retain oil and exclude all dust.

2.5.8 Water Cooler (Evaporator)

Cooler must be of the shell-and-coil or shell-and-tube type design. Cooler shell must be constructed of seamless or welded steel. Coil bundles must be totally removable and arranged to drain completely. Tubes must be seamless copper, plain, integrally finned with smooth bore or integrally finned with enhanced bore. Each tube must be individually replaceable. Tubes must be installed into carbon mild steel tube sheets by rolling. Tube baffles must be properly spaced to provide adequate tube support and cross flow. Performance must be based on a water velocity not less than 3 fps nor more than 12 fps and a fouling factor per AHRI 550/590 I-P.

Brazed plate heat exchanger must be constructed of 304 or 316 stainless steel, designed to a refrigerant-side working pressure of 430 psig and a waterside working pressure of 150 psig. Evaporator must be factory tested at 1.1 times maximum allowable refrigerant side working pressure and 1.5 times maximum allowable water side working pressure. Provide cooler heaters to protect the evaporator to an ambient of minus 20 degrees F. Provide cooler with factory-installed flow switches. All water connections must use either flanged or grooved-pipe connections. Factory insulate all cold surfaces.

2.5.9 Air-Cooled Condenser Coil

Condenser coil must be of the extended-surface fin-and-tube type and must be constructed of seamless copper tubes with compatible aluminum fins. Fins must be soldered or mechanically bonded to the tubes and installed in a metal casing. Coils must be circuited and sized for a minimum of 5 degrees F subcooling and full pump-down capacity. Coil must be factory leak and pressure tested after assembly in accordance with ANSI/ASHRAE 15 & 34.

Coil must be entirely coated in accordance with the requirements of paragraph COIL CORROSION PROTECTION.

2.5.10 Receivers

Receiver must bear a stamp certifying compliance with ASME BPVC SEC VIII D1 and must meet the requirements of ANSI/ASHRAE 15 & 34. Inner surfaces must be thoroughly cleaned by sandblasting or other approved means. Each receiver must have a storage capacity not less than 20 percent in excess of that required for the fully-charged system. Each receiver must be equipped with inlet, outlet drop pipe, drain plug, purging valve, relief valves of capacity and setting required by ANSI/ASHRAE 15 & 34, and two bull's eye liquid-level sight glasses. Sight glasses must be in the same vertical plane, 90 degrees apart, perpendicular to the axis of the receiver, and not over 3 inches horizontally from the drop pipe measured along the axis of the receiver. In lieu of bull's eye sight glass, external gauge glass with metal glass guard and automatic closing stop valves may be provided.

2.5.11 Chiller Purge System

Chillers which operate at pressures below atmospheric pressure must be provided with a purge system. Purge system must automatically remove air, water vapor, and non-condensible gases from the chiller's refrigerant while keeping refrigerant emissions below requirements of ASHRAE Std 147. Purge units must be certified per AHRI 580. Purge system must condense, separate, and return all refrigerant back to the chiller. An oil separator must be provided with the purge system if required by the manufacturer. Purge system must not discharge to occupied areas, or create a potential hazard to personnel. Purge system must include a purge pressure gauge, number of starts counter, and an elapsed time meter. Purge system must include lights or an alarm which indicate excessive purge or an abnormal air leakage into chiller.

2.6 ACCESSORIES

2.6.1 Refrigerant Relief Valve/Rupture Disc Assembly

The assembly must be a combination pressure relief valve and rupture disc designed for refrigerant usage. The assembly must be in accordance with ASME BPVC SEC VIII D1 and ANSI/ASHRAE 15 & 34. The assembly must be provided with a pressure gauge assembly that provides local indication if a rupture disc is broken. Rupture disc must be the non-fragmenting type.

2.6.2 Refrigerant Signs

Refrigerant signs must be a medium-weight aluminum type with a baked enamel finish. Signs must be suitable for indoor or outdoor service. Signs must have a white background with red letters not less than 0.5

inches in height.

2.6.2.1 Installation Identification

Each new refrigerating system must be provided with a refrigerant sign which indicates the following as a minimum:

a. Contractor's name.

b. Refrigerant number and amount of refrigerant.

c. The lubricant identity and amount.

d. Field test pressure applied.

2.6.2.2 Controls and Piping Identification

Refrigerant systems containing more than 110 lb of refrigerant must be provided with refrigerant signs which designate the following as a minimum:

a. Valves or switches for controlling the refrigerant flow and the refrigerant compressor(s).

b. Pressure limiting device(s).

2.6.3 Gaskets

Gaskets must conform to ASTM F104 - classification for compressed sheet with nitrile binder and acrylic fibers for maximum 700 degrees F service.

2.6.4 Bolts and Nuts

Bolts and nuts, except as required for piping applications, must be in accordance with ASTM A307 and rated for prolonged exposure to elements. The bolt head must be marked to identify the manufacturer and the standard with which the bolt complies in accordance with ASTM A307.

2.7 FABRICATION

2.7.1 Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, must be factory finished with the manufacturer's standard finish, except that items located outside of buildings must have weather resistant finishes that withstands a minimum of 6,000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen must show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used must be coated with a zinc-rich coating conforming to ASTM D520, Type I.

2.7.2 Factory Applied Insulation

Chiller must be provided with factory installed insulation on surfaces subject to sweating including the water cooler, suction line piping, economizer, and cooling lines. Insulation on heads of coolers may be field applied, however it must be installed to provide easy removal and

replacement of heads without damage to the insulation. Where motors are the gas-cooled type, factory installed insulation must be provided on the cold-gas inlet connection to the motor per manufacturer's standard practice. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors must have a flame spread index no higher than 75 and a smoke developed index no higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces must have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes must be determined by ASTM E84. Insulation must be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket must be tested as a composite material. Jackets, facings, and adhesives must have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E84.

2.7.3 Coil Corrosion Protection

Provide coil with a uniformly applied epoxy electrodeposition phenolic vinyl type coating to all coil surface areas without material bridging between fins. Submit product data on the type coating selected, the coating thickness, the application process used, the estimated heat transfer loss of the coil, and verification of conformance with the salt spray test requirement. Coating must be applied at either the coil or coating manufacturer's factory. Coating process must ensure complete coil encapsulation. Coating must be capable of withstanding a minimum 6,000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution.

2.8 FACTORY TESTS

2.8.1 Chiller Performance Test

The Contractor and proposed chiller manufacturer must be responsible for performing the chiller factory test to validate the specified full load capacity, full load EER, and IPLV in accordance with AHRI 550/590 I-P except as indicated. The Contractor and chiller manufacturer must provide to the Government a certified chiller factory test report in accordance with AHRI 550/590 I-P to confirm that the chiller performs as specified. Tests must be conducted in an AHRI certified test facility in conformance with AHRI 550/590 I-P procedures and tolerances, except as indicated. At a minimum, chiller capacity must be validated to meet the scheduled requirements indicated on the drawings. Tolerance or deviation must be in strict accordance with AHRI 550/590 I-P. Stable operation at minimum load of 10 percent of total capacity must be demonstrated during the factory test.

2.8.1.1 Temperature Adjustments

Temperature adjustments must adhere to AHRI 550/590 I-P to adjust from the design fouling factor to the clean tube condition. Test temperature adjustments must be verified prior to testing by the manufacturer. There must be no exceptions to conducting the test with clean tubes with the temperature adjustments per AHRI 550/590 I-P. The manufacturer must clean the tubes prior to testing to obtain a test fouling factor of 0.0000.

2.8.1.2 Test Instrumentation

The factory test instrumentation must be per AHRI 550/590 I-P and the calibration must be traceable to the National Institute of Standards and Technology.

2.8.1.3 Equipment Adjustments

If the equipment fails to perform within allowable tolerances, the manufacturer must be allowed to make necessary revisions to his equipment and retest as required. The manufacturer must assume all expenses incurred by the Government to witness the retest.

2.9 SUPPLEMENTAL COMPONENTS/SERVICES

2.9.1 Chilled and Condenser Water Piping and Accessories

Chilled and condenser water piping and accessories must be provided and installed in accordance with Section 23 64 26 CHILLED WATER PIPING SYSTEMS.

2.9.2 Temperature Controls

Chiller control packages must be fully coordinated with and integrated into the temperature control system indicated in Section 23 30 00 HVAC AIR DISTRIBUTION and Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

PART 3 EXECUTION

3.1 INSTALLATION

Installation of water chiller systems including materials, installation, workmanship, fabrication, assembly, erection, examination, inspection, and testing must be in accordance with the manufacturer's written installation instructions, including the following:

(1) Water chiller - installation instructions

3.1.1 Installation Instructions

Provide manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component, highlighted to show features such as materials, dimensions, options, performance and efficiency. Data must include manufacturer's recommended installation instructions, and start-up procedures and checklists. Data must be adequate to demonstrate compliance with contract requirements.

All recommendations stated in the installation instructions or other similar manufacturer's published literature must be considered mandatory and part of the contract documents. Any discrepancies to the engineered drawings and specifications must be brought to the attention of the COR.

3.1.2 Vibration Isolation

If vibration isolation is specified for a unit, vibration isolator literature must be included containing catalog cuts and certification that the isolation characteristics of the isolators provided meet the manufacturer's recommendations.

3.1.3 Verification of Dimensions

Provide a letter including the date the site was visited, conformation of existing conditions, and any discrepancies found.

3.1.4 System Performance Test Schedules

Provide a schedule, at least 2 weeks prior to the start of related testing, for the system performance tests. The schedules must identify the proposed date, time, and location for each test.

3.1.5 Certificates

Where the system, components, or equipment are specified to comply with requirements of AGA, NFPA, AHRI, ANSI/ASHRAE, ASME, or UL, proof of such compliance must be provided. The label or listing of the specified agency must be acceptable evidence. In lieu of the label or listing, a written certificate from an approved, nationally recognized testing organization equipped to perform such services, stating that the items have been tested and conform to the requirements and testing methods of the specified agency may be submitted. When performance requirements of this project's drawings and specifications vary from standard AHRI rating conditions, computer printouts, catalog, or other application data certified by AHRI or a nationally recognized laboratory as listed in this Certificates section must be included. If AHRI does not have a current certification program that encompasses such application data, the manufacturer may self certify that his application data complies with project performance requirements in accordance with the specified test standards.

3.1.6 Operation and Maintenance Manuals

Provide six complete copies of an operation manual in bound 8 1/2 by 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. The booklets must include the manufacturer's name, model number, and parts list. The manuals must include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features. Six complete copies of maintenance manual in bound 8 1/2 by 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals must include piping and equipment layouts and simplified wiring and control diagrams of the system as installed.

3.1.7 Refrigeration System

3.1.7.1 Equipment

Refrigeration equipment and the installation thereof must conform to ANSI/ASHRAE 15 & 34. Necessary supports must be provided for all equipment, appurtenances, and pipe as required, including frames or supports for compressors, pumps, cooling towers, condensers, water coolers, and similar items. Compressors must be isolated from the building structure. If mechanical vibration isolators are not provided, vibration absorbing foundations must be provided. Each foundation must include isolation units consisting of machine and floor or foundation fastenings, together with intermediate isolation material. Other floor-mounted equipment must be set on not less than a 6 inch concrete pad

doweled in place. Concrete foundations for floor mounted pumps must have a mass equivalent to three times the weight of the components, pump, base plate, and motor to be supported. In lieu of concrete pad foundation, concrete pedestal block with isolators placed between the pedestal block and the floor may be provided. Concrete pedestal block must be of mass not less than three times the combined pump, motor, and base weights. Isolators must be selected and sized based on load-bearing requirements and the lowest frequency of vibration to be isolated. Lines connected to pumps mounted on pedestal blocks must be provided with flexible connectors. Foundation drawings, bolt-setting information, and foundation bolts must be furnished prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Concrete for foundations must be as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE. Equipment must be properly leveled, aligned, and secured in place in accordance with manufacturer's instructions. All recommendations stated in the installation instructions or other similar manufacturer's published literature must be considered mandatory and part of the contract documents. Any discrepancies to the engineered drawings and specifications must be brought to the attention of the COR.

3.1.7.2 Field Refrigerant Charging

a. Initial Charge: Upon completion of all the refrigerant pipe tests, the vacuum on the system must be broken by adding the required charge of dry refrigerant for which the system is designed, in accordance with the manufacturer's recommendations. Contractor must provide the complete charge of refrigerant in accordance with manufacturer's recommendations. Upon satisfactory completion of the system performance tests, any refrigerant that has been lost from the system must be replaced. After the system is fully operational, service valve seal caps and blanks over gauge points must be installed and tightened.

b. Refrigerant Leakage: If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system must immediately be isolated from the remainder of the system and the refrigerant must be pumped into the system receiver or other suitable container. The refrigerant must not be discharged into the atmosphere.

c. Contractor's Responsibility: The Contractor must, at all times during the installation and testing of the refrigeration system, take steps to prevent the release of refrigerants into the atmosphere. The steps must include, but not be limited to, procedures that minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time must more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year must be repaired in accordance with the specified requirements including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

3.1.7.3 Oil Charging

Except for factory sealed units, two complete charges of lubricating oil for each compressor crankcase must be furnished. One charge must be used during the performance testing period, and upon the satisfactory completion of the tests, the oil must be drained and replaced with the second charge.

3.1.8 Field Applied Insulation

Field installed insulation must be as specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as defined differently herein.

3.1.9 Field Painting

Painting required for surfaces not otherwise specified, and finish painting of items only primed at the factory are specified in Section 09 90 00 PAINTS AND COATINGS.

3.2 FACTORY TEST SCHEDULING AND REPORTS

Provide Factory Test Schedule which identify the date, time, and location for each test. Schedules must be submitted for the Chiller Performance Tests. The Chiller Performance Test schedule must also allow the witnessing of the test by a Government Representative.

Six copies of the certified test report must be forwarded to the Government for approval prior to project acceptance. Calibration curves and information sheets for all instrumentation must be included. Provide copies in bound 8 1/2 by 11 inch booklets. Reports must certify the compliance with performance requirements and follow the format of the required testing standard for the Chiller Performance Tests. Test report must include certified calibration report of all test instrumentation. Calibration report must include certification that all test instrumentation has been calibrated within 6 months prior to the test date, identification of all instrumentation, and certification that all instrumentation complies with requirements of the test standard. Test report must be submitted 1 week after completion of the factory test.

3.3 MANUFACTURER'S FIELD SERVICE

The services of a factory-trained representative must be provided for overseeing of the installation, start-up, and initial operation of the chiller including field acceptance testing. Startup report shall be provided upon initial chiller start-up by manufacturer technical representative. The representative must advise on the following:

a. Hermetic machines:

(1) Testing hermetic water-chilling unit under pressure for refrigerant leaks; evacuation and dehydration of machine to an absolute pressure of not over 300 micrometers.

(2) Charging the machine with refrigerant.

(3) Starting the machine.

b. Open Machines:

(1) Erection, alignment, testing, and dehydrating.

(2) Charging the machine with refrigerant.

(3) Starting the machine.

3.4 CLEANING AND ADJUSTING

Equipment must be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. Provide temporary filters for all fans that are operated during construction. Perform and document that proper Indoor Air Quality During Construction procedures have been followed; this includes providing documentation showing that after construction ends, and prior to occupancy, new filters were provided and installed. System must be maintained in this clean condition until final acceptance. Bearings must be properly lubricated with oil or grease as recommended by the manufacturer. Belts must be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment must be adjusted to setting indicated or directed. Fans must be adjusted to the speed indicated by the manufacturer to meet specified conditions. At least one week before the official equipment warranty start date, all condenser coils on air-cooled water chillers and split-system water chillers must be cleaned in accordance with the chiller manufacturer's instructions. All recommendations stated in the installation instructions or other similar manufacturer's published literature must be considered mandatory and part of the contract documents. Any discrepancies to the engineered drawings and specifications must be brought to the attention of the COR. This work covers two coil cleanings. The condenser coils must be cleaned with an approved coil cleaner by a service technician, factory trained by the chiller manufacturer. The condenser coil cleaner must not have any detrimental affect on the materials or protective coatings on the condenser coils. Testing, adjusting, and balancing must be as specified in Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC.

3.5 FIELD ACCEPTANCE TESTING

3.5.1 Test Plans

a. Manufacturer's Test Plans: Within 120 calendar days after contract award, submit the following plans:

(1) Water chiller - Field Acceptance Test Plan

Field acceptance test plans must be developed by the chiller manufacturer detailing recommended field test procedures for that particular type and size of equipment. Field acceptance test plans developed by the installing Contractor, or the equipment sales agency furnishing the equipment, is not acceptable.

The Contracting Officer must review and approve the field acceptance test plan for each of the listed equipment prior to commencement of field testing of the equipment. The approved field acceptance tests of the chiller and subsequent test reporting.

b. Coordinated testing: Indicate in each field acceptance test plan when work required by this section requires coordination with test work required by other specification sections. Furnish test procedures for the simultaneous or integrated testing of tower system controls which interlock and interface with controls for the equipment provided under Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

c. Prerequisite testing: Chillers for which performance testing is dependent upon the completion of the work covered by Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC must have that work completed as a prerequisite to testing work under this section. Indicate in each field acceptance test plan when such prerequisite work is required.

d. Test procedure: Indicate in each field acceptance test plan each equipment manufacturers published installation, start-up, and field acceptance test procedures. Include in each test plan a detailed step-by-step procedure for testing automatic controls provided by the manufacturer.

Each test plan must include the required test reporting forms to be completed by the Contractor's testing representatives. Procedures must be structured to test the controls through all modes of control to confirm that the controls are performing with the intended sequence of control.

Controller must be verified to be properly calibrated and have the proper set point to provide stable control of their respective equipment.

e. Performance variables: Each test plan must list performance variables that are required to be measured or tested as part of the field test.

Include in the listed variables performance requirements indicated on the equipment schedules on the design drawings. Chiller manufacturer must furnish with each test procedure a description of acceptable results that have been verified.

Chiller manufacturer must identify the acceptable limits or tolerance within which each tested performance variable must acceptably operate.

f. Job specific: Each test plan must be job specific and must address the particular cooling towers and particular conditions which exist in this contract. Generic or general preprinted test procedures are not acceptable.

g. Specialized components: Each test plan must include procedures for field testing and field adjusting specialized components, such as hot gas bypass control valves, or pressure valves.

3.5.2 Testing

a. Each water chiller system must be field acceptance tested in compliance with its approved field acceptance test plan and the resulting following field acceptance test report submitted for approval:

(1) Water chiller - Field Acceptance Test Report

b. Manufacturer's recommended testing: Conduct the manufacturer's recommended field testing in compliance with the approved test plan. Furnish a factory trained field representative authorized by and to represent the equipment manufacturer at the complete execution of the field acceptance testing.

c. Operational test: Conduct a continuous 24 hour operational test for each item of equipment. Equipment shutdown before the test period is completed must result in the test period being started again and run for the required duration. For the duration of the test period, compile an operational log of each item of equipment. Log required entries every two hours. Use the test report forms for logging the operational variables.

d. Notice of tests: Conduct the manufacturer's recommended tests and the operational tests; record the required data using the approved reporting forms. Notify the Contracting Officer in writing at least 15 calendar days prior to the testing. Within 30 calendar days after acceptable completion of testing, submit each test report for review and approval.

e. Report forms: Type data entries and writing on the test report forms. Completed test report forms for each item of equipment must be reviewed, approved, and signed by the Contractor's test director. The manufacturer's field test representative must review, approve, and sign the report of the manufacturer's recommended test. Signatures must be accompanied by the person's name typed.

f. Deficiency resolution: The test requirements acceptably met; deficiencies identified during the tests must be corrected in compliance with the manufacturer's recommendations and corrections retested in order to verify compliance.

3.6 SYSTEM PERFORMANCE TESTS

All reports must be signed and submitted in electronic format. In addition, six copies of the report must be provided in bound 8 1/2 by 11 inch booklets.

3.6.1 General Requirements

Before each refrigeration system is accepted, tests to demonstrate the general operating characteristics of all equipment must be conducted by the manufacturer's approved start-up representative experienced in system start-up and testing, at such times as directed. Tests must cover a period of not less than 48 hours for each system and must demonstrate that the entire system is functioning in accordance with the drawings and specifications. Corrections and adjustments must be made as necessary and tests must be re-conducted to demonstrate that the entire system is functioning as specified. Prior to acceptance, service valve seal caps and blanks over gauge points must be installed and tightened. Any refrigerant lost during the system startup must be replaced. If tests do not demonstrate satisfactory system performance, deficiencies must be corrected and the system must be retested. Tests must be conducted in the presence of the Contracting Officer. Water and electricity required for the tests must be furnished by the Government. Any material, equipment, instruments, and personnel required for the test must be provided by the Contractor. Field tests must be coordinated with Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC.

3.6.2 Test Report

The report must document compliance with the specified performance criteria upon completion and testing of the system. The report must indicate the number of days covered by the tests and any conclusions as to

the adequacy of the system. The report must also include the following information and must be taken at least three different times at outside dry-bulb temperatures that are at least 5 degrees F apart:

a. Date and outside weather conditions.

b. The load on the system based on the following:

(1) The refrigerant used in the system.

(2) Condensing temperature and pressure.

(3) Suction temperature and pressure.

(4) Running current, voltage and proper phase sequence for each phase of all motors.

(5) The actual on-site setting of all operating and safety controls.

(6) Chilled water pressure, flow and temperature in and out of the chiller.

3.6.3 Auto-Start Verification

Prior to government acceptance, provide demonstration of auto-restart after an electrical power surge or outage with all applicable Acceptance Engineers, Engineering Technicians, Construction Managers and Prime Contractors in attendance.

3.7 DEMONSTRATIONS

Contractor must conduct a training course for the operating staff as designated by the Contracting Officer. The training period must consist of a total 8 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests. The training course must cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations.

Provide a Training Course Schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training.

-- End of Section --

SECTION 23 64 26

CHILLED WATER PIPING SYSTEMS
08/09, CHG 5: 11/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.22/CSA 4.4	(2015; R 2020) Relief Valves for Hot Water Supply Systems

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.1	(2020) Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250
ASME B16.18	(2021) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.21	(2021) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(2018) Standard for Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B31.9	(2020) Building Services Piping
ASME B40.100	(2022) Pressure Gauges and Gauge Attachments
ASME BPVC SEC IX	(2017; Errata 2018) BPVC Section IX-Welding, Brazing and Fusing Qualifications

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1003	(2020) Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems - (ANSI approved 2010)

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8/A5.8M	(2019) Specification for Filler Metals for Brazing and Braze Welding
AWS BRH	(2007; 5th Ed) Brazing Handbook

AWS D1.1/D1.1M	(2025) Structural Welding Code - Steel
AWS Z49.1	(2021) Safety in Welding, Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM A53/A53M	(2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B42	(2020) Standard Specification for Seamless Copper Pipe, Standard Sizes
ASTM B62	(2017) Standard Specification for Composition Bronze or Ounce Metal Castings
ASTM B75/B75M	(2020) Standard Specification for Seamless Copper Tube
ASTM B88	(2022) Standard Specification for Seamless Copper Water Tube
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B813	(2024) Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM D520	(2025) Standard Specification for Zinc Dust Pigment
ASTM D596	(2001; R 2018) Standard Guide for Reporting Results of Analysis of Water
ASTM D2308	(2007; R 2013) Standard Specification for Thermoplastic Polyethylene Jacket for Electrical Wire and Cable
ASTM D3308	(2012; R 2017) Standard Specification for PTFE Resin Skived Tape
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM F1007	(2018) Standard Specification for Pipeline Expansion Joints of the Packed Slip Type for Marine Application

ASTM F1120	(1987; R 2019) Standard Specification for Circular Metallic Bellows Type Expansion Joints for Piping Applications
ASTM F1199	(2021) Standard Specification for Cast (All Temperatures and Pressures) and Welded Pipe Line Strainers (150 psig and 150 degrees F Maximum)

EXPANSION JOINT MANUFACTURERS ASSOCIATION (EJMA)

EJMA Stds	(2015) (10th Ed) EJMA Standards

HYDRAULIC INSTITUTE (HI)

HI 1.1-1.2	(2014) Rotodynamic (Centrifugal) Pump for Nomenclature and Definitions

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 515	(2017) Standard for the Testing, Design, Installation, and Maintenance of Electrical Resistance Heat Tracing for Industrial Applications

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-25	(2018) Standard Marking System for Valves, Fittings, Flanges and Unions
MSS SP-58	(2025) Pipe Hangers and Supports - Materials, Design and Manufacture, Selection, Application, and Installation
MSS SP-67	(2022) Butterfly Valves
MSS SP-69	(2003; Notice 2012) Pipe Hangers and Supports - Selection and Application (ANSI Approved American National Standard)
MSS SP-70	(2011) Gray Iron Gate Valves, Flanged and Threaded Ends
MSS SP-71	(2018) Gray Iron Swing Check Valves, Flanged and Threaded Ends
MSS SP-72	(2010a) Ball Valves with Flanged or Butt-Welding Ends for General Service
MSS SP-78	(2011) Cast Iron Plug Valves, Flanged and Threaded Ends
MSS SP-80	(2019) Bronze Gate, Globe, Angle, and Check Valves
MSS SP-85	(2011) Gray Iron Globe & Angle Valves Flanged and Threaded Ends

MSS SP-110	(2010) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA MG 1	(2021) Motors and Generators
NEMA MG 11	(1977; R 2012) Energy Management Guide for Selection and Use of Single Phase Motors

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems

1.2 SYSTEM DESCRIPTION

Provide the water systems having the minimum service (design) temperature-pressure rating indicated. Provision of the piping systems, including materials, installation, workmanship, fabrication, assembly, erection, examination, inspection, and testing shall be in accordance with the required and advisory provisions of ASME B31.9 except as modified or supplemented by this specification section or design drawings. This specification section covers the water systems piping which is located within, on, and adjacent to building(s) within the building(s) 5 foot line.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Calibrated Balancing Valves; G

Water Temperature Regulating Valves; G

Water Pressure Reducing Valve

Pressure Relief Valve

Combination Pressure and Temperature Relief Valves

Expansion Joints; G

Pumps; G

Combination Strainer and Pump Suction Diffuser

Expansion Tanks

Air Separator Tanks

Water Treatment Systems; G

Proposed water treatment plan including a layout, control scheme, a list of existing make-up water conditions including the items listed in paragraph WATER ANALYSIS", a list of chemicals, the proportion of chemicals to be added, the final treated water conditions, and a description of environmental concerns for handling the chemicals.

SD-06 Test Reports

Piping Welds NDE Report

Pressure Tests Reports; G

Report shall be provided in bound 8-1/2 by 11 inch booklets. In the reports, document all phases of the tests performed. Include initial test summaries, all repairs/adjustments made, and the final test results.

SD-07 Certificates

Employer's Record Documents (For Welding)

Welding Procedures and Qualifications

Certificates shall be submitted showing conformance with the referenced standards contained in this section.

SD-08 Manufacturer's Instructions

Lesson plan for the Instruction Course;

SD-10 Operation and Maintenance Data

Requirements for data packages are specified Section 01 78 23 OPERATION AND MAINTENANCE DATA, except as supplemented and modified by this specification section.

Submit spare parts data for each different item of equipment specified, with operation and maintenance data packages. Include a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

Submit a list of qualified permanent service organizations with operation and maintenance data packages. Include service organization addresses and service area or expertise. The service organizations shall be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

Water Treatment Systems;

An operation manual in bound 8-1/2 by 11 inch booklets listing step-by-step procedures required for system startup, operation,

abnormal shutdown, emergency shutdown, and normal shutdown. Include testing procedures used in determining water quality.

A maintenance manual in bound 8-1/2 by 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide.

Calibrated Balancing Valves, Data Package 3;

Water Temperature Regulating Valves, Data Package 3;

Water Pressure Reducing Valve, Data Package 3;

Pressure Relief Valve, Data Package 2;

Combination Pressure and Temperature Relief Valves, Data Package 2;

Expansion Joints, Data Package 2;

Pumps, Data Package 3;

Combination Strainer and Pump Suction Diffuser, Data Package 2;

Expansion Tanks, Data Package 2;

Air Separator Tanks, Data Package 2;

1.4 MODIFICATIONS TO REFERENCES

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction", or words of similar meaning, to mean the Contracting Officer.

1.4.1 Definitions

For the International Code Council (ICC) Codes referenced in the contract documents, advisory provisions shall be considered mandatory, the word "should" shall be interpreted as "shall." Reference to the "code official" shall be interpreted to mean the "Contracting Officer." For Navy owned property, references to the "owner" shall be interpreted to mean the "Contracting Officer." For leased facilities, references to the "owner" shall be interpreted to mean the "lessor." References to the "permit holder" shall be interpreted to mean the "Contractor."

1.4.2 Administrative Interpretations

For ICC Codes referenced in the contract documents, the provisions of Chapter 1, "Administrator," do not apply. These administrative requirements are covered by the applicable Federal Acquisition Regulations (FAR) included in this contract and by the authority granted to the Officer in Charge of Construction to administer the construction of this project. References in the ICC Codes to sections of Chapter 1, shall be applied appropriately by the Contracting Officer as authorized by his administrative cognizance and the FAR.

1.5 SAFETY REQUIREMENTS

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel shall be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Safety devices shall be installed so that proper operation of equipment is not impaired.

1.6 DELIVERY, STORAGE, AND HANDLING

Protect stored items from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Proper protection and care of all material both before and during installation shall be the Contractor's responsibility. Any materials found to be damaged shall be replaced at the Contractor's expense. During installation, cap piping and similar openings to keep out dirt and other foreign matter. Any porous materials found to be contaminated with mold or mildew will be replaced at the Contractor's expense. Non-porous materials found to be contaminated with mold or mildew will be disinfected and cleaned prior to installation.

1.7 PROJECT/SITE CONDITIONS

1.7.1 Verification of Dimensions

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.7.2 Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and shall arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions.

1.7.3 Accessibility

Install all work so that parts requiring periodic inspection, operation, maintenance, and repair are readily accessible. Install concealed valves, expansion joints, controls, dampers, and equipment requiring access, in locations freely accessible through access doors.

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening.

The two year use shall include applications of equipment and materials under similar circumstances and of similar size. The 2 years experience shall be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures.

Products having less than a 2 year field service record shall be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. System components shall be environmentally suitable for the indicated locations.

The equipment items shall be supported by service organizations. These service organizations shall be reasonably convenient to the equipment installation and able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

2.2 ELECTRICAL HEAT TRACING

Provide heat trace systems for all exterior pipes, valves, and fittings that are in accordance with IEEE 515 and be UL listed. System include all necessary components, including heaters and controls to prevent freezing.

Provide self-regulating heaters consisting of two 16 AWG tinned-copper bus wires embedded in parallel in a self-regulating polymer core that varies its power output to respond to temperature along its length. Ensure heater is able to be crossed over itself without overheating. Obtain approval before used directly on plastic pipe. Cover heater with a radiation cross-linked modified polyolefin dielectric jacket in accordance with ASTM D2308.

Provide heater with self-regulating factor of at least 90 percent, in order to provide energy conservation and to prevent overheating.

Operate heater on line voltages as shown on plans.

Size Heater according to the following table:

Pipe Size

(Inch, Diameter)	Minus 10 degrees F	Minus 20 degrees F
3 inches or less	5 watts per foot (wpf)	5 wpf
4 inch	5 wpf	8 wpf
6 inch	8 wpf	8 wpf
8 inch	2 strips/5 wpf	2 strips/8 wpf
12 inch	2 strips/8 wpf	2 strips/8 wpf

Control systems by an ambient sensing thermostat set at 40 degrees F either directly or through an appropriate contactor.

2.3 STEEL PIPING

Water piping larger than 100 mm 4 inches shall be steel pipe or copper tubing. Provide steel piping with a ANSI/ASME Class 125 service rating, which for 150 degrees F, the pressure rating is 175 psig.

2.3.1 Pipe

Steel pipe, conform to ASTM A53/A53M, Schedule 40, Type E or S, Grades A or B. Do not use Type F pipe.

2.3.2 Fittings and End Connections (Joints)

Piping and fittings 3 inches and larger shall have flanged connections. The manufacturer of each fitting shall be permanently identified on the body of the fitting in accordance with MSS SP-25.

2.3.2.1 Flanged Connections

Flanges shall conform to ASME B16.1, Class 125. Gaskets shall be nonasbestos compressed material in accordance with ASME B16.21, 1/16 inch thickness, full face or self-centering flat ring type. These gaskets shall contain aramid fibers bonded with styrene butadeine rubber (SBR) or nitrile butadeine rubber (NBR). Bolts, nuts, and bolt patterns shall conform to ASME B16.1.

2.3.2.2 Dielectric Waterways and Flanges

Provide dielectric waterways with a water impervious insulation barrier capable of limiting galvanic current to 1 percent of short circuit current in a corresponding bimetallic joint. When dry, insulation barrier shall be able to withstand a 600-volt breakdown test. Provide dielectric waterways constructed of galvanized steel and have threaded end connections to match connecting piping. Dielectric waterways shall be suitable for the required operating pressures and temperatures. Provide dielectric flanges with the same pressure ratings as standard flanges and provide complete electrical isolation between connecting pipe and/or equipment as described herein for dielectric waterways.

2.4 COPPER TUBING

Provide copper tubing and fittings for all pipe 100 mm 4 inches and smaller with a ANSI/ASME Class 125 service rating, which for 150 degrees F., the pressure rating is 175 psig.

2.4.1 Tube

Use copper tube conforming to ASTM B88, Type L for aboveground tubing, and Type K for buried tubing.

2.4.2 Fittings and End Connections (Solder and Flared Joints)

Wrought copper and bronze solder joint pressure fittings, including unions ands flanges, shall conform to ASME B16.22 and ASTM B75/B75M. Provide adapters as required. Cast copper alloy solder-joint pressure fittings , including unions and flanges, shall conform to ASME B16.18. Cast copper alloy fittings for flared copper tube shall conform to ASME B16.26 and ASTM B62. ASTM B42 copper pipe nipples with threaded end connections shall conform to ASTM B42.

Copper tubing of sizes larger than 4 inches shall have brazed joints. Brass or bronze adapters for brazed tubing may be used for connecting tubing to flanges and to threaded ends of valves and equipment.

Extracted brazed tee joints may be used if produced with an acceptable

tool and installed in accordance with tool manufacturer's written procedures.

2.4.3 Solder

Provide solder in conformance with ASTM B32, grade Sb5, tin-antimony alloy. Solder flux shall be liquid or paste form, non-corrosive and conform to ASTM B813.

2.4.4 Brazing Filler Metal

Filler metal shall conform to AWS A5.8/A5.8M, Type BAg-5 with AWS Type 3 flux, except Type BCuP-5 or BCuP-6 may be used for brazing copper-to-copper joints.

2.5 VALVES

Provide valves with a ANSI/ASME Class 125 service rating, which for 150 degrees F, the pressure rating is 175 psig.

Valves in sizes larger than 1 inch and used on steel pipe systems, may be provided with rigid grooved mechanical joint ends. Such grooved end valves shall be subject to the same requirements as rigid grooved mechanical joints and fittings and, shall be furnished by the same manufacturer as the grooved pipe joint and fitting system.

2.5.1 Gate Valve

Gate valves 2-1/2 inches and smaller shall conform to MSS SP-80 Class 125 and shall be bronze with wedge disc, rising stem and threaded, soldered, or flanged ends. Gate valves 3 inches and larger shall conform to MSS SP-70, Class 125, cast iron with bronze trim, outside screw and yoke, and flanged or threaded ends.

2.5.2 Globe and Angle Valve

Globe and angle valves 2-1/2 inches and smaller shall conform to MSS SP-80, Class 125. Globe and angle valves 3 inches and larger shall conform to MSS SP-85, Class 125.

2.5.3 Check Valve

Check valves 2-1/2 inches and smaller shall conform to MSS SP-80. Check valves 3 inches and larger shall conform to MSS SP-71, Class 125.

2.5.4 Butterfly Valve

Butterfly valves shall conform to MSS SP-67, Type 1 and shall be lug type. Wafer type is prohibited. Valves smaller than 8 inches shall have throttling handles with a minimum of seven locking positions. Valves 8 inches and larger shall have totally enclosed manual gear operators with adjustable balance return stops and position indicators.

2.5.5 Plug Valve

Plug valves 2 inches and larger shall conform to MSS SP-78, have flanged or threaded ends, and have cast iron bodies with bronze trim. Valves 2 inches and smaller shall be bronze with NPT connections for black steel pipe and brazed connections for copper tubing. Valve shall be lubricated,

non-lubricated, or tetrafluoroethylene resin-coated type. Valve shall be resilient, double seated, trunnion mounted with tapered lift plug capable of 2-way shutoff. Valve shall operate from fully open to fully closed by rotation of the handwheel to lift and turn the plug. Valves 8 inches or larger shall be provided with manual gear operators with position indicators.

2.5.6 Ball Valve

Full port design. Ball valves 1/2 inch and larger shall conform to MSS SP-72 or MSS SP-110 and shall be cast iron or bronze with threaded, soldered, or flanged ends. Valves 8 inches or larger shall be provided with manual gear operators with position indicators. Ball valves may be provided in lieu of gate valves.

2.5.7 Square Head Cocks

Provide copper alloy or cast-iron body with copper alloy plugs, suitable for 125 psig water working pressure.

2.5.8 Calibrated Balancing Valves

Copper alloy or cast iron body, copper alloy or stainless internal working parts. Provide valve calibrated so that flow can be determined when the temperature and pressure differential across valve is known. Valve shall have an integral pointer which registers the degree of valve opening. Valve shall function as a service valve when in fully closed position. Valve shall be constructed with internal seals to prevent leakage and shall be supplied with preformed insulation.

Provide valve bodies with tapped openings and pipe extensions with positive shutoff valves outside of pipe insulation. The pipe extensions shall be provided with quick connecting hose fittings for a portable differential pressure meter connections to verify the pressure differential. Provide metal tag on each valve showing the gallons per minute flow for each differential pressure reading.

2.5.9 Water Temperature Regulating Valves

Provide copper alloy body, direct acting, pilot operated, for the intended service.

2.5.10 Water Pressure Reducing Valve

Valve, ASSE 1003 for water service, copper alloy body.

2.5.11 Pressure Relief Valve

Valve shall prevent excessive pressure in the piping system when the piping system reaches its maximum heat buildup. Valve, ANSI Z21.22/CSA 4.4 and shall have cast iron bodies with corrosion resistant internal working parts. The discharge pipe from the relief valve shall be the size of the valve outlet unless otherwise indicated.

2.5.12 Combination Pressure and Temperature Relief Valves

ANSI Z21.22/CSA 4.4, copper alloy body, automatic re-seating, test lever, and discharge capacity based on AGA temperature steam rating.

2.5.13 Float Valve

Angle pattern andor Globe pattern. Valve bodies 3 inches nominal pipe size and smaller shall be bronze. Valve bodies larger than 3 inches shall be cast iron or bronze. Steel parts shall be corrosion resistant. Where float rods are extended for tank applications, extension shall be properly supported and guided to avoid bending of float rod or stressing of valve pilot linkage.

2.5.14 Drain Valves

Valves, MSS SP-80 gate valves. Valve shall be manually-operated, 3/4 inch pipe size and above with a threaded end connection. Provide valve with a water hose nipple adapter. Freeze-proof type valves shall be provided in installations exposed to freezing temperatures.

2.5.15 Air Venting Valves

Manually-operated general service type air venting valves, brass or bronze valves that are furnished with threaded plugs or caps. Automatic type air venting shall be the ball-float type with brass/bronze or brass bodies, 300 series corrosion-resistant steel float, linkage and removable seat. Air venting valves on water coils shall have not less than 1/8 inch threaded end connections. Air venting valves on water mains shall have not less than 3/4 inch threaded end connections. Air venting valves on all other applications shall have not less than 1/2 inch threaded end connections.

2.5.16 Vacuum Relief Valves

ANSI Z21.22/CSA 4.4

2.6 PIPING ACCESSORIES

2.6.1 Strainer

Strainer, ASTM F1199, except as modified and supplemented in this specification. Strainer shall be the cleanable, basket or "Y" type, the same size as the pipeline. Strainer bodies shall be fabricated of cast iron with bottoms drilled, and tapped. Provide blowoff outlet with pipe nipple, gate valve, and discharge pipe nipple. The bodies shall have arrows clearly cast on the sides indicating the direction of flow.

Provide strainer with removable cover and sediment screen. The screen shall be made of minimum 22 gauge monel, with small perforations numbering not less than 400 per square inch to provide a net free area through the basket of at least 3.30 times that of the entering pipe. The flow shall be into the screen and out through the perforations.

2.6.2 Cyclonic Separator

Metal- bodied, with removal capability of removing solids 45 microns/325 mesh in size and heavier than 1.20 specific gravity, maximum pressure drop of 5 psid, with cleanout connection.

2.6.3 Combination Strainer and Pump Suction Diffuser

Angle type body with removable strainer basket and internal straightening vanes, a suction pipe support, and a blowdown outlet and plug. Strainer

shall be in accordance with ASTM F1199, except as modified and supplemented by this specification. Unit body shall have arrows clearly cast on the sides indicating the direction of flow.

Strainer screen shall be made of minimum 22 gauge monel, with small perforations numbering not less than 400 per square inch to provide a net free area through the basket of at least 3.30 times that of the entering pipe. Flow shall be into the screen and out through the perforations. Provide an auxiliary disposable fine mesh strainer which shall be removed 30 days after start-up. Provide warning tag for operator indicating scheduled date for removal.

Casing shall have connection sizes to match pump suction and pipe sizes, and be provided with adjustable support foot or support foot boss to relieve piping strains at pump suction. Provide unit casing with blowdown port and plug. Provide a magnetic insert to remove debris from system.

2.6.4 Flexible Pipe Connectors

Provide flexible pipe connectors on piping connected to equipment. Flexible section shall consist of rubber, tetrafluoroethylene resin, corrosion-resistant steel, bronze, monel, or galvanized steel. Material provided and configuration shall be suitable for pressure, temperature, and circulating medium. Flexible section shall have flanged ends and shall be suitable for service intended. Flexible section may be reinforced with metal retaining rings, with built-in braided wire reinforcement and restriction bolts or with wire braid cover suitable for service intended.Unless otherwise indicated, the length of the flexible connectors shall be as recommended by the manufacturer for the service intended. Internal sleeves or liners, compatible with circulating medium, shall be provided when recommended by the manufacturer. Provide covers to protect the bellows where indicated.

2.6.5 Pressure and Vacuum Gauges

Gauges, ASME B40.100 with throttling type needle valve or a pulsation dampener and shut-off valve. Provide gauges with 4.5 inch dial, brass or aluminum case, bronze tube, and siphon. Gauge shall have a range from 0 psig to approximately 1.5 times the maximum system working pressure. Each gauge range shall be selected so that at normal operating pressure, the needle is within the middle-third of the range.

2.6.6 Temperature Gauges

Temperature gauges, shall be the industrial duty type and be provided for the required temperature range. Provide gauges with fixed thread connection, dial face gasketed within the case; and an accuracy within 2 percent of scale range. Gauges shall have Fahrenheit scale in 2 degree graduations scale (black numbers) on a white face. The pointer shall be adjustable. Rigid stem type temperature gauges shall be provided in thermal wells located within 5 feet of the finished floor. Universal adjustable angle type or remote element type temperature gauges shall be provided in thermal wells located 5 to 7 feet above the finished floor or in locations indicated. Remote element type temperature gauges shall be provided in thermal wells located 7 feet above the finished floor or in locations indicated.

2.6.6.1 Stem Cased-Glass

Stem cased-glass case shall be polished stainless steel or cast aluminum, 9 inches long, with clear acrylic lens, and non-mercury filled glass tube with indicating-fluid column.

2.6.6.2 Bimetallic Dial

Bimetallic dial type case shall be not less than 3-1/2 inches, stainless steel, and shall be hermetically sealed with clear acrylic lens. Bimetallic element shall be silicone dampened and unit fitted with external calibrator adjustment.

2.6.6.3 Liquid-, Solid-, and Vapor-Filled Dial

Liquid-, solid-, and vapor-filled dial type cases shall be not less than 3-1/2 inches, stainless steel or cast aluminum with clear acrylic lens. Fill shall be nonmercury, suitable for encountered cross-ambients, and connecting capillary tubing shall be double-braided bronze.

2.6.6.4 Thermal Well

Thermal well shall be identical size, 1/2 or 3/4 inch NPT connection, brass or stainless steel. Where test wells are indicated, provide captive plug-fitted type 1/2 inch NPT connection suitable for use with either engraved stem or standard separable socket thermometer or thermostat. Mercury shall not be used in thermometers. Extended neck thermal wells shall be of sufficient length to clear insulation thickness by 1 inch.

2.6.7 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, guides, and supports: to MSS SP-58 and MSS SP-69. If ferrous materials are utilized provide hot-dipped galvanized hangers, inserts and supports.

2.6.8 Escutcheons

Provide one piece or split hinge metal plates for piping entering floors, walls, and ceilings in exposed spaces. Secure plates in place by internal spring tension or set screws. Provide polished stainless steel plates or chromium-plated finish on copper alloy plates in finished spaces. Provide paint finish on metal plates in unfinished spaces.

2.6.9 Expansion Joints

2.6.9.1 Slip-Tube Type

Slip-tube expansion joints, ASTM F1007, Class I or II. Joints shall be provided with internally-externally alignment guides, injected semi-plastic packing, and service outlets. End connections shall be flanged or beveled for welding as indicated. Initial settings shall be made in accordance with the manufacturer's recommendations to compensate for ambient temperature at time of installation. Pipe alignment guides shall be installed as recommended by the joint manufacturer.

2.6.9.2 Flexible Ball Type

Flexible ball expansion joints shall be capable of 360 degrees rotation plus 15 degrees angular flex movement. Joints shall be constructed of

carbon steel with the exterior spherical surface of carbon steel balls plated with a minimum 5 mils of hard chrome in accordance with EJMA Stds. Joint end connections shall be threaded for piping 2 inches or smaller. Joint end connections larger than 2 inches shall be grooved, flanged, or beveled for welding. Provide joint with pressure-molded composition gaskets suitable for continuous operation at twice design temperature.

2.6.9.3 Bellows Type

Bellows expansion type joints, ASTM F1120 with Type 304 stainless steel corrugated bellows, reinforced with equalizing rings, internal sleeves, and external protective covers. Joint end connections shall be grooved, flanged, or beveled for welding. Guiding of piping on both sides of expansion joint shall be in accordance with the published recommendations of the manufacturer of the expansion joint.

2.7 PUMPS

Pumps shall be the electrically driven, non-overloading, centrifugal type which conform to HI 1.1-1.2. Pumps shall be selected at or within 5 percent of peak efficiency. Pump curve shall rise continuously from maximum capacity to shutoff. Pump motor shall conform to NEMA MG 1, be open , and have sufficient horsepower for the service required. Pump motor shall have the required capacity to prevent overloading with pump operating at any point on its characteristic curve. Pump speed shall not exceed 3,600 rpm, except where the pump head is less than 60 feet of water, the pump speed shall not exceed 1,750 rpm. Pump motor shall be equipped with an across-the-line magnetic controller in a NEMA 250, Type 1 enclosure with "START-STOP" switch in the cover.

2.7.1 Construction

Each pump casing shall be designed to withstand the discharge head specified plus the static head on system plus 50 percent of the total, but not less than 125 psig. Pump casing and bearing housing shall be close grained cast iron. High points in the casing shall be provided with manual air vents; low points shall be provided with drain plugs. Provide threaded suction and discharge pressure gage tapping with square-head plugs.

Impeller shall be statically and dynamically balanced. Impeller, impeller wearing rings, glands, casing wear rings, and shaft sleeve shall be bronze. Shaft shall be carbon or alloy steel, turned and ground. Bearings shall be ball-bearings, roller-bearings, or oil-lubricated bronze-sleeve type bearings, and be efficiently sealed or isolated to prevent loss of oil or entrance of dirt or water.

Pump and motor shall be mounted on a common cast iron base having lipped edges and tapped drainage openings or structural steel base with lipped edges or drain pan and tapped drainage openings. Pump shall be provided with steel shaft coupling guard. Base-mounted pump, coupling guard, and motor shall each be bolted to a fabricated steel base which shall have bolt holes for securing base to supporting surface. Close-coupled pump shall be provided with integrally cast or fabricated steel feet with bolt holes for securing feet to supporting surface. Close- coupled pumps shall be provided with drip pockets and tapped openings. Pump shall be accessible for servicing without disturbing piping connections. Shaft seals shall be mechanical-seals or stuffing-box type.

2.7.2 Mechanical Shaft Seals

Seals shall be single, inside mounted, end-face-elastomer bellows type with stainless steel spring, brass or stainless steel seal head, carbon rotating face, and tungsten carbide or ceramic sealing face. Glands shall be bronze and of the water-flush design to provide lubrication flush across the face of the seal. Bypass line from pump discharge to flush connection in gland shall be provided, with filter or cyclone particle separator in line.

2.7.3 Stuffing-Box Type Seals

Stuffing box shall include minimum 4 rows of square, impregnated TFE (Teflon) or graphite cord packing and a bronze split-lantern ring. Packing gland shall be bronze interlocking split type.

2.8 EXPANSION TANKS

Tank shall be welded steel, constructed for, and tested to pressure-temperature rating of 125 psi at 150 degrees F. Provide tanks precharged to the minimum operating pressure. Tank shall have a replaceable polypropylene or butyl lined diaphragm which keeps the air charge separated from the water; shall be the captive air type.

Tanks shall accommodate expanded water of the system generated within the normal operating temperature range, limiting this pressure increase at all components in the system to the maximum allowable pressure at those components. Each tank air chamber shall be fitted with a drain, fill, an air charging valve, and system connections. Tank shall be supported by steel legs or bases for vertical installation or steel saddles for horizontal installations. The only air in the system shall be the permanent sealed-in air cushion contained within the expansion tank.

2.9 AIR SEPARATOR TANKS

External air separation tank shall have an internal design constructed of stainless steel and suitable for creating the required vortex and subsequent air separation. Tank shall be steel, constructed for, and tested to pressure-temperature rating of 125 psi at 150 degrees F. Tank shall have tangential inlets and outlets connections, threaded for 2 inches and smaller and flanged for sizes 2-1/2 inches and larger. Air released from a tank shall be vented as indicated. Tank shall be provided with a blow-down connection.

2.10 WATER TREATMENT SYSTEMS

When water treatment is specified, the use of chemical-treatment products containing equivalent chromium (CPR) is prohibited.

2.10.1 Water Analysis

Conditions of make-up water to be supplied to the condenser and chilled water systems were reported in accordance with ASTM D596 and are as follows:

Date of Sample	_____

Temperature	_____ degrees F
Silica (Sino 2)	_____ pp (mg/1)
Insoluble	_____ pp (mg/1)
Iron and Aluminum Oxides	_____ pp (mg/1)
Calcium (Ca)	_____ pp (mg/1)
Magnesium (Mg)	_____ pp (mg/1)
Sodium and Potassium (Nan and AK)	_____ pp (mg/1)
Carbonate (HO 3)	_____ pp (mg/1)
Sulfate (SO 4)	_____ pp (mg/1)
Chloride (JCL)	_____ pp (mg/1)
Nitrate (NO 3	_____ pp (mg/1)
Turbidity	_____ unit
pH	_____
Residual Chlorine	_____ pp (mg/1)
Total Alkalinity	_____ PM (me/1
Non-Carbonate Hardness	_____ PM (me/1
Total Hardness	_____ PM (me/1
Dissolved Solids	_____ pp (mg/1)
Fluorine	_____ pp (mg/1)
Conductivity	_____ micromhos/cm

2.10.2 Chilled Water

Water to be used in the chilled and condenser water systems shall be treated to maintain the conditions recommended by this specification as well as the recommendations from the manufacturers of the condenser and evaporator coils. Chemicals shall meet all required federal, state, and local environmental regulations for the treatment of evaporator coils and direct discharge to the sanitary sewer.

2.10.3 Water Treatment Services

The services of a company regularly engaged in the treatment of condenser and chilled water systems shall be used to determine the correct chemicals required, the concentrations required, and the water treatment equipment sizes and flow rates required. The company shall maintain the chemical

treatment and provide all chemicals required for the condenser and chilled water systems for a period of 1 year from the date of occupancy. The chemical treatment and services provided over the 1 year period shall meet the requirements of this specification as well as the recommendations from the manufacturers of the condenser and evaporator coils. Acid treatment and proprietary chemicals shall not be used.

2.10.4 Chilled Water System

A shot feeder shall be provided on the chilled water piping as indicated. Size and capacity of feeder shall be based on local requirements and water analysis. The feeder shall be furnished with an air vent, gauge glass, funnel, valves, fittings, and piping.

2.11 ELECTRICAL WORK

Provide motors, controllers, integral disconnects, contactors, and controls with their respective pieces of equipment, except controllers indicated as part of motor control centers. Provide electrical equipment, including motors and wiring, as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Manual or automatic control and protective or signal devices required for the operation specified and control wiring required for controls and devices specified, but not shown, shall be provided. For packaged equipment, the manufacturer shall provide controllers including the required monitors and timed restart.

Provide high efficiency type, single-phase, fractional-horsepower alternating-current motors, including motors that are part of a system, in accordance with NEMA MG 11.

Provide polyphase, squirrel-cage medium induction motors, including motors that are part of a system, that meet the efficiency ratings for premium efficiency motors in accordance with NEMA MG 1. Provide motors in accordance with NEMA MG 1 and of sufficient size to drive the load at the specified capacity without exceeding the nameplate rating of the motor.

Motors shall be rated for continuous duty with the enclosure specified. Motor duty requirements shall allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motor torque shall be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Provide motor starters complete with thermal overload protection and other necessary appurtenances. Motor bearings shall be fitted with grease supply fittings and grease relief to outside of the enclosure.

Where two-speed or variable-speed motors are indicated, solid-state variable-speed controllers may be provided to accomplish the same function. Use solid-state variable-speed controllers for motors rated 10 hp or less and adjustable frequency drives for larger motors. Provide variable frequency drives for motors as specified.

2.12 PAINTING OF NEW EQUIPMENT

New equipment painting shall be factory applied or shop applied, and shall be as specified herein, and provided under each individual section.

2.12.1 Factory Painting Systems

Manufacturer's standard factory painting systems may be provided. The factory painting system applied will withstand 125 hours in a salt-spray fog test, except that equipment located outdoors shall withstand 500 hours in a salt-spray fog test.

Salt-spray fog test shall be in accordance with ASTM B117, and for that test, the acceptance criteria shall be as follows: immediately after completion of the test, the paint shall show no signs of blistering, wrinkling, or cracking, and no loss of 0.125 inch on either side of the scratch mark. The film thickness of the factory painting system applied on the equipment shall not be less than the film thickness used on the test specimen.

If manufacturer's standard factory painting system is being proposed for use on surfaces subject to temperatures above 120 degrees F, the factory painting system shall be designed for the temperature service.

2.12.2 Shop Painting Systems for Metal Surfaces

Clean, retreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except metal surfaces subject to temperatures in excess of 120 degrees F shall be cleaned to bare metal.

Where hot-dip galvanized steel has been cut, resulting surfaces with no galvanizing shall be coated with a zinc-rich coating conforming to ASTM D520, Type I.

Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Color of finish coat shall be aluminum or light gray.

a. Temperatures Less Than 120 Degrees F: Immediately after cleaning, the metal surfaces subject to temperatures less than 120 degrees F shall receive one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of one mil; and two coats of enamel applied to a minimum dry film thickness of one mil per coat.

b. Temperatures Between 120 and 400 degrees F: Metal surfaces subject to temperatures between 120 and 400 degrees F shall receive two coats of 400 degrees F heat-resisting enamel applied to a total minimum thickness of 2 mils.

c. Temperatures Greater Than 400 degrees F: Metal surfaces subject to temperatures greater than 400 degrees F shall receive two coats of 600 degrees F heat-resisting paint applied to a total minimum dry film thickness of 2 mils.

2.13 FACTORY APPLIED INSULATION

Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors shall have a flame spread index no higher than 25 and a smoke developed index no

higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes shall be determined by ASTM E84.

Insulation shall be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket shall be tested as a composite material. Jackets, facings, and adhesives shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E84.

2.14 NAMEPLATES

Major equipment including pumps, pump motors, expansion tanks, and air separator tanks shall have the manufacturer's name, type or style, model or serial number on a plate secured to the item of equipment. The nameplate of the distributing agent will not be acceptable. Plates shall be durable and legible throughout equipment life and made of anodized aluminum. Plates shall be fixed in prominent locations with nonferrous screws or bolts.

2.15 RELATED COMPONENTS/SERVICES

2.15.1 Drain and Make-Up Water Piping

Requirements for drain and make-up water piping and backflow preventer is specified in Section 22 00 00 PLUMBING, GENERAL PURPOSE.

2.15.2 Field Applied Insulation

Requirements for field installed insulation is specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as supplemented and modified by this specification section.

2.15.3 Field Painting

Requirements for painting of surfaces not otherwise specified, and finish painting of items only primed at the factory, are specified in Section 09 90 00PAINTS AND COATINGS.

2.15.3.1 Color Coding

Requirements for color coding for piping identification are specified in Section 09 90 00 PAINTS AND COATINGS.

PART 3 EXECUTION

3.1 INSTALLATION

Cut pipe accurately to measurements established at the jobsite, and work into place without springing or forcing, completely clearing all windows, doors, and other openings. Cutting or other weakening of the building structure to facilitate piping installation is not permitted without written approval. Cut pipe or tubing square, remove burrs by reaming, and fashion to permit free expansion and contraction without causing damage to the building structure, pipe, joints, or hangers.

Notify the Contracting Officer in writing at least 15 calendar days prior to the date the connections are required. Obtain approval before interrupting service. Furnish materials required to make connections into existing systems and perform excavating, backfilling, compacting, and other incidental labor as required. Furnish labor and tools for making actual connections to existing systems.

3.1.1 Welding

Provide welding work specified this section for piping systems in conformance with ASME B31.9, as modified and supplemented by this specification section and the accompanying drawings. The welding work includes: qualification of welding procedures, welders, welding operators, brazers, brazing operators, and nondestructive examination personnel; maintenance of welding records, and examination methods for welds.

3.1.1.1 Employer's Record Documents (For Welding)

Submit for review and approval the following documentation. This documentation and the subject qualifications shall be in compliance with ASME B31.9.

a. List of qualified welding procedures that is proposed to be used to provide the work specified in this specification section.

b. List of qualified welders, brazers, welding operators, and brazing operators that are proposed to be used to provide the work specified in this specification section.

c. List of qualified weld examination personnel that are proposed to be used to provide the work specified in this specification section.

3.1.1.2 Welding Procedures and Qualifications

a. Specifications and Test Results: Submit copies of the welding procedures specifications and procedure qualification test results for each type of welding required. Approval of any procedure does not relieve the Contractor of the responsibility for producing acceptable welds. Submit this information on the forms printed in ASME BPVC SEC IX or their equivalent.

b. Certification: Before assigning welders or welding operators to the work, submit a list of qualified welders, together with data and certification that each individual is performance qualified as specified. Do not start welding work prior to submitting welder, and welding operator qualifications. The certification shall state the type of welding and positions for which each is qualified, the code and procedure under which each is qualified, date qualified, and the firm and individual certifying the qualification tests.

3.1.1.3 Examination of Piping Welds

Conduct non-destructive examinations (NDE) on piping welds and brazing and verify the work meets the acceptance criteria specified in ASME B31.9. NDE on piping welds covered by ASME B31.9 is visual inspection only. Submit a piping welds NDE report meeting the requirements specified in ASME B31.9.

3.1.1.4 Welding Safety

Welding and cutting safety requirements shall be in accordance with AWS Z49.1.

3.1.2 Directional Changes

Make changes in direction with fittings, except that bending of pipe 4 inches and smaller is permitted, provided a pipe bender is used and wide weep bends are formed. Mitering or notching pipe or other similar construction to form elbows or tees is not permitted. The centerline radius of bends shall not be less than 6 diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations is not acceptable.

3.1.3 Functional Requirements

Pitch horizontal supply mains down in the direction of flow as indicated. The grade shall not be less than 1 inch in 40 feet. Reducing fittings shall be used for changes in pipe sizes. Cap or plug open ends of pipelines and equipment during installation to keep dirt or other foreign materials out of the system.

Pipe not otherwise specified shall be uncoated. Connections to appliances shall be made with malleable iron unions for steel pipe 2-1/2 inches or less in diameter, and with flanges for pipe 3 inches and above in diameter. Connections between ferrous and copper piping shall be electrically isolated from each other with dielectric waterways or flanges.

Piping located in air plenums shall conform to NFPA 90A requirements. Pipe and fittings installed in inaccessible conduits or trenches under concrete floor slabs shall be welded. Equipment and piping arrangements shall fit into space allotted and allow adequate acceptable clearances for installation, replacement, entry, servicing, and maintenance. Electric isolation fittings shall be provided between dissimilar metals.

3.1.4 Fittings and End Connections

3.1.4.1 Threaded Connections

Threaded connections shall be made with tapered threads and made tight with PTFE tape complying with ASTM D3308 or equivalent thread-joint compound applied to the male threads only. Not more than three threads shall show after the joint is made.

3.1.4.2 Brazed Connections

Brazing, AWS BRH, except as modified herein. During brazing, the pipe and fittings shall be filled with a pressure regulated inert gas, such as nitrogen, to prevent the formation of scale. Before brazing copper joints, both the outside of the tube and the inside of the fitting shall be cleaned with a wire fitting brush until the entire joint surface is bright and clean. Do not use brazing flux. Surplus brazing material shall be removed at all joints. Steel tubing joints shall be made in accordance with the manufacturer's recommendations. Piping shall be supported prior to brazing and not be sprung or forced.

3.1.4.3 Welded Connections

Branch connections shall be made with welding tees or forged welding branch outlets. Pipe shall be thoroughly cleaned of all scale and foreign matter before the piping is assembled. During welding, the pipe and fittings shall be filled with an inert gas, such as nitrogen, to prevent the formation of scale. Beveling, alignment, heat treatment, and inspection of weld shall conform to ASME B31.9. Weld defects shall be removed and rewelded at no additional cost to the Government. Electrodes shall be stored and dried in accordance with AWS D1.1/D1.1M or as recommended by the manufacturer. Electrodes that have been wetted or that have lost any of their coating shall not be used.

3.1.4.4 Flared Connections

When flared connections are used, a suitable lubricant shall be used between the back of the flare and the nut in order to avoid tearing the flare while tightening the nut.

3.1.4.5 Flanges and Unions

Except where copper tubing is used, union or flanged joints shall be provided in each line immediately preceding the connection to each piece of equipment or material requiring maintenance such as coils, pumps, control valves, and other similar items. Flanged joints shall be assembled square end tight with matched flanges, gaskets, and bolts. Gaskets shall be suitable for the intended application.

3.1.5 Valves

Isolation gate or ball valves shall be installed on each side of each piece of equipment, at the midpoint of all looped mains, and at any other points indicated or required for draining, isolating, or sectionalizing purpose. Isolation valves may be omitted where balancing cocks are installed to provide both balancing and isolation functions. Each valve except check valves shall be identified. Valves in horizontal lines shall be installed with stems horizontal or above.

3.1.6 Air Vents

Air vents shall be provided at all high points, on all water coils, and where indicated to ensure adequate venting of the piping system.

3.1.7 Drains

Drains shall be provided at all low points and where indicated to ensure complete drainage of the piping. Drains shall be accessible, and shall consist of nipples and caps or plugged tees unless otherwise indicated.

3.1.8 Flexible Pipe Connectors

Connectors shall be attached to components in strict accordance with the latest printed instructions of the manufacturer to ensure a vapor tight joint. Hangers, when required to suspend the connectors, shall be of the type recommended by the flexible pipe connector manufacturer and shall be provided at the intervals recommended.

3.1.9 Temperature Gauges

Temperature gauges shall be located on coolant supply and return piping at each heat exchanger, on condenser water piping entering and leaving a condenser, at each automatic temperature control device without an integral thermometer, and where indicated or required for proper operation of equipment. Thermal wells for insertion thermometers and thermostats shall extend beyond thermal insulation surface not less than 1 inch.

3.1.10 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69, except as supplemented and modified in this specification section. Pipe hanger types 5, 12, and 26 shall not be used. Hangers used to support piping 2 inches and larger shall be fabricated to permit adequate adjustment after erection while still supporting the load. Piping subjected to vertical movement, when operating temperatures exceed ambient temperatures, shall be supported by variable spring hangers and supports or by constant support hangers.

3.1.10.1 Hangers

Type 3 shall not be used on insulated piping. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

3.1.10.2 Inserts

Type 18 inserts shall be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustments may be used if they otherwise meet the requirements for Type 18 inserts.

3.1.10.3 C-Clamps

Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and have both locknuts and retaining devices, furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

3.1.10.4 Angle Attachments

Type 20 attachments used on angles and channels shall be furnished with an added malleable-iron heel plate or adapter.

3.1.10.5 Saddles and Shields

Where Type 39 saddle or Type 40 shield are permitted for a particular pipe attachment application, the Type 39 saddle, connected to the pipe, shall be used on all pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Type 40 shields shall be used on all piping less than 4 inches and all piping 4 inches and larger carrying medium less than 60 degrees F. A high density insulation insert of cellular glass shall be used under the Type 40 shield for piping 2 inches and larger.

3.1.10.6 Horizontal Pipe Supports

Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 1 foot from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 5 feet apart at valves. Pipe hanger loads suspended from steel joist with hanger loads between panel points in excess of 50 pounds shall have

the excess hanger loads suspended from panel points.

3.1.10.7 Vertical Pipe Supports

Vertical pipe shall be supported at each floor, except at slab-on-grade, and at intervals of not more than 15 feet, not more than 8 feet from end of risers, and at vent terminations.

3.1.10.8 Pipe Guides

Type 35 guides using, steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides shall be provided where required to allow longitudinal pipe movement. Lateral restraints shall be provided as required. Slide materials shall be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered.

3.1.10.9 Steel Slides

Where steel slides do not require provisions for restraint of lateral movement, an alternate guide method may be used. On piping 4 inches and larger, a Type 39 saddle shall be used. On piping under 4 inches, a Type 40 protection shield may be attached to the pipe or insulation and freely rest on a steel slide plate.

3.1.10.10 Multiple Pipe Runs

In the support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run.

3.1.10.11 Structural Attachments

Attachment to building structure concrete and masonry shall be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors shall be applied with a safety factor not less than 5. Supports shall not be attached to metal decking. Supports shall not be attached to the underside of concrete filled floors or concrete roof decks unless approved by the Contracting Officer. Masonry anchors for overhead applications shall be constructed of ferrous materials only. Structural steel brackets required to support piping, headers, and equipment, but not shown, shall be provided under this section.

3.1.11 Pipe Alignment Guides

Pipe alignment guides shall be provided where indicated for expansion loops, offsets, and bends and as recommended by the manufacturer for expansion joints, not to exceed 5 feet on each side of each expansion joint, and in lines 4 inches or smaller not more than 2 feet on each side of the joint.

3.1.12 Pipe Anchors

Anchors shall be provided where indicated. Unless indicated otherwise, anchors shall comply with the requirements specified. Anchors shall consist of heavy steel collars with lugs and bolts for clamping and attaching anchor braces, unless otherwise indicated. Anchor braces shall be installed in the most effective manner to secure the desired results using turnbuckles where required.

Supports, anchors, or stays shall not be attached where they will injure the structure or adjacent construction during installation or by the weight of expansion of the pipeline. Where pipe and conduit penetrations of vapor barrier sealed surfaces occur, these items shall be anchored immediately adjacent to each penetrated surface, to provide essentially zero movement within penetration seal.

3.1.13 Building Surface Penetrations

Sleeves shall not be installed in structural members except where indicated or approved. Except as indicated otherwise piping sleeves shall comply with requirements specified. Sleeves in nonload bearing surfaces shall be galvanized sheet metal, conforming to ASTM A653/A653M, Coating Class G-90, 20 gauge. Sleeves in load bearing surfaces shall be uncoated carbon steel pipe, conforming to ASTM A53/A53M, Schedule 20. Sealants shall be applied to moisture and oil-free surfaces and elastomers to not less than 1/2 inch depth. Sleeves shall not be installed in structural members.

3.1.13.1 General Service Areas

Each sleeve shall extend through its respective wall, floor, or roof, and shall be cut flush with each surface. Pipes passing through concrete or masonry wall or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves shall be of such size as to provide a minimum of 1/4 inch all-around clearance between bare pipe and sleeves or between jacketed-insulation and sleeves. Except in pipe chases or interior walls, the annular space between pipe and sleeve or between jacket over-insulation and sleeve shall be sealed in accordance with Section 07 92 00 JOINT SEALANTS.

3.1.13.2 Waterproof Penetrations

Pipes passing through roof or floor waterproofing membrane shall be installed through a .17 ounce copper sleeve, or a 0.032 inch thick aluminum sleeve, each within an integral skirt or flange.

Flashing sleeve shall be suitably formed, and skirt or flange shall extend not less than 8 inches from the pipe and be set over the roof or floor membrane in a troweled coating of bituminous cement. The flashing sleeve shall extend up the pipe a minimum of 2 inches above the roof or floor penetration. The annular space between the flashing sleeve and the bare pipe or between the flashing sleeve and the metal-jacket-covered insulation shall be sealed as indicated. Penetrations shall be sealed by either one of the following methods.

a. Waterproofing Clamping Flange: Pipes up to and including 10 inches in diameter passing through roof or floor waterproofing membrane may be installed through a cast iron sleeve with caulking recess, anchor lugs, flashing clamp device, and pressure ring with brass bolts. Waterproofing membrane shall be clamped into place and sealant shall be placed in the caulking recess.

b. Modular Mechanical Type Sealing Assembly: In lieu of a waterproofing clamping flange, a modular mechanical type sealing assembly may be installed. Seals shall consist of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe/conduit and sleeve with corrosion protected carbon steel bolts, nuts, and

pressure plates. Links shall be loosely assembled with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut.

After the seal assembly is properly positioned in the sleeve, tightening of the bolt shall cause the rubber sealing elements to expand and provide a watertight seal rubber sealing elements to expand and provide a watertight seal between the pipe/conduit seal between the pipe/conduit and the sleeve. Each seal assembly shall be sized as recommended by the manufacturer to fit the pipe/conduit and sleeve involved. The Contractor electing to use the modular mechanical type seals shall provide sleeves of the proper diameters.

3.1.13.3 Fire-Rated Penetrations

Penetration of fire-rated walls, partitions, and floors shall be sealed as specified in Section 07 84 00 FIRESTOPPING.

3.1.13.4 Escutcheons

Finished surfaces where exposed piping, bare or insulated, pass through floors, walls, or ceilings, except in boiler, utility, or equipment rooms, shall be provided with escutcheons. Where sleeves project slightly from floors, special deep-type escutcheons shall be used. Escutcheon shall be secured to pipe or pipe covering.

3.1.14 Access Panels

Access panels shall be provided where indicated for all concealed valves, vents, controls, and additionally for items requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced and maintained or completely removed and replaced. Access panels shall be as specified in Section 08 31 00 ACCESS DOORS AND PANELS.

3.1.15 Heat Trace Cable

Field apply heater tape and cut to fit as necessary, linearly along the length of pipe after piping has been pressure tested and approved by the Contracting Officer. Secure the heater to piping with cable ties . Label thermal insulation on the outside, "Electrical Heat Trace."

Install power connection, end seals, splice kits and tee kit components in accordance with IEEE 515 to provide a complete workable system. Terminate connection to the thermostat and ends of the heat tape in a junction box. Ensure cable and conduit connections are raintight.

3.2 ELECTRICAL INSTALLATION

Install electrical equipment in accordance with NFPA 70 and manufacturers instructions.

3.3 CLEANING AND ADJUSTING

Pipes shall be cleaned free of scale and thoroughly flushed of all foreign matter. A temporary bypass shall be provided for all water coils to prevent flushing water from passing through coils. Strainers and valves shall be thoroughly cleaned. Prior to testing and balancing, air shall be removed from all water systems by operating the air vents. Temporary

measures, such as piping the overflow from vents to a collecting vessel shall be taken to avoid water damage during the venting process. Air vents shall be plugged or capped after the system has been vented. Control valves and other miscellaneous equipment requiring adjustment shall be adjusted to setting indicated or directed.

3.4 FIELD TESTS

Field tests shall be conducted in the presence of the QC Manager or his designated representative to verify systems compliance with specifications. Any material, equipment, instruments, and personnel required for the test shall be provided by the Contractor.

3.4.1 Equipment and Component Isolation

Prior to testing, equipment and components that cannot withstand the tests shall be properly isolated.

3.4.2 Pressure Tests

Each piping system , except for polypropylene piping, shall be hydrostatically tested at a pressure not less than 188 psig for period of time sufficient to inspect every joint in the system and in no case less than 2 hours. Test pressure shall be monitored by a currently calibrated test pressure gauge. Leaks shall be repaired and piping retested until test requirements are met. No leakage or reduction in gage pressure shall be allowed.

Leaks shall be repaired by rewelding or replacing pipe or fittings. Caulking of joints will not be permitted. Concealed and insulated piping shall be tested in place before concealing.

Submit for approval pressure tests reports covering the above specified piping pressure tests; describe the systems tested, test results, defects found and repaired, and signature of the pressure tests' director. Obtain approval from the QC Manager before concealing piping or applying insulation to tested and accepted piping.

3.4.3 Heat Trace Cable

Test heat trace cable system in accordance with IEEE 515 after installation and before and after installation of the thermal insulation. Test heater cable using a 1000 vdc megger. Minimum insulation resistance is 20 to 1000 megohms regardless of cable length.

3.4.4 Related Field Inspections and Testing

3.4.4.1 Piping Welds

Examination of Piping Welds is specified in the paragraph EXAMINATION OF PIPING WELDS (above).

3.4.4.2 HVAC TAB

Requirements for testing, adjusting, and balancing (TAB) of HVAC water piping, and associated equipment is specified in Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC. Coordinate with the TAB team, and provide support personnel and equipment as specified in Section 23 05 93 TESTING, ADJUSTING AND BALANCING FOR HVAC to assist TAB team to meet the

TAB work requirements.

3.5 INSTRUCTION TO GOVERNMENT PERSONNEL

Furnish the services of competent instructors to give full instruction to the designated Government personnel in the adjustment, operation, and maintenance, including pertinent safety requirements, of the chilled water, . Instructors shall be thoroughly familiar with all parts of the installation and shall be instructed in operating theory as well as practical operation and maintenance work. Submit a lesson plan for the instruction course for approval. The lesson plan and instruction course shall be based on the approved operation and maintenance data and maintenance manuals.

Conduct a training course for the operating staff and maintenance staff selected by the Contracting Officer. Give the instruction during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of man-days (8 hours per day) of instruction furnished shall be one man-day.. Use approximately half of the time for classroom instruction and the other time for instruction at the location of equipment or system.

When significant changes or modifications in the equipment or system are made under the terms of the contract, provide additional instruction to acquaint the operating personnel with the changes or modifications.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 81 00

DECENTRALIZED UNITARY HVAC EQUIPMENT
05/24

PART 1 GENERAL

1.1 RELATED REQUIREMENTS

Section 23 03 00.00 20 BASIC MECHANICAL MATERIALS AND METHODS BASIC MECHANICAL MATERIALS AND METHODS, applies to this section with the additions and modifications specified herein.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI 350	(2015; R 2021) Sound Rating of Non-Ducted Indoor Air-Conditioning Equipment
AHRI 390	(2003) Performance Rating of Single Package Vertical Air-Conditioners and Heat Pumps
AHRI 700	(2016) Specifications for Fluorocarbon Refrigerants
AHRI DCAACP	(Online) Directory of Certified Applied Air-Conditioning Products
ANSI/AHRI 210/240	(2008; Add 1 2011; Add 2 2012) Performance Rating of Unitary Air-Conditioning & Air-Source Heat Pump Equipment
ANSI/AHRI 460	(2005) Performance Rating of Remote Mechanical-Draft Air-Cooled Refrigerant Condensers

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ANSI/ASHRAE 15 & 34	(2022) ASHRAE Standard 15-Safety Standard for Refrigeration Systems and ANSI/ASHRAE Standard 34-Designation and Safety Classification of Refrigerants
ASHRAE 15 & 34	(2022) ASHRAE Standard 34-2016 Safety Standard for Refrigeration Systems/ASHRAE Standard 34-2016 Designation and Safety Classification of Refrigerants-ASHRAE Standard 34-2016

ASHRAE 52.2	(2025) Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size
ASHRAE 55	(2017) Thermal Environmental Conditions for Human Occupancy
ASHRAE 62.1	(2016) Ventilation for Acceptable Indoor Air Quality
ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME BPVC SEC IX	(2017; Errata 2018) BPVC Section IX-Welding, Brazing and Fusing Qualifications
ASME BPVC SEC VIII D1	(2023) BPVC Section VIII-Rules for Construction of Pressure Vessels Division 1

AMERICAN WELDING SOCIETY (AWS)

AWS Z49.1	(2021) Safety in Welding, Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM D520	(2025) Standard Specification for Zinc Dust Pigment
ASTM E84	(2025) Standard Test Method for Surface Burning Characteristics of Building Materials

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 00001	(2024) Motors and Generators
NEMA MG 2	(2014) Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-DTL-5541	(2006; Rev F; Notice 2 2024) Chemical Conversion Coatings on Aluminum and Aluminum Alloys

UL SOLUTIONS (UL)

UL 1995 (2015; Reprint Aug 2022) UL Standard for Safety Heating and Cooling Equipment

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Spare Parts

Posted Instructions

Coil Corrosion Protection

System Performance Tests

Training; G

Inventory

Supplied Products

Manufacturer's Standard Catalog Data

Dehumidifiers

SD-06 Test Reports

Refrigerant Tests, Charging, and Start-Up; G

System Performance Tests; G

SD-07 Certificates

Service Organizations

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G

SD-11 Closeout Submittals

Ozone Depleting Substances; S

1.4 QUALITY ASSURANCE

Carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions. Submit drawings consisting of:

a. Equipment layouts which identify assembly and installation details.

b. Plans and elevations which identify clearances required for maintenance and operation.

c. Wiring diagrams which identify each component individually and interconnected or interlocked relationships between components.

d. Foundation drawings, bolt-setting information, and foundation bolts prior to concrete foundation construction for equipment indicated or required to have concrete foundations.

e. Details, if piping and equipment are to be supported other than as indicated, which include loadings and type of frames, brackets, stanchions, or other supports.

f. Automatic temperature control diagrams and control sequences.

g. Installation details which includes the amount of factory set superheat and corresponding refrigerant pressure/temperature.

h. Equipment schedules

1.5 DELIVERY, STORAGE, AND HANDLING

Protect stored items from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Properly protect and care for all material both before and during installation. Submit an inventory of all the stored items. Replace any materials found to be damaged, at no additional cost to the Government. During installation, cap piping and similar openings capped to keep out dirt and other foreign matter.

1.6 ENVIRONMENTAL REQUIREMENTS

For proper Indoor Environmental Quality, maintain pressure within the building as indicated. Ventilation must meet or exceed ASHRAE 62.1 and all published addenda. Meet or exceed filter media efficiency as tested in accordance with ASHRAE 52.2. Thermal comfort must meet or exceed ASHRAE 55.

1.7 WARRANTY

Provide equipment with the Manufacturer's Standard Warranty.

PART 2 PRODUCTS

2.1 ENERGY EFFICIENCY REQUIREMENTS

42 USC 8259b requires the procurement of energy efficient products in product categories covered by the Energy Star program or the Federal Energy Management Program for designated products. A list of covered product categories is available from the Federal Energy Management Web site at: https://www.energy.gov/femp/search-energy-efficient-products.

Submit Material, Equipment, and Fixtures List of all supplied products within a covered product category, including manufacturer's catalog numbers, specification and drawing reference number, warranty information, fabrication site, and energy performance data. For product categories

covered by the Federal Energy Management Program, submit documentation that the product meets or exceeds FEMP-designated efficiency requirements.

2.2 MATERIALS

Provide Manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component, highlighted to show material, size, options, performance charts and curves, etc. in adequate detail to demonstrate compliance with contract requirements. Data includes manufacturer's recommended installation instructions and procedures. If vibration isolation is specified for a unit, include vibration isolator literature containing catalog cuts and certification that the isolation characteristics of the isolators provided meet the manufacturer's recommendations. Submit data for each specified component. Minimum efficiency requirements must be in accordance with ASHRAE 90.1 - IP.

2.2.1 Standard Products

Provide materials and equipment that are standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products must have been in satisfactory commercial or industrial use for 2 years prior to bid opening . The 2 year use includes applications of equipment and materials under similar circumstances and of similar size. The 2 years' experience must be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2 year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Products must be supported by a service organization. Ensure system components are environmentally suitable for the indicated geographic locations.

2.2.2 Product Sustainability Criteria

2.2.2.1 Energy Efficient Equipment

Provide equipment meeting the efficiency requirements as stated within this section and provide documentation in conformance with Section 01 33 29 SUSTAINABILITY REQUIREMENTS AND REPORTING paragraph ENERGY EFFICIENT EQUIPMENT.

2.2.2.2 Electrical Equipment / Motors

Provide electrical equipment, motors, motor efficiencies, and wiring which are in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Electrical motor driven equipment specified must be provided complete with motors, motor starters, and controls. Electrical characteristics must be as shown, and unless otherwise indicated, all motors of 1 horsepower and above with open, dripproof, totally enclosed, or explosion proof fan cooled enclosures, must be the premium efficiency type in accordance with NEMA MG 00001. Field wiring must be in accordance with manufacturer's instructions. Each motor must conform to NEMA MG 00001 and NEMA MG 2 and be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Motors must be continuous duty with the enclosure specified. Motor starters must be

provided complete with thermal overload protection and other appurtenances necessary for the motor control indicated. Motors must be furnished with a magnetic across-the-line or reduced voltage type starter as required by the manufacturer. Motor duty requirements must allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motors must be sized for the applicable loads. Motor torque must be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Motor bearings must be fitted with grease supply fittings and grease relief to outside of enclosure. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, must be provided.

2.2.2.3 Ozone Depleting Substances

Unitary air conditioning equipment must not use CFC-based refrigerants. Refrigerant may be an approved alternative refrigerant in accordance with EPA's Significant New Alternative Policy (SNAP) listing. Provide documentation in conformance with Section 01 33 29 SUSTAINABILITY REQUIREMENTS AND REPORTING paragraph OZONE DEPLETING SUBSTANCES.

2.2.3 Nameplates

Major equipment including compressors, condensers, receivers, heat exchanges, fans, and motors must have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment. Plates must be durable and legible throughout equipment life and made of anodized aluminum . Fix plates in prominent locations with nonferrous screws or bolts.

2.2.4 Safety Devices

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel must be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Safety devices must be installed so that proper operation of equipment is not impaired. Welding and cutting safety requirements must be in accordance with AWS Z49.1.

2.3 EQUIPMENT

2.3.1 Packaged Terminal Heat Pumps

2.3.1.1 Packaged Terminal Unit

Provide a through-the-wall, wall mounted, heavy-duty commercial grade, factory assembled and precharged heat pump unit in accordance with AHRI 390 and UL 1995. Provide units listed in AHRI DCAACP. Provide Units removable from inside the building for servicing without removing the outside cabinet. Provide unit with a noise rating in accordance with AHRI 350 that does not exceed 85 dB while the entire unit is operating at any fan or compressor speed. Heat pump units must contain a reversing valve to change unit to heating cycle. Provide an outdoor coil temperature sensor to guard against coil freeze-up by either switching to supplemental heat only, or by cycling the compressor to defrost the coil.

2.3.1.2 Compressor

Provide a hermetically sealed rotary type Compressor. Provide compressor with permanent split capacitor motor, overload protection, and vibration isolators. Protect compressor against high discharge pressure, loss of charge, low voltage, and short cycling.

2.3.1.3 Air to Refrigerant Coils

Provide evaporator and condenser coils with copper or aluminum tubes of 3/8 inch minimum diameter with aluminum fins that are mechanically bonded or soldered to the tubes. Provide casing of galvanized steel or aluminum. Avoid contact of dissimilar metals. Test coils in accordance with ASHRAE 15 & 34 at the factory and ensure they are suitable for the working pressure of the installed system. Dehydrate and seal each coil after testing and prior to evaluation and charging. Provide each unit with a factory operating charge of refrigerant and oil. Provide a condensate removal system.

2.3.1.4 Fans

Provide direct driven, statically and dynamically balanced, centrifugalor propeller type fans. Design the outdoor fan so that condensate will evaporate without drip, splash, or spray on building exterior. Provide indoor fan with a minimum two-speed motor with built-in overload protection. Fan motors must be the inherently protected, permanent split-capacitor type.

2.3.1.5 Air Filters

Provide standard filter on all packaged terminal units; 1 inch inch MERV 7 , throwaway filter capable of filtering the entire air supply.

2.3.1.6 Primary/Supplemental Heat

Provide heating unit with internal thermal insulation having a fire hazard rating not to exceed 25 for flame spread and 50 for smoke developed as determined by ASTM E84.

2.3.1.6.1 Electric Heating

Provide electric heater in accordance with UL 1995 and NFPA 70. Coil must be completely assembled, unit-mounted, and integral to the unit. Provide coil with nickel chromium elements and a maximum density of 40 watts per square inch. Provide coil with automatic reset high limit control operating through heater backup contactors. Provide coil casing and support brackets of galvanized steel or aluminum. Mount coil to eliminate noise from expansion and contraction and be completely accessible for service. Electric resistance heating elements with high temperature-limit safety device, factory-mounted, and wired to chassis.

2.3.1.7 Cabinet Construction

Provide unit with custom anti ligature security cover with kickplate that extends to the floor. Provide cabinet free of visible fasteners, sharp protuberances and edges. Enclosure sheet metal must be a minimum of 18 gauge steel with a protective coating.

2.3.1.8 Louver

Provide storm proof type Louver, constructed of anodized, stamped or extruded aluminum.

2.3.1.9 Wall Sleeve

Provide water and airtight completely insulated assembly, with weather-resistant protective coating.

2.3.1.10 Unit Controls

Controls must include an on-off switch, high and low selector switch for both the heating and cooling mode, multiple speed fan cooling and heating mode, room air fan switch, and a thermostat. Function and temperature controls must be remotely mounted as indicated or as accepted by the Contracting Officer.

Controls must include a control system interface to a BACnet Control system. The control system interface must meet DDC Hardware requirements of Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

2.3.2 Mini-Split-System Air Conditioners & Heat Pumps

2.3.2.1 Small-Capacity Split-System Air-Conditioners (Not Exceeding 65,000 Btu/hr)

Provide an air-cooled, split system which employs a remote condensing unit, a separate wall mounted or ceiling mounted indoor unit, and interconnecting refrigerant piping. Provide the air conditioning or heat pump type unit conforming to applicable Underwriters Laboratories (UL) standards including UL 1995. Unit must be rated in accordance with ANSI/AHRI 210/240. Provide indoor unit with necessary fans, air filters, and galvanized steel cabinet construction. The remote unit must be as specified in paragraph CONDENSING UNIT. Provide double-width, double inlet, forward curved backward inclined, or airfoil blade, centrifugal scroll type evaporator or supply fans. Provide the manufacturer's standard condenser or outdoor fans for the unit specified and may be either propeller or centrifugal scroll type. Fan and condenser motors must have opendrip proof enclosures. Design unit to operate at outdoor ambient temperatures up to 115 degrees F.

2.3.2.1.1 Air-to-Refrigerant Coil

Provide condensing coils with copper tubes of 3/8 inch minimum diameter with aluminum fins that are mechanically bonded or soldered to the tubes. Casing must be galvanized steel or aluminum. Avoid contact of dissimilar metals. Test coils in accordance with ASHRAE 15 & 34 at the factory and ensure suitability for the working pressure of the installed system. Dehydrate and seal each coil testing and prior to evaluation and charging.

Coat condenser and evaporator coil with a uniformly applied epoxy electrodeposition, phenolic, or vinyl type coating to all coil surface areas without material bridging between fins. Apply coating at either the coil or coating manufacturer's factory. Coating process must ensure complete coil encapsulation and be capable of withstanding a minimum 1,000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution.

2.3.2.1.2 Refrigeration Circuit

Refrigerant-containing components must comply with ASHRAE 15 & 34 and be factory tested, cleaned, dehydrated, charged, and sealed. Provide each unit with a factory operating charge of refrigerant and oil or a holding charge. Field charge unit shipped with a holding charge. Provide refrigerant charging valves. Provide filter-drier in liquid line.to prevent freeze-up in event of loss of water flow during heating cycle.

2.3.2.1.3 Unit Controls

Provide unit internally prewired with a 24 volt control circuit powered by an internal transformer. Provide terminal blocks for power wiring and external control wiring. Internally protect unit by fuses or a circuit breaker in accordance with UL 1995. Equip units with three-phase power with phase monitoring protection to protect against problems caused by phase loss, phase imbalance and phase reversal. Provide unit with microprocessor controls to provide all 24V control functions.

Controls must include a control system interface to a BACnet Control system. The control system interface, as well as any network between physically separate units, must meet the requirements of Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

Communication networks between physically separate units in a split system must be in accordance with either Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS. and must match the protocol used by the control system interface.

2.3.2.1.4 Condensing Coil

Provide coils with copper tubes of 3/8 inch minimum diameter with aluminum fins that are mechanically bonded or soldered to the tubes. Protect coil in accordance with paragraph CORROSION PROTECTION. Provide galvanized steel or aluminum casing. Avoid contact of dissimilar metals. Test coils in accordance with ANSI/ASHRAE 15 & 34 at the factory and ensure suitability for the working pressure of the installed system. Dehydrate and seal each coil after testing and prior to evaluation and charging. Provide separate expansion devices for each compressor circuit.

2.3.2.1.5 Remote Condenser or Condensing Unit

Fit each remote condenser coil fitted with a manual isolation valve and an access valve on the coil side. Saturated refrigerant condensing temperature must not exceed 120 degrees F at 104 degrees F ambient. Provide unit with low ambient condenser controls to ensure proper operation in an ambient temperature of 20degrees F. Provide fan and cabinet construction as specified in paragraph UNITARY EQUIPMENT ACCESSORIES. Fan and condenser motors must have opendrip proof enclosures.

2.3.2.1.5.1 Air-Cooled Condenser

Provide Unit in accordance with ANSI/AHRI 460 and conform to the requirements of UL 1995. Provide factory fabricated, tested, packaged, and self-contained unit; complete with casing, propeller or centrifugal type fans, heat rejection coils, connecting piping and wiring, and all necessary accessories.

2.3.2.1.6 Primary/Supplemental Heat

Provide heating unit with internal thermal insulation having a fire hazard rating not to exceed 25 for flame spread and 50 for smoke developed as determined by ASTM E84.

2.3.2.1.7 Air Filters

Provide filters of the sectional or cleanable type that are capable of filtering the entire air supply. Mount filter(s) integral within the unit and make accessible by hinged access panel(s). 1 inch MERV 7, provide throwaway filter on all units below 6 Tons.

Provide filter rack that can be converted to 2.0 inch capability. Filters must have an average dust spot efficiency of 25-35 percent and an average arrestance of 90 percent when tested in accordance with ASHRAE 52.2. Provide UL Class 1 filters.

2.3.2.1.8 Fans

Provide direct driven, statically and dynamically balanced, centrifugal type fans. Design the outdoor fan so that condensate will evaporate without drip, splash, or spray on building exterior. Provide indoor fan with a minimum two-speed motor with built-in overload protection. Fan motors must be the inherently protected, permanent split-capacitor type.

2.3.3 Dehumidifiers

2.3.3.1 General

Unit must be a factory assembled, self-contained dehumidifier unit as indicated. Unit must be provided with a full factory operating charge of refrigerant. Unit must be suitable for indoor installation, continuous-duty operation. Provide all mounting accessories required for hard-mounting unit.

2.3.3.2 Air-to-Refrigerant Coils

Air-to-refrigerant coils must have seamless copper tubes of 5/16 inch minimum diameter with aluminum fins that are mechanically bonded or soldered to the tubes. Casing must be galvanized steel or aluminum. Contact of dissimilar metals must be avoided. Coils must be tested in accordance with ANSI/ASHRAE 15 & 34 at the factory and be suitable for the working pressure of the installed system. Each coil must be factory pressure and leak tested.

2.3.3.3 Fan Section

Fan must be the centrifugal type in accordance with paragraph FANS. Motors must have totally enclosed enclosure and be suitable for the indicated service. The unit design must prevent water from entering into the fan section.

2.3.3.4 Compressor

Provide direct drive, scroll type Compressor. Compressor must have internal over current and over temperature protection.

2.3.3.5 Refrigeration Circuit

Refrigerant containing components must comply with ANSI/ASHRAE 15 & 34 and be factory tested, cleaned, dehydrated, charged, and sealed. Refrigerant lines must have service pressure tap ports and refrigerant line filter.

2.3.3.6 Unit Controls

Provide units internally prewired by manufacturer with a 24 volt control circuit powered by an internal transformer. Terminal blocks must be provided for power wiring and external control wiring. Unit must be internally protected by fuses in accordance with UL 1995.

2.3.3.7 Single Source Power Entry

Provide single source power entry to allow hard-wired single source power connection to unit with fuse protection as required for the unit.

2.3.3.8 Filters

Provide unit with a washable or throwaway type pre-filter.

2.3.3.9 Condensate Drain Piping

Provide hard piped condensate drain in accordance with Section 23 30 00 HVAC AIR DISTRIBUTION.

2.4 COMPONENTS

2.4.1 Refrigerant and Oil

Refrigerant must be one of the fluorocarbon gases. Refrigerants must have number designations and safety classifications in accordance with ASHRAE 15 & 34. Refrigerants must meet the requirements of AHRI 700 as a minimum. Provide a complete charge of refrigerant for the installed system as recommended by the manufacturer. Lubricating oil must be of a type and grade recommended by the manufacturer for each compressor. Where color leak indicator dye is incorporated, charge must be in accordance with manufacturer's recommendation.

2.4.2 Refrigerant Piping

Provide refrigerant piping in accordance with Section 23 23 00 REFRIGERANT PIPING.

2.4.3 Condensate Drain Piping

provide condensate drain piping in accordance with Section 23 05 15 COMMON PIPING FOR HVAC.

2.4.4 Temperature Controls

Provide temperature controls in accordance with Section 23 09 23.02 BACnet DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDNG CONTROL SYSTEMS.

2.5 FINISHES

2.5.1 Coil Corrosion Protection

Provide coil with a uniformly applied epoxy electrodeposition, phenolic, or vinyl type coating to all coil surface areas without material bridging between fins. Submit product data on the type coating selected, the coating thickness, the application process used, the estimated heat transfer loss of the coil, and verification of conformance with the salt spray test requirement. Coating must be applied at either the coil or coating manufacturer's factory. Coating process must ensure complete coil encapsulation. Coating must be capable of withstanding a minimum 1,000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution.

2.5.2 Equipment and Components Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, must be factory finished with the manufacturer's standard finish, except that items located outside of buildings must have weather resistant finishes that will withstand 500 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen must show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used must be coated with a zinc-rich coating conforming to ASTM D520, Type I.

Where stipulated in equipment specifications of this section, coat finned tube coils of the affected equipment as specified below. Apply coating at the premises of a company specializing in such work. Degrease and prepare for coating in accordance with the coating applicator's procedures for the type of metals involved. Completed coating must show no evidence of softening, blistering, cracking, crazing, flaking, loss of adhesion, or "bridging" between the fins.

2.5.2.1 Phenolic Coating

Provide a resin base thermosetting phenolic coating. Apply coating by immersion dipping of the entire coil. Provide a minimum of two coats. Bake or heat dry coils following immersions. After final immersion and prior to final baking, spray entire coil with particular emphasis given to building up coating on sheared edges. Total dry film thickness must be 2.5 to 3.0 mils.

2.5.2.2 Chemical Conversion Coating with Polyelastomer Finish Coat

Dip coils in a chemical conversion solution to molecularly deposit a corrosion resistant coating by electrolysis action. Chemical conversion coatings must conform to MIL-DTL-5541, Class 1A. Cure conversion coating at a temperature of 110 to 140 degrees F for a minimum of 3 hours. Coat coil surfaces with a complex polymer primer with a dry film thickness of 1 mil. Cure primer coat for a minimum of 1 hour. Using dip tank method, provide three coats of a complex polyelastomer finish coat. After each of the first two finish coats, cure the coils for 1 hour. Following the third coat, spray a fog coat of an inert sealer on the coil surfaces. Total dry film thickness must be 2.5 to 3.0 mils. Cure finish coat for a minimum of 3 hours. Coating materials must have 300 percent flexibility,

operate in temperatures of minus 50 to plus 220 degrees F, and protect against atmospheres of a pH range of 1 to 14.

2.5.2.3 Vinyl Coating

Apply coating using an airless fog nozzle. For each coat, make at least two passes with the nozzle. Materials to be applied are as follows:

a. Total dry film thickness, 6.5 mils maximum

b. Vinyl Primer, 24 percent solids by volume: One coat 2 mils thick

c. Vinyl Copolymer, 30 percent solids by volume: One coat 4.5 mils thick

2.5.3 Factory Applied Insulation

Refrigeration equipment must be provided with factory installed insulation on surfaces subject to sweating including the suction line piping. Where motors are the gas-cooled type, factory installed insulation must be provided on the cold-gas inlet connection to the motor in accordance with manufacturer's standard practice. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors must have a flame spread index no higher than 75 and a smoke developed index no higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces must have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes must be determined by ASTM E84. Insulation must be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket must be tested as a composite material. Jackets, facings, and adhesives must have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E84.

2.6 TESTS, INSPECTIONS, AND VERIFICATIONS

All manufactured units must be inspected and tested, and documentation provided to demonstrate that each unit is in compliance with ANSI/AHRI and UL requirements and that the minimum efficiency requirements of ASHRAE 90.1 - IP have been met.

PART 3 EXECUTION

3.1 EXAMINATION

After becoming familiar with all details of the work, perform Verification of Dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

3.2 INSTALLATION

Perform work in accordance with the manufacturer's published diagrams, recommendations, and equipment warranty requirements. Where equipment is specified to conform to the requirements of ASME BPVC SEC VIII D1and ASME BPVC SEC IX, the design, fabrication, and installation of the system must conform to ASME BPVC SEC VIII D1 and ASME BPVC SEC IX.

3.2.1 Equipment

Provide refrigeration equipment conforming to ASHRAE 15 & 34. Provide necessary supports for all equipment, appurtenances, and pipe as required, including frames or supports for compressors, pumps, cooling towers, condensers, and similar items. Isolate compressors from the building structure. If mechanical vibration isolators are not provided, provide vibration absorbing foundations. Each foundation must include isolation units consisting of machine and floor or foundation fastenings, together with intermediate isolation material. Other floor-mounted equipment must be set on not less than a 6 inch concrete pad doweled in place. Concrete foundations for floor mounted pumps must have a mass equivalent to three times the weight of the components, pump, base plate, and motor to be supported. In lieu of concrete pad foundation, concrete pedestal block with isolators placed between the pedestal block and the floor may be provided. Concrete pedestal block must be of mass not less than three times the combined pump, motor, and base weights. Isolators must be selected and sized based on load-bearing requirements and the lowest frequency of vibration to be isolated. Isolators must limit vibration to 20-40 percent at lowest equipment rpm. Provide lines connected to pumps mounted on pedestal blocks with flexible connectors. Provide foundation drawings, bolt-setting information, and foundation bolts prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Concrete for foundations must be as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE. Equipment must be properly leveled, aligned, and secured in place in accordance with manufacturer's instructions.

3.2.2 Mechanical Room Ventilation

Provide mechanical ventilation systems in accordance with Section 23 30 00 HVAC AIR DISTRIBUTION.

3.2.3 Field Applied Insulation

Apply field applied insulation as specified in Section 23 07 00 THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as defined differently herein.

3.2.4 Field Painting

Painting required for surfaces not otherwise specified, and finish painting of items only primed at the factory are specified in Section 09 90 00 PAINTS AND COATINGS.

3.3 CLEANING AND ADJUSTING

Equipment must be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. Temporary filters must be provided for all fans that are operated during construction, and new filters must be installed after all construction dirt has been removed from the building. System must be maintained in this clean condition until final acceptance. Bearings must be properly lubricated with oil or grease as recommended by the manufacturer. Belts must be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment must be adjusted to setting indicated or directed. Fans must be adjusted to the speed indicated by the manufacturer to meet specified conditions. Testing, adjusting, and balancing must be as specified in Section 23 05 93 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

3.4 TRAINING

Conduct a training course for the operating staff as designated by the Contracting Officer. The training period must consist of a total 8 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests.

a. Submit a schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training.

b. Submit the field posted instructions, at least 2 weeks prior to construction completion, including equipment layout, wiring and control diagrams, piping, valves and control sequences, and typed condensed operation instructions. The condensed operation instructions must include preventative maintenance procedures, methods of checking the system for normal and safe operation, and procedures for safely starting and stopping the system. The posted instructions must be framed under glass or laminated plastic and be posted where indicated by the Contracting Officer.

c. The posted instructions must cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations. Submit 6 complete copies of an operation manual in bound 8-1/2 by 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. The booklets must include the manufacturer's name, model number, and parts list. The manuals must include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features.

d. Submit 6 complete copies of maintenance manual in bound 8-1/2 by 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals must include piping and equipment layouts and simplified wiring and control diagrams of the system as installed.

3.5 REFRIGERANT TESTS, CHARGING, AND START-UP

Split-system refrigerant piping systems must be tested and charged as specified in Section 23 23 00 REFRIGERANT PIPING. Packaged refrigerant systems which are factory charged must be checked for refrigerant and oil capacity to verify proper refrigerant levels in accordance with manufacturer's recommendations. Following charging, packaged systems must be tested for leaks with a halide torch or an electronic leak detector.

a. The date the tests were performed.
b. A list of equipment used, with calibration certifications.
c. Initial test summaries.
d. Repairs/adjustments performed.
e. Final test results.

3.5.1 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system must immediately be isolated from the remainder of the system and the refrigerant pumped into the system

receiver or other suitable container. Under no circumstances must the refrigerant be discharged into the atmosphere.

3.5.2 Contractor's Responsibility

Take steps, at all times during the installation and testing of the refrigeration system, to prevent the release of refrigerants into the atmosphere. The steps must include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time must more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year must be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

3.6 SYSTEM PERFORMANCE TESTS

Before each refrigeration system is accepted, conduct tests to demonstrate the general operating characteristics of all equipment by a registered professional engineer or an approved manufacturer's start-up representative experienced in system start-up and testing, at such times as directed. Six copies of the report provided in bound 8-1/2 by 11 inch booklets. The report must document compliance with the specified performance criteria upon completion and testing of the system. The report must indicate the number of days covered by the tests and any conclusions as to the adequacy of the system.

For equipment providing heating and cooling the system performance tests must be performed during the heating and cooling seasons.

a. Submit a schedule, at least 2 weeks prior to the start of related testing, for the system performance tests. The schedules must identify the proposed date, time, and location for each test. Tests must cover a period of not less than 48 hours for each system and must demonstrate that the entire system is functioning in accordance with the drawings and specifications.

b. Make corrections and adjustments, as necessary, tests must be re-conducted to demonstrate that the entire system is functioning as specified. Prior to acceptance, install and tighten service valve seal caps and blanks over gauge points. Replace any refrigerant lost during the system startup.

c. If tests do not demonstrate satisfactory system performance, correct deficiencies and retest the system. Conduct tests in the presence of the Contracting Officer. Water and electricity required for the tests will be furnished by the Government. Provide all material, equipment, instruments, and personnel required for the test.

d. Coordinate field tests with Section 23 05 93 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS. Submit 6 copies of the report provided in bound 8-1/2 by 11 inch booklets. The report must document compliance with the specified performance criteria upon completion and testing of the system. The report must indicate the number of days covered by the tests and any conclusions as to the adequacy of the system. Submit the report including the following information (where values are taken at least three different times at outside dry-bulb

temperatures that are at least 5 degrees F apart):

(1) Date and outside weather conditions.

(2) The load on the system based on the following:

(a) The refrigerant used in the system.
(b) Condensing temperature and pressure.
(c) Suction temperature and pressure.
(d) Ambient, condensing and coolant temperatures.
(e) Running current, voltage and proper phase sequence for each phase of all motors.

(3) The actual on-site setting of operating and safety controls.

(4) Thermostatic expansion valve superheat - value as determined by field test.

(5) Subcooling.

(6) High and low refrigerant temperature switch set-points

(7) Low oil pressure switch set-point.

(8) Defrost system timer and thermostat set-points.

(9) Moisture content.

(10) Capacity control set-points.

(11) Field data and adjustments which affect unit performance and energy consumption.

(12) Field adjustments and settings which were not permanently marked as an integral part of a device.

3.7 MAINTENANCE

3.7.1 EXTRA MATERIALS

Submit spare parts data for each different item of equipment specified, after approval of detail drawings and not later than 2 months prior to the date of beneficial occupancy. Include in the data a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

3.7.2 Maintenance Service

Submit a certified list of qualified permanent service organizations, which includes their addresses and qualifications, for support of the equipment. The service organizations must be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 25 05 11.00

CYBERSECURITY FOR FACILITY-RELATED CONTROL SYSTEMS - ISOLATED SYSTEMS
09/22

PART 1 GENERAL

This section includes requirements in support of the DOD Risk Management Framework (RMF) for implementing cybersecurity. Refer to UFC 4-010-06, Cybersecurity for Facility-Related Control Systems, for requirements on incorporating into control system design and for general information on the RMF process as it applies to control systems.

Many subparts in this Section contain text in curly braces ("{" and "}") indicating which cybersecurity control and control correlation identifier (CCI) the requirements of the subpart relate to. The text inside these curly braces is for Government reference only, and enables coordination of the requirements of this Section with the RMF process throughout the design and construction process. Text in curly braces are not contractor requirements.

This Section refers to Security Requirements Guide (SRGs) and Security Technical Implementation Guide (STIGs). STIGs and SRGs are available online at the Information Assurance Support Environment (IASE) website at http://iase.disa.mil/stigs/Pages/index.aspx. Not all control system components have applicable STIGs or SRGs.

Should any conflict exist between this section and related equipment specifications, the more secure option shall be required and coordinated with Camp Lejeune FRCS Office.

1.1 CONTROL SYSTEM APPLICABILITY

There are multiple versions of this Section associated with this project. Different versions have requirements applicable to different control systems. This specific Section applies only to the following control systems:

a. Elevators and Lift Stations (BCS-C/VTS)

b. Electrical Systems (BCS-ES)

c. Other Isolated Control Systems

1.1.1 CONTROL SYSTEM CLASSIFICATION

The C-I-A impact levels for the control system have been determined to be LOW-LOW-LOW (L-L-L).

1.1.2 INTERCONNECTION

The C/VTS and ES control systems addressed by this specification will have no connection to other systems and function as isolated control systems.

1.2 RELATED REQUIREMENTS

All Sections containing facility-related control systems or control system components are related to the requirements of this Section. Review all specification sections to determine related requirements. Incorporate each of the requirements contained in this specification for systems specified in the following sections:

a. DB TEAM TO COMPLETE REFERENCES to ELEVATORS & ELECTRICAL SYSTEMS

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. DEPARTMENT OF DEFENSE (DOD)

DODI 8551.01	(2014) Ports, Protocols, and Services Management (PPSM)
UFC 4-010-06	(2023) Cybersecurity of Facility-Related Control Systems

The specification 23 09 23.02 should also be used as an external refernce.

1.4 DEFINITIONS

1.4.1 Computer

As used in this Section, a computer is one of the following:

a. a device running a non-embedded desktop or server version of Microsoft Windows

b. a device running a non-embedded version of MacOS

c. a device running a non-embedded version of Linux

d. a device running a version or derivative of the Android OS, where Android is considered separate from Linux

e. a device running a version of Apple iOS

1.4.2 Network Connected

A component is network connected (or "connected to a network") only when the device has a network transceiver which is directly connected to the network and implements the network protocol. A device lacking a network transceiver (and accompanying protocol implementation) can never be considered network connected. Note that a device connected to a non-IP network is still considered network connected (an IP connection or IP address is not required for a device to be network connected).

Any device that supports wireless communication is network connected, regardless of whether the device is communicating using wireless.

1.4.3 User Account Support Levels

The support for user accounts is categorized in this Section as one of three levels:

1.4.3.1 FULLY Supported

Device supports configurable individual accounts. Accounts can be created, deleted, modified, etc. Privileges can be assigned to accounts.

1.4.3.2 MINIMALLY Supported

Device supports a small, fixed number of accounts (perhaps only one). Accounts cannot be modified. A device with only a "User" and an "Administrator" account would fit this category. Similarly, a device with two PINs for logon - one for restricted and one for unrestricted rights would fit here (in other words, the accounts do not have to be the traditional "user name and password" structure).

1.4.3.3 NOT Supported

Device does not support any Access Enforcement therefore the whole concept of "account" is meaningless.

1.4.4 User Interface

Generally, a user interface is hardware on a device allowing user interaction with that device via input (buttons, switches, sliders, keyboard, touch screen, etc.) and a screen. There are three types of user interfaces defined in this Section: Limited Local User Interface, Full Local User Interface and Remote User Interface. In this Section, when the term "User Interface" is used without specifying which type, it refers only to Full Local User Interface and Remote User Interface (NOT to Limited Local User Interface).

1.4.4.1 Limited Local User Interface

A Limited Local User Interface is a user interface where the interaction is limited, fixed at the factory, and cannot be modified in the field. The user must be physically at the device to interact with it.

Examples of Limited Local User Interface include thermostats.

1.4.4.2 Full Local User Interface

A Full Local User Interface is a user interface where the interaction and displays are field-configurable.

Examples of a Full Local User Interface include local applications on a computer.

1.4.4.3 Remote User Interface

A Remote User Interface is a user interface on a Client device allowing user interaction with a different Server device. The user need not be physically at the Server device to interact with it.

Examples of Remote User Interfaces include web browsers.

1.4.5 C-I-A Impact Level

A reference to the security objectives of Confidentiality (C), Integrity (I), and Availability (A) associated with a control system. These values are determined by the System Owner (SO) in conjunction with the Authorizing Official (AO). The potential impact levels for each security objective are LOW (L), MODERATE (M), and HIGH (H).

The determination of control system impact levels is a requirement of UFC 4-010-06.

1.4.6 Isolated Field Control Systems

A control system that does not share its signals, data, or telemetry with any system via communications; the system is completely self-contained. The control system may employ IP and non-IP media and protocols for its own functionality.

1.5 ADMINISTRATIVE REQUIREMENTS

1.5.1 Coordination

Coordinate the execution of this Section with the execution of all other Sections related to control systems as indicated in the paragraph RELATED REQUIREMENTS. Items that must be considered when coordinating project efforts include but are not limited to:

a. If requesting permission for alternate account lock permissions, the Device Account Lock Exception Request must be approved prior to control system device selection and integration by the Camp Lejeune FRCS Office.

b. Wireless testing may be required as part of the control system testing. See requirements for the Wireless Communication Test Report submittal.c. If the Device Audit Record Upload Software is to be installed on a computer not being provided as part of the control system, coordination is required to identify the computer on which to install the software with the Camp Lejeune FRCS Office.

d. Cybersecurity testing support must be coordinated across control systems and with the project cybersecurity testing schedule.

e. Passwords must be coordinated with the Camp Lejeune FRCS Office.

f. If applicable, HTTP web server certificates must be obtained from the indicated contact for the project site.

g. Contractor Computer Cybersecurity Compliance Statements for each contractor using contractor owned computers.

1.6 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Architect/Engineer approval is required for submittals marked with an "AE" designation. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualifications; G

Device Account Lock Exception Request; G

Contractor Computer Cybersecurity Compliance Statements; G

Contractor Temporary Network Cybersecurity Compliance Statements; G

SD-02 Shop Drawings

Cybersecurity Riser Diagram; G

Control System Inventory Report; G

SD-03 Product Data

Control System Cybersecurity Documentation; G

SD-06 Test Reports

Wireless Communication Test Report; G

SD-07 Certificates

Software Licenses; GSD-11 Closeout Submittals

Password Summary Report; G

Software Recovery And Reconstitution Images; G

Device Audit Record Upload Software; G

1.7 QUALITY CONTROL

1.7.1 Qualifications

1.7.1.1 Control System Cybersecurity Subject Matter Expert

The individual will oversee all work within this specification. This position requires that the individual currently meets Information Assurance Manager Level II Certification in accordance with DoDI 8570 Information Workforce Improvement Program.

Individuals for this position should have experience securing Marine Corps systems and with Risk Management Framework. Control System Experience is highly desirable.

Resumes should be submitted to the Government within 14 days after notice to proceed. All certifications to include computing environment must be in effect prior to beginning work.

Control System Cybersecurity Subject Matter Expert can serve across the contract.

1.8 CYBERSECURITY DOCUMENTATION

1.8.1 Cybersecurity Interconnection Schedule

{For Reference Only: This subpart (and its subparts) relates to CA-3(b)}

The control system(s) addressed by this specification will be isolated unto themselves and do not connect or interface to any other system. Therefore the contractor will not be required to provide a cybersecurity interconnection schedule.

1.8.2 Control System Inventory Report

{For Reference Only: This subpart (and its subparts) relates to CM-8(a), IA-3}

Provide a Control System Inventory report using the Inventory Spreadsheet listed under this Section at http://www.wbdg.org/ffc/dod/unified-facilities-guide-specifications-ufgs/forms-graphic documenting all devices, including networked devices, network infrastructure devices, non-networked devices, input devices (e.g. sensors) and output devices (e.g. actuators). For each device provide all applicable information for which there is a field on the spreadsheet in accordance with the instructions on the spreadsheet.

In addition to the requirements of Section 01 33 00 SUBMITTAL PROCEDURES, provide the Control System Inventory Report as an editable Microsoft Excel file.

1.8.3 Software Recovery and Reconstitution Images

For each control system device on which software is configured or installed under this project, provide a recovery image of the final as-built device. This image must allow for bare-metal restore such that restoration of the image is sufficient to restore system operation to the imaged state without the need for re-installation of software.

If additional user permissions are required to meet this requirement, coordinate the creation of the image with Camp Lejeune FRCS Office.

1.8.4 Cybersecurity Riser Diagram

{For Reference Only: This subpart (and its subparts) relates to PL-2(a)}

Provide a cybersecurity riser diagram of the complete control system including all network and controller hardware. If the control system specifications require a riser diagram submittal, provide a copy of that submittal as the cybersecurity riser diagram. Otherwise, provide a riser diagram in one-line format overlayed on a facility schematic.

1.8.5 Control System Cybersecurity Documentation

Provide a Control System Cybersecurity Documentation submittal containing the indicated information for each device and software application.

1.8.5.1 Default Requirements for Control System Devices

For control system devices where Control System Cybersecurity

Documentation requirements are not otherwise indicated in this Section, provide security baseline documentation (CA-5) using CCIs listed below:

a. Documentation that describes secure configuration of the device {for reference only: relates to CCI-003124}

b. Documentation that describes secure installation of the device {for reference only: relates to CCI-003125}

c. Documentation that describes secure operation of the device {for reference only: relates to CCI-003124}

d. Documentation that describes effective use and maintenance of security functions or mechanisms for the device {for reference only: relates to CCI-003127}

e. Documentation that describes known vulnerabilities regarding configuration and use of administrative (i.e. privileged) functions for the device {for reference only: relates to CCI-003128}

f. Documentation that describes user-accessible security functions or mechanisms in the device and how to effectively use those security functions or mechanisms {for reference only: relates to CCI-003129}

g. Documentation that describes methods for user interaction which enables individuals to use the device in a more secure manner {for reference only: relates to CCI-003130}

h. Documentation that describes user responsibilities in maintaining the security of the device {for reference only: relates to CCI-003131}

1.8.6 PLAN OF ACTION AND MILESTONES

{For Reference Only: This subpart (and its subparts) relates to CA-5(a), (b)}

Develop a plan of action and milestones for the system to document the planned remediation actions of the organization to correct weaknesses or deficiencies noted during the assessment of the controls and to reduce or eliminate known vulnerabilities in the system.

Update existing plan of action and milestones based on the findings from control assessments, independent audits or reviews, and continuous monitoring activities should be completed by the Government as part of continuous monitoring.

1.8.7 Personnel and Access Agreement

{For Reference Only: This subpart (and its subparts) relates to PS-3, PS-4, PS-5, PS-6}

Screen individuals prior to authorizing access to the system; and
b. Rescreen individuals in accordance with organization-defined conditions requiring rescreening and, where rescreening is so indicated, the frequency of rescreening.

Upon termination of individual employment:

Disable system access within organization-defined time period

Terminate or revoke any authenticators and credentials associated with the individual

Conduct exit interviews that include a discussion of information security topics

Retrieve all security-related organizational system-related property

Retain access to organizational information and systems formerly controlled by terminated individual

Review and confirm ongoing operational need for current logical and physical access authorizations to systems and facilities when individuals are reassigned or transferred to other positions within the organization. Initiate transfer or reassignment actions within organization-defined time period following the formal transfer action. Modify access authorization as needed to correspond with any changes in operational need due to reassignment or transfer. Notify personnel or roles within organization-defined time period.

Develop and document access agreements for organizational systems. Review and update the access agreements. Verify that individuals requiring access to organizational information and systems:

a. Sign appropriate access agreements prior to being granted access

b. Re-sign access agreements to maintain access to organizational systems when access agreements have been updated

1.8.8 Software, Firmware, and Information Integrity
{For Reference Only: This subpart (and its subparts) relates to SI-7}

Employ integrity verification tools to detect unauthorized changes to control system software, firmware, and information. Take appropriate actions determined by the system owner when unauthorized changes to the software, firmware, and information are detected.

1.9 SOFTWARE UPDATE LICENSING

In addition to all other licensing requirements, all software licensing must include licensing of the following software updates for a period of no less than 5 years:

a. Security and bug-fix patches issued by the software manufacturer.

b. Security patches to address any vulnerability identified in the National Vulnerability Database at http://nvd.nist.gov with a Common Vulnerability Scoring System (CVSS) severity rating of MEDIUM or higher.

Provide a single Software Licenses submittal with documentation of the software licenses for all software provided

1.10 CYBERSECURITY DURING CONSTRUCTION

{For Reference Only: This subpart (and its subparts) relates to SA-3}

In addition to the control system cybersecurity requirements indicated in

this section, meet following requirement throughout the construction process.

1.10.1 Contractor Computer Equipment

Contractor owned computers may be used for construction. When used, contractor computers must meet the following requirements:

1.10.1.1 Operating System

The operating system must be an operating system currently supported by the manufacturer of the operating system. The operating system must be current on security patches and operating system manufacturer required updates.

1.10.1.2 Anti-Malware Software

The computer must run anti-malware software from a reputable software manufacturer. Anti-malware software must be a version currently supported by the software manufacturer, must be current on all patches and updates, and must use the latest definitions file. All computers used on this project must be scanned using the installed software at least once per day.

1.10.1.3 Passwords and Passphrases

The passwords and passphrases for all computers must be changed from their default values. Passwords must be a minimum of eight characters with a minimum of one uppercase letter, one lowercase letter, one number and one special character.

1.10.1.4 Contractor Computer Cybersecurity Compliance Statements

Provide a single submittal containing completed Contractor Computer Cybersecurity Compliance Statements for each company using contractor owned computers. Contractor Computer Cybersecurity Compliance Statements must use the template published at http://www.wbdg.org/ffc/dod/unified-facilities-guide-specifications-ufgs/forms-graphic Each Statement must be signed by a cybersecurity representative for the relevant company.

1.10.2 Temporary IP Networks

Temporary contractor-installed IP networks may be used during construction. When used, temporary contractor-installed IP networks must meet the following requirements:

1.10.2.1 Network Boundaries and Connections

The network must not extend outside the project site and must not connect to any IP network other than IP networks provided under this project or Government furnished IP networks provided for this purpose. Any and all network access from outside the project site is prohibited. Unused network access ports are to be disabled via the management console or command line when not in use.

1.10.3 Government Access to Network

Government personnel must be allowed to have complete and immediate access

to the network at any time in order to verify compliance with this specification

1.10.4 Temporary Wireless IP Networks

Temporary Wireless connections are not allowed by default. The ISSM may approve wireless connections on a case-by-case basis. In addition to the other requirements on temporary IP networks, temporary wireless IP (WiFi) networks must not interfere with existing wireless network and must use WPA2 security. Network names (SSID) for wireless networks must be changed from their default values.

According to DoD, USN, USMC policy there is no separation between temp or perm wireless connections.

1.10.5 Passwords and Passphrases

The passwords and passphrases for all network devices and network access must be changed from their default values. Passwords must be a minimum 8 characters with a minimum of one uppercase letter, one lowercase letter, one number and one special character.

1.10.6 Contractor Temporary Network Cybersecurity Compliance Statements

Provide a single submittal containing completed Contractor Temporary Network Cybersecurity Compliance Statements for each company implementing a temporary IP network. Contractor Temporary Network Cybersecurity Compliance Statements must use the template published at http://www.wbdg.org/ffc/dod/unified-facilities-guide-specifications-ufgs/forms-graphic Each Statement must be signed by a cybersecurity representative for the relevant company. If no temporary IP networks will be used, provide a single copy of the Statement indicating this.

1.10.7 Security Impact Analysis
{For Reference Only: This subpart (and its subparts) relates to CM-4}

If a change is being made while the system is being developed this change should first be analyzed to determine potential security and privacy impacts by the contractor prior to change implementation and the findings should be submitted to the Government.

1.10.8 Contingency Plan
{For Reference Only: This subpart (and its subparts) relates to CP-2}

Develop a contingency plan for the system that:

a. Identifies essential mission and business functions and associated contingency requirements

b. Provides recovery objectives, restoration priorities, and metrics

c. Addresses contingency roles, responsibilities, assigned individuals with contact information

d. Addresses maintaining essential mission and business functions despite a system disruption, compromise, or failure

e. Addresses eventual, full system restoration without deterioration of

the controls originally planned and implemented

f. Addresses the sharing of contingency information

g. Is reviewed and approved by ISSM

Distribute copies of the contingency plan to ISSM. Coordinate contingency planning activities with incident handling activities. Review the contingency plan for the system. Update the contingency plan to address changes to the organization, system, or environment of operation and problems encountered during contingency plan implementation, execution, or testing. Communicate contingency plan changes to ISSM. Incorporate lessons learned from contingency plan testing, training, or actual contingency activities into contingency testing and training. Protect the contingency plan from unauthorized disclosure and modification.

1.11 CYBERSECURITY DURING WARRANTY PERIOD

All work performed on the control system after acceptance must be performed using Government Furnished Equipment . Access to systems and changes must be coordinated through Camp Lejeune FRCS Office and follow established change management procedures.

PART 2 PRODUCTS

(NOT USED)

PART 3 EXECUTION

3.1 ACCESS CONTROL REQUIREMENTS

3.1.1 User Accounts

{For Reference Only: This subpart (and its subparts) relate to AC-2(a)and AC-3}

Any device supporting user accounts (either FULLY or MINIMALLY) must limit access to the device according to specified limitations for each account. Install and configure any device having a STIG or SRG in accordance with that STIG or SRG.

3.1.1.1 C/VTS and ES Control System Devices

a. Devices with full local user interfaces allowing modification of data must at least MINIMALLY support user accounts.

b. Devices with read-only full local user interfaces must at least MINIMALLY support user accounts.

3.1.1.2 Default Requirements for Control System Devices

For control system devices where User Account requirements are not otherwise indicated in this Section:

a. Devices with web interfaces must either FULLY support user accounts or have their web interface disabled.

b. Field devices with full local user interfaces allowing modification of data must at least MINIMALLY support user accounts.

c. Field devices with read-only full local user interfaces must at least MINIMALLY support user accounts.

3.1.2 Unsuccessful Logon Attempts

{For Reference Only: This subpart (and its subparts) relate AC-7 (a), AC-7 (b); CCI-000043, CCI-000044, CCI-001423, CCI-002236, CCI-002237, CCI-002238}

Except for high availability user interfaces indicated as exempt, devices must meet the indicated requirements for handling unsuccessful logon attempts.

3.1.2.1 Devices MINIMALLY Supporting Accounts

Devices which MINIMALLY support accounts are not required to lock based on unsuccessful logon attempts.

3.1.2.2 Devices FULLY Supporting Accounts

Devices which FULLY support accounts must meet the following requirements. If a device cannot meet these requirements, document device capabilities to protect from subsequent unsuccessful logon attempts and propose alternate protections in a Device Account Lock Exception Request submittal. Do not implement alternate protection measures without explicit permission from the Camp Lejeune FRCS Office.

a. It must lock the user account when three unsuccessful logon attempts occur within a 15 minute interval.

3.1.3 Wireless Access

Wireless networking is not authorized for this project as a default. Do not use any wireless communication unless approved by the ISSM which is done on a case-by-case basis. Any device with wireless communication capability is considered to be using wireless communication, regardless of whether or not the device is actively communicating wirelessly, except when wireless communication has been physically permanently disabled (such as through the removal of the wireless transceiver).

Wireless connections must follow all DoD, USN, and USMC requirements and be approved by the PWD ISSM.

3.1.3.1 Wireless IP Communications

Do not install wireless IP networks, including: do not install a wireless access point; do not install or configure an ad-hoc wireless network; do not install or configure a WiFi Direct communication.

3.1.3.2 Non-IP Wireless Communication

Non-IP Wireless networking is not authorized for this project.

3.1.3.3 Wireless Communication Testing

As part of Performance Verification Testing (PVT), conduct testing of wireless communication for all devices indicated on the approved Wireless

Communication Request as requiring testing.

To test wireless communication, test for wireless network reception at multiple points along the wireless test boundary in the vicinity of the wireless device, and record whether a network connection can be established at each point. The wireless test boundary is the building exterior walls. If wireless testing is required, provide a Wireless Communication Test Report documenting the testing points and results at each point for each wireless device.

3.1.4 Physical Access Authorizations and Control

{For Reference Only: This subpart (and its subparts) relates to PE-2, PE-3}

Develop, approve, and maintain a list of individuals with authorized access to the facility where the system resides. Issue authorization credentials for facility access. Review the access list detailing authorized facility access by individuals at organization-defined frequency. Remove individuals from the facility access list when access is no longer required.

Enforce physical access authorizations at entry and exit points to the facility where the system resides by:

a. Verifying individual access authorizations before granting access to the facility

b. Controlling ingress and egress to the facility using physical access control systems or devices

Maintain physical access audit logs for entry or exit points. Control access to areas within the facility designated as publicly accessible by implementing the appropriate controls. Escort visitors and control visitor activity for organization-defined circumstnaces. Secure keys, combinations, and other physical access devices. Inventory physical access devices at organization-defined frequency. Change combinations and keys at organization-defined frequency and/or when keys are lost, combinations are compromised, or when individuals possessing the keys or combinations are transferred or terminated.

3.2 CYBERSECURITY AUDITING

3.2.1 Audit Events, Content of Audit Records, and Audit Generation

{For Reference Only: This subpart (and its subparts) relates to AU-2(a),(c),(d), AU-3}

For devices that have STIG/SRGs related to audit events, content of audit records or audit generation, comply with the requirements of those STIG/SRGs.

3.2.1.1 Default Requirements for Control System Devices

For control system devices where Audit Events, Content of Audit Records, and Audit Generation are not otherwise indicated in this Section:

3.2.1.1.1 Devices Which FULLY Support Accounts

For each device which FULLY supports accounts, provide the capability to select audited events and the content of audit logs. Configure devices to

audit the indicated events, and to record the indicated information for each auditable event

3.2.1.1.1.1 Audited Events

Configure each device to audit the following events:

a. Successful and unsuccessful attempts to access, modify, or delete privileges, security objects, security levels, or categories of information (e.g. classification levels)

a. Successful and unsuccessful logon attempts

b. Privileged activities or other system level access

c. Starting and ending time for user access to the system

d. Concurrent logons from different workstations

e. All account creations, modifications, disabling, and terminations

f. All kernel module load, unload, and restart

3.2.1.1.1.2 Audit Event Information To Record

Configure each device to record, for each auditable event, the following information (where applicable to the event):

a. what type of event occurred

b. when the event occurred

c. where the event occurred

d. the source of the event

e. the outcome of the event

f. the identity of any individuals or subjects associated with the event

3.2.1.1.2 Devices Which Do Not FULLY Support Accounts

For each Device which does not FULLY support accounts configure the device to audit all device shutdown and startup events and to record for each event the type of event and when the event occurred.

3.2.2 Audit Storage Capacity and Audit Upload

{For Reference Only: This subpart (and its subparts) relates to AU-4; CCI-001848, CCI-001849}

a. For devices that have STIG/SRGs related to audit storage capacity (CCI-001848 or CCI-001849) comply with the requirements of those STIG/SRGs.

b. For non-computer control system devices capable of generating audit records, provide 60 days worth of secure local storage, assuming 10 auditable events per day.

3.2.2.1 Device Audit Record Upload Software

For each non-computer device required to audit events, provide, and license to the Camp Lejeune FRCS Office, software implementing a secure mechanism of uploading audit records from the device to a computer and of exporting the uploaded audit records as a Microsoft Excel file or comma separated value text file. Where different devices use different software, provide software of each type required to upload audit logs from all devices.

Submit copies of device audit record upload software. If there are no non-computer devices requiring auditing, provide a document stating this in lieu of this submittal.

3.2.3 Time Stamps

3.2.3.1 C/VTS and ES Control System Devices

Devices generating audit records must have internal clocks capable of providing time with a resolution of 1 second. Clocks cannot drift more than 10 seconds per day. Configure the system so that each device generating audit records maintains accurate time to within 1 second.

3.2.3.2 Default Requirements for Control System Devices

For control system devices where Time Stamps requirements are not otherwise indicated in this Section: Devices generating audit records must have internal clocks capable of providing time with a resolution of 1 second. Clocks must not drift more than 10 seconds per day. Configure the system so that each device generating audit records maintains accurate time to within 1 second.

3.3 REQUIREMENTS FOR LEAST FUNCTIONALITY

{For Reference Only: This subpart (and its subparts), along with the network communication report submittal specified elsewhere in this section, relates to CM-7, CM-7 (1)(b)}

For devices that have a STIG or SRG related to Requirements for Least Functionality (such as configuration settings and port and device I/O access for least functionality), install and configure the device in accordance with that STIG or SRGs.

Do not provide devices with user interfaces where one was not required. Do not use a networked sensor or actuator where a non-networked sensor or actuator would suffice.

3.3.1 Non-IP Control Networks

When control system specifications require particular communication protocols, use only those communication protocols and only as specified. Do not implement any other communication protocol, or use any protocol on ports other than those specified.

When control system specifications do not indicate requirements for communication protocols, use only those protocols required for operation of the system as specified.

3.3.1.1 Allowable Non-IP Control Protocols

3.3.1.1.1 Serial RS-232 and USB

For device configuration and troubleshooting only. That are allowable in a point-to-point configuration only.

3.3.2 IP Control Networks

Do not use nonsecure functions, ports, protocols and services as defined in DODI 8551.01 unless those ports, protocols and services are specifically required by the control system specifications or otherwise specifically authorized by the Camp Lejeune FRCS Office. Do not use ports, protocols and services that are not specified in the control system specifications or required for operation of the control system.

3.3.3 Unspecified Protocol Approval

When unspecified communicaitions protocols are required for proper system operation submit to the Camp Lejeune FRCS Office for approval the protocol, port number if IP based, functional requirement, and cybersecurity conformance.

3.4 IDENTIFICATION AND AUTHENTICATION

3.4.1 User Identification and Authentication

{For Reference Only: This subpart (and its subparts) relates to IA-2,(1),(12), IA-4}

a. Devices that FULLY support accounts must uniquely identify and authenticate organizational users.

b. Devices which allow network access to privileged accounts must implement multifactor authentication for network access to privileged accounts.

3.4.1.1 C/VTS and ES Control System Devices

Isolated systems are not required to authenticate using Personal Identity Verification (PIV) credentials.

3.4.1.2 Default Requirements for Control System Devices

For control system devices where User Identification and Authentication requirements are not otherwise indicated in this Section, User Identification and Authentication for network access to privileged accounts must be implemented by accepting and electronically verify Personal Identity Verification (PIV) credentialsorinheriting identification and authentication from the operating system.

3.4.2 Authenticator Management

{For Reference Only: This subpart (and its subparts) relates to IA-5 (b),(c),(e),(g),(1),(11)}

3.4.2.1 Authentication Type

3.4.2.1.1 C/VTS and ES Control System Devices

Unless otherwise indicated:

a. Devices MINIMALLY supporting accounts must use password-based authentication.

3.4.2.1.2 Default Requirements for Control System Devices

For control system devices where Authentication Type requirements are not otherwise indicated in this Section:

a. Software which FULLY supports accounts and which runs on a computer must use password-based authentication or hardware token-based authentication.

b. Other devices which FULLY support accounts must use either password-based authentication or hardware token-based authentication.

c. Devices MINIMALLY supporting accounts must use either password-based authentication or hardware token-based authentication.

3.4.2.2 Password-Based Authentication Requirements

3.4.2.2.1 Passwords for Non-Computer Devices FULLY Supporting Accounts

All non-computer devices FULLY supporting accounts and supporting password-based authentication must enforce the following requirements:

a. Minimum password length of fifteen (15)) characters

b. Password must contain at least one (1) uppercase character.

c. Password must contain at least one (1) lowercase character.

d. Password must contain at least one (1) numeric character.

e. Password must contain at least one (1) special character.

f. Password must have a maximum lifetime of sixty (60) days. When passwords expire, prompt users to change passwords. Do no lock accounts due to expired passwords.

g. Passwords must be cryptographically protected during storage and transmission.

3.4.2.2.2 Passwords for Devices Minimally Supporting Accounts

Devices minimally supporting accounts must support passwords with a minimum length of four (4) characters.

3.4.2.2.3 Password Configuration and Reporting

For all devices with a password, change the password from the default password. Coordinate selection of passwords with the Camp Lejeune FRCS Office. Do not use the same password for more than one device unless specifically instructed to do so. Provide a Password Summary Report

documenting the password for each device and describing the procedure to change the password for each device.

Do not provide the Password Summary Report in electronic format. Provide two hardcopies of the Password Summary Report, each copy in its own sealed envelope.

3.4.2.3 Hardware Token-Based Authentication Requirements

Devices supporting hardware token-based authentication must use Personal Identity Verification (PIV) credentials for the hardware token.

3.4.3 Device Identification and Authentication

{For Reference Only: This subpart (and its subparts) relates to IA-3}

3.4.3.1 Default Requirements for Control System Devices

For control system devices where Device Identification and Authentication requirements are not otherwise indicated in this Section: Devices using HTTP as a control protocol must use HTTPS using a web server certificate obtained from the Government Trusted Agent instead.

3.4.4 Cryptographic Module Authentication

{For Reference Only: This subpart (and its subparts) relates to IA-7}

For devices that have STIG/SRGs related to cryptographic module authentication, comply with the requirements of those STIG/SRGs.At a minimum the contractor must use FIPS 140-2 VALIDATED cryptographic modules and be approved by the ISSM.

3.5 DURABILITY TO VULNERABILITY SCANNING

{For Reference Only: This subpart (and its subparts) relates to RA-5 (a),(b),(c),(d)}

All IP devices must be scannable, such that the device can be scanned by industry standard IP network scanning utilities without harm to the device, application, or functionality.

For control system devices other than computers:

3.5.1 C/VTS and ES Control System Devices Other Than Computers

Elevator and electrical control system devices other than computers are not required to respond to scans.

3.5.2 Default Requirements for Control System Devices

Non-computer control system devices where Durability to Vulnerability Scanning requirements are not otherwise indicated in this Section are not required to respond to scans.

3.6 SYSTEM AND COMMUNICATION PROTECTION

3.6.1 Denial of Service Protection, Process Isolation and Boundary Protection

{For Reference Only: This subpart (and its subparts) relates to SC-5}

To the greatest extent practical, implement control logic in non-computer hardware and without reliance on the network.

3.7 FIELD QUALITY CONTROL

3.7.1 Tests

In addition to testing and testing support required by other Sections, provide a minimum of eight (8) hours of technical support for cybersecurity testing of control systems.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 73

POWER SYSTEM STUDIES
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 1584	(2018; E 2019) Guide for Performing Arc-Flash Hazard Calculations
IEEE 1584.1	(2022) Guide for the Specification of Scope and Deliverable Requirements for an Arc-Flash Hazard Calculation Study
IEEE 3002.2	(2018) Recommended Practice for Conducting Load-Flow Studies and Analysis of Industrial and Commercial Power Systems
IEEE 3002.3	(2018) Recommended Practice for Conducting Short-Circuit Studies and Analysis of Industrial and Commercial Power Systems

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70E	(2024) Standard for Electrical Safety in the Workplace

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-560-01	(2017; with Change 3, 2023) Operation and Maintenance: Electrical Safety

1.2 SYSTEM DESCRIPTION

The power system covered by this specification consists of: Building electrical service.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Field Examination Plan; G

Arc Flash Label Formats; G

SD-06 Test Reports

Field Examination

SD-07 Certificates

System Analyzer; G

SD-11 Closeout Submittals

Model Files; G

Load Flow Study; G

Fault Current Study; G

System Coordination Study; G

Arc Flash Hazard Study; G

1.4 QUALITY ASSURANCE

1.4.1 System Analyzer

The System Analyzer must perform the power system studies. The System Analyzer must be a registered professional electrical engineer with a minimum of 3 years of experience with power system studies. Include a list of three comparable jobs performed by the System Analyzer with specific names and telephone numbers for reference. Include the license number and state of the registered Professional Engineer.

1.4.2 System Verifier

The System Verifier may inspect and record settings, markings, and otherwise document the existing equipment. The System Verifier may also place appropriate hazard labels on equipment. The System Verifier must not make any calibrations or adjustments or place equipment into service. When working with energized equipment, the system verifier must be a Qualified Person per NFPA 70E or working under the direct supervision of a Qualified Person.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 FIELD EXAMINATION

For each pre- and post-study inspection, submit a field examination plan identifying which facilities must be examined to complete the required work. Include a complete information verification procedure, where Qualified Personnel will be required, PPE requirements for "live" equipment examinations, and equipment to be used within the limited approach boundary of the equipment.

3.1.1 General

Perform field inspections of the site and equipment before the first study

and after the last study to determine the state and settings of the equipment and to verify the final settings agree with the studies.

Schedule the field examination by the System Verifier with the Contracting Officer at least 10 business days before conducting examination. Furnish all materials, labor, and equipment necessary to conduct the examination. Maintain a written record of the all equipment examined, equipment location, equipment ratings, settings, personnel involved, and the date the examination was performed. Submit the written record of each field examination.

3.1.2 Safety

Where examination of the equipment requires energized equipment to be opened, provide a Qualified Person to directly supervising any non-Qualified Person within the hazard area. Use PPE, protective barriers, danger signs and other safety devices to protect and warn personnel in the vicinity of "live" equipment being examined.

3.2 POWER SYSTEM STUDIES

Perform power system studies to demonstrate that the equipment selected and system constructed meet the contract requirements for fault current and interrupt ratings, coordination, protection, and Arc Flash Hazard. Submit reports of the studies along with protective device equipment submittals. Apply Arc Flash Hazard labels to equipment after the studies are approved. Update and resubmit the studies after any changes to the equipment or systems which may affect the study results, and re-apply Arc Flash Hazard labels to equipment after the resubmitted studies are approved. The Government is not responsible for any changes to equipment, device ratings, settings, or additional labor for installation of equipment or devices or labels ordered and/or procured before approval of the study.

3.2.1 Scope of Studies

Building electrical service

The scope of the studies must begin at the source bus and extend down to system buses where fault current availability is 10,000 amperes or less (symmetrical) and at most 600 volts for facility-level distribution buses.

The "source bus" is the source of energy for system being analyzed. This may be the energy feed from a utility, the first bus upstream of the work, generators within the work or upstream of the work, or any other source capable of contributing significant energy into the system being analyzed.

In the systems model for the studies, incorporate all existing and new equipment within the scope of the studies. Incorporate any additional sources or load equipment necessary to accurately model the system's performance.

Where multiple sources of power may be in service in various combinations or where electrical loops are in the system, incorporate into the studies all the modes of operation to evaluate the impact of the modes of operation on the system.

3.2.2 Determination of Facts

Determine and document the time-current characteristics, features, ratings, ampacities, and nameplate data for each existing protective device, electrical equipment, and feeder cables. Obtain the available fault current from the owner of the source bus. If this is not available, utilize infinite bus for worst-case scenario.

3.2.3 Single Line Diagram

Provide a single line diagram showing the electrical system buses, devices, transformation points, and all sources of load current and fault current, including generator and motor contributions. Provide a diagram from the system model. Each bus, device or transformation point must have a unique identifier. Show the location of switches, breakers, and circuit interrupting devices on the diagram together with available fault data, and the device interrupting rating.

The naming of existing components within the system model and single line diagram must match existing installed equipment names. The naming of new components within the system model and single line diagram must use unique identifiers and be coordinated with the Government.

3.2.4 Load Flow Study

Perform the load flow study in accordance with IEEE 3002.2 to identify initital steady-state conditions for the fault current study. For each operating scenario, provide load flow results on the diagram or in the report. Show or describe the loading factors and assumptions used in each operating mode.

3.2.5 Fault Current Study

Use the results of the load flow study to perform the fault current study in accordance with IEEE 3002.3. Provide balanced three-phase fault, bolted line-to-line fault, and single line-to-ground fault current values at each voltage transformation point and at each power distribution bus. For each location, show in tabular form on the diagram or in the report the maximum and minimum available fault currents of all modes of operation for that location.

Where the available fault current at the source bus is not available, describe how the fault contribution from the source bus was determined and why this method is reasonable for the study.

3.2.6 System Coordination Study

Use the results of the load flow study and fault current study. For normal modes of operation, demonstrate that selectivity has been obtained between the devices within the scope of the project. Demonstrate the equipment, machines, and conductors are protected from damage from overloads and fault conditions. Include a description of the coordination of the protective devices in this project. Provide a written narrative describing which devices may operate in the event of a fault at each bus; the logic used to arrive at device ratings and settings; situations where system coordination is not achievable due to device limitations; coordination between upstream and downstream devices; and relay settings.

Provide recommendations to improve or enhance system reliability, and detail where such changes would involve additions or modifications to the contract and cost damages (addition or reduction). Provide composite coordination plots on a log-log scale. Where recommendations are provided to improve or enhance system reliability, provide separate coordination plots on log-log scale showing the system coordination before and after the implementation of the recommendations.Where coordination has been adjusted to lower arc flash values, include a discussion of the change and the impact on the system within the report.

3.2.7 Arc Flash Hazard Study

Perform the arc flash hazard study in accordance with IEEE 1584.1. Utilize the data from the fault current study to determine the worst case incident energy per IEEE 1584 and OSHA 29 CFR 1910.269 Appendix E. Use identified modes of operation to determine the worst case arc flash energy. If not included in another study, include a description of the devices and device settings for the operating modes that provided the highest arc flash energy. The use of a "maintenance switch" to temporarily reduce the Arc Flash incident energy for maintenance work is acceptable. Where the adjusting the coordination of devices to obtain lower arc flash values, include a discussion of the change and the impact on the system within the report. .

3.2.8 Study report(s)

a. Include a narrative describing the studies performed; the bases and methods used; and the desired method of coordinated protection of the power system.

b. Include descriptive and technical data for existing devices and new protective devices proposed. Include manufacturers published data, nameplate data, and definition of the fixed or adjustable features of the existing or new protective devices. For existing devices, included statements on the condition of the equipment based upon field inspections and owner's statements and reports.

c. Document utility company data including system voltages, fault MVA, system X/R ratio, time-current characteristic curves, current transformer ratios, and relay device numbers and settings; . Identify all assumptions about the protection devices, equipment, and system where data was not available.

d. For each bus in the system, provide fully coordinated composite time-current characteristics (TCC) curves as required to ensure coordinated power system protection between protective devices and equipment. In a tabular format, provide recommended ratings and settings of all protective devices.

e. Provide an arc flash study report in accordance with IEEE 1584.1.

f. Provide the calculations performed for the studies, including computer programs utilized. Provide the name of the software package, developer, and version number.

3.2.9 Arc Flash Labels

Provide arc flash warning labels on electrical equipment likely to require examination, servicing, or maintenance while energized. Typical types of

equipment include pad-mounted transformers, switchgear, switchboards, panelboards, disconnect switches, industrial control panels, meter socket enclosures, and motor control centers that are in other than dwelling occupancies. The arc flash label naming must match the naming used in the system modeling and the single line diagram.

Comply with the label requirements specified in UFC 3-560-01. Obtain approval of arc flash label formats before printing.

a. Provide a 3.5 inch x 5 inch to 4 inch x 6 inch thermal transfer type label of high adhesion polyester for each location device analyzed. The label must remain in place and be legible for at least 5 years in the installed environment.

b. Labels must be machine printed with no field markings. Provide arc flash labels in the following manner. All labels must be based on implemented overcurrent devices and settings.

   1. Provide at least one arc flash label for each 480 volt and 208 volt panelboards.

   2. Provide at least one arc flash label for each low voltage (less than 1000 V) switchboard.

   3. Where the equipment construction has different hazards levels in different areas, provide a single label representing the worst case hazard for all branch circuits and a separate unique label for the compartment containing the main protective device. On the worst case label, indicate which branch circuit compartments have the worst case hazard.

c. Use the worst case hazard of all operating scenarios unless mitigation procedures are used. If mitigation procedures are used, explain the procedures on the label.

3.3 MODELING

Develop a software model of the electrical system identified in the scope of the studies. Use the latest version of SKM PowerTools(TM). Develop the model with accurate, verified information. Model existing electrical equipment, machines, devices, and conductors directly connected to, altered by, or otherwise affected by the work. This includes, but is not limited to generators, transformers, switchgear, switchboards, panelboards, motor control centers, motors, voltage regulators, tap changers, protective relays, circuit breakers, switches, fuses, conductors, capacitors, reactors, grounding system, and control equipment.

Provide the final model files in their native editable formats for future use by the Government. Include device information for devices not in the software vendor's standard distribution.

-- End of Section --

SECTION 26 08 00

APPARATUS INSPECTION AND TESTING
11/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

1.2 RELATED REQUIREMENTS

Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM applies to this section with additions and modifications specified herein.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-06 Test Reports

Acceptance Tests and Inspections; G

SD-07 Certificates

Qualifications of Organization, and Lead Engineering Technician; G

Acceptance Test and Inspections Procedure; G

1.4 QUALITY ASSURANCE

1.4.1 Qualifications

Engage the services of a qualified testing organization to provide inspection, testing, calibration, and adjustment of the electrical distribution system and generation equipment listed in paragraph ACCEPTANCE TESTS AND INSPECTIONS herein. Organization must be independent of the supplier, manufacturer, and installer of the equipment. The organization must be a first tier subcontractor. No work required by this section of the specification may be performed by a second tier subcontractor.

a. Submit name and qualifications of organization. Organization must have been regularly engaged in the testing of electrical materials, devices, installations, and systems for a minimum of 5 years. The organization must have a calibration program, and test instruments

used must be calibrated in accordance with NETA ATS.

b. Submit name and qualifications of the lead engineering technician performing the required testing services. Include a list of three comparable jobs performed by the technician with specific names and telephone numbers for reference. Testing, inspection, calibration, and adjustments must be performed by an engineering technician, certified by NETA (Level III) or the National Institute for Certification in Engineering Technologies (NICET) with a minimum of 5 years' experience inspecting, testing, and calibrating electrical distribution and generation equipment, systems, and devices.

1.4.2 Acceptance Tests and Inspections Reports

Submit certified copies of inspection reports and test reports. Include certification of compliance with specified requirements, identify deficiencies, and recommend corrective action when appropriate. Type and neatly bind test reports to form a part of the final record. Submit test reports documenting the results of each test not more than 10 days after test is completed.

1.4.3 Acceptance Test and Inspections Procedure

Submit test procedure reports for each item of equipment to be field tested at least 45 days prior to planned testing date. Do not perform testing until after test procedure has been approved.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 ACCEPTANCE TESTS AND INSPECTIONS

Testing organization will perform acceptance tests and inspections. Test methods, procedures, and test values must be performed and evaluated in accordance with NETA ATS, the manufacturer's recommendations, and paragraph FIELD QUALITY CONTROL of each applicable specification section. Tests identified as optional in NETA ATS are not required unless otherwise specified. Place equipment in service only after completion of required tests and evaluation of the test results have been completed. Supply to the testing organization complete sets of shop drawings, settings of adjustable devices, and other information necessary for an accurate test and inspection of the system prior to the performance of any final testing. Notify Contracting Officer at least 14 days in advance of when tests will be conducted by the testing organization. Perform acceptance tests and inspections on applicable equipment and systems specified in the following sections:

a. Section 26 12 19 PAD-MOUNTED, LIQUID-FILLED, MEDIUM-VOLTAGE TRANSFORMERS

b. Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION. Medium voltage cables and grounding systems only.

c. Section 26 24 13 SWITCHBOARDS

3.2 SYSTEM ACCEPTANCE

Final acceptance of the system is contingent upon satisfactory completion of acceptance tests and inspections.

3.3 PLACING EQUIPMENT IN SERVICE

A representative of the approved testing organization must be present when equipment tested by the organization is initially energized and placed in service.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 12 19

PAD-MOUNTED, LIQUID-FILLED, MEDIUM-VOLTAGE TRANSFORMERS
05/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	(2025a) Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
ASTM D92	(2012a) Standard Test Method for Flash and Fire Points by Cleveland Open Cup Tester
ASTM D97	(2017b) Standard Test Method for Pour Point of Petroleum Products
ASTM D877/D877M	(2019) Standard Test Method for Dielectric Breakdown Voltage of Insulating Liquids Using Disk Electrodes
ASTM D1535	(2014; R 2018) Standard Practice for Specifying Color by the Munsell System

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 386	(2016) Separable Insulated Connector Systems for Power Distribution Systems Rated 2.5 kV through 35 kV
IEEE C2	(2023) National Electrical Safety Code
IEEE C37.47	(2011) Standard for High Voltage Distribution Class Current-Limiting Type Fuses and Fuse Disconnecting Switches
IEEE C57.12.00	(2021) General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers
IEEE C57.12.28	(2023) Standard for Pad-Mounted Equipment - Enclosure Integrity
IEEE C57.12.34	(2022) Standard Requirements for

	Pad-Mounted, Compartmental-Type, Self-Cooled, Three-Phase Distribution Transformers, 10 MVA and Smaller; High Voltage, 34.5 kV Nominal System Voltage and Below; Low Voltage, 15 kV Nominal System Voltage and Below
IEEE C57.12.80	(2010) Standard Terminology for Power and Distribution Transformers
IEEE C57.12.90	(2021) Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers
IEEE C57.98	(2011) Guide for Transformer Impulse Tests
IEEE C62.11	(2020) Standard for Metal-Oxide Surge Arresters for Alternating Current Power Circuits (>1kV)
IEEE Stds Dictionary	(2009) IEEE Standards Dictionary: Glossary of Terms & Definitions

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 260	(1996; R 2004) Safety Labels for Pad-Mounted Switchgear and Transformers Sited in Public Areas
NEMA Z535.4	(2023) Product Safety Signs and Labels

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT (OECD)

OECD Test 203	(1992) Fish Acute Toxicity Test

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA 712-C-98-075	(1998) Fate, Transport and Transformation Test Guidelines - OPPTS 835.3100- "Aerobic Aquatic Biodegradation"
EPA 821-R-02-012	(2002) Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

10 CFR 431	Energy Efficiency Program for Certain Commercial and Industrial Equipment

UL SOLUTIONS (UL)

UL 467	(2022) UL Standard for Safety Grounding and Bonding Equipment

1.2 RELATED REQUIREMENTS

Section 26 08 00 APPARATUS INSPECTION AND TESTING applies to this section, with the additions and modifications specified herein.

1.3 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, are as defined in IEEE Stds Dictionary.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Pad-mounted Transformer Drawings; G

SD-03 Product Data

Pad-mounted Transformers; G

SD-06 Test Reports

Acceptance Checks and Tests; G

SD-07 Certificates

Transformer Efficiencies; G

SD-09 Manufacturer's Field Reports

Transformer Test Schedule; G

Pad-mounted Transformer Design Tests; G

Pad-mounted Transformer Routine and Other Tests; G

SD-10 Operation and Maintenance Data

Transformer(s), Data Package 5; G

1.4.1 Reduced Submittal Requirements

Transformers designed and manufactured by ABB/Hitachi Energy in Jefferson

City, MO; by Eaton's Cooper Power Series Transformers in Waukesha, WI; by ERMCO in Dyersburg, TN; or by Howard Industries in Laurel, MS need not submit the entire submittal package requirements of this contract. Instead, submit the following items:

a. A certification, signed by the manufacturer, stating that the manufacturer will meet the technical requirements of this specification.

b. An outline drawing of the transformer with devices identified (paragraph PAD-MOUNTED TRANSFORMER DRAWINGS, item a).

c. ANSI nameplate data of the transformer (paragraph PAD-MOUNTED TRANSFORMER DRAWINGS, item b).

d. Provide transformer test schedule and routine and other tests required by submittal item "SD-09 Manufacturer's Field Reports".

e. Provide acceptance test reports required by submittal item "SD-06 Test Reports".

f. Provide operation and maintenance manuals required by submittal item "SD-10 Operation and Maintenance Data".

1.5 QUALITY ASSURANCE

1.5.1 Pad-Mounted Transformer Drawings

Include the following as a minimum:

a. An outline drawing, including front, top, and side views.

b. IEEE nameplate data.

c. Elementary diagrams and wiring diagrams with terminals identified of watthour meter and current transformers.

d. One-line diagram, including switch(es), current transformers, meters, and fuses.

1.5.2 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, except of NFPA 70 when more stringent requirements are specified or indicated, as though the word "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Provide equipment, materials, installation, and workmanship in accordance with NFPA 70 unless more stringent requirements are specified or indicated.

1.5.3 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship, and:

a. Have been in satisfactory commercial or industrial use for 2 years prior to bid opening including applications of equipment and materials

under similar circumstances and of similar size.

b. Have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period.

c. Where two or more items of the same class of equipment are required, provide products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.3.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.3.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site are not acceptable.

1.6 MAINTENANCE

1.6.1 Additions to Operation and Maintenance Data

Submit operation and maintenance data in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA and as specified herein. In addition to requirements of Data Package 5, include the following on the actual transformer(s) provided:

a. An instruction manual with pertinent items and information highlighted

b. An outline drawing, front, top, and side views

c. Prices for spare parts and supply list

d. Routine and field acceptance test reports

e. Fuse curves for primary fuses

f. Actual nameplate diagram

g. Date of purchase

PART 2 PRODUCTS

2.1 PRODUCT COORDINATION

Products and materials not considered to be pad-mounted transformers and related accessories are specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM, Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

2.2 THREE-PHASE PAD-MOUNTED TRANSFORMERS

IEEE C57.12.34, IEEE C57.12.28 and as specified herein. Submit manufacturer's information for each component, device, insulating fluid, and accessory provided with the transformer.

2.2.1 Compartments

Provide high- and low-voltage compartments separated by steel isolating barriers extending the full height and depth of the compartments. Compartment doors: hinged lift-off type with stop in open position and three-point latching.

2.2.1.1 High Voltage, Dead-Front

High-voltage compartment contains: the incoming line, insulated high-voltage load-break connectors, bushing well inserts, feed-thru inserts, six high-voltage bushing wells configured for loop feed application, load-break switch handle(s), access to oil-immersed bayonet fuses, dead-front surge arresters, tap changer handle, connector parking stands with insulated standoff bushings, protective caps, and ground pad.

Minimum high-voltage compartment dimensions: IEEE C57.12.34, Figures 16 and 17.

a. Insulated high-voltage load-break connectors: IEEE 386, rated 15 kV, 95 kV BIL. Current rating: 200 amperes rms continuous. Short time rating: 10,000 amperes rms symmetrical for a time duration of 0.17 seconds. Connector must have a steel reinforced hook-stick eye, grounding eye, test point, and arc-quenching contact material.

b. Bushing well inserts and feed-thru inserts: IEEE 386, 200 amperes, 15 kV Class. Provide a bushing well insert for each bushing well unless indicated otherwise. Provide feed-thru inserts as indicated.

c. One-piece bushings: IEEE 386, 200 amperes, 15 kV Class.

d. Load-break switch

Loop feed sectionalizer switches: Provide three, two-position, oil-immersed type switches to permit closed transition loop feed and sectionalizing. Each switch must be rated at 15 kV, 95 kV BIL, with a continuous current rating and load-break rating of 200 amperes, and a make-and-latch rating of 12,000 rms amperes symmetrical. Locate the switch handles in the high-voltage compartment. Operation of switches must be as follows:

ARRANGEMENT NO.	DESCRIPTION OF SWITCH ARRANGEMENT	SWITCH POSITION					
		LINE A SW.		LINE B SW		XFMR. SW	
		OPEN	CLOSE	OPEN	CLOSE	OPEN	CLOSE
1	Line A connected to Line B and both lines connected to transformer		X		X		X
2	Transformer connected to Line A only		X	X			X

ARRANGEMENT NO.	DESCRIPTION OF SWITCH ARRANGEMENT	SWITCH POSITION					
		LINE A SW.		LINE B SW		XFMR. SW	
		OPEN	CLOSE	OPEN	CLOSE	OPEN	CLOSE
3	Transformer connected to Line Bonly	X			X		X
4	Transformer open and loop closed		X		X	X	
5	Transformer open and loop open	X		X		X	

e. Provide bayonet oil-immersed, expulsion fuses in series with oil-immersed, partial-range, current-limiting fuses. The bayonet fuse links sense both high currents and high oil temperature in order to provide thermal protection to the transformer. Coordinate transformer protection with expulsion fuse clearing low-current faults and current-limiting fuse clearing high-current faults beyond the interrupting rating of the expulsion fuse. Include an oil retention valve inside the bayonet assembly housing, which closes when the fuse holder is removed, and an external drip shield to minimize oil spills. Display a warning label adjacent to the bayonet fuse(s) cautioning against removing or inserting fuses unless the transformer has been de-energized and the tank pressure has been released.

   Bayonet fuse assembly: 150 kV BIL.

   Oil-immersed current-limiting fuses: IEEE C37.47; 50,000 rms amperes symmetrical interrupting rating at the system voltage specified.

f. Surge arresters: IEEE C62.11, rated 10 kV, fully shielded, dead-front, metal-oxide-varistor, elbow type with resistance-graded gap. Provide six arresters for loop feed circuits.

g. Parking stands: Provide a parking stand near each bushing. Provide insulated standoff bushings for parking of energized high-voltage connectors on parking stands.

h. Protective caps: IEEE 386, 200 amperes, 15 kV Class. Provide insulated protective caps (not shipping caps) for insulating and sealing out moisture from unused bushings.

2.2.1.2 Low Voltage

Low-voltage compartment contains: low-voltage bushings with NEMA spade terminals, accessories, metering, stainless steel or laser-etched anodized aluminum diagrammatic transformer nameplate, and ground pad.

a. Include the following accessories: drain valve with sampler device, fill plug, pressure relief device, liquid level gage, pressure-vacuum gage, and dial type thermometer with maximum temperature indicator.

b. Metering: Provide as specified in Section 26 27 14.00 20 ELECTRICITY

METERING.

2.2.2 Transformer

a. Less-flammable bio-based liquid-insulated, two winding, 60 hertz, 65 degrees C rise above a 30 degrees C average ambient, self-cooled type.

b. Transformer rated as indicated kVA.

c. Transformer voltage ratings: as indicated

d. Tap changer: externally operated, manual type for changing tap setting when the transformer is de-energized. Provide four 2.5 percent full capacity taps, two above and two below rated primary voltage. Indicate which tap setting is in use, clearly visible when the compartment is opened.

e. Minimum tested percent impedance at 85 degrees C:

(1) 2.50 for units rated 75kVA and below
(2) 2.87 for units rated 112.5kVA to 300kVA
(3) 4.03 for 500kVA rated units
(4) 5.32 for units rated 750kVA and above

f. Comply with the following audible sound level limits:

kVA	DECIBELS (MAX
75	51
112.5	55
150	55
225	55
300	55
500	56
750	57
1000	58
1500	60
2000	61
2500	62

g. Include:

(1) Lifting lugs and provisions for jacking under base, with base construction suitable for using rollers or skidding in any direction.

(2) Provide transformer top with an access handhole.

(3) kVA rating conspicuously displayed on its enclosure.

2.2.2.1 Specified Transformer Efficiencies

Provide transformer efficiency calculations utilizing the actual no-load and load loss values obtained during the routine tests performed on the actual transformer(s) prepared for this project. Reference no-load losses (NLL) at 20 degrees C. Reference load losses (LL) at 55 degrees C and at 50 percent of the nameplate load. The transformer is not acceptable if the calculated transformer efficiency is less than the efficiency indicated in the "KVA / Efficiency" table below. The table is based on requirements contained within 10 CFR 431, Subpart K. Submit certification, including supporting calculations, from the manufacturer indicating conformance.

kVA	EFFICIENCY (percent)
15	98.65
30	98.83
45	98.92
75	99.03
112.5	99.11
150	99.16
225	99.23
300	99.27
500	99.35
750	99.40
1000	99.43
1500	99.48
2000	99.51
2500	99.53
above 2500	99.54

2.2.3 Insulating Liquid

a. Less-flammable transformer liquids: NFPA 70 and FM APP GUIDE for less-flammable liquids having a fire point not less than 300 degrees C tested per ASTM D92 and a dielectric strength not less than 33 kV tested per ASTM D877/D877M. Provide identification of transformer as "non-PCB" and "manufacturer's name and type of fluid" on the nameplate.

Provide a fluid that is a biodegradable, electrical insulating, and cooling liquid classified by UL and approved by FM as "less flammable" with the following properties:

(1) Pour point: ASTM D97, less than -15 degree C

(2) Aquatic biodegradation: EPA 712-C-98-075, ultimately biodegradable as designated by EPA.

(3) Trout toxicity: OECD Test 203, zero mortality of EPA 821-R-02-012, pass

2.2.3.1 Liquid-Filled Transformer Nameplates

Provide nameplate information in accordance with IEEE C57.12.00 and as modified or supplemented by this section.

2.2.4 Corrosion Protection

Provide entire transformer assembly, including tank and radiator, base, enclosure, and metering enclosure fabricated of stainless steel conforming to ASTM A240/A240M, Type 304 or 304L. Form enclosure of stainless steel sheets. The optional use of aluminum is permitted for the metering enclosure.Paint entire transformer assembly Munsell 7GY3.29/1.5 green, with paint coating system complying with IEEE C57.12.28 regardless of base, cabinet, and tank material. The Munsell color notation is specified in ASTM D1535.

2.3 WARNING SIGNS AND LABELS

Provide warning signs for the enclosures of pad-mounted transformers having a nominal rating exceeding 600 volts in accordance with NEMA Z535.4 and NEMA 260.

a. When the enclosure integrity of such equipment is specified to be in accordance with IEEE C57.12.28, such as for pad-mounted transformers, provide self-adhesive warning labels on the outside of the high voltage compartment door(s)with nominal dimensions of 7 by 10 inches with the legend "WARNING HIGH VOLTAGE" printed in two lines of nominal 2 inch high letters. Include the work "WARNING" in white letters on an orange background and the words "HIGH VOLTAGE" in black letters on a white background.

2.4 ARC FLASH WARNING LABEL

Provide arc flash warning label for the enclosure of pad-mounted transformers. Locate this self-adhesive warning label on the outside of the high voltage compartment door warning of potential electrical arc flash hazards and appropriate PPE required. Provide label format as indicated.

2.5 GROUNDING AND BONDING

UL 467. Provide grounding and bonding as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

2.6 PADLOCKS

Provide padlocks for pad-mounted equipment, keyed as directed by the Contracting Officer. Comply with Section 08 71 00 DOOR HARDWARE.

2.7 SOURCE QUALITY CONTROL

2.7.1 Transformer Test Schedule

The Government reserves the right to witness tests. Provide transformer test schedule for tests to be performed at the manufacturer's test facility. Submit required test schedule and location, and notify the Contracting Officer 30 calendar days before scheduled test date. Notify Contracting Officer 15 calendar days in advance of changes to scheduled date.

a. Test Instrument Calibration

(1) Provide a calibration program which assures that all applicable test instruments are maintained within rated accuracy.

(2) Accuracy: Traceable to the National Institute of Standards and Technology.

(3) Instrument calibration frequency schedule: less than or equal to 12 months for both test floor instruments and leased specialty equipment.

(4) Dated calibration labels: visible on all test equipment.

(5) Calibrating standard: higher accuracy than that of the instrument tested.

(6) Keep up-to-date records that indicate dates and test results of instruments calibrated or tested. For instruments calibrated by the manufacturer on a routine basis, in lieu of third party calibration, include the following:

(a) Maintain up-to-date instrument calibration instructions and procedures for each test instrument.

(b) Identify the third party/laboratory calibrated instrument to verify that calibrating standard is met.

2.7.2 Design Tests

IEEE C57.12.00, and IEEE C57.12.90. Section 5.1.2 in IEEE C57.12.80 states that "design tests are made only on representative apparatus of basically the same design." Submit design test reports (complete with test data, explanations, formulas, and results), in the same submittal package as the catalog data and drawings for each of the specified transformer(s), with design tests performed prior to the award of this contract.

a. Tests: certified and signed by a registered professional engineer.

b. Temperature rise: "Basically the same design" for the temperature rise test means a pad-mounted transformer with the same coil construction (such as wire wound primary and sheet wound secondary),

the same kVA, the same cooling type (KNAN), the same temperature rise rating, and the same insulating liquid as the transformer specified.

c. Lightning impulse: "Basically the same design" for the lightning impulse dielectric test means a pad-mounted transformer with the same BIL, the same coil construction (such as wire wound primary and sheet wound secondary), and a tap changer, if specified. Design lightning impulse tests includes the primary windings only of that transformer.

(1) IEEE C57.12.90, paragraph 10.3 entitled "Lightning Impulse Test Procedures," and IEEE C57.98.

(2) State test voltage levels.

(3) Provide photographs of oscilloscope display waveforms or plots of digitized waveforms with test report.

d. Lifting and moving devices: "Basically the same design" requirement for the lifting and moving devices test means a test report confirming that the lifting device being used is capable of handling the weight of the specified transformer in accordance with IEEE C57.12.34.

e. Pressure: "Basically the same design" for the pressure test means a pad-mounted transformer with a tank volume within 30 percent of the tank volume of the transformer specified.

f. Short circuit: "Basically the same design" for the short circuit test means a pad-mounted transformer with the same kVA as the transformer specified.

2.7.3 Routine and Other Tests

IEEE C57.12.00. Routine and other tests: performed in accordance with IEEE C57.12.90 by the manufacturer on each of the actual transformer(s) prepared for this project to ensure that the design performance is maintained in production. Submit test reports, by serial number and receive approval before delivery of equipment to the project site. Required tests and testing sequence as follows:

a. Phase relation

b. Ratio

c. No-load losses (NLL) and excitation current

d. Load losses (LL) and impedance voltage

e. Dielectric

(1) Impulse

(2) Applied voltage

(3) Induced voltage

f. Leak

PART 3 EXECUTION

3.1 INSTALLATION

Conform to IEEE C2, NFPA 70, and to the requirements specified herein. Provide new equipment and materials unless indicated or specified otherwise.

3.2 GROUNDING

NFPA 70 and IEEE C2, except provide grounding systems with a resistance to solid earth ground not exceeding 25 ohms.

3.2.1 Grounding Electrodes

Provide driven ground rods as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION. Connect ground conductors to the upper end of ground rods by exothermic weld or compression connector. Provide compression connectors at equipment end of ground conductors.

3.2.2 Pad-Mounted Transformer Grounding

Provide a ground ring around the transformer with 4/0 AWG bare copper. Provide four ground rods in the ground ring, one per corner. Install the ground rods at least 10 feet apart from each other. Provide separate copper grounding conductors and connect them to the ground loop as indicated. When work in addition to that indicated or specified is required to obtain the specified ground resistance, the provision of the contract covering "Changes" applies.

3.2.3 Connections

Make joints in grounding conductors and loops by exothermic weld or compression connector. Install exothermic welds and compression connectors as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

3.2.4 Grounding and Bonding Equipment

UL 467, except as indicated or specified otherwise.

3.3 INSTALLATION OF EQUIPMENT AND ASSEMBLIES

Install and connect pad-mounted transformers furnished under this section as indicated on project drawings, the approved shop drawings, and as specified herein.

3.4 FIELD APPLIED PAINTING

Where field painting of enclosures is required to correct damage to the manufacturer's factory applied coatings, provide manufacturer's recommended coatings and apply in accordance with manufacturer's instructions.

3.5 WARNING SIGN MOUNTING

Provide the number of signs required to be readable from each accessible side, but space the signs a maximum of 30 feet apart.

3.6 FOUNDATION FOR EQUIPMENT AND ASSEMBLIES

Mount transformer on concrete slab as follows:

a. Unless otherwise indicated, provide the slab with dimensions at least 8 inches thick, reinforced with a 6 by 6 inches - W2.9 by W2.9 mesh placed uniformly 4 inches from the top of the slab.

b. Place slab on a 6 inch thick, well-compacted gravel base.

c. Install slab such that top of concrete slab is approximately 4 inches above the finished grade with gradual slope for drainage.

d. Provide edges above grade with 1/2 inch chamfer.

e. Provide slab of adequate size to project at least 8 inches beyond the equipment.

Stub up conduits, with bushings, 2 inches into cable wells in the concrete pad. Coordinate dimensions of cable wells with transformer cable training areas.

3.6.1 Sealing

When the installation is complete, seal all entries into the equipment enclosure with an approved sealing method. Provide seals of sufficient strength and durability to protect all energized live parts of the equipment from rodents, insects, or other foreign matter.

3.7 FIELD QUALITY CONTROL

3.7.1 Performance of Acceptance Checks and Tests

Perform in accordance with the manufacturer's recommendations and include the following visual and mechanical inspections and electrical tests, performed in accordance with NETA ATS. Submit reports, including acceptance criteria and limits for each test in accordance with NETA ATS "Test Values".

3.7.1.1 Pad-Mounted Transformers

a. Visual and mechanical inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition. Check for damaged or cracked insulators and leaks.

(3) Inspect anchorage, alignment, and grounding.

(4) Verify the presence of PCB content labeling.

(5) Verify the bushings and transformer interiors are clean.

(6) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(7) Verify correct liquid level in tanks and bushings.

(8) Verify that positive pressure is maintained on gas-blanketed transformers.

(9) Perform specific inspections and mechanical tests as recommended by manufacturer.

(10) Verify de-energized tap changer position is left as specified.

(11) Verify the presence of transformer surge arresters.

b. Electrical tests

(1) Perform resistance measurements through all bolted connections with low-resistance ohmmeter.

(2) Verify proper secondary voltage phase-to-phase and phase-to-neutral after energization and prior to loading.

(3) Perform insulation-resistance tests, winding-to-winding and each winding-to-ground. Calculate polarization index. Verify that the tap changer is set at the specified ratio.

(4) Perform turns-ratio tests at all tap positions.

(5) Perform insulation power-factor or dissipation-factor tests on all windings in accordance with test equipment manufacturer’s published data.

(6) Perform power-factor or dissipation-factor tests on each bushing equipped with a power-factor/capacitance tap. In the absence of a power-factor/capacitance tap, perform hot-collar tests.

(7) Measure the resistance of each high-voltage winding in each de-energized tap-changer position. Measure the resistance of each low-voltage winding in each de-energized tap-changer position, if applicable.

(8) Remove and test a sample of insulating liquid for the following: Dielectric breakdown voltage, Acid neutralization number, Specific gravity, Interfacial tension, Color, Visual Condition, Water in insulating liquids (Required on 25 kV or higher voltages and on all silicone-filled units.), and Power factor or dissipation factor.

(9) Perform dissolved-gas analysis (DGA) on a sample of insulating liquid.

3.7.1.2 Current Transformers

a. Visual and mechanical inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition.

(3) Verify correct connection.

(4) Verify that adequate clearances exist between primary and secondary circuit wiring.

(5) Verify the unit is clean.

(6) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(7) Verify that all required grounding and shorting connections provide good contact.

(8) Verify correct operation of transformer withdrawal mechanism and grounding operation.

(9) Verify appropriate lubrication on moving current-carrying parts and on moving and sliding surfaces.

b. Electrical tests

(1) Perform resistance measurements through all bolted connections with low-resistance ohmmeter, if applicable.

(2) Perform insulation-resistance test.

(3) Perform a polarity test.

(4) Perform a ratio-verification test.

3.7.1.3 Grounding System

a. Visual and mechanical inspection

(1) Inspect ground system for compliance with contract plans and specifications.

b. Electrical tests

(1) Perform ground-impedance measurements utilizing the fall-of-potential method. On systems consisting of interconnected ground rods, perform tests after interconnections are complete. On systems consisting of a single ground rod perform tests before any wire is connected. Take measurements in normally dry weather, not less than 48 hours after rainfall. Use a portable ground resistance tester in accordance with manufacturer's instructions to test each ground or group of grounds. Use an instrument equipped with a meter reading directly in ohms or fractions thereof to indicate the ground value of the ground rod or grounding systems under test.

(2) Submit the measured ground resistance of each ground rod and grounding system, indicating the location of the rod and grounding system. Include the test method and test setup (i.e., pin location) used to determine ground resistance and soil conditions at the time the measurements were made.

3.7.1.4 Surge Arresters, Medium- and High-Voltage

a. Visual and mechanical inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition.

(3) Inspect anchorage, alignment, grounding, and clearances.

(4) Verify the arresters are clean.

(5) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(6) Verify that the ground lead on each device is individually attached to a ground bus or ground electrode.

b. Electrical tests

(1) Perform resistance measurements through all bolted connections with low-resistance ohmmeter, if applicable.

(2) Perform an insulation-resistance test on each arrester, phase terminal-to-ground.

(3) Test grounding connection.

3.7.2 Follow-Up Verification

Upon completion of acceptance checks and tests, show by demonstration in service that circuits and devices are in good operating condition and properly performing the intended function. As an exception to requirements stated elsewhere in the contract, notify the Contracting Officer 5 working days in advance of the dates and times of checking and testing.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 20 00

INTERIOR DISTRIBUTION SYSTEM
05/25, CHG 1: 08/25

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM B1	(2013) Standard Specification for Hard-Drawn Copper Wire
ASTM B8	(2023) Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM D709	(2017) Standard Specification for Laminated Thermosetting Materials

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 81	(2012) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
IEEE Stds Dictionary	(2009) IEEE Standards Dictionary: Glossary of Terms & Definitions

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL CONTRACTORS ASSOCIATION (NECA)

NECA NEIS 1	(2015) Standard for Good Workmanship in Electrical Construction

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C12.7	(2022) Requirements for Watthour Meter Sockets
ANSI C80.1	(2020) American National Standard for Electrical Rigid Steel Conduit (ERSC)
NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA FU 1	(2012) Low Voltage Cartridge Fuses

NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA KS 1	(2013) Enclosed and Miscellaneous Distribution Equipment Switches (600 V Maximum)
NEMA ST 20	(2014) Dry-Type Transformers for General Applications
NEMA TC 2	(2020) Standard for Electrical Polyvinyl Chloride (PVC) Conduit
NEMA TC 3	(2021) Polyvinyl Chloride (PVC) Fittings for Use With Rigid PVC Conduit and Tubing
NEMA VE 1	(2017) Metal Cable Tray Systems
NEMA WD 1	(1999; R 2020) Standard for General Color Requirements for Wiring Devices
NEMA WD 6	(2021) Wiring Devices Dimensions Specifications
NEMA Z535.4	(2023) Product Safety Signs and Labels

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 70E	(2024) Standard for Electrical Safety in the Workplace
NFPA 780	(2026) Standard for the Installation of Lightning Protection Systems

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

10 CFR 431	Energy Efficiency Program for Certain Commercial and Industrial Equipment
29 CFR 1910.147	The Control of Hazardous Energy (Lock Out/Tag Out)
29 CFR 1910.303	Electrical, General

UL SOLUTIONS (UL)

UL 1	(2005; Reprint Jan 2022) UL Standard for Safety Flexible Metal Conduit
UL 6	(2022) UL Standard for Safety Electrical Rigid Metal Conduit-Steel
UL 20	(2025) UL Standard for Safety General-Use Snap Switches

UL 50	(2024) UL Standard for Safety Enclosures for Electrical Equipment, Non-Environmental Considerations
UL 67	(2018; Reprint Aug 2023) UL Standard for Safety Panelboards
UL 83	(2017; Reprint Mar 2020) UL Standard for Safety Thermoplastic-Insulated Wires and Cables
UL 248-4	(2010; Reprint Apr 2019) Low-Voltage Fuses - Part 4: Class CC Fuses
UL 248-8	(2011; Reprint Aug 2020) Low-Voltage Fuses - Part 8: Class J Fuses
UL 248-10	(2011; Reprint Aug 2020) Low-Voltage Fuses - Part 10: Class L Fuses
UL 248-12	(2011; Reprint Aug 2020) Low Voltage Fuses - Part 12: Class R Fuses
UL 248-15	(2018) Low-Voltage Fuses - Part 15: Class T Fuses
UL 360	(2013; Reprint Jan 2024) UL Standard for Safety Liquid-Tight Flexible Metal Conduit
UL 467	(2022) UL Standard for Safety Grounding and Bonding Equipment
UL 486A-486B	(2025) UL Standard for Safety Wire Connectors
UL 486C	(2023; Reprint Feb 2025) UL Standard for Safety Splicing Wire Connectors
UL 489	(2025) UL Standard for Safety Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures
UL 498	(2017; Reprint Jun 2024) UL Standard for Safety Attachment Plugs and Receptacles
UL 510	(2020; Dec 2022) UL Standard for Safety Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
UL 514A	(2024) UL Standard for Safety Metallic Outlet Boxes
UL 514B	(2012; Reprint Mar 2024) UL Standard for Safety Conduit, Tubing and Cable Fittings
UL 514C	(2014; Reprint Apr 2024) UL Standard for Safety Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers

UL 651	(2011; Reprint May 2022) UL Standard for Safety Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings
UL 854	(2020; Reprint Jul 2024) Standard for Service-Entrance Cables
UL 869A	(2006; Reprint Jun 2020) Reference Standard for Service Equipment
UL 943	(2016; Reprint Sep 2023) UL Standard for Safety Ground-Fault Circuit-Interrupters
UL 1283	(2025) UL Standard for Safety Electromagnetic Interference Filters
UL 1449	(2021; Reprint Oct 2025) UL Standard for Safety Surge Protective Devices
UL 1569	(2018; Reprint Apr 2024) UL Standard for Safety Metal-Clad Cables
UL 1660	(2019; Reprint May 2024) Liquid-Tight Flexible Nonmetallic Conduit
UL 1699	(2017; Reprint Feb 2022) UL Standard for Safety Arc-Fault Circuit-Interrupters
UL 4248-1	(2022; Reprint Jun 2025) UL Standard for Safety Fuseholders - Part 1: General Requirements
UL 4248-12	(2018; Reprint Feb 2022) UL Standard for Safety Fuseholders - Part 12: Class R

1.2 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, are as defined in IEEE Stds Dictionary.

1.3 RELATED REQUIREMENTS

Section 25 05 11.00 CYBERSECURITY FOR FACILITY-RELATED CONTROL SYSTEMS - ISOLATED SYSTEMS applies to this section, with the additions and modifications specified herein.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Panelboards; G

Transformers; G
Cable Trays; G
Load Centers for Housing Units; G

SD-03 Product Data

Switches; G

Receptacles; G

Circuit Breakers; G

Housing Unit Load Center Circuit Breakers; G
Transformers; G

Manual Motor Starters; G

Residential Load Centers; G,

Meter Base Only; G,

Secondary Bonding Busbar; G

Surge Protective Devices; G

Cable Trays; G

SD-06 Test Reports

600-volt Wiring Test; G

Grounding System Test; G

Transformer Tests; G

Ground-fault Receptacle Test; G

Arc-fault Receptacle Test; G

SD-07 Certificates

Fuses; G

SD-09 Manufacturer's Field Reports

Transformer Factory Tests

SD-10 Operation and Maintenance Data

Electrical Systems, Data Package 5; G

1.5 QUALITY ASSURANCE

1.5.1 Electrician Qualifications

Electrical work must be performed by qualified persons with verifiable credentials who are familiar with applicable code requirements.

Verifiable credentials consist of State, National or Local Certifications or Licenses that a Master or Journeyman Electrician may hold, depending on work being performed.

1.5.2 Fuses

Submit coordination data as specified in paragraph, FUSES of this section.

1.5.3 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Provide equipment, materials, installation, and workmanship in accordance with NFPA 70 unless more stringent requirements are specified or indicated. NECA NEIS 1 is the minimum standard for workmanship.

1.5.4 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship and:

a. Have been in satisfactory commercial or industrial use for 2 years prior to bid opening including applications of equipment and materials under similar circumstances and of similar size.

b. Have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period.

c. Where two or more items of the same class of equipment are required, provide products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.4.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 consecutive hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.4.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site are not acceptable.

1.6 MAINTENANCE

1.6.1 Electrical Systems

Submit operation and maintenance data in accordance with Section 01 78 23, OPERATION AND MAINTENANCE DATA and as specified herein. Submit operation and maintenance manuals for electrical systems that provide basic data relating to the design, operation, and maintenance of the electrical distribution system for the building. Include the following:

a. Single line diagram of the "as-built" building electrical system.

b. Schematic diagram of electrical control system (other than HVAC, covered elsewhere).

c. Manufacturers' operating and maintenance manuals on active electrical equipment.

1.7 WARRANTY

Provide equipment items supported by service organizations that are located within 250 miles of the equipment installation in order to render service to the equipment on a regular and emergency basis during the warranty period of the contract.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

As a minimum, meet requirements of UL, where UL standards are established for those items, and requirements of NFPA 70 for all materials, equipment, and devices.

2.2 CONDUIT AND FITTINGS

Conform to the following:

2.2.1 Rigid Metallic Conduit

2.2.1.1 Rigid, Threaded Zinc-Coated Steel Conduit

ANSI C80.1, UL 6.

2.2.2 Rigid Nonmetallic Conduit

PVC Type EPC-40, and EPC-80 in accordance with NEMA TC 2,UL 651.

2.2.3 Flexible Metal Conduit

UL 1, limited to 6 feet in areas where not accessible or below a raised floor installation.

2.2.3.1 Liquid-Tight Flexible Metal Conduit, Steel

UL 360, limited to 6 feet in areas where not accessible or below a raised floor installation. The use of flexible metal conduit for bends or transitions in RMC, IMC, or EMT is prohibited.

2.2.4 Liquid-Tight Flexible Nonmetallic Conduit

UL 1660. The use of liquid-tight flexible metal conduit for bends or transitions in RMC, IMC, or EMT is prohibited.

2.2.5 Fittings for Metal Conduit, EMT, and Flexible Metal Conduit

UL 514B. Ferrous fittings: cadmium- or zinc-coated in accordance with UL 514B.

2.2.5.1 Fittings for Rigid Metal Conduit and IMC

Threaded-type. Split couplings unacceptable.

2.2.5.2 Fittings for EMT

Die Cast compression type.

2.2.6 Fittings for Rigid Nonmetallic Conduit

NEMA TC 3 for PVC, and UL 514B.

2.3 CABLE TRAYS

NEMA VE 1. Provide the following:

a. Cable trays: form a wireway system, with a nominal depth as indicated. Cable tray is to have a span/load class designation of 8A per NEMA VE 1.

b. Cable trays: constructed of aluminum.

c. Cable trays: include splice and end plates, dropouts, and miscellaneous hardware.

d. Edges, fittings, and hardware: finished free from burrs and sharp edges.

e. Fittings: ensure not less than load-carrying ability of straight tray sections and have manufacturer's minimum standard radius.

f. Radius of bends: as indicated.

2.3.1 Trough-Type Cable Trays

Provide size as indicated.

2.3.2 Ladder-Type Cable Trays

Provide size as indicated with maximum rung spacing of 6 inches.

2.4 OUTLET BOXES AND COVERS

UL 514A, cadmium- or zinc-coated, if ferrous metal. UL 514C, if nonmetallic.

2.5 CABINETS, JUNCTION BOXES, AND PULL BOXES

UL 50; volume greater than 100 cubic inches, NEMA Type 1 enclosure; sheet steel, hot-dip, zinc-coated. Where exposed to wet, damp, or corrosive environments, NEMA Type 3Ras indicated.

2.6 WIRES AND CABLES

Provide wires and cables in accordance with applicable requirements of NFPA 70 and UL for type of insulation, jacket, and conductor specified or indicated. Do not use wires and cables manufactured more than 24 months prior to date of delivery to site.

2.6.1 Conductors

Provide the following:

a. Conductor sizes and capacities shown are based on copper, unless indicated otherwise.

b. Conductors No. 10 AWG and larger diameter: stranded.

c. Conductors No. 12 AWG and smaller diameter: solid.

d. Conductors for remote control, alarm, and signal circuits, classes 1, 2, and 3: stranded unless specifically indicated otherwise.

e. All conductors: copper.

2.6.1.1 Minimum Conductor Sizes

Provide minimum conductor size in accordance with the following:

a. Branch circuits: No. 12 AWG .

b. Class 1 remote-control and signal circuits: No. 14 AWG .

c. Class 2 low-energy, remote-control and signal circuits: No. 16 AWG .

d. Class 3 low-energy, remote-control, alarm and signal circuits: No. 22 AWG .

e. Digital low voltage lighting control (DLVLC) system at 24 Volts or less: Category 5 UTP cables in EMT conduit.

2.6.2 Color Coding

Provide color coding for service, feeder, branch, control, and signaling circuit conductors.

2.6.2.1 Ground and Neutral Conductors

Provide color coding of ground and neutral conductors as follows:

a. Grounding conductors: Green.

b. Neutral conductors: White.

c. Exception, where neutrals of more than one system are installed in same raceway or box, other neutrals color coding: white with a different colored (not green) stripe for each.

2.6.2.2 Ungrounded Conductors

Provide color coding of ungrounded conductors in different voltage systems as follows:

a. 208/120 volt, three-phase

(1) Phase A - black

(2) Phase B - red

(3) Phase C - blue

b. 480/277 volt, three-phase

(1) Phase A - brown

(2) Phase B - orange

(3) Phase C - yellow

c. 120/240 volt, single phase: Black and red

2.6.3 Insulation

Unless specified or indicated otherwise or required by NFPA 70, provide power and lighting wires rated for 600-volts, Type THWN/THHN conforming to UL 83, except that grounding wire may be type TW conforming to UL 83; remote-control and signal circuits: Type TW or TF, conforming to UL 83. Where equipment or devices require 90-degree Centigrade (C) conductors, provide only conductors with 90-degree C insulation or better.

2.6.4 Bonding Conductors

ASTM B1, solid bare copper wire for sizes No. 8 AWG and smaller diameter; ASTM B8, Class B, stranded bare copper wire for sizes No. 6 AWG and larger diameter.

2.6.5 Service Entrance Cables

Service Entrance (SE) and Underground Service Entrance (USE) Cables, UL 854.

2.6.6 Metal-Clad Cable

UL 1569; NFPA 70, Type MC cable.

2.7 SPLICES AND TERMINATION COMPONENTS

UL 486A-486B for wire connectors and UL 510 for insulating tapes. Connectors for No. 10 AWG and smaller diameter wires: insulated, pressure-type in accordance with UL 486A-486B or UL 486C (twist-on splicing connector). Provide solderless terminal lugs on stranded conductors.

2.8 DEVICE PLATES

Provide the following:

a. UL listed, one-piece device plates for outlets to suit the devices installed.

b. For metal outlet boxes, plates on unfinished walls: zinc-coated sheet steel or cast metal having round or beveled edges.

c. For nonmetallic boxes and fittings, other suitable plates may be provided.

d. Plates on finished walls: nylon or lexan, minimum 0.03 inch wall thickness and same color as receptacle or toggle switch with which

they are mounted.

e. Screws: machine-type with countersunk heads in color to match finish of plate.

f. Sectional type device plates are not be permitted.

g. Plates installed in wet locations: gasketed and UL listed for "wet locations."

2.9 SWITCHES

2.9.1 Toggle Switches

NEMA WD 1, UL 20, single pole, three-way, and four-way, totally enclosed with bodies of thermoplastic or thermoset plastic and mounting strap with grounding screw. Include the following:

a. Handles: white thermoplastic.

b. Wiring terminals: screw-type, side-wired. Do not use back-stabbed conductor terminals.

c. Contacts: silver-cadmium and contact arm - one-piece copper alloy.

d. Switches: rated quiet-type ac only, 120/277 volts, with current rating and number of poles indicated.

2.9.2 Disconnect Switches

NEMA KS 1. Provide heavy duty-type switches where indicated, where switches are rated higher than 240 volts, and for double-throw switches. Utilize Class R fuseholders and fuses for fused switches, unless indicated otherwise. Provide horsepower rated for switches serving as the motor-disconnect means. Provide switches in NEMA 1 3R, enclosure as indicated per NEMA ICS 6.

2.10 FUSES

NEMA FU 1. Provide complete set of fuses for each fusible switch. Coordinate time-current characteristics curves of fuses serving motors or connected in series with circuit breakers or other circuit protective devices for proper operation. Submit coordination data for approval. Provide fuses with a voltage rating not less than circuit voltage.

2.10.1 Fuseholders

Provide in accordance with UL 4248-1.

2.10.2 Cartridge Fuses, Current Limiting Type (Class R)

UL 248-12, Class RK-1. Provide only Class R associated fuseholders in accordance with UL 4248-12.

2.10.3 Cartridge Fuses, High-Interrupting Capacity, Current Limiting Type (Classes J, L, and CC)

UL 248-8, UL 248-10, UL 248-4, Class J for zero to 600 amperes, Class L for 601 to 6,000 amperes, and Class CC for zero to 30 amperes.

2.10.4 Cartridge Fuses, Current Limiting Type (Class T)

UL 248-15, Class T for zero to 1,200 amperes, 300 volts; and zero to 800 amperes, 600 volts.

2.11 RECEPTACLES

Provide the following:

a. UL 498, general purpose specification grade, grounding-type. Residential grade receptacles are not acceptable.

b. Ratings and configurations: as indicated.

c. Bodies: white as per NEMA WD 1.

d. Face and body: thermoplastic supported on a metal mounting strap.

e. Dimensional requirements: per NEMA WD 6.

f. Screw-type, side-wired wiring terminals. Do not use back-stabbed conductor terminals.

g. Grounding pole connected to mounting strap.

h. The receptacle: containing triple-wipe power contacts and double or triple-wipe ground contacts.

2.11.1 Split Duplex Receptacles

Provide separate terminals for each ungrounded pole. One receptacle must be controlled separately.

2.11.2 Weather Resistant Receptacles

Provide receptacles, UL listed for use in "wet locations" with integral GFCI protection. Include cast metal box with gasketed, hinged, lockable and weather resistant while-in-use, polycarbonate, UV resistant/stabilized extra-duty rated hood.

2.11.3 Ground-Fault Circuit Interrupter Receptacles

UL 943, duplex type for mounting in standard outlet box. Provide device capable of detecting current leak when the current to ground is 6 milliamperes or higher, and tripping per requirements of UL 943 for Class A ground-fault circuit interrupter devices. Provide screw-type, side-wired wiring terminals or pre-wired (pigtail) leads.

2.11.4 Dryer Receptacles

NEMA 14-30 configuration, rated 30 amperes, 125/250 volts.

2.11.5 Tamper-Resistant Receptacles

Provide duplex receptacle with mechanical sliding shutters that prevent the insertion of small objects into its contact slots.

2.11.6 Arc-Fault Circuit Interrupter Receptacles

UL 1699, duplex type for mounting in standard outlet box. Provide device capable of detecting series arcing current when the current to ground is 5 amperes or higher, and tripping per requirements of UL 1699.

2.12 PANELBOARDS

Provide panelboards in accordance with the following:

a. UL 67 and UL 50 having a short-circuit current rating as indicated.

b. Panelboards for use as service disconnecting means: additionally conform to UL 869A.

c. Panelboards: circuit breaker-equipped.

d. Designed such that individual breakers can be removed without disturbing adjacent units or without loosening or removing supplemental insulation supplied as means of obtaining clearances as required by UL.

e. "Specific breaker placement" is required in panelboards to match the breaker placement indicated in the panelboard schedule on the design drawings. If it is not possible to match "specific breaker placement" during construction, obtain Government approval prior to device installation.

f. Use of "Subfeed Breakers" is not acceptable.

g. Main breaker: "separately" mounted "above" or "below" branch breakers.

h. Where "space only" is indicated, make provisions for future installation of breakers.

i. Directories: indicate load served by each circuit in panelboard.

j. Directories: indicate source of service to panelboard (e.g., Panel PA served from Panel MDP).

k. Provide new directories for existing panels modified by this project as indicated.

l. Type directories and mount in holder behind transparent protective covering.

m. Panelboards: listed and labeled for their intended use.

n. Panelboard nameplates: provided in accordance with paragraph FIELD FABRICATED NAMEPLATES.

2.12.1 Enclosure

Provide panelboard enclosure in accordance with the following:

a. UL 50.

b. Cabinets mounted outdoors or flush-mounted: hot-dipped galvanized after fabrication.

c. Cabinets: painted in accordance with paragraph FIELD APPLIED PAINTING.

d. Outdoor cabinets: NEMA 3R raintight with conduit hubs welded to the cabinet.

e. Front edges of cabinets: form-flanged or fitted with structural shapes welded or riveted to the sheet steel, for supporting the panelboard front.

f. All cabinets: fabricated such that no part of any surface on the finished cabinet deviates from a true plane by more than 1/8 inch.

g. Holes: provided in the back of indoor surface-mounted cabinets, with outside spacers and inside stiffeners, for mounting the cabinets with a 1/2 inch clear space between the back of the cabinet and the wall surface.

h. Flush doors: mounted on hinges that expose only the hinge roll to view when the door is closed.

i. Each door: fitted with a combined catch and lock latch.

j. Keys: two provided with each lock, with all locks keyed alike.

k. Finished-head cap screws: provided for mounting the panelboard fronts on the cabinets.

2.12.2 Panelboard Buses

Support bus bars on bases independent of circuit breakers. Design main buses and back pans so that breakers may be changed without machining, drilling, or tapping. Provide isolated neutral bus in each panel for connection of circuit neutral conductors. Provide separate ground bus identified as equipment grounding bus per UL 67 for connecting grounding conductors; bond to steel cabinet.

2.12.2.1 Panelboard Neutrals for Non-Linear Loads

Provide in accordance with the following:.

a. UL listed, with panelboard type specifically UL heat rise tested for use on non-linear loads.

b. Panelboard: heat rise tested in accordance with UL 67, except with the neutral assembly installed and carrying 200 percent of the phase bus current during testing.

c. Verification of the testing procedure: provided upon request.

d. Two neutral assemblies paralleled together with cable is not acceptable.

e. Nameplates for panelboard rated for use on non-linear loads: marked "SUITABLE FOR NON-LINEAR LOADS" and in accordance with paragraph FIELD FABRICATED NAMEPLATES.

f. Provide a neutral label with instructions for wiring the neutral of panelboards rated for use on non-linear loads.

2.12.3 Circuit Breakers

UL 489, thermal magnetic-type having a minimum short-circuit current rating equal to the short-circuit current rating of the panelboard in which the circuit breaker will be mounted. Breaker terminals: UL listed as suitable for type of conductor provided. Series rated circuit breakers and plug-in circuit breakers that do not use a retaining bolt are unacceptable.

2.12.3.1 Multipole Breakers

Provide common trip-type with single operating handle. Design breaker such that overload in one pole automatically causes all poles to open. Maintain phase sequence throughout each panel so that any three adjacent breaker poles are connected to Phases A, B, and C, respectively.

2.12.3.2 Circuit Breaker With Ground-Fault Circuit Interrupter

UL 943 and NFPA 70. Provide with auto-monitoring (self-test) and lockout features, "push-to-test" button, visible indication of tripped condition, and ability to detect and trip when current imbalance is 6 milliamperes or higher per requirements of UL 943 for Class A ground-fault circuit interrupter devices.

2.12.3.3 Arc-Fault Circuit Interrupters

UL 489, UL 1699 and NFPA 70. Molded case circuit breakers: rated as indicated. Provide with "push-to-test" button.

2.12.3.4 LSIG Type Circuit Breakers

Provide circuit breaker rated for the appropriate current and voltage level as indicated by the system design and a short circuit current capacity as indicated for the system's fault levels. The circuit breaker must have a reliable operating mechanism for manual and automatic operation. Provide circuit breaker with a suitable enclosure for the installation environment (e.g., indoor, outdoor, hazardous locations) and be suitable for the specified environmental conditions (e.g., temperature, humidity, altitude).

2.12.3.4.1 Long-Time Protection (L)

Provide adjustable long-time current protection with a time delay measured in seconds to safeguard against sustained, moderate levels of overcurrent.

2.12.3.4.2 Short-Time Protection (S)

Provide adjustable short-time current protection with a time delay measured in seconds to respond to temporary overcurrent conditions.

2.12.3.4.3 Instantaneous Protection (I)

Provide adjustable instantaneous current protection with no intentional delay to interrupt severe short circuits.

2.12.3.4.4 Ground Fault Protection (G)

Provide ground fault protection with adjustable settings to detect and

interrupt ground fault conditions.

2.13 RESIDENTIAL LOAD CENTERS

Provide residential load centers (RLCs) in accordance with the following:

a. UL 67 and UL 50.

b. RLCs for use as service disconnecting means: additionally conform to UL 869A.

c. Circuit breaker equipped.

d. Designed such that individual breakers can be removed without disturbing adjacent units or without loosening or removing supplemental insulation supplied as means of obtaining clearances as required by UL.

e. Where "space only" is indicated, make provisions for future installation of breakers sized as indicated.

f. Provide load centers with keyed locks.

g. Provide printed directories.

2.13.1 RLC Buses

Support bus bars on bases independent of circuit breakers. Design main buses and back pans so that breakers may be changed without machining, drilling, or tapping. Provide isolated groundable neutral bus in each panel for connection of circuit neutral conductors. Provide separate ground bus identified as equipment grounding bus per UL 67 for connecting grounding conductors; bond to steel cabinet.

2.13.2 Load Centers For Housing Units

Provide single-phase panelboards for housing units on this project in accordance with the following:

a. Load center type, circuit breaker equipped, conforming to UL 67 and UL 50.

b. Panelboards series short-circuit current rating: 22,000 amperes symmetrical minimum for the main breaker and the branch breakers.

c. Panelboards for use as service disconnecting means: additionally conform to UL 869A.

d. Designed such that individual breakers can be removed without disturbing adjacent units or without loosening or removing supplemental insulation supplied as means of obtaining clearances as required by UL.

e. "Specific breaker placement" is required in panelboards to match the breaker placement indicated in the panelboard schedule on the drawings.

f. Where "space only" is indicated, make provisions for future installation of breakers.

g. Provide cover with latching door.

h. Directories: indicate load served by each circuit in panelboard.

i. Directories: indicate source of service to panelboard (e.g., Panel PA served from panel MDP)

j. Type directories and mount behind in holder with transparent protective covering on inside of panel door.

2.13.2.1 Panelboard Buses

Support bus bars on bases independent of circuit breakers. Design main buses and back pans so that breakers may be changed without machining, drilling, or tapping. Provide copper or aluminum bus bars, either tin plated or silver plated. Provide isolated neutral bus in each panel for connection of circuit neutral conductors. Provide separate ground bus identified as equipment grounding bus per UL 67 for connecting grounding conductors; bond to steel cabinet.

2.13.2.2 Housing Unit Load Center Circuit Breakers

UL 489 thermal magnetic type having a minimum short-circuit current rating equal to the short-circuit current rating of the panelboard in which the circuit breaker will be mounted. Breaker terminals: UL listed as suitable for type of conductor provided. Half-size and tandem breakers are not acceptable. Provide switch duty rated 15 and 20 ampere breakers. Breakers must not require use of panel trim to secure them to the bus.

2.13.2.2.1 Multipole Breakers

Provide common trip-type with single operating handle. Design breaker such that overload in one pole automatically causes all poles to open. Maintain phase sequence throughout each panel so that any two adjacent breaker poles are connected to Phases A and B respectively.

2.13.2.2.2 Arc-Fault Circuit-Interrupters

UL 489, UL 1699 and NFPA 70. Molded case circuit breakers: rated as indicated. Provide with "push-to-test" button.

2.14 TRANSFORMERS

Provide transformers in accordance with the following:

a. NEMA ST 20, general purpose, dry-type, self-cooled, ventilated.

b. Provide transformers in NEMA 1 enclosure.

c. Provide nameplate including, but not limited to, the following information: rated kVA, voltages, impedance, and X/R ratio.

d. d. Taps for transformers 15 kVA and larger: Two 2.5 percent taps Full Capacity Above Nominal (FCAN) and four 2.5 percent taps Full Capacity Below Nominal (FCBN).

e. e. Transformer insulation system:

(1) 220 degrees C insulation system for transformers 15 kVA and greater, with temperature rise not exceeding 115 degrees C under full-rated load in maximum ambient of 40 degrees C.

(2) 180 degrees C insulation for transformers rated 10 kVA and less, with temperature rise not exceeding 80 degrees C under full-rated load in maximum ambient of 40 degrees C.

f. g. Transformer of 115 degrees C temperature rise: capable of carrying continuously 115 percent of nameplate kVA without exceeding insulation rating.

2.14.1 Specified Transformer Efficiency

Transformers, indicated and specified with: 480V primary, 80 degrees C or 115 degrees C temperature rise, kVA ratings of 37.5 to 100 for single phase or 30 to 500 for three phase, energy efficient type. The transformer is not acceptable if the calculated transformer efficiency is less than the efficiency indicated in 10 CFR 431, Subpart K.

2.15 MANUAL MOTOR STARTERS (MOTOR RATED SWITCHES)

Single pole designed for surface mounting with overload protection.

2.16 LOCKOUT REQUIREMENTS

Provide circuit breakers, disconnecting means, and other devices that are electrical energy-isolating capable of being locked out for machines and other equipment to prevent unexpected startup or release of stored energy in accordance with 29 CFR 1910.147, NFPA 70E and 29 CFR 1910.303. Comply with requirements of Division 23, "Heating, Ventilating, and Air Conditioning (HVAC)" for mechanical isolation of machines and other equipment.

2.17 TELECOMMUNICATIONS SYSTEM

Provide system of telecommunications wire-supporting structures (pathway), including: outlet boxes, conduits with pull wires cable trays, and other accessories for telecommunications outlets and pathway as specified herein. Additional telecommunications requirements are specified in Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEM.

2.17.1 Secondary Bonding Busbar

Provide corrosion-resistant grounding busbar suitable for indoor installation. Busbars: plated for reduced contact resistance. If not plated, clean the busbar prior to fastening the conductors to the busbar and apply an anti-oxidant to the contact area to control corrosion and reduce contact resistance. Provide a Primary bonding busbar (PBB) in the telecommunications entrance facility and a Secondary bonding busbar (SBB) in all other telecommunications rooms and equipment rooms. The Primary bonding busbar (PBB) and the Secondary bonding busbar (SBB): sized in accordance with the immediate application requirements and with consideration of future growth. Provide Secondary bonding busbars with the following:

a. Predrilled copper busbar provided with holes for use with standard sized lugs,

b. Minimum dimensions of 0.25 in thick by 4 in wide for the PBB and 2 in wide for SBBs with length as indicated;

c. Listed by a nationally recognized testing laboratory.

2.18 GROUNDING AND BONDING EQUIPMENT

2.18.1 Ground Rods

UL 467. Ground rods: cone pointed copper-clad steel, with minimum diameter of 3/4 inch and minimum length 10 feet. Sectional type rods may be used for rods 20 feet or longer.

2.18.2 Ground Bus

Copper ground bus: provided in the electrical equipment rooms as indicated.

2.19 NAMEPLATES AND SIGNS

2.19.1 Manufacturer's Nameplate

Provide on each item of equipment a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.19.2 Field Fabricated Nameplates

Provide field fabricated nameplates in accordance with the following:

a. ASTM D709.

b. Provide laminated plastic nameplates for each equipment enclosure, relay, switch, and device; as specified or as indicated on the drawings.

c. Each nameplate inscription: identify the function and, when applicable, the position.

d. Nameplates: melamine plastic, 0.125 inch thick, white with black center core.

e. Surface: matte finish. Corners: square. Accurately align lettering and engrave into the core.

f. Minimum size of nameplates: one by 2.5 inches.

g. Lettering size and style: a minimum of 0.25 inch high normal block style.

2.19.3 Warning Signs

Provide warning signs for flash protection in accordance with NFPA 70E and NEMA Z535.4 for switchboards, panelboards, industrial control panels, and motor control centers that are in other than dwelling occupancies and are likely to require examination, adjustment, servicing, or maintenance while energized. Provide field installed signs to warn qualified persons of

potential electric arc flash hazards when warning signs are not provided by the manufacturer. Provide marking that is clearly visible to qualified persons before examination, adjustment, servicing, or maintenance of the equipment.

2.20 FIRESTOPPING MATERIALS

Provide firestopping around electrical penetrations in accordance with Section 07 84 00 FIRESTOPPING.

2.21 METER BASE ONLY

ANSI C12.7. Provide NEMA Type 3R, box-mounted socket, ringless, having jaws compatible with requirements of a class: 200 and Form: 2S self contained watthour meter. Provide gray plastic closing cover and bypass links. Provide manufacturers standard enclosure color unless otherwise indicated.

2.22 SURGE PROTECTIVE DEVICES

Provide parallel type surge protective devices (SPD) which comply with UL 1449 at the service entrance, load centers , panelboards . Provide surge protectors in a NEMA 1 enclosure per NEMA ICS 6. Do not install SPD inside a panelboard or switchboard enclosure. However, SPD may be installed in a separate compartment of a switchgear provided that it is supplied by a dedicated circuit breaker. SPD must have the same short-circuit current rating as the protected equipment and must not be installed at a point of system where the available fault current is in excess of that rating. Use Type 1 or Type 2 SPD and connect on the load side of a dedicated circuit breaker. Submit performance and characteristic curves.

Provide the following modes of protection:

FOR SINGLE PHASE AND THREE PHASE WYE CONNECTED SYSTEMS-

Phase to phase (L-L)

Each phase to neutral (L-N)

Neutral to ground (N-G)

Phase to ground (L-G)

SPDs at the service entrance: provide with a minimum surge current rating of 80,000 amperes for L-L mode minimum and 40,000 amperes for other modes (L-N, L-G, and N-G) and downstream SPDs rated 40,000 amperes for L-L mode minimum and 20,000 amperes for other modes (L-N, L-G, and N-G).

Provide SPDs per NFPA 780 for the lightning protection system.

Maximum L-N, and N-G Voltage Protection Rating:

700V for 208Y/120V, three phase system

1,200V for 480Y/277V, three phase system

Maximum L-G Protection Rating:

700V for 208Y/120V, three phase system

1,200V for 480Y/277V, three phase system

Maximum L-L Voltage Protection Rating:

1,200V for 208Y/120V, three phase system

1,800V for 480Y/277V, three phase system

The minimum MCOV (Maximum Continuous Operating Voltage) rating for L-N and L-G modes of operation: 120 percent of nominal voltage for 240 volts and below; 115 percent of nominal voltage above 240 volts to 480 volts.

Provide EMI/RFI filtering per UL 1283 for each mode with the capability to attenuate high frequency noise. Minimum attenuation: 20db.

2.22.1 Warranty

Provide not less than a 5-year warranty and include unlimited free replacements of the unit if destroyed by lightning or other transients during the warranty period.

2.23 FACTORY APPLIED FINISH

Provide factory-applied finish on electrical equipment in accordance with the following:

a. NEMA 250 corrosion-resistance test and the additional requirements as specified herein.

b. Interior and exterior steel surfaces of equipment enclosures: thoroughly cleaned followed by a rust-inhibitive phosphatizing or equivalent treatment prior to painting.

c. Exterior surfaces: free from holes, seams, dents, weld marks, loose scale or other imperfections.

d. Interior surfaces: receive not less than one coat of corrosion-resisting paint in accordance with the manufacturer's standard practice.

e. Exterior surfaces: primed, filled where necessary, and given not less than two coats baked enamel with semigloss finish.

f. Equipment located indoors: ANSI Light Gray, and equipment located outdoors: ANSI Light Gray.

g. Provide manufacturer's coatings for touch-up work and as specified in paragraph FIELD APPLIED PAINTING.

2.24 SOURCE QUALITY CONTROL

2.24.1 Transformer Factory Tests

Submittal: include routine NEMA ST 20 transformer test results on each transformer and also provide the results of NEMA "design" and "prototype" tests that were made on transformers electrically and mechanically equal to those specified.

2.25 COORDINATED POWER SYSTEM PROTECTION

Prepare analyses as specified in Section 26 05 73 POWER SYSTEM STUDIES.

PART 3 EXECUTION

3.1 INSTALLATION

Electrical installations, including weatherproof and hazardous locations and ducts, plenums and other air-handling spaces: conform to requirements of NFPA 70 and to requirements specified herein.

3.1.1 Underground Service

Underground service conductors and associated conduit: continuous from service entrance equipment to outdoor power system connection.

3.1.2 Service Entrance Identification

Service entrance disconnect devices, switches, and enclosures: labeled and identified as such.

3.1.2.1 Labels

Wherever work results in service entrance disconnect devices in more than one enclosure, as permitted by NFPA 70, label each enclosure, new and existing, as one of several enclosures containing service entrance disconnect devices. Label, at minimum: indicate number of service disconnect devices housed by enclosure and indicate total number of enclosures that contain service disconnect devices. Provide laminated plastic labels conforming to paragraph FIELD FABRICATED NAMEPLATES. Use lettering of at least 0.25 inch in height, and engrave on black-on-white matte finish. Service entrance disconnect devices in more than one enclosure: provided only as permitted by NFPA 70.

3.1.3 Wiring Methods

Provide insulated conductors installed in rigid steel conduit, IMC, rigid nonmetallic conduit, or EMT, except where specifically indicated or specified otherwise or required by NFPA 70 to be installed otherwise. Grounding conductor: separate from electrical system neutral conductor. Provide insulated green equipment grounding conductor for circuit(s) installed in conduit and raceways. Minimum conduit size: 1/2 inch in diameter for low voltage lighting and power circuits. Vertical distribution in multiple story buildings: made with metal conduit in fire-rated shafts, with metal conduit extending through shafts for minimum distance of 6 inches. Firestop conduit which penetrates fire-rated walls, fire-rated partitions, or fire-rated floors in accordance with Section 07 84 00 FIRESTOPPING.

3.1.3.1 Pull Wire

Install pull wires in empty conduits. Pull wire: plastic having minimum 200-pound force tensile strength. Leave minimum 36 inches of slack at each end of pull wire.

3.1.3.2 Metal-Clad Cable

Install in accordance with NFPA 70, Type MC cable. MC Cable is also allowed for branch circuits in the following locations:

a. New construction in exposed locations.

b. Renovations in exposed locations.

c. Concealed in renovations in existing areas where walls and ceilings are not disturbed.

d. Cable trays.

MC Cable is prohibited in the following locations:

a. Feeder circuits other than feeder circuits for aerial messengers between buildings.

b. Embedded or direct buried locations.

c. Concealed locations, except as allowed above.

3.1.4 Conduit Installation

Unless indicated otherwise, conceal conduit under floor slabs and within finished walls, ceilings, and floors. Keep conduit minimum 6 inches away from parallel runs of flues and steam or hot water pipes. Install conduit parallel with or at right angles to ceilings, walls, and structural members where located above accessible ceilings and where conduit will be visible after completion of project. Run conduits under floor slab as if exposed.

3.1.4.1 Restrictions Applicable to EMT

a. Do not install underground.

b. Do not encase in concrete, mortar, grout, or other cementitious materials.

c. Do not use in areas subject to physical damage including but not limited to equipment rooms where moving or replacing equipment could physically damage the EMT.

d. Do not use in hazardous areas.

e. Do not use outdoors.

f. Do not use in fire pump rooms.

g. Do not use when the enclosed conductors must be shielded from the effects of High-altitude Electromagnetic Pulse (HEMP).

3.1.4.2 Restrictions Applicable to Nonmetallic Conduit

a. PVC Schedule 40.

(1) Do not use where subject to physical damage, including but not limited to, mechanical equipment rooms, electrical equipment

rooms, fire pump rooms, and where restrictions are applying to both PVC Schedule 40 and PVC Schedule 80.

(2) Do not use above grade, except where allowed in this section for rising through floor slab or indicated otherwise.

b. PVC Schedule 80.

(1) Do not use where subject to physical damage, including but not limited to, hospitals, power plant, missile magazines, and other such areas.

(2) Do not use in hazardous (classified) areas.

(3) Do not use in penetrating fire-rated walls or partitions, or fire-rated floors.

-

3.1.4.3 Restrictions Applicable to Flexible Conduit

Use only as specified in paragraph FLEXIBLE CONNECTIONS. Do not use when the enclosed conductors must be shielded from the effects of High-altitude Electromagnetic Pulse (HEMP).

3.1.4.4 Underground Conduit

Plastic-coated rigid steel; plastic-coated steel IMC; PVC, Type EPC-40; or fiberglass. Convert nonmetallic conduit, other than PVC Schedule 40 or 80, to plastic-coated rigid, or IMC, steel conduit before rising through floor slab. Plastic coating: extend minimum 6 inches above floor.

3.1.4.5 Conduit Installed Under Floor Slabs

Conduit run under floor slab: located a minimum of 12 inches below the vapor barrier. Seal around conduits at penetrations thru vapor barrier. Use NECA NEIS 1 Table 2a (Minimum Raceway Spacing) to determine under floor slab conduit spacing unless greater spacing is required elsewhere in this section.

3.1.4.6 Conduit Through Floor Slabs

Where conduits rise through floor slabs, do not allow curved portion of bends to be visible above finished slab. Where conduit rises through slab-on grade, seal all electrical penetrations to address radon mitigation and prevent infiltration of air, insects, and vermin.

3.1.4.7 Conduit Installed in Concrete Floor Slabs or Concrete Walls

Rigid steel; steel IMC; fiberglass, or PVC, Type EPC-40.Locate so as not to adversely affect structural strength of slabs. Install conduit within middle one-third of concrete slab. Do not stack conduits. Space conduits horizontally not closer than three diameters, except at cabinet locations. Curved portions of bends must not be visible above finish slab. Increase slab thickness as necessary to provide minimum one inch cover over conduit. Where embedded conduits cross building expansion joints, provide suitable watertight expansion/deflection fittings and bonding jumpers. Expansion/deflection fittings must allow horizontal and vertical movement of raceway. Conduit larger than one inch trade size: installed parallel with or at right angles to main reinforcement; when at right angles to reinforcement, install conduit close to one of supports of

slab. Where nonmetallic conduit is used, convert raceway to plastic coated rigid steel or plastic coated steel IMC before rising above floor, unless specifically indicated.

3.1.4.8 Stub-Ups

Provide conduits stubbed up through concrete floor for connection to free-standing equipment with adjustable top or coupling threaded inside for plugs, set flush with finished floor. Extend conductors to equipment in rigid steel conduit, except that flexible metal conduit may be used 6 inches above floor. Where no equipment connections are made, install screwdriver-operated threaded flush plugs in conduit end.

3.1.4.9 Conduit Support

Support conduit by pipe straps, wall brackets, threaded rod conduit hangers, or ceiling trapeze. Plastic cable ties are not acceptable. Fasten by wood screws to wood; by toggle bolts on hollow masonry units; by concrete inserts or expansion bolts on concrete or brick; and by machine screws, welded threaded studs, or spring-tension clamps on steel work. Threaded C-clamps may be used on rigid steel conduit only. Do not weld conduits or pipe straps to steel structures. Do not exceed one-fourth proof test load for load applied to fasteners. Provide vibration resistant and shock-resistant fasteners attached to concrete ceiling. Do not cut main reinforcing bars for any holes cut to depth of more than 1 1/2 inches in reinforced concrete beams or to depth of more than 3/4 inch in concrete joints. Fill unused holes. In partitions of light steel construction, use sheet metal screws. In suspended-ceiling construction, run conduit above ceiling. Do not support conduit by ceiling support system. Conduit and box systems: supported independently of both (a) tie wires supporting ceiling grid system, and (b) ceiling grid system into which ceiling panels are placed. Do not share supporting means between electrical raceways and mechanical piping or ducts. Identify independent conduit support in both fire and non-fire rated assemblies per NFPA 70. Coordinate installation with above-ceiling mechanical systems to assure maximum accessibility to all systems. Spring-steel fasteners may be used for lighting branch circuit conduit supports in suspended ceilings in dry locations. Where conduit crosses building expansion joints, provide suitable watertight expansion fitting that maintains conduit electrical continuity by bonding jumpers or other means. For conduits greater than 2 1/2 inches inside diameter, provide supports to resist forces of 0.5 times the equipment weight in any direction and 1.5 times the equipment weight in the downward direction.

3.1.4.10 Directional Changes in Conduit Runs

Make changes in direction of runs with symmetrical bends or cast-metal fittings. Make field-made bends and offsets with hickey or conduit-bending machine. Do not install crushed or deformed conduits. Avoid trapped conduits. Prevent plaster, dirt, or trash from lodging in conduits, boxes, fittings, and equipment during construction. Free clogged conduits of obstructions.

3.1.4.11 Locknuts and Bushings

Fasten conduits to sheet metal boxes and cabinets with two locknuts where required by NFPA 70, where insulated bushings are used, and where bushings cannot be brought into firm contact with the box; otherwise, use at least minimum single locknut and bushing. Provide locknuts with sharp edges for

digging into wall of metal enclosures. Install bushings on ends of conduits, and provide insulating type where required by NFPA 70.

3.1.4.12 Flexible Connections

Provide flexible steel conduit between 3 and 6 feet in length for recessed and semirecessed lighting fixtures; for equipment subject to vibration, noise transmission, or movement; and for motors. Install flexible conduit to allow 20 percent slack. Minimum flexible steel conduit size: 1/2 inch diameter. Provide liquid tight flexible conduit in wet and damp locations for equipment subject to vibration, noise transmission, movement or motors. Provide separate ground conductor across flexible connections. Plastic cable ties are not acceptable as a support method.

3.1.5 Cable Tray Installation

Install and ground in accordance with NFPA 70. Install cable trays parallel with or at right angles to ceilings, walls, and structural members. Cable tray and tray supports must not partially nor completely obstruct access to the room. Support in accordance with NEMA VE 1 and with manufacturer recommendations but at not more than 6 foot intervals. Coat contact surfaces of aluminum connections with an antioxidant compound prior to assembly. Adjacent cable tray sections: bonded together by connector plates of an identical type as the cable tray sections. For grounding of cable tray system provide No. 2 AWG bare copper wire throughout cable tray system, and bond to each section, except use No. 1/0 AWG aluminum wire if cable tray is aluminum. Terminate cable trays 10 inches from both sides of smoke and fire partitions. Install conductors run through smoke and fire partitions in 4 inch rigid steel conduits with grounding bushings, extending 12 inches beyond each side of partitions. Seal conduit on both ends to maintain smoke and fire ratings of partitions. Firestop penetrations in accordance with Section 07 84 00, FIRESTOPPING. Provide supports to resist forces of 0.5 times the equipment weight in any direction and 1.5 times the equipment weight in the downward direction.

3.1.6 Boxes, Outlets, and Supports

Provide boxes in wiring and raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures. Boxes for metallic raceways: cast-metal, hub-type when located in wet locations, when surface mounted on outside of exterior surfaces, when surface mounted on interior walls exposed up to 7 feet above floors and walkways, and when specifically indicated. Boxes in other locations: sheet steel, except that aluminum boxes may be used with aluminum conduit, and nonmetallic boxes may be used with nonmetallic conduit system. Provide each box with volume required by NFPA 70 for number of conductors enclosed in box. Boxes for mounting lighting fixtures: minimum 4 inches square, or octagonal, except that smaller boxes may be installed as required by fixture configurations, as approved. Boxes for use in masonry-block or tile walls: square-cornered, tile-type, or standard boxes having square-cornered, tile-type covers. Provide gaskets for cast-metal boxes installed in wet locations and boxes installed flush with outside of exterior surfaces. Provide separate boxes for flush or recessed fixtures when required by fixture terminal operating temperature; provide readily removable fixtures for access to boxes unless ceiling access panels are provided. Support boxes and pendants for surface-mounted fixtures on suspended ceilings independently of ceiling supports. Fasten boxes and supports with wood screws on wood, with bolts

and expansion shields on concrete or brick, with toggle bolts on hollow masonry units, and with machine screws or welded studs on steel. In open overhead spaces, cast boxes threaded to raceways need not be separately supported except where used for fixture support; support sheet metal boxes directly from building structure or by bar hangers. Where bar hangers are used, attach bar to raceways on opposite sides of box, and support raceway with approved-type fastener maximum 24 inches from box. When penetrating reinforced concrete members, avoid cutting reinforcing steel.

3.1.6.1 Boxes

Boxes for use with raceway systems: minimum 1 1/2 inches deep, except where shallower boxes required by structural conditions are approved. Boxes for other than lighting fixture outlets: minimum 4 inches square, except that 4 by 2 inch boxes may be used where only one raceway enters outlet.

3.1.6.2 Pull Boxes

Construct of at least minimum size required by NFPA 70 of code-gauge aluminum or galvanized sheet steel, except where cast-metal boxes are required in locations specified herein. Provide boxes with screw-fastened covers. Where several feeders pass through common pull box, tag feeders to indicate clearly electrical characteristics, circuit number, and panel designation.

3.1.6.3 Extension Rings

Extension rings are not permitted for new construction. Use only on existing boxes in concealed conduit systems where wall is furred out for new finish. Extension rings are permitted for ICT and security systems.

3.1.7 Mounting Heights

Mount panelboards, circuit breakers, and disconnecting switches so height of center of grip of the operating handle of the switch or circuit breaker at its highest position is maximum 79 inches above floor or working platform or as allowed in Section 404.8 per NFPA 70. Mount lighting switches 48 inches above finished floor. Mount receptacles and telecommunications outlets 18 inches above finished floor, unless otherwise indicated. Wall-mounted telecommunications outlets: mounted at height indicated. Mount other devices as indicated. Measure mounting heights of receptacle outlet boxes to the bottom of the outlet box.

3.1.8 Conductor Identification

Provide conductor identification within each enclosure where tap, splice, or termination is made. For conductors No. 6 AWG and smaller diameter, provide color coding by factory-applied, color-impregnated insulation. For conductors No. 4 AWG and larger diameter, provide color coding by plastic-coated, self-sticking markers; colored nylon cable ties and plates; or heat shrink-type sleeves. Identify control circuit terminations in accordance with manufacturer's recommendations. Provide telecommunications system conductor identification as specified in Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEMS.

3.1.9 Splices

Make splices in accessible locations. Make splices in conductors No. 10

AWG and smaller diameter with insulated, pressure-type connector. Make splices in conductors No. 8 AWG and larger diameter with solderless connector, and cover with insulation material equivalent to conductor insulation.

3.1.10 Covers and Device Plates

Install with edges in continuous contact with finished wall surfaces without use of mats or similar devices. Plaster fillings are not permitted. Install plates with alignment tolerance of 1/16 inch. Use of sectional-type device plates are not permitted. Provide gasket for plates installed in wet locations.

3.1.10.1 Circuit Identification

Indicate the electrical source(s) for the conductors supplying the receptacles and light switches at a given cover/device plate using a 'Panel-Circuit Number' naming convention (e.g., L1-23 for a circuit supplied from Panel L1, Pole Number 23). Labels must be black on a white field. Labels must be digitally printed; handwritten lables are unacceptable. Stenciled lettering must be provided using laser printer .

3.1.11 Electrical Penetrations

Seal openings around electrical penetrations through fire resistance-rated walls, partitions, floors, or ceilings in accordance with Section 07 84 00 FIRESTOPPING.

3.1.12 Grounding and Bonding

Provide in accordance with NFPA 70 and NFPA 780. Ground exposed, non-current-carrying metallic parts of electrical equipment, metallic raceway systems, grounding conductor in metallic and nonmetallic raceways, telecommunications system grounds, and neutral conductor of wiring systems. Make ground connection at main service equipment, and extend grounding conductor to point of entrance of metallic water service. Make connection to water pipe by suitable ground clamp or lug connection to plugged tee. If flanged pipes are encountered, make connection with lug bolted to street side of flanged connection. Supplement metallic water service grounding system with additional made electrode in compliance with NFPA 70. Interconnect all grounding media in or on the structure to provide a common ground potential. This includes lightning protection, electrical service, telecommunications system grounds, as well as underground metallic piping systems. Make interconnection to the gas line on the customer's side of the meter. Use main size lightning conductors for interconnecting these grounding systems to the lightning protection system. Where ground fault protection is employed, ensure that connection of ground and neutral does not interfere with correct operation of fault protection.

3.1.12.1 Ground Rods

Provide ground rods and measure the resistance to ground using the fall-of-potential method described in IEEE 81. Do not exceed 25 ohms under normally dry conditions for the maximum resistance of a driven ground. If this resistance cannot be obtained, provide 2 additional rods, spaced on center. Spacing for additional rods must be a minimum of 10 feet. If the resultant resistance exceeds 25 ohms measured not less than 48 hours after rainfall, notify the Contracting Officer who will decide on

the number of ground rods to add.

3.1.12.2 Grounding Connections

Make grounding connections which are buried or otherwise normally inaccessible, excepting specifically those connections for which access for periodic testing is required, by exothermic weld or high compression connector.

a. Make exothermic welds strictly in accordance with the weld manufacturer's written recommendations. Welds which are "puffed up" or which show convex surfaces indicating improper cleaning are not acceptable. Mechanical connectors are not required at exothermic welds.

b. Make high compression connections using a hydraulic or electric compression tool to provide the correct circumferential pressure. Provide tools and dies as recommended by the manufacturer. Use an embossing die code or other standard method to provide visible indication that a connector has been adequately compressed on the ground wire.

3.1.12.3 Ground Bus

Provide a copper ground bus in the electrical equipment rooms as indicated. Noncurrent-carrying metal parts of transformer neutrals and other electrical equipment: effectively grounded by bonding to the ground bus. Bond the ground bus to both the entrance ground, and to a ground rod or rods as specified above having the upper ends terminating approximately 4 inches above the floor. Make connections and splices of the brazed, welded, bolted, or pressure-connector type, except use pressure connectors or bolted connections for connections to removable equipment.

3.1.12.4 Resistance

Maximum resistance-to-ground of grounding system: do not exceed 5 ohms under dry conditions. Where resistance obtained exceeds 5 ohms, contact Contracting Officer for further instructions.

3.1.13 Equipment Connections

Provide power wiring and connections to motors and equipment. Except as otherwise specifically noted or specified, automatic control wiring, control devices, and protective devices within the control circuitry are not included in this section of the specifications and are provided under the section specifying the associated equipment.

3.1.14 Government-Furnished Equipment

Contractor make connections to Government-furnished equipment to make equipment operate as intended, including providing miscellaneous items such as plugs, receptacles, wire, cable, conduit, flexible conduit, and outlet boxes or fittings.

3.1.15 Repair of Existing Work

Perform repair of existing work, demolition, and modification of existing electrical distribution systems as follows:

3.1.15.1 Workmanship

Lay out work in advance. Exercise care where cutting, channeling, chasing, or drilling of floors, walls, partitions, ceilings, or other surfaces is necessary for proper installation, support, or anchorage of conduit, raceways, or other electrical work. Repair damage to buildings, piping, and equipment using skilled craftsmen of trades involved.

3.1.15.2 Existing Concealed Wiring to be Removed

Disconnect existing concealed wiring to be removed from its source. Remove conductors; cut conduit flush with floor, underside of floor, and through walls; and seal openings.

3.1.15.3 Removal of Existing Electrical Distribution System

Removal of existing electrical distribution system equipment includes equipment's associated wiring, including conductors, cables, exposed conduit, surface metal raceways, boxes, and fittings, back to equipment's power source as indicated.

3.1.15.4 Continuation of Service

Maintain continuity of existing circuits of equipment to remain. Maintain existing circuits of equipment energized. Restore circuits wiring and power which are to remain but were disturbed during demolition back to original condition.

3.1.16 Surge Protective Devices

Connect the surge protective devices in parallel to the power source, keeping the conductors as short and straight as practically possible. Maximum allowed lead length is 3 feet avoiding 90 degree bends. Do not locate surge protective devices inside a panelboard or switchboard enclosure.

3.2 FIELD FABRICATED NAMEPLATE MOUNTING

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets. Provide nameplate on all equipment in access controlled spaces and areas.

3.3 WARNING SIGN MOUNTING

Provide the number of signs required to be readable from each accessible side. Space the signs in accordance with NFPA 70E.

3.4 FIELD APPLIED PAINTING

Paint electrical equipment as required to match finish of adjacent surfaces or to meet the indicated or specified safety criteria.

3.5 FIELD QUALITY CONTROL

Furnish test equipment and personnel and submit written copies of test results. Give Contracting Officer 5 working days notice prior to each test. Where applicable, test electrical equipment in accordance with NETA ATS.

3.5.1 Devices Subject to Manual Operation

Operate each device subject to manual operation at least five times, demonstrating satisfactory operation each time.

3.5.2 600-Volt Wiring Test

Test wiring rated 600 volt and less to verify that no short circuits or accidental grounds exist. Perform insulation resistance tests on wiring No. 6 AWG and larger diameter using instrument which applies voltage of 1,000 volts DC for 600 volt rated wiring and 500 volts DC for 300 volt rated wiring per NETA ATS to provide direct reading of resistance. All existing wiring to be reused must also be tested.

3.5.3 Transformer Tests

Perform the standard tests in accordance with the Inspection and Test Procedures for transformers, dry type, air-cooled, 600 volt and below; as specified in NETA ATS. Measure primary and secondary voltages for proper tap settings. Tests need not be performed by a recognized independent testing firm or independent electrical consulting firm.

3.5.4 Ground-Fault Receptacle Test

Test ground-fault receptacles with a "load" (such as a plug in light) to verify that the "line" and "load" leads are not reversed. Press the TEST button and then the RESET button to verify by LED status that the device is a self-test model as specified in UL 943.

3.5.5 Arc-Fault Receptacle Test

Test arc-fault receptacles with a "load" (such as a plug in light) to verify that the "line" and "load" leads are not reversed. Press the TEST button and then the RESET button to verify by LED status that the device is a self-test model as specified in UL 1699.

3.5.6 Grounding System Test

Test grounding system to ensure continuity, and that resistance to ground is not excessive. Test each ground rod for resistance to ground before making connections to rod; tie grounding system together and test for resistance to ground. Make resistance measurements in dry weather, not earlier than 48 hours after rainfall. Submit written results of each test to Contracting Officer, and indicate location of rods as well as resistance and soil conditions at time measurements were made.

3.5.7 Phase Rotation Test

Perform phase rotation test to ensure proper rotation of service power prior to operation of new or reinstalled equipment using a phase rotation meter. Follow the meter manual directions performing the test.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 24 13

SWITCHBOARDS
08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM D709	(2017) Standard Specification for Laminated Thermosetting Materials
ASTM D1535	(2014; R 2018) Standard Practice for Specifying Color by the Munsell System

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 81	(2012) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
IEEE C2	(2023) National Electrical Safety Code
IEEE C57.12.28	(2023) Standard for Pad-Mounted Equipment - Enclosure Integrity

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI/NEMA PB 2.1	(2013) General Instructions for Proper Handling, Installation, Operation and

	Maintenance of Deadfront Distribution Switchboards Rated 600 V or Less
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA PB 2	(2011) Deadfront Distribution Switchboards

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

UL SOLUTIONS (UL)

UL 467	(2022) UL Standard for Safety Grounding and Bonding Equipment
UL 489	(2025) UL Standard for Safety Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures
UL 891	(2019) UL Standard for Safety Switchboards

1.2 RELATED REQUIREMENTS

Section 26 08 00 APPARATUS INSPECTION AND TESTING applies to this section, with the additions and modifications specified herein.

1.3 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, are as defined in IEEE 100.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval.Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Switchboard Drawings; G

SD-03 Product Data

Switchboard; G

SD-06 Test Reports

Switchboard Design Tests; G

Switchboard Production Tests; G

Acceptance Checks and Tests; G

SD-10 Operation and Maintenance Data

Switchboard Operation and Maintenance, Data Package 5; G

SD-11 Closeout Submittals

Assembled Operation and Maintenance Manuals; G

Equipment Test Schedule; G

Required Settings; G

Service Entrance Available Fault Current Label; G

1.5 QUALITY ASSURANCE

1.5.1 Product Data

Include manufacturer's information on each submittal for each component, device and accessory provided with the switchboard including:

a. Circuit breaker type, interrupting rating, and trip devices, including available settings.

b. Manufacturer's instruction manuals and published time-current curves (in electronic format) of the main secondary breaker and largest secondary feeder device.

1.5.2 Switchboard Drawings

Include wiring diagrams and installation details of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork, and other items that must be shown to ensure a coordinated installation. Identify circuit terminals on wiring diagrams and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment. Indicate on the drawings adequate clearance for operation, maintenance, and replacement of operating equipment devices. Include the nameplate data, size, and capacity on submittal. Also include applicable federal, military, industry, and technical society publication references on submittals. Include the following:

a. One-line diagram including breakers.

b. Outline drawings including front elevation, section views, footprint, and overall dimensions.

c. Bus configuration including dimensions and ampere ratings of bus bars.

d. Markings and NEMA nameplate data.

e. Circuit breaker type, interrupting rating, and trip devices, including available settings.

f. Wiring diagrams and elementary diagrams with terminals identified, and indicating prewired interconnections between items of equipment and

the interconnection between the items.

g. Manufacturer's instruction manuals and published time-current curves (in electronic format) of the main secondary breaker and largest secondary feeder device. Use this information (designer of record) to provide breaker settings that ensures protection and coordination are achieved. For Navy installations, provide electronic format curves using SKM's Power Tools for Windows device library electronic format or EasyPower device library format depending on installation modeling software requirements.

1.5.3 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" or "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Provide equipment, materials, installation, and workmanship in accordance with the mandatory and advisory provisions of NFPA 70 unless more stringent requirements are specified or indicated.

1.5.4 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship, and:

a. Have been in satisfactory commercial or industrial use for 2 years prior to bid opening including applications of equipment and materials under similar circumstances and of similar size.

b. Have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period.

c. Where two or more items of the same class of equipment are required, provide products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.4.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.4.2 Material and Equipment Manufacturing Date

Products manufactured more than one year prior to date of delivery to site are not acceptable.

1.6 MAINTENANCE

1.6.1 Switchboard Operation and Maintenance Data

Submit Operation and Maintenance Manuals in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

1.6.2 Assembled Operation and Maintenance Manuals

Assemble and securely bind manuals in durable, hard covered, water resistant binders. Assemble and index the manuals in the following order with a table of contents:

a. Manufacturer's O&M information required by the paragraph SD-10, OPERATION AND MAINTENANCE DATA.

b. Catalog data required by the paragraph SD-03, PRODUCT DATA.

c. Drawings required by the paragraph SD-02, SHOP DRAWINGS.

d. Prices for spare parts and supply list.

f. Design test reports.

g. Production test reports.

1.7 WARRANTY

Provide equipment items that are supported by service organizations reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

PART 2 PRODUCTS

2.1 PRODUCT COORDINATION

Products and materials not considered to be switchboards and related accessories are specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION, and Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

2.2 SWITCHBOARD

NEMA PB 2 and UL 891.

2.2.1 Ratings

Provide equipment with the following ratings:

a. Voltage rating: 208Y/120 volts AC, three-phase, 4-wireas indicated.

b. Continuous current rating of the main bus: as indicated.

c. Short-circuit current rating: as indicated.

d. UL listed and labeled as service entrance equipment.

2.2.2 Construction

Provide the following:

a. Switchboard: consisting of one or more vertical sections bolted together to form a rigid assembly and rearfront and rear aligned.

b. All circuit breakers: front accessible.

c. Rear aligned switchboards: front accessible load connections.

d. Front and rear aligned switchboards: rear accessible load connections.

e. Where indicated, "space for future" or "space" means to include a vertical bus provided behind a blank front cover. Where indicated, "provision for future" means full hardware provided to mount a breaker suitable for the location.

f. Completely factory engineered and assembled, including protective devices and equipment indicated with necessary interconnections, instrumentation, and control wiring.

2.2.2.1 Enclosure

Provide the following:

a. Enclosure: NEMA ICS 6 Type 1.

b. Enclosure: bolted together with removable bolt-on side and rear covers.

c. Front doors: provided with padlockable vault handles with a three point catch.

d. Bases, frames and channels of enclosure: corrosion resistant and fabricated of galvanized steel. Separate sections using vertical steel barriers.

e. Base: includes any part of enclosure that is within 3 inches of concrete pad.

f. Galvanized steel: ASTM A123/A123M, ASTM A653/A653M G90 coating, and ASTM A153/A153M, as applicable. Galvanize after fabrication where practicable.

g. Paint color: ASTM D1535 light gray No. 61 or No. 49 over rust inhibitor.

h. Paint coating system: comply with IEEE C57.12.28 for galvanized steel.

2.2.2.2 Bus Bars

Provide the following:

a. Bus bars: copper with silver-plated contact surfaces.

(1) Phase bus bars: uninsulated.

(2) Neutral bus: rated 100 percent of the main bus continuous current rating as indicated.

b. Make bus connections and joints with hardened steel bolts.

c. Main-bus (through bus): rated at the full ampacity of the main throughout the switchboard.

d. Minimum one-quarter by 2 inch copper ground bus secured to each vertical section along the entire length of the switchboard.

2.2.2.3 Main Section

Provide the main section consisting ofa combination section with molded-case circuit breakers for the main and branch devices as indicated.

2.2.2.4 Distribution Sections

Provide the distribution sections consisting of molded-case circuit breakers as indicated.

2.2.3 Protective Device

Provide main and branch protective devices as indicated.

2.2.3.1 Insulated-Case Breaker

Provide the following:

a. UL 489. UL listed and labeled, 100 percent rated main breaker standard rated branch breakers, manually operated, low voltage, insulated-case circuit breaker, with a short-circuit current rating as indicated

b. Breaker frame size: as indicated.

c. Series rated circuit breakers are unacceptable.

2.2.3.2 Molded-Case Circuit Breaker

Provide the following:

a. UL 489. UL listed and labeled, 100 percent rated main breaker standard rated branch breakers, manually operated, low voltage molded-case circuit breaker, with a short-circuit current rating of as indicated

b. Breaker frame size: as indicated.

c. Series rated circuit breakers are unacceptable.

2.2.4 Terminal Boards

Provide with engraved plastic terminal strips and screw type terminals for external wiring between components and for internal wiring between removable assemblies. Provide short-circuiting type terminal boards associated with current transformer. Terminate conductors for current transformers with ring-tongue lugs. Provide terminal board identification that is identical in similar units. Provide color coded external wiring that is color coded consistently for similar terminal boards.

2.2.5 Wire Marking

Mark control and metering conductors at each end. Provide factory installed, white, plastic tubing, heat stamped with black block type letters on factory-installed wiring. On field-installed wiring, provide white, preprinted, polyvinyl chloride (PVC) sleeves, heat stamped with black block type letters. Provide a single letter or number on each sleeve, elliptically shaped to securely grip the wire, and keyed in such a manner to ensure alignment with adjacent sleeves. Provide specific wire

markings using the appropriate combination of individual sleeves. Indicate on each wire marker the device or equipment, including specific terminal number to which the remote end of the wire is attached.

2.3 MANUFACTURER'S NAMEPLATE

Provide a nameplate on each item of equipment bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent is not acceptable. This nameplate and method of attachment may be the manufacturer's standard if it contains the required information.

2.4 FIELD FABRICATED NAMEPLATES

ASTM D709. Provide laminated plastic nameplates for each switchboard, equipment enclosure, relay, switch, and device; as specified in this section or as indicated on the drawings. Identify on each nameplate inscription the function and, when applicable, the position. Provide nameplates of melamine plastic, 0.125 inch thick, white with black center core. Provide matte finish surface. Provide square corners. Accurately align lettering and engrave into the core. Provide nameplates with minimum size of one by 2.5 inches. Provide lettering that is a minimum of 0.25 inch high normal block style.

2.5 SOURCE QUALITY CONTROL

2.5.1 Equipment Test Schedule

The Government reserves the right to witness tests. Provide equipment test schedules for tests to be performed at the manufacturer's test facility. Submit required test schedule and location, and notify the Contracting Officer 30 calendar days before scheduled test date. Notify Contracting Officer 15 calendar days in advance of changes to scheduled date.

Provide the following as part of test equipment calibration:

a. Provide a calibration program which assures that all applicable test instruments are maintained within rated accuracy.

b. Accuracy: Traceable to the National Institute of Standards and Technology.

c. Instrument calibration frequency schedule: less than or equal to 12 months for both test floor instruments and leased specialty equipment.

d. Dated calibration labels: visible on all test equipment.

e. Calibrating standard: higher accuracy than that of the instrument tested.

f. Keep up-to-date records that indicate dates and test results of instruments calibrated or tested. For instruments calibrated by the manufacturer on a routine basis, in lieu of third party calibration, include the following:

   (1) Maintain up-to-date instrument calibration instructions and procedures for each test instrument.

(2) Identify the third party/laboratory calibrated instrument to verify that calibrating standard is met.

2.5.2 Switchboard Design Tests

NEMA PB 2 and UL 891.

2.5.2.1 Design Tests

Furnish documentation showing the results of design tests on a product of the same series and rating as that provided by this specification.

a. Short-circuit current test.

b. Enclosure tests.

c. Dielectric test.

2.5.3 Switchboard Production Tests

NEMA PB 2 and UL 891. Furnish reports which include results of production tests performed on the actual equipment for this project. These tests include:

a. 60-hertz dielectric tests.

b. Mechanical operation tests.

c. Electrical operation and control wiring tests.

d. Ground fault sensing equipment test.

2.6 COORDINATED POWER SYSTEM PROTECTION

Provide a power system study as specified in Section 26 05 73 POWER SYSTEM STUDIES.

2.7 ARC FLASH WARNING LABEL

Provide warning label for switchboards. Locate this self-adhesive warning label on the outside of the enclosure warning of potential electrical arc flash hazards and appropriate PPE required. Provide label format as indicated.

2.8 SERVICE ENTRANCE AVAILABLE FAULT CURRENT LABEL

Provide label on exterior of switchboards used as service equipment listing the maximum available fault current at that location. Include on the label the date that the fault calculation was performed and the contact information for the organization that completed the calculation. Locate this self-adhesive warning label on the outside of the switchboard. Provide label format as indicated.

PART 3 EXECUTION

3.1 INSTALLATION

Conform to IEEE C2, NFPA 70, and to the requirements specified herein. Provide new equipment and materials unless indicated or specified

otherwise.

3.2 GROUNDING

NFPA 70 and IEEE C2, except that grounds and grounding systems with a resistance to solid earth ground not exceeding 25 ohms.

3.2.1 Grounding Electrodes

Provide driven ground rods as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION. Connect ground conductors to the upper end of the ground rods by exothermic weld or compression connector. Provide compression connectors at equipment end of ground conductors.

3.2.2 Equipment Grounding

Provide bare copper cable not smaller than No. 4/0 AWG not less than 24 inches below grade connecting to the indicated ground rods. When work in addition to that indicated or specified is directed to obtain the specified ground resistance, the provision of the contract covering "Changes" applies.

3.2.3 Connections

Make joints in grounding conductors and loops by exothermic weld or compression connector. Install exothermic welds and compression connectors as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

3.2.4 Grounding and Bonding Equipment

UL 467, except as indicated or specified otherwise.

3.3 INSTALLATION OF EQUIPMENT AND ASSEMBLIES

Install and connect equipment furnished under this section as indicated on project drawings, the approved shop drawings, and as specified herein.

3.3.1 Switchboard

ANSI/NEMA PB 2.1.

3.3.2 Field Fabricated Nameplate Mounting

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets.

3.4 FOUNDATION FOR EQUIPMENT AND ASSEMBLIES

3.4.1 Interior Location

Mount switchboard on concrete slab as follows:

a. Unless otherwise indicated, provide the slab with dimensions at least 4 inches thick.

b. Install slab such that the top of the concrete slab is approximately 4 inches above the finished grade.

c. Provide edges above grade 1/2 inch chamfer.

d. Provide slab of adequate size to project at least 8 inches beyond the equipment.

e. Provide conduit turnups and cable entrance space required by the equipment to be mounted.

f. Seal voids around conduit openings in slab with water- and oil-resistant caulking or sealant.

g. Cut off and bush conduits 3 inches above slab surface.

h. Provide concrete work as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE.

3.5 FIELD QUALITY CONTROL

Submit Required Settings of breakers to the Contracting Officer after approval of switchboard and at least 30 days in advance of their requirement.

3.5.1 Performance of Acceptance Checks and Tests

Perform in accordance with the manufacturer's recommendations and include the following visual and mechanical inspections and electrical tests, performed in accordance with NETA ATS.

3.5.1.1 Switchboard Assemblies

a. Visual and Mechanical Inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical, electrical, and mechanical condition.

(3) Verify appropriate anchorage, required area clearances, and correct alignment.

(4) Clean switchboard and verify shipping bracing, loose parts, and documentation shipped inside cubicles have been removed.

(5) Inspect all doors, panels, and sections for paint, dents, scratches, fit, and missing hardware.

(6) Verify that circuit breaker sizes and types correspond to approved shop drawings as well as to the circuit breaker’s address for microprocessor-communication packages.

(8) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(9) Confirm correct operation and sequencing of electrical and mechanical interlock systems.

(10) Confirm correct application of manufacturer's recommended lubricants.

(11) Inspect insulators for evidence of physical damage or contaminated surfaces.

(12) Verify correct barrier installation.

(13) Exercise all active components.

(14) Inspect all mechanical indicating devices for correct operation.

(15) Verify that filters are in place and vents are clear.

(16) Test operation, alignment, and penetration of instrument transformer withdrawal disconnects.

(17) Inspect control power transformers.

b. Electrical Tests

(1) Perform insulation-resistance tests on each bus section.

(2) Perform dielectric withstand voltage tests.

(3) Perform insulation-resistance test on control wiring; Do not perform this test on wiring connected to solid-state components.

(4) Perform control wiring performance test.

(5) Perform primary current injection tests on the entire current circuit in each section of assembly.

3.5.1.2 Circuit Breakers - Low Voltage - Power

a. Visual and Mechanical Inspection

(1) Compare nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition.

(3) Inspect anchorage, alignment, and grounding.

(4) Verify that all maintenance devices are available for servicing and operating the breaker.

(5) Inspect arc chutes.

(6) Inspect moving and stationary contacts for condition, wear, and alignment.

(7) Verify that primary and secondary contact wipe and other dimensions vital to satisfactory operation of the breaker are correct.

(8) Perform all mechanical operator and contact alignment tests on both the breaker and its operating mechanism.

(9) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(10) Verify cell fit and element alignment.

(11) Verify racking mechanism.

(12) Confirm correct application of manufacturer's recommended lubricants.

b. Electrical Tests

(1) Perform contact-resistance tests on each breaker.

(2) Perform insulation-resistance tests.

(3) Adjust Breaker(s) for final settings in accordance with Government provided settings.

(4) Determine long-time minimum pickup current by primary current injection.

(5) Determine long-time delay by primary current injection.

(10) Verify correct operation of any auxiliary features such as trip and pickup indicators, zone interlocking, electrical close and trip operation, trip-free, and antipump function.

(11) Verify operation of charging mechanism.

3.5.1.3 Circuit Breakers

Low Voltage - Insulated-Case and Low Voltage Molded Case with Solid State Trips

a. Visual and Mechanical Inspection

(1) Compare nameplate data with specifications and approved shop drawings.

(2) Inspect circuit breaker for correct mounting.

(3) Operate circuit breaker to ensure smooth operation.

(4) Inspect case for cracks or other defects.

(5) Inspect all bolted electrical connections for high resistance using low resistance ohmmeter, verifying tightness of accessible bolted connections and/or cable connections by calibrated torque-wrench method, or performing thermographic survey.

(6) Inspect mechanism contacts and arc chutes in unsealed units.

b. Electrical Tests

(1) Perform contact-resistance tests.

(2) Perform insulation-resistance tests.

(3) Perform Breaker adjustments for final settings in accordance with Government provided settings.

(4) Perform long-time delay time-current characteristic tests

3.5.1.4 Current Transformers

a. Visual and Mechanical Inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition.

(3) Verify correct connection.

(4) Verify that adequate clearances exist between primary and secondary circuit.

(5) Inspect all bolted electrical connections for high resistance using low-resistance ohmmeter, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey.

(6) Verify that all required grounding and shorting connections provide good contact.

b. Electrical Tests

(1) Perform resistance measurements through all bolted connections with low-resistance ohmmeter, if applicable.

(2) Perform insulation-resistance tests.

(3) Perform polarity tests.

(4) Perform ratio-verification tests.

3.5.1.5 Metering and Instrumentation

a. Visual and Mechanical Inspection

(1) Compare equipment nameplate data with specifications and approved shop drawings.

(2) Inspect physical and mechanical condition.

(3) Verify tightness of electrical connections.

b. Electrical Tests

(1) Determine accuracy of meters at 25, 50, 75, and 100 percent of full scale.

(2) Calibrate watthour meters according to manufacturer's published data.

(3) Verify all instrument multipliers.

(4) Electrically confirm that current transformer and voltage transformer secondary circuits are intact.

3.5.1.6 Grounding System

a. Visual and Mechanical Inspection

(1) Inspect ground system for compliance with contract plans and specifications.

b. Electrical Tests

(1) IEEE 81. Perform ground-impedance measurements utilizing the fall-of-potential method. On systems consisting of interconnected ground rods, perform tests after interconnections are complete. On systems consisting of a single ground rod perform tests before any wire is connected. Take measurements in normally dry weather, not less than 48 hours after rainfall. Use a portable ground resistance tester in accordance with manufacturer's instructions to test each ground or group of grounds. Use an instrument equipped with a meter reading directly in ohms or fractions thereof to indicate the ground value of the ground rod or grounding systems under test.

(2) Submit the measured ground resistance of each ground rod and grounding system, indicating the location of the rod and grounding system. Include the test method and test setup (i.e., pin location) used to determine ground resistance and soil conditions at the time the measurements were made.

3.5.2 Follow-Up Verification

Upon completion of acceptance checks, settings, and tests, show by demonstration in service that circuits and devices are in good operating condition and properly performing the intended function. Trip circuit breakers by operation of each protective device. Test each item to perform its function not less than three times. As an exception to requirements stated elsewhere in the contract, provide the Contracting Officer five working days advance notice of the dates and times for checks, settings, and tests.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 27 14.00 20

ELECTRICITY METERING
02/21, CHG 1: 05/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C12.1	(2014; Errata 2016) Electric Meters - Code for Electricity Metering

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 90.1 - IP	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings
ASHRAE 90.1 - SI	(2019) Energy Standard for Buildings Except Low-Rise Residential Buildings

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C37.90.1	(2013) Standard for Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus
IEEE C57.13	(2016) Standard Requirements for Instrument Transformers

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C12.7	(2022) Requirements for Watthour Meter Sockets
ANSI C12.18	(2006; R 2016) Protocol Specification for ANSI Type 2 Optical Port
ANSI C12.20	(2015; E 2018) Electricity Meters - 0.1, 0.2, and 0.5 Accuracy Classes
NEMA C12.19	(2021) Utility Industry End Device Data Tables

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval.Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Installation Drawings; G

SD-03 Product Data

Electricity Meters; G

Current Transformer; G

Potential Transformer; G

External Communications Devices; G

SD-06 Test Reports

Acceptance Checks and Tests; G

System Functional Verification; G

Building Meter Installation Sheet, per Building; G

Meter Configuration Template; G
Contractor must fill in the meter configuration template and submit to the Activity for concurrence.

Meter Configuration Report; G

The meter configuration report must be submitted as a Technical Data Package.

SD-10 Operation and Maintenance Data

Electricity Meters and Accessories, Data Package 5; G

Submit operation and maintenance data in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA and as specified herein.

SD-11 Closeout Submittals

System Functional Verification; G

1.3 QUALITY ASSURANCE

1.3.1 Installation Drawings

Drawings must be provided in hard-copy and electronic format, and must include but not be limited to the following:

a. Wiring diagrams with terminals identified of advanced meter, current transformers, potential transformers, protocol modules, communications interfaces, Ethernet connections, telephone lines. For each typical meter installation, provide a diagram.

b. One-line diagram, including meters, switch(es), current transformers, potential transformers, protocol modules, communications interfaces, Ethernet connections, telephone outlets, and fuses. For each typical meter installation, provide a diagram. Provide one-line diagram to the local Public Works department.

1.3.2 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products must have been in satisfactory commercial or industrial use for one year prior to bid opening. The one-year period must include applications of equipment and materials under similar circumstances and of similar size. The product, or an earlier release of the product, must have been on sale on the commercial market through advertisements, manufacturers catalogs, or brochures during the prior one-year period. Where two or more items of the same class of equipment are required, these items must be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.3.3 Material and Equipment Manufacturing Data

Products manufactured more than 1 year prior to date of delivery to site must not be used, unless specified otherwise.

1.4 MAINTENANCE

1.4.1 Additions to Operation and Maintenance Data

In addition to requirements of Data Package 5, include the following on the actual electricity meters and accessories provided:

a. A condensed description of how the system operates

b. Block diagram indicating major assemblies

c. Troubleshooting information

d. Preventive maintenance

e. Prices for spare parts and supply list

1.5 WARRANTY

The equipment items and software must be supported by service organizations which are reasonably convenient to the equipment

installation in order to render satisfactory service to the equipment and software on a regular and emergency basis during the warranty period of the contract.

1.6 SYSTEM DESCRIPTION

1.6.1 System Requirements

Electricity metering, consisting of meters and associated equipment, will be used to record the electricity consumption and other values as described in the requirements that follow and as shown on the drawings. Communication system requirements are contained in a separate specification section as identified in paragraph COMMUNICATIONS INTERFACES.

1.6.2 Selection Criteria

Metering components and software are part of a system that includes the physical meter, data recorder function and communications method. Every building site identified must include sufficient metering components to measure the electrical parameters identified and to store and communicate the values as required.

Contractor must verify that the electricity meter installed on any building site is compatible with the base-wide metering system with respect to the types of meters selected and the method used to program the meters for initial use. Software and meter programming tools are necessary to set up the meters described by this specification. New software tools different from the meter programming methods currently used by base personnel will require an Authority to Operate (ATO) by Command Information Office at the Enterprise level..

PART 2 PRODUCTS

2.1 ELECTRICITY METERS AND ACCESSORIES

Provide meter(s) and connect the meter(s) to the existing AMI DAS. The contractor must use the existing government laptop computers to configure the meter using existing software loaded on the computer. The contractor will not be allowed to modify any software or add any additional software to the computer. Alternatively, the government will configure the meter(s), which must be compatible with the existing system, using existing software. Contractor must insure that the meter(s) will transmit the specified data to the DAS. The current meters being used by base are: Coordiante with contracting officer..

2.1.1 Physical and Common Requirements

a. Provide metering system components in accordance with the Metering System Schedule shown in this specification. Provide Meter configuration template.

b.

c. Meter must have NEMA 3R stainless steel enclosure for surface mounting with bottom or rear penetrations.

d. Surge withstand capability must conform to IEEE C37.90.1.

e. Use #12 SIS (XHHW, or equivalent) wiring with ring lugs for all meter

connections. Color code and mark the conductors as follows:

(1) Red - Phase A CT - C1
(2) Orange - Phase B CT - C2
(3) Brown - Phase C CT - C3
(4) Gray with white stripe - neutral current return - C0
(5) Black - Phase A voltage - V1
(6) Yellow - Phase B voltage - V2
(7) Blue - Phase C voltage - V3
(8) White - Neutral voltage

2.1.2 Potential Transformer Requirements

a. Meter must be capable of connection to the service voltage phases and magnitude being monitored. If the meter is not rated for the service voltage, provide suitable potential transformers to send an acceptable voltage to the meter.

b. Voltage input must be optically isolated to 2500 volts DC from signal and communications outputs. Components must meet or exceed IEEE C37.90.1.

c. Provide a pull-out type fuse block containing one fuse per phase, Class RK type, to protect the voltage input to the meter. Size fuses as recommended by the meter manufacturer. Fusing must either be inside the secondary compartment of the transformer or inside the same enclosure as the CT shorting device.

d. Potential transformers will be used to convert 480 volt inputs to 120 volts for the locations shown on the metering schedule. Potential transformers must be rated indoor or outdoor, as required for the specific application. Voltage rating must provide 120 volts, wye-connected, 3 phase, 4 wire, 60 Hz, insulation class, 600 volts. Potential transformers BIL must be 10 kV and must have an accuracy class of 0.3 at burdens w, x, and y. Thermal rating must be 500 VA.

e. The Contractor must be responsible for determining the actual voltage ratio of each potential transformer for medium voltage applications. Transformer must conform to IEEE C57.13 and the following requirements.

(1) Type: Dry type, of two-winding construction.

(2) Weather: Outdoor or indoor rated for the application.

(3) Frequency: Nominal 60 Hz.

(4) Accuracy: Plus or minus 0.3 percent at 60 Hz.

f. Potential transformers installed inside switchgear and panels must be rated for interior use. Voltage rating must provide 120 volts, wye-connected, 3 phase, 4 wire, 60 Hz, insulation class, 600 volts. Potential transformers BIL must be a minimum of 10 kV, and have an insulation class and BIL rating that equals or exceeds the ratings of the associated switchgear. Potential transformers must have an accuracy class of 0.15 at burdens w, x, and y. Thermal rating must be 500 VA. Potential transformers must be accessed from the front and mounted in a metering section.

2.1.3 Current Transformer Requirements

a. Current transformer must be installed with a rating as shown in the schedule.

b. Current transformers must have an Accuracy Class of 0.15 (with a maximum error of plus/minus 0.3 percent at 5.0 amperes) when operating within the specified rating factor.

c. Current transformers must be solid-core, bracket-mounted for new installations using ring-tongue lugs for electrical connections. Current transformers must be accessible and the associated wiring must be installed in an organized and neat workmanship arrangement. Current transformers that are retrofitted onto existing switchgear busbar can be a busbar split-core design.

d. Current transformers must have:

(1) Insulation Class: All 600 volt and below current transformers must be rated 10 KV BIL.

(2) Frequency: Nominal 60 Hz.

(3) Burden: Burden class must be selected for the load.

(4) Phase Angle Range: 0 to 60 degrees.

e. Meter must accept current input from standard instrument transformers (5A secondary current transformers).

f. Current inputs must have a continuous rating in accordance with IEEE C57.13.

g. Provide one single-ratio current transformer for each phase per power transformer with characteristics listed in the following table.

Single-Ratio Current Transformer Characteristics				
kVA	Sec. Volt	CT Ratio	RF	Meter Acc. Class
500	208Y:120	1200:5	1.33	0.3 thru B0.05
750	480Y:277	800/5	1.33	0.3 thru B0.05

2.1.4 Meter Requirements

Electricity meters must include the following features:

a. Meter must comply with ANSI C12.1, NEMA C12.19, and ANSI C12.20 and must match existing AMI meter system at the installation and be the newest version with ATO.

b. Meter sockets must comply with ANSI C12.7.

e. Provide socket-mounted or panel mounted meters as indicated on the meter schedule.

f. Meter must be a Class 20, transformer rated design.

g. Use Class 200 meters for direct current reading without current transformers for applications with an expected load less than 200 amperes, where indicated.

h. Meter must be rated for use at temperature from minus 40 degrees Centigrade to plus 70 degrees Centigrade.

i. The meters must have an electronic demand recording register and must be secondary reading as indicated. The register must be used to indicate maximum kilowatt demand as well as cumulative or continuously cumulative demand. Demand must be measured on a block-interval basis and must be capable of a 5 to 60 minute interval and initially set to a 15-minute interval. It must have provisions to be programmed to calculate demand on a rolling interval basis. Meter readings must be true RMS.

j. The meter electronic register must be of modular design with non-volatile data storage. Downloading meter stored data must be capable via an optical port. Recording capability of data storage with a minimum capability of 89 days of 15 minute, 2 channel interval data. The meter must be capable of providing at least 2 KYZ pulse outputs (dry contacts). Default initial configuration (unless identified otherwise by base personnel) must meet NAVFAC CIRCUITS Call for Consistency document located on the NAVFAC CIRCUITS Portal and must be:

(1) First channel - kWh
(2) Second channel - kVARh
(3) KYZ output #1 - kWh
(4) KYZ output #2 - kVARh

k. All meters must have identical features available in accordance with this specification. The meter schedule identifies which features must be activated at each meter location.

l. Enable switches for Time of Use (TOU), pulse and load profile measurement module at the factory.

m. Meter must have an optical port on front of meter. Optical device must be compatible with ANSI C12.18.

n. Meters must be 120-480 volts auto ranging.

o. Provide blank tag fixed to the meter faceplate for the addition of the meter multiplier, which will be the product of the current transformer and potential transformer ratio and will be filled in by base personnel on the job site. The meter's nameplate must include:

(1) Meter ID number.
(2) Rated voltage.
(3) Current class.
(4) Metering form.
(5) Test amperes.
(6) Frequency.
(7) Catalog number.
(8) Manufacturing date.

p. On switchboard style installations, provide switchboard case with disconnect means for meter removal incorporating short-circuiting of current transformer circuits.

q. Meter covers must be polycarbonate resins with an optical port and reset. Backup battery must be easily accessible for change-out after removing the meter cover.

r. The normal billing data scroll must be fully programmable. The normal billing data scroll requirements provided in the CIRCUITS Call for Consistency Document located on the NAVFAC CIRCUITS Portal. Data scroll display must include the following.

(1) Number of demand resets.
(2) End-of-interval indication.
(3) Maximum demand.
(4) New maximum demand indication.
(5) Cumulative or continuously cumulative.
(6) Time remaining in interval.
(7) Kilowatt hours.

s. The register must incorporate a built-in test mode that allows it to be tested without the loss of any data or parameters. The following quantities must be available for display in the test mode:

(1) Present interval's accumulating demand.
(2) Maximum demand.
(3) Number of impulses being received by the register.

t. Pulse module simple I/O board with programmable ratio selection.

u. Meters must be programmed after installation via an optical port. Optical display must show TOU data, peak kWh, semi-peak kWh, off peak kWh, and phase angles.

v. Self-monitoring to provide for:

(1) Unprogrammed register.
(2) RAM checksum error.
(3) ROM checksum error.
(4) Hardware failure.
(5) Memory failure.
(6) EPROM error.
(7) Battery status (fault, condition, or time in service).

w. Liquid crystal alphanumeric displays, 9 digits, blinking squares confirm register operation. Six Large digits for data and smaller digits for display identifier.

x. Display operations, programmable sequence with display identifiers. Display identifiers must be selectable for each item. Continually sequence with time selectable for each item.

y. The meters must support three modes of registers: Normal Mode, Alternate Mode, and Test Mode. The meter also must support a "Toolbox" or "Service Information" (accessible in the field) through an optocom port to a separate computer using the supplied software to allow access to instantaneous service information such as voltage,

current, power factor, load demand, and the phase angle for individual phases.

z. Meter must have a standard 4 -year warranty.

2.1.5 Disconnect Method

a. Provide a 10-pole safety disconnect complete with isolation devices for the voltage and current transformer inputs, including a shorting means for the current transformers.

b. Disconnecting wiring blocks must be provided between the current transformer and the meter. A shorting mechanism must be built into the wiring block to allow the current transformer wiring to be changed without removing power to the transformer. The wiring blocks must be located where they are accessible without the necessity of disconnecting power to the transformer.

c. Voltage monitoring circuits must be equipped with disconnect switches to isolate the meter base or socket from the voltage source.

2.1.6 Installation Methods

a. Transformer Mounted ("XFMR" in Metering Systems Schedule). Meter base must be located outside on the secondary side of the pad-mounted transformer.

b. Stand Mounted Adjacent to Transformer ("STAND" in Metering Systems Schedule). Meter base must be mounted on a structural steel pole approximately 4 feet from the transformer pad. This can be used for multiple meters associated with a single transformers.

c. Building Mounted ("BLDG" in Metering Systems Schedule). Meter base must be mounted on the side of the existing building near the service entrance.

d. Panel Mounted. ("PNL" in Metering Systems Schedule). Meter must be mounted where directed.

e. Commercial meter pedestal ("PED" in Metering Systems Schedule).

2.2 COMMUNICATIONS INTERFACES

Meter must have two-way communication with the existing data acquisition system (DAS). Provide a communications interface utilizing base standards.

Provide interfacing software if a meter is used that is different than the existing meters at the Activity to ensure compatibility within the metering system.

Connect to the AMI network utilizing base standards.

PART 3 EXECUTION

3.1 INSTALLATION

Electrical installations must conform to ASHRAE 90.1 - IP, ASHRAE 90.1 - SI IEEE C2, NFPA 70 (National Electrical Code), and to the requirements specified herein. Provide new equipment and materials unless indicated or

specified otherwise.

3.1.1 Scheduling of Work and Outages

The Contract Clauses must govern regarding permission for power outages, scheduling of work, coordination with Government personnel, and special working conditions.

3.2 FIELD QUALITY CONTROL

Perform the following acceptance checks and tests on all installed meters.

3.2.1 Performance of Acceptance Checks and Tests

Perform in accordance with the manufacturer's recommendations and include the following visual and mechanical inspections and electrical tests, performed in accordance with NETA ATS.

a. Meter Assembly

(1) Visual and mechanical inspection.

(a) Compare equipment nameplate data with specifications and approved shop drawings.

(b) Inspect physical and mechanical condition. Confirm the meter is firmly seated in the socket, the socket is not abnormally heated, the display is visible, and the ring and seal on the cover are intact.

(c) Inspect all electrical connections to ensure they are tight. For Class 200 services, verify tightness of the service conductor terminations for high resistance using low-resistance ohmmeter, or by verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.

(d) Record model number, serial number, firmware revision, software revision, and rated control voltage.

(e) Verify operation of display and indicating devices.

(f) Record password and user log-in for each meter.

(g) Verify grounding of metering enclosure.

(h) Set all required parameters including instrument transformer ratios, system type, frequency, power demand methods/intervals, and communications requirements. Verify that the CT ratio and the PT ratio are properly included in the meter multiplier or the programming of the meter. Confirm that the multiplier is provided on the meter face or on the meter.

(i) Provide building meter installation sheet, per building for each facility. See example Graphic E-S1.

(2) Electrical tests.

(a) Apply voltage or current as appropriate to each analog input and verify correct measurement and indication.

(b) Confirm correct operation and setting of each auxiliary input/output feature including mechanical relay, digital, and analog.

(c) After initial system energization, confirm measurements and indications are consistent with loads present.

(d) Make note of, and report, any "Error-Code" or "Caution-Code" on the meter's display.

(3) Provide meter configuration report.

b. Current Transformers

(1) Visual and mechanical inspection.

(a) Compare equipment nameplate data with specification and approved shop drawings.

(b) Inspect physical and mechanical condition.

(c) Verify correct connection, including polarity.

(d) Inspect all electrical connections to ensure they are tight.

(e) Verify that required grounding and shorting connections provide good contact.

(2) Electrical Tests.

Verify proper operation by reviewing the meter configuration report.

c. Potential Transformers

(1) Visual and mechanical inspection.

(a) Verify potential transformers are rigidly mounted.

(b) Verify potential transformers are the correct voltage.

(c) Verify that adequate clearances exist between the primary and secondary circuit.

(2) Electrical Tests.

(a) Verify by the meter configuration report that the polarity and phasing are correct.

3.2.2 System Functional Verification

Verify that the installed meters are working correctly in accordance with the meter configuration report:

a. The correct meter form is installed.

b. All voltage phases are present.

c. Phase rotation is correct.

d. Phase angles are correct.

e. The new meter accurately measures power magnitude and direction, and can communicate as required by paragraph COMMUNICATIONS INTERFACES.

-- End of Section --

SECTION 26 41 00

LIGHTNING PROTECTION SYSTEM
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 81	(2012) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 780	(2026) Standard for the Installation of Lightning Protection Systems

U.S. AIR FORCE (USAF)

DAFMAN 32-1065	(2020) Grounding and Electrical Systems

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-575-01	(2012; with Change 1, 2021) Lightning and Static Electricity Protection Systems

UL SOLUTIONS (UL)

UL 96	(2016; May 2023) UL Standard for Safety Lightning Protection Components
UL 96A	(2023) UL Standard for Safety Installation Requirements for Lightning Protection Systems
UL 1449	(2021; Reprint Oct 2025) UL Standard for Safety Surge Protective Devices
UL Electrical Construction	(2012) Electrical Construction Equipment Directory

1.2 RELATED REQUIREMENTS

1.2.1 Verification of Dimensions

Confirm all details of work, verify all dimensions in field, and advise

Contracting Officer of any discrepancy before performing work. Obtain prior approval of Contracting Officer after engineering approval and before making any departures from the design.

1.2.2 System Requirements

Provide a system furnished under this specification consisting of the latest products of a manufacturer regularly engaged in production of lightning protection system components. Products must be UL listed for use on lightning protection systems unless this rating does not exist for items in question.

Comply with NFPA 70, NFPA 780, UL 96, and UFC 3-575-01.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-06 Test Reports

Lightning Protection and Grounding System Test Plan; G

Grounding Systems Testing; G

SD-07 Certificates

Component UL Listed and Labeled; G

Lightning Protection System Inspection Certificate; G

Roof Manufacturer's Warranty; G

1.4 QUALITY ASSURANCE

In each standard referred to herein, consider the advisory provisions to be mandatory, as though the word "shall" or "must" has been substituted for "should," wherever it appears. Interpret references that require LPS expertise in these standards to mean Base Civil Engineer (BCE) or BCE-designated representative with LPS training certification.

1.4.1 Component UL Listed and Labeled

Submit proof of compliance that components are UL Listed and Labeled for use on lightning protection systems. Listing alone in UL Electrical Construction, which is the UL Electrical Construction Directory, is not acceptable evidence. In lieu of Listed and Labeled, submit written certificate from an approved, nationally-recognized testing organization equipped to perform such services, stating that items have been tested and conform to requirements and testing methods of Underwriters Laboratories (UL).

1.4.2 Lightning Protection and Grounding System Test Plan

Provide lightning protection system and grounding system test plans in compliance with NFPA 780. As a minimum, include a sketch of the facility and surrounding lightning protection system as part of the specific test

plan for each structure. Include the requirements as "Testing of Integral Lightning Protection System" in the test plan. For explosives facilities, the rolling sphere must be superimposed in elevation drawings, on all three of these types of lightning protection systems for installations with a high strike density as indicated in the NOAA Strike Density Maps. This may be accomplished by Computer Aided Design (CAD). Integral systems are discouraged on explosives and communications facilities because it has the potential to bring lightning closer to what is being protected. For explosives facilities, record drawings with materials description (wire size, air terminal material, etc.) is required by the base Weapons Safety Office. Testing of Surge Protective Devices must comply with UL 1449 and annual inspection of Surge Protective Devices should be included on Figures A7.6 and A7.7.

1.4.3 Lightning Protection System Inspection Certificate of Qualifications

Provide an approved third-party inspector who meets training certification requirements for final acceptance of the LPS. Inspection and certification of the LPS must be completed and certified in writing, before occupancy of the building. Compliance requirements are in UFC 3-575-01. Signed Certificate of Qualifications must be placed in the LPS records.

Note that the Contracting Officer may not accept the LPS system without a recommendation from a qualified person identified in the project documents.

1.5 SITE CONDITIONS

Confirm all details of work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before starting any work, if known at that time, or when it becomes known while performing work. Obtain prior approval of the BCE or BCE-designated representative with LPS training certification before design changes are made.

PART 2 PRODUCTS

2.1 MATERIALS

See NFPA 70, NFPA 780, UFC 3-575-01. Do not use a combination of materials that forms an electrolytic couple of such nature that corrosion is accelerated in the presence of moisture unless moisture is permanently excluded from the junction of such metals. Where unusual conditions exist which would cause corrosion of conductors, provide conductors with protective coatings, such as tin or lead, or oversize conductors. Where a mechanical hazard is involved, increase conductor size to compensate for the hazard or protect conductors. When metallic conduit or tubing is provided, electrically bond conductor to conduit or tubing at the upper and lower ends by clamp type connectors or welds (including exothermic). All lightning protection components, such as bonding plates, air terminals, air terminal supports and braces, chimney bands, clips, connector fittings, and fasteners are to comply with the requirements of UL 96 classes, as applicable.

2.1.1 Main and Bonding Conductors

Main and Bonding Conductors should be NFPA 780 and UL 96 Class I or Class II materials, as applicable. For explosives, Class II materials are in accordance with NFPA 780, Chapter 8.

2.1.2 Conductors

Provide copper or aluminum conductors, as applicable. See NFPA 780, UFC 3-575-01.

2.2 COMPONENTS

2.2.1 Air Terminals on Integral Systems

Provide solid air terminals. Tubular air terminals are not permitted. Support air terminals more than 24 inches in length by suitable brace, supported at not less than one-half the height of the terminal.

2.2.2 Ground Rods

Provide ground rods conforming to NFPA 780. Provide ground rods that are not less than 5/8 inch in diameter and 8 feet in length. Do not mix ground rods of copper-clad steel and solid copper on the job.

2.2.3 Connections and Terminations

Provide connectors for splicing conductors that conform to UL 96, class as applicable. Conductor connections can be made by compression clamps or welds (including exothermic). Provide style and size connectors required for the installation.

2.2.4 Connector Fittings

Provide connector fittings for "end-to-end", "Tee", or "Y" splices that conform to NFPA 780 and UL 96.

PART 3 EXECUTION

3.1 LIGHTNING PROTECTION SYSTEMS

Provide a lightning protection system that meets the requirements of NFPA 780 and UFC 3-575-01.

3.1.1 Integral Lightning Protection System

The integral type lightning protection system consists of air terminals, roof conductors, down conductors, ground connections, grounding electrodes and ground ring electrode conductor for the purpose of carrying lightning current from a direct strike to ground in a manner that will protect assets and personnel. Expose all conductors on the structures except where exterior down conductors are required to be in protective sleeves for prevention of mechanical damage (6 feet above grade level). Integral systems are the least preferred, especially for explosives and communications facilities. When use of integral systems is determined by the designer or site conditions to be necessary, do not run down conductors inside columns or other methods which will prevent visual access for required inspections. Visual access is required by NFPA 780 so that the annual visual inspection may be performed on all LPS components.

Make interconnections within side-flash distances between down conductors and metallic equipment mounted on the exterior or interior of a facility, at or below the level of the grounded metallic parts. Calculate side-flash distances in accordance with NFPA 780. Be aware of side flashes that may occur through exterior walls.

Note that integral systems should be avoided as LPS for Explosives and Communications facilities and is discouraged for general facilities. Installation and maintenance costs of an integral system are excessive and this method is maintenance intensive. The complexity and number of test points dictates frequent interruption to missions and daily operations for required annual inspections and testing. Integral systems require fall protection and maintenance of that fall protection system. For fall protection, maintain NFPA 780-compliant separation distance between the integral system and metallic fall protection.

3.1.1.1 Roof-Mounted Components

Coordinate with the roofing manufacturer and provide certification that the roof manufacturer's warranty is not violated by the installation methods for air terminals and roof conductors. Adhesive fasteners may be used on the roof if the installation is observed by base-qualified personnel to be compliant with manufacturer's instructions. Installation must be observed until the observer is satisfied that the proper methods for preparing the surface are being performed. These fasteners will be added and considered a test point in Base records and must be part of the annual inspection. Observer must date and sign the test record.

No connection or physical attachment is allowed to any coping system on the roof as this violates the integrity and warranty of the coping system.

3.1.1.2 Air Terminals

Use of adhesive fasteners, when installing air terminals on "rubber" (EPDM) type roofs, should be in accordance with adhesive and roof manufactures’ recommendations. See paragraph ROOF-MOUNTED COMPONENTS.

3.1.1.3 Roof Conductors

Roof conductors should comply with NFPA 780.

3.1.2 Catenary Lightning Protection System

A catenary lightning protection system consists of at least two wooden poles or metallic masts with overhead wires (cross conductors). Install air terminals on wooden masts at least 10 inches higher than the top of the wooden pole, or use steel saddles on top of the wooden pole for conductor placement if saddle is at least 6 inches above the wooden pole. Provide at two paths to ground for an overhead ground wire (cross conductor) and down conductors, to transport the current from a direct strike to grounding electrodes that are 5/8 in. by 8 ft. The class (diameter at the top of the pole and the pole height) of wooden pole must be designed to withstand the horizontal force of the cross conductor and any ice loading it could be subject to. Metallic masts used in a catenary lighting protection system do not require air terminals, but must be rated for use on electrical distribution or transmission lines because of horizontal forces that must be considered when sizing and selecting the metallic mast manufacturer. Consider resonant frequency in the design, if applicable, and use appropriate damping designed by the mast manufacturer. A rolling sphere proof of protection is a required submittal that must be approved prior to sizing or ordering the masts. This system shall comply with NFPA 780. Note that for randomly-shaped facilities (non-rectangular facilities), a catenary system is not required to be symmetrical. To maintain symmetry on the widest part of the

building, the overhead ground wire (cross conductor) length sometimes drives the height of the masts by several sizes to compensate for added weight of the cross conductor and the fact that it could be laden with ice during winter, in some areas of a country. This system shall comply with NFPA 780 and UFC 3-575-01.

3.1.3 Mast Lightning Protection System

A mast lightning protection system consists of one or more individual masts not interconnected to each other, and isolated from the building, that provide sufficient protection for the structure contents. These masts may be wooden or metallic. Wood poles (masts) require air terminals on top that are at least 10 inches higher than the top of the mast, down conductors that provide at least two paths to ground (as close to 180 degrees apart on the pole perimeter as possible), to transport the current from a direct strike directly to grounding electrodes (ground) that are 5/8 inches by 8 feet. Metallic masts do not require air terminals and are not required be rated for use on electrical distribution or transmission lines because only vertical forces are experienced by the mast. If lights or other items are mounted on the top of the masts, guy wires and proper bonding of the guy wires are required. The base of a metallic mast should have connections to two separate ground rods, 5/8 inches by 8 feet, unless equivalent protection is provided (designed within) in the footer or some other documented manner. Paths to ground must possess a visible test point. A rolling sphere diagram showing proof of protection is a required submittal that must be approved prior to sizing or ordering the masts. This system shall comply with NFPA 780 and UFC 3-575-01.

A lightning protection system may consist of a mixture of these three systems, in order to limit cost of the system while still providing protection. For instance, an irregularly shaped building that uses a catenary system may use a single mast to cover an area that is just outside the zone of protection created by the catenary, as indicated by a rolling sphere diagram.

3.1.4 Down Conductors

A minimum of two paths to ground shall be provided on any system. This may be by two down conductors or with a down conductor in combination with other metallic connections to ground. Protect exposed down conductors from physical damage from ground level up to 6 feet. If this protection is a metal conduit, both ends must be bonded to the down conductor passing through it. For Schedule 80 conduit providing this protection, no bonding at both ends is necessary. Schedule 80 conduit or metallic conduit may be painted to match the surrounding surface. NO CONNECTIONS OR FASTENERS OF ANY LIGHTNING PROTECTION SYSTEM MAY BE PAINTED because this affects the ease with which lightning current can pass to ground.

3.1.5 Ground Connections

Attach each down conductor and ground ring electrode to a ground rod below grade by exothermic weld for all buried connections and exothermic weld or compression connectors for connections inside test wells. Terminate all down conductors to a grounding electrode inside a test well. Test connections and record resistances and continuity readings prior to covering.

Accessible connections above ground level and in test wells can be grounded with mechanical clamping, meeting installation requirements in

NFPA 780.

3.1.6 Installation of Grounding Electrodes (Ground Rods)

Extend driven ground rods vertically into the existing undisturbed earth for a distance of not-less-than 8 feet if exothermic welds are used for bonds. Inside test wells, the 5/8 in. by 8 ft rod may be driven to a point above the base of the test well, that will provide working/testing access to the mechanically-fastened bond. Set ground rods not less than 3 feet nor more than 6 feet (see NFPA 780) from the structural foundation, and at least 3 feet beyond the drip line for the facility. After the completed installation, measure the total resistance to ground using the fall-of-potential method described in IEEE 81. Maximum allowed resistance of a single driven ground rod is 25 ohms (NFPA 70). If resistance-to-ground of a single ground rod for the lightning protection system exceeds 25 ohms and another ground rod is driven in accordance with NFPA 780, 25 ohms does not apply to this test point. See NFPA 70 exception to Article 250.53.

3.2 APPLICATIONS

3.2.1 Personnel Ramps and Covered Passageways

Lightning Protection is required in accordance with NFPA 780 and UFC 3-575-01.

3.3 INTERFACE WITH OTHER STRUCTURES

3.3.1 Fences

Bond metal fence and gate systems to the lightning protection system at the point where the fence, any fence post, or gate is within 6 feet of any part of the lightning protection system (usually a down conductor) in accordance with ANSI C2 and NFPA 780 and UFC 3-575-01.

3.4 RESTORATION

Where sod has been removed, replace sod as soon as possible after completing the backfilling. Restore areas disturbed by trenching, storing of dirt, cable laying, and other work, to original condition. Overfill the trench to accommodate for settling. Include necessary topsoil, fertilizing, liming, seeding, sodding, sprigging or mulching in any restoration, to match existing. Maintain disturbed surfaces and replacements until final acceptance. Return to site after six months to fill in compacted surface.

3.5 FIELD QUALITY CONTROL

3.5.1 Lightning Protection Systems Testing

A 100 percent test point test and inspection is required by all services. Identify test points for lightning protection system connections and bonds. Provide a sketch (NTS) with identified test points as part of the contract acceptance. Number points in a manner consistent with the installation (Base or Post) nomenclature for existing lightning protection systems; for example, use letters or numbers to track the test results. Test each lightning protection system connection to ensure continuity across each connection or bond is 1 ohm or less, and record the value indicated on a copy of the test form located at the back of DAFMAN 32-1065,

Attachment 7.

a. LPS testing must also be accomplished on smaller projects, such as roofing and HVAC projects, where lightning protection systems are installed on any facility with existing LPS, to ensure the LPS is not damaged or reconfigured during construction.

b. Comply with UL 96A. A third-party inspector (not the designer and not the installer) must be present for the 100 percent inspection and data documentation by the contractor. This is to take place prior to project acceptance. Note that in many cases Air Force personnel have been trained to inspect and accept projects as the third-party inspector. Verify this before contract award.

3.5.2 Grounding Systems Testing

A 100 percent test point resistance test and inspection is required. Identify all test points for grounding system connections and bonds. Provide a sketch (NTS) with identified test points as part of the contract acceptance. Number points in a manner consistent with the installation (Base or Post) nomenclature for existing grounding systems; for example, use letters or numbers to track the test results. Test each grounding system connection or bond to ensure resistance-to-ground is 25 ohms or less or as excepted by NFPA 70 or NFPA 780. Record the resistance measurement on a copy of the test form located at the back of DAFMAN 32-1065 for Air Force or a similar form provided by the Army or Navy. Test the ground rod for resistance to ground before making connections to the rod. Tie the grounding system together and test for resistance to ground. Make resistance measurements in dry weather, and not earlier than 48 hours after rainfall. Include in the written report: locations of test points, measured values for continuity and ground resistances, and soil conditions at the time that measurements were made. Submit results of each test to the Contracting Officer.

-- End of Section --

SECTION 26 51 00

INTERIOR LIGHTING
05/20, CHG 2: 11/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A580/A580M	(2023) Standard Specification for Stainless Steel Wire
ASTM A641/A641M	(2019) Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire
ASTM A653/A653M	(2025a) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A1008/A1008M	(2025) Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM B164	(2003; R 2014) Standard Specification for Nickel-Copper Alloy Rod, Bar, and Wire
ASTM B633	(2019) Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel
ASTM D4674 REV A	(2002; R 2010) Standard Practice for Accelerated Testing for Color Stability of Plastics Exposed to Indoor Office Environments

EUROPEAN UNION (EU)

Directive 2011/65/EU	(2011) Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

ILLUMINATING ENGINEERING SOCIETY (IES)

ANSI/IES LM-79	(2019) Approved Method: Electrical and Photometric Measurements of Solid State Lighting Products
ANSI/IES LM-80	(2020) Approved Method: Measuring Luminous

	Flux and Color Maintenance of LED Packages, Arrays and Modules
ANSI/IES LS-1	(2020) Lighting Science: Nomenclature and Definitions for Illuminating Engineering
ANSI/IES TM-15	(2020) Technical Memorandum: Luminaire Classification System for Outdoor Luminaires
ANSI/IES TM-21	(2021) Technical Memorandum: Projecting Long-TermLuminous, Photon, and Radiant Flux Maintenance of LED Light Sources
ANSI/IES TM-30	(2020) Technical Memorandum: IES Method for Evaluating Light Source Color Rendition
IES Lighting Library	IES Lighting Library

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
IEEE C2	(2023) National Electrical Safety Code
IEEE C62.41	(1991; R 1995) Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 77	(2017) Temporal Light Artifacts: Test Methods and Guidance for Acceptance Criteria
NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA ANSLG C78.377	(2017) Electric Lamps— Specifications for the Chromaticity of Solid State Lighting Products
NEMA C82.77-10	(2020) Harmonic Emission Limits - Related Power Quality Requirements
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA SSL 1	(2016) Electronic Drivers for LED Devices, Arrays, or Systems
NEMA SSL 3	(2011) High-Power White LED Binning for General Illumination
NEMA SSL 7A	(2015) Phase-Cut Dimming for Solid State Lighting: Basic Compatibility
NEMA WD 1	(1999; R 2020) Standard for General Color

	Requirements for Wiring Devices
NEMA WD 7	(2011; R 2016; R 2021) Occupancy Motion Sensors Standard

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 101	(2024) Life Safety Code

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

47 CFR 15	Radio Frequency Devices

UL SOLUTIONS (UL)

UL 20	(2025) UL Standard for Safety General-Use Snap Switches
UL 94	(2023; Reprint Jan 2024) UL Standard for Safety Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
UL 508	(2018; Reprint Jul 2021) UL Standard for Safety Industrial Control Equipment
UL 916	(2015; Reprint Oct 2021) UL Standard for Safety Energy Management Equipment
UL 917	(2006; Reprint Aug 2013) UL Standard for Safety Clock-Operated Switches
UL 924	(2016; Reprint May 2020) UL Standard for Safety Emergency Lighting and Power Equipment
UL 1472	(2015) UL Standard for Safety Solid-State Dimming Controls
UL 1598	(2021; Reprint Jun 2021) Luminaires
UL 1598C	(2014) Standard for Light-Emitting Diode (LED) Retrofit Luminaire Conversion Kits
UL 2043	(2013) Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces
UL 8750	(2015; Reprint Sep 2021) UL Standard for Safety Light Emitting Diode (LED) Equipment for Use in Lighting Products

1.2 RELATED REQUIREMENTS

Materials not considered to be luminaires, luminaire accessories, or lighting equipment are specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Luminaires and accessories that are mounted in exterior environments and not attached to the exterior of the building are specified in Section 26 56 00 EXTERIOR LIGHTING.

1.3 DEFINITIONS

a. Unless otherwise specified or indicated, electrical and electronics terms used in these specifications and on the drawings, must be as defined in IEEE 100 and ANSI/IES LS-1.

b. For LED luminaire light sources, "Useful Life" is the operating hours before reaching 70 percent of the initial rated lumen output (L70) with no catastrophic failures under normal operating conditions. This is also known as 70 percent "Rated Lumen Maintenance Life" as defined in ANSI/IES LM-80.

c. For LED luminaires, "Luminaire Efficacy" (LE) is the appropriate measure of energy efficiency, measured in lumens/watt. This is gathered from LM-79 data for the luminaire, in which absolute photometry is used to measure the lumen output of the luminaire as one entity, not the source separately and then the source and housing together.

d. Total harmonic distortion (THD) is the root mean square (RMS) of all the harmonic components divided by the total fundamental current.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval.Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Luminaire Drawings; G

SD-03 Product Data

Luminaires; G

Light Sources; G

LED Drivers; G

Luminaire Warranty; G

Lighting Controls Warranty; G

Switches; G

Wall Box Dimmers; G

Occupancy/Vacancy Sensors; G

Time Clocks; G

Power Packs; G

Exit Signs; G

Emergency Drivers; G

SD-05 Design Data

Luminaire Design Data; G

SD-06 Test Reports

ANSI/IES LM-79 Test Report; G

ANSI/IES LM-80 Test Report; G

ANSI/IES TM-21 Test Report; G

ANSI/IES TM-30 Test Report; G

Occupancy/Vacancy Sensor Verification Test; G

Photosensor Verification Test; G

SD-07 Certificates

LED Driver and Dimming Switch Compatibility Certificate; G

SD-10 Operation and Maintenance Data

Lighting System, Data Package 5; G

End-User Training Plan; G

1.5 QUALITY ASSURANCE

Data, drawings, and reports must employ the terminology, classifications and methods prescribed by the IES Lighting Library as applicable, for the lighting system specified.

1.5.1 Luminaire Drawings

Include dimensions, accessories installation details, and construction details. Photometric data, including CRI, CCT, LED driver type, zonal

lumen data, and candlepower distribution data must accompany shop drawings.

1.5.2 Luminaire Design Data

a. Provide safety certification and file number for the luminaire family that must be listed, labeled, or identified in accordance with the NFPA 70. Applicable testing bodies are determined by the US Occupational Safety Health Administration (OSHA) as Nationally Recognized Testing Laboratories (NRTL) and include: CSA (Canadian Standards Association), ETL (Edison Testing Laboratory), and UL (Underwriters Laboratories).

b. Provide long term lumen maintenance projections for each LED luminaire in accordance with ANSI/IES TM-21. Data used for projections must be obtained from testing in accordance with ANSI/IES LM-80.

1.5.3 ANSI/IES LM-79 Test Report

Submit test report on manufacturer's standard production model of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data in IES format as outlined under "14.0 Test Report" in ANSI/IES LM-79.

1.5.4 ANSI/IES LM-80 Test Report

Submit report on manufacturer's standard production LED light source (package, array, or module) of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data as outlined under "8.0 Test Report" in ANSI/IES LM-80.

1.5.5 ANSI/IES TM-21 Test Report

Submit test report on manufacturer's standard production LED light source (package, array, or module) of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data, as well as required interpolation information as outlined under "7.0 Report" in ANSI/IES TM-21.

1.5.6 ANSI/IES TM-30 Test Report

Submit color vector graphic in accordance with ANSI/IES TM-30 on manufacturer's standard production LED light source (package, array, or module) of specified luminaire. Include spectral distribution of test LED light source.

1.5.7 LED Driver and Dimming Switch Compatibility Certificate

Submit certification from the luminaire, driver, or dimmer switch manufacturer that ensures compatibility and operability between devices without flickering and to specified dimming levels.

1.5.8 Test Laboratories

Test laboratories for the ANSI/IES LM-79 and ANSI/IES LM-80 test reports must be one of the following:

a. National Voluntary Laboratory Accreditation Program (NVLAP) accredited for solid-state lighting testing as part of the Energy-Efficient

Lighting Products laboratory accreditation program for both LM-79 and LM-80 testing.

b. One of the qualified labs listed on the Department of Energy - LED Lighting Facts Approved Testing Laboratories List for LM-79 testing.

c. One of the EPA-Recognized Laboratories listed for LM-80 testing.

1.5.9 Regulatory Requirements

Equipment, materials, installation, and workmanship must be in accordance with the mandatory and advisory provisions of NFPA 70, unless more stringent requirements are specified or indicated. Provide luminaires and assembled components that are approved by and bear the label of UL for the applicable location and conditions unless otherwise specified.

1.5.10 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design, and workmanship. Products must have been in satisfactory commercial or industrial use for six months prior to bid opening. The six-month period must include applications of equipment and materials under similar circumstances and of similar size. The product must have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the six-month period. Where two or more items of the same class of equipment are required, these items must be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.10.1 Alternative Qualifications

Products having less than a six-month field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.10.2 Material and Equipment Manufacturing Date

Do not use products manufactured more than six months prior to date of delivery to site, unless specified otherwise.

1.6 WARRANTY

Support all equipment items by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.6.1 Luminaire Warranty

Provide and transfer to the government the original LED luminaire manufacturers standard commercial warranty for each different luminaire manufacturer used in the project.

a. Provide a written five year minimum replacement warranty for material, luminaire finish, and workmanship. Provide written warranty document that contains all warranty processing information needed, including

customer service point of contact, whether or not a return authorization number is required, return shipping information, and closest return location to the luminaire location.

(1) Finish warranty must include failure and substantial deterioration such as blistering, cracking, peeling, chalking, or fading.

(2) Material warranty must include:

(a) All LED drivers and integral control equipment.

(b) Replacement when more than 15 percent of LED sources in any lightbar or subassembly(s) are defective, non-starting, or operating below 70 percent of specified lumen output.

b. Warranty period must begin in accordance with the manufacturer's standard warranty starting date.

c. Provide replacements that are promptly shipped, without charge, to the using Government facility point of contact and that are identical to or an improvement upon the original equipment. All replacements must include testing of new components and assembly.

1.6.2 Lighting Controls Warranty

Provide and transfer to the government the original lighting controls manufacturers standard commercial warranty for each different lighting controls manufacturer used in the project. Warranty coverage must begin from date of final system commissioning or three months from date of delivery, whichever is the earliest. Warranty service must be performed by a factory-trained engineer or technician.

a. Unless otherwise noted, provide a written five year minimum warranty on the complete system for all systems with factory commissioning. Provide warranty that covers 100 percent of the cost of any replacement parts and services required over the five years which are directly attributable to the product failure. Failures include, but are not limited to, the following:

(1) Software: Failure of input/output to execute switching or dimming commands.

(2) Damage of electronic components due to transient voltage surges.

(3) Failure of control devices, including but not limited to occupancy sensors, photosensors, and manual wall station control devices.

b. Provide a written five year minimum warranty on all input devices against defect in workmanship or materials provided by device manufacturer.

c. Provide a written five year minimum warranty on all control components attached to luminaires against defect in workmanship or materials.

1.7 OPERATION AND MAINTENANCE MANUALS

1.7.1 Lighting System

Provide operation and maintenance manuals for the lighting system in

accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA that provide basic data relating to the design, operation, and maintenance of the lighting system for the building. Additional requirements for the Navy are provided in Section 01 78 24.00 20 FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI). Include the following:

a. Manufacturers' operating and maintenance manuals.

b. Luminaire shop drawings for modified and custom luminaires.

c. Luminaire Manufacturers' standard commercial warranty information as specified in paragraph LUMINAIRE WARRANTY.

PART 2 PRODUCTS

2.1 PRODUCT COORDINATION

2.2 LUMINAIRES

UL 1598, NEMA C82.77-10. Provide luminaires as indicated in the luminaire schedule and NL plates or details on project plans, complete with light source, wattage, and lumen output indicated. All luminaires of the same type must be provided by the same manufacturer. Luminaires must be specifically designed for use with the driver and light source provided.

2.2.1 Luminaires

UL 8750, ANSI/IES LM-79, ANSI/IES LM-80. For all luminaires, provide:

a. Complete system with LED drivers and light sources.

b. Housings constructed of non-corrosive materials. All new aluminum housings must be anodized or powder-coated. All new steel housings must be treated to be corrosion resistant.

c. ANSI/IES TM-21, ANSI/IES LM-80. Minimum L70 lumen maintenance value of 50,000 hours unless otherwise indicated in the luminaire schedule. Luminaire drive current value must be identical to that provided by test data for luminaire in question.

d. Minimum efficacy as specified in the luminaire schedule. Theoretical models of initial lamp lumens per watt are not acceptable. If efficacy values are not listed in the luminaire schedule, provide luminaires that meet the following minimum values:

Luminaire Style	Minimum Luminaire Efficacy
Recessed 1 by 4, 2 by 4, and 2 by 2	100 LPW
Recessed Downlight (fixed, adjustable, wallwash)	80 LPW
Linear, Accent (undercabinet, cove)	45 LPW
Linear, Ambient (indirect wall mount, linear pendent)	100 LPW
High Bay, Low Bay, and Industrial Locations	100 LPW

Luminaire Style	Minimum Luminaire Efficacy
Food Service and Hazardous Locations	60 LPW
Other (track, residential diffusers)	50 LPW
Exterior Wall Sconce	50 LPW
Steplight	30 LPW
Parking Garage Luminaire	100 LPW

e. UL listed for dry or damp location typical of interior installations. Any luminaire mounted on the exterior of the building must be UL listed for wet location typical of exterior installations.

f. LED driver and light source package, array, or module are accessible for service or replacement without removal or destruction of luminaire.

g. Lenses constructed of heat tempered borosilicate glass, UV-resistant acrylic, or silicone. Provide polycarbonate vandal-resistant lenses as indicated. Sandblasting, etching and polishing must be performed as indicated in the luminaire description.

h. ANSI/IES TM-15. Provide exterior building-mounted luminaires that do not exceed the BUG ratings as listed in the luminaire schedule. If BUG ratings are not listed in the luminaire schedule, provide luminaires that meet the following minimum values for each application and mounting conditions:

Lighting Application	Mounting Conditions	BUG Rating
Exterior Wall Sconce	Above 4 feet AFF	B1-U0-G2
Exterior Wall Sconce	Below or at 4 feet AFF	B4-U0-G4
Steplight	Above 4 feet AFF	B1-U1-G2
Steplight	Below or at 4 feet AFF	B4-U1-G4
Parking Garage Luminaire	Ceiling mounted	B4-U4-G3

2.2.1.1 Luminaire Conversion Kits

Provide luminaire conversion kits that meet UL 1598C Standard for Light-Emitting Diode (LED) Retrofit Luminaire Conversion Kits.

2.3 LIGHT SOURCES

NEMA ANSLG C78.377, NEMA SSL 3. Provide type, delivered lumen output, and wattage as indicated in the luminaire schedule on project plans.

2.3.1 LED Light Sources

Provide LED light sources that meet the following requirements:

a. NEMA ANSLG C78.377. Emit white light and have a nominal CCT of 3500 Kelvin.

b. Minimum Color Rendering Index (CRI) of 90.

c. Directive 2011/65/EU. Restriction of Hazardous Substances (RoHS) compliant.

d. Light source color consistency by utilizing a binning tolerance within a 3-step McAdam ellipse.

2.4 LED DRIVERS

NEMA SSL 1, UL 8750. Provide LED drivers that are electronic, UL Class 1 or Class 2, constant-current type and that comply with the following requirements:

a. The combined driver and LED light source system does not exceed the minimum luminaire efficacy values as listed in the luminaire schedule provided.

b. Operates at a voltage of 120-277 volts at 50/60 hertz, with input voltage fluctuations of plus/minus 10 percent.

c. Power Factor (PF) greater than or equal to 0.90 at full input power and across specified dimming range.

d. Maximum Total Harmonic Distortion (THD) less than 20 percent at full input power and across specified dimming range.

e. Operates for at least 50,000 hours at maximum case temperature and 90 percent non-condensing relative humidity.

f. Withstands Category A surges of 2 kV without impairment of performance. Provide surge protection that is integral to the driver.

g. Integral thermal protection that reduces the output power to protect the driver and light source from damage if the case temperature approaches or exceeds the driver's maximum operating temperature.

h. 47 CFR 15. Complies with the requirements of the Federal Communications Commission (FCC) rules and regulations, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).

i. Class A sound rating.

j. Directive 2011/65/EU. Restriction of Hazardous Substances (RoHS) compliant.

k. Provide dimming capability as indicated in the luminaire schedule on project plans. Dimmable drivers must dim down to 10 percent. Dimmable drivers must be controlled by a Class 2 low voltage 0-10VDC controller dimming signal protocol unless otherwise specified. LED drivers of the same family/series must track evenly across multiple luminaires at all light levels.

2.4.1 Remote LED Drivers

Provide remote LED Drivers that are UL listed for dry locations typical of interior installations. Provide LED driver in junction box or housing with mounting plate. Housing must allow for field connections to occur inside the housing or must contain mechanical connections.

2.5 LIGHTING CONTROLS

Provide lighting control systems that do not switch off battery-operated or emergency backup luminaires or exit signs in path of egress. Provide system with override of lighting control devices controlling luminaires in path of egress with activation of fire alarm system.

2.5.1 Devices

2.5.1.1 Switches

Provide line-voltage toggle switches as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. When used for non-digital loads, devices must be rated at 20 Amps inductive load, and be compatible with the lighting control systems.

2.5.1.2 Wall Box Dimmers

UL 1472, UL 20, IEEE C62.41, NEMA 77, NEMA SSL 7A. Dimmers must provide flicker-free, continuously variable light output throughout the dimming range of 10 percent to 100 percent. Devices must be capable of operating at their full rated capacity regardless of being single or ganged-mounted, and be compatible with three-way and four-way switching scenarios.

Provide wall-box dimmers that meet the following requirements:

a. Device operates as an independent control device.

b. Device operates with the use of a vertical slider, paddle, rotary, button, or toggle with adjacent vertical slider.

c. Finish of device matches switches and outlets in the same area.

d. Back box in wall has sufficient depth to accommodate body of switch and wiring.

e. Dimmer is capable of controlling 0-10 volt LED drivers. Dimmers and the drivers they control must be provided from the same manufacturer or tested and certified as compatible for use together.

f. Radio frequency interference suppression is integral to device.

2.5.1.3 Occupancy/Vacancy Sensors

IEEE C62.41, NEMA WD 1, UL 94, UL 916, UL 508, ASTM D4674 REV A, NEMA WD 7. Provide occupancy/vacancy sensors with coverage patterns as indicated on project plans. Provide no less quantity of sensors as shown on plans, but add additional sensors when required to fulfill coverage requirement for the specific model of sensor provided. Provide occupancy sensor operation that requires movement to activate luminaires controlled and turns luminaires off after a set time of inactivity. Provide ceiling or

wall-mounted occupancy/vacancy sensors that meet the following requirements:

a. Operating voltage of 12-24120-277 volts.

b. Time delay of 30 seconds to 30 minutes with at least four intermediate time delay settings.

c. Sensors are ceiling mountedwall-box mounted.

d. No minimum load requirement and be capable of switching from zero to 800 W at 120 VAC, 50/60 Hz and from zero to 1200 W at 277 VAC, 50/60 Hz.

e. Shielded or controlled by internal logic to adjust sensitivity to avoid false triggering due to ambient temperature, air temperature variations or HVAC air movement.

f. Sensor is equipped to automatically energize the connected load upon loss of normal power when located in a means of egress.

g. Occupancy and vacancy operation is field-adjustable and programmable with push-button or dip switch on the sensor device.

h. No leakage current to load when in the off mode.

i. Utilize zero-crossing circuitry to prevent damage from high inrush current and to promote long life operation.

2.5.1.3.1 Dual Technology Sensors

Provide dual technology sensors that meet the requirements for PIR sensors and ultrasonic sensors indicated above. If either the PIR or ultrasonic sensing registers occupancy, the luminaires must remain on.

2.5.1.3.2 Power Packs

UL 2043. Provide power packs to provide power to lighting control sensors as required in accordance with the manufacturer's specifications. Provide power packs that meet the following requirements:

a. Operate at an input voltage of 120-277 VAC, with an output voltage 12-24 VDC at 225 mA.

b. Constructed of plenum-rated, high-impact thermoplastic enclosure.

c. Utilizes zero-crossing circuitry to prevent damage from inrush current.

d. Maximum load rating of 16 amps for electronic LED lighting loads.

e. Directive 2011/65/EU. Restriction of Hazardous Substances (RoHS) compliant.

2.5.1.4 Time Clocks

UL 917, NEMA ICS 6. House time clock in a surface-mounted, lockable, NEMA 1 enclosure constructed of painted steel or plastic polymer. Provide electronic type time clock that meets the following criteria:

a. Astronomic programming function, providing a total of 96 on/off set points.

b. 24 hour type digital clock display format.

c. Power outage back-up for time clock utilizing lithium battery which provides coverage for a minimum of seven days.

d. Capable of controlling a minimum of 4 channels or loads.

e. Contacts are rated for 30 amps at 120-277 VAC resistive load in a SPST normally open (NO) configuration.

f. Contains function that allows automatic control to be skipped on certain selected days of the weekmanual bypass or remote override controldaylight savings time automatic adjustmentEEPROM memory module momentary function for output contactsability for photosensor input.

2.6 EXIT AND EMERGENCY LIGHTING EQUIPMENT

2.6.1 Exit Signs

UL 924, NFPA 101. Provide wattage as indicated in the luminaire schedule on project plans. Provide LED Exit Signs that meet the following criteria:

a. Housing constructed of UV-stable, thermo-plastic.

b. UL listed for damp location.

c. Configured for universal mounting.

d. 6 inch high, 3/4 inch stroke red lettering on face of sign with chevrons on either side of lettering to indicate direction.

e. Single or double face as indicated in project plans and luminaire schedule.

2.6.1.1 Exit Signs with Battery Backup

Equip with automatic power failure device, test switch, and pilot light, and fully automatic high/low trickle charger in a self-contained power pack. Battery must be sealed, maintenance free nickel-cadmium type, and must operate unattended for a period of not less than five years. Emergency run time must be a minimum of 1-1/2 hours. LEDs must have a minimum rated life of 10 years. Provide self-diagnostic circuitry integral to emergency LED driver. In lieu of battery, can use a nonradioactive photoluminescent plate.

2.6.1.2 Remote-Powered Exit Signs

Provide exit sign that contains provision for 120-277 VAC input from remote source.

2.6.2 Emergency Lighting Unit (ELU)

UL 924, NFPA 101. Provide emergency lighting units (ELUs) completely assembled with wiring and mounting devices, ready for installation at the locations indicated. Provide in UV-stable, thermo-plastic housing with UL damp label as indicated. Emergency lighting units must be rated for 12

volts, except units having no remote-mounted light sources and having no more than two unit-mounted light sources may be rated six volts. Equip units with brown-out sensitive circuit to activate battery when input voltage falls to 75 percent of normal. Equip with two LED light sources, automatic power failure device, test switch, and pilot light, and fully automatic high/low trickle charger in a self-contained power pack. Battery must be sealed, maintenance free nickel-cadmium type, and must operate unattended for a period of not less than five years. Emergency run time must be a minimum of 90 minutes. LEDs must have a minimum rated life of 10 years. Provide self-diagnostic circuitry integral to emergency LED driver.

2.6.3 LED Emergency Drivers

UL 924, NFPA 101. Provide LED emergency driver with automatic power failure detection, test switch and LED indicator (or combination switch/indicator) located on luminaire exterior, and fully-automatic solid-state charger, battery and inverter integral to a self-contained housing. Provide self-diagnostic function integral to emergency driver. Integral nickel-cadmium battery is required to supply a minimum of 90 minutes of emergency power at 7 watts, 10-50 VDC, constant output. Driver must be RoHS compliant, rated for installation in plenum-rated spaces and damp locations, and be warranted for a minimum of five years.

2.6.4 Self-Diagnostic Circuitry for LED Drivers

UL 924, NFPA 101. Provide emergency lighting unit with fully-automatic, integral self-testing/diagnostic electronic circuitry. Circuitry must provide for a one minute diagnostic test every 28 days, and a 30 minute diagnostic test every six months, minimum. Any malfunction of the unit must be indicated by LED(s) visible from the exterior of the luminaire. A manual test switch must also be provided to perform a diagnostic test at any given time.

2.7 LUMINAIRE MOUNTING ACCESSORIES

2.7.1 Suspended Luminaires

a. Provide hangers capable of supporting twice the combined weight of luminaires supported by hangers.

b. Hangers must allow luminaires to swing within an angle of 45 degrees. Brace pendents 4 feet or longer to limit swinging.

c. Single-unit suspended luminaires must have cabletwin-stem hangers. Multiple-unit or continuous row luminaires with a separate power supply cord must have a tubing or stem for wiring at one point and a tubing or rod suspension provided for each unit length of chassis, including one at each end.

d. Provide all linear pendent and surface mounted luminaires with two supports per four-foot section or three per eight-foot section unless otherwise recommended by manufacturer.

e. Provide rods in minimum 0.18 inch diameter.

2.7.2 Recess and Surface Mounted Luminaires

Provide access to light source and LED driver from bottom of luminaire.

Provide trim and lenses for the exposed surface of flush-mounted luminaires as indicated on project drawings and specifications. Luminaires recessed in ceilings which have a fire resistive rating of one hour or more must be enclosed in a box which has a fire resistive rating equal to that of the ceiling. For surface mounted luminaires with brackets, provide flanged metal stem attached to outlet box, with threaded end suitable for supporting the luminaire rigidly in design position. Flanged part of luminaire stud must be of broad base type, secured to outlet box at not fewer than three points.

2.7.3 Luminaire Support Hardware

2.7.3.1 Wire

ASTM A641/A641M. Galvanized, soft tempered steel, minimum 0.11 inches in diameter, or galvanized, braided steel, minimum 0.08 inches in diameter.

2.7.3.2 Wire for Humid Spaces

ASTM A580/A580M. Composition 302 or 304, annealed stainless steel, minimum 0.11 inches in diameter.

ASTM B164. UNS NO4400, annealed nickel-copper alloy, minimum 0.11 inches in diameter.

2.7.3.3 Threaded Rods

Threaded steel rods, 3/16 inch diameter, zinc or cadmium coated.

2.7.3.4 Straps

Galvanized steel, one by 3/16 inch, conforming to ASTM A653/A653M, with a light commercial zinc coating or ASTM A1008/A1008M with an electrodeposited zinc coating conforming to ASTM B633, Type RS.

2.8 EQUIPMENT IDENTIFICATION

2.8.1 Manufacturer's Nameplate

Each item of equipment must have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.8.2 Labels

UL 1598. All luminaires must be clearly marked for operation of specific light sources and LED drivers. The labels must be easy to read when standing next to the equipment, and durable to match the life of the equipment to which they are attached. Note the following light source characteristics in the format "Use Only _____":

a. Correlated Color Temperature (CCT) and Color Rendering Index (CRI) for all luminaires.

b. Driver and dimming protocol.

All markings related to light source type must be clear and located to be readily visible to service personnel, but unseen from normal viewing

angles when light sources are in place. LED drivers must have clear markings indicating dimming type and indicate proper terminals for the various outputs.

2.9 FACTORY APPLIED FINISH

NEMA 250. Provide all luminaires and lighting equipment with factory-applied painting system that as a minimum, meets requirements of corrosion-resistance testing.

PART 3 EXECUTION

3.1 INSTALLATION

IEEE C2, NFPA 70.

3.1.1 Light Sources

When light sources are not provided as an integral part of the luminaire, deliver light sources of the type, wattage, lumen output, color temperature (CCT), color rendering index (CRI), and voltage rating indicated to the project site and install just prior to project completion, if not already installed in the luminaires from the factory.

3.1.2 Luminaires

Set luminaires plumb, square, and level with ceiling and walls, in alignment with adjacent luminaires and secure in accordance with manufacturers' directions and approved drawings. Provide accessories as required for ceiling construction type indicated on Finish Schedule. Luminaire catalog numbers do not necessarily denote specific mounting accessories for type of ceiling in which a luminaire may be installed. Provide wires, straps, or rods for luminaire support in this section. Install luminaires with vent holes free of air blocking obstacles.

3.1.2.1 Suspended Luminaires

Measure mounting heights from the bottom of the luminaire for ceiling-mounted luminaires and to center of luminaire for wall-mounted luminaires. Obtain architect approval of the exact mounting height on the job before commencing installation and, where applicable, after coordinating with the type, style, and pattern of the ceiling being installed. Support suspended luminaires from structural framework of ceiling or from inserts cast into slab.

a. Provide suspended luminaires with 45 degree swivel hangers so that they hang plumb and level.

b. Locate so that there are no obstructions within the 45 degree range in all directions.

c. The stem, canopy and luminaire must be capable of 45 degree swing.

d. Rigid pendent stem, aircraft cable, rods, or chains 4 feet or longer excluding luminaire must be braced to prevent swaying using three cables at 120 degree separation.

e. Suspended luminaires in continuous rows must have internal wireway systems for end to end wiring and must be properly aligned to provide

a straight and continuous row without bends, gaps, light leaks or filler pieces.

f. Utilize aligning splines on extruded aluminum luminaires to assure minimal hairline joints.

g. Support steel luminaires to prevent "oil-canning" effects.

h. Match supporting pendents with supported luminaire. Aircraft cable must be stainless steel.

i. Match finish of canopies to match the ceiling, and provide low profile canopies unless otherwise shown.

j. Maximum distance between suspension points must be 10 feet or as recommended by the manufacturer, whichever is less.

3.1.2.2 Recessed and Semi-Recessed Luminaires

a. Support recessed and semi-recessed luminaires independently from the building structure by a minimum of two wires, straps or rods per luminaire and located near opposite corners of the luminaire. Secure horizontal movement with clips provided by manufacturer. Ceiling grid clips are not allowed as an alternative to independently supported luminaires.

b. Support round luminaires or luminaires smaller in size than the ceiling grid independently from the building structure by a minimum of four wires, straps or rods per luminaire, spaced approximately equidistant around.

c. Do not support luminaires by acoustical tile ceiling panels.

d. Where luminaires of sizes less than the ceiling grid are indicated to be centered in the acoustical panel, support each independently and provide at least two 3/4 inch metal channels spanning, and secured to, the ceiling tees for centering and aligning the luminaire.

f. Adjust aperture rings on all applicable ceiling recessed luminaires to accommodate various ceiling material thickness. Coordinate cut-out size in ceiling to ensure aperture covers cut-out entirely. Install aperture rings such that the bottom of the ring is flush with finished ceiling or not more than 1/16 inch above. Do not install luminaires such that the aperture ring extends below the finished ceiling surface.

g. For luminaire recessed in plaster ceilings, provide plaster frames for setting. Install setting such that the bottom of the frame is flush with finished ceiling. Support luminaires with plaster frames utilizing yokes or leveling lugs. Do not mount luminaires or support elements to ducts or pipes. Yokes must support a luminaire by no fewer than two bolts each.

3.1.3 LED Drivers

Provide LED drivers integral to luminaire as constructed by the manufacturer.

3.1.3.1 Remote LED Drivers

Locate Remote LED Drivers within the maximum distance allowed to minimize voltage drop. Do not locate remote LED drivers further from the light source than specified by the manufacturer. Locate remote LED drivers in dry, well-ventilated, and accessible location, above accessible ceilings or behind a removable wall or ceiling panel. Mount housing or junction box so that it is rigidly and securely fastened in place. Install LED drivers such that components are not in contact with combustible materials unless listed for such condition. Remote LED drivers must be grounded in accordance with NFPA 70.

Provide separate compartments for Class 2 wiring connections and for Class 1 wiring connections. Separation must be barrier-type within the same box or separate boxes with close connector conduit fittings. Field connections must be inside housing or junction box or secured by a quick disconnect wire connector.

3.1.4 Exit Signs

NFPA 101. Wire exit signs and emergency lighting units ahead of the local switch, to the normal lighting circuit located in the same room or area.

Connect exit signs on separate circuits and serve from a separate circuit breaker. Provide only one source of control, which would be the separate circuit breaker. Paint source of control red and provide lockout capability.

3.1.5 Lighting Controls

Refer below for additional lighting control installation requirements.

3.1.5.1 Occupancy/Vacancy Sensors

a. Provide quantity of sensor units indicated as a minimum. Provide additional units to give full coverage over controlled area. Full coverage must provide hand and arm motion detection for office and administration type areas and walking motion for industrial areas, warehouses, storage rooms and hallways.

b. Locate ceiling-mounted sensors no closer than 6 feet from the nearest HVAC supply or return diffuser.

c. Locate the sensor(s) as indicated and in accordance with the manufacturer's recommendations.

3.2 FIELD QUALITY CONTROL

3.2.1 Tests

3.2.1.1 Lighting Control Verification Tests

Verify lighting control system and devices operate according to approved sequence of operations. Verification tests are to be completed after commissioning.

a. Verify occupancy/vacancy sensors operate as described in sequence of operations. Provide testing of sensor coverage, sensitivity, and time-out settings in all spaces where sensors are placed. This is to

be completed only after all furnishings have been installed. Submit occupancy/vacancy sensor verification test.

b. Verify photosensors operate as described in sequence of operations. Provide testing of sensor coverage, aiming, and calibration in all spaces where sensors are placed. This is to be completed only after all furnishings have been installed. Submit photosensor verification test.

c. Verify wall box dimmers and scene wallstations operate as described in sequence of operations.

3.2.1.2 Emergency Lighting Test

Interrupt power supply to demonstrate proper operation of emergency lighting. If adjustments are made to the lighting system, re-test system to show compliance with standards.

3.3 CLOSEOUT ACTIVITIES

3.3.1 Training

3.3.1.1 End-User Training

Submit an End-User Training Plan at least 30 calendar days prior to training session that describes training procedures for end-users on the lighting control system. Provide users with a list of control devices located within user-occupied spaces, such as photosensors and occupancy and vacancy sensors, including information on the proper operation and schedule for each device. Provide demonstration for each type of interface. Provide users with the building schedule as currently commissioned, including conditional programming based on astronomic time clock functionality. Provide users with the correct contact information for maintenance personnel who will be available to address any lighting control issues.

Provide laminated instructions to the user at each scene wallstation. Provide only instructions relevant to the functionality of the specific scene wallstation. Provide a description of each labeled scene control button. If the room utilizes occupancy/vacancy sensors or photosensors, include a description of this functionality on the instruction sheet.

-- End of Section --

SECTION 26 56 00

EXTERIOR LIGHTING
08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus

EUROPEAN UNION (EU)

Directive 2011/65/EU	(2011) Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

ILLUMINATING ENGINEERING SOCIETY (IES)

ANSI/IES LM-79	(2019) Approved Method: Electrical and Photometric Measurements of Solid State Lighting Products
ANSI/IES LM-80	(2020) Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules
ANSI/IES LS-1	(2020) Lighting Science: Nomenclature and Definitions for Illuminating Engineering
ANSI/IES RP-8	(2018; Addenda 1 2020; Errata 1-2 2021) Recommended Practice for Design and Maintenance of Roadway and Parking Facility Lighting
ANSI/IES TM-15	(2020) Technical Memorandum: Luminaire Classification System for Outdoor Luminaires
ANSI/IES TM-21	(2021) Technical Memorandum: Projecting Long-TermLuminous, Photon, and Radiant Flux Maintenance of LED Light Sources
IES Lighting Library	IES Lighting Library

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
IEEE C62.41.2	(2002) Recommended Practice on

	Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C136.3	(2020) Roadway and Area Lighting Equipment - Luminaire Attachments
NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA ANSLG C78.377	(2017) Electric Lamps— Specifications for the Chromaticity of Solid State Lighting Products
NEMA C82.77-10	(2020) Harmonic Emission Limits - Related Power Quality Requirements
NEMA C136.10	(2017) American National Standard for Roadway and Area Lighting Equipment-Locking-Type Photocontrol Devices and Mating Receptacles--Physical and Electrical Interchangeability and Testing
NEMA C136.31	(2018) Roadway and Area Lighting Equipment - Luminaire Vibration
NEMA ICS 2	(2000; R 2020) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 V
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA SSL 1	(2016) Electronic Drivers for LED Devices, Arrays, or Systems
NEMA SSL 3	(2011) High-Power White LED Binning for General Illumination

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

UNDERWRITERS LABORATORIES (UL)

UL 773	(2016; Reprint Jul 2020) UL Standard for Safety Plug-In, Locking Type Photocontrols for Use with Area Lighting
UL 773A	(2016; Reprint Jun 2020) UL Standard for Safety Nonindustrial Photoelectric Switches for Lighting Control
UL 1310	(2018; Reprint Jun 2022) UL Standard for

	Safety Class 2 Power Units
UL 1598	(2021; Reprint Jun 2021) Luminaires
UL 8750	(2015; Reprint Sep 2021) UL Standard for Safety Light Emitting Diode (LED) Equipment for Use in Lighting Products

1.2 RELATED REQUIREMENTS

Materials not considered to be luminaires, luminaire accessories, or lighting equipment are specified in Section(s) 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION . Luminaires and accessories installed in interior of buildings or attached to the exterior of a building are specified in Section 26 51 00 INTERIOR LIGHTING.

1.3 DEFINITIONS

a. Unless otherwise specified or indicated, electrical and electronics terms used in these specifications and on the drawings must be as defined in IEEE 100 and ANSI/IES LS-1.

b. For LED luminaire light sources, "Useful Life" is the operating hours before reaching 70 percent of the initial rated lumen output (L70) with no catastrophic failures under normal operating conditions. This is also known as 70 percent "Rated Lumen Maintenance Life" as defined in ANSI/IES LM-80.

c. For LED luminaires, "Luminaire Efficacy" (LE) is the appropriate measure of energy efficiency, measured in lumens/watt. This is gathered from LM-79 data for the luminaire, in which absolute photometry is used to measure the lumen output of the luminaire as one entity, not the source separately and then the source and housing together.

d. Total Harmonic Distortion (THD) is the Root Mean Square (RMS) of all the harmonic components divided by the total fundamental current.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Luminaire Drawings; G

SD-03 Product Data

Luminaires; G

Light Sources; G

LED Drivers; G

Luminaire Warranty; G

Lighting Controls Warranty; G

Photosensors; G

Time Clock; G

Lighting Contactor; G

SD-05 Design Data

Luminaire Design Data; G

SD-06 Test Reports

ANSI/IES LM-79 Test Report; G

ANSI/IES LM-80 Test Report; G

ANSI/IES TM-21 Test Report; G

SD-10 Operation and Maintenance Data

Lighting System, Data Package 5; G

End-User Training Plan; G

1.5 QUALITY ASSURANCE

Data, drawings, and reports must employ the terminology, classifications and methods prescribed by the IES Lighting Library as applicable, for the lighting system specified.

1.5.1 Drawing Requirements

1.5.1.1 Luminaire Drawings

Include dimensions, effective projected area (EPA), weight, accessories, and installation and construction details. Photometric data, including CRI, CCT, TM-15-11 BUG rating, LED driver type, zonal lumen data, and candlepower distribution data per LM-79 must accompany shop drawings.

1.5.2 Luminaire Design Data

a. Provide distribution data according to IES classification type as defined in IES Lighting Library and ANSI/IES RP-8.

b. B.U.G. rating for the installed position as defined by ANSI/IES TM-15 and shielding as defined by ANSI/IES RP-8.

c. Provide safety certification and file number for the luminaire family. Include listing, labeling and identification in accordance with NFPA 70 (NEC). Applicable testing bodies are determined by the US Occupational Safety Health Administration (OSHA) as Nationally Recognized Testing Laboratories (NRTL) and include: CSA (Canadian Standards Association), ETL (Edison Testing Laboratory), and UL (Underwriters Laboratories).

d. Provide long term lumen maintenance projections for each LED luminaire in accordance with ANSI/IES TM-21. Data used for projections must be obtained from testing in accordance with ANSI/IES LM-80.

e. Provide wind loading calculations for luminaires mounted on poles. Weight and effective projected area (EPA) of luminaires and mounting brackets must not exceed maximum rating of pole as installed in particular wind zone area.

1.5.3 ANSI/IES LM-79 Test Report

Submit test report on manufacturer's standard production model of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data as outlined under "14.0 Test Report" in ANSI/IES LM-79.

1.5.4 ANSI/IES LM-80 Test Report

Submit report on manufacturer's standard production LED light source (package, array, or module) of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data as outlined under "8.0 Test Report" in ANSI/IES LM-80.

1.5.5 ANSI/IES TM-21 Test Report

Submit test report on manufacturer's standard production LED light source (package, array or module) of specified luminaire. Testing must be performed at the same operating drive current as specified luminaire. Include all applicable and required data, as well as required interpolation information as outlined under "7.0 Report" in ANSI/IES TM-21.

1.5.6 Test Laboratories

Test laboratories for the ANSI/IES LM-79 and ANSI/IES LM-80 test reports must be one of the following:

a. National Voluntary Laboratory Accreditation Program (NVLAP) accredited for solid-state lighting testing as part of the Energy-Efficient Lighting Products laboratory accreditation program.

b. One of the qualified labs listed on the Department of Energy - Energy Efficiency & Renewable Energy, Solid-State Lighting web site.

c. One of the EPA-Recognized Laboratories listed at for LM-80 testing.

1.5.7 Regulatory Requirements

Equipment, materials, installation, and workmanship must be in accordance with the mandatory provisions of NFPA 70 unless more stringent requirements are specified or indicated. Provide luminaires and assembled components that are approved by and bear the label of UL for the applicable location and conditions unless otherwise specified.

1.5.8 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products must have been in satisfactory commercial or industrial use for six months prior to bid opening. The six-month period must include applications of equipment and materials under similar circumstances and of similar size. The product must have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the six-month period. Where two or more items of the same class of equipment are required, these items must be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.8.1 Alternative Qualifications

Products having less than a six-month field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.8.2 Material and Equipment Manufacturing Date

Do not use products manufactured more than six months prior to date of delivery to site, unless specified otherwise.

1.6 DELIVERY, STORAGE, AND HANDLING OF POLES

1.7 WARRANTY

Support all equipment items by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.7.1 Luminaire Warranty

Provide and transfer to the government the original LED luminaire manufacturers standard commercial warranty for each different luminaire manufacturer used in the project.

a. Provide a written five year minimum replacement warranty for material, luminaire finish, and workmanship. Provide written warranty document that contains all warranty processing information needed, including customer service point of contact, whether or not a return authorization number is required, return shipping information, and closest return location to the luminaire location.

(1) Finish warranty must include failure and substantial deterioration such as blistering, cracking, peeling, chalking, or fading.

(2) Material warranty must include:

(a) All LED drivers and integral control equipment.

(b) Replacement when more than 15 percent of LED sources in any lightbar or subassembly(s) are defective, non-starting, or operating below 70 percent of specified lumen output.

b. Warranty period must begin in accordance with the manufacturer's standard warranty starting date.

c. Provide replacements that are promptly shipped, without charge, to the using Government facility point of contact and that are identical to or an improvement upon the original equipment. All replacements must include testing of new components and installation.

1.7.2 Lighting Controls Warranty

Provide and transfer to the government the original lighting controls manufacturers standard commercial warranty for each different lighting controls manufacturer used in the project. Warranty coverage must begin from date of final system commissioning or three months from date of delivery, whichever is the earliest. Warranty service must be performed by a factory-trained engineer or technician.

a. Unless otherwise noted, provide a written five year minimum warranty on the complete system for all systems with factory commissioning. Provide warranty that covers 100 percent of the cost of any replacement parts and services required over the five years which are directly attributable to the product failure. Failures include, but are not limited to, the following:

(1) Software: Failure of input/output to execute switching or dimming commands.

(2) Damage of electronic components due to transient voltage surges.

(3) Failure of control devices, including but not limited to photosensors and motion sensors.

b. Provide a written five year minimum warranty on all input devices against defect in workmanship or materials provided by device manufacturer.

c. Provide a written five year minimum warranty on all control components attached to luminaires against defect in workmanship or materials.

1.8 OPERATION AND MAINTENANCE MANUALS

1.8.1 Lighting System

Provide operation and maintenance manuals for the lighting system in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA that provide basic data relating to the design, operation, and maintenance of the lighting system. Additional requirements for the Navy are provided in

Section 01 78 24.00 20 FACILITY ELECTRONIC OPERATION AND MAINTENANCE SUPPORT INFORMATION (eOMSI). Include the following:

a. Manufacturers' operating and maintenance manuals.

b. Luminaire shop drawings for modified and custom luminaires.

c. Luminaire Manufacturers' standard commercial warranty information as specified in paragraph LUMINAIRE WARRANTY.

PART 2 PRODUCTS

2.1 PRODUCT COORDINATION

2.2 LUMINAIRES

UL 1598, NEMA C82.77-10. Provide luminaires as indicated in the luminaire schedule and XL plates or details on project plans, complete with light source, wattage, and lumen output indicated. All luminaires of the same type must be provided by the same manufacturer. Luminaires must be specifically designed for use with the LED driver and light source provided.

2.2.1 Luminaires

UL 8750, ANSI/IES LM-79, ANSI/IES LM-80. For all luminaires, provide:

a. Complete system with LED drivers and light sources.

b. Housing constructed of non-corrosive materials. All new aluminum housings must be anodized or powder-coated. All new steel housings must be treated to be corrosion resistant.

c. ANSI/IES TM-21, ANSI/IES LM-80. Minimum L70 lumen maintenance value of 50,000 hours unless otherwise indicated in the luminaire schedule. Luminaire drive current value must be identical to that provided by test data for luminaire in question.

d. Minimum efficacy as specified in the luminaire schedule. Theoretical models of initial lamp lumens per watt are not acceptable. If efficacy values are not listed in the luminaire schedule, provide luminaires that meet the following minimum values:

Luminaire Style	Minimum Luminaire Efficacy
Area and Roadway (pole mounted, arm mounted)	119 LPW
Pedestrian Post-Top (pole mounted, arm mounted)	97 LPW
Bollard	45 LPW
Accent (adjustable landscape, sign lighting)	35 LPW
Linear Accent (facade, wallwash)	80 LPW

Luminaire Style	Minimum Luminaire Efficacy
Exterior Wall Sconce	50 LPW
Steplight	30 LPW
Parking Garage Luminaire	113 LPW

e. Product rated for operation within an ambient temperature range of minus 22 degrees F to 122 degrees F.

f. UL listed for wet locations.

g. IES Lighting Library. Light distribution and NEMA field angle classifications as indicated in luminaire schedule on project plans.

h. Housing finish that is baked-on enamel, anodized, or baked-on powder coat paint. Finish must be capable of surviving ASTM B117 salt fog environment testing for 2500 hours minimum without blistering or peeling.

i. LED driver and light source package, array, or module are accessible for service or replacement without removal or destruction of luminaire.

j. ANSI/IES TM-15. Does not exceed the BUG ratings as listed in the luminaire schedule.. If BUG ratings are not listed in the luminaire schedule, provide luminaires that meet the following minimum values for each application and mounting conditions:

Lighting Application	Mounting Conditions	BUG Rating
Area and Roadway	All	B3-U0-G3
Pedestrian Post-Top	All	B2-U1-G1
Exterior Wall Sconce	Above 4 feet AFF	B1-U0-G2
Exterior Wall Sconce	Below or at 4 feet AFF	B4-U0-G4
Steplight	Above 4 feet AFF	B1-U1-G2
Steplight	Below or at 4 feet AFF	B4-U1-G4
Parking Garage Luminaire	Ceiling mounted	B4-U4-G3

k. Fully assembled and electrically tested prior to shipment from factory.

l. Finish color is as indicated in the luminaire schedule or detail on the project plans.

m. Lenses constructed of clearfrosted tempered glass or UV-resistant acrylic. Provide polycarbonate vandal-resistant lenses.

n. All factory electrical connections are made using crimp, locking, or latching style connectors. Twist-style wire nuts are not acceptable.

o. NEMA C136.31. Comply with 3G vibration testing.

p. Luminaire arm bolts constructed from 304 stainless steel or zinc-plated steel.

q. Wiring compartment on pole-mounted, street and area luminaires is accessible without the use of hand tools to manipulate small screws, bolts, or hardware.

r. Incorporate modular electrical connections, and construct luminaires to allow replacement of all or any part of the optics, heat sinks, LED drivers, surge suppressors and other electrical components using only a simple tool, such as a manual or cordless electric screwdriver.

s. ANSI C136.3. For all roadway and area luminaires, provide products with an integral tilt adjustment of plus or minus 5 degrees to allow the unit to be leveled.

2.3 LIGHT SOURCES

NEMA ANSLG C78.377, NEMA SSL 3. Provide type, lumen rating, and wattage as indicated in luminaire schedule on project plans.

2.3.1 LED Light Sources

Provide LED light sources that meet the following requirements:

a. NEMA ANSLG C78.377. Emit white light and have a nominal Correlated Color Temperature (CCT) of 4000 Kelvin.

b. Minimum Color Rendering Index (CRI) of 80.

c. Directive 2011/65/EU. Restriction of Hazardous Substances (RoHS) compliant.

d. Light source color consistency by utilizing a binning tolerance within a 4-step McAdam ellipse.

2.4 LED DRIVERS

NEMA SSL 1, UL 1310. Provide LED Drivers that are electronic, UL Class 1 or Class 2, constant-current type and meet the following requirements:

a. The combined LED driver and LED light source system is greater than or equal to the minimum luminaire efficacy values as listed in the luminaire schedule provided.

b. Operate at a voltage of 120-277 volts at 50/60 hertz, with input voltage fluctuations of plus or minus 10 percent.

c. Power Factor (PF) greater than or equal to 0.90 at full input power and across specified dimming range.

d. Maximum Total Harmonic Distortion (THD) less than or equal to 20 percent at full input power and across specified dimming range.

e. Operates for at least 50,000 hours at maximum case temperature and 90 percent non-condensing relative humidity.

f. Meets the "Elevated" (10kV/10kA) requirements per IEEE C62.41.2 -2002. Manufacturer must indicate whether failure of the electrical immunity system can possibly result in disconnect of power to luminaire. Provide surge protection that is integral to the LED driver.

g. Contains integral thermal protection that reduces the output power to protect the driver and light source from damage if the case temperature approaches or exceeds the driver's maximum operating temperature.

h. Complies with the requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 15, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).

i. Class A sound rating for all drivers mounted under a covered structure, such as a canopy, or where otherwise appropriate.

j. Directive 2011/65/EU. Restriction of Hazardous Substances (RoHS) compliant.

k. UL listed for wet locations typical of exterior installations.

l. Non-dimmable.

m. Rated to operate between ambient temperatures of minus 22 degrees F and 104 degrees F 122 degrees F.

2.4.1 Remote LED Drivers

Provide remote LED Drivers that are UL listed for wet locations typical of exterior installations.

2.5 LIGHTING CONTROLS

Provide a control system interface within each luminaire that is compatible with the energy management or control system used by the utility department in charge of the project area for control of site lighting.

2.5.1 Devices

2.5.1.1 Time Clock

NEMA ICS 6. House time clock in a surface-mounted, lockable NEMA 1 enclosure constructed of painted steel or plastic polymer. Provide electronic type time clock that meets the following criteria:

a. astronomic programming function, providing a total of 56 on/off set points.

b. 24 hour type digital clock display format.

c. Power outage back-up for switch utilizing lithium battery which provides coverage for a minimum of seven days.

d. Capable of controlling a minimum of 4 channels or loads.

e. Contacts are rated for 30 amps at 120-277 VAC resistive load in a SPST

normally open (NO) configuration.

f. Contains function that allows automatic control to be skipped on certain selected days of the weekmanual bypass or remote override controldaylight savings time automatic adjustmentEEPROM memory module momentary function for output contactsability for photosensor input.

2.5.1.2 Photosensors

UL 773, UL 773A. Provide Photosensors that meet the following requirements:

a. Hermetically sealed, silicon diode light sensor type, rated at watts, volts, 50/60 Hz with single-pole, single-throw contacts.

b. Turns ON at 1 to 3 footcandles and turns OFF at 3 to 15 footcandles.

c. Designed to fail to the ON position.

d. Housing is constructed of UV stabilized polypropylene, rated to operate within a temperature range of minus 40 to 158 degrees F.

e. Time delay that prevents accidental switching from transient light sources.

f. Directional lens in front of the cell to prevent fixed light sources from creating a turnoff condition.

g. Designed for 20-year service to match life expectancy of long-life LED fixtures and exceed 15,000 operations at full load. Provide photosensors with zero-cross technology to withstand severe in-rush current and extend relay life.

h. Swivel base type housing with 1/2 in threaded base for mounting to a junction box or conduit.

i. NEMA C136.10. Twist-lock receptacle type. Provide with solid brass prongs and voltage markings and color coding on exterior of housing.

j. Provide photosensors with metal oxide varistor (MOV) type surge protection.

2.5.1.3 Lighting Contactor

NEMA ICS 2. Provide a mechanically-held lighting contactor housed in a NEMA 1 enclosure conforming to NEMA ICS 6. Contactor must have 6 poles, configured as normally open (NO). Contacts must be rated 600 volts, 30 amperes for a resistive load. Coil operating voltage must be 120 volts. Contactor must have silver cadmium oxide double-break contacts and coil clearing contacts for mechanically held contactors and must require no arcing contacts. Provide contactor with hand-off-automatic on-off selector switch. Provide contactor as specified above along with circuit breaker in integral NEMA 1 enclosure with flange-mounted handle to satisfy requirement for a "combination lighting contactor" when specified.

2.6 EQUIPMENT IDENTIFICATION

2.6.1 Manufacturer's Nameplate

Each item of equipment must have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.6.2 Labels

UL 1598. Luminaires must be clearly marked for operation of specific light sources and drivers according to proper light source type. Note the following luminaire characteristics in the format "Use Only _____":

a. Correlated color temperature (CCT) and color rendering index (CRI) for all luminaires.

b. Driver and dimming protocol.

Markings related to light source type must be clear and located to be readily visible to service personnel, but unseen from normal viewing angles when light sources are in place. LED drivers must have clear markings indicating dimming type and indicate proper terminals for the various outputs.

2.7 FACTORY APPLIED FINISH

NEMA 250. Provide all luminaires and lighting equipment with factory-applied painting system that as a minimum meets requirements of corrosion-resistance testing.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Luminaires

Install all luminaires in accordance with the luminaire manufacturer's written instructions. Install all luminaires at locations and heights as indicated on the project plans. Level all luminaires in accordance to manufacturer's written instructions.

3.1.2 LED Drivers

Provide LED drivers integral to luminaire as constructed by the manufacturer.

3.1.2.1 Remote LED Drivers

Locate Remote LED Drivers within the maximum distance allowed to reduce voltage drop. Do not locate remote LED drivers further from the light source than specified by the manufacturer. Locate remote LED drivers in dry, well-ventilated, and accessible location, or in accessible IP68-rated enclosure. Provide separate compartments for Class 2 wiring connections and for Class 1 wiring connections. Separation must be barrier-type within the same box or separate boxes with close connector conduit fittings. Field connections must be inside housing or junction box or secured by a quick disconnect wire connector suitable for wet-location.

Remote LED drivers must be electronically grounded in accordance with NFPA 70.

3.1.3 Lighting Controls

Refer below for additional lighting control installation requirements.

3.1.3.1 Photosensors

Aim photosensor according to manufacturer's recommendations. Mount sensor on or beside each luminaire when switch is provided in cast weatherproof aluminum housing with swivel arm.

3.1.4 Grounding

Ground noncurrent-carrying parts of equipment including metal poles, luminaires, mounting arms, brackets, and metallic enclosures as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION. Where copper grounding conductor is connected to a metal other than copper, provide specially treated or lined connectors suitable for this purpose.

3.2 FIELD QUALITY CONTROL

3.2.1 Tests

Upon completion of installation, verify that equipment is properly installed, connected, and adjusted. Perform initial operational test, consisting of the entire system energized for 72 consecutive hours without any failures of any kind occurring in the system. All circuits must test clear of faults, grounds, and open circuits.

3.2.1.1 Lighting Control Verification Test

Verify lighting control system and devices operate according to approved sequence of operations. Verification tests are to be completed after commissioning.

3.3 CLOSEOUT ACTIVITIES

3.3.1 Training

Provide on-site training to the Owner's personnel in the operation and maintenance of lighting and lighting control system. Provide training that includes calibration, adjustment, troubleshooting, maintenance, repair, and replacement.

3.3.1.1 End-User Training

Submit a End-User Training Plan at least 30 calendar days prior to training session that describes training procedures for end-users on the lighting control system. Provide demonstration for each type of user interface. Provide users with the curfew schedule as currently commissioned, including conditional programming based on astronomic time clock functionality. Provide users with the correct contact information for maintenance personnel who will be available to address any lighting control issues.

-- End of Section --

SECTION 27 10 00

BUILDING TELECOMMUNICATIONS CABLING SYSTEM (MCBCL)
04/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D709	(2017) Standard Specification for Laminated Thermosetting Materials

ELECTRONIC COMPONENTS INDUSTRY ASSOCIATION (ECIA)

ECIA EIA/ECA 310-E	(2005) Cabinets, Racks, Panels, and Associated Equipment

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms

INSULATED CABLE ENGINEERS ASSOCIATION (ICEA)

ICEA S-83-596	(2016) Indoor Optical Fiber Cables
ICEA S-90-661	(2021) Category 3 and 5E Individually Unshielded Twisted Pairs, Indoor Cables (With or Without an Overall Shield) for Use in General Purpose and LAN Communications Wiring Systems

NATIONAL ELECTRICAL CONTRACTORS ASSOCIATION (NECA)

NECA/BICSI 568	(2006) Standard for Installing Building Telecommunications Cabling

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI/NEMA WC 66	(2019) Performance Standard for Category 6 and Category 7 100 Ohm Shielded and Unshielded Twisted Pairs

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)

TIA-526-7	(2015a) OFSTP-7 Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant
TIA-568.0	(2020e) Generic Telecommunications Cabling for Customer Premises
TIA-568.1	(2020e) Commercial Building Telecommunications Infrastructure Standard
TIA-568.2	(2018d) Balanced Twisted-Pair Telecommunications Cabling and Components Standards
TIA-568.3	(2016d; Add 1 2019) Optical Fiber Cabling Components Standard
TIA-569	(2019e) Telecommunications Pathways and Spaces
TIA-606	(2021d) Administration Standard for Telecommunications Infrastructure
TIA-607	(2019d) Generic Telecommunications Bonding and Grounding (Earthing) for Customer Premises
TIA-1152	(2016; R 2021) Requirements for Field Test Instruments and Measurements for Balanced Twisted-Pair Cabling
TIA/EIA-598	(2014D; Add 2 2018) Optical Fiber Cable Color Coding
TIA/EIA-604-3	(2004b; R 2014) Fiber Optic Connector Intermateability Standard (FOCIS), Type SC and SC-APC, FOCIS-3

U.S. FEDERAL COMMUNICATIONS COMMISSION (FCC)

FCC Part 68	Connection of Terminal Equipment to the Telephone Network (47 CFR 68)

UL SOLUTIONS (UL)

UL 50	(2024) UL Standard for Safety Enclosures for Electrical Equipment, Non-Environmental Considerations
UL 444	(2017; Reprint Jun 2021) UL Standard for Safety Communications Cables
UL 467	(2022) UL Standard for Safety Grounding and Bonding Equipment
UL 514C	(2014; Reprint Apr 2024) UL Standard for Safety Nonmetallic Outlet Boxes,

	Flush-Device Boxes, and Covers
UL 969	(2017; Reprint Mar 2018) UL Standard for Safety Marking and Labeling Systems
UL 1286	(2008; Reprint Apr 2021) UL Standard for Safety Office Furnishings
UL 1666	(2007; Reprint Sep 2021) UL Standard for Safety Test for Flame Propagation Height of Electrical and Optical-Fiber Cables Installed Vertically in Shafts
UL 1863	(2004; Reprint Oct 2019) UL Standard for Safety Communication Circuit Accessories

1.2 RELATED REQUIREMENTS

Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM and Section 33 82 00 TELECOMMUNICATIONS, OUTSIDE PLANT (OSP), apply to this section with additions and modifications specified herein.

Contact Camp Lejeune Base Telephone (aka Telecommunications Support Division or TSD)for special requirements on classified service cabling and color, unofficial service, under slab cabling, using water block, and any item not covered in this document.

Buildings with Special Network Requirements such as Secured Internet Protocol, Classified networks, Commercial network, Charter cable, MCCS.org, Boingo, and Naval Blue Network may require additional guidance outside this specification. Secured areas or secured networks in non-secured areas may require Protected Distribution System (PDS) which is also outside this specification. Classified networks may require shielded twisted pair, distinct color, and has separation requirements outside this specification, and shall be in accordance with current CNSSAM TEMPEST RED/BLACK Installation documentation. In these cases contact Telecommunications Support Division G-6 MCIEAST-MCB CAMLEJ for additional guidance at (910) 451-9439 or (910) 451-4760.

Contact AHJ for special requirements on classified service, unofficial service, under slab cabling, using water block, and any item not covered in this document.

1.3 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in this specification shall be as defined in TIA-568.1, TIA-568.2, TIA-568.3, TIA-569, TIA-606 and IEEE 100 and herein.

1.3.1 Campus Distributor (CD)

A distributor from which the campus backbone cabling emanates. (International expression for main cross-connect (MC) also known as central office or Area Distribution Node.)

1.3.2 Building Distributor (BD)

A distributor in which the building backbone (customer owned outside plant)

cables terminate and at which connections to the campus backbone cables may be made. Typically a central location for terminating permanent backbone cables to interconnect with service provider (SP) equipment at the activity minimum point of presence. Generally includes specific components to support voice and data circuits, building surge protector assemblies, main cross connect blocks, equipment support frames, and fire rated plywood backboard. (International expression for intermediate cross-connect (IC).)

1.3.3 Floor Distributor (FD)

A distributor used to connect horizontal cable and cabling subsystems or equipment. Usually within telecommunications rooms. Shall be connected to BD with both fiber and copper. A secure Internet Protocol (SIPR) vault or cabinet is considered an FD. (International expression for horizontal cross-connect (HC).)

1.3.4 Telecommunications Room (TR)

An enclosed space for housing telecommunications equipment, cable, terminations, and cross-connects. The room is the recognized cross-connect between the backbone cable and the horizontal cabling.

1.3.5 Entrance Facility (EF) (Telecommunications) (can be within Main TR)

An entrance to the building for both private and public network service cables (including wireless) including the entrance point at the building wall and continuing to the equipment room.

1.3.6 Equipment Room (ER) (Telecommunications)(can be within a TR/ CR)

An environmentally controlled centralized space for telecommunications equipment that serves the occupants of a building. Equipment housed therein is considered distinct from a telecommunications room because of the nature of its complexity.

1.3.7 Open Cable

Cabling that is not run in an enclosed raceway as defined by NFPA 70. This refers to cabling that is "open" to the space in which the cable has been installed and is therefore exposed to the environmental conditions associated with that space, such as wire basket tray, cable tray, J-hooks, D-rings, or bridal rings. D rings should only be used in the TR/CR for cable management and J-hooks/bridal rings shall not be used except in minor renovations where they exist already.

1.3.8 Open Office

A floor space division provided by furniture, moveable partitions, or other means instead of by building walls, normally over 100 square feet.

1.3.9 Pathway

A physical infrastructure utilized for the placement and routing of telecommunications cable.

1.4 SYSTEM DESCRIPTION

The building telecommunications cabling and pathway system shall include

permanently installed backbone and horizontal cabling, horizontal and backbone pathways, service entrance facilities, work area pathways, telecommunications outlet assemblies, conduit, raceway, and hardware for splicing, terminating, and interconnecting cabling necessary to transport telephone and data, and other communications systems (including LAN. A/V, intercom, PA, CATV, CCTB, and WiFi) between equipment items in a building. The horizontal system shall be wired in a star topology from the telecommunications work area to the floor distributor /BD /TR /ER or campus distributor at the center or hub of the star. The backbone cabling and pathway system includes intrabuilding and interbuilding interconnecting cabling, pathway, and terminal hardware. The intrabuilding backbone provides connectivity from the floor distributors to the building distributors or to the campus distributor and from the building distributors to the campus distributor as required. The backbone system shall be wired in a star topology with the campus distributor (Area Distribution Node) at the center or hub of the star.

The interbuilding backbone system provides connectivity between the campus distributors and is specified in Section 33 82 00 TELECOMMUNICATIONS OUTSIDE PLANT (OSP). Provide telecommunications pathway systems referenced herein as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM, current TIA-569, and MCB CL Base Telephone (TSD) guidance. The telecommunications contractor must coordinate with the MCB CL Base Telephone via Contracting or Construction Manager / Project Manager concerning access to and configuration of telecommunications spaces. The telecommunications contractor may be required to coordinate work effort within the telecommunications spaces with the electrical sub and general contractor, Resident Officer in Charge of Construction (ROICC) and MCB CL Base Telephone (TSD).

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Telecommunications Drawings; G

Telecommunications Space Drawings; G

In addition to Section 01 33 00 SUBMITTAL PROCEDURES, provide shop drawings in accordance with paragraph SHOP DRAWINGS.

SD-03 Product Data

Telecommunications Cabling (backbone and horizontal); G

Patch Panels; G

Telecommunications Outlet/Connector Assemblies; G

Equipment Support Frame; G

Connector Blocks; G

Submittals shall include the manufacturer's name, trade name,

place of manufacture, and catalog model or number. Include performance and characteristic curves. Submittals shall also include applicable federal, military, industry, and technical society publication references. Should manufacturer's data require supplemental information for clarification, the supplemental information shall be submitted as specified in paragraph REGULATORY REQUIREMENTS and as required in Section 01 33 00 SUBMITTAL PROCEDURES.

SD-06 Test Reports

Telecommunications Cabling Testing; G

SD-07 Certificates

Telecommunications Contractor Qualifications; G

Key Personnel Qualifications; G

Manufacturer Qualifications; G

Test Plan; G

SD-09 Manufacturer's Field Reports

Factory Reel Tests; G

SD-10 Operation and Maintenance Data

Telecommunications Cabling and Pathway System Data Package 5; G

SD-11 Closeout Submittals

Record Documentation; G

1.5.1 ADDITIONAL SUBMITTAL REQUIREMENTS

All submittals of material, equipment and design must be approved by the Telecommunications Support Division (TSD) prior to installing any telecommunications wiring, equipment, or power to support communications.

1.6 QUALITY ASSURANCE

1.6.1 Shop Drawings

In exception to Section 01 33 00 SUBMITTAL PROCEDURES, submitted plan drawings shall be a minimum of 11 by 17 inches in size using a minimum scale of 1/8 inch per foot, except as specified otherwise. Include wiring diagrams and installation details of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork, and other items that must be shown to ensure a coordinated installation. Wiring diagrams shall identify circuit terminals and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment. Drawings shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices. Submittals shall include the nameplate data, size, and capacity. Submittals shall also include applicable federal, military, industry, and technical society publication references.

1.6.1.1 Telecommunications Drawings

Provide registered communications distribution designer (RCDD) approved, drawings in accordance with TIA-606. The identifier for each termination and cable shall appear on the drawings. Drawings shall depict final telecommunications installed wiring system infrastructure in accordance with TIA-606. The drawings should provide details required to prove that the distribution system shall properly support connectivity from the EF /BD telecommunications and ER /TR telecommunications, CD's, and FD's to the telecommunications work area outlets. Provide a plastic laminated schematic of the as-installed telecommunications cable system showing cabling, CD's, BD's, FD's, and the EF and ER for telecommunications keyed to floor plans by room number. Mount the laminated schematic in the EF telecommunications space as directed by the Contracting Officer. The following drawings shall be provided as a minimum:

a. T1 - Layout of complete building per floor - Building Area/Serving Zone Boundaries, Backbone Systems, and Horizontal Pathways. Layout of complete building per floor. The drawing indicates location of building areas, serving zones, vertical backbone diagrams, telecommunications rooms, access points, pathways, grounding system, and other systems that need to be viewed from the complete building perspective.

b. T2 - Serving Zones/Building Area Drawings - Drop Locations and Cable Identification (ID’S). Shows a building area or serving zone. These drawings show drop locations, telecommunications rooms, dedicated electrical for communications equipment, access points and detail call outs for common equipment rooms and other congested areas.

c. T4 - Typical Detail Drawings - Faceplate Labeling, Firestopping, Americans with Disabilities Act (ADA), Safety, Department of Transportation (DOT). Detailed drawings of symbols and typicals such as faceplate labeling, faceplate types, faceplate population installation procedures, detail racking, and raceways.

1.6.1.2 Telecommunications Space Drawings

Provide T3 drawings in accordance with TIA-606 that include telecommunications rooms plan views, pathway layout (cable tray, racks, ladder-racks, etc.), mechanical/electrical layout, and cabinet, rack, backboard and wall elevations. Drawings shall show layout of applicable equipment including incoming cable stub or connector blocks, building protector assembly, outgoing cable connector blocks, dedicated mechnical/electrical, patch panels and equipment spaces and cabinet/racks. Drawings shall include a complete list of equipment and material, equipment rack details, proposed layout and anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearance for maintenance and operation. Drawings may also be an enlargement of a congested area of T1 or T2 drawings.

1.6.2 Telecommunications Qualifications

Work under this section shall be performed by and the equipment shall be provided by the approved telecommunications contractor and key personnel. Qualifications shall be provided for: the telecommunications system contractor, the telecommunications system installer, and the supervisor (if different from the installer). A minimum of 30 days prior to installation, submit documentation of the experience of the

telecommunications contractor and of the key personnel.

1.6.2.1 Telecommunications Contractor

The telecommunications contractor shall be a firm which is regularly and professionally engaged in the business of the applications, installation, and testing of the specified telecommunications systems and equipment. The telecommunications contractor shall demonstrate experience in providing successful telecommunications systems within the past 3 years of similar scope and size. Submit documentation for a minimum of three and a maximum of five successful telecommunication system installations for the telecommunications contractor. IAW Section on QC Specialists; a Telecommunications Systems QC Specialist is required on site, full time with 10 years minimum experience in telecom installation and experience. Specialist shall be very familiar with UFGS Divisions 27, 28, 33 concerning communications systems work and installation.

1.6.2.2 Key Personnel

Provide key personnel who are regularly and professionally engaged in the business of the application, installation and testing of the specified telecommunications systems and equipment. There may be one key person or more key persons proposed for this solicitation depending upon how many of the key roles each has successfully provided. Each of the key personnel shall demonstrate experience in providing successful telecommunications systems within the past 3 years.

Supervisors and installers assigned to the installation of this system or any of its components shall be Building Industry Consulting Services International (BICSI) Registered Cabling Installers, Technician Level. Submit documentation of current BICSI certification for each of the key personnel.

In lieu of BICSI certification, supervisors and installers assigned to the installation of this system or any of its components shall have a minimum of 3 years experience in the installation of the specified copper and fiber optic cable and components. They shall have factory or factory approved certification from each equipment manufacturer indicating that they are qualified to install and test the provided products. Submit documentation for a minimum of three and a maximum of five successful telecommunication system installations for each of the key personnel. Documentation for each key person shall include at least two successful system installations provided that are equivalent in system size and in construction complexity to the telecommunications system proposed for this solicitation. Include specific experience in installing and testing telecommunications systems and provide the names and locations of at least two project installations successfully completed using optical fiber and copper telecommunications cabling systems. All of the existing telecommunications system installations offered by the key persons as successful experience shall have been in successful full-time service for at least 18 months prior to the issuance date for this solicitation. Provide the name and role of the key person, the title, location, and completed installation date of the referenced project, the referenced project owner point of contact information including name, organization, title, and telephone number, and generally, the referenced project description including system size and construction complexity.

Indicate that all key persons are currently employed by the

telecommunications contractor, or have a commitment to the telecommunications contractor to work on this project. All key persons shall be employed by the telecommunications contractor at the date of issuance of this solicitation, or if not, have a commitment to the telecommunications contractor to work on this project by the date that the bid was due to the Contracting Officer.

Note that only the key personnel approved by the Contracting Officer in the successful proposal shall do work on this solicitation's telecommunications system. Key personnel shall function in the same roles in this contract, as they functioned in the offered successful experience. Any substitutions for the telecommunications contractor's key personnel requires approval from The Contracting Officer.

1.6.2.3 Minimum Manufacturer Qualifications

Cabling, equipment and hardware manufacturers shall have a minimum of 3 years experience in the manufacturing, assembly, and factory testing of components which comply with TIA-568.1, TIA-568.2 and TIA-568.3.

1.6.3 Test Plan

Provide a complete and detailed test plan for the telecommunications cabling system including a complete list of test equipment for the components and accessories for each cable type specified, 60 days prior to the proposed test date. Include procedures for certification, validation, sample report, and testing.

1.6.4 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Equipment, materials, installation, and workmanship shall be in accordance with the mandatory and advisory provisions of NFPA 70 manufacturer recommendations, installation manual, best known industry practices, and industry standards, unless more stringent requirements are specified or indicated.

1.6.5 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year period shall include applications of equipment and materials under similar circumstances and of similar size. The product shall have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period. Where two or more items of the same class of equipment are required, these items shall be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.6.5.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than

6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.6.5.2 Material and Equipment Manufacturing Date

Products manufactured more than 1 year prior to date of delivery to site shall not be used, unless specified otherwise.

1.7 DELIVERY AND STORAGE

Provide protection from weather, moisture, extreme heat and cold, dirt, dust, and other contaminants for telecommunications cabling and equipment placed in storage.

1.8 ENVIRONMENTAL REQUIREMENTS

Connecting hardware shall be rated for operation under ambient conditions of 32 to 140 degrees F and in the range of 0 to 95 percent relative humidity, noncondensing. All telecommunications spaces shall follow TIA-569 design.

1.9 WARRANTY

The equipment items shall be supported by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.10 MAINTENANCE

1.10.1 Operation and Maintenance Manuals

Commercial off the shelf manuals shall be furnished for operation, installation, configuration, and maintenance of products provided as a part of the telecommunications cabling and pathway system, Data Package 5. Submit operations and maintenance data in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA and as specified herein not later than 2 months prior to the date of beneficial occupancy. In addition to requirements of Data Package 5, include the requirements of paragraphs TELECOMMUNICATIONS DRAWINGS, TELECOMMUNICATIONS SPACE DRAWINGS, and RECORD DOCUMENTATION. Ensure that these drawings and documents depict the as-built configuration. Also provide copies of all Telecommunications manuals to TSD.

1.10.2 Record Documentation

Provide T5 drawings including documentation on cables and termination hardware in accordance with TIA-606. T5 drawings shall include schedules to show information for cut-overs and cable plant management, patch panel layouts and cover plate assignments, cross-connect information and connecting terminal layout as a minimum. T5 drawings shall be provided on electronic media using Windows based computer cable management software. Provide the following T5 drawing documentation as a minimum:

a. Cables - A record of installed cable shall be provided in accordance with TIA-606. The cable records shall include the required data fields for each cable and complete end-to-end circuit report for each complete circuit from the assigned outlet to the entry facility in

accordance with TIA-606. Include manufacture date of cable with submittal.

b. Termination Hardware - A record of installed patch panels, cross-connect points, distribution frames, terminating block arrangements and type, and outlets shall be provided in accordance with TIA-606. Documentation shall include the required data fields as a minimum in accordance with TIA-606.

PART 2 PRODUCTS

2.1 COMPONENTS

Components shall be UL or third party certified. Where equipment or materials are specified to conform to industry and technical society reference standards of the organizations, submit proof of such compliance. The label or listing by the specified organization will be acceptable evidence of compliance. In lieu of the label or listing, submit a certificate from an independent testing organization, competent to perform testing, and approved by the Contracting Officer. The certificate shall state that the item has been tested in accordance with the specified organization's test methods and that the item complies with the specified organization's reference standard. Provide a complete system of telecommunications cabling and pathway components using star topology. Provide support structures and pathways, complete with outlets, cables, connecting hardware and telecommunications cabinets/racks. Cabling and interconnecting hardware and components for telecommunications systems shall be UL listed or third party independent testing laboratory certified, and shall comply with NFPA 70 and conform to the requirements specified herein.

2.2 TELECOMMUNICATIONS PATHWAY

Provide telecommunications pathways in accordance with TIA-569 and as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Provide system furniture pathways in accordance with UL 1286.

2.2.1 PATHWAYS ABOARD CAMP LEJEUNE GREATER AREA, INCLUDING MCAS NEW RIVER

Pathway shall be conduit, cable tray, or modular access flooring that provides protection for cabling. Under floor duct, free laying, case work boxes, and wireway shall not be used. Cantilever-type center hung tray or Poke-Thru devices shall not be used. J-hooks/D-rings/bridal rings and other open face type cable pathways are not authorized except in minor renovations or to continue like existing system. Provide grounding and bonding as required by TIA-607. Cable tray wiring shall comply with NFPA 70. All conduits entering the communications room should be grouped and consolidated.

Individual conduits can be "Home Run" or stubbed to cable tray using approved pull boxes after every 180 degrees of bends, all shall have bonding bushing/plastic insert, and shall extend down from the ceiling to 3 to 4 inches onto the backboard, and will be bonded to the TMGB or TGB by a minimum number 6 green sheathed stranded conductors. All penetrations will be sealed in accordance with code (fire-stopping). A minimum of two 3 inch conduits will be installed overhead between the main communications room and other communication rooms, if installed below slab they are considered OSP and fall under Section 33 82 00 TELECOMMUNICATIONS, OUTSIDE PLANT (OSP). Distribution Enclosures shall not be used as a pull box and

will only be approved for their intended use.

2.2.2 WORK AREA PATHWAYS

Comply with TIA-569, except minimum 1 1/4 inch diameter conduit will be used. Each work area outlet must have its own conduit to the comm room or nearest cable tray, multiple outlets cannot be ganged together except in a floor box, MUTOA, or system furniture. System furniture pathways shall comply with UL 1286. In system furniture that blocks access to or is distant from the communications wall outlets: each system furniture desk/cubical shall be equipped with system furniture communications outlets that are plugged into the communications wall outlets. All ports should be extended into the furniture.

2.2.3 TELEPHONE OUTLET BOXES

Communications outlet boxes shall be placed in all work areas and any areas that can be converted to work areas; so any furniture package configuration will have a connection with a 6' base cord. Recommended practice is 6" to the left or right of (the outside edge of) electrical outlet box in workable office areas or any area that could be converted into workable office area such as a large storage closet; also any conference room should have one floor box and one box just above the ceiling. Boxes shall be standard type 5 inches square by 2 7/8 inches deep for CAT6 with 1 1/4 inch diameter knock-outs, with a single gang plaster ring. Mount flush in finished walls or 3 to 12 inches above ceiling tile. Outlet boxes for wall-mounted telephones shall be 2 by 4 by 2-1/8 inches deep with 1 CAT6 cable terminated in a standard CAT6 studded wall phone plate; mounted at ADA required height. Outlet boxes for work counter area or case work shall be mounted through or above casework/ counter, typically at a height 48 inches above finished floor. Outlet boxes installed for CCTV, Wireless access points, and CATV shall contain two CAT 6 cables. Outlet boxes should have their own individual conduit to the comm room or nearest cable tray. Outlets installed in floor shall be communications floor boxes large enough to support a surge of users with proper cable/ port protection and ports that are in multiples of 4. For raised access flooring, boxes shall be below the floor with an access cover flush with the floor. Tombstones above the floor or boxes below floor that require removal of the floor panels to access are not allowed. Floor boxes and under slab cabling should not be used in wet areas. Tele electric poles or furniture managed pathways fed from above the wet area should be used. Multi-user Telecommunications Outlet Assembly i.e. Multimedia Outlet Assemblies (MUTOA) should be placed where best suited for the furniture used in open office spaces and maintain a clearance more than 6" from electrical or 2nd MUTOA for proper operation.

2.3 TELECOMMUNICATIONS CABLING

Cabling shall be UL listed for the application and shall comply with TIA-568.0, TIA-568.1, TIA-568.2, TIA-568.3 and NFPA 70. Provide a labeling system in accordance with the manufacturer and local AHJ guidance for cabling as required by TIA-606 and UL 969. Confirm labeling is compatible with Base service provider requirements. Ship cable on reels or in boxes bearing manufacture date for for unshielded twisted pair (UTP) in

accordance with ICEA S-90-661 and optical fiber cables in accordance with ICEA S-83-596 for all cable used on this project. Cabling manufactured more than 12 months prior to date of installation shall not be used.

2.3.1 Backbone Cabling

2.3.1.1 Backbone Copper

Copper backbone cable and riser shall be solid conductor, 24 AWG, 100 ohm, 100 -pair, Category 3, UTP, in accordance with ICEA S-90-661, TIA-568.1, TIA-568.2 and UL 444, formed into 25 pair binder groups covered with a gray thermoplastic jacket and overall metallic shield if required for additional protection. Cable shall be imprinted with manufacturers name or identifier, flammability rating, gauge of conductor, transmission performance rating (category designation) at regular length marking intervals in accordance with ICEA S-90-661. Sufficient pair count of CAT 3 or 5, as required shall be installed between the MDF and each of the IDF's. Provide plenum (CMP), riser (CMR), or general purpose (CM or CMG)communications rated cabling in accordance with NFPA 70. Substitution of a higher rated cable shall be permitted in accordance with NFPA 70. Any backbone copper run in under slab conduit shall be rated for outdoor use in accordance with AHJ and have lightning protection at both ends.

2.3.1.2 Backbone Optical Fiber

Provide in accordance with ICEA S-83-596, TIA-568.3, UL 1666 and NFPA 70. Cable shall be imprinted with fiber count, fiber type and aggregate length at regular intervals not to exceed 40 inches.

Provide the number of strands indicated, (but not less than 12 strands between the main telecommunication rooms or secure racks/cabinets), of single-mode(OS1), tight buffered fiber optic cable.

Provide plenum (OFNP), riser (OFNR), or general purpose (OFN or OFNG) rated non-conductive, fiber optic cable in accordance with NFPA 70. Substitution of a higher rated cable shall be permitted in accordance with NFPA 70. The cable cordage jacket, fiber, unit, and group color shall be in accordance with TIA/EIA-598.

Provide plenum (OFNP) riser (OFNR), or general purpose (OFN or OFNG) rated non-conductive, fiber optic cable in accordance with NFPA 70. Substitution of a higher rated cable shall be permitted in accordance with NFPA 70. The cable cordage jacket, fiber, unit, and group color shall be in accordance with TIA/EIA-598.

2.3.2 Horizontal Cabling

Provide horizontal cable in compliance with NFPA 70 and performance characteristics in accordance with TIA-568.1.

2.3.2.1 Horizontal Copper

Provide a minimum of four horizontal copper cables to each work area outlet (faceplate), UTP, 100 ohm in accordance with TIA-568.2, UL 444, ANSI/NEMA WC 66, ICEA S-90-661 . Provide four each individually twisted pair, minimum size 24 AWG conductors, Category 6 or higher, with a green thermoplastic jacket for all unclassified ports (color and cable type for classified services shall be in accordance with current CNSSAM TEMPEST RED/BLACK Installation documentation including Table 1 (below). Cable

shall be imprinted with manufacturers name or identifier, flammability rating, gauge of conductor, transmission performance rating (category designation) and length marking at regular intervals in accordance with ICEA S-90-661. Provide plenum (CMP), riser (CMR), or general purpose (CM or CMG) communications rated cabling in accordance with NFPA 70. Substitution of a higher rated cable shall be permitted in accordance with NFPA 70. Cables installed in conduit within and under slabs are not recommended but can be used if approved by local AHJ and shall be UL listed and labeled for wet locations in accordance with NFPA 70. Contact AHJ for special requirements on classified service, under slab cabling, using water block, and any item not covered in this document.

Table 1 - (U/FOUO) Cable Color Scheme

Classification Level	Cable Color
Unclassified	Green
Collateral Confidential	Blue
Collateral Secret	Red
Collateral Top Secret	Orange
Special Category	Yellow

2.3.3 Work Area Cabling

2.3.3.1 Work Area Copper

Provide work area copper cable in accordance with TIA-568-C.2, with a green on odd numbered and green on even numbered thermoplastic jacket for unclassified services (classified color code shall be in accordance with current CNNSSAM TEMPEST RED/BLACK Installation documentation).

Communications CAT6 twisted pair shall have a minimum of 12 inch slack cable loosely coiled into the communications outlet boxes. Minimum manufacturer's bend radius for each type of cable shall not be exceeded. All communications work area outlet boxes should have 4 cables to a double gang box (no rough in or empty conduit for future use allowed).

2.4 TELECOMMUNICATIONS SPACES

Provide connecting hardware and termination equipment in the telecommunications entrance facility and telecommunication equipment rooms to facilitate installation as shown on design drawings for terminating and cross-connecting permanent cabling. Provide telecommunications interconnecting hardware color coding in accordance with TIA-606.

Space shall be designed per TIA-569 section 6.4.4 Design, unless a local waiver is provided by the AHJ which is TSD aboard Camp Lejeune. Communications distribution room min 10'x10' but could be much larger depending on building size, usable square footage served, multiple networks, classified networks, and customer requirements. Communications rooms shall be centrally located unless there are multiple Communication rooms, and then each room should be centrally located within the area

served. Communications Rooms shall not share or be on a wet wall. Generally, the space should be sized to approximately 1.1 percent of the area it serves. For example, a 10,000 sq feet (929 sq m) area should be served by a minimum of one 10 ft x 11 ft (3 m x 3.4 m) Communications room. Access to Rooms shall be from a common area such as a hallway and door shall swing out.

Additional/Multiple communications rooms are required if the usable floor space to be served exceeds 10,000 square feet, or the cable length between the horizontal cross-connect and the communications outlet, including slack and vertical distance, exceeds 295 feet. Multiple communications rooms and IDFs shall be stacked and connected by a minimum of two 3 inch conduits overhead. If under slab it is considered Outside Plant and 3 way 4" shall be used per Section 33 82 00 TELECOMMUNICATIONS, OUTSIDE PLANT (OSP) with proper surge protection at both ends.

The minimum clear height in the room shall be 2.4 m (8 ft) without obstructions. The height between the finished floor and the lowest point of the ceiling should be a minimum of 3 m (10 ft) to accommodate overhead pathways. The flooring shall be sealed concrete or Electro Static Dissipating flooring to reduce dust and static electricity; no carpet or VCT tile.

Two separate dedicated 20 amp electrical circuits in one quadruplex outlet and one 30 amp will be installed above / behind but not attached to each communications equipment rack. Vertical Power Distribution Units should be plugged into the dedicated power and mounted to the back side of the telecomm racks/ cabinets.

OSP conduits and other telecomm equipment shall on the longest furthest wall from the door and to the far left of the communications backboard while facing it (behind the racks). There should not be an electrical panel within the communications room unless it serves only the room, and it should be located as close to the door as possible.
The room requires a lockable door keyed or key padded to restrict access to MCIEAST-MCB G-6 personnel only. Room shall not have any windows or skylights. At least one wall, where the point of presence is located, and two adjacent walls should be covered with fire rated plywood backboard for mounting equipment; additional boards may be needed for mounting additional equipment.

Light, as measured within the communications room, should be a minimum of 500 lux (50 foot-candles). Lighting design should seek to minimize shadows within the telecommunications room (minimum two light fixtures). Equipment not related to the support of the communications room (e.g., piping, ductwork, pneumatic tubing) shall not be installed in, pass through, or enter the telecommunications room.

Equipment related to the support of the communications room (e.g., piping, ductwork, HVAC drains, and dedicated power) shall be installed in support of the communications equipment and not pose a drip/moisture/trip hazard and be usable as intended.

2.4.1 Backboards

Provide void-free, interior grade A-C plywood 3/4 inch thick 4 by 8 feet as indicated. Fire stamp shall be clearly visible. Backboards shall be provided on the longest furthest wall from the door and a minimum of two adjacent walls, and anywhere mounting is needed in the telecommunication

spaces.

2.4.2 Equipment Support Frame

Provide in accordance with ECIA EIA/ECA 310-E and UL 50. Steel construction shall be treated to resist corrosion.

a. Bracket, wall mounted, 8 gauge aluminum (for buildings with very low jack/pair count and no secured electronic equipment requirement). Provide hinged bracket compatible with 482.6 mm 19 inches panel mounting (must be in a secured room).

b. Racks, wall or floor mounted modular type, 16 gauge steel or 11 gauge aluminum construction, minimum, treated to resist corrosion. Provide rack with vertical and horizontal cable management channels, top and bottom cable troughs, grounding lug, with surge protected power strips for dedicated power 20/30 amp receptacles. Racks shall be large enough to support all telephone/data equipment required plus 25 percent spare and shall have a maximum of 7' height. Rack shall be compatible with 482.6 mm 19 inches panel mounting and must be in a secured communications room.

c. Cabinets, freestanding modular type, 16 gauge steel or 11 gauge aluminum construction, minimum, treated to resist corrosion. Cabinet shall have removable and lockable side panels, front and rear doors, and have adjustable feet for leveling. All cabinets shall be keyed to current TSD key and large enough to support all telephone/data equipment required in the building plus 25% for future expansion. A backboard for mounting equipment is still needed when a cabinet is installed. Cabinet shall be mounted to the far right of the board to allow space for OSP cable, lightning protection, and bus bar to be installed on the board's far left. Dedicated power shall be within the cabinet and on the backboard. Cabinet shall be vented in the roof and rear door. Cabinet shall have cable access in the roof and base and be compatible with 482.6 mm 19 inches panel mounting. Provide cabinet with grounding bar rack mounted 15 cu. m 550 CFM fan with filter and a surge protected power strips with 20/30 amp receptacles.

d. Cabinets, wall-mounted modular type, 16 gauge steel or 11 gauge aluminum construction, minimum, treated to resist corrosion. Cabinet shall have a lockable front and rear doors, louvered side panels, 7 cu. m 250 CFM rack mounted fan, ground lug, and top and bottom cable access. Cabinets shall be no smaller than 24"W X 48"H X 30"D, shall be keyed to current TSD key, and large enough to support all telephone/data equipment required in the building plus 25% for future expansion. Dedicated electrical outlets should be installed within the cabinet. A backboard for mounting equipment is still needed when a cabinet is installed. Cabinet shall be mounted to the far right of the board to allow space for OSP cable, lightning protection, and bus bar to be installed on the board's far left. Cabinet shall be compatible with 482.6 mm 19 inches panel mounting. All cabinets shall be keyed alike. A duplex AC outletsurge protected power strip with 6 duplex 20 amp receptacles shall be provided within the cabinet.

2.4.3 Connector Blocks

Provide insulation displacement connector (IDC) Type 110, 50 pair, rack mounted blocks, compatible with industry standard 110 blade punch down tool, designed for Category 3 and higher systems. Provide blocks for the number of horizontal and backbone cables terminated on the block plus 25 percent spare. Also provide sufficient blocks for cross connects to all IDFs.

2.4.4 Cable Guides

Provide cable guides specifically manufactured for the purpose of routing cables, wires and patch cords horizontally and vertically on 19 inches equipment racks and telecommunications backboards. Cable guides of ring or bracket type devices mounted on rack panelsbackboard for horizontal cable management and individually mounted for vertical cable management. Mount cable guides with screws, and or nuts and lockwashers. Cable guides are not to be used outside of the communications room.

2.4.5 Patch Panels

Provide ports for the number of horizontal and backbone cables terminated on the panel plus 25 percent spare. Provide pre-connectorized optical fiber and copper patch cords for patch panels. Provide patch cords of various appropriate lengths and as complete assemblies, with matching connectors as specified. Provide fiber optic patch cables with crossover orientation in accordance with TIA-568.3. Patch cords shall meet minimum performance requirements specified in TIA-568.1, TIA-568.2 and TIA-568.3 for cables, cable length and hardware specified. Classified service may require shielded jack sets and panels as approved by AHJ.

2.4.5.1 Modular to 110 Block Patch Panel

Provide in accordance with TIA-568.1 and TIA-568.2. Panels shall be third party verified and shall comply with EIA/TIA Category 6 requirements. Panel shall be constructed of 0.09 inches minimum aluminum and shall be rack mounted and compatible with an ECIA EIA/ECA 310-E 19 inches equipment rack. Panel shall provide 48 non-keyed, 8-pin modular ports, wired to T568A. Patch panels shall terminate the building cabling on Type 110 IDCs and shall utilize a printed circuit board interface. The rear of each panel shall have incoming cable strain-relief and routing guides. Panels shall have each port factory numbered and be equipped with laminated plastic nameplates above each port.

2.4.5.2 Fiber Optic Patch Panel

Provide panel for maintenance and cross-connecting of optical fiber cables. Panel shall be constructed of 16 gauge steel or 11 gauge aluminum minimum and shall be rack mounted and compatible with a ECIA EIA/ECA 310-E 19 inches equipment rack. Each panel shall provide 12 single-mode adapters as duplex SC in accordance with TIA/EIA-604-3 with zirconia ceramic alignment sleeves. Provide dust cover for unused adapters. The rear of each panel shall have a cable management tray a minimum of 8 inches deep with removable cover, incoming cable strain-relief and routing guides. Panels shall have each adapter factory numbered and be equipped with laminated plastic nameplates above each adapter. When populating the panel working left to right start with OSP feed, SM ISO to IDF, MM ISO to IDF, lastly row to row within same comm room.

2.4.6 Optical Fiber Distribution Panel

Rack mounted optical fiber distribution panel (OFDP) shall be constructed in accordance with ECIA EIA/ECA 310-E utilizing 16 gauge steel or 11 gauge aluminum minimum. Panel shall be divided into two sections, distribution and user. Distribution section shall have strain relief, routing guides, splice tray and shall be lockable, user section shall have a cover for patch cord protection. Each panel shall provide 12 single-mode pigtails and adapters. Provide adapters as duplex SC with zirconia ceramic alignment sleeves. Provide dust covers for adapters. Provide patch cords as specified in the paragraph PATCH PANELS.

2.5 TELECOMMUNICATIONS OUTLET/CONNECTOR ASSEMBLIES

2.5.1 Outlet/Connector Copper

Outlet/connectors shall comply with FCC Part 68, TIA-568.1, and TIA-568.2. UTP outlet/connectors shall be UL 1863 listed, non-keyed, 8-pin modular, constructed of high impact rated thermoplastic housing and shall be third party verified and shall comply with TIA-568.2 Category 6 requirements. Outlet/connectors provided for UTP cabling shall meet or exceed the requirements for the cable provided and have the capability to be installed from the front or rear of the faceplate/patch panel.

Outlet/connectors shall be terminated using a standard IDC connector, color-coded for both TIA-568A and TIA-568B wiring. Each outlet/connector shall be wired T568A. UTP/STP outlet/connectors shall comply with TIA-568.2 for 750 mating cycles.

2.5.2 Cover Plates

Telecommunications cover plates shall comply with UL 514C, and TIA-568.1, TIA-568.2, ; flush design constructed of high impact thermoplastic material to match color of receptacle/switch cover plates specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Additionally, it shall be labeled as to its function and color coded (color code shall be in accordance with current CNNSSAM TEMPEST RED/BLACK Installation documentation). Provide labeling in accordance with the paragraph LABELING in this section.

2.6 TERMINAL CABINETS

Construct of zinc-coated sheet steel, 36 by 24 by 6 inches deep. Trim shall be fitted with hinged door and locking latch. Doors shall be maximum size openings to box interiors. Boxes shall be provided with 5/8 inch backboard with two-coat varnish finish. Match trim, hardware, doors, and finishes with panelboards. Provide label and identification systems for telecommunications wiring and components consistent with TIA-606.

2.7 GROUNDING AND BONDING PRODUCTS

Provide in accordance with UL 467, TIA-607, and NFPA 70. Components shall be identified as required by TIA-606. Provide ground rods, bonding conductors, and grounding busbars as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. The preferred ground for the Telephone Main Grounding Bus (TMGB) bar will be to the Main electrical Distribution Panel (MDP) bus bar and building steel. In most cases, but not all; a #6 AWG bonding conductor is recommended for telecommunications. All grounding

and bonding conductors within the Telecommunications room will be green sheathed copper conductor, stranded, and labeled as suitable for use as such and tagged "DO NOT REMOVE". All grounding and bonding conductors running out of the Telecommunications room should be protected in conduit or attached to the outside of the cable tray and sized according to references.

The minimum size of the TMGB shall be no smaller than 4" by 10" (could be much longer as needed) by 1/4 inch thick; bus bar should be factory made and factory drilled, not fabricated or drilled onsite. All bonding and grounding terminations shall be irreversible and secured with a double hole crimp termination. Do not exceed minimum bend radius on bonding and grounding conductors. Do not put bonding conductors in conduit and on backboard (should be on backboard OR in conduit, not both). Mount Bus Bar to far left of telecomm backboard at approximately 60-70" AFF.

2.8 FIRESTOPPING MATERIAL

Provide as specified in Section 07 84 00 FIRESTOPPING.

2.9 MANUFACTURER'S NAMEPLATE

Each item of equipment shall have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.10 FIELD FABRICATED NAMEPLATES

ASTM D709. Provide laminated plastic nameplates for each equipment enclosure, relay, switch, and device; as specified or as indicated on the drawings. Each nameplate inscription shall identify the function and, when applicable, the position. Nameplates shall be melamine plastic, 0.125 inches thick, white with black center core. Surface shall be matte finish. Corners shall be square. Accurately align lettering and engrave into the core. Minimum size of nameplates shall be one by 2.5 inches. Lettering shall be a minimum of 0.25 inches high normal block style.

2.11 TESTS, INSPECTIONS, AND VERIFICATIONS

2.11.1 Factory Reel Tests

Provide documentation of the testing and verification actions taken by manufacturer to confirm compliance with TIA-568.1, TIA-568.2, TIA-568.3, TIA-526-7 for single mode optical fiber cables.

PART 3 EXECUTION

3.1 INSTALLATION

Install telecommunications cabling and pathway systems, including the horizontal and backbone cable, pathway systems, telecommunications outlet/connector assemblies, and associated hardware in accordance with NECA/BICSI 568, TIA-568.1, TIA-568.2, TIA-568.3, TIA-569, NFPA 70, manufacturer instructions, current industry best practices, local guidance, and UL standards as applicable (except 1-1/4" conduit should be used for individual WAO).

Provide cabling in a star topology network. Pathways and outlet boxes

shall be installed as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM and local guidance. Standard type 5" x 5" x 2 7/8" square box with a single gang plaster ring shall be used except in concrete or concrete masonry units (CMU) or in slab where a standard 4 11/16" square or a floor box will be used. Mount flush in finished walls at height indicated by drawings and with proper clearances from other networks and power systems. Depth of boxes shall be large enough to allow manufacturer's recommended conductor bend radii, normally 2 7/8" depth.

Install telecommunications cabling with copper media in accordance with the following criteria to avoid potential electromagnetic interference between power and telecommunications equipment.

The interference ceiling shall not exceed 3.0 volts per meter measured over the usable bandwidth of the telecommunications cabling. (normal minimum clearance distances of 4 feet from motors, generators, frequency converters, transformers, x-ray equipment or uninterrupted power system, 300 mm (12 in) from power conduits and cable systems, 125 mm (5 inches) from fluorescent or high frequency lighting system fixtures). Cabling shall be run with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.

3.1.1 Cabling

Install UTP, and optical fiber telecommunications cabling system as detailed in TIA-568.1, TIA-568.2, TIA-568.3. Screw terminals shall not be used except where specifically indicated on plans. Use an approved insulation displacement connection (IDC) tool kit for copper cable terminations. Do not untwist Category 6 cables more than ½" (12 mm) from the point of termination to maintain cable geometry. Provide service loop on each end of the cable, minimum 10' (3 meters) in the telecommunications room, 6" (150mm) in or close to the work area outlet.

Do not exceed manufacturers' cable pull tensions for copper and optical fiber cables. Provide a device to monitor cable pull tensions. Do not exceed 110 N (25 pounds) pull tension for four pair copper cables. Do not chafe or damage outer jacket materials. Use only lubricants approved by cable manufacturer. Do not over cinch cables, or crush cables with staples. Only hook and loop fasteners are allowed on Category 6/6A cable and optical fiber cable. DO NOT USE ZIP TIES.

For UTP cable, bend radii shall not be less than four times the cable diameter. Cables shall be terminated; no cable shall contain unterminated elements (see NFPA 70 abandoned cabling). Category 6/6A Cables shall not be spliced. Label cabling in accordance with paragraph LABELING in this section.

3.1.1.1 Open Cable

Use only where specifically indicated on plans (typically to continue existing systems in a renovation or in interim facilities) or use cable trays, or below raised floors in an approved pathway (free aired or free laid cabling is not authorized). Install in accordance with TIA-568.1, TIA-568.2 and TIA-568.3. Do not exceed cable pull tensions recommended by the manufacturer. Copper cable not in a wireway or pathway shall be suspended a minimum of 8 inches above ceilings by cable supports no greater than 60 inches apart.

Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items. Placement of cable parallel to power conductors shall be avoided, if possible; a minimum separation of 12 inches shall be maintained when such placement cannot be avoided.

Plenum cable shall be used where open cables are routed through plenum areas. Cable routed exposed under raised floors shall be plenum rated. Plenum cables shall comply with flammability plenum requirements of NFPA 70. Install cabling after the flooring system has been installed in raised floor areas. Cable 6 feet long shall be neatly coiled not less than 12 inches in diameter below each feed point in raised floor areas.

3.1.1.2 Backbone Cable

a. Copper Backbone Cable. Install intrabuilding backbone copper cable, in minimum 2-way 3 inch conduit or larger indicated pathways, between the campus distributor, located in the telecommunications entrance facility or room, the building distributors and the floor distributors located in telecommunications rooms and telecommunications equipment rooms as indicated on drawings.

b. Optical fiber Backbone Cable. Install intrabuilding backbone optical fiber in one of multiple interducts installed in conduit so as to maximize pathways, in indicated pathways, between various communications rooms and between racks of different classifications within the same room. Do not exceed manufacturer's recommended bending radii and pull tension. Prepare cable for pulling by cutting outer jacket 10 inches leaving strength members exposed for approximately 10 inches. Twist strength members together and attach to pulling eye. Vertical cable support intervals shall be in accordance with manufacturer's recommendations.

3.1.1.3 Horizontal Cabling

Install horizontal cabling as indicated on drawings Do not untwist Category 6 UTP cables more than one half inch from the point of termination to maintain cable geometry. Provide slack cable in the form of a figure eight (not a service loop) on each end of the cable, 10 feet in the telecommunications room, and 12 inches in the work area outlet.

3.1.2 Pathway Installations

Provide in accordance with TIA-569 and NFPA 70. Provide building pathway as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM, except that 1-1/4 inch diameter conduit from cable tray or telecommunication room backboard to each work area outlet is required.

Conceal conduit within finished walls, ceilings, and floors (not in wet areas). Keep conduit minimum 12 inches away from parallel runs of electrical power equipment, flues, steam, light ballast, and hot water pipes. Install conduit parallel with or at right angles to ceilings, walls, and structural members where located above accessible ceilings and where conduit is visible after completion of project. Run conduits in crawl spaces as if exposed.

Install no more than two 90 degree bends for a single horizontal cable run. All bends/turns in conduits will be in straight runs of conduit; a pull box shall be installed after every 180 degrees of bends or 100'; in

no case will a turn be made within a pull box. The minimum size for a pull box for a single 1¼" conduit will be 5" long by 5" wide by 2 7/8" deep, and for a 3" conduit 30"W x 54"L x9"D. All conduits should contain a bushing at the end to protect the cable from damage and required bonding. Pull points, LC, LB, condulets, and consolidation points are not authorized without a waiver from TSD.

Under floor cabling, under floor duct, and conduit under floor slabs should be avoided in the Camp Lejeune Greater area due to wet area close to coastal waters.

3.1.3 Service Entrance Conduit, Underground

Provide service entrance underground as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Underground portion shall be encased in minimum of 3 inches of concrete extending from the building entrance to OSP demarcation point and shall be a minimum of 18 inches below slab or grade. Location of entrance conduit in communications room shall be to the left, while facing the longest furthest wall from the door.

3.1.4 Cable Tray Installation

Install cable tray as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Only CMP and OFNP type cable shall be installed in a plenum.

A continuous stranded bonding conductor (typically copper #2awg) shall be run on the outside along the tray tapped to each section properly to ensure bonding. Remove all sharps from cable tray and pathways. Ensure bonding is on the pathway so as not to obstruct horizontal cabling. Maintain proper clearance and work space per TIA-569 and TEMPEST.

3.1.5 Work Area Outlets

3.1.5.1 Terminations

Terminate UTP cable in accordance with TIA-568.1, TIA-568.2 and wiring configuration as specified.

All private office (less than 80 sq ft) work areas will contain a minimum of two communications face plates. Any work area larger than 80 sq feet will require additional face plates to service any work location in the room within 6 feet of a faceplate. This also applies to any area that could be converted to work space in the future. Recommend a communications outlet box be placed 6" to the left or right of electrical outlet box in workable office areas or any area that could be converted into workable office area such as a storage closet; All work area face plates will contain four jacks/ four cables terminated with T568A configuration unless otherwise approved by AHJ. MUTOAs contain 12 cables and may require additional clearance and power.

3.1.5.2 Cover Plates

As a minimum, each outlet/connector shall be labeled as to its function and a unique number to identify cable link in accordance with the paragraph LABELING in this section. For secured networks contact AHJ as shielded twisted pair and color coded face plates may be necessary.

3.1.5.3 Cables

Unshielded / Shielded twisted pair and fiber optic cables shall have a minimum of 12 inches of slack cable loosely coiled into the telecommunications outlet boxes or in cable tray as close as possible to outlet box. Minimum manufacturer's bend radius for each type of cable shall not be exceeded.

3.1.5.4 Pull Cords

Pull cords shall be installed in conduit serving telecommunications outlets that do not have cable installed.

3.1.6 Telecommunications Space Termination

Install termination hardware required for Category 6 and optical fiber system. A single punch manufacture approved insulation displacement tool shall be used for terminating copper cable to insulation displacement connectors.

3.1.6.1 Connector Blocks

Connector blocks shall be rackwall mounted in orderly rows and columns. Adequate vertical and horizontal wire routing areas shall be provided between groups of blocks. Install in accordance with industry standard wire routing guides in accordance with TIA-569.

3.1.6.2 Patch Panels

Patch panels shall be mounted in equipment racks with sufficient ports to accommodate the installed cable plant plus 25 percent spares.

a. Copper Patch Panel. Copper cable entering a patch panel shall be secured to the panel with cable tiesas recommended by the manufacturer to prevent movement of the cable.

b. Fiber Optic Patch Panel. Fiber optic cable loop shall be 3 feet in lengthprovided as recommended by the manufacturer. The outer jacket of each cable entering a patch panel shall be secured to the panel per manufacture instructions to prevent movement of the fibers within the panel, using clamps or brackets specifically manufactured for that purpose.

3.1.6.3 Equipment Support Frames

Install in accordance with TIA-569:

a. Bracket, wall mounted. Mount bracket to plywood backboard in accordance with manufacturer's recommendations. Mount rack so height of highest panel does not exceed 78 inches above floor. Mount so there is sufficient space remaining on backboard to mount lightning protection, bonding, and cable managers or install additional backboards.

b. Racks, floor mounted modular type. Permanently anchor rack to the floor in accordance with manufacturer's recommendations. Install sections of ladder rack anchored to telephone rack/cabinet and at least two walls.

c. Cabinets, freestanding modular type. Permanently anchor to the floor in accordance with manufacturer's recommendations. When cabinets are connected together, remove adjoining side panels for cable routing between cabinets. Mount rack mounted fan in roofbase of cabinet and 19" power/surge strip in cabinet. Install sections of ladder rack anchored to telephone rack/cabinet and at least two walls.

d. Cabinets, wall-mounted modular type. Mount cabinet to right on plywood backboard in accordance with manufacturer's recommendations. Mount cabinet so height of highest panel does not exceed 78 inches above floor. Mount so there is sufficient space remaining on backboard to mount lightning protection, bonding, and cable managers or install additional backboards.

3.1.7 Electrical Penetrations

Seal openings around electrical penetrations through fire resistance-rated wall, partitions, floors, or ceilings as specified in Section 07 84 00 FIRESTOPPING.

3.1.8 Grounding and Bonding

Provide in accordance with TIA-607, NFPA 70 and as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM except only two hole irreversible compression lugs will be accepted.

3.2 LABELING

3.2.1 Labels

Provide labeling in accordance with TIA-606, except jacks will be numbered in a logical, sequential, clockwise numbering system from 1 to X with a closet designator. Example would be 145 C 146, would be the 145th & 146th jacks from the C telecom room. All labels shall be numbered with manufacturer's labeling system (not fabricated) and be equipped with laminated plastic cover.

All terminations that are not to work area outlets should be in the last patch panel locations and labeled accordingly i.e. DDC, FACP, Elevator, Wall phones, or Wireless access points. Handwritten labeling is unacceptable. Stenciled lettering for voice and data circuits shall be provided using laser printer .

3.2.2 Cable

Cables shall be labeled using color labels on both ends with identifiers in accordance with TIA-606.

3.2.3 Termination Hardware

Workstation outlets and patch panel connections shall be labeled using color coded labels with identifiers in accordance with this section and TIA-606. Coordinate with TSD (Base Telephone).

3.3 FIELD APPLIED PAINTING

Paint electrical equipment as required to match finish of adjacent surfaces or to meet the indicated or specified safety criteria. Painting shall be as specified in Section 09 90 00 PAINTS AND COATINGS.

3.3.1 Painting Backboards

Camp Lejeune no longer paints backboards as fire rated plywood is available. Manufactured fire retardant backboard shall be used, so as not to increase flame spread and smoke density and must be appropriately labeled.

3.4 FIELD FABRICATED NAMEPLATE MOUNTING

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets.

3.5 TESTING

3.5.1 Telecommunications Cabling Testing

Perform telecommunications cabling inspection, verification, and performance tests on both Backbone and Horizontal cabling in accordance with TIA-568.1, TIA-568.2, TIA-568.3 and AHJ local guidance. Test equipment shall conform to TIA-1152. Perform optical fiber field inspection tests via attenuation measurements on factory reels and provide results along with manufacturer certification for factory reel tests. Remove failed cable reels from project site upon attenuation test failure.

3.5.1.1 Inspection

Visually inspect all telecommunications cabling jacket materials for UL or third party certification markings. Inspect cabling terminations in telecommunications rooms and at workstations to confirm color code for T568A or T568B pin assignments, and inspect cabling connections to confirm compliance with TIA-568.1, TIA-568.2, TIA-568.3, . Visually confirm Category 6, marking of outlets, cover plates, outlet/connectors, cable physical damage, and patch panels.

3.5.1.2 Verification Tests

Backbone copper cabling shall be tested for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors, and between conductors and shield, if cable has overall shield. Test operation of shorting bars in connection blocks. Test cables after termination but prior to being cross-connected.

3.5.1.3 Performance Tests

Provide summary in.pdf detailed tester results in test format .flw , and fiber power meter/OTDR reports summary and detailed. All Test reports should have a building or project number on each page. The final QC and certification of installation will be performed by TSD after the contractor has provided passing and acceptable results on all test and as-built drawings showing all telecommunications outlets and their numbers to include any empty conduit or ports coiled in overhead for future use and all building automated system ports such as DDC, Elevator, FACP, or WAPs.

Test results that are marginal may not be accepted. Also fiber tests that pass the link budget but exceed tolerance on any connector or splice are

considered a failure. All discrepancies must be repaired and retested.

Perform testing for each outlet and MUTOA as follows:

a. Perform Category 6 link tests in accordance with TIA-568.1 and TIA-568.2. Tests shall include wire map, length, insertion loss, NEXT, PSNEXT, ELFEXT, PSELFEXT, return loss, propagation delay, and delay skew.

b. Optical fiber Links. Perform optical fiber end-to-end link tests in accordance with TIA-568.3.

3.5.1.4 Final Verification Tests

Perform verification tests for all copper and optical fiber systems after the complete telecommunications cabling and workstation outlet/connectors are installed.

a. Voice Tests. These tests assume that dial tone service has been installed (normally done for FACP, Elevator, or emergency phones). Connect to the network interface device at the demarcation point. Go off-hook and listen and receive a dial tone. If a test number is available, make and receive a local, long distance, and DSN telephone call.

b. Data Tests. These tests assume the Information Technology Staff has a network installed and are available to assist with testing (normally done for VTC, CCTV). Connect to the network interface device at the demarcation point. Log onto the network to ensure proper connection to the network.

-- End of Section --

SECTION 28 31 76

INTERIOR FIRE ALARM AND MASS NOTIFICATION SYSTEM, ADDRESSABLE
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ACOUSTICAL SOCIETY OF AMERICA (ASA)

ASA S3.2	(2020; R 2025) American National Standard Method for Measuring the Intelligibility of Speech Over Communication Systems

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41.1	(2002; R 2008) Guide on the Surges Environment in Low-Voltage (1000 V and Less) AC Power Circuits
IEEE C62.41.2	(2002) Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 4	(2024) Standard for Integrated Fire Protection and Life Safety System Testing
NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code
NFPA 72	(2025; TIA 25-1; TIA 25-2; TIA 25-3; TIA 25-4; ERTA 25-1; ERTA 25-2) National Fire Alarm and Signaling Code
NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems
NFPA 170	(2024; ERTA 1 2023) Standard for Fire Safety and Emergency Symbols

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-601-02	(2021; with Change 1, 2025) Fire Protection Systems Inspection, Testing,

	and Maintenance
UFC 4-010-06	(2023) Cybersecurity of Facility-Related Control Systems

UL SOLUTIONS (UL)

UL 268	(2023) UL Standard for Safety Smoke Detectors for Fire Alarm Systems
UL 268A	(2008; Reprint Aug 2025) Smoke Detectors for Duct Application
UL 464	(2023) UL Standard for Safety Audible Signaling Devices for Fire Alarm and Signaling Systems, Including Accessories
UL 497A	(2001; Bul. 2019) UL Standard for Safety Secondary Protectors for Communications Circuits
UL 497B	(2004; Reprint Feb 2022) UL Standard for Safety Protectors for Data Communications and Fire Alarm Circuits
UL 864	(2023; Reprint Oct 2024) UL Standard for Safety Control Units and Accessories for Fire Alarm Systems
UL 1283	(2025) UL Standard for Safety Electromagnetic Interference Filters
UL 1449	(2021; Reprint Oct 2025) UL Standard for Safety Surge Protective Devices
UL 1480	(2023) UL Standard for Safety Speakers for Fire Alarm and Signaling Systems, Including Accessories
UL 1638	(2023) UL Standard for Safety Visible Signaling Devices for Fire Alarm and Signaling Systems, Including Accessories
UL 1971	(2002; Reprint Feb 2024) UL Standard for Safety Signaling Devices for the Deaf and Hard of Hearing
UL 2017	(2008; Reprint Jan 2024) UL Standard for Safety General-Purpose Signaling Devices and Systems
UL 2572	(2016; Bul. 2018) UL Standard for Safety Mass Notification Systems
UL Fire Prot Dir	UL Product IQ (updated online) at https://productiq.ulprospector.com/en

1.2 RELATED SECTIONS

Refer to the following sections for related work and coordination:

Section 21 13 13 WET PIPE SPRINKLER SYSTEM, FIRE PROTECTION
Section 07 84 00 FIRESTOPPING for additional work related to firestopping.

1.3 SUMMARY

1.3.1 Scope

a. This work includes designing and providing a new, complete, fire alarm and mass notification (MNS) system as described herein and on the contract drawings. Include system wiring, raceways, pull boxes, terminal cabinets, outlet and mounting boxes, control equipment, initiating devices, notification appliances, supervising station fire alarm transmitters/mass notification transceiver, and other accessories and miscellaneous items required for a complete operational system even though each item is not specifically mentioned or described. Provide system(s) complete and ready for operation. Design and installation must comply with UFC 4-010-06.

b. Provide equipment, materials, installation, workmanship, inspection, and testing in strict accordance with NFPA 72, except as modified herein. The system layout on the drawings show the intent of coverage and suggested locations. Final quantity, system layout, and coordination are the responsibility of the Contractor.

1.3.2 Qualified Fire Protection Engineer (QFPE)

The QFPE in this section is the same as FPQC in section 01 45 00. Wherever "Qualified Fire Protection Engineer (QFPE)" of "QFPE" appears in this section, substitute with "Fire Protection Quality Control Specialist (FPQC)". Services of the QFPE must include:

a. Reviewing SD-02, SD-03, and SD-05 submittal packages for completeness and compliance with the provisions of this specification. Construction (shop) drawings and calculations must be prepared by, or prepared under the immediate supervision of, the QFPE. The QFPE must affix their professional engineering stamp with signature to the shop drawings, calculations, and material data sheets, indicating approval prior to submitting the shop drawings to the DFPE.

b. Providing a letter documenting that the SD-02, SD-03, and SD-05 submittal package has been reviewed and noting any outstanding comments.

c. Performing in-progress construction surveillance prior to installation of ceilings (rough-in inspection).

d. Witnessing pre-Government and final Government functional performance testing and performing a final installation review.

e. Signing applicable certificates under SD-07.

1.4 DEFINITIONS

Wherever mentioned in this specification or on the drawings, the

equipment, devices, and functions must be defined as follows:

1.4.1 Interface Device

An addressable device that interconnects hard wired systems or devices to an analog/addressable system.

1.4.2 Fire Alarm and Mass Notification Control Unit (FMCU)

A master control unit having the features of a fire alarm control unit (FACU) and an autonomous control unit (ACU) where these units are interconnected to function as a combined fire alarm/mass notification system. The FACU and ACU functions may be contained in a single cabinet or in independent, interconnected, and co-located cabinets.

1.4.3 Remote Fire Alarm and Mass Notification Control Unit

A control unit, physically remote from the fire alarm and mass notification control unit, that receives inputs from automatic and manual fire alarm devices; may supply power to detection devices and interface devices; may provide transfer of power to the notification appliances; may provide transfer of condition to relays or devices connected to the control unit; and reports to and receives signals from the fire alarm and mass notification control unit.

1.4.4 Terminal Cabinet

A steel cabinet with locking, hinge-mounted door where terminal strips are securely mounted inside the cabinet.

1.4.5 Control Module and Relay Module

Terms utilized to describe emergency control function interface devices as defined by NFPA 72.

1.4.6 Designated Fire Protection Engineer (DFPE)

The DoD fire protection engineer that oversees that Area of Responsibility for that project. This is sometimes referred to as the "cognizant" fire protection engineer. Interpret reference to "authority having jurisdiction" and AHJ in referenced standards to mean the Designated Fire Protection Engineer (DFPE). The DFPE may be responsible for review of the contractor submittals having a "G" designation, and for witnessing final inspection and testing.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval.

Shop drawings (SD-02), product data (SD-03) and calculations (SD-05) must be prepared by the fire alarm designer and combined and submitted as one complete package. The QFPE must review the SD-02/SD-03/SD-05 submittal package for completeness and compliance with the Contract provisions prior to submission to the Government. The QFPE must provide a Letter of Confirmation that they have reviewed the submittal package for compliance with the contract provisions. This letter must include their registered professional engineer stamp and signature. Partial submittals and

submittals not reviewed by the QFPE will be returned by the Government disapproved without review.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualified Fire Protection Engineer (QFPE); G

Fire alarm system designer; G

Supervisor; G

Technician; G

Installer; G

Test Technician; G

Fire Alarm System Site-Specific Software Acknowledgement; G

SD-02 Shop Drawings

Nameplates; G

Instructions; G

Wiring Diagrams; G

System Layout; G

Notification Appliances; G

Initiating devices; G

Amplifiers; G

Battery Power; G

Voltage Drop Calculations; G

SD-03 Product Data

Fire Alarm and Mass Notification Control Unit (FMCU); G

Amplifiers; G

Tone Generators; G

Digitalized voice generators; G
Manual Stations; G

Smoke Detectors; G

Duct Smoke Detectors; G

Addressable Interface Devices; G

Addressable Control Modules; G

Notification Appliances; G

Batteries; G

Battery Chargers; G

Supplemental Notification Appliance Circuit Panels; G

Auxiliary Power Supply Panels; G

Surge Protective Devices; G

Alarm Wiring; G

Back Boxes and Conduit; G

Ceiling Bridges for Ceiling-Mounted Appliances; G

Terminal Cabinets; G

Digital Alarm Communicator Transmitter (DACT); G

Environmental Enclosures or Guards; G

Document Storage Cabinet; G

SD-06 Test Reports

Test Procedures; G

SD-07 Certificates

Verification of Compliant Installation; G

Request for Government Final Test; G

SD-10 Operation and Maintenance Data

Operation and Maintenance (O&M) Instructions; G

Instruction of Government Employees; G

SD-11 Closeout Submittals

As-Built Drawings

Spare Parts

1.6 SYSTEM OPERATION

Fire alarm system/mass notification system including textual display sign control panel(s), components requiring power, except for the FMCU(s) power supply, must operate on 24 volts DC unless noted otherwise in this section.

The interior fire alarm and mass notification system must be a complete, supervised, noncoded, analog/addressable fire alarm and mass notification system conforming to NFPA 72, UL 864, and UL 2572. Systems meeting UL 2017

only are not acceptable. The system must be activated into the alarm mode by actuation of an alarm initiating device. The system must remain in the alarm mode until the initiating device is reset and the control unit is reset and restored to normal. The system may be placed in the alarm mode by local microphones, FMCU, or remotely from authorized locations/users.

1.6.1 Alarm Initiating Devices and Notification Appliances (Visual, Voice, Textual)

a. Connect alarm initiating devices to initiating device circuits (IDC) Class "A", or to signaling line circuits (SLC) Class "A" and installed in accordance with NFPA 72.

b. Connect notification appliances to notification appliance circuits (NAC) Class "A".

1.6.2 Functions and Operating Features

The system must provide the following functions and operating features:

a. Power, annunciation, supervision, and control for the system. Addressable systems must be microcomputer (microprocessor or microcontroller) based with a minimum word size of eight bits with sufficient memory to perform as specified.

b. Visual alarm notification appliances must be synchronized as required by NFPA 72.

c. Electrical supervision of the primary power (AC) supply, presence of the battery, battery voltage, and placement of system modules within the control unit.

d. An audible and visual trouble signal to activate upon a single break or open condition, or ground fault. The trouble signal must also operate upon loss of primary power (AC) supply, absence of a battery supply, low battery voltage, or removal of alarm or supervisory control unit modules. After the system returns to normal operating conditions, the trouble signal must again sound until the trouble is acknowledged. A smoke detector in the process of being verified for the actual presence of smoke must not initiate a trouble condition.

e. A trouble signal silence feature that must silence the audible trouble signal, without affecting the visual indicator.

f. Program capability via switches in a locked portion of the FMCU to bypass the automatic notification appliance circuits, fire reporting system and air handler shutdown features. Operation of this programmed action must indicate on the FMCU display as a supervisory or trouble condition. Notification appliance bypass must be selectable by floor.

g. Alarm functions must override trouble or supervisory functions. Supervisory functions must override trouble functions.

h. The system must be capable of being programmed from the control unit keyboard. Programmed information must be stored in non-volatile memory.

i. The system must be capable of operating, supervising, and monitoring non-addressable alarm and supervisory devices.

j. There must be no limit, other than maximum system capacity, as to the number of addressable devices that may be in alarm simultaneously.

k. Where the fire alarm/mass notification system is responsible for initiating an action in another emergency control device or system, such as HVAC, the addressable fire alarm relay must be located in the vicinity of the emergency control device.

l. An alarm signal must automatically initiate the following functions:

(1) Transmission of an alarm signal to the fire department using Contact ID Protcool.

(2) Visual indication of the device operated on the FMCU.

(3) Actuation of alarm notification appliances.

(4) Recording of the event electronically in the history log of the FMCU.

m. A supervisory signal must automatically initiate the following functions:

(1) Visual indication of the device operated on the FMCU.

(2) Transmission of a supervisory signal to the fire department using Contact ID Protcool.

(3) Operation of a duct smoke detector must shut down the appropriate air handler in accordance with NFPA 90A in addition to other requirements of this paragraph and as allowed by NFPA 72.

(4) Recording of the event electronically in the history log of the FMCU.

n. A trouble condition must automatically initiate the following functions:

(1) Visual indication of the device operated on the FMCU.

(2) Transmission of a trouble signal to the fire department using Contact ID Protocol.

(3) Recording of the event electronically in the history log of the FMCU.

o. System control equipment must be programmed to provide a 60-minute to 180-minute delay in transmission of trouble signals resulting from primary power failure.

1.7 TECHNICAL DATA AND SITE-SPECIFIC SOFTWARE

Technical data and site-specific software (meaning technical data that relates to computer software) that are specifically identified in this project, and may be required in other specifications, must be delivered, strictly in accordance with the CONTRACT CLAUSES. The fire alarm system manufacturer must submit written confirmation of this contract provision

as "Fire Alarm System Site-Specific Software Acknowledgement". Identify data delivered by reference to the specification paragraph against which it is furnished. Data to be submitted must include complete system, equipment, and software descriptions. Descriptions must show how the equipment will operate as a system to meet the performance requirements of this contract. The site-specific software data package must also include the following:

a. Items identified in NFPA 72, titled "Site-Specific Software".

b. Identification of programmable portions of the system equipment and capabilities.

c. Description of system revision and expansion capabilities and methods of implementation detailing both equipment and software requirements.

d. Provision of operational software data on all modes of programmable portions for fire alarm and mass notification.

e. Description of Fire Alarm and Mass Notification Control Unit equipment operation.

f. Description of auxiliary and remote equipment operations.

g. Library of application software.

h. Operation and maintenance manuals.

1.8 EXISTING EQUIPMENT

a. Equipment and devices must be compatible and operable with the existing supervising station and must not impair reliability or operational functions of existing supervising station fire alarm system. The supervising equipment is existing and consists of the following brand and model: ,Sur-Gard System 5 Multi-Platform Digital Telephone Receiver.

1.9 QUALITY ASSURANCE

1.9.1 Submittal Documents

1.9.1.1 Preconstruction Submittals

Within 36 days of contract award but not less than 14 days prior to commencing any work on site, the Contractor must submit the following for review and approval. SD-02, SD-03 and SD-05 submittals received prior to the review and approval of the qualifications of the fire alarm subcontractor and QFPE must be returned disapproved without review. All resultant delays must be the sole responsibility of the Contractor.

1.9.1.2 Shop Drawings

Shop drawings must not be smaller than the Contract Drawings. Drawings must comply with the requirements of NFPA 72 and NFPA 170. Minimum scale for floor plans must be 1/8"=1'.

1.9.1.3 Nameplates

Nameplate illustrations and data to obtain approval by the Contracting Officer before installation.

1.9.1.4 Wiring Diagrams

One copy of point-to-point wiring diagrams showing the points of connection and terminals used for electrical field connections in the system, including interconnections between the equipment or systems that are supervised or controlled by the system. Diagrams must show connections from field devices to the FMCU and remote FMCU, initiating circuits, switches, relays and terminals, including pathway diagrams between the control unit and shared communications equipment within the protected premises. Point-to-point wiring diagrams must be job specific and must not indicate connections or circuits not being utilized. Provide complete riser diagrams indicating the wiring sequence of all devices and their connections to the control equipment. Include a color-code schedule for the wiring.

1.9.1.5 System Layout

One copy of plan view drawing showing device locations, terminal cabinet locations, junction boxes, other related equipment, conduit routing, conduit sizes, wire counts, conduit fill calculations, wire color-coding, circuit identification in each conduit, and circuit layouts for all floors. Indicate candela rating of each visual notification appliance. Indicate the wattage of each speaker. Clearly identify the locations of isolation modules. Indicate the addresses of all devices, modules, relays, and similar. Show/identify all acoustically similar spaces. Indicate if the environment for the FMCU is within its environmental listing (e.g. temperature/humidity).

Provide a complete description of the system operation in matrix format similar to the "Typical Input/Output Matrix" included in the Annex of NFPA 72.

1.9.1.6 Notification Appliances

Calculations and supporting data on each circuit to indicate that there is at least 25 percent spare capacity for notification appliances. Annotate data for each circuit on the drawings.

1.9.1.7 Initiating Devices

Calculations and supporting data on each circuit to indicate that there is at least 25 percent spare capacity for initiating devices. Annotate data for each circuit on the drawings.

1.9.1.8 Amplifiers

Calculations and supporting data to indicate that amplifiers have sufficient capacity to simultaneously drive all notification speakers at tapped settings plus 25 percent spare capacity. Annotate data for each circuit on the drawings.

1.9.1.9 Battery Power

Calculations and supporting data as required in paragraph Battery Power Calculations for alarm, alert, and supervisory power requirements. Calculations including ampere-hour requirements for each system component and each control unit component, and the battery recharging period, must be included on the drawings.

1.9.1.10 Voltage Drop Calculations

Voltage drop calculations for each notification circuit indicating that sufficient voltage is available for proper operation of the system and all components, at a minimum rated voltage of the system operating on batteries. Include the calculations on the system layout drawings.

1.9.1.11 Product Data

One copy of annotated descriptive data to show the specific model, type, and size of each item. Catalog cuts must also indicate the NRTL listing. The data must be highlighted to show model, size, and options that are intended for consideration. Data must be adequate to demonstrate compliance with all contract requirements. Product data for all equipment must be combined into a single submittal.

Provide an equipment list identifying the type, quantity, make, and model number of each piece of equipment to be provided under this submittal. The equipment list must include the type, quantity, make and model of spare equipment. Types and quantities of equipment submitted must coincide with the types and quantities of equipment used in the battery calculations and those shown on the shop drawings.

1.9.1.12 Operation and Maintenance (O&M) Instructions

One copy of the Operation and Maintenance Instructions. The O&M Instructions must be prepared in a single volume or in multiple volumes, with each volume indexed, and may be submitted as a Technical Data Package. Manuals must be approved prior to training. The Interior Fire Alarm And Mass Notification System Operation and Maintenance Instructions must include the following:

a. "Manufacturer Data Package five" as specified in Section 01 78 23 OPERATION AND MAINTENANCE DATA.

b. Operating manual outlining step-by-step procedures required for system startup, operation, and shutdown. The manual must include the manufacturer's name, model number, service manual, parts list, and preliminary equipment list complete with description of equipment and their basic operating features.

c. Maintenance manual listing routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guide. The manuals must include conduit layout, equipment layout and simplified wiring, and control diagrams of the system as installed.

d. Complete procedures for system revision and expansion, detailing both equipment and software requirements.

e. Software submitted for this project on CD/DVD media utilized.

f. Printouts of configuration settings for all devices.

g. Routine maintenance checklist. The routine maintenance checklist must be arranged in a columnar format. The first column must list all installed devices, the second column must state the maintenance activity or state no maintenance required, the third column must state the frequency of the maintenance activity, and the fourth column

provided for additional comments or reference. All data (devices, testing frequencies, and similar) must comply with UFC 3-601-02.

h. A final Equipment List must be submitted with the Operating and Maintenance (O&M) manual.

1.9.1.13 As-Built Drawings

The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. A bill of material and Contact ID Point Description Table must be included on the as-built drawings. These drawings must be submitted within two weeks after the final Government test of the system. At least one set of the as-built (marked-up) drawings must be provided at the time of, or prior to the final Government test.

1.9.2 Qualifications

1.9.2.1 Fire Alarm System Designer

The fire alarm system designer must be certified as a Level IV (minimum) Technician by National Institute for Certification in Engineering Technologies (NICET) in the Fire Alarm Systems subfield of Fire Protection Engineering Technology or meet the qualifications for a QFPE.

1.9.2.2 Supervisor

A NICET Level IV fire alarm technician must supervise the installation of the fire alarm/mass notification system. The fire alarm technicians supervising the installation of equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.9.2.3 Technician

Fire alarm technicians with a minimum of four years of experience must be utilized to install and terminate fire alarm/mass notification devices, cabinets and control units. The fire alarm technicians installing the equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.9.2.4 Installer

Fire alarm installer with a minimum of two years of experience utilized to assist in the installation of fire alarm/mass notification devices, cabinets and control units. A licensed electrician must be allowed to install wire, cable, conduit and backboxes for the fire alarm system/mass notification system. The fire alarm installer must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.9.2.5 Test Technician

Fire alarm technicians with a minimum of eight years of experience and NICET Level IV utilized in testing and certification of the installation of the fire alarm/mass notification devices, cabinets and control units. The fire alarm technicians testing the equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment

installed as part of this project.

1.9.2.6 Manufacturer

Components must be of current design and must be in regular and recurrent production at the time of installation. Provide design, materials, and devices for a protected premises fire alarm system, complete, conforming to NFPA 72, except as specified herein.

1.9.3 Regulatory Requirements

Equipment and material must be listed or approved. Listed or approved, as used in this section, means listed, labeled or approved by a Nationally Recognized Testing Laboratory (NRTL) such as UL Fire Prot Dir or FM APP GUIDE. The omission of these terms under the description of any item of equipment described must not be construed as waiving this requirement. All listings or approvals by testing laboratories must be from an existing ANSI or UL published standard. The recommended practices stated in the manufacturer's literature or documentation must be considered as mandatory requirements.

1.10 DELIVERY, STORAGE, AND HANDLING

Protect equipment delivered and placed in storage from the weather, humidity, and temperature variation, dirt and dust, and other contaminants.

1.11 MAINTENANCE

1.11.1 Spare Parts

Furnish the following spare parts in the manufacturers original unopened containers:

a. Five complete sets of system keys.

b. One manual stations.

c. Two of each type of detector base and head installed.

d. Two of each type of audible and visual alarm device installed.

e. Two of each type of addressable monitor module installed.

f. Two of each type of addressable control module installed.

g. Two low voltage, one telephone/internet/ethernet, and one 120 VAC surge protective device.

1.11.2 Special Tools

Software, connecting cables, proprietary equipment, and one laptop, necessary for the maintenance, testing, and reprogramming of the equipment must be provided to the Contracting Officer, prior to the instruction of Government employees. Provide backup program of the fire alarm panel on a USB storage device for the Camp Lejeune Fire and Emergency Services.

PART 2 PRODUCTS

2.1 GENERAL PRODUCT REQUIREMENT

All fire alarm and mass notification equipment must be listed for use under the applicable reference standards. Interfacing of UL 864 or similar approved industry listing with Mass Notification equipment listed to UL 2572 must be done in a laboratory listed configuration, if the software programming features cannot provide a listed interface control.

2.2 MATERIALS AND EQUIPMENT

2.2.1 Standard Products

Provide materials, equipment, and devices that have been tested by a nationally recognized testing laboratory and listed for fire protection service when so required by NFPA 72 or this specification. Select material from one manufacturer, where possible, and not a combination of manufacturers, for any particular classification of materials. Material and equipment must be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid opening.

2.2.2 Nameplates

Major components of equipment must have the manufacturer's name, address, type or style, model or serial number, catalog number, date of installation, installing Contractor's name and address, and the contract number provided on a new name plate permanently affixed to the item or equipment. Major components include, but are not limited to, the following:

a. FMCU

Nameplates must be etched metal or plastic, permanently attached by screws to control units or adjacent walls.

2.2.3 Keys

Keys and locks for equipment, control units and devices must be identical. Master all keys and locks to a single key as required by the Installation Fire Department.

2.2.4 Instructions

Provide a typeset printed or typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame. Install the frame in a conspicuous location observable from the FMCU. The card must show those steps to be taken by an operator when a signal is received as well as the functional operation of the system under all conditions, normal, alarm, supervisory, and trouble. The instructions must also include procedures for operating live voice microphones. The instructions and their mounting location must be approved by the Contracting Officer before being posted.

2.3 FIRE ALARM AND MASS NOTIFICATION CONTROL UNIT

Provide a complete fire alarm and mass notification control unit (FMCU) fully enclosed in a lockable steel cabinet as specified herein.

Operations required for testing or for normal care, maintenance, and use of the system must be performed from the front of the enclosure. If more than a single unit is required at a location to form a complete control unit, the unit cabinets must match exactly. The system must be capable of defining any module as an alarm module and report alarm trouble, loss of polling, or as a supervisory module, and reporting supervisory short, supervisory open or loss of polling such as waterflow switches, valve supervisory switches, relays for output function actuation.

a. Each control unit must provide power, supervision, control, and logic for the entire system, utilizing modular components, internally mounted and arranged for easy access. Each control unit must be suitable for operation on a 120 volt, 60 hertz, normal building power supply. Provide each control unit with supervisory functions for power failure, internal component placement, and operation.

b. Visual indication of alarm, supervisory, or trouble initiation on the FMCU must be by liquid crystal display or similar means with a minimum of 80 characters. The mass notification control unit must have the capability of temporarily deactivate the fire alarm audible notification appliances while delivering voice messages.

c. Provide secure operator console for initiating recorded messages, strobes and displays; and for delivering live voice messages. Provide capacity for at least eight prerecorded messages. Provide the ability to automatically repeat prerecorded messages. Provide a secure microphone for delivering live messages. Provide adequate discrete outputs to temporarily deactivate fire alarm audible notification, initiate/synchronize strobes and initiate textual visual notification appliances. Provide a complete set of self-diagnostics for controller and appliance network. Provide local diagnostic information display and local diagnostic information and system event log file.

2.3.1 Cabinet

Install control unit components in cabinets large enough to accommodate all components and also to allow ample gutter space for interconnection of control units as well as field wiring. The cabinet must be a sturdy steel housing, complete with back box, hinged steel door with cylinder lock, and surface mounting provisions. The enclosure must be identified by an engraved phenolic resin nameplate. Lettering on the nameplate must say "Fire Alarm and Mass Notification control unit" and must not be less than 1-inch high. Provide prominent rigid plastic or metal identification plates for lamps, circuits, meters, fuses, and switches.

2.3.2 Silencing Switches

2.3.2.1 Alarm Silencing Switch

Provide an alarm silencing switch at the FMCU that must silence the audible and visual notification appliances. Subsequent activation of initiating devices must cause the notification appliances to re-activate.

2.3.2.2 Supervisory/Trouble Silencing Switch

Provide supervisory and trouble silencing switch(es) that must silence the audible trouble and supervisory signal(s), but not extinguish the visual indicator. This switch must be overridden upon activation of a subsequent supervisory or trouble condition. Audible trouble indication must resound

automatically every 24 hours after the silencing feature has been operated if the supervisory or trouble condition still exists.

2.3.3 Non-Interfering

Power and supervise each circuit such that a signal from one device does not prevent the receipt of signals from any other device. Initiating devices must be manually reset by switch from the FMCU after the initiating device or devices have been restored to normal.

2.3.4 Audible Notification System

The Audible Notification System must comply with the requirements of NFPA 72 for Emergency Voice/Alarm Communications System requirements, except as specified herein. The system must be a one-way, multi-channel voice notification system incorporating user selectability of a minimum eight distinct sounds for tone signaling, and the incorporation of a voice module for delivery of recorded messages. Audible appliances must produce a three-pulse temporal pattern for three cycles followed by a voice message that is repeated until the control unit is reset or silenced. Automatic messages must be broadcast through speakers throughout the building/facility but not in stairs or elevator cabs. A live voice message must override the automatic audible output through use of a microphone input at the control unit.

a. When using the microphone, live messages must be broadcast throughout a selected floor or floors, or all call. The system must be capable of operating all speakers at the same time. The microphone must be hand-held style. Hand-held microphones must be housed in a separate protective cabinet. The cabinet must be accessible without the use of a key. The location of the microphone(s) must be approved by the Designated Fire Protection Engineer (DFPE).

b. The microprocessor must actively interrogate circuitry, field wiring, and digital coding necessary for the immediate and accurate rebroadcasting of the stored voice data into the appropriate amplifier input. Loss of operating power, supervisory power, or any other malfunction that could render the digitalized voice module inoperative must automatically cause the three-pulse temporal pattern to take over all functions assigned to the failed unit in the event an alarm is activated.

2.3.4.1 Outputs and Operational Modules

All outputs and operational modules must be fully supervised with on-board diagnostics and trouble reporting circuits. Provide form "C" contacts for system alarm and trouble conditions. Provide circuits for operation of auxiliary appliance during trouble conditions. During a Mass Notification event, the control unit must not generate nor cause any trouble alarms to be generated with the Fire Alarm system.

2.3.4.2 Mass Notification

a. The system must have the capability of utilizing an LOC with redundant controls of the FMCU. Notification Appliance Circuits (NAC) must be provided for the activation of strobe appliances. Audio output must be selectable for line level. A hand-held microphone must be provided and, upon activation, must take priority over any tone signal, recorded message or PA microphone operation in progress, while

maintaining the strobe NAC circuit activation.

b. The Mass Notification functions must override the manual or automatic fire alarm notification. Other fire alarm functions including transmission of a signal(s) to the fire department must remain operational. When a mass notification announcement is disengaged and a fire alarm condition still exists, the audible and visual notification appliances must resume activation for alarm conditions. The fire alarm message must be of lower priority that all other messages (except any "test" messages) and must not override any other messages. If not manually ended, any mass notification announcement will automatically end after 10 minutes.

c. Messages must be recorded professionally utilizing standard industry methods, in a professional female voice. Message and tone volumes must both be at the same decibel level. Messages recorded from the system microphone must not be accepted. A 1000 Hz tone (as required by NFPA 72) must precede messages and be similar to the following unless Installation or Facility specific messages are required:

(1) Fire: "May I have your attention please. May I have your attention please. A fire emergency has been reported in the building. Please leave the building by the nearest exit or exit stairway." (Provide a 2 second pause.) "May I have your attention please, (repeat the tones and message on a continuous loop)."

d. Auxiliary Input Module must be designed to be an outboard expansion module to either expand the number of optional LOC's, or allow a telephone interface.

2.3.4.3 Installation-Wide Control

If an installation-wide control system for mass notification exists on the Base, the autonomous control unit must communicate with the central control unit of the Installation-wide system. The autonomous control unit must receive commands/messages from the central control unit and provide status information.

2.3.5 Memory

Provide each control unit with non-volatile memory and logic for all functions. The use of long life batteries, capacitors, or other age-dependent devices must not be considered as equal to non-volatile processors, PROMS, or EPROMS.

2.3.6 Field Programmability

Provide control units and control units that are fully field programmable for both input and output of control, initiation, notification, supervisory, and trouble functions. The system program configuration must be menu driven. System changes must be password protected. Any proprietary equipment and proprietary software needed by qualified technicians to implement future changes to the fire alarm system must be provided as part of this contract.

A lockout code must not be installed in the hardware firmware, or software

of any fireproection system. The installer and operator codes musst remain as the factory default setting.

2.3.7 Input/Output Modifications

The FMCU must contain features that allow the bypassing of input devices from the system or the modification of system outputs. These control features must consist of a control unit mounted keypad. Any bypass or modification to the system must indicate a trouble condition on the FMCU.

2.3.8 Resetting

Provide the necessary controls to prevent the resetting of any alarm, supervisory, or trouble signal while the alarm, supervisory or trouble condition on the system still exists.

2.3.9 Walk Test

The FMCU must have a walk test feature. When using this feature, operation of initiating devices must result in limited system outputs, so that the notification appliances operate for only a few seconds and the event is indicated in the history log, but no other outputs occur.

2.3.10 History Logging

The control unit must have the ability to store a minimum of 400 events in a log. These events must be stored in a battery-protected memory and must remain in the memory until the memory is downloaded or cleared manually. Resetting of the control unit must not clear the memory.

2.3.11 Manual Access

An operator at the control unit, having a proper access level, must have the capability to manually access the following information for each initiating device.

a. Primary status.

b. Device type.

c. Present average value.

d. Present sensitivity selected.

e. Detector range (normal, dirty).

2.3.12 Floor Plans

A laminated building floor plan (22" x 34") must be provided and mounted at the FMCU location. The floor plan must indicate the FMCU, remote power supply panel(s), and all initiating devices. The floor plan must indicate all rooms by number.

A laminated as-installed fire alarm wiring diagram (22" x 34") must be provided and mounted at the FMCU location. The wiring diagram must indicate fire alarm wiring, FMCU, remote power supply panel(s), and all initiating device and notification appliances keyed to floor plans by room number. Provide a different color for each signaling line circuit, notification appliance circuit, speaker circuit, and data circuits.

2.4 AMPLIFIERS, PREAMPLIFIERS, TONE GENERATORS

Any amplifiers, preamplifiers, tone generators, digitalized voice generators, and other hardware necessary for a complete, operational, textual audible circuit conforming to NFPA 72 must be housed in a remote FMCU, terminal cabinet, or in the FMCU. Individual amplifiers must be 100 watts maximum.

2.4.1 Operation

The system must automatically operate and control all building speakers.

2.4.2 Construction

Amplifiers must utilize computer grade components and must be provided with output protection devices sufficient to protect the amplifier against any transient up to 10 times the highest rated voltage in the system.

2.4.3 Inputs

Equip each system with separate inputs for the tone generator, digitalized voice driver and control unit mounted microphone. Microphone inputs must be of the low impedance, balanced line type. Both microphone and tone generator input must be operational on any amplifier.

2.4.4 Tone Generator

The tone generator must produce a three-pulse temporal pattern and must be constantly repeated until interrupted by either the digitalized voice message, the microphone input, or the alarm silence mode as specified. The tone generator must be single channel with an automatic backup generator per channel such that failure of the primary tone generator causes the backup generator to automatically take over the functions of the failed unit and also causes transfer of the common trouble relay. The tone generator must be provided with securely attached labels to identify the component as a tone generator and to identify the specific tone it produces.

2.4.5 Protection Circuits

Each amplifier must be constantly supervised for any condition that could render the amplifier inoperable at its maximum output. Failure of any component must cause illumination of a visual "amplifier trouble" indicator on the control unit, appropriate logging of the condition in the history log, and other actions for trouble conditions as specified.

2.5 MANUAL STATIONS

Provide metal or plastic, surface mounted, double-action, addressable manual stations, that are not subject to operation by jarring or vibration.. Stations must be addressable via a dual in-line package (DIP) switch or sundial that is manufactured within the device. Stations must be equipped with screw terminals for each conductor. Stations that require the replacement of any portion of the device after activation are not permitted. Stations must be finished in red with molded raised lettering operating instructions of contrasting color. The use of a key must be required to reset the station.

2.6 SMOKE DETECTORS

2.6.1 Spot Type Detectors

Provide addressable photoelectric smoke detectors as follows:

a. Provide analog/addressable photoelectric smoke detectors utilizing the photoelectric light scattering principle for operation in accordance with UL 268. Smoke detectors must be listed for use with the FMCU.

b. Provide self-restoring type detectors that do not require any readjustment after actuation at the FMCU to restore them to normal operation. The detector must have a visual indicator to show actuation.

c. Vibration must have no effect on the detector's operation. Protect the detection chamber with a fine mesh metallic screen that prevents the entrance of insects or airborne materials. The screen must not inhibit the movement of smoke particles into the chamber.

d. Provide twist lock bases with sounder that produces a minimum of 90 dBA at 10 feet with screw terminals for each conductor. The detectors must maintain contact with their bases without the use of springs.

e. The detector address must identify the particular unit, its location within the system, and its sensitivity setting. Detectors must be of the low voltage type rated for use on a 24 VDC system.

2.6.2 Duct Smoke Detectors

Duct-mounted addressable photoelectric smoke detectors must consist of a smoke detector, as specified in paragraph Spot Type Detectors, mounted in a special housing fitted with duct sampling tubes. Detector circuitry must be mounted in a metallic or plastic enclosure exterior to the duct. It is not permitted to cut the duct insulation to install the duct detector directly on the duct. Detectors must be listed for operation over the complete range of air velocities, temperature and humidity expected at the detector when the air-handling system is operating. Detectors must be powered from the FMCU.

a. Sampling tubes must run the full width of the duct. The duct detector package must conform to the requirements of NFPA 90A, UL 268A, and must be listed for use in air-handling systems. The control functions, operation, reset, and bypass must be controlled from the FMCU.

b. Lights to indicate the operation and alarm condition must be visible and accessible with the unit installed and the cover in place. Remote indicators must be provided where required by NFPA 72. Remote indicators as well as the affected fan units must be properly identified in etched plastic placards.

c. Detectors must provide for control of auxiliary contacts that provide control, interlock, and shutdown functions specified in Section 23 09 23.13 BACnet DIRECT DIGITAL CONTROL SYSTEMS FOR HAVC. Auxiliary contacts provide for this function must be located within 3 feet of the controlled circuit or appliance. The auxiliary contacts must be supplied by the fire alarm system manufacturer to ensure complete system compatibility.

2.7 ADDRESSABLE INTERFACE DEVICES

The initiating device being monitored must be configured as a Class "A" initiating device circuits. The module must be listed as compatible with the control unit. The module must provide address setting means compatible with the control unit's SLC supervision and store an internal identifying code. Monitor module must contain an integral LED that flashes each time the monitor module is polled and is visible through the device cover plate. Pull stations with a monitor module in a common backbox are not required to have an LED. Modules must be listed for the environmental conditions in which they will be installed.

2.8 ADDRESSABLE CONTROL MODULES

The control module must be capable of operating as a relay (dry contact form C) for interfacing the control unit with other systems. The module must be listed as compatible with the control unit. The indicating device or the external load being controlled must be configured as Class "A" notification appliance circuits. The system must be capable of supervising, audible, visual and dry contact circuits. The control module must have both an input and output address. The supervision must detect a short on the supervised circuit and must prevent power from being applied to the circuit. The control module must provide address setting means compatible with the control unit's SLC supervision and store an internal identifying code. The control module must contain an integral LED that flashes each time the control module is polled and is visible through the device cover plate. Control Modules must be listed for the environmental conditions in which they will be installed.

2.9 NOTIFICATION APPLIANCES

2.9.1 Audible Notification Appliances

Audible appliances must conform to the applicable requirements of UL 464. Appliances must be connected into notification appliance circuits. Surface mounted audible appliances must be painted white. Recessed audible appliances must be installed with a grill that is painted white.

2.9.1.1 Speakers

a. Speakers must conform to the applicable requirements of UL 1480. Speakers must have six different sound output levels and operate with audio line input levels of 70.7 VRMs and 25 VRMs, by means of selectable tap settings. Interior speaker tap settings must include taps of 1/4, 1/2, 1, and 2 watt, at a minimum. Exterior speakers must also be multi-tapped with no more than 15 watt maximum setting. Speakers must incorporate a high efficiency speaker for maximum output at minimum power across a frequency range of 400 Hz to 4,000 Hz, and must have a sealed back construction. Speakers must be capable of installation on standard 4-inch square electrical boxes. Where speakers and strobes are provided in the same location, they may be combined into a single unit. All inputs must be polarized for compatibility with standard reverse polarity supervision of circuit wiring via the FMCU.

b. Provide speaker mounting plates constructed of cold rolled steel having a minimum thickness of 16 gage or molded high impact plastic and equipped with mounting holes and other openings as needed for a

complete installation. Fabrication marks and holes must be ground and finished to provide a smooth and neat appearance for each plate. Each plate must be primed and painted.

c. Speakers must utilize screw terminals for termination of all field wiring.

2.9.2 Visual Notification Appliances

Visual notification appliances must conform to the applicable requirements of UL 1638, UL 1971 and conform to the Architectural Barriers Act (ABA). Visual Notification Appliances must have clear high intensity optic lens, xenon flash tubes, or light emitting diode (LED) and be marked "Alert" in letters of contrasting color. The light pattern must be dispersed so that it is visible above and below the strobe and from a 90 degree angle on both sides of the strobe. Strobe flash rate must be 1 flash per second and a minimum of 15 candela based on the UL 1971 test. Strobe must be surface mounted.

2.9.3 Sprinkler Bell

Bells must be surface mounted with the matching mounting back. Bells must be suitable for use in an electrically supervised 24-V circuit. Bells shall be the underdome type producing a minimum output rating of 90 dBA at 10 feet. Bells used in exterior locations must be specifically listed or approved for outdoor use and be provided with metal housing and protective grilles.

2.10 ELECTRIC POWER

2.10.1 Primary Power

Power must be 120 VAC 60 Hz service for the FMCU from the AC service to the building in accordance with NFPA 72.

2.11 SECONDARY POWER SUPPLY

Provide for system operation in the event of primary power source failure. Transfer from normal to auxiliary (secondary) power or restoration from auxiliary to normal power must be automatic and must not cause transmission of a false alarm.

2.11.1 Batteries

Provide sealed, maintenance-free, sealed lead acid batteries as the source for emergency power to the FMCU. Batteries must contain suspended electrolyte. The battery system must be maintained in a fully charged condition by means of a battery charger. Provide an automatic transfer switch to transfer the load to the batteries in the event of the failure of primary power.

2.11.1.1 Capacity

Battery size must be the greater of the following two capacities. This capacity applies to every control unit associated with this system, including supplemental notification appliance circuit panels, auxiliary power supply panels, fire alarm transmitters, and Base-wide mass notification transceivers. When determining the required capacity under alarm condition, visual notification appliances must include both textual

and non-textual type appliances.

a. Sufficient capacity to operate the fire alarm system under supervisory and trouble conditions, including audible trouble signal devices for 48 hours and audible and visual signal devices under alarm conditions for an additional 15 minutes.

b. Sufficient capacity to operate the mass notification for 60 minutes after loss of AC power.

2.11.1.2 Battery Power Calculations

a. Verify that battery capacity exceeds supervisory and alarm power requirements for the criteria noted in the paragraph "Capacity" above.

(1) Substantiate the battery calculations for alarm and supervisory power requirements. Include ampere-hour requirements for each system component and each control unit component, and compliance with UL 864.

(2) Provide complete battery calculations for both the alarm and supervisory power requirements. Submit ampere-hour requirements for each system component with the calculations.

(3) Provide voltage drop calculations to indicate that sufficient voltage is available for proper operation of the system and all components. Calculations must be performed using the minimum rated voltage of each component.

b. For battery calculations assume a starting voltage of 24 VDC for starting the calculations to size the batteries. Calculate the required Amp-Hours for the specified standby time, and then calculate the required Amp-Hours for the specified alarm time. Using 20.4 VDC as starting voltage, perform a voltage drop calculation for circuits containing devices or appliances remote from the power sources.

2.11.2 Battery Chargers

Provide a fully automatic, variable charging rate battery charger. The charger must be capable of providing 120 percent of the connected system load and must maintain the batteries at full charge. In the event the batteries are fully discharged (20.4 Volts dc), the charger must recharge the batteries back to 95 percent of full charge within 48 hours after a single discharge cycle as described in paragraph CAPACITY above. Provide pilot light to indicate when batteries are manually placed on a high rate of charge as part of the unit assembly if a high rate switch is provided.

2.12 SURGE PROTECTIVE DEVICES

Surge protective devices must be provided to suppress all voltage transients which might damage fire alarm control unit components. Systems having circuits located outdoors, communications equipment must be protected against surges induced on any signaling line circuit. Cables and conductors, that serve as communications links, must have surge protection circuits installed at each end. The surge protective device must wire in series to the power supply of the protected equipment with screw terminations. Line voltage surge arrestor must be installed directly adjacent to the power panel where the FMCU breaker is located.

a. Surge protective devices for nominal 120 VAC must be UL 1449 listed with a maximum 500 volt suppression level and have a maximum response time of 5 nanoseconds. The surge protective device must also meet IEEE C62.41.1 and IEEE C62.41.2 category B tests for surge capacity. The surge protective device must feature multi-stage construction and be provided with a long-life indicator lamp (either light emitting diode or neon) which extinguishes upon failure of protected components. Any unit fusing must be externally accessible.

b. Surge protective devices for nominal 24 VAC, fire alarm telephone dialer, or ethernet connection must be UL 497B listed, meet IEEE C62.41.1 and have a maximum response time of 1-nanosecond. The surge protective device must feature multi-stage construction and be self-resetting. The surge protective device must be a base and plug style. The base assembly must have screw terminals for fire alarm wiring. The base assembly must accept "plug-in" surge protective module.

c. All surge protective devices (SPD) must be the standard product of a single manufacturer and be equal or better than the following:

(1) For 120 VAC nominal line voltage: UL 1449 and UL 1283 listed, series connected 120 VAC, 20A rated, surge protective device in a NEMA 4x enclosure. Minimum 50,000 amp surge current rating with EMI/RFI filtering and a dry contact circuit for remote monitoring of surge protection status.

(2) For 24-volt nominal line voltage: UL 497B listed, series connected low voltage, 24-volt, 5A rated, loop circuit protector, base and replaceable module.

(3) For alarm telephone dialers: UL 497A listed, series connected, 130-volt, 150 mA rated with self-resetting fuse, dialer circuit protector with modular plug and play.

(4) For IP-DACTS: UL 497B listed, series connected, 6.4-volt, 1.5A rated with 20 kA/pair surge current, data network protector with modular plug and play.

2.13 WIRING

Provide wiring materials under this section as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM with the additions and modifications specified herein.

2.13.1 Alarm Wiring

IDC and SLC wiring must be solid copperor stranded copper cable in accordance with the manufacturers requirements. Copper signaling line circuits and initiating device circuit field wiring must be No. 14 AWG size conductors at a minimum. Visual notification appliance circuit conductors, that contain audible alarm appliances, must be copper No. 16 AWG size conductors at a minimum. Speaker circuits must be copper No. 16 AWG size twisted and shielded conductors at a minimum. Wire size must be sufficient to prevent voltage drop problems. Circuits operating at 24 VDC must not operate at less than the listed voltages for the detectors and appliances. Power wiring, operating at 120 VAC minimum, must be a minimum No. 12 AWG solid copper having similar insulation. Acceptable power-limited cables are FPL, FPLR or FPLP as appropriate with red colored

covering. Nonpower-limited cables must comply with NFPA 70.

2.14 AUTOMATIC FIRE ALARM TRANSMITTERS2.14.1 Digital Alarm Communicator Transmitter (DACT)

Provide DACT that is compatible with the existing supervising station fire alarm system. Transmitter must have a means to transmit alarm, supervisory, and trouble conditions via a single transmitter. Transmitter must have a source of power for operation that conforms to NFPA 72. Transmitter must be capable of initiating a test signal daily at any selected time. Transmitter must be arranged to seize telephone circuits in accordance with NFPA 72. Transmitter must be compatible with the Sur-Gard System 5 Multi-Platform Digital Telephone Receiver.

2.14.2 Signals to Be Transmitted to the Base Receiving Station

Points must be sent to the base receiving station utilizing Contact ID Protocol.2.15 SYSTEM MONITORING

2.15.1 Valves

Each valve affecting the proper operation of a fire protection system, including automatic sprinkler control valves, sprinkler service entrance valve, isolating valves for pressure type waterflow or supervision switches, and valves at backflow preventers, whether supplied under this contract or existing, must be electrically monitored to ensure its proper position. Provide each tamper switch with a separate address, unless they are within the same room, then a maximum of five can use the same address.

2.16 ENVIRONMENTAL ENCLOSURES OR GUARDS

Environmental enclosures must be provided to permit fire alarm/mass notification components to be used in areas that exceed the environmental limits of the listing. The enclosure must be listed for the device or appliance as either a manufactured part number or as a listed compatible accessory for the component is currently listed. Guards required to deter mechanical damage must be either a listed manufactured part or a listed accessory for the category of the initiating device or notification appliance.

PART 3 EXECUTION

3.1 VERIFYING ACTUAL FIELD CONDITIONS

Before commencing work, examine all adjoining work on which the contractor's work is in any way dependent for perfect workmanship according to the intent of this specification section, and report to the Contracting Officer's Representative any condition which prevents performance of first class work. No "waiver of responsibility" for incomplete, inadequate or defective adjoining work will be considered unless notice has been filed before submittal of a proposal.

3.2 INSTALLATION

3.2.1 Fire Alarm and Mass Notification Control Unit (FMCU)

Locate the FMCU where indicated on the drawings. Surface mount the enclosure with the top of the cabinet 6 feet above the finished floor or center the cabinet at 5 feet, whichever is lower. Conductor terminations

must be labeled and a drawing containing conductors, their labels, their circuits, and their interconnection must be permanently mounted in the FMCU. Locate the document storage cabinet adjacent to the FMCU unless the Contracting Officer directs otherwise.

3.2.2 Battery Cabinets

When batteries will not fit in the FMCU, locate battery cabinets below or adjacent to the FMCU. Battery cabinets must be installed at an accessible location when standing at floor level. Battery cabinets must not be installed lower than 12 inches above finished floor, measured to the bottom of the cabinet, nor higher than 36 inches above the floor, measured to the top of the cabinet. Installing batteries above drop ceilings or in inaccessible locations is prohibited. Battery cabinets must be large enough to accommodate batteries and also to allow ample gutter space for interconnection of control units as well as field wiring. The cabinet must be provided in a sturdy steel housing, complete with back box, hinged steel door with cylinder lock, and surface mounting provisions.The cabinet must be identified by an engraved phenolic resin nameplate. Lettering on the nameplate must indicate the control unit(s) the batteries power and must not be less than 1-inch high.

3.2.3 Manual Stations

Locate manual stations as required by NFPA 72 and as indicated on the drawings. Mount stations so they are located no farther than 5 feet from the exit door they serve, measured horizontally. Manual stations must be mounted at 48 inches measured to the operating handle.

3.2.4 Notification Appliances

a. Locate notification appliance devices where indicated. Where two or more visual notification appliances are located in the same room or corridor or field of view, provide synchronized operation. Devices must use screw terminals for all field wiring. Audible and visual notification appliances mounted in acoustical ceiling tiles must be centered in the tiles plus or minus 2 inches.

b. Audible and visual notification appliances mounted on the exterior of the building, within unconditioned spaces, or in the vicinity of showers must be listed weatherproof appliances installed on weatherproof backboxes.

c. Speakers must not be located in close proximity to the FMCU so as to cause feedback when the microphone is in use.

3.2.5 Smoke Detectors

Locate detectors as required by NFPA 72 and their listing and as indicated on the drawings on a 4-inch mounting box. Smoke detectors are permitted to be on the wall no lower than 12 inches from the ceiling with no minimum distance from the ceiling. Install smoke detectors no closer than 3 feet from air handling supply diffusers. Detectors installed in acoustical ceiling tiles must be centered in the tiles plus or minus 2 inches.

3.2.6 Ceiling Bridges

Provide ceiling bridges for ceiling-mounted appliances. Ceiling bridges must be as recommended/required by the manufacturer of the ceiling-mounted

notification appliance.

3.3 SYSTEM FIELD WIRING

3.3.1 Wiring within Cabinets, Enclosures, and Boxes

Provide wiring installed in a neat and professional manner and installed parallel with or at right angles to the sides and back of any box, enclosure, or cabinet. Conductors that are terminated, spliced, or otherwise interrupted in any enclosure, cabinet, mounting, or junction box must be connected to screw-type terminal blocks. Mark each terminal in accordance with the wiring diagrams of the system. The use of wire nuts, crimped connectors, or similar devices is prohibited. The twisting of conductors is prohibited. Wiring to conform with NFPA 70.

Indicate the following in the wiring diagrams:

a. Point-to-point wiring diagrams showing the points of connection and terminals used for electrical field connections in the system, including interconnections between the equipment or systems that are supervised or controlled by the system. Diagrams must show connections from field devices to the FMCU and remote fire alarm/mass notification control units, initiating circuits, switches, relays and terminals.

b. Complete riser diagrams indicating the wiring sequence of devices and their connections to the control equipment. Include a color code schedule for the wiring. Include floor plans showing the locations of devices and equipment.

3.3.2 Terminal Cabinets

Provide a terminal cabinet at the base of any circuit riser, on each floor at each riser, and where indicated on the drawings. Terminal size must be appropriate for the size of the wiring to be connected. Conductor terminations must be labeled and a drawing containing conductors, their labels, their circuits, and their interconnection must be permanently mounted in the terminal cabinet. Minimum size is 8 inches by 8 inches. Only screw-type terminals are permitted. Provide an identification label, that displays "FIRE ALARM TERMINAL CABINET" with 2-inch lettering, on the front of the terminal cabinet.

3.3.3 Alarm Wiring

a. Voltages must not be mixed in any conduit or junction box, housing or device, except those containing power supplies and control relays.

b. Utilize shielded wiring where recommended by the manufacturer. For shielded wiring, ground the shield at only one point, in or adjacent to the FMCU.

c. Pigtail or T-tap connections to signal line circuits, initiating device circuits, supervisory alarm circuits, and notification appliance circuits are prohibited.

d. Color coding is required for circuits and must be maintained throughout the circuit. Conductors used for the same functions must be similarly color coded. Conform wiring to NFPA 70.

e. Pull all conductors splice free. The use of wire nuts, crimped connectors, or twisting of conductors is prohibited. Where splices are unavoidable, the location of the junction box or pull box where they occur must be identified on the as-built drawings. The number and location of splices must be subject to approval by the Designated Fire Protection Engineer (DFPE).

3.3.4 Back Boxes and Conduit

In addition to the requirements of Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM, provide all wiring in rigid metal conduit or intermediate metal conduit unless specifically indicated otherwise. Minimum conduit size must be 3/4-inch in diameter. Do not use electrical non-metallic tubing (ENT) or flexible non-metallic tubing and associated fittings.

a. Galvanized rigid steel (GRS) conduit must be utilized where exposed to weather, where subject to physical damage, and where exposed on exterior of buildings. Intermediate metal conduit (IMC) may be used in lieu of GRS as allowed by NFPA 70.

b. Electrical metallic tubing (EMT) is permitted above suspended ceilings or exposed where not subject to physical damage. Do not use EMT underground, encased in concrete, mortar, or grout, in hazardous locations, where exposed to physical damage, outdoors or in fire pump rooms. Use die-cast compression connectors.

c. For rigid metallic conduit (RMC), only threaded type fitting are permitted for wet or damp locations.

d. Flexible metal conduit is permitted for initiating device circuits, notification appliance circuits and signaling line circuits 6 feet in length or less. Use liquid tight flexible metal conduit in damp and wet locations.

e. Schedule 40 (minimum) polyvinyl chloride (PVC) is permitted where conduit is routed underground or underground below floor slabs. Convert non-metallic conduit, other than PVC Schedule 40 or 80, to plastic-coated rigid, or IMC, steel conduit before turning up through floor slab.

f. Exterior wall penetrations must be weathertight. Conduit must be sealed to prevent the infiltration of moisture.

g. For Class "A" circuits with conductor lengths of 10 feet or less, the conductors must be permitted to be installed in the same raceway in accordance with NFPA 72.

3.3.5 Conductor Terminations

Labeling of conductors at terminal blocks in terminal cabinets, FMCU must be provided at each conductor connection. Each conductor or cable must have a shrink-wrap label to provide a unique and specific designation. Each terminal cabinet, FMCU, and remote FMCU must contain a laminated drawing that indicates each conductor, its label, circuit, and terminal. The laminated drawing must be neat, using 12 point lettering minimum size, and mounted within each cabinet, control unit, or unit so that it does not interfere with the wiring or terminals. Maintain existing color code scheme where connecting to existing equipment.

3.4 CONNECTION OF NEW SYSTEM

The following new system connections must be made during the last phase of construction, at the beginning of the pre-Government tests. New system connections must include:

a. Connection of new system transmitter to existing installation fire reporting system.

Once these connections are made, system must be left energized. Report immediately to the Contracting Officer, coordination and field problems resulting from the connection of the above components.

3.5 FIRESTOPPING

Provide firestopping for holes at conduit penetrations through floor slabs, fire-rated walls, partitions with fire-rated doors, corridor walls, and vertical service shafts in accordance with Section 07 84 00 FIRESTOPPING.

3.6 PAINTING

a. In unfinished areas (including areas above drop ceilings), paint all exposed electrical conduit (serving fire alarm equipment), fire alarm conduit, surface metal raceway, junction boxes and covers red. In lieu of painting conduit, the contractor may utilize red conduit with a factory applied finish.

b. In finished areas, paint exposed electrical conduit (serving fire alarm equipment), fire alarm conduit, surface metal raceways, junction boxes, and electrical boxes to match adjacent finishes. The inside cover of the junction box must be identified as "Fire Alarm" and the conduit must have painted red bands 3/4-inch wide at 10-foot centers and at each side of a floor, wall, or ceiling penetration.

c. Painting must comply with Section 09 90 00 PAINTS AND COATINGS.

3.7 FIELD QUALITY CONTROL

3.7.1 Test Procedures

Submit detailed test procedures, prepared and signed by the NICET Level IV Fire Alarm Technician, and the representative of the installing company, and reviewed by the QFPE 60 days prior to performing system tests. Detailed test procedures must list all components of the installed system such as initiating devices and circuits, notification appliances and circuits, signaling line devices and circuits, control devices/equipment, batteries, transmitting and receiving equipment, power sources/supply, annunciators, special hazard equipment, emergency communication equipment, interface equipment, and surge protective devices. Test procedures must include sequence of testing, time estimate for each test, and sample test data forms. The test data forms must be in a check-off format (pass/fail with space to add applicable test data; similar to the forms in NFPA 72 and NFPA 4.) The test procedures and accompanying test data forms must be used for the pre-Government testing and the Government testing. The test data forms must record the test results and must:

a. Identify the NFPA Class of all Initiating Device Circuits (IDC), and Notification Appliance Circuits (NAC), Voice Notification System

Circuits (NAC Audio), and Signaling Line Circuits (SLC).

b. Identify each test required by NFPA 72 Test Methods and required test herein to be performed on each component, and describe how these tests must be performed.

c. Identify each component and circuit as to type, location within the facility, and unique identity within the installed system. Provide necessary floor plan sheets showing each component location, test location, and alphanumeric identity.

d. Identify all test equipment and personnel required to perform each test including equipment necessary for smoke detector testing. The use of magnets is not permitted.

e. Provide space to identify the date and time of each test. Provide space to identify the names and signatures of the individuals conducting and witnessing each test.

3.7.2 Pre-Government Testing

3.7.2.1 Verification of Compliant Installation

Conduct inspections and tests to ensure that devices and circuits are functioning properly. Tests must meet the requirements of paragraph entitled "Minimum System Tests" as required by NFPA 72. The contractor and an authorized representative from each supplier of equipment must be in attendance at the pre-Government testing to make necessary adjustments. After inspection and testing is complete, provide a signed Verification of Compliant Installation letter by the QFPE that the installation is complete, compliant with the specification and fully operable. The letter must include the names and titles of the witnesses to the pre-Government tests. Provide all completion documentation as required by NFPA 72 including all referenced annex sections and the test reports noted below.

a. NFPA 72 Record of Completion.

b. NFPA 72 Record of Inspection and Testing.

c. Fire Alarm and Emergency Communication System Inspection and Testing Form.

d. Audibility test results with marked-up test floor plans.

e. Intelligibility test results with marked-up floor plans.

f. Documentation that all tests identified in the paragraph "Minimum System Tests" are complete.

3.7.2.2 Request for Government Final Test

When the verification of compliant installation has been completed, submit a formal request for Government final test to the Designated Fire Protection Engineer (DFPE). Government final testing will not be scheduled until the DFPE has received copies of the request for Government final testing and Verification of Compliant Installation letter with all required reports. Government final testing will not be performed until after the connections to the installation-wide fire reporting system and

the installation-wide mass notification system have been completed and tested to confirm communications are fully functional. Submit request for test at least 15 calendar days prior to the requested test date.

3.7.3 Correction of Deficiencies

If equipment was found to be defective or non-compliant with contract requirements, perform corrective actions and repeat the tests. Tests must be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.

3.7.4 Government Final Tests

The tests must be performed in accordance with the approved test procedures in the presence of the DFPE. Furnish instruments and personnel required for the tests. The following must be provided at the job site for Government Final Testing:

a. The manufacturer's technical representative.

b. The contractor's Qualified Fire Protection Engineer (QFPE).

c. Marked-up red line drawings of the system as actually installed.

d. Loop resistance test results.

e. Complete program printout including input/output addresses.

f. Copy of pre-Government Test Certificate, test procedures and completed test data forms.

g. Audibility test results with marked-up floor plans.

h. Intelligibility test results with marked-up floor plans.

Government Final Tests will be witnessed by the Designated Fire Protection Engineer, and Qualified Fire Protection Engineer (QFPE). At this time, any and all required tests noted in the paragraph "Minimum System Tests" must be repeated at their discretion.

3.8 MINIMUM SYSTEM TESTS

3.8.1 System Tests

Test the system in accordance with the procedures outlined in NFPA 72. The required tests are as follows:

a. Loop Resistance Tests: Measure and record the resistance of each circuit with each pair of conductors in the circuit short-circuited at the farthest point from the circuit origin. The tests must be witnessed by the Contracting Officer and test results recorded for use at the final Government test.

b. Verify the absence of unwanted voltages between circuit conductors and ground. Wiring must be free of opens, shorts, ground. The tests must be accomplished at the pre-Government test with results available at the final system test.

c. Verify that the control unit is in the normal condition as detailed in

the manufacturer's O&M manual.

d. Test each initiating device and notification appliance and circuit for proper operation and response at the control unit. Smoke detectors must be tested in accordance with manufacturer's recommended calibrated test method. Use of magnets is prohibited. Testing of duct smoke detectors must comply with the requirements of NFPA 72 except disconnect at least 20 percent of devices. If there is a failure at these devices, then supervision must be tested at each device.

e. Test the system for specified functions in accordance with the contract drawings and specifications and the manufacturer's O&M manual.

f. Test both primary power and secondary power. Verify, by test, the secondary power system is capable of operating the system for the time period and in the manner specified.

g. Determine that the system is operable under trouble conditions as specified.

h. Visually inspect wiring.

i. Test the battery charger and batteries.

j. Verify that software control and data files have been entered or programmed into the FMCU. Hard copy records of the software must be provided to the Contracting Officer.

k. Verify that red-line drawings are accurate.

l. Measure the current in circuits to ensure there is the calculated spare capacity for the circuits.

m. Measure voltage readings for circuits to ensure that voltage drop is not excessive.

n. Disconnect the verification feature for smoke detectors during tests to minimize the amount of smoke needed to activate the sensor. Testing of smoke detectors must be conducted using real smoke or the use of canned smoke which is permitted.

o. Measure the voltage drop at the most remote appliance (based on wire length) on each notification appliance circuit.

p. Verify the documentation cabinet is installed and contains all as-built shop drawings, product data sheets, design calculations, site-specific software data package, and all documentation required by paragraph titled "Test Reports".

3.8.2 Audibility Tests

Sound pressure levels from audible notification appliances must be a minimum of 15 dBa over ambient with a maximum of 110 dBa in any occupiable area. The provisions for audible notification (audibility and intelligibility) must be met with doors, fire shutters, movable partitions, and similar devices closed.

3.8.3 Intelligibility Tests

Intelligibility testing of the System must be accomplished in accordance with NFPA 72 for Voice Evacuation Systems, and ASA S3.2. Following are the specific requirements for intelligibility tests:

a. Intelligibility Requirements: Verify intelligibility by measurement after installation.

b. Ensure that a CIS value greater than the required minimum value is provided in each area where building occupants typically could be found. The minimum required value for CIS is 0.7. Rounding of values is permitted.

c. Areas of the building provided with hard wall and ceiling surfaces (such as metal or concrete) that are found to cause excessive sound reflections may be permitted to have a CIS score less than the minimum required value if approved by the DFPE, and if building occupants in these areas can determine that a voice signal is being broadcast and they must walk no more than 33 feet to find a location with at least the minimum required CIS value within the same area.

d. Areas of the building where occupants are not expected to be normally present are permitted to have a CIS score less than the minimum required value if personnel can determine that a voice signal is being broadcast and they must walk no more than 50 feet to a location with at least the minimum required CIS value within the same area.

e. Take measurements near the head level applicable for most personnel in the space under normal conditions (e.g., standing, sitting, sleeping, as appropriate).

f. The distance the occupant must walk to the location meeting the minimum required CIS value must be measured on the floor or other walking surface as follows:

(1) Along the centerline of the natural path of travel, starting from any point subject to occupancy with less than the minimum required CIS value.

(2) Curving around any corners or obstructions, with a 12 inches clearance there from.

(3) Terminating directly below the location where the minimum required CIS value has been obtained.

g. Intelligibility test is required after the system installation as part of the preliminary tests and final inspection and acceptance tests. This project has a separate FF&E contractor who installs the furniture systems after the construction contractor. FF&E affects tremendously to the fire alarm and mass notification system intelligibility level. To ensure the facility is code compliant prior to building occupancy, the construction contractor is required to conduct another intelligibility test after the completion of FF&E installation, and witnessed by the Government. If the fire alarm and mass notification system fails the intelligibility test, the construction contractor must be responsible to modify the system to meet intelligibility requirement in accordance with the contract without incurring additional cost to the Government.

Use commercially available test instrumentation to measure intelligibility as specified by NFPA 72 as applicable. Use the mean value of at least three readings to compute the intelligibility score at each test location.

3.9 SYSTEM ACCEPTANCE

Following acceptance of the system, as-built drawings and O&M manuals must be delivered to the Contracting Officer for review and acceptance. The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final Government test of the system. At least one set of as-built (marked-up) drawings must be provided at the time of, or prior to the Final Government Test.

a. The drawings must be prepared electronically and sized no less than the contract drawings. Furnish one set of CDs or DVDs containing software back-up and CAD based drawings in latest version of AutoCAD, DXF and portable document formats of as-built drawings and schematics.

b. Include complete wiring diagrams showing connections between devices and equipment, both factory and field wired.

c. Include a riser diagram and drawings showing the as-built location of devices and equipment.

d. Provide Operation and Maintenance (O&M) Instructions.

3.10 INSTRUCTION OF GOVERNMENT EMPLOYEES

3.10.1 Instructor

Provide the services of an instructor, who has received specific training from the manufacturer for the training of other persons regarding the operation, inspection, testing, and maintenance of the system provided. The instructor must train the Government employees designated by the Contracting Officer, in the care, adjustment, maintenance, and operation of the fire alarm system. The instructor must be thoroughly familiar with all parts of this installation. The instructor must be trained in operating theory as well as in practical O&M work. Submit the instructors information and qualifications including the training history.

3.10.2 Required Instruction Time

Provide 8 hours of instruction after final acceptance of the system. The instruction must be given during regular working hours on such dates and times selected by the Contracting Officer. The instruction may be divided into two or more periods at the discretion of the Contracting Officer. The training must allow for rescheduling for unforeseen maintenance and fire department responses.

3.10.2.1 Technical Training

Equipment manufacturer or a factory representative must provide 5 days of on site training for 5 government personnel. Training must allow for classroom instruction as well as individual hands on programming, troubleshooting and diagnostics exercises. Factory training must occur

within 6 months of system acceptance.

3.10.3 Technical Training Manual

Provide, in manual format, lesson plans, operating instructions, maintenance procedures, and training data for the training courses. The operations training must familiarize designated government personnel with proper operation of the installed system. The maintenance training course must provide the designated government personnel adequate knowledge required to diagnose, repair, maintain, and expand functions inherent to the system.

3.11 EXTRA MATERIALS

3.11.1 Repair Service/Replacement Parts

Repair services and replacement parts for the system must be available for a period of 10 years after the date of final acceptance of this work by the Contracting Officer. During the warranty period, the service technician must be on-site within 24 hours after notification. All repairs must be completed within 24 hours of arrival on-site.

During the warranty period, the installing fire alarm contractor is responsible for conducting all required testing and maintenance in accordance with the requirements and recommended practices of NFPA 72 and the system manufacturer(s). Installing fire alarm contractor is NOT responsible for any damage resulting from abuse, misuse, or neglect of equipment by the end user.

3.11.2 Spare Parts

Install a spare parts box adjacent to the FMCU. Spare parts box must be a steel cabinet with locking, hinge-mounted door. Spare parts box must be mounted no more than 3-ft above the finished floor.

Spare parts furnished must be directly interchangeable with the corresponding components of the installed system(s). Spare parts must be suitably packaged and identified by nameplate, tagging, or stamping. Spare parts must beplaced in the spare parts box and must be accompanied by an inventory list.

3.11.3 Document Storage Cabinet

Upon completion of the project, but prior to project close-out, place in the document storage cabinet copies of the following record documentation:

a. As-built shop drawings

b. Product data sheets

c. Design calculations

d. Site-specific software data package

e. All documentation required by SD-06.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 31 00 00

EARTHWORK
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO T 180	(2017) Standard Method of Test for Moisture-Density Relations of Soils Using a 4.54-kg (10-lb) Rammer and a 457-mm (18-in.) Drop

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA C600	(2023) Installation of Ductile-Iron Mains and Their Appurtenances

ASTM INTERNATIONAL (ASTM)

ASTM C33/C33M	(2024a) Standard Specification for Concrete Aggregates
ASTM C117	(2023) Standard Test Method for Materials Finer than 75-um (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C136/C136M	(2019) Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
ASTM D698	(2012; R 2021) Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/cu. ft. (600 kN-m/cu. m.))
ASTM D1140	(2017) Standard Test Methods for Determining the Amount of Material Finer than 75-µm (No. 200) Sieve in Soils by Washing
ASTM D1556/D1556M	(2015; E 2016) Standard Test Method for Density and Unit Weight of Soil in Place by Sand-Cone Method
ASTM D1557	(2012; E 2015) Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft3) (2700 kN-m/m3)
ASTM D2321	(2020) Standard Practice for Underground

	Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D2487	(2017; R 2025) Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D4253	(2016; E 2019) Standard Test Methods for Maximum Index Density and Unit Weight of Soils Using a Vibratory Table
ASTM D4254	(2016) Standard Test Methods for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density
ASTM D4318	(2017; E 2018) Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils
ASTM D4829	(2021) Standard Test Method for Expansion Index of Soils
ASTM D5268	(2019) Topsoil Used for Landscaping Purposes
ASTM D6938	(2017a) Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety -- Safety and Occupational Health (SOH) Requirements

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA SW-846.3-3	(1999, Third Edition, Update III-A) Test Methods for Evaluating Solid Waste: Physical/Chemical Methods

1.2 DEFINITIONS

1.2.1 Structural Fill

Soil material placed to support buildings, walls, pads, and other similar facilities.

1.2.2 Topsoil

Surface layer of primarily organic soil capable of supporting vegetation growth.

1.2.3 Utility Bedding Material

Fill placed to directly support pipes, conduits, cables, and appurtenant structures. Bedding may also be used to provide a cushion between utilities and bedrock, obstacles, obstructions and other unyielding

materials.

1.2.4 Satisfactory Materials

Satisfactory materials for fill, backfill, and/or any in-situ soils to remain in place comprise any materials classified by ASTM D2487 as GW, GP and SW. Maximum particle size to be no greater than one-half of the allowable lift thickness in any dimension.

1.2.5 Unsatisfactory Materials

Materials which do not comply with the requirements for satisfactory materials are unsatisfactory. Unsatisfactory materials also include man-made fills; trash; refuse; backfills from previous construction; roots and other organic matter or frozen material. Notify the Contracting Officer when encountering any contaminated materials.

1.2.6 Cohesionless Materials

Cohesionless materials include materials classified in ASTM D2487 as GW, GP, SW, and SP. Materials classified as GM and SM will be identified as cohesionless only when the fines are nonplastic. Perform testing, required for classifying materials, in accordance with ASTM D4318, ASTM C117, ASTM C136/C136M and ASTM D1140.

1.2.7 Cohesive Materials

Cohesive materials include materials classified as GC, SC, ML, CL, MH, and CH. Materials classified as GM and SM will be identified as cohesive only when the fines are plastic. Perform testing, required for classifying materials, in accordance with ASTM D4318, ASTM C117, ASTM C136/C136M and ASTM D1140.

1.2.8 Hard/Unyielding Materials

Hard/Unyielding materials comprise weathered rock, dense consolidated deposits, or conglomerate materials which are not included in the definition of "rock" with stones greater than 6 inch in any dimension or as defined by the pipe manufacturer, whichever is smaller. These materials usually require the use of heavy excavation equipment, ripper teeth, or jack hammers for removal.

1.2.9 Unstable Material

Unstable materials are too weak to adequately support the utility pipe, conduit, equipment, or appurtenant structure. Satisfactory material may become unstable due to ineffective drainage, dewatering, becoming frozen, excessive loading.

1.2.10 Expansive Soils

Expansive soils are defined as soils that have an expansion index greater than 20 when tested in accordance with ASTM D4829.

1.2.11 Rock

Solid homogeneous interlocking crystalline material with firmly cemented, laminated, or foliated masses or conglomerate deposits, neither of which can be removed without systematic drilling and blasting, drilling and the

use of expansion jacks or feather wedges, or the use of backhoe-mounted pneumatic hole punchers or rock breakers; also large boulders, buried masonry, or concrete other than pavement exceeding 1/2 cubic yard in volume. Removal of hard material will not be considered rock excavation because of intermittent drilling and blasting that is performed merely to increase production.

1.2.12 Capillary Water Barrier

A layer of clean, poorly graded crushed rock, stone, or natural sand or gravel having a high porosity which is placed beneath a building slab with or without a vapor barrier to cut off the capillary flow of pore water to the area immediately below a slab.

1.2.13 Degree of Compaction (Proctor)

Degree of compaction required, except as noted in the second sentence, is expressed as a percentage of the maximum dry density obtained by the test procedure presented in ASTM D1557 abbreviated as a percent of laboratory maximum dry density. Since ASTM D1557 applies only to soils that have 30 percent or less by weight of their particles retained on the 3/4 inch sieve, express the degree of compaction for material having more than 30 percent by weight of their particles retained on the 3/4 inch sieve as a percentage of the maximum dry density in accordance with AASHTO T 180-21 paragraph 1.5, Note 1.

1.2.14 Degree of Compaction (Relative Density)

Degree of compaction required for soils with less than 5 percent passing the No. 200 sieve, is expressed as a relative percentage of the maximum index density/dry unit weight and minimum index density/dry unit weight, obtained by the test procedures in accordance with ASTM D4253 and ASTM D4254, respectively, abbreviated as a percent of laboratory relative density.

1.2.15 Borrow

Soil brought to the project site from an external location for the purposes of project construction.

1.2.16 Subgrade

Earth materials directly below foundations and directly below granular base materials in building slab and pavement areas including shoulders.

1.3 CRITERIA FOR BIDDING

Base bids on the following criteria:

a. Surface elevations are as indicated.

b. Pipes or other artificial obstructions, except those indicated, will not be encountered.

c. Hard materials will not be encountered.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" classification.

Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Disposition of Surplus Materials; G

Preconstruction Meeting; G

SD-06 Test Reports

Dewatering Performance Records; G

Material Test Report; G

Borrow Site Testing; G

Pipe Inspection Report; G

1.5 QUALITY CONTROL

1.5.1 Qualified Technician

Provide a Qualified Technician to inspect, monitor, sample, and performing field testing. The technician qualifications need to be one of the following: a current National Institute for Certification in Engineering Technologies (NICET) Level II minimum certification in Construction Materials Testing Soils; a Geologist-in-Training with minimum one-year experience; an Engineer-in-Training with minimum one-year experience; a Registered Geologist; or a Professional Engineer.

1.5.2 Lab Validation

Perform testing by a Corps validated commercial testing laboratory or Contractor established testing laboratory meeting the requirements of Section 01 45 00 (or similar number) entitled QUALITY CONTROL and approved by the Contracting Officer. Submit testing laboratory validation for the testing to be performed. Do not permit work requiring testing until testing facilities have been inspected, Corps validated and approved by the Contracting Officer.

1.5.3 Preconstruction Meeting

Conduct a preconstruction meeting at the jobsite at least five business days prior to the start of earthwork operations on the project. The preconstruction meeting is to be arranged by the Contractor and is to follow the written agenda submitted prior to the meeting. The purpose of this meeting is to review the requirements of this specification and the associated plans. The following individuals must be in attendance at this meeting: Contractor's Project Manager and Project Superintendent, earthwork subcontractor's Project Manager and Site Foreman, Contractor's Geotechnical Engineer and Testing Agency, Government Geotechnical Engineer and Civil Engineer, and Government Construction Manager and Engineering Technician.

The minutes of this meeting are to be recorded by the Contractor and published via email within 48 hours to all attendees. The minutes must be re-published within 48 hours via email pending any subsequent comments

from the attendees.

PART 2 PRODUCTS

2.1 SOIL MATERIALS

2.1.1 Structural Fill

Materials classified as GW, GP or SW in accordance with ASTM D2487. Select material type appropriate for the intended purpose.

2.1.2 Topsoil

Material suitable for topsoil obtained from offsite areas is defined as: Natural, friable soil representative of productive, well-drained soils in the area, free of subsoil, stumps, rocks larger than one inch diameter, brush, weeds, toxic substances, and other material detrimental to plant growth. Amend topsoil pH range to obtain a pH of 5.5 to 7. Topsoil material will be in accordance with ASTM D5268.

2.1.3 Capillary Water Barrier

Conform to ASTM C33/C33M for fine aggregate grading with a maximum of 3 percent by weight passing ASTM D1140, No. 200 sieve, or 1-1/2 inch and no more than 2 percent by weight passing the No. 4 size sieve or coarse aggregate Size 57, 67, or 77.

2.1.4 Utility Bedding Material

Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600 or ASTM D2321 as appropriate for the type of pipe being installed. Install bedding for plastic piping to spring line of pipe. Utility bedding material may include the following:

2.1.4.1 Class I

Angular, 0.25 to 1.5 inch, graded stone, including a number of fill materials that have regional significance such as coral, slag, cinders, crushed stone, and crushed shells.

2.1.4.2 Class II

Coarse sands and gravels with maximum particle size of 1.5 inch, including various graded sands and gravels containing small percentages of fines, generally granular and noncohesive, either wet or dry. Soil Types GW, GP, SW, and SP are included in this class as specified in ASTM D2487.

2.1.4.3 Sand

Clean, coarse-grained sand classified as SW or SP by ASTM D2487 for bedding and backfill.

2.1.4.4 Gravel and Crushed Stone

Clean, coarsely graded natural gravel, crushed stone or a combination thereof having a classification of GW in accordance with ASTM D2487 for bedding and backfill. Do not exceed maximum particle size of 3 inches.

2.2 BURIED WARNING AND IDENTIFICATION MARKERS

Provide polyethylene plastic warning tape manufactured specifically for warning and identification of buried utility lines. Provide tape on rolls, 3 inches minimum width, color coded as specified below for the intended utility with warning and identification imprinted in bold black letters continuously over the entire tape length. Warning and identification to read, "CAUTION, BURIED (intended service) LINE BELOW" or similar wording. Provide permanent color and printing, unaffected by moisture or soil.

Warning Tape Color Codes	
Red	Electric
Yellow	Gas, Oil; Dangerous Materials
Orange	Telephone and Other Communications
Blue	Water Systems
Green	Sewer Systems
White	Steam Systems
Gray	Compressed Air

2.2.1 Warning Tape for Metallic Piping

Provide acid and alkali-resistant polyethylene plastic tape conforming to the width, color, and printing requirements specified above, with a minimum thickness of 0.003 inch and a minimum strength of 1500 psi lengthwise, and 1250 psi crosswise, with a maximum 350 percent elongation.

2.2.2 Detectable Warning Tape for Non-Metallic Piping

Provide polyethylene plastic tape conforming to the width, color, and printing requirements specified above, with a minimum thickness of 0.004 inch, and a minimum strength of 1500 psi lengthwise and 1250 psi crosswise. Manufacture tape with integral wires, foil backing, or other means of enabling detection by a metal detector when tape is buried up to 3 feet deep. Encase metallic element of the tape in a protective jacket or provide with other means of corrosion protection.

2.2.3 Detection Wire for Non-Metallic Piping

Insulate a single strand, solid copper detection wire with a minimum of 12 AWG.

2.3 BORROW

Provide borrow materials from sources located outside of Government property meeting the requirements of paragraph STRUCTURAL FILL.

PART 3 EXECUTION

3.1 PROTECTION

Perform all work specified in accordance with applicable requirements of the Corps of Engineers publication EM 385-1-1 Safety and Health Requirements Manual.

Use equipment of type and size appropriate for the site conditions (soil character and moisture content). Maintenance of exposed subgrades and fills is the responsibility of the Contractor. The Contractor is required to prevent damage by ineffective drainage, dewatering, and heavy loads and equipment by implementing precautionary measures. Repair or replace any defects or damage.

3.1.1 Underground Utilities

Location of the existing utilities indicated is approximate. Physically verify the location and elevation of the existing utilities indicated prior to starting construction. The Contractor is responsible for protecting utilities from damage during construction.

3.1.2 Drainage and Dewatering

Provide for the collection and disposal of surface and subsurface water encountered during construction.

3.1.2.1 Drainage

Provide for the collection and disposal of surface and subsurface water encountered during construction. Construct storm drainage features (ponds/basins) at the earliest stages of site development, and throughout construction grade the construction area to provide positive surface water runoff away from the construction activity and provide temporary ditches, swales, and other drainage features and equipment as required to keep soils from becoming unstable, prevent erosion, or undermining of foundations. Remove unstable material from working platforms for equipment operation and soil support for subsequent construction features and provide new material as specified herein. It is the responsibility of the Contractor to assess the site conditions to employ necessary measures to permit construction to proceed.

3.1.2.2 Dewatering

Control groundwater flowing toward or into excavations to prevent sloughing of excavation slopes and walls, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches are not allowed within 3 feet of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Perform control measures by the time the excavation reaches the water level in order to maintain the integrity of the in-situ material. While the excavation is open, maintain the water level continuously, at least 2 feet below the working level. Operate dewatering system continuously until construction work below existing water levels is complete. Measure and record performance of dewatering system at same time each day by use of observation wells or piezometers installed in conjunction with the dewatering system. Submit dewatering performance records weekly.

3.1.3 Protection of Graded Surfaces

Protect newly backfilled, graded, and topsoiled areas from traffic, erosion, and settlements that may occur. Repair or reestablish damaged grades, elevations, or slopes.

3.2 BORROW

Select borrow material to meet the requirements and conditions of the fill for which it is to be used. Obtain borrow material from approved private sources. Unless otherwise provided in the contract, the Contractor is responsible for obtaining the right to procure material, pay royalties and other charges involved, and bear the expense of developing the sources, including rights-of-way for hauling from the owners. Unless specifically provided, do not obtain borrow within the limits of the project site without prior written approval.

3.2.1 Contractor Furnished Borrow Area(s)

Obtain approved borrow materials from approved offsite sources. If a borrow source is selected that is not a commercial entity from which soil material is directly purchased, submit a Borrow Plan that includes the borrow source location, geotechnical test results showing the fill material meets the Contract requirements, and any Federal, State, and local permits required for excavation and reclamation of the borrow area.

3.2.2 Environmental Requirements for Off-Site Soil

Test offsite soils brought in for use as backfill for Total Petroleum Hydrocarbons (TPH), Benzene, Toluene, Ethyl Benzene, and Xylene (BTEX) and full Toxicity Characteristic Leaching Procedure (TCLP) including ignitability, corrosivity and reactivity. Backfill may not contain concentrations above 10 parts per million (ppm) of total petroleum hydrocarbons (TPH) and 10 ppm of the sum of Benzene, Toluene, Ethyl Benzene, and Xylene (BTEX) and pass the TCLP test. Determine TPH concentrations by using EPA Method 8015. Determine BTEX concentrations by using EPA SW-846.3-3 Method 5030/8020/8260B. Perform TCLP in accordance with EPA SW-846.3-3 Method 1311. Perform hazardous waste characteristic tests for ignitability, corrosivity, and reactivity in accordance with accepted standard methods. Perform PCB testing in accordance with accepted standard methods for sampling and analysis of bulk solid samples. Provide borrow site testing for petroleum hydrocarbons and BTEX from a grab sample of material from the area most likely to be contaminated at the borrow site (as indicated by visual or olfactory evidence), with at least one test from each borrow site. Provide borrow site testing for hazardous waste characteristics (TPH, BTEX and TCLP) from a composite sample of material, collected in accordance with standard soil sampling techniques. Do not bring borrow material to project site until Borrow Plan containing environmental test results has been received and approved by the Contracting Officer.

3.3 SURFACE PREPARATION

3.3.1 Clearing and Grubbing

Remove trees, stumps, logs, shrubs, brush and vegetation and other items that would interfere with construction operations. Remove stumps entirely. Grub out matted roots and roots over 3 inches in diameter to at

least 18 inches below existing surface.

3.3.2 Stripping

Strip site where indicated on the plans. Strip existing surface materials to a depth of 3 inches below the existing ground surface in areas designated as Clear and Grub on the plans. Strip existing surficial soils to a depth of 6 inches in all other areas. Strip in all areas within the planned limits of disturbance. All stripped materials not suitable for reuse as topsoil will be wasted in specified disposal area. Screen all stripped soils to remove roots and organic materials prior disposal.

3.3.3 Stockpiling Operations

Place and grade stockpiles of satisfactory and unsatisfactory materials. Keep stockpiles in a neat and well drained condition, giving due consideration to drainage at all times. Clear, grub, and seal by rubber-tired equipment, the ground surface at stockpile locations; separately stockpile excavated satisfactory and unsatisfactory materials. Protect stockpiles of satisfactory materials from contamination which may destroy the quality and fitness of the stockpiled material. Do not create stockpiles that could obstruct the flow of any stream, endanger a partly finished structure, impair the efficiency or appearance of any structure, or be detrimental to the completed work in any way. If the Contractor fails to protect the stockpiles, and any material becomes unsatisfactory, remove and replace such material with satisfactory material from approved sources.

3.4 EXCAVATION

Excavate to contours, elevation, and dimensions indicated. Excavate soil disturbed or weakened by Contractor's operations, and soils softened or made unstable for subsequent construction due to exposure to weather. Use material removed from excavations meeting the specified requirements in the construction of fills, embankments, subgrades, shoulders, bedding (as backfill), and for similar purposes to minimize surplus material and to minimize additional material to brought on site. Do not excavate below indicated depths except to remove unstable material as determined by the Geotechnical Engineer and confirmed by the Contracting Officer. Remove and replace excavations below the grades shown with appropriate materials as directed by the Contracting Officer.

If at any time during excavation, including excavation from borrow areas, the Contractor encounters material that may be classified as rock or as hard/unyielding material, uncover such material, and notify the Contracting Officer. Do not proceed with the excavation of this material until the Contracting Officer has classified the materials as common excavation or rock excavation. Failure on the part of the Contractor to uncover such material, notify the Contracting Officer, and allow sufficient time for classification and delineation of the undisturbed surface of such material will cause the forfeiture of the Contractor's right of claim to any classification or volume of material to be paid for other than that allowed by the Contracting Officer for the areas of work in which such deposits occur.

3.4.1 Trench Excavation Requirements

Excavate the trench as recommended by the manufacturer of the pipe to be installed. Slope trench walls below the top of the pipe, or make

vertical, and of such width as recommended by the manufacturer. Provide vertical trench walls where no manufacturer installation instructions are available. Do not exceed the trench width of 24 inches below the top pipe plus pipe outside diameter (O.D.) for pipes of less than 24 inches inside diameter, and do not exceed 36 inches plus pipe outside diameter for pipe sizes larger than 24 inches inside diameter. Where recommended trench widths are exceeded, provide redesign, stronger pipe, or special installation procedures. The Contractor is responsible for the cost of redesign, stronger pipe, or special installation procedures without any additional cost to the Government.

3.4.1.1 Bottom Preparation

Grade the bottoms of trenches accurately to provide uniform bearing and support for the bottom quadrant of each section of the pipe. Excavate bell holes to the necessary size at each joint or coupling to eliminate point bearing. Remove stones of 3 inch or greater in any dimension, or as recommended by the pipe manufacturer, whichever is smaller, to avoid point bearing.

3.4.1.2 Removal of Unyielding Material

Where unyielding material is encountered in the bottom of the trench, notify the Contracting Officer. Following approval, remove such material 24 inch below the required grade and replaced with suitable materials as provided in paragraph FILLING AND COMPACTION.

3.4.1.3 Removal of Unstable Material

Where unstable material is encountered in the bottom of the trench, remove such material to the depth directed and replace it to the proper grade with suitable material as provided in paragraph FILLING AND COMPACTION. When removal of unstable material is required due to the Contractor's fault or neglect in performing the work, the Contractor is responsible for excavating the resulting material and replacing it without additional cost to the Government.

3.4.1.4 Water Lines

Excavate trenches to a depth that provides a minimum cover of 3 feet from the existing ground surface, or from the indicated finished grade, whichever is lower, to the top of the pipe.

3.4.2 Underground Utilities

Perform work adjacent to utilities in accordance with procedures outlined by utility owner. Excavation made with power-driven equipment is not permitted within 2 feet of known utility or subsurface construction. For work immediately adjacent to or for excavations exposing a utility or other buried obstruction, excavate by hand. Start hand excavation on each side of the indicated obstruction and continue until the obstruction is uncovered or until clearance for the new grade is assured. Support uncovered lines or other existing work affected by the contract excavation until approval for backfill is granted by the Contracting Officer. Report damage to utility lines or subsurface construction immediately to the Contracting Officer.

3.5 SUBGRADE PREPARATION

3.5.1 General Requirements

Shape subgrade to line, grade, and cross section as indicated. Remove unsatisfactory and unstable material in surfaces to receive fill or in excavated areas, structural fill. Do not place material on surfaces that are muddy, frozen, contain frost, or otherwise containing unstable material. Scarify the surface to a depth of 4 inches prior to placing fill. Step or bench sloped surfaces steeper than 1 vertical to 4 horizontal prior to scarifying. Place 4 inches of loose fill and blend with scarified material. When subgrade is part fill and part excavation or natural ground, scarify to a depth of 8 inches.

3.5.2 Subgrade for Structures, Spread Footings, and Concrete Slabs

Do not excavate below depth shown for structures, spread footings, and concrete slabs. If over excavation occurs, compact disturbed material to 95 percent of ASTM D1557. After final rolling, the surface of the subgrade for buildings and pavements must not show deviations greater than 0.05 foot when tested with a 12-foot straightedge applied both parallel and at right angles to the centerline of the area.

3.5.3 Subgrade for Pavements

Compact top 12 inches of subgrade for pavements to at least 95 percent of ASTM D1557. After final rolling, the surface of the subgrade for buildings and pavements must not show deviations greater than 0.05 foot when tested with a 12-foot straightedge applied both parallel and at right angles to the centerline of the area.

3.6 FILLING AND COMPACTION

Prepare ground surface on which backfill is to be placed and provide compaction requirements for backfill materials in conformance with the applicable portions of paragraphs for SUBGRADE PREPARATION. Do not place material on surfaces that are muddy, frozen, or contain frost. Finish compaction by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, or other approved equipment well suited to the soil being compacted. Moisten material as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used. Fill and backfill to contours, elevations, and dimensions indicated. Compact and test each lift before placing overlaying lift.

3.6.1 Trench Backfill

Backfill trenches to the grade shown. Backfill the trench to 2 feet above the top of pipe prior to performing the required pressure tests. Leave the joints and couplings uncovered during the pressure test.

3.6.1.1 Replacement of Unyielding Material

Replace unyielding material removed from the bottom of the trench with satisfactory material or initial backfill material.

3.6.1.2 Replacement of Unstable Material

Replace unstable material removed from the bottom of the trench or excavation with satisfactory material placed in layers not exceeding 6

inches loose thickness.

3.6.1.3 Bedding and Initial Backfill

Provide bedding of the type and thickness shown. Place initial backfill material and compact it with approved tampers to a height of at least one foot above the utility pipe or conduit. Bring up the backfill evenly on both sides of the pipe for the full length of the pipe. Take care to ensure thorough compaction of the fill under the haunches of the pipe. Except where shown or when specified otherwise in the individual piping section, provide bedding for buried piping in accordance with PART 2 paragraph UTILITY BEDDING MATERIAL. Compact backfill to top of pipe to 85 percent of ASTM D1557. Provide plastic piping with bedding to spring line of pipe.

3.6.1.4 Final Backfill

Do not begin backfill until construction below finish grade has been approved, underground utilities systems have been inspected, tested and approved, forms removed, and the excavation cleaned of trash and debris. Bring backfill to indicated finish grade. Where pipe is coated or wrapped for protection against corrosion, the backfill material up to an elevation 2 feet above sewer lines and one foot above other utility lines need to be free from stones larger than one inch in any dimension. Heavy equipment for spreading and compacting backfill are not to be operated closer to foundation or retaining walls than a distance equal to the height of backfill above the top of footing; compact remaining area in layers not more than 4 inches in compacted thickness with power-driven hand tampers suitable for the material being compacted. Place backfill carefully around pipes or tanks to avoid damage to coatings, wrappings, or tanks. Do not place backfill against foundation walls prior to 7 days after completion of the walls. As far as practicable, bring backfill up evenly on each side of the wall and sloped to drain away from the wall.

Fill the remainder of the trench, except for special materials for buildings and pavements with satisfactory material. Place backfill material and compact as follows:

3.6.1.4.1 Buildings and Pavements

Place backfill up to the required elevation as specified. Do not permit water flooding or jetting methods of compaction. Compact as specified for Structural Fill.

3.6.1.4.2 Turfed or Seeded Areas and Miscellaneous Areas

Deposit backfill in layers of a maximum of 12 inches loose thickness, and compact it to 85 percent maximum dry density for cohesive soils and 90 percent maximum dry density for cohesionless soils. Apply this requirement to all other areas not specifically designated above.

3.6.1.5 Displacement of Features

After other required tests have been performed and the trench backfill compacted to the finished grade surface, inspect the pipe to determine whether unexpected or damaging displacement has occurred. Conduct walk-through inspection of pipe sizes larger than 48 inches. Inspect pipes smaller than 48 inches using remote methods using closed circuit television, sonar, or hybrid that can provide a 360-degree inspection of

the pipe. Prepare and submit a pipe inspection report consisting of digital video or photos. If, in the judgment of the Contracting Officer, the interior of the pipe shows poor alignment or any other defects that would cause improper functioning of the system, replace or repair the defects as directed at no additional cost to the Government.

3.6.1.6 Buried Tape And Detection Wire

3.6.1.6.1 Buried Warning and Identification Tape

Provide buried utility lines with utility identification tape. Bury tape 12 inches below finished grade; under pavements and slabs, bury tape 6 inches below top of subgrade.

3.6.1.6.2 Buried Detection Wire

Bury detection wire directly above non-metallic piping at a distance not to exceed 12 inches above the top of pipe. Extend the wire continuously and unbroken, from manhole to manhole. Terminate the ends of the wire inside the manholes at each end of the pipe, with a minimum of 3 feet of wire, coiled, remaining accessible in each manhole. Furnish insulated wire over its entire length. Install wires at manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, terminate the wire in the valve pit at the pump station end of the pipe.

3.6.2 Structural Fill Placement

Place fill and backfill beneath and adjacent to structures in successive horizontal layers of loose material not more than 8 inches in depth, or in loose layers not more than 4 inches in depth when using hand-operated compaction equipment. Do not place over wet or frozen materials. Compact to at least 90 percent of laboratory maximum dry density for cohesive materials or 95 percent of laboratory maximum dry density for cohesionless materials, except as otherwise specified. Perform compaction in such a manner as to prevent wedging action or eccentric loading upon or other damage to the structure. Moisture condition fill and backfill material to within range of plus 2 or minus 2 percent of optimum moisture content at the time of compaction.

3.6.3 Backfill for Appurtenances

After the manhole, catchbasin, inlet, or similar structure has been constructed and the concrete has been allowed to cure for 7 days, place backfill in such a manner that the structure is not be damaged by the shock of falling earth. Deposit the backfill material, compact it as specified for final backfill, and bring up the backfill evenly on all sides of the structure to prevent eccentric loading and excessive stress.

3.6.4 Compaction

3.6.4.1 General Site

Compact underneath areas designated for vegetation and areas outside the 5 foot line of the paved area or structure to 85 percent of ASTM D698 or ASTM D1557.

3.6.4.2 Adjacent Areas

Compact areas within 5 feet of structures to 95 percent of ASTM D698 or ASTM D1557.

3.7 FINISHING/FINISH OPERATIONS

During construction, keep embankments and excavations shaped and drained. Maintain ditches and drains along subgrade to drain effectively at all times. Do not disturb the finished subgrade by traffic or other operation. Protect and maintain the finished subgrade in a satisfactory condition until ballast, subbase, base, or pavement is placed. Do not permit the storage or stockpiling of materials on finished subgrade. Do not lay subbase, base course, ballast, or pavement until the subgrade has been checked and approved, and in no case place subbase, base, surfacing, pavement, or ballast on a muddy, spongy, frozen or otherwise unstable subgrade.

Finish the surface of excavations, embankments, and subgrades to a smooth and compact surface in accordance with the lines, grades, and cross sections or elevations shown. Provide the degree of finish for graded areas within 0.1 foot of the grades and elevations indicated except as indicated for subgrades specified in paragraph SUBGRADE PREPARATION. Finish gutters and ditches in a manner that will result in effective drainage. Finish the surface of areas to be turfed to a smoothness suitable for the application of turfing materials. Repair graded, topsoiled, or backfilled areas prior to acceptance of the work, and re-established grades to the required elevations and slopes.

3.7.1 Capillary Water Barrier

Place a capillary water barrier under concrete floor and area-way slabs grade directly on the subgrade and compact with a minimum of two passes of a hand-operated plate-type vibratory compactor.

3.7.2 Grading Around Structures

Construct areas within 5 feet outside of each building and structure line true-to-grade, shape to drain, and maintain free of trash and debris until final inspection has been completed and the work has been accepted.

3.7.3 Grading

Finish grades as indicated within one-tenth of one foot. Grade areas to drain water away from structures. Maintain areas free of trash and debris. For existing grades that will remain but which were disturbed by Contractor's operations, grade as directed.

3.7.4 Topsoil and Seed

Provide as specified in Section 32 92 23 SODDING.

3.8 DISPOSITION OF SURPLUS MATERIAL

Remove from Government property all surplus or other soil material not required or not suitable for filling or backfilling, along with brush, refuse, stumps, roots, and timber. Properly disposed of in accordance with all applicable laws and regulations. Prepare plan for Disposition of Surplus Materials to include permissions document to dispose of nonsalable

products.

3.9 TESTING

Perform testing as indicated in Table 1. Submit Material Test Reports within 7 days of tests being completed.

Material Type list materials to be tested as identified in paragraph DEFINITIONS	Location of Material	Test Method	Test Frequency
- Structural Fill - Capillary Water Barrier	-Excavation - Trench Backfill -Building Slab	Density - ASTM D1556/D1556M, ASTM D6938. When ASTM D6938 is used, check the calibration curves and adjust using only the sand cone method as described in ASTM D1556/D1556M.	One test per 2000 square feet, or fraction thereof, of each lift of fill or backfill areas compacted by other than hand-operated machines. Double testing frequency for areas compacted by hand-operated machines. If ASTM D6938 is used, check in-place densities by ASTM D1556/D1556M as follows: One check test per lift for every 6 tests.

Material Type list materials to be tested as identified in paragraph DEFINITIONS	Location of Material	Test Method	Test Frequency
- Structural Fill	-Excavation -Trench Backfill	Moisture Density Relationship - ASTM D1557	One representative test per 500 cubic yards of fill and backfill, or when any change in material occurs which may affect the optimum moisture content or laboratory maximum dry density. Sample to be taken from stockpile or location of placement.
-Structural Fill -Capillary Water Barrier	-Excavations -Trench Backfill -Building Slab	Gradation - ASTM C136/C136M	One representative test per 500 cubic yards of fill and backfill, or when any change in material occurs which may affect the optimum moisture content or laboratory maximum dry density. Sample to be taken from stockpile or location of placement.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 31 11 00

CLEARING AND GRUBBING
11/18

PART 1 GENERAL

1.1 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Tree Wound Paint

SD-04 Samples

Tree Wound Paint

1.2 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the site, and handle in a manner which will maintain the materials in their original manufactured or fabricated condition until ready for use.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Tree Wound Paint

Use bituminous based paint from standard manufacture specifically formulated for tree wounds.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Protection

3.1.1.1 Roads and Walks

Keep roads and walks free of dirt and debris at all times.

3.1.1.2 Trees, Shrubs, and Existing Facilities

Protect trees and vegetation to be left standing from damage incident to clearing, grubbing, and construction operations by the erection of barriers or by such other means as the circumstances require.

3.1.1.3 Utility Lines

Protect existing utility lines that are indicated to remain from damage.

Notify the Contracting Officer immediately of damage to or an encounter with an unknown existing utility line. The Contractor is responsible for the repair of damage to existing utility lines that are indicated or made known to the Contractor prior to start of clearing and grubbing operations. When utility lines which are to be removed are encountered within the area of operations, notify the Contracting Officer in ample time to minimize interruption of the service. Refer to Section 01 30 00 ADMINISTRATIVE REQUIREMENTS and Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS for additional utility protection.

3.2 CLEARING

Clearing consists of the felling, trimming, and cutting of trees into sections and the satisfactory disposal of the trees and other vegetation designated for removal, including downed timber, snags, brush, and rubbish occurring within the areas to be cleared. Clearing also includes the removal and disposal of structures that obtrude, encroach upon, or otherwise obstruct the work. Cut off flush with or below the original ground surface trees, stumps, roots, brush, and other vegetation in areas to be cleared, except such trees and vegetation as may be indicated or directed to be left standing.

3.2.1 Tree Removal

Where indicated or directed, remove trees and stumps that are designated as trees from areas outside those areas designated for clearing and grubbing. This work includes the felling of such trees and the removal of their stumps and roots as specified in paragraph GRUBBING. Dispose of trees as specified in paragraph DISPOSAL OF MATERIALS.

3.2.2 Pruning

Trim trees designated to be left standing within the cleared areas of dead branches 1-1/2 inches or more in diameter; and trim branches to heights and in a manner as indicated. Neatly cut limbs and branches to be trimmed close to the bole of the tree or main branches.

3.2.3 Grubbing

Grubbing consists of the removal and disposal of stumps, roots larger than 3 inches in diameter, and matted roots from the designated grubbing areas. Remove material to be grubbed, together with logs and other organic or metallic debris not suitable for foundation purposes, to a depth of not less than 18 inches below the original surface level of the ground in areas indicated to be grubbed and in areas indicated as construction areas under this contract, such as areas for buildings, and areas to be paved. Fill depressions made by grubbing with suitable material and compact to make the surface conform with the original adjacent surface of the ground.

3.3 DISPOSAL OF MATERIALS

Dispose of excess materials in accordance with the approved solid waste management permit and include those materials in the solid waste management report.

All wood or wood like materials, except for salable timber, remaining from clearing, prunning or grubbing such as limbs, tree tops, roots, stumps,

logs, rotten wood, and other similiar materials is the property of the Contractor and dispose of as specified. All non-saleable timber and wood or wood like materials remaining from timber harvesting such as limbs, tree tops, roots, stumps, logs, rotten wood, and other similiar materials is the property of the Contractor and dispose of as specified.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 31 31 16.13

CHEMICAL TERMITE CONTROL
08/22, CHG 1: 11/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. DEPARTMENT OF DEFENSE (DOD)

DODI 4150.07 (2019) DOD Pest Management Program

1.2 ADMINISTRATIVE REQUIREMENTS

Coordinate work related to final grades, landscape plantings, foundations, or any other alterations to the finished construction which might alter the condition of treated soils.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Termiticide Application Plan; G

SD-03 Product Data

Termiticides

SD-05 Design Data

Mixing Formulation

SD-06 Test Reports

Soil Moisture

Calibration Test

SD-07 Certificates

Qualifications; G

Foundation Exterior

Utilities and Vents

Crawl and Plenum Air Spaces

List of Equipment

SD-08 Manufacturer's Instructions

Termiticides

SD-11 Closeout Submittals

Verification of Measurement

Warranty

Pest Management Report

1.4 QUALITY CONTROL

1.4.1 Regulatory Requirements

Comply with DODI 4150.07 for requirements on Contractor's licensing, certification, and record keeping. Maintain daily records using the Pest Management Maintenance Record, DD Form 1532-1, or a computer generated equivalent, and submit copies of records when requested by the Contracting Officer. These forms may be obtained from the main web site: https://www.esd.whs.mil/Directives/forms/fmo_poc/

1.4.2 Qualifications

For the application of pesticides, use the services of an applicator whose principal business is pest control. The applicator must be commercially certified in the state where the work is to be performed as required by DODI 4150.07. No contractor personnel may work under the supervision of a certified person even where this is permitted practice in those States or host nations in which the DOD property is located. Termiticide applicators must also be certified in the U.S. Environmental Protection Agency (EPA) pesticide applicator category which includes structural pest control. Submit a copy of the pest control business license and pesticide applicator certificates to the Contracting Officer prior to any applications.

1.4.3 Safety Requirements

Formulate, apply, and dispose of termiticides and their containers in accordance with label directions. Draw water for formulating only from sites designated by the Contracting Officer, and fit the filling hose with a backflow preventer meeting local plumbing codes or standards. Maintain an air gap between the filling hose and tank. Perform filling operations under the direct and continuous observation of a contractor's representative to prevent overflow. Secure pesticides and related materials under lock and key when unattended. Ensure that proper protective clothing and equipment are worn and used during all phases of termiticide application. Dispose of used pesticide containers off Government property.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver termiticide material to the site in the original unopened containers bearing legible labels indicating the EPA registration number,

manufacturer's registered uses and in new or otherwise good condition as supplied by the manufacturer or formulator.

1.5.2 Inspection

Inspect termiticides upon arrival at the job site for conformity to type and quality in accordance with paragraph TERMITICIDES. Each label must bear evidence of registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended or under appropriate regulations of the host county. Inspect other materials for conformance with specified requirements. Remove unacceptable materials from the job site.

1.5.3 Storage

Storage of pesticides on the installation will not be permitted unless it is written into the contract.

1.5.4 Handling

Handle and mix termiticides in accordance with the manufacturer's label and SDS, preventing contamination by dirt, water, and organic material. Protect termiticides from weather elements as recommended by the manufacturer's label and SDS. Spill kits must be maintained on pest control vehicles and must be available at the mixing site. Conduct termiticide mixing in an area that has been approved by the Integrated Pest Management Coordinator (IPMC) or Contracting Officer, and with adequate spill containment that can contain at least 110 percent of the volume of the tank.

1.6 SITE CONDITIONS

The following site conditions determine the acceptable time of application.

1.6.1 Soil Moisture

Test soils to be treated immediately before application. Test soil moisture content to a minimum depth of 3 inches. The soil moisture must be as recommended by the termiticide manufacturer. Application of the termiticide is not permitted when soil moisture content exceeds manufacturer's recommendations.

1.6.2 Runoff and Wind Drift

Application of termiticide will not be permitted during or immediately following heavy rains, when conditions may allow runoff, when it may create an environmental hazard or when average wind speed exceeds 10 miles per hour. Termiticide is not permitted to enter water systems, aquifers, or endanger humans or animals.

1.7 WARRANTY

Provide a 5 year written warranty against infestations or reinfestations by subterranean termites of the buildings or building additions constructed under this contract. Include in the warranty annual inspections of the buildings or building additions during the warranty period. If live subterranean termite infestation or subterranean termite damage is discovered during the warranty period, and the soil and building conditions have not been altered in the interim:

a. Re-treat the site and perform other treatment as may be necessary for elimination of subterranean termite infestation;

b. Repair damage caused by termite infestation; and

c. Reinspect the building approximately 180 days after the re-treatment.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

Chemical termite control uses liquid termiticide treatments applied to the soil to form a continuous chemical barrier in the soil around both sides of the foundation. The application can be surface applied or rodded and trenched. This barrier prevents foraging termites from reaching the foundation and piers. Only the soil adjacent to these foundation elements is treated. For slab construction (including foundations, patios and garages), the entire soil (or gravel) surface is treated before the vapor barrier is installed and the slab poured over it. Soil treatment is coordinated with all building activities from foundation construction through final grading of the soil around the building's exterior. In order for the treatment to be effective, the final phase of the application must be done after final grading and sometimes after landscaping is completed so that the treated soil is not disturbed.

2.2 MATERIALS

2.2.1 Termiticides

Provide termiticides currently registered by the EPA or host country. Termiticides must be approved by the Contracting Officer and the Pest Management Consultant prior to use. Select non-repellent termiticides (active ingredient: chlorantraniliprole, chlorfenapyr, fipronil, or imidacloprid) for maximum effectiveness and duration after application. Select a termiticide that is suitable for the soil and climatic conditions at the project site and apply at the highest labeled rate. Submit manufacturer's label and Safety Data Sheet (SDS) for termiticides proposed for use.

PART 3 EXECUTION

3.1 PREPARATION

Before termiticide application begins, remove all cellulose containing materials from the site such as wood debris from clearing and grubbing and post construction wood scraps, such as ground stakes, form boards, cardboard paper, and scrap lumber from the site.

3.1.1 Verification

Before work starts, verify that final grades are as indicated and smooth grading has been completed. Finely grade soil and remove particles larger than 1 inch. Compact soil particles to eliminate soil movement.

3.1.2 Foundation Exterior

If the exterior perimeter treatment is applied before major construction is completed it will be damaged or removed. The exterior foundation perimeter treatment will have to occur in phases during completion of any

pads, porches, aprons, sidewalks, final grading, or landscape plantings adjacent to the building foundation. These treatment areas should be coordinated after all major construction but before any pads, porches, or other items requiring special consideration are poured adjacent to the foundation walls. Submit written verification that final grading, landscape planting, and other items adjacent to the foundation will not disturb treatment of the soil on the exterior sides of foundation walls, grade beams, and similar structures.

3.1.3 Utilities and Vents

Turn off and block HVAC ducts and vents located in the treatment area prior to application to protect people and animals from termiticide. Submit written verification that the HVAC ducts and vents, water and sewer lines, and plumbing have been turned off or blocked prior to applying termiticide.

3.1.4 Crawl and Plenum Air Spaces

Submit written verification that crawl and plenum air spaces have been located and identified prior to applying termiticide.

3.1.5 Application Plan

Prior to commencing application of termiticide, submit a Termiticide Application Plan addressing the following items:

a. proposed sequence of treatment work including dates and times of application

b. termiticide trade name

c. EPA registration number

d. chemical composition

e. concentration of original and diluted material

f. formulation

g. manufacturer's recommended application rates

h. regional requirements

i. application rate of active ingredients

j. method of application

k. area or volume to be treated

l. amount to be applied

m. copy of the pest control business license

n. copy of the pesticide applicator certificates

3.2 APPLICATION

For areas to be treated, establish complete and unbroken vertical and

horizontal soil chemical barriers between the soil and all portions of the intended structure which may allow termite access to wood and wood related products. Make applications to crawl spaces in accordance with label directions. Applications to crawl space areas that are used as plenum air spaces will not be permitted.

3.2.1 Equipment Calibration and Tank Measurement

Submit a list of equipment to be used. Conduct calibration test on the application equipment to be used immediately prior to commencement of termiticide application. Measure the volume and contents of the application tank. Testing must confirm that the application equipment is operating within the manufacturer's specifications and meets the specified requirements. Submit written certification of the equipment calibration test results within one week of testing. Where results from the equipment calibration and tank measurements tests are unsatisfactory, re-treatment will be required.

3.2.2 Mixing and Application

Perform all work related to formulating, mixing, and application in the presence of the Contracting Officer, a DOD certified pesticide applicator, Pest Management Quality Assurance Evaluator (QAE)/Performance Assessment Representative (PAR), or IPMC. Applications must be made at the highest rate or concentration allowed by the label. Submit mixing formulation:

a. Quantity of pesticide used.

b. Rate of dispersion.

c. Percent of use.

d. Total amount used.

A closed system is recommended as it prevents the termiticide from coming into contact with the applicator or other persons. Only use water from designated locations. Fit filling hoses with a backflow preventer meeting local plumbing codes or standards. Maintain an air gap between filling hoses and tanks. Prevent overflow during the filling operation. Spill kits must be maintained on pest control vehicles and must be available at the mixing site. Termiticide mixing must be conducted in an area that has been designated by the IPMC or Contracting Officer and that has adequate spill containment. Inspect the application equipment prior to each day of use for leaks, clogging, wear, or damage. Immediately perform repairs on the application equipment to prevent or eliminate leaks and clogging.

3.2.2.1 Application Method

3.2.2.1.1 Surface Application

Use surface applications for establishing horizontal barriers. Apply termiticide as a coarse spray and provide uniform distribution over the soil surface. Termiticide must penetrate a minimum of 1 inch into the soil, or as recommended by the manufacturer. If soils are treated to a depth less than specified or approved, repeat work performed to the depth specified at no additional cost to the Government.

3.2.2.1.2 Rodding and Trenching

Use rodding and trenching for establishing vertical soil barriers. Trenching must be to the depth of the foundation footing. Width of trench must be as recommended by the manufacturer, or as indicated. Rodding or other approved method may be implemented for saturating the base of the trench with termiticide. Backfill the trench immediately after termiticide has reached maximum penetration as recommended by the manufacturer. If maximum penetration is not achieved, as recommended by the manufacturer, repeat work performed to maximum penetration as recommended by the manufacturer at no additional cost to the Government. Backfill in 6 inch rises or layers. Treat each rise or layer with termiticide.

3.2.3 Sampling

The Contracting Officer may draw samples for analysis, at any time and without prior notice, from stocks at the job site to determine if the amount of active ingredient specified on the label is being applied. When analysis, performed by the Government, indicates samples contain less than the amount of active ingredient specified on the label, repeat work performed with pesticides conforming to this specification at no additional cost to the Government.

3.2.4 Vapor Barriers and Waterproof Membranes

Apply termiticide prior to placement of a vapor barrier or waterproof membrane.

3.2.5 Placement of Concrete

Place concrete covering treated soils after the termiticide has reached maximum penetration into the soil as recommended by the manufacturer. Cover treated areas with plastic if slab is not to be poured immediately following termiticide application.

3.2.6 Clean Up, Disposal, and Protection

Once application has been completed, proceed with clean up and protection of the site without delay.

3.2.6.1 Clean Up

Clean the site of all material associated with the treatment according to label instructions, and as indicated. Remove and dispose of excess and waste material off Government property.

3.2.6.2 Disposal of Termiticide

Dispose of residual termiticides and containers off Government property, and in accordance with label instructions and EPA criteria.

3.3 FIELD QUALITY CONTROL

3.3.1 Verification of Measurement

Once termiticide application has been completed, measure tank contents to determine the remaining volume. The total volume measurement of used contents for the application must equal the application rate established

in the application plan. Submit written verification that the volume of termiticide used meets the application rate established in the application plan.

3.3.2 Inspection

3.3.2.1 Technical Representative

Provide a technical representative who is a DOD certified pesticide applicator, Pest Management QAE/PAR, or IPMC. The technical representative must be present at all meetings concerning treatment measures for subterranean termites and during treatment application. Contact the IPMC prior to starting work.

3.4 CLOSEOUT ACTIVITIES

Upon completion of this work, submit the Pest Management Report DD Form 1532, or an equivalent computer product, to the IPMC. This form identifies the target pest, type of operation, brand name and manufacturer of pesticide, formulation, concentration or rate of application used.

3.5 PROTECTION

3.5.1 Protection of Treated Area

Immediately after the application, protect the area from other use by erecting barricades as required or directed. Place signage inside the entrances to crawl spaces and identify the space as treated with termiticide and not safe for children or animals.

3.5.2 Disturbance of Treated Soils

Re-treat soil and fill material disturbed after treatment before placement of slabs or other covering structures.

-- End of Section --

SECTION 32 05 33

LANDSCAPE ESTABLISHMENT
08/17

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D5851	(1995; R 2015) Planning and Implementing a Water Monitoring Program
ASTM D6155	(2019) Nontraditional Coarse Aggregate for Bituminous Paving Mixtures

TREE CARE INDUSTRY ASSOCIATION (TCIA)

TCIA Z133	(2017) American National Standard for Arboricultural Operations - Pruning, Repairing, Maintaining, and Removing Trees, and Cutting Brush - Safety Requirements

1.2 DEFINITIONS

1.2.1 Pesticide

Any substance or mixture of substances, including biological control agents, that may prevent, destroy, repel, or mitigate pests and are specifically labeled for use by the U.S. Environmental Protection Agency (EPA). Also, any substance used as a plant regulator, defoliant, disinfectant, or biocide. Examples of pesticides include fumigants, herbicides, insecticides, fungicides, nematicides, molluscicides and rodenticides.

1.2.2 Stand of Turf

100 percent ground cover of the established species.

1.2.3 Planter Beds

A planter bed is defined as an area containing one or a combination of the following plant types: shrubs, vines, wildflowers, annuals, perennials, ground cover, and a mulch topdressing excluding turf. Trees may also be found in planter beds.

1.3 RELATED REQUIREMENTS

Section 32 92 23 SODDING applies to this section for installation of sod requirements, with additions and modifications herein.

Section 32 93 00 EXTERIOR PLANTS applies to this section for installation

of trees, and shrubs, with additions and modifications herein.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Integrated Pest Management Plan; G

SD-03 Product Data

Fertilizer; G

Mulches Topdressing

Organic Mulch Materials

SD-07 Certificates

Maintenance Inspection Report

SD-10 Operation and Maintenance Data

Maintenance

1.5 DELIVERY, STORAGE AND HANDLING

1.5.1 Delivery

Deliver fertilizer, and gypsum, to the site in original containers bearing manufacturer's chemical analysis, name, trade name, or trademark, and indication of conformance to state and federal laws. Instead of containers, fertilizer, gypsum may be furnished in bulk with a certificate indicating the above information.

1.5.2 Storage

1.5.2.1 Fertilizer, Lime, Mulch Storage

Store material in designated areas. Store lime and fertilizer in cool, dry locations away from contaminants.

1.5.2.2 Antidesiccant's Storage

Do not store with fertilizers or other landscape maintenance materials.

1.5.3 Handling

Do not drop or dump materials from vehicles.

1.6 MAINTENANCE

Submit Operation and Maintenance (O&M) Manuals for planting materials. Include instructions indicating procedures during one typical year including variations of maintenance for climatic conditions throughout the

year. Provide instructions and procedures for watering; promotion of growth, including fertilizing, pruning, and mowing; and integrated pest management. O&M Manuals must include pictures of planting materials cross referenced to botanical and common names, with a description of the normal appearance in each season.

Develop a water monitoring program for surface and ground water on the project site in accordance with ASTM D5851 and consistent with the water management program utilized during construction operations.

PART 2 PRODUCTS

2.1 POST-PLANT FERTILIZER

Fertilizer for groundcover, wildflowers, and grasses is not permitted. Provide fertilizer for trees, plants, and shrubs as recommended by plant supplier, except synthetic chemical fertilizers are not permitted. Fertilizers containing petrochemical additives or that have been treated with pesticides or herbicides are not permitted.

2.1.1 Granular Fertilizer

Organic, granular controlled release fertilizer containing the following minimum percentages, by weight, of plant food nutrients:

10 percent available nitrogen
10 percent available phosphorus
10 percent available potassium

2.2 WATER

Source of water must be approved by the Contracting Officer, and be of suitable quality for irrigation. Use collected storm water or graywater when available.

2.3 MULCHES TOPDRESSING

Free from noxious weeds, mold, pesticides, or other deleterious materials.

2.3.1 Inert Mulch Materials

Provide riverbank stone, complying with ASTM D6155, ranging in size from 3 to 5 inches.

2.3.2 Organic Mulch Materials

Provide shredded hardwood mulch. Wood cellulose fiber must be processed to contain no growth or germination-inhibiting factors, dyed with non-toxic, biodegradable dye to an appropriate color to facilitate visual metering of materials application.

PART 3 EXECUTION

3.1 EXTENT OF WORK

Provide landscape construction maintenance to include irrigation equipment cleaning and adjustments, mowing, edging,aeration, fertilizing, watering, and stake and guy adjusting, for all newly installed landscape areas, unless indicated otherwise, and at all areas inside or outside the limits

of the construction that are disturbed by the Contractor's operations.

3.1.1 Policing

Police all landscaped areas. Policing includes removal of leaves, branches and limbs regardless of length or diameter, dead vegetation, paper, trash, cigarette butts, garbage, rocks or other debris. Collected debris must be promptly removed and disposed of at an approved disposal site.

3.2 IRRIGATION ESTABLISHMENT PERIOD

The irrigation establishment period will commence on the date that inspection by the Contracting Officer shows that all new plantings provided under this contract have been satisfactorily installed and must continue for a period of 120 days.

3.2.1 Water Restrictions

Abide by state, local or other water conservation regulations in force during the establishment period. Automatic controller must be adjusted to comply with the water conservation regulations schedule.

3.2.2 Fire Hydrants

To use a fire hydrant for irrigation, obtain prior clearance from the Contracting Officer and provide the tools and connections approved for use on fire hydrants. If a fire hydrant is used, Provide a reduced pressure backflow preventer for each connection between hose and fire hydrant. Backflow preventer used must be tested once per month by a certified backflow preventer tester.

3.2.3 Final Acceptance

Upon completion of the irrigation establishment period and final acceptance of groundcover and exterior plants, irrigation equipment must be removed.

3.3 GROUNDCOVER ESTABLISHMENT PERIOD

Groundcover establishment period will commence on the date that inspection by the Contracting Officer shows that the new turf furnished under this contract has been satisfactorily installed to a 100 percent stand of coverage. The establishment period must continue for a period of 120 days.

3.3.1 Frequency of Maintenance

Begin maintenance immediately after turf has been installed. Inspect areas once a week during the installation and establishment period and perform needed maintenance promptly.

3.3.2 Promotion of Growth

Maintain groundcover in a manner that promotes proper health, growth, natural color. Turf must have a neat uniform manicured appearance, free of bare areas, ruts, holes, weeds, pests, dead vegetation, debris, and unwanted vegetation that present an unsightly appearance. Mow, remove excess clippings, eradicate weeds, water, fertilize, overseed, aerate, and perform other operations necessary to promote growth, as approved by

Contracting Officer and consistent with approved Integrated Pest Management Plan. Remove noxious weeds common to the area from planting areas by mechanical means.

3.3.3 Mowing

3.3.3.1 Turf

Mow turf at a uniform finished height. Mow turfed areas to a minimum average height of 3 inches when average height of grass becomes 4 inches for spring/summer maintenance and to a minimum average height of 3 inches when the average height of grass reaches 4 inches for fall maintenance. The height of turf is measured from the soil. Perform mowing of turf in a manner that prevents scalping, rutting, bruising, uneven and rough cutting. Prior to mowing, all rubbish, debris, trash, leaves, rocks, paper, and limbs or branches on a turf area must be picked up and disposed. Adjacent paved areas must be swept/vacuumed clean.

3.3.4 Turf Edging and Trimming

Perimeter of planter bed edges, sidewalks, driveways, curbs, and other paved surfaces must be edged. Uniformly edge these areas to prevent encroachment of vegetation onto paved surfaces and to provide a clear cut division line between planter beds, turf, and ground cover. Edging is to be accomplished in a manner that prevents scalping, rutting, bruising, uneven and rough cutting. Perform edging on the same day that turf is mowed. Use of string line trimmers is permitted in "soft" areas such as an edge between turfgrass and a planter bed. Exercise care to avoid damage to any plant materials, structures, and other landscape features.

Trimming around trees, fences, poles, walls, irrigation valve boxes and other similar objects is to be accomplished to match the height and appearance of surrounding mowed turf growth. Trimming must be performed on the same day the turf's mowed. Care must be exercised to avoid "Girdling" trees located in turf areas. The use of protective tree collars on trees in turf areas may be utilized as a temporary means to avoid injury to tree trunks. At the end of the plant establishment period Contractor will be responsible for removing all protective tree collars.

3.3.5 Post-Fertilizer Application

Do not fertilize groundcover, and grasses. Apply turf fertilizer in a manner that promotes health, growth, vigor, color and appearance of cultivated turf areas. The method of application, fertilizer type and frequencies must be determined by the laboratory soil analysis results the requirements of the particular turf species.

3.3.6 Turf Watering

Perform irrigation in a manner that promotes the health, growth, color and appearance of cultivated vegetation and that complies with all Federal, State, and local water agencies and authorities directives. The Contractor must be responsible to prevent over watering, water run-off, erosion, and ponding due to excessive quantities or rate of application. Abide by state, local or other water conservation regulations or restrictions in force during the establishment period.

3.3.7 Replanting

Replant in accordance with Section 32 92 23 SODDING and within specified planting dates areas which do not have a satisfactory stand of turf. Replant areas which do not have a satisfactory stand of other groundcover and grasses.

3.3.8 Final Inspection and Acceptance

Final inspection will be make upon written request from the Contractor at least 10 days prior to the last day of the turf establishment period. Final turf acceptance will be based upon a satisfactory stand of turf. Final acceptance of grass areas will be based upon a stand of 95 percent groundcover of established species.

3.3.9 Unsatisfactory Work

When work is found to not meet design intent and specifications, maintenance period will be extended at no additional cost to the Government until work has been completed, inspected and accepted by Contracting Officer.

3.4 EXTERIOR PLANT ESTABLISHMENT PERIOD

The exterior plant establishment period will commence on the date that inspection by the Contracting Officer shows that the new plants furnished under this contract have been satisfactorily installed and must continue for a period of 120 days.

3.4.1 Frequency of Maintenance

Begin maintenance immediately after plants have been installed. Inspect exterior plants at least once a week during the installation and establishment period and perform needed maintenance promptly.

3.4.2 Promotion of Plant Growth and Vigor

Water, prune, fertilize, mulch, adjust stakes, guys and turnbuckles, eradicate weeds and perform other operations necessary to promote plant growth, and vigor.

3.4.3 Planter Bed Maintenance

Planter beds must be weeded, fertilized, irrigated, kept pest free, turf free, pruned, and mulch levels maintained. Planter beds will not be allowed to encroach into turf areas. A definite break must be maintained between turf areas and planter beds. Fertilize exterior planting materials to promote healthy plant growth without encouraging excessive top foliar growth. Remove noxious weeds common to the area from planting areas by mechanical means.

3.4.3.1 Shrub Selective Maintenance

In addition to the above requirements, shrubs must be selectively pruned, and shaped for health and safety when the following conditions exist: Remove growth in front of windows, over entrance ways or walks, and any growth which will obstruct vision at street intersections or of security personnel; Remove dead, damaged or diseased branches or limbs; where shrub growth obstructs pedestrian walkways; where shrub growth is found growing

against or over structures; where shrub growth permits concealment of unauthorized persons. Dispose of all pruning debris in a proper manner.

3.4.3.2 Tree Maintenance

Tree maintenance must include adjustment of stakes, ties, guy supports, watering, fertilizing, pest control, mulching, pruning for health and safety and fall leaf cleanup. Fertilize exterior trees to promote healthy plant growth without encouraging excessive top foliar growth. Inspect and adjust stakes, ties, guy supports to avoid girdling and promote natural development. All trees within the project boundaries, regardless of caliper, must be selectively pruned for safety and health reasons. These include but are not limited to removal of dead and broken branches and correction of structural defects. Prune trees according to their natural growth characteristics leaving trees well shaped and balanced. Pruning of all trees including palm trees must be accomplished by or in the presence of a certified member of the International Society of Arboriculture and in accordance with TCIA Z133. All pruning debris generated must be disposed of in a proper manner.

3.4.4 Removal of Dying or Dead Plants

Remove dead and dying plants and provide new plants immediately upon commencement of the specified planting season, and replace stakes, mulch and eroded earth mound water basins. Provide an additional 90 day establishment period for replacement plants beyond the original warranty period. A tree must be considered dying or dead when the main leader has died back, or a minimum of 20 percent of the crown has died. A shrub or ground cover must be considered dying or dead when a minimum of 20 percent of the plant has died. This condition must be determined by scraping on a branch an area 1/16 inch square, maximum, to determine the cause for dying plant material and must provide recommendations for replacement. The Contractor must determine the cause for dying plant material and provide recommendations for replacement.

3.4.5 Tracking of Unhealthy Plants

Note plants not in healthy growing condition, as determined by the Contracting Officer, and as soon as seasonal conditions permit, remove and replace with plants of the same species and sizes as originally specified. Install replacement plantings in accordance with Section 32 93 00 EXTERIOR PLANTS.

3.4.6 Final Inspection

Final inspection will be made upon written request from the Contractor at least 10 days prior to the last day of the establishment period. Final inspection will be based upon satisfactory health and growth of plants and on the following:

3.4.6.1 Total Plants on Site

Plants have been accepted and required number of replacements have been installed.

3.4.6.2 Mulching and Weeding

Planter beds and earth mound water basins are properly mulched and free of weeds.

3.4.6.3 Tree Supports

Stakes, guys and turnbuckles are in good condition.

3.4.6.4 Remedial Work

Remedial measures directed by the Contracting Officer to ensure plant material survival and promote healthy growth have been completed.

3.4.7 Unsatisfactory Work

When work is found to not meet design intent and specifications, maintenance period will be extended at no additional cost to the Government until work has been completed, inspected and accepted by Contracting Officer.

3.5 FIELD QUALITY CONTROL

3.5.1 Maintenance Inspection Report

Provide maintenance inspection report to assure that landscape maintenance is being performed in accordance with the specifications and in the best interest of plant growth and survivability. Site observations must be documented at the start of the establishment period, then quarterly following the start, and at the end of establishment period. Submit results of site observation visits to the Contracting Officer within 7 calendar days of each site observation visit.

-- End of Section --

SECTION 32 11 23

AGGREGATE BASE COURSE
05/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C29/C29M	(2023) Standard Test Method for Bulk Density ("Unit Weight") and Voids in Aggregate
ASTM C117	(2023) Standard Test Method for Materials Finer than 75-um (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C131/C131M	(2020) Standard Test Method for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C136/C136M	(2019) Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
ASTM D75/D75M	(2019) Standard Practice for Sampling Aggregates
ASTM D1556/D1556M	(2015; E 2016) Standard Test Method for Density and Unit Weight of Soil in Place by Sand-Cone Method
ASTM D1557	(2012; E 2015) Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft3) (2700 kN-m/m3)
ASTM D2487	(2017; R 2025) Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D3665	(2012; R 2017) Standard Practice for Random Sampling of Construction Materials
ASTM D4318	(2017; E 2018) Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils
ASTM D4718/D4718M	(2015) Standard Practice for Correction of Unit Weight and Water Content for Soils Containing Oversize Particles

ASTM D4791	(2019) Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM D5821	(2013; R 2017) Standard Test Method for Determining the Percentage of Fractured Particles in Coarse Aggregate
ASTM D6938	(2017a) Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)
ASTM D7928	(2017) Standard Test Method for Particle-Size Distribution (Gradation) of Fine-Grained Soils Using the Sedimentation (Hydrometer) Analysis
ASTM E11	(2024) Standard Specification for Woven Wire Test Sieve Cloth and Test Sieves

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION (NCDOT)

NCDOT	(2024) Standard Specifications for Roads and Structures

1.2 DEFINITIONS

For the purposes of this specification, the following definitions apply.

1.2.1 Aggregate Base Course

Aggregate base course (ABC) is well graded, durable aggregate uniformly moistened and mechanically stabilized by compaction.

1.2.2 Graded-Crushed Aggregate Base Course

Graded-crushed aggregate (GCA) base course is well graded, crushed, durable aggregate uniformly moistened and mechanically stabilized by compaction.

1.2.3 Degree of Compaction

Degree of compaction required, except as noted in the second sentence, is expressed as a percentage of the maximum laboratory dry density obtained by the test procedure presented in ASTM D1557 abbreviated as a percent of laboratory maximum dry density. Since ASTM D1557 applies only to soils that have 30 percent or less by weight of their particles retained on the 3/4 inch sieve, express the degree of compaction for material having more than 30 percent by weight of their particles retained on the 3/4 inch sieve as a percentage of the laboratory maximum dry density in accordance with ASTM D1557 Method C and corrected with ASTM D4718/D4718M.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00

SUBMITTAL PROCEDURES:

SD-03 Product Data

Plant, Equipment, and Tools; G

SD-06 Test Reports

Initial Tests; G

In-Place Tests; G

Sampling And Testing; G

Field Density

1.4 QUALITY ASSURANCE

Perform sampling and testing using a laboratory approved in accordance with Section 01 45 00 QUALITY CONTROL. Do not start work requiring testing until the testing laboratory has been inspected and approved. Test the materials to establish compliance with the specified requirements and perform testing at the specified frequency. Furnish copies of test results within 24 hours of completion of the tests.

1.4.1 Sampling

Take samples for laboratory testing in conformance with ASTM D75/D75M. When deemed necessary, the sampling will be observed by the Contracting Officer.

1.4.2 Tests

Perform the following tests in conformance with the applicable standards listed:

1.4.2.1 Gradation Analysis

Perform gradation analysis in conformance with ASTM C117 and ASTM C136/C136M using sieves conforming to ASTM E11. Perform particle-size analysis of the soils in conformance with ASTM D7928.

1.4.2.2 Liquid Limit and Plasticity Index

Determine liquid limit and plasticity index in accordance with ASTM D4318.

1.4.2.3 Moisture-Density Determinations

Determine the laboratory maximum dry density and optimum moisture content in accordance with paragraph DEGREE OF COMPACTION.

1.4.2.4 Field Density Tests

Measure field density in accordance with ASTM D1556/D1556M, or ASTM D6938. For the method presented in ASTM D1556/D1556M use the base plate as shown in the drawing. For the method presented in ASTM D6938 check the calibration curves and adjust them, if necessary, using only the sand cone method as described in Annex A2 of ASTM D6938. Use ASTM D6938 to determine the moisture content of the soil. Check the calibration curves furnished

with the moisture gauges along with density calibration checks as described in ASTM D6938. Make the calibration checks of both the density and moisture gauges using the prepared containers of material method, as described in Annex A2 of ASTM D6938, on each different type of material being tested at the beginning of a job and at intervals as directed. Submit calibration curves and related test results prior to using the device or equipment being calibrated.

a. Submit certified copies of test results for approval not less than 30 days before material is required for the work.

b. Submit calibration curves and related test results prior to using the device or equipment being calibrated.

c. Submit copies of field test results within 24 hours after the tests are performed.

1.4.2.5 Wear Test

Perform wear tests on ABC course material in conformance with ASTM C131/C131M.

1.4.2.6 Flat and Elongated Pieces

Determine flat and elongated pieces on ABC course material in conformance with ASTM D4791, Method A.

1.4.2.7 Fractured Faces

Perform fractured faces test on ABC coarse aggregate in comformance with ASTM D5821.

1.4.2.8 Weight of Slag

Determine weight per cubic foot of slag in accordance with ASTM C29/C29M on the ABC course material.

1.5 ENVIRONMENTAL REQUIREMENTS

Perform construction when the atmospheric temperature is above 35 degrees F. When the temperature falls below 35 degrees F, protect all completed areas by approved methods against detrimental effects of freezing. Correct completed areas damaged by freezing, rainfall, or other weather conditions to meet specified requirements.

1.6 ACCEPTANCE

1.6.1 Tolerances

Acceptance of ABC is based on compliance with the tolerances presented in Table 1. Remove any materials found to be non-compliant and replace with compliant material or rework, as directed, to meet the requirements of this specification

TABLE 1	
Measurement	Tolerance
Grade	Plus 1/4 inch, Minus 1/2 inch
Smoothness	Plus/Minus 3/8 inch
Individual Test Total Thickness	Plus/Minus
Average Job Thickness	Plus/Minus
Compaction	Minimum 100 percent

PART 2 PRODUCTS

2.1 AGGREGATES

Provide ABC, confirming to NCDOT, Section 1005.

2.2 TESTS, INSPECTIONS, AND VERIFICATIONS

2.2.1 Initial Tests

Perform one of each of the following initial tests on the proposed material prior to commencing construction to demonstrate that the proposed material meets all specified requirements when furnished. Complete this testing for each source if materials from more than one source are proposed.

a. Gradation Analysis.

b. Liquid limit and plasticity index.

c. Moisture-density relationship.

d. Wear.

e. Flat and Elongated Pieces.

f. Fractured Faces.

g. Weight per cubic foot of Slag.

2.2.2 Approval of Material

Select the source of the material 30 days prior to the time the material will be required in the work. Tentative approval of material will be based on initial test results. Final approval of the materials will be based on sieve analysis, liquid limit, and plasticity index tests performed on samples taken from the completed and fully compacted courses.

2.3 EQUIPMENT, TOOLS, AND MACHINES

All plant, equipment, and tools used in the performance of the work are subject to approval by the Government before the work is started. Maintain all plant, equipment, and tools in satisfactory working condition at all

times. Submit a list of proposed equipment, including descriptive data. Use equipment capable of minimizing segregation, producing the required compaction, meeting grade controls, thickness control, and smoothness requirements as set forth herein.

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS

When the ABC is constructed in more than one lift, clean the previously constructed lift of loose and foreign matter by sweeping with power sweepers or power brooms. Use hand brooms in areas where power cleaning is not practicable. Provide adequate drainage during the entire period of construction to prevent water from collecting or standing on the working area.

3.2 OPERATION OF AGGREGATE SOURCES

Condition aggregate sources on private lands in accordance with local laws or authorities. Clear, strip, and excavate as required. Condition aggregate sources on Government property to readily drain and leave in a satisfactory condition upon completion of the work.

3.3 STOCKPILING MATERIAL

Clear and level storage sites prior to stockpiling of material. Stockpile all materials, including approved material available from excavation and grading, in the manner and at the locations designated. Stockpile aggregates on the cleared and leveled areas designated to prevent segregation. Stockpile materials obtained from different sources separately.

3.4 PREPARATION OF UNDERLYING COURSE

Clean the underlying course or subgrade of all foreign substances prior to constructing the base course(s). Do not construct base course(s) on underlying course or subgrade that is frozen. Construct the surface of the underlying course or subgrade to meet specified compaction and surface tolerances. Correct ruts or soft yielding spots in the underlying courses, areas having inadequate compaction, and deviations of the surface from the specified requirements set forth herein by loosening and removing soft or unsatisfactory material and adding approved material, reshaping to line and grade, and recompacting to specified density requirements. For cohesionless underlying courses or subgrades containing sands or gravels, as defined in ASTM D2487, stabilize the surface prior to placement of the base course(s). Stabilize by mixing ABC into the underlying course and compacting by approved methods. Proof roll in accordance with paragraph PROOF ROLLING. Consider the stabilized material as part of the underlying course and meet all requirements of the underlying course. Do not allow traffic or other operations to disturb the finished underlying course and maintain in a compliant condition until the base course is placed.

3.5 GRADE CONTROL

Provide a finished and completed base course conforming to the lines, grades, and cross sections shown. Place line and grade stakes as necessary for control.

3.6 MIXING AND PLACING MATERIALS

3.6.1 Mixing

Mix the coarse and fine aggregates in a stationary plant, or in a traveling plant. Make adjustments in mixing procedures or in equipment to obtain true grades, to minimize segregation or degradation, to obtain the required water content, and to produce a satisfactory base course meeting all requirements of this specification.

3.6.2 Placing

Place the mixed material on the prepared subgrade or subbase in lifts of uniform thickness with an approved spreader. Place the lifts so that when compacted they are true to the grades or levels required with the least possible surface disturbance. Where the base course is placed in more than one lift, clean the previously constructed lift of loose and foreign matter by sweeping with power sweepers, power brooms, or hand brooms. Make adjustments in placing procedures or equipment to obtain true grades, to minimize segregation and degradation, to adjust the water content, and to produce an acceptable base course.

3.7 LAYER THICKNESS

Compact the completed base course to the thickness indicated. Limit individual compacted lifts to a maximum thickness of 6 inches and a minimum thickness of 3 inches. Compact the base course(s) to a total thickness that is within the tolerances of paragraph ACCEPTANCE of the thickness indicated. Where the measured thickness is more than 1/2 inch deficient, correct such areas by scarifying, adding new material of proper gradation, reblading, and recompacting as directed. Where the measured thickness is more than 1/2 inch thicker than indicated, the course will be considered as conforming to the specified thickness requirements. However, the requirements for wearing course thickness and plan grade are still applicable. The average job thickness will be the average of all thickness measurements taken for the job and within the tolerances of paragraph ACCEPTANCE of the thickness indicated.

3.8 COMPACTION

Compact each lift of the base course, as specified, with approved compaction equipment. For cohesive soils, maintain water content during the compaction procedure to within plus or minus 2 percent of the optimum water content determined from laboratory tests as specified and for cohesionless soils, maintain the water content to facilitate compaction without bulking. Begin rolling at the outside edge of the surface and proceed to the center, overlapping on successive trips at least one-half the width of the roller. Slightly vary the length of alternate trips of the roller. Adjust speed of the roller as needed so that displacement of the aggregate does not occur. Compact mixture with hand-operated power tampers in all places not accessible to the rollers. Continue compaction until each lift is compacted through the full depth to meet the compaction requirements of Table 1. Make such adjustments in compacting or finishing procedures to obtain true grades, to minimize segregation and degradation, to reduce or increase water content, and to produce a compliant base course. Remove any materials found to be non-compliant and replace with compliant material or rework, as directed, to meet the requirements of this specification.

3.9 PROOF ROLLING

In addition to the compaction specified, proof roll areas designated on the drawings by application of two (2) coverages of a heavy pneumatic-tired roller having four or more tires abreast, each tire loaded to a minimum of 30,000 pounds and inflated to a minimum of 125 psi. A coverage is defined as the application of one tire print over the designated area. In the areas designated, apply proof rolling to the top of the underlying material on which the base course is laid and to the top of each layer of base course. Maintain water content of the underlying material and each lift of the base course as specified in Paragraph COMPACTION from start of compaction to completion of proof rolling of that lift. Remove any base course materials or any underlying materials that produce permanent deformation exceeding 3/8 inch by proof rolling and replace with satisfactory materials. Then recompact and proof roll to meet these specifications.

3.10 EDGES OF BASE COURSE

Place the base course(s) so that the completed section is a minimum of one-half foot wider, on all sides, than the next lift that will be placed above it. Place approved material along the outer edges of the base course in sufficient quantity to compact to the thickness of the course being constructed. When the course is being constructed in two or more lifts, simultaneously roll and compact at least a 2 foot width of this shoulder material with the rolling and compacting of each lift of the base course.

3.11 FINISHING

Finish the surface of the top lift of base course after final compaction and proof rolling by cutting any overbuild to grade and rolling with a steel-wheeled roller. Do not add thin lifts of material to the top lift of base course to meet grade. If the elevation of the top lift of base course exceeds the tolerances of paragraph ACCEPTANCE, scarify the top lift to a depth of at least 3 inches and blend new material in and compactedand proof rolled to bring to grade. Make adjustments to rolling and finishing procedures to minimize segregation and degradation, obtain grades, maintain moisture content, and produce an acceptable base course. If the surface become rough, corrugated, uneven in texture, or traffic marked prior to completion, scarify the non-compliant portion and rework and recompact it or replace as directed.

3.12 SMOOTHNESS TEST

Construct the top lift so that the surface shows no deviations exceeding the tolerances of paragraph ACCEPTANCE when tested with a 12 foot straightedge. Test the entire area in both a longitudinal and a transverse direction on parallel lines. Perform the transverse lines at a maximum spacing of 15 feet or less apart, as directed. Perform the longitudinal lines at the centerline of each placement lane, regardless of whether multiple lanes are allowed to be paved at the same time, and at the 1/8th point in from each side of the lane. Hold the straightedge in contact with the surface and moved ahead one-half the length of the straightedge for each successive measurement. Determine the amount of surface irregularity by placing the freestanding (unleveled) straightedge on the pavement surface and measuring the maximum gap between the straightedge and the pavement surface. Determine measurements along the entire length of the straight edge. Correct deviations exceeding this

amount by removing material and replacing with new material, or by reworking existing material and compacting it to meet these specifications.

3.13 FIELD QUALITY CONTROL

3.13.1 In-Place Tests

Perform each of the following in-place tests on samples taken from the placed and compacted ABC. Determine sample locations using random sampling in accordance with ASTM D3665. Take samples and test at the rates indicated.

a. Perform density tests on every lift of material placed and at a frequency of one set of tests for every 250 square yards, or portion thereof, of completed area. Gradations containing more than 30 percent retained on the ¾ inch sieve can produce inconsistent compacted density values when tested in accordance with paragraph DEGREE OF COMPACTION.

b. Perform gradation analysis on every lift of material placed and at a frequency of one sieve analysis for every 500 square yards, or portion thereof, of material placed.

c. Perform liquid limit and plasticity index tests at the same frequency as the sieve analysis.

d. Measure the thickness of the base course at intervals providing at least one measurement for each 500 square yards of base course or part thereof. Measure the thickness using test holes, at least 3 inch in diameter through the base course.

3.13.2 Approval of Material

Final approval of the materials will be based on tests for gradation, liquid limit, and plasticity index performed on samples taken from the completed and fully compacted course(s).

3.14 TRAFFIC

Do not allow traffic on the completed base course.

3.15 MAINTENANCE

Maintain the base course in a satisfactory condition until the full pavement section is completed and accepted. Immediately repair any defects and repeat repairs as often as necessary to keep the area intact. Retest any base course that was not paved over prior to the onset of winter to verify that it still complies with the requirements of this specification. Rework or replace any area of base course that is damaged as necessary to comply with this specification.

3.16 DISPOSAL OF UNSATISFACTORY MATERIALS

Dispose of any unsuitable materials that have been removed outside the limits of Government-controlled land. No additional payments will be made for materials that have to be replaced.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 32 11 26

HOT-MIX BITUMINOUS BASE COURSE FOR ROADS AND STREETS
05/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 156	(2013; R 2017) Standard Specification for Requirements for Mixing Plants for Hot-Mixed, Hot-Laid Bituminous Paving Mixtures

ASPHALT INSTITUTE (AI)

AI MS-2	(2015) Asphalt Mix Design Methods

ASTM INTERNATIONAL (ASTM)

ASTM C183/C183M	(2025) Standard Practice for Sampling and the Amount of Testing of Hydraulic Cement
ASTM D75/D75M	(2019) Standard Practice for Sampling Aggregates
ASTM D140/D140M	(2016) Standard Practice for Sampling Asphalt Materials
ASTM D1856	(2009; R 2015) Recovery of Asphalt from Solution by Abson Method
ASTM D2041/D2041M	(2011) Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
ASTM D2172/D2172M	(2017; E 2018) Standard Test Methods for Quantitative Extraction of Asphalt Binder from Asphalt Mixtures
ASTM D2726/D2726M	(2019) Standard Test Method for Bulk Specific Gravity and Density of Non-Absorptive Compacted Bituminous Mixtures
ASTM D3665	(2012; R 2017) Standard Practice for Random Sampling of Construction Materials
ASTM D3666	(2016) Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION (NCDOT)

NCDOT	(2024) Standard Specifications for Roads and Structures

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Sources of Aggregates

Job Mix Formula; G

SD-06 Test Reports

Sources of Aggregates

Bituminous Materials

Test Section; G

Service Record; G

SD-09 Manufacturer's Field Reports

Batch Tickets

1.3 QUALITY CONTROL

1.3.1 Qualifications

Perform sampling and testing using an approved commercial testing laboratory or on-site facilities. Submit accreditation of the commercial laboratory by an independent evaluation authority, indicating conformance to ASTM D3666, including all applicable test procedures. Do not start work requiring testing until the facilities have been inspected and approved. Schedule and provide payment for laboratory inspections. Additional payment or a time extension due to failure to acquire the required laboratory validation is not allowed. Maintain this certification for the duration of the project.

1.3.2 Test Results

Verify that materials comply with the specification. When a material source is changed, test the new material for compliance. When deficiencies are found, repeat the initial analysis and retest the material already placed to determine the extent of unacceptable material. Replace or repair all in-place unacceptable material to conform to the contract requirements. Submit copies of field tests results within 24 hours after the tests are performed and certified copies of tests results for approval not less than 30 days before material is required for the work.

1.3.3 Batch Tickets

Provide batch tickets in accordance with AASHTO M 156.

1.3.4 Aggregates

Select sources of aggregates and submit a plan for operation of a new source of aggregates at least 45 days in advance of starting production. If a previously developed source is selected, submit test results with evidence that central plant hot-mix bituminous pavements constructed with the aggregates have had a satisfactory service record of at least 5 years under similar climatic conditions. Include in the service record a tabulation of aggregate gradation and quality test results, typical hot-mix asphalt mix design using the aggregate, and a list of representative paving projects using the aggregate. Make such tests and other investigations as necessary to determine whether or not aggregates meeting the requirements specified can be produced from the proposed sources. Sample aggregates in accordance with ASTM D75/D75M and test them at the start of production.

1.3.5 Mineral Filler

Sample mineral filler in accordance with ASTM C183/C183M.

1.3.6 Bituminous Materials

Select sources where bituminous materials are obtained in advance of time when materials will be required in the work. Sample bituminous materials in accordance with ASTM D140/D140M. Submit test results not less than 30 days before such material is required for use in the work.

1.4 ENVIRONMENTAL REQUIREMENTS

Do not construct bituminous courses when the underlying course contains free surface water, or when temperature of the surface of the underlying course is below 40 degrees F, unless otherwise directed.

1.5 ACCEPTANCE

1.5.1 Tolerances

Acceptance of bituminous base course is based on compliance with the tolerances presented in Table 1. Remove and replace bituminous base course represented by the failing tests or submit repair plan for approval.

TABLE 1	
Attribute	Measurement
Plant Mixture	
Delivery to Laydown Machine	Minimum 250 deg F
Laboratory Air Voids	3 to 5 percent
Finished Mat	

TABLE 1	
Mat Density (avg of 4 cores/lot)	Minimum 92 percent of TMD
Joint Density (avg of 4 cores/lot)	Minimum 90.5 percent of TMD
Grade	plus/minus 0.05 foot
Smoothness	plus/minus 3/8 inch
Longitudinal Joint Offset	Minimum 1 foot
Transverse Joint Offset	Minimum

PART 2 PRODUCTS

2.1 AGGREGATES

Provide aggregates consisting of crushed stone, crushed slag, crushed gravel screenings, sand, and mineral filler, as required. Provide in accordance with NCDOT, Section 1012.

2.2 BITUMINOUS MATERIALS

2.2.1 Asphalt Cement

Provide asphalt cement binder conforming to NCDOT, Section 1020.

2.3 COMPOSITION OF MIXTURE

2.3.1 Job-Mix Formula (JMF)

2.3.1.1 Develop the JMF

Provide an asphalt mix composed of a mixture of well-graded aggregate, mineral filler if required, and asphalt binder. Size the aggregate fractions, handle in separate size groups, and combine in such proportions that the resulting mixture meets the grading requirements of Table 2. Submit proposed JMF; do not produce hot-mix asphalt for payment until a JMF has been approved.

2.3.1.1.1 Binder Course

NCDOT, materials for the construction of the binder course shall be Type I-19.0C.

2.3.1.1.2 Surface Course

NCDOT, materails for construction of the surface course shall be Type S-9.5C.

2.3.2 JMF Requirements

Submit in writing the job mix formula for approval at least 30 days prior to the start of the test section including as a minimum:

a. Percent passing each sieve size.

b. Percent of asphalt binder.

c. Percent of each aggregate and mineral filler to be used.

d. Asphalt performance grade.

e. Number of blows of hand-held hammer per side of molded specimen. (NA for Superpave)

f. Number of gyrations of Superpave gyratory compactor, (NA for Marshall mix design)

g. Laboratory mixing temperature.

h. Lab compaction temperature.

i. Temperature-viscosity relationship of the asphalt cement.

j. Plot of the combined gradation on the 0.45 power gradation chart, stating the nominal maximum size.

k. Graphical plots of stability (NA for Superpave), flow (NA for Superpave), air voids, voids in the mineral aggregate, and unit weight versus asphalt content as shown in AI MS-2.

l. Specific gravity and absorption of each aggregate.

m. Percent natural sand.

n. Percent particles with 2 or more fractured faces (in coarse aggregate).

o. Fine aggregate angularity.

p. Percent flat or elongated particles (in coarse aggregate).

q. Tensile Strength Ratio(TSR).

r. Antistrip agent (if required) and amount.

s. List of all modifiers and amount.

t. Correlation of hand-held hammer with mechanical hammer (NA for Superpave).

u. Percentage and properties (asphalt content, binder properties, and aggregate properties) of reclaimed asphalt pavement (RAP) in accordance with paragraph RECYCLED HOT-MIX ASPHALT, if RAP is used.

2.3.2.1 Adjustment to JMF

The JMF for each mixture is in effect until a new formula is approved in writing. Should a change in sources of any materials be made, perform a new mix design and obtain approval before the new material is used. Make minor adjustments within the specification limits to the JMF to optimize

mix volumetric properties. Adjustments to the original JMF are limited to plus or minus 4 percent on the No. 4 and coarser sieves; plus or minus 3 percent on the No. 8 to No. 50 sieves; and plus or minus 1 percent on the No. 100 sieve. Adjustments to the JMF are limited to plus or minus 1.0 percent on the No. 200 sieve. Asphalt content adjustments are limited to plus or minus 0.40 from the original JMF. If adjustments are needed that exceed these limits, develop a new mix design.

2.4 EQUIPMENT, TOOLS, AND MACHINES

2.4.1 Bituminous Plant

Provide a bituminous plant of such capacity to produce the quantities of bituminous mixtures required for the project within the completion time of the contract. Provide hauling equipment, paving machines, rollers, miscellaneous equipment, and tools in sufficient numbers and capacity and in proper working condition to place the bituminous paving mixtures at a rate equal to the plant output. Provide a sufficient number of adequately trained personnel during paving operations to produce a pavement meeting the requirements in this specification.

2.4.2 Mixing Plants

Provide mixing plants in accordance with AASHTO M 156 which are automatic or semiautomatic controlled, commercially manufactured units designed, coordinated, and operated to consistently produce a mixture within the job-mix formula (JMF). Prequalify drum or batch mixers at the production rate to be used during actual mix production. The prequalification tests include extraction in accordance with ASTM D2172/D2172M and recovery of the asphalt binder in accordance with ASTM D1856.

2.4.3 Asphalt Paver

Provide asphalt pavers which are self-propelled, with an activated screed, heated as necessary, and capable of spreading and finishing courses of hot-mix asphalt which will meet the specified thickness, smoothness, and grade, with sufficient power to propel itself and the hauling equipment without adversely affecting the finished surface. Provide a receiving hopper of sufficient capacity to permit a uniform spreading operation and equipped with a distribution system to place the mixture uniformly in front of the screed without segregation and produce a finished surface of the required evenness and texture without tearing, shoving, or gouging the mixture. If screed extensions are used to increase the paving width, provide auger extensions to distribute the hot mix along the additional screed length. Equip the paver with a control system capable of automatically maintaining the specified screed elevation. Automatically actuate the control system from either a reference line and/or through a system of mechanical sensors or sensor-directed mechanisms or devices which will maintain the paver screed at a predetermined transverse slope and at the proper elevation to obtain the required surface.

2.4.4 Hauling Equipment

Provide trucks for hauling hot-mix asphalt having tight, clean, and smooth metal beds. To prevent the mixture from adhering to them, lightly coat the truck beds with a release agent specifically designed for use with hot mix asphalt. Provide each truck with a suitable cover to protect the mixture from adverse weather. When necessary to maintain the mixture at the specified temperature, insulate or heat truck beds and securely fasten

covers (tarps).

2.4.5 Rollers

Provide the number, type, and weight of rollers sufficient to compact the mixture to the required density while it is still in a workable condition. Do not use equipment which causes excessive crushing of the aggregate or displacement of the asphalt mixture.

2.4.6 Straightedge

Furnish and maintain at the site, in good condition, one 12 foot straightedge for each bituminous paver for use in testing the finished surface. Construct straightedges of aluminum with blades of box or box-girder cross section and a flat bottom reinforced to insure rigidity and accuracy. Provide handles to facilitate movement on pavement.

PART 3 EXECUTION

3.1 CONDITIONING OF UNDERLYING COURSE

Prior to placing the bituminous base course, clean the underlying surface of foreign or objectionable matter.

3.2 TRANSPORTATION OF BITUMINOUS MIXTURE

Transport the bituminous mixture from the paving plant to the site in trucks having tight, clean, smooth beds lightly coated with an approved release agent to prevent adhesion of mixture to truck bodies. Drain excessive release agent prior to loading. Cover each load with canvas or other approved material of ample size to protect mixture from weather and prevent loss of heat. Reject loads that have crusts of cold, unworkable material or have become wet by rain. Do not haul over freshly placed material.

3.3 PLACING

Do not place bituminous mixtures without ample time to complete placement and compaction during daylight hours, unless artificial lighting is provided.

3.3.1 Offsetting Joints in Bituminous Base Course

Place the bituminous base course so that longitudinal joints are offset from joints in the underlying course by at least 1 foot. Offset transverse joints by at least 2 feet from transverse joints in the underlying course.

3.3.2 Use of Laydown Machine

Reject mixtures having temperatures less than 250 degrees F when delivered to the laydown machine. Adjust the laydown machine and regulate the speed so that the surface of the course being laid will be smooth and continuous without tears and pulls, and of such depth that, when compacted, the surface conforms to the cross section, grade, and contour indicated. Begin placement of the mixture along the centerline of a crowned section or on the high side of areas with a one-way slope. Place the mixture as nearly continuous as possible, and adjust the speed of placing to permit proper compaction. When segregation occurs in the mixture during placing,

suspend the laydown operation until the cause is determined and corrected. Correct irregularities in alignment of the course left by the laydown machine by trimming directly behind machine. Immediately after trimming, thoroughly compact the edges of the course by tamping laterally with a lute. Do not permit distortion of the course during tamping.

3.3.3 Placing Strips Succeeding Initial Strips

In placing each succeeding strip after the initial strip has been spread and compacted as specified below, overlap the screed of the laydown machine 1/2 to 1 inch over the previously placed strip and sufficiently high so that compaction will produce a smooth, dense joint. Use a lute to push back the mixture placed on the edge of the previously placed strip to the edge of the strip being placed. Do not broadcast material onto the mat. Remove and waste excess mixture.

3.3.4 Hand Spreading in Lieu of Machine Spreading

In areas where the use of machine spreading is impractical, spread the mixture by hand. Prevent segregation during spreading. Do not broadcast material onto the mat. Remove and waste excess mixture. Maintain grade and smoothness tolerances presented in Table 1.

3.4 COMPACTION OF MIXTURE

Begin compaction as soon after placing as the mixture will bear roller without undue displacement. Do not permit delays in compacting the freshly placed mixture. After the initial rolling, perform preliminary tests of the crown, grade, and smoothness. Correct deficiencies so that the finished course will conform to requirements for the grade and smoothness specified in subpart: ACCEPTANCE. After meeting crown, grade, and smoothness requirements, continue rolling until a mat density of at least 92 percent of the theoretical maximum density (TMD) determined in accordance with ASTM D2041/D2041M is obtained. Roll the joints until until a joint density of at least 90.5 percent of the theoretical maximum density (TMD) determined in accordance with ASTM D2041/D2041M is obtained. Thoroughly compact areas inaccessible to rollers with hot hand tampers.

3.4.1 Correcting Deficient Areas

Remove mixtures that become contaminated or are defective. Do not permit skin patching of an area that has been rolled. Cut holes the full thickness of the base course so that the sides are perpendicular and parallel to the direction of traffic and the edges are vertical. Spray sides with tack coat. Place hot mix asphalt in the holes in sufficient quantity so that the finished surface will conform to grade, smoothness, and density requirements.

3.5 JOINTS

3.5.1 General

Carefully construct joints between old and new pavements or between successive day's work or joints that have become cold to establish a continuous bond between old and new sections of the course. Construct joints having the same texture, density, and smoothness as other sections of the course. Clean contact surfaces of previously constructed pavements that have become coated with dust, sand, or other objectionable material

by brushing or cut back with approved power saw, as approved. Spray the surface against which new material is placed with a thin, uniform coat of tack coat. Apply the material far enough in advance of placement of the fresh mixture to insure adequate curing. Take care to prevent damage or contamination of sprayed surface.

3.5.2 Transverse Joints

Pass the roller over the unprotected end of freshly placed mixture only when placing of the course is discontinued or when delivery of the mixture is interrupted to the extent that the unrolled material may become cold. In all cases, cut back the edge of the previously placed course a mimimum of 2 inches to expose an even, straight, vertical surface for the full thickness of the course. In continuing placement of the strip, position the mechanical spreader on the transverse joint so that sufficient hot mixture will be spread to obtain a joint after rolling that conforms to the required density and smoothness specified herein.

3.5.3 Longitudinal Joints

Cut back edges of a previously placed strip that have cooled or are irregular, honeycombed, poorly compacted, damaged, or otherwise defective. In all cases, cut back the edge of the previously placed course a mimimum of 2 inches to expose an even, straight, vertical surface for the full thickness of the course.

3.6 EDGES OF PAVEMENT

Neatly trim outside edges adjacent to shoulders.

3.7 QUALITY CONTROL

Perform tests in sufficient numbers and at the locations and times directed to ensure that materials, mixtures and compaction meet specified requirements. Obtain samples of finished pavement, including samples that span the longitudinal joint. Sample bituminous materials during construction when shipments of bituminous materials are received or when necessary to assure that some condition of handling or storage has not been detrimental to the bituminous material.

3.7.1 Sampling

Obtain plant mix and in-place samples on a lot and sublot basis. Each full day's production or a maximum of 1000 tons is considered a lot. Divide the lot into four (4) equal sublots and obtain random samples in accordance with ASTM D3665 within each sublot. Obtain plant mix samples from the haul truck or from behind the paver. Test for grade and smoothness on a total lot basis.

3.7.2 In-Place Density

Take one random core (4 inches or larger in diameter) from the mat (interior of the lane) of each sublot, and one random core from the joint (immediately over joint) of each sublot, with each random core the full thickness of the layer being placed. When the random core is less than 1 inch thick, do not include in the analysis. In this case, take another random core. After air drying to a constant weight, determine the density of each core in accordance with ASTM D2726/D2726M. Determine percent compaction using the TMD. Evaluate for acceptance in accordance with

subpart: ACCEPTANCE. Remove and replace unacceptible lots.

3.7.3 Laboratory Air Voids and Theoretical Maximum Density

Calculate laboratory air voids by determining the bulk density of each lab compacted specimen using the laboratory-prepared, thoroughly dry method of ASTM D2726/D2726M and determining the theoretical maximum density of each sublot sample using ASTM D2041/D2041M. Use the latest theoretical maximum density value to calculate the laboratory air voids for each sublot. Evaluate for acceptance in accordance with subpart: ACCEPTANCE. Complete and report all laboratory air void tests within 24 hours after completion of construction of each lot.

3.7.4 Plan Grade

Provide finished surfaces conforming, within tolerances specified, to the lines, grades, and cross sections indicated. Do not permit finished surfaces to vary more than the tolerances provided in subpart: ACCEPTANCE from the plan gradeline and elevation established and approved at the site. Maintain finished surfaces flush with finished surfaces of abutting pavements. Do not permit deviations from the plan gradeline and elevation in areas of pavements where closer conformance with plan grade and elevation is required for the proper functioning of drainage and other appurtenant structures involved.

3.7.5 Surface Smoothness

Provide finished surfaces not deviating from the testing edge of a straightedge more than the tolerances of subpart: ACCEPTANCE in any direction.

3.7.6 Temperatures

Check temperatures at least four times per lot, at necessary locations, to determine the temperature at the dryer, the asphalt cement in the storage tank, the asphalt mixture at the plant, and the asphalt mixture at the job site.

3.8 PROTECTION OF PAVEMENT

After final rolling of the pavement, do not permit vehicular traffic of any kind until the pavement has cooled to ambient temperature.

-- End of Section --

SECTION 32 17 23.16

ROAD AND PARKING LOT PAVEMENT MARKINGS
11/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D4414	(1995; R 2020) Standard Practice for Measurement of Wet Film Thickness by Notch Gages

MASTER PAINTERS INSTITUTE (MPI)

MPI 97	(2012) Traffic Marking Paint, Latex

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)

SAE AMS-STD-595A	(2017) Colors used in Government Procurement

U.S. FEDERAL HIGHWAY ADMINISTRATION (FHWA)

MUTCD	(2023) Manual on Uniform Traffic Control Devices

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FS TT-P-1952	(2015; Rev F; Notice 1) Paint, Traffic and Airfield Markings, Waterborne

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Quality Control Plan; G

Qualifications; G

Safety Data Sheets For Each Paint Type; G

Safety Data Sheets For Chemicals Used In Surface Preparation; G

Data Sheets For Paint Removal Equipment; G

Surface Preparation Equipment List; G

Marking Applications Equipment List; G

SD-03 Product Data

Manufacturer Data Sheets for all Marking Materials; G

SD-06 Test Reports

Marking Application Wet Film Thickness Test; G

SD-07 Certificates

Manufacturer Certificate of Compliance for Marking Materials; G

Manufacturer Certificate of Conformance for Volatile Organic Compliance; G

SD-08 Manufacturer's Instructions

Marking Materials Storage and Application; G

Chemicals Used in Surface Preparation; G

1.3 QUALITY CONTROL

1.3.1 Quality Control Plan

Within 10 calendar days of project award, submit a quality control plan. The plan must state the means, methods, equipment, and materials to be employed for the performance of the surface preparation, existing markings removal, application of reflective and non-reflective marking, and marking layout. At a minimum, provide descriptive criteria for each of the following activities for review and approval by the Contracting Officer:

a. Describe the means and methods used to layout marking geometry and the location of marking elements.

b. Describe the protocol for determination of the operating pressure and speed of the equipment for surface preparation.

c. Describe the protocol for surface preparation when not using water.

d. Describe the protocol for existing markings removal.

e. Define the protocol for the performance of test stripes for each line width, color, and paint type.

f. Provide equipment details to include speed, pressures and application rate for the minimum wet film thickness and the application rate of reflective media to provide the specified glass bead anchoring and reflectivity.

g. Provide and discuss safety directives for maintaining traffic on roads and parking lots.

h. Define communications procedures when operating on roads and parking lots.

1.3.2 Qualifications

Submit documentation certifying that pertinent personnel are qualified for equipment operation and handling of applicable chemicals. The documentation should include experience on five projects of similar size and scope with references for all personnel.

1.3.3 Qualifications For Roads and Parking Marking Personnel

Submit documentation of qualifications in resume format a minimum of 14 days before pavement marking work is to be performed showing personnel who will be performing the work have experience working on airfields, operating mobile self-powered marking, cleaning, and paint removal equipment and performing these tasks. Include with their resume a list of references complete with points of contact and telephone numbers. Provide certification for pavement marking machine operator and Foreman demonstrating experience successfully completing a minimum of two airfield pavement marking projects of similar size and scope. Provide documentation demonstrating personnel have a minimum of four years of experience operating similar equipment and performing the same or similar work in similar environments, similar in size and scope of the planned project. The Contracting Officer reserves the right to require additional proof of competency or to reject proposed personnel.

1.4 DELIVERY, STORAGE, AND HANDLING

Provide a conditioned storage and staging area located off the installation for all materials intended to be used on the project. Ensure all materials delivered to the storage location are in the original container and clearly marked with the product name, compliance information, batch number, color, manufactured date, instructions for storage, instructions for application, and the name of the manufacturer. All materials are to be stored in conformance with the manufacturer instructions. Provide manufacturer instructions for; marking materials storage and application, and the chemicals used in surface preparation.

1.5 PROJECT/SITE SPECIAL CONDITIONS

1.5.1 Environmental Requirements

Pavement surface must be free of snow, ice, or slush; with a surface temperature of at least 40 degrees F and rising at the beginning of operations, except those involving shot blasting or grinding. Cease operation during thunderstorms, or during rainfall, except for water blasting and removal of previously applied chemicals. Cease water blasting where surface water accumulation alters the effectiveness of material removal.

1.5.1.1 Weather Limitations for Marking Application

Apply pavement markings to clean, dry surfaces and only when the ambient temperature is at least 5 degrees F above the dew point and the pavement surface temperatures are within the limits recommended by the manufacturer of the material being used unless otherwise noted. Allow the pavement surface to dry after the water has been used for surface preparation or after a precipitation event. Do not perform marking applications when the wind carries overspray onto locations adjacent to the marking. Provide wind screens to shroud application equipment.

1.5.1.2 Testing Dry Surfaces

Do not commence marking until the pavement surface is dry. Use the plastic wrap method as described in paragraph PRE-APPLICATION TESTING to test the pavement surface for moisture. Do not proceed with marking until the Contracting Officer has observed the moisture test and has accepted the area prepared for marking.

1.5.1.3 Volatile Organic Compounds Compliance

Submit a manufacturer certificate stating that the proposed pavement marking paint meets the Volatile Organic Compound (VOC) regulations of the local Air Pollution Control District having jurisdiction over the geographical area in which the project is located. Submit manufacturer certificate of conformance for volatile organic compliance.

1.5.2 Traffic Control for Roads and Parking Lots

Place approved signs conforming to MUTCD near the beginning of the worksite and well ahead of the worksite to alert approaching traffic from both directions. Place markers along newly painted lines to control traffic and prevent damage to newly painted surfaces. Mark painting equipment with warning signs that can be read from a distance of 100 feet, indicating slow-moving painting equipment in operation. Provide all lighting and equipment necessary to light the work area during night operations effectively.

When traffic is rerouted or controlled to accomplish the work, provide necessary warning signs, flag persons, and related equipment for the safe passage of vehicles.

1.6 APPLICATION EQUIPMENT CALIBRATION

Before performing any marking application, calibrate the paint and glass bead application equipment at the necessary speed to execute the application. Calibration and application will be performed using paint that is not diluted or thinned. Paint will be used as formulated by the manufacturer. Calibrate paint and bead guns for each line width and color intended to be applied. Use metal coupons placed in the path of the equipment to capture a test line without glass beads. Use a wet film gauge in accordance with ASTM D4414, to determine if the wet film thickness is the same at each edge and at the center of the marking. Adjust each paint gun to provide a line of uniform thickness.

Collect a sample of glass beads directly from the glass bead dispenser along a measured distance. Weigh the glass beads captured and determine the coverage by dividing the weight by the area of the line placed during the calibration. Adjust the glass bead dispenser to provide an application rate necessary to meet or exceed the reflectivity specified. After determining the application rate, apply a reflective marking using the wet film thickness to be used for the color and marking element. Using a magnifying glass, examine the distribution and embedment of the glass beads. Beads are to be distributed uniformly for the width of the marking. Adjust the wet film thickness if the beads are submerged or predominantly on the surface of the marking.

PART 2 PRODUCTS

2.1 EQUIPMENT

Submit a surface preparation equipment list by serial number, type, model, and manufacturer. Include descriptive data indicating area of coverage per pass, pressure adjustment range, tank and flow capacities, and safety precautions required for the equipment operation. Mobile equipment must allow for removal of markings without damaging the pavement surface or joint sealant. Maintain machines, tools, and equipment used in the performance of the work in satisfactory operating condition.

2.1.1 Surface Preparation and Paint Removal for Roads and Parking Lots

Submit data sheets for paint removal equipment intended for use in preparation of the pavement surface for marking. In the submittal, include descriptive information on the means for adjusting coverage per each pass, water pressure adjustment range, and tank and flow capacities. The equipment must have a range of adjustments that will provide a clean surface free of dirt, dust, oil, grease, algae, mildew, mold, and loose paint. When preparing new portland cement concrete for marking, provide equipment capable of removing curing compounds without damage to the concrete surface and joint seal materials. Submit safety data sheets for chemicals used in surface preparation. Chemicals must be bio-degradable.

2.1.1.1 Water Blasting Equipment

Use mobile water blasting equipment capable of producing a pressurized stream of water that effectively removes paint from the pavement surface without significantly damaging the pavement. Provide equipment, tools, and machinery which are safe and in good working order.

2.1.1.2 Shot Blasting Equipment

Use mobile self-propelled shot blasting equipment capable of producing an adjustable depth of paint removal and propelling abrasive particles at high velocities on the paint for effective removal. Ensure each unit is self-cleaning and self-contained. Use equipment able to confine the abrasive, any dust that is produced, and removed paint and is capable of recycling the abrasive for reuse.

2.1.1.3 Grinding or Scarifying Equipment

Use equipment capable of removing surface contaminates, paint build-up, or extraneous markings from the pavement surface without leaving any residue. Clean the surface by a hydro blast to remove surface contaminants, and ash after a weed torch is used to remove paint.

2.1.1.4 Chemical Removal Equipment

Use chemical equipment capable of applying and removing chemicals and paint from the pavement surface, leaving only non-toxic biodegradable residue without scarring or other damage to the pavement or joints and joint seals.

2.1.2 Markings Application Equipment

Submit a marking applications equipment list of equipment appropriate for the material(s) to be used. Include the manufacturer's descriptive data

and certification for the planned use that indicates the area of coverage per pass, pressure adjustment range, tank and flow capacities, and all safety precautions required for operating and maintaining the equipment. Provide and maintain machines, tools, and equipment used in the performance of the work in satisfactory operating condition, or remove equipment that is not providing satisfactory performance from the work site. Provide mobile and maneuverable application equipment to the extent that straight lines can be followed and normal curves can be made in a true arc.

2.1.2.1 Airless or Atomizing Equipment

Provide mobile airless or pneumatic air-atomized application equipment that is maneuverable to the extent that straight lines can be followed and normal curves can be made in a true arc. Mount equipment on trucks, skids or tractors. Use equipment suitable for application of the marking material specified. Airless systems are used to apply waterborne and epoxy coatings. Pneumatic systems are used only to apply waterborne and solvent based coatings.

Provide equipment capable of applying a marking from 4 inches to 12 inches wide in a single pass and also capable of applying two single solid or intermittent lines using a minimum of two colors. Provide equipment with tanks or reservoirs equipped with mechanical agitators, pressure regulators, and gages in full view of the equipment operator. Use paint strainers suitable to screen paint flowing in all supply lines.

2.1.2.2 Hand-Operated Machines

Provide a hand-operated push-type applicator machine commonly used for the application of water-based paint or two-component, chemically curing paint, thermoplastic, or preformed tape to pavement surfaces for small marking projects, such as legends and cross-walks, parking lots, or surface painted signs. Provide an applicator machine with the necessary tanks and spraying nozzles capable of applying paint uniformly at specified wet film thickness. Provide spray guns for hand application of paint in areas where push-type machines cannot be used.

2.2 ROAD AND PARKING LOT MATERIALS

Submit safety data sheets for each paint type as well as manufacturer data sheets for all marking materials; include with the submittal a manufacturer certificate of compliance for marking materials.

2.2.1 Marking Colors

Provide markings for pavements that conform to SAE AMS-STD-595A color numbers as listed in Table I.

Table I - SAE AMS-STD-595A Color Numbers

Paint Color	SAE AMS-STD-595A Color Number
White	37925
Yellow	33538

Table I - SAE AMS-STD-595A Color Numbers	
Paint Color	SAE AMS-STD-595A Color Number
Black	37038
Green	34108
Red	33411

2.2.2 Waterborne Paint

Use FS TT-P-1952, Type I or II paint.Use MPI 97 paint.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Clean surfaces before the application of marking materials. Remove all dust, dirt, scaling or loose paint, algae, oils, and grease and mineral deposits such as iron stains by use of water blasting or chemical removal. Follow the cleaning with sweeping, blowing or using water rinse. Do not begin painting in any location prepared for marking until surfaces are dry and clean.

Scrub areas with oil or grease present with applications of trisodium phosphate solution or other approved detergent or degreaser. Rinse thoroughly after each application to prevent staining of the new marking. After cleaning oil-soaked areas, seal with shellac or primer as the manufacturer recommends to prevent bleeding through the new paint.

3.2 PRE-APPLICATION TESTING

Test the pavement surface for moisture before beginning pavement marking after each period of rainfall, fog, high humidity, or cleaning or when the ambient temperature has fallen below the dew point. Do not commence marking until the pavement is sufficiently dry and the Contracting Officer has approved the pavement condition.

Employ the plastic wrap method, described as follows, to test the pavement for moisture:

a. Cover the pavement with a 12 inch by 12 inch section of clear plastic wrap and seal the edges with tape.

b. After 15 minutes, examine the plastic wrap for any visible moisture accumulation. Do not begin marking operations until the test can be performed with no visible moisture accumulation inside the plastic wrap.

c. Re-test surfaces when work has been stopped due to a precipitation event.

3.3 MARKINGS APPLICATION

3.3.1 Marking Materials for Roads and Parking Lots Pavement

3.3.1.1 Waterborne Paint

The dilution or thinning of paint prior to application is not allowed.

Provide FS TT-P-1952waterborne paint. Apply non-reflective markings in accordance with Table III.

The paint wet film thickness is provided in Table III.

Table III. Paint Wet Film Thickness Rate	
Paint Type	Non-Reflectorized Marking Wet Film Thickness (mil)
Type I	14-16
Type II	14-16
Type III	16-20

3.4 FIELD QUALITY CONTROL AND ACCEPTANCE

3.4.1 Material Inspection

The Contractor is responsible for examining all materials accepted for delivery for compliance with the certificate of compliance.

3.4.2 Dimensional Tolerance

The Contractor applies layout markings. All layout markings are placed before the marking material application. The edges of a line must not vary from a straight line drawn between the beginning and end of the line more than 1/2-inch to 50 feet. Marking dimensions and spacing must be within the tolerances provided in Table IV.

TABLE IV - Dimensional Tolerance for Marking Elements	
Dimension and Spacing	Tolerance
12 inch or less	+/- 1/2 inch
Greater than 36 inch to 6 feet	+/- 1 inch
Greater than 6 feet to 60 feet	+/- 2 inch
Greater than 60 feet	+/- 3 inch

3.4.3 Coating Application Reporting

3.4.3.1 Reporting Wet Film Thickness

Submit documentation on the wet film thickness for each marking element. Provide a reading at the rate of one reading per 1000 linear feet of line marking. A reading is the average of 10 measurements at random locations within the marking element area. Submit the results of the marking application wet film thickness test to the Contracting Officer before proceeding with work on the project.

3.4.3.2 Wet Film Thickness

Conduct a marking application wet film thickness test. Provide a wet film thickness gauge to measure the wet film thickness using ASTM D4414 at the edge(s) and one interior location of the marking. When more than 3 in 10 consecutive measurements of wet film thickness are outside of the tolerances in Table III, remove and replace areas not meeting the wet film thickness requirement.

3.5 CLEANUP AND WASTE DISPOSAL

The worksite and the material staging area must be free of debris, dirt, and items that will blow away during periods of elevated wind speeds. Dispose of all materials at a site approved by the Contracting Officer. Dispose of waste from cleaning the marking equipment at a facility that is permitted to accept the material.

3.5.1 Cleanup Requirements

Provide a vacuum sweeper after each work area when markings are cured. Vacuum sweep the entire pavement surface to provide a clean pavement without debris.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 32 31 14

HIGH-SECURITY FENCES (ORNAMENTAL) AND GATES
11/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2604	(2017a) Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels

ASTM INTERNATIONAL (ASTM)

ASTM A780/A780M	(2020) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM B85/B85M	(2018) Standard Specification for Aluminum-Alloy Die Castings
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B221	(2021) Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM C94/C94M	(2025) Standard Specification for Ready-Mixed Concrete
ASTM D2247	(2025) Standard Practice for Testing Water Resistance of Coatings in 100 Percent Relative Humidity
ASTM F567	(2023) Standard Practice for Installation of Chain Link Fence

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Fence Installation Drawings; G

SD-03 Product Data

Posts

Sleeves

Latches

Hinges

Stops

Keepers

Ornamental Fence Systems

Swing Gates

SD-07 Certificates

Gate Hardware and Accessories

Concrete

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to site in an undamaged condition. Store materials elevated off of the ground to protect against oxidation caused by ground contact.

PART 2 PRODUCTS

2.1 COMPONENTS

2.1.1 Ornamental Fence Systems

Fencing material is industrial strength aluminum with dimensions as indicated in the Instruments of Service. Color is Black.

2.1.2 Materials

2.1.2.1 Aluminum Extrusions

Posts and rails are extruded from aluminum alloy having a minimum yield strength of 35,000 psi. Pickets have a minimum yield strength of 25,000 psi. ASTM B221 6063-T5 and 6063-T52 alloys are not acceptable for any components.

2.1.2.2 Fasteners

Fasteners are stainless steel. Use square drive screws to connect the pickets to the horizontal rails. Rail to post connections are made using self-drilling hex-head screws.

2.1.2.3 Accessories

Aluminum sand and die castings are used for scrolls, post caps, finials, and miscellaneous hardware. Die castings are made from r ASTM B85/B85M A360.0 alloy for superior corrosion resistance. A380.0 alloy is not acceptable.

2.1.3 Finish

2.1.3.1 Pretreatment

Apply a three stage non-chrome pretreatment. Chemically clean, followed by a water rinse. The final stage ise a dry-in-place activator which produces a uniform chemical conversion coating for superior adhesion.

2.1.3.2 Coating

Fence materials are coated with a super durable TGIC polyester powdercoat finish. Epoxy powder coatings, baked enamel or acrylic paint finishes are not acceptable. The finish has a cured film thickness of at least 2.0 mils. In addition, paint the screw heads to match the fence color.

2.1.3.3 Tests

The cured finish must meet or exceed AAMA 2604, which includes the following requirements:

1. Humidity resistance of 3,000 hours in accordance with ASTM D2247.

2. Salt-spray resistance of 3,000 hours in accordance with ASTM B117.

3. Outdoor weathering results in no adhesions loss, checking or crazing, with only slight fade and chalk when exposed for 5 years in Florida facing south at a 45 degree angle.

2.1.4 Fabrication

2.1.4.1 Rails

Horizontal rails are 1 5/8" channels formed in a modified "U" shape. Pickets pass through holes punched in the top of the rail. The top wall is 0.070 inches thick and the side walls are 0.100 inches thick for superior vertical load strength.

2.1.4.2 Pickets

Pickets are fastened to the rails using painted stainless steel screws. Screws are installed on only one side of the rail, leaving the other side with a clean appearance. Pickets are 1 inch square and have a thickness of 0.062 inches. Welding pickets to rails is not permitted.

2.1.4.3 Gates

Swing gates have welded frames and support a 300 pound vertical load on the latch side of the gate without collapsing. Walk gates are self closing and self latching.

2.1.4.4 Load

Assembled sections support a 1,000 pound vertical load at the midpoint of any horizontal rail.

2.1.5 Ornamental Fence Gates

2.1.5.1 Swing Gates

Submit manufacturer's catalog data. Fabricate swing gates by welding 2 sq in tubular metal ends and rails. Use pickets that match the adjacent fence construction. Reinforce gates to ensure assembly sags no more than 1% of the gate leaf width or 2 in, whichever is less. Size gate posts to accommodate the weight and width of each gate leaf. Mount gates to posts with weldable steel plates or blocks, pressed steel, or malleable iron hinges. Hot-dip galvanize hinges with a minimum zinc weight of 1.20 oz/sq ft. Provide hinges with stainless steel pin. Secure tamper points by welding or peening the threads. Use swing gate latches and drop bar guides manufactured of pressed steel, hot-dipped galvanized with a minimum zinc weight of 1.20 oz/sq ft. Finish gate hardware in the same color/coating as the fence.

2.2 MATERIALS

2.2.1 Concrete

ASTM C94/C94M, using 3/4 inch maximum size aggregate, and having minimum compressive strength of 3000 psi at 28 days. Use grout consisting of one part portland cement to three parts clean, well-graded sand and the minimum amount of water to produce a workable mix.

PART 3 EXECUTION

3.1 PREPARATION

Perform complete installation conforming to ASTM F567.

3.1.1 Line and Grade

Install fence to the lines and grades indicated. Clear the area on either side of the fence line to the extent indicated. Space line posts equidistant at intervals not exceeding 10 feet. Set terminal (corner, gate, and pull) posts whenever abrupt changes in vertical and horizontal alignment are encountered. Provide continuous fabric between terminal posts; however, ensure runs between terminal posts do not exceed 500 feet. Repair any damage to galvanized surfaces, including welding, with paint containing zinc dust in accordance with ASTM A780/A780M.

3.1.2 Excavation

Excavate holes to depths indicated. Clear all post holes of loose material and spread waste material where directed. Eliminate ground surface irregularities along the fence line to the extent necessary to maintain a 2 inch clearance between the bottom of the fabric and finish grade.

3.2 INSTALLATION

3.2.1 Installation Drawings

Submit complete Fence Installation Drawings for review and approval by the Contracting Officer prior to shipment. Submit drawing details that include, but are not limited to the following information: Fence Installation Drawings, Location of gate, corner, end, and pull posts, Gate

Assembly, Turnstiles, and Gate Hardware and Accessories. Install fence system per approved drawings.

3.2.2 Security Fencing

Install new security fencing, remove existing security fencing, and perform related work to provide continuous security for facility. Schedule and fully coordinate work with Contracting Officer.

3.2.3 Posts

3.2.3.1 Earth and Bedrock

a. Set posts plumb and in alignment. Except where solid rock is encountered, set posts in concrete to the depth indicated on the drawings. Where solid rock is encountered with no overburden, set posts to a minimum depth of 18 inches in rock. Where solid rock is covered with an overburden of soil or loose rock, set posts to the minimum depth indicated on the drawing unless a penetration of 18 inches in solid rock is achieved before reaching the indicated depth, in which case terminate depth of penetration. Grout all portions of posts set in rock.

b. Set portions of posts not set in rock in concrete from the rock to ground level. Set posts in holes not less than the diameter shown on the drawings. Make diameters of holes in solid rock at least 1 inch greater than the largest cross section of the post. Thoroughly consolidate concrete and grout around each post, free of voids and finished to form a dome. Allow concrete and grout to cure for 72 hours prior to attachment of any item to the posts. Group II line posts may be mechanically driven, for temporary fence construction only, if rock is not encountered. Set driven posts to a minimum depth of 3 feet and protect with drive caps when setting.

c. Test fence post rigidity by applying a 50 pound force on the post, perpendicular to the fabric, at 5 feet above ground. Ensure post movement measured at the point where the force is applied is less than or equal to 3/4 inch from the relaxed position. Test every tenth post for rigidity. When a post fails this test, make further tests on the next four posts on either side of the failed post. Remove, replace, and retest all failed parts at the Contractor's expense.

3.2.3.2 Concrete Slabs and Walls

When installed in concrete slabs or walls, set posts in zinc-coated sleeves, to a minimum depth of 12 inches. Fill sleeve joint with lead, nonshrink grout, or other approved material. Set posts for support of removable fence sections in sleeves that provide a tight sliding joint and hold posts aligned and plumb without use of lead or setting material.

3.2.4 Gate Installation

a. Install gates at the locations shown. Mount gates to swing as indicated. Install latches, stops, and keepers as required.

3.2.5 Grounding

a. Provide ground conductor consisting of No. 8 AWG solid copper wire. Use grounding electrodes that measures 3/4 inch by 10 foot long and

are a copper-clad steel rod. Drive electrodes into the earth so that the top of the electrode is at least 6 inches below the grade. Where driving is impracticable, bury electrodes a minimum of 12 inches deep and radially from the fence. Install the top of the electrode to be less than 2 feet or more than 8 feet from the fence. Clamp ground conductor to the fence and electrodes with bronze grounding clamps to create electrical continuity between fence posts, fence fabric, and ground rods. Measure total resistance of the fence to ground and ensure it is not greater than 25 ohms.

3.3 CLOSEOUT ACTIVITIES

3.3.1 Cleanup

Remove waste fencing materials and other debris from the work site each workday.

3.4 HARDWARE SCHEDULE

HWS-25	7 Foot and Taller Gate Pair		
	6 each	Heavy Duty Hinge	Galvanized
	1 each	Drop Bolt with Metal Pipe Sleeve	Galvanized
	1 each	Fork Latch with Clamp Collar	Galvanized
Section 08 71 00	1 each	Padlock with Bronze Chain and PVC Weather Cover	606
Section 08 71 00	1 each	7 Pin SFIC, F24, E09241	630
Note: Quantity of 1			

-- End of Section --

SECTION 32 92 23

SODDING
04/06, CHG 1: 08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C602	(2023) Agricultural Liming Materials
ASTM D4972	(2018) Standard Test Methods for pH of Soils

TURFGRASS PRODUCERS INTERNATIONAL (TPI)

TPI GSS	(1995) Guideline Specifications to Turfgrass Sodding

U.S. DEPARTMENT OF AGRICULTURE (USDA)

DOA SSIR 42	(2022) Kellogg Soil Survey Laboratory Methods Manual, Soil Survey Investigations Report, No. 42, Version 6.0

1.2 DEFINITIONS

1.2.1 Stand of Turf

100 percent ground cover of the established species.

1.3 RELATED REQUIREMENTS

Section 31 00 00 EARTHWORK, Section 32 93 00 EXTERIOR PLANTS, and Section 32 05 33 LANDSCAPE ESTABLISHMENT applies to this section for pesticide use and plant establishment requirements, with additions and modifications herein.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Fertilizer

Include physical characteristics, and recommendations.

SD-06 Test Reports

Topsoil composition tests (reports and recommendations).

SD-07 Certificates

Sod farm certification for sods. Indicate type of sod in accordance with TPI GSS.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

1.5.1.1 Sod Protection

Protect from drying out and from contamination during delivery, on-site storage, and handling.

1.5.1.2 Fertilizer Delivery

Deliver to the site in original, unopened containers bearing manufacturer's chemical analysis, name, trade name, trademark, and indication of conformance to state and federal laws. Instead of containers, fertilizer may be furnished in bulk with certificate indicating the above information.

1.5.2 Storage

1.5.2.1 Sod Storage

Lightly sprinkle with water, cover with moist burlap, straw, or other approved covering; and protect from exposure to wind and direct sunlight until planted. Provide covering that will allow air to circulate so that internal heat will not develop. Do not store sod longer than 24 hours. Do not store directly on concrete or bituminous surfaces.

1.5.2.2 Topsoil

Prior to stockpiling topsoil, treat growing vegetation with application of appropriate specified non-selective herbicide. Clear and grub existing vegetation three to four weeks prior to stockpiling topsoil.

1.5.2.3 Handling

Do not drop or dump materials from vehicles.

1.6 TIME RESTRICTIONS AND PLANTING CONDITIONS

1.6.1 Restrictions

Do not plant when the ground is frozen, snow covered, muddy, or when air temperature exceeds 90 degrees Fahrenheit.

1.7 TIME LIMITATIONS

1.7.1 Sod

Place sod a maximum of thirty six hours after initial harvesting, in accordance with TPI GSS as modified herein.

PART 2 PRODUCTS

2.1 SODS

2.1.1 Classification

Centipede sod, nursery grown, certified as classified in the TPI GSS. Machine cut sod at a uniform thickness of 3/4 inch within a tolerance of 1/4 inch, excluding top growth and thatch. Each individual sod piece shall be strong enough to support its own weight when lifted by the ends. Broken pads, irregularly shaped pieces, and torn or uneven ends will be rejected. Wood pegs and wire staples for anchorage shall be as recommended by sod supplier.

2.1.2 Purity

Sod species shall be genetically pure, free of weeds, pests, and disease.

2.1.3 Composition

2.1.3.1 Sod Farm Overseeding

At the sod farm provide sod with overseeding of annual rye grass seed.

2.2 TOPSOIL

2.2.1 On-Site Topsoil

Surface soil stripped and stockpiled on site and modified as necessary to meet the requirements specified for topsoil in paragraph COMPOSITION. When available topsoil shall be existing surface soil stripped and stockpiled on-site in accordance with Section 31 00 00 EARTHWORK.

2.2.2 Off-Site Topsoil

Conform to requirements specified in paragraph COMPOSITION. Additional topsoil shall be furnished by the Contractor.

2.2.3 Composition

Containing from 5 to 10 percent organic matter as determined by the topsoil composition tests of the Organic Carbon, 6A, Chemical Analysis Method described in DOA SSIR 42. Maximum particle size, 3/4 inch, with maximum 3 percent retained on 1/4 inch screen. The pH shall be tested in accordance with ASTM D4972. Topsoil shall be free of sticks, stones, roots, and other debris and objectionable materials. Other components shall conform to the following limits:

Silt	25-50 percent
Clay	10-30 percent
Sand	20-35 percent
pH	5.5 to 7.0

Soluble Salts	600 ppm maximum

2.3 SOIL CONDITIONERS

Add conditioners to topsoil as required to bring into compliance with "composition" standard for topsoil as specified herein.

2.3.1 Lime

Commercial grade hydrate limestone containing a calcium carbonate equivalent (C.C.E.) as specified in ASTM C602 of not less than 110 percent.

2.4 FERTILIZER

2.4.1 Granular Fertilizer

Organic, granular controlled release fertilizer containing the following minimum percentages, by weight, of plant food nutrients:

10 percent available nitrogen
10 percent available phosphorus
10 percent available potassium

2.5 WATER

Source of water shall be approved by Contracting Officer and of suitable quality for irrigation containing no element toxic to plant life.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Extent Of Work

Provide soil preparation (including soil conditioners), fertilizing, and sodding of all newly graded finished earth surfaces, unless indicated otherwise, and at all areas inside or outside the limits of construction that are disturbed by the Contractor's operations.

3.1.2 Soil Preparation

Provide 4 inches of off-site topsoil or on-site topsoil to meet indicated finish grade. After areas have been brought to indicated finish grade, incorporate fertilizer into soil a minimum depth of 4 inches by disking, harrowing, tilling or other method approved by the Contracting Officer. Remove debris and stones larger than 3/4 inch in any dimension remaining on the surface after finish grading. Correct irregularities in finish surfaces to eliminate depressions. Protect finished topsoil areas from damage by vehicular or pedestrian traffic.

3.1.2.1 Soil Conditioner Application Rates

Apply soil conditioners at rates as determined by laboratory soil analysis of the soils at the job site. For bidding purposes only apply at rates for the following:

Lime 200 pounds per acre.

3.2 SODDING

3.2.1 Finished Grade and Topsoil

Prior to the commencement of the sodding operation, the Contractor shall verify that finished grades are as indicated on drawings; the placing of topsoil, smooth grading, and compaction requirements have been completed in accordance with Section 31 00 00 EARTHWORK.

The prepared surface shall be a maximum 1 inch below the adjoining grade of any surfaced area. New surfaces shall be blended to existing areas. The prepared surface shall be completed with a light raking to remove from the surface debris and stones over a minimum 5/8 inch in any dimension.

3.2.2 Placing

Place sod a maximum of 36 hours after initial harvesting, in accordance with TPI GSS as modified herein.

3.2.3 Sodding Slopes and Ditches

For slopes 2:1 and greater, lay sod with long edge perpendicular to the contour. For V-ditches and flat bottomed ditches, lay sod with long edge perpendicular to flow of water. Anchor each piece of sod with wood pegs or wire staples maximum 2 feet on center. On slope areas, start sodding at bottom of the slope.

3.2.4 Finishing

After completing sodding, blend edges of sodded area smoothly into surrounding area. Air pockets shall be eliminated and a true and even surface shall be provided. Frayed edges shall be trimmed and holes and missing corners shall be patched with sod.

3.2.5 Rolling

Immediately after sodding, firm entire area except for slopes in excess of 3 to 1 with a roller not exceeding 90 pounds for each foot of roller width.

3.2.6 Watering

Start watering areas sodded as required by daily temperature and wind conditions. Apply water at a rate sufficient to ensure thorough wetting of soil to minimum depth of 6 inches. Run-off, puddling, and wilting shall be prevented. Unless otherwise directed, watering trucks shall not be driven over turf areas. Watering of other adjacent areas or plant material shall be prevented.

3.3 RESTORATION

Restore to original condition existing turf areas which have been damaged during turf installation operations. Keep clean at all times at least one paved pedestrian access route and one paved vehicular access route to each building. Clean other paving when work in adjacent areas is complete.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 32 93 00

EXTERIOR PLANTS
08/17, CHG 1: 08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICANHORT (AH)

ANSI/ANLA Z60.1	(2004) American Standard for Nursery Stock

ASTM INTERNATIONAL (ASTM)

ASTM A580/A580M	(2023) Standard Specification for Stainless Steel Wire
ASTM C602	(2023) Agricultural Liming Materials
ASTM D4972	(2018) Standard Test Methods for pH of Soils
ASTM D5268	(2019) Topsoil Used for Landscaping Purposes
ASTM D6155	(2019) Nontraditional Coarse Aggregate for Bituminous Paving Mixtures

L.H. BAILEY HORTORIUM (LHBH)

LHBH	(1976) Hortus Third

TREE CARE INDUSTRY ASSOCIATION (TCIA)

TCIA A300P1	(2017) ANSI A300 Part1: Tree Care Operations - Trees, Shrubs and Other Woody Plant Maintenance Standard Practices - Pruning
TCIA Z133	(2017) American National Standard for Arboricultural Operations - Pruning, Repairing, Maintaining, and Removing Trees, and Cutting Brush - Safety Requirements

U.S. DEPARTMENT OF AGRICULTURE (USDA)

DOA SSIR 42	(2022) Kellogg Soil Survey Laboratory Methods Manual, Soil Survey Investigations Report, No. 42, Version 6.0

1.2 RELATED REQUIREMENTS

Section 31 00 00 EARTHWORK, Section 32 92 23 SODDING, and Section 32 05 33 LANDSCAPE ESTABLISHMENT applies to this section for pesticide use and plant establishment requirements, with additions and modifications herein.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

State Landscape Contractor's License

Time Restrictions and Planting Conditions

Indicate anticipated dates and locations for each type of planting.

SD-03 Product Data

Gypsum

Mulch; G

Ground Stakes

Fertilizer

Weed Control Fabric; G

Staking Material

Metal Edging

SD-06 Test Reports

Topsoil Composition Tests

SD-07 Certificates

Nursery Certifications

1.4 QUALITY ASSURANCE

1.4.1 Topsoil Composition Tests

Commercial test from an independent testing laboratory including basic soil groups (moisture and saturation percentages, Nitrogen-Phosphorus-Potassium (N-P-K) ratio, pH (ASTM D4972), soil salinity), secondary nutrient groups (calcium, magnesium, sodium, Sodium Absorption Ratio (SAR)), micronutrients (zinc, manganese, iron, copper), toxic soil elements (boron, chloride, sulfate), cation exchange and base saturation percentages, and soil amendment and fertilizer recommendations with quantities for plant material being transplanted. Soil required for each test must include a maximum depth of 18 inches of approximately one

quart volume for each test. Areas sampled should not be larger than one acre and should contain at least 6-8 cores for each sample area and be thoroughly mixed. Problem areas should be sampled separately and compared with samples taken from adjacent non-problem areas. The location of the sample areas should be noted and marked on a parcel or planting map for future reference.

1.4.2 Nursery Certifications

a. Indicate on nursery letterhead the name of plants in accordance with the LHBH, including botanical common names, quality, and size.

b. Inspection certificate.

c. Mycorrhizal fungi inoculum for plant material treated

1.4.3 State Landscape Contractor's License

Construction company must hold a landscape contractors license in the state where the work is performed and have a minimum of five years landscape construction experience. Submit copy of license and three references for similar work completed in the last five years.

1.4.4 Pre-Installation Meeting

Convene a pre-installation meeting a minimum of one week prior to commencing work of this section. Require attendance of parties directly affecting work of this section. Review conditions of operations, procedures and coordination with related work. Agenda must include the following:

a. Tour, inspect, and discuss conditions of planting materials.

b. Review planting schedule and maintenance.

c. Review required inspections.

d. Review environmental procedures.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

1.5.1.1 Branched Plant Delivery

Deliver with branches tied and exposed branches covered with material which allows air circulation. Prevent damage to branches, trunks, root systems, and root balls and desiccation of leaves.

1.5.1.2 Soil Amendment Delivery

Deliver to the site in original, unopened containers bearing manufacturer's chemical analysis, name, trade name, or trademark, and indication of conformance to state and federal laws. Store in dry locations away from contaminates.

1.5.1.3 Plant Labels

Deliver plants with durable waterproof labels in weather-resistant ink.

Provide labels stating the correct botanical and common plant name and variety as applicable and size as specified in the list of required plants. Attach to plants, bundles, and containers of plants. Groups of plants may be labeled by tagging one plant. Labels must be legible for a minimum of 60 days after delivery to the planting site.

1.5.2 Storage

1.5.2.1 Plant Storage and Protection

Store and protect plants not planted on the day of arrival at the site as follows:

a. Shade and protect plants in outside storage areas from the wind and direct sunlight until planted.

b. Heel-in bare root plants.

c. Protect balled and burlapped plants from freezing or drying out by covering the balls or roots with moist burlap, sawdust, wood chips, shredded bark, peat moss, or other approved material. Provide covering which allows air circulation.

d. Keep plants in a moist condition until planted by watering with a fine mist spray.

e. Do not store plant material directly on concrete or bituminous surfaces.

1.5.2.2 Fertilizer, Gypsum, pH Adjusters and Mulch Storage

Store in dry locations away from contaminants.

1.5.2.3 Topsoil

Prior to stockpiling topsoil, eradicate on site undesirable growing vegetation. Clear and grub existing vegetation three to four weeks prior to stockpiling existing topsoil.

1.5.2.4 Weed Control Fabric

Store materials on site in enclosures or under protective covering in dry location. Store under cover out of direct sunlight. Do not store materials directly on ground.

1.5.3 Handling

Do not drop or dump plants from vehicles. Avoid damaging plants being moved from nursery or storage area to planting site. Handle balled and burlapped container plants carefully to avoid damaging or breaking the earth ball or root structure. Do not handle plants by the trunk or stem. Remove damaged plants from the site.

1.5.4 TIME LIMITATION

Except for container-grown plant material, the time limitation from digging to installing plant material must be a maximum of 90 days. The time limitation between installing the plant material and placing the mulch must be a maximum of 24 hours.

1.6 TIME RESTRICTIONS AND PLANTING CONDITIONS

Coordinate installation of planting materials during optimal planting seasons for each type of plant material required.

1.6.1 Restrictions

Do not plant when ground is frozen, snow covered, muddy, or when air temperature exceeds 90 degrees Fahrenheit

1.7 GUARANTEE

All plants must be guaranteed for one year beginning on the date of inspection by the Contracting Officer to commence the plant establishment period, against defects including death and unsatisfactory growth, except for defects resulting from lack of adequate maintenance, neglect, or abuse by the Government or by weather conditions unusual for the warranty period.

Remove and replace dead planting materials immediately unless required to plant in the succeeding planting season. At end of warranty period, replace planting materials that die or have 25 percent or more of their branches that die during the construction operations or the guarantee period.

PART 2 PRODUCTS

2.1 PLANTS

2.1.1 Regulations and Varieties

Existing trees and shrubs to remain must be protected and a planting plan be arranged around them. Furnish nursery stock in accordance with ANSI/ANLA Z60.1, except as otherwise specified or indicated. Each plant or group of planting must have a "key" number indicated on the nursery certifications of the plant schedule. Furnish plants, including turf grass, grown under climatic conditions similar to those in the locality of the project. Plants specified must be indigenous, low maintenance varieties, tolerant of site's existing soils and climate without supplemental irrigation or fertilization once established. Plants of the same specified size must be of uniform size and character of growth. Plants must be chosen with their mature size and growth habit in mind to avoid over-planting and conflict with other plants, structures or underground utility lines. All plants must comply with all Federal and State Laws requiring inspection for plant diseases and infestation.

2.1.2 Shape and Condition

Well-branched, well-formed, sound, vigorous, healthy planting stock free from disease, sunscald, windburn, abrasion, and harmful insects or insect eggs and having a healthy, normal, and undamaged root system.

2.1.2.1 Deciduous Trees and Shrubs

Symmetrically developed and of uniform habit of growth, with straight boles or stems, and free from objectionable disfigurements.

2.1.2.2 Evergreen Trees and Shrubs

Well developed symmetrical tops with typical spread of branches for each particular species or variety.

2.1.2.3 Ground Covers and Vines

Number and length of runners and clump sizes indicated, and of the proper age for the grade of plants indicated, furnished in removable containers, integral containers, or formed homogeneous soil section.

2.1.3 Plant Size

Minimum sizes measured after pruning and with branches in normal position, must conform to measurements indicated, based on the average width or height of the plant for the species as specified in ANSI/ANLA Z60.1. Plants larger in size than specified may be provided with approval of the Contracting Officer. When larger plants are provided, increase the ball of earth or spread of roots in accordance with ANSI/ANLA Z60.1.

2.1.4 Root Ball Size

All box-grown, field potted, field boxed, collected, plantation grown, bare root, balled and burlapped, container grown, processed-balled, and in-ground fabric bag-grown root balls must conform to ANSI/ANLA Z60.1. All wrappings and ties must be biodegradable. Root growth in container grown plants must be sufficient to hold earth intact when removed from containers. Root bound plants will not be accepted.

2.1.4.1 Mycorrhizal fungi inoculum

Before shipment, root systems must contain mycorrhizal fungi inoculum.

2.1.5 Growth of Trunk and Crown

2.1.5.1 Deciduous Trees

A height to caliper relationship must be provided in accordance with ANSI/ANLA Z60.1. Height of branching must bear a relationship to the size and species of tree specified and with the crown in good balance with the trunk. The trees must not be "poled" or the leader removed.

a. Single stem: The trunk must be reasonably straight and symmetrical with crown and have a persistent main leader.

b. Multi-stem: All countable stems, in aggregate, must average the size specified. To be considered a stem, there must be no division of the trunk which branches more than 6 inches from ground level.

2.1.5.2 Broadleaf Evergreen Plant Material

Broadleaf evergreen plant material must have the height-to-spread ratio recommended by ANSI/ANLA Z60.1. Acceptable plant material must be well shaped and recognized by the trade as typical for the variety grown in the region of the project.

2.1.5.3 Ground Cover and Vine Plant Material

Ground cover and vine plant material must have the minimum number of

runners and length of runner recommended by ANSI/ANLA Z60.1. Plant material must have heavy, well developed and balanced crown with vigorous, well developed root system and must be furnished in containers.

2.2 TOPSOIL

2.2.1 Off-Site Topsoil

Conform to requirements specified in paragraph COMPOSITION. Additional topsoil must be furnished by the Contractor.

2.2.2 Composition

Evaluate soil for use as topsoil in accordance with ASTM D5268. From 5 to 10 percent organic matter as determined by the topsoil composition tests of the Organic Carbon, 6A, Chemical Analysis Method described in DOA SSIR 42. Maximum particle size, 3/4 inch, with maximum 3 percent retained on 1/4 inch screen. The pH must be tested in accordance with ASTM D4972. Topsoil must be free of sticks, stones, roots, plants, and other debris and objectionable materials. Other components must conform to the following limits:

Silt	25-50 percent
Clay	10-30 percent
Sand	20-35 percent
pH	5.5 to 7.0
Soluble Salts	600 ppm maximum

2.3 SOIL CONDITIONERS

Provide singly or in combination as required to meet specified requirements for topsoil. Soil conditioners must be nontoxic to plants.

2.3.1 Lime

Commercial grade hydrated limestone containing a calcium carbonate equivalent (C.C.E.) as specified in ASTM C602 of not less than 80 percent.

2.3.2 Aluminum Sulfate

Commercial grade.

2.3.3 Sulfur

100 percent elemental

2.3.4 Iron

100 percent elemental

2.3.5 Gypsum

Coarsely ground gypsum comprised of calcium sulfate dihydrate 80 percent, calcium 18 percent, sulfur 14 percent; minimum 96 percent passing through

20 mesh screen, 100 percent passing thru 16 mesh screen.

2.4 PLANTING SOIL MIXTURES

100 percent topsoil as specified herein.

2.5 FERTILIZER

Fertilizer for groundcover, wildflowers and grasses is not permitted. Fertilizer for trees, plants, and shrubs must be as recommended by plant supplier, except synthetic chemical fertilizers are not permitted. Fertilizers containing petrochemical additives or that have been treated with pesticides or herbicides are not permitted.

2.5.1 Granular Fertilizer

Organic, granular controlled release fertilizer containing the following minimum percentages, by weight, of plant food nutrients:

10 percent available nitrogen
10 percent available phosphorus
10 percent available potassium

2.6 WEED CONTROL FABRIC

2.6.1 Roll Type Polypropylene or Polyester Mats

Fabric must be woven, needle punched or non-woven and treated for protection against deterioration due to ultraviolet radiation. Fabric must be minimum 99 percent opaque to prevent photosynthesis and seed germination from occurring, yet allowing air, water and nutrients to pass thru to the roots. Minimum weight must be 5 ounces per square yard with a minimum thickness of 20 mils with a 20 year (minimum) guarantee.

2.7 MULCH

Free from noxious weeds, mold, pesticides, or other deleterious materials.

2.7.1 Inert Mulch Materials

Provide riverbank stone complying with ASTM D6155, ranging in size from 3 to 5 (inches). Color shall be Berkshire Blend or approved equal.

2.8 STAKING AND GUYING MATERIAL

2.8.1 Staking Material

2.8.1.1 Tree Support Stakes

Rough sawn hard wood free of knots, rot, cross grain, bark, long slivers, or other defects that impair strength. Stakes must be minimum 2 inches square or 2-1/2 inch diameter by 8 feet long, pointed at one end.

2.8.1.2 Ground Stakes

Rough sawn hard wood or plastic, 2 inches square are by 3 feet long, pointed at one end.

2.8.2 Guying Material

2.8.2.1 Guying Wire

12 gauge annealed galvanized steel, ASTM A580/A580M.

2.8.2.2 Guying Cable

Minimum five-strand, 3/16 inch diameter galvanized steel cable.

2.8.3 Hose Chafing Guards

New or used 2 ply 3/4 inch diameter reinforced rubber or plastic hose, black or dark green, all of same color.

2.9 EDGING MATERIAL

2.9.1 Metal Edging

Provide 8-inch high, 12 gauge standard top metal edging in minimum 10 foot long sections. Provide manufacturer recommended ground fasteners. Provide a powder coated finish, black in color.

2.10 WATER

Source of water to be approved by Contracting Officer and suitable quality for irrigation and must not contain elements toxic to plant life, including acids, alkalis, salts, chemical pollutants, and organic matter. Use collected storm water or graywater when available.

2.11 SOURCE QUALITY CONTROL

The Contracting Officer will inspect plant materials at the project site and approve them. Tag plant materials for size and quality.

PART 3 EXECUTION

3.1 EXTENT OF WORK

Provide soil preparation, including soil conditioners and soil amendments prior to planting. Provide tree, shrub, staking, guying, weed control fabric, installation, and mulch topdressing of all newly graded finished earth surfaces, unless indicated otherwise, and at all areas inside or outside the limits of construction that are disturbed by the Contractor's operations.

3.2 PREPARATION

3.2.1 Protection

Protect existing and proposed landscape features, elements, and sites from damage or contamination. Protect trees, vegetation, and other designated features by erecting high-visibility, reusable construction fencing. Locate fence no closer to trees than the drip line. Plan equipment and vehicle access to minimize and confine soil disturbance and compaction to areas indicated on Drawings.

3.2.2 Layout

Stake out approved plant material locations and planter bed outlines on the project site before digging plant pits or beds. The Contracting Officer reserves the right to adjust plant material locations to meet field conditions. Do not plant closer than 24 inches to a building wall, pavement edge, fence or wall edge and other similar structures. Provide on-site locations for excavated rock, soil, and vegetation.

3.2.3 Soil Preparation

3.2.3.1 pH Adjuster Application Rates

Apply pH adjuster at rates as determined by laboratory soil analysis of the soils at the job site.

3.2.3.2 Soil Conditioner Application Rates

Apply soil conditioners at rates as determined by laboratory soil analysis of the soils at the job site.

3.2.3.3 Fertilizer Application Rates

Apply fertilizer at rates as determined by laboratory soil analysis of the soils at the job site.

3.3 PLANT BED PREPARATION

Verify location of underground utilities prior to excavation. Protect existing adjacent turf before excavations are made. Do not disturb topsoil and vegetation in areas outside those indicated on Drawings. Where planting beds occur in existing turf areas, remove turf to a depth that will ensure removal of entire root system. Measure depth of plant pits from finished grade. Depth of plant pit excavation must be as indicated and provide proper relation between top of root ball and finished grade. Install plant material as specified in paragraph PLANT INSTALLATION. Do not install trees within 10 feet of any utility lines or building walls.

3.4 PLANT INSTALLATION

3.4.1 Individual Plant Pit Excavation

Excavate pits at least twice as large in diameter as the size of ball or container to depth shown.

3.4.2 Plant Beds with Multiple Plants

Excavate plant beds continuously throughout entire bed as outlined to depth shown.

3.4.3 Handling and Setting

Move plant materials only by supporting the root ball or container. Set plants on hand compacted layer of prepared backfill soil mixture 6 inches thick and hold plumb in the center of the pit until soil has been tamped firmly around root ball. Replace plant material whose root balls are cracked or damaged either before or during the planting process.

Plant material must be set in plant beds according to the drawings. Backfill soil mixture must be placed on previously scarified subsoil to completely surround the root balls, and must be brought to a smooth and even surface, blending to existing areas.

3.4.3.1 Balled and Burlapped Stock

Backfill with topsoil to approximately half the depth of ball and then tamp and water. Carefully remove or fold back excess burlap and tying materials from the top a minimum 1/3 depth from the top of the rootball. Tamp and complete backfill, place mulch topdressing, and water. Remove wires and non-biodegradable materials from plant pit prior to backfill operations.

3.4.3.2 Container Grown Stock

Remove from container and prevent damage to plant or root system.

3.4.3.3 Ground Covers and Vines

Do not remove plant materials from flats or containers until immediately before planting. Space at intervals indicated. Plant at a depth to sufficiently cover all roots. Start watering areas planted as required by temperature and wind conditions. Apply water at a rate sufficient to ensure thorough wetting of soil to a depth of 12 inches without run off or puddling. Smooth planting areas after planting to provide even, smooth finish.

Smooth planting areas before planting to provide even, smooth finish. Plant after placing weed control fabric and mulch topdressing. Do not remove plant material from flats or containers until immediately before planting. Space at the intervals indicated. Plant at a depth to sufficiently cover all roots. Start watering areas planted as required by temperature and wind conditions. Apply water at a rate sufficient to ensure thorough wetting of soil to a depth of 6 inches without run off or puddling. Add mulch topdressing as needed.

3.4.4 Earth Mounded Watering Basin for Individual Plant Pits

Form with topsoil around each plant by placing a mound of topsoil around the edge of each plant pit. Watering basins must be 6 inches deep for trees and 4 inches deep for shrubs. Construct watering basin in a 4-1/2 foot diameter circle around specimen (not planted in a close group) trees and shrubs.

3.4.5 Weed Control Fabric Installation

Remove grass and weed vegetation, including roots, from within the area enclosed by edging. Completely cover areas enclosed by edging with specified weed control fabric prior to placing mulch layer. Overlap cut edges 6 inches.

3.4.6 Placement of Mulch Topdressing

Place specified mulch topdressing on top of weed control fabric covering total area. Place mulch topdressing to a depth of 4 inches.

3.4.7 Mulch Topdressing

Provide mulch topdressing over entire planter bed surfaces and individual plant surfaces including earth mound watering basin around plants to a depth of 6 inches after completion of plant installation and before watering. Keep mulch out of the crowns of shrubs. Place mulch a minimum 2 to 3 inches away from trunk of shrub or tree. Place on top of any weed control fabric.

3.4.8 Installation of Edging

Uniformly edge beds of plants to provide a clear cut division line between planted area and adjacent lawn. Construct bed shapes as indicated. Install metal edging material as indicated and as per manufacturer's instructions. Install edging with minimum one inch left above the material it is containing.

3.4.9 Fertilization

3.4.9.1 Granular Fertilizer

Apply granular fertilizer as a top coat prior to placing mulch layer and water thoroughly.

3.4.10 Watering

Start watering areas planted as required by temperature and wind conditions. Slow deep watering must be used. Apply water at a rate sufficient to ensure thorough wetting of soil to a depth of 12 inches without run off or puddling. Watering of other plant material or adjacent areas must be prevented.

3.4.11 Staking and Guying

3.4.11.1 Staking

Stake plants with the number of stakes indicated. Use hose chafer guards where guy wire comes in contact with tree trunk.

3.4.12 Pruning

Prune in accordance with safety requirement of TCIA Z133.

3.4.12.1 Trees and Shrubs

Remove dead and broken branches. Prune to correct structural defects only. Retain typical growth shape of individual plants with as much height and spread as practical. Do not cut central leader on trees. Make cuts with sharp instruments. Do not flush cut with trunk or adjacent branches. Collars must remain in place. Pruning must be accomplished by trained and experienced personnel and must be accordance with TCIA A300P1.

3.4.12.2 Wound Dressing

Do not apply tree wound dressing to cuts.

3.5 RESTORATION AND CLEAN UP

3.5.1 Restoration

Turf areas, pavements and facilities that have been damaged from the planting operation must be restored to original condition at the Contractor's expense.

3.5.2 Clean Up

Excess and waste material must be removed from the installed area and must be disposed offsite at an approved landfill, recycling center, or composting center. Adjacent paved areas must be cleared.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 33 11 00

WATER UTILITY DISTRIBUTION PIPING
08/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.1	(2020) Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250
ASME B18.2.2	(2022) Nuts for General Applications: Machine Screw Nuts, and Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA B300	(2024) Hypochlorites
AWWA B301	(2024) Liquid Chlorine
AWWA C104/A21.4	(2022) Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for Water
AWWA C105/A21.5	(2018) Polyethylene Encasement for Ductile-Iron Pipe Systems
AWWA C110/A21.10	(2021) Ductile-Iron and Gray-Iron Fittings
AWWA C111/A21.11	(2023) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
AWWA C115/A21.15	(2020) Flanged Ductile-Iron Pipe With Ductile-Iron or Gray-Iron Threaded Flanges
AWWA C153/A21.53	(2019) Ductile-Iron Compact Fittings for Water Service
AWWA C219	(2023) Bolted Sleeve-Type Couplings for Plain-End Pipe
AWWA C500	(2019) Metal-Seated Gate Valves for Water Supply Service
AWWA C508	(2017) Swing-Check Valves for Waterworks Service, 2 In. Through 48-In. (50-mm Through 1,200-mm) NPS
AWWA C509	(2023) Resilient-Seated Gate Valves for Water Supply Service

AWWA C511	(2017; R 2021) Reduced-Pressure Principle Backflow Prevention Assembly
AWWA C515	(2020) Reduced-Wall, Resilient-Seated Gate Valves for Water Supply Service
AWWA C550	(2024) Protective Interior Coatings for Valves and Hydrants
AWWA C600	(2023) Installation of Ductile-Iron Mains and Their Appurtenances
AWWA C605	(2021) Underground Installation of Polyvinyl Chloride (PVC) and Molecularly Oriented Polyvinyl Chloride (PVCO) Pressure Pipe and Fittings
AWWA C651	(2023) Standard for Disinfecting Water Mains
AWWA C655	(2018) Field Dechlorination
AWWA C800	(2021) Underground Service Line Valves and Fittings
AWWA C900	(2022) Polyvinyl Chloride (PVC) Pressure Pipe, and Fabricated Fittings, 4 In. Through 60 In. (100 mm Through 1,500 mm)
AWWA M9	(2008; Errata 2013) Manual: Concrete Pressure Pipe
AWWA M23	(2020) Manual: PVC Pipe - Design and Installation - Third Edition
AWWA M41	(2009; 3rd Ed) Ductile-Iron Pipe and Fittings
AWWA M55	(2020; 2nd Ed) PE Pipe - Design and Installation

ASTM INTERNATIONAL (ASTM)

ASTM A48/A48M	(2022) Standard Specification for Gray Iron Castings
ASTM A307	(2023) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A536	(2024) Standard Specification for Ductile Iron Castings
ASTM A563/A563M	(2024) Standard Specification for Carbon and Alloy Steel Nuts (Inch and Metric)
ASTM C94/C94M	(2025) Standard Specification for Ready-Mixed Concrete

ASTM D1784	(2020) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D3139	(2019) Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
ASTM F1674	(2018) Standard Test Method for Joint Restraint Products for Use with PVC Pipe
ASTM F2164	(2021) Standard Practice for Field Leak Testing of Polyethylene (PE) and Crosslinked Polyethylene (PEX) Pressure Piping Systems Using Hydrostatic Pressure

FOUNDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH (FCCCHR)

FCCCHR List	(continuously updated) List of Approved Backflow Prevention Assemblies
FCCCHR Manual	(10th Edition) Manual of Cross-Connection Control

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO 8678	(1998) Cup Head Square Neck Bolts with Small Head and Short Neck-Product Grade B

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 24	(2025) Standard for the Installation of Private Fire Service Mains and Their Appurtenances

NSF INTERNATIONAL (NSF)

NSF/ANSI/CAN 61	(2024) Drinking Water System Components - Health Effects

UL SOLUTIONS (UL)

UL 262	(2004; Reprint Jul 2023) Gate Valves for Fire-Protection Service
UL 312	(2022) UL Standard for Safety Check Valves for Fire-Protection Service
UL 789	(2004; Reprint May 2024) UL Standard for Safety Indicator Posts for Fire-Protection Service

1.2 DEFINITIONS

1.2.1 Water Transmission Mains

Water transmission mains include water piping having diameters greater than 14 inch, specific materials, methods of joining and any appurtenances

deemed necessary for a satisfactory system.

1.2.2 Water Mains

Water mains include water piping having diameters 4 through 14 inch, specific materials, methods of joining and any appurtenances deemed necessary for a satisfactory system.

1.2.3 Water Service Lines

Water service lines include water piping from a water main to a building service connection 5 feet from the perimeter of buildings or structures, specific materials, methods of joining and any appurtenances deemed necessary for a satisfactory system.

1.2.4 Additional Definitions

For additional definitions refer to the definitions in the applicable referenced standard.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Connections; G

SD-03 Product Data

Pipe, Fittings, Joints and Couplings; G

Valves; G

Valve Boxes; G

Pipe Restraint; G

Backflow Preventer; G

Disinfection Procedures; G

Post Indicator

SD-06 Test Reports

Backflow Preventer Tests; G

Bacteriological Samples; G

Leakage Test

Hydrostatic Test

SD-07 Certificates

Pipe, Fittings, Joints and Couplings

Shop-Applied Lining

Lining

Lining for Fittings

Valves

Backflow Prevention Training Certificate

Backflow Tester Certification

Backflow Certificate

SD-08 Manufacturer's Instructions

Ductile-Iron Piping

PVC Piping

1.4 QUALITY CONTROL

1.4.1 Regulatory Requirements

Use NSF/ANSI/CAN 61 materials for potable water systems to comply with lead free content requirements as defined by the U.S. Safe Drinking Water Act effective January 2014 and January 2022.

Comply with NFPA 24 for materials, installation, and testing of fire main piping and components.

1.4.2 Qualifications

1.4.2.1 Backflow Preventers

1.4.2.1.1 Backflow Preventer Certificate

Certificate of Full Approval from FCCCHR List, University of Southern California, attesting that the design, size and make of each backflow preventer has satisfactorily passed the complete sequence of performance testing and evaluation for the respective level of approval. Certificate of Provisional Approval will not be acceptable.

1.4.2.1.1.1 Backflow Tester Certificate

Prior to testing, submit to the Contracting Officer certification issued by the State or local regulatory agency attesting that the backflow tester has successfully completed a certification course sponsored by the regulatory agency.

1.4.2.1.1.2 Backflow Prevention Training Certificate

Submit a certificate recognized by the State or local authority that states the Contractor has completed at least 10 hours of training in backflow preventer installations. The certificate must be current.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery and Storage

Inspect materials delivered to site for required pipe markings and damage. Unload and store with minimum handling and in accordance with manufacturer's instructions to prevent cuts, scratches and other damage. Store materials on site in enclosures or under protective covering. Store plastic piping, jointing materials and rubber gaskets under cover out of direct sunlight. Do not store materials directly on the ground. Keep inside of pipes, fittings, valves, fire hydrants, and other accessories free of dirt and debris or other contaminates.

1.5.2 Handling

Handle pipe, fittings, valves, fire hydrants, and other accessories in accordance with applicable AWWA standard, manufacturer's instructions and in a manner to ensure delivery to the trench in sound undamaged condition. Avoid injury to coatings and linings on pipe and fittings; make repairs if coatings or linings are damaged. Do not place other material, hooks, or pipe inside a pipe or fitting after the coating has been applied. Inspect the pipe for defects before installation. Carry, do not drag pipe to the trench. Use of pinch bars and tongs for aligning or turning pipe will be permitted only on the bare ends of the pipe. Clean the interior of pipe and accessories of foreign matter before being lowered into the trench and keep them clean during laying operations by plugging. Replace defective material without additional expense to the Government. Store rubber gaskets, not immediately installed, under cover or out of direct sunlight.

Handle ductile iron pipe, fittings, and accessories in accordance with AWWA C600 and AWWA M41. Handle PVC and PVCO pipe, fittings, and accessories in accordance with AWWA C605. Handle PE pipe, fittings, and accessories in accordance with AWWA M55.

PART 2 PRODUCTS

2.1 MATERIALS

Provide all materials in accordance with AWWA C800 and as indicated herein. Provide valves and fittings with pressure ratings equivalent to the pressure ratings of the pipe.

2.1.1 Pipe, Fittings, Joints And Couplings

Submit manufacturer's standard drawings or catalog cuts, except submit both drawings and cuts for push-on and rubber-gasketed bell-and-spigot joints. Include information concerning gaskets with submittal for joints and couplings.

2.1.1.1 Ductile-Iron Piping

2.1.1.1.1 Pipe and Fittings

Pipe, Pressure Class 350. Flanged pipe, AWWA C115/A21.15. Fittings, AWWA C110/A21.10 or AWWA C153/A21.53; fittings with push-on joint ends are to meet the same requirements as fittings with mechanical-joint ends, except for the factory modified bell design. Provide fittings with pressure ratings equivalent to that of the pipe. Provide compatible pipe

ends and fittings for the specified joints. Provide cement-mortar lining, AWWA C104/A21.4, standard thickness on pipe and fittings.

2.1.1.1.2 Joints and Jointing Material

Provide push-on joints for pipe and fittings unless otherwise indicated. Provide mechanical joints where indicated. Provide flanged joints where indicated. Provide insulating joints where indicated.

a. Push-On Joints: Shape of pipe ends and fitting ends, gaskets, and lubricant for joint assembly as recommended in AWWA C111/A21.11.

b. Mechanical Joints: Dimensional and material requirements for pipe ends, glands, bolts and nuts, and gaskets as recommended in AWWA C111/A21.11.

c. Flanged Joints: Bolts, nuts, and gaskets for flanged connections as recommended in Appendix A of AWWA C115/A21.15. Provide AWWA C115/A21.15 ductile iron flanges and conform to ASME B16.1, Class 125.

d. Insulating Joints: Designed to prevent metal-to-metal contact at the joint between adjacent sections of piping. Provide flanged type joint with insulating gasket, insulating bolt sleeves, and insulating washers. Provide full face dielectric type gaskets, as recommended in the Appendix to AWWA C115/A21.15. Bolts and nuts, as recommended in the Appendix to AWWA C115/A21.15.

2.1.1.2 Plastic Piping

2.1.1.2.1 PVC Piping

2.1.1.2.1.1 PVC Piping

AWWA C900 plain end or gasket bell end pipe meeting or exceeding ASTM D1784 cell class 12454, with a minimum Pressure Class 200 (DR21) with ductile iron outside diameter (DIOD).

2.1.1.2.1.2 Fittings for PVC Pipe

Ductile iron fittings, AWWA C110/A21.10 or compact fittings in accordance with AWWA C153/A21.53, with cement-mortar lining for fittings, AWWA C104/A21.4, standard thickness. Fittings with push-on joint ends are to conform to the same requirements as fittings with mechanical-joint ends, except for the factory modified bell design compatible for use with PVC pipe as specified.

2.1.1.2.1.3 Joints and Jointing Material for PVC and PVCO Piping

a. Mechanical Joint: Use mechanically coupled joints having a sleeve-type mechanical coupling, as specified in the paragraph SLEEVE-TYPE MECHANICAL COUPLINGS, as an optional jointing method for plain-end PVC pipe, subject to the limitations specified for mechanically coupled joints using a sleeve-type mechanical coupling as specified for compression-type joints in ASTM D3139. Provide jointing material in accordance with AWWA C111/A21.11 between pipe and sleeve-type mechanical couplings.

2.1.2 Valves

Provide a protective interior coating in accordance with AWWA C550.

2.1.2.1 Gate Valves 3 Inch Size and Larger on Buried Piping

AWWA C500, AWWA C509, AWWA C515, or UL 262 and:

a. AWWA C500: nonrising stem type with double-disc gate and mechanical-joint ends or push-on joint ends compatible for the adjoining pipe.

b. AWWA C509 or AWWA C515: nonrising stem type with mechanical-joint ends.

Gate valves open by counterclockwise rotation of the valve stem. Stuffing boxes have 0-ring stem seals. Stuffing boxes are bolted and constructed so as to permit easy removal of parts for repair. Gate valves have ends compatible with joining to the pipe used. Provide all valves from one manufacturer.

2.1.2.2 Reduced Pressure Double Check Valve Assembly

The reduced pressure backflow preventer shall consist of two independently operating, spring loaded cam-check valves with a hydraulically operated differential pressure relief valve located between and below the cam-checks, required test cocks and inlet and outlet resilient seat shut off valves. When normal flow exists, both check valves are open and the pressure in the area between the checks, called the zone, is a least 2 psi lower then the inlet pressure. The differential pressure relief valve is closed during normal flow.

If cessation of normal flow occurs, the differential pressure relief valve will automatically open and discharge to maintain the zone at least 2 psi lower than the inlet pressure. This action will prevent a backflow or backsiphonage condition. After the required differential is established, the differential pressure relief valve again closes.

The cam-checks include a stainless steel spring and cam-arm, rubber faced disc and a replaceable seat. The body shall be manufactured from 300 series stainless steel, lead free, with a single two-bolt grooved style access cover. No special tools shall be required for servicing. The relief valve shall be compact with a rolling diaphragm and no sliding seals. The relief valve shall discharge in a 360 degree radius.

The assembly shall have a rated working pressure of 175 psi and a rated hydrostatic pressure of 350 psi.

The assembly shall meet the American Society of Sanitary Engineering (ASSE) Standard and carry the ASSE seal or appear on the University of California approval list.

2.1.2.3 Check Valves

Provide a protective interior coating in accordance with AWWA C550. Swing-check type, AWWA C508 or UL 312 and:

a. AWWA C508: Iron or steel body and cover and flanged ends

b. UL 312: Cast iron or steel body and cover, flanged ends, and designed

for a minimum working pressure of 150 psi.

Materials for UL 312 check valves are to match the reference standards specified in AWWA C508. Provide check valves with a clear port opening. Provide spring-loaded check valves. Provide all check valves from one manufacturer.

2.1.2.4 Valve Boxes

Provide a valve box for each gate valve on buried piping. Construct adjustable valve boxes manufactured from cast iron of a size compatible for the valve on which it is used. Provide cast iron valve boxes with a minimum cover and wall thickness of 3/16 inch and conforming to ASTM A48/A48M, Class 35B. Coat the cast-iron box with a heavy coat of bituminous paint. Provide a round head. Cast the word "WATER" on the lid. The minimum diameter of the shaft of the box is 5 1/4 inches.

2.1.3 Backflow Preventers

Provide a cast iron AWWA C511 reduced pressure principle type backflow preventer meeting the following requirements:

a. Size: As indicated on the plans.

b. Flanged cast iron mounted gate valve.

c. Strainer of the same material as the backflow preventer.

The particular make, model, and size of backflow preventers to be installed must be included in the latest edition of the List of Approved Backflow Prevention Assemblies issued by the FCCCHR List and be accompanied by a backflow certificate of full approval from FCCCHR List. Select materials for piping, strainers, and valves used in assembly installation that are galvanically compatible. Materials joined, connected, or otherwise in contact are to have no greater than 0.25 V difference on the Anodic Index, unless separated by a dielectric type union or fitting.

2.1.4 Disinfection

Chlorinating materials are to conform to: Chlorine, Liquid: AWWA B301; Hypochlorite, Calcium and Sodium: AWWA B300.

2.2 ACCESSORIES

2.2.1 Pipe Restraint

2.2.1.1 Thrust Blocks

Use ASTM C94/C94M concrete having a minimum compressive strength of 2,500 psi at 28 days.

2.2.1.2 Joint Restraint

Provide restrained joints in accordance with NFPA 24, Chapter 10 and in accordance with ASTM F1674.

Provide mechanical joint restraint or metal harness fabricated by the pipe manufacturer.

2.2.2 Sleeve-Type Mechanical Couplings

Use AWWA C219 couplings to join plain-end piping by compression of a ring gasket at each end of the adjoining pipe sections. The coupling consists of one middle ring flared or beveled at each end to provide a gasket seat; two follower rings; two resilient tapered rubber gaskets; and bolts and nuts to draw the follower rings toward each other to compress the gaskets. Provide true circular middle ring and the follower rings sections free from irregularities, flat spots, and surface defects; provide for confinement and compression of the gaskets. For ductile iron and PVC pipe, use ASTM A536 ductile iron. Use gaskets for resistance to set after installation and to meet the requirements specified for gaskets for mechanical joint in AWWA C111/A21.11. Provide track-head type bolts ASTM A307, Grade A, with ASTM A563/A563M, Grade A nuts or round-head square-neck type ISO 8678 bolts with ASME B18.2.2 hex nuts. Provide 5/8 inch diameter bolts. Minimum number of bolts for each coupling is 5 for 6 inch pipe, 7 for 10 inch pipe, and 8 for 12 inch pipe. Shape bolt holes in follower rings to hold fast to the necks of the bolts used. Do not use mechanically coupled joints using a sleeve-type mechanical coupling as an optional method of jointing except where pipeline is adequately anchored to resist tension pull across the joint. Provide a tight flexible joint with mechanical couplings under reasonable conditions, such as pipe movements caused by expansion, contraction, slight settling or shifting in the ground, minor variations in trench gradients, and traffic vibrations. Match coupling strength to that of the adjoining pipeline.

2.2.3 Insulating Joints

Provide a rubber-gasketed insulating joint or dielectric coupling between pipe of dissimilar metals which will effectively prevent metal-to-metal contact between adjacent sections of piping.

2.2.4 Dielectric Fittings

Install dielectric fittings between threaded ferrous and nonferrous metallic pipe, fittings and valves, except where corporation stops join mains to prevent metal-to-metal contact of dissimilar metallic piping elements and compatible with the indicated working pressure.

2.2.5 Tracer Wire for Nonmetallic Piping

Provide a continuous bare copper or aluminum wire not less than 0.10 inch in diameter in sufficient length over each separate run of nonmetallic pipe.

2.2.6 Post Indicator

UL 789, FM 1110, color must be red.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Connections to Existing System

Perform all connections to the existing water system in the presence of the Contracting Officer.

3.1.2 Operation of Existing Valves

Do not operate valves within or directly connected to the existing water system unless expressly directed to do so by the Contracting Officer.

3.1.3 Earthwork

Perform earthwork operations in accordance with Section 31 00 00 EARTHWORK.

3.2 INSTALLATION

Install all materials in accordance with the applicable reference standard, manufacturers instructions and as indicated herein.

3.2.1 Piping

3.2.1.1 General Requirements

Install pipe, fittings, joints and couplings in accordance with the applicable referenced standard, the manufacturer's instructions and as specified herein.

3.2.1.1.1 Termination of Water Lines

Terminate the work covered by this section at a point approximately 5 feet from the building, unless otherwise indicated.

Do not lay water lines in the same trench with gas lines, fuel lines, electric wiring, or any other utility. Do not install copper tubing in the same trench with ferrous piping materials. Where nonferrous metallic pipe (i.e., copper tubing) crosses any ferrous piping, provide a minimum vertical separation of 12 inches between pipes.

3.2.1.1.2 Pipe Laying and Jointing

Remove fins and burrs from pipe and fittings. Before placing in position, clean pipe, fittings, valves, and accessories, and maintain in a clean condition. Provide proper facilities for lowering sections of pipe into trenches. Under no circumstances is it permissible to drop or dump pipe, fittings, valves, or other water line material into trenches. Cut pipe cleanly, squarely, and accurately to the length established at the site and work into place without springing or forcing. Inspect pipe and fittings prior to backfilling and repair as required. Replace a pipe or fitting that does not allow sufficient space for installation of jointing material. Blocking or wedging between bells and spigots is not permitted. Lay bell-and-spigot pipe with the bell end pointing in the direction of laying. Grade the pipeline in straight lines; avoid the formation of dips and low points. Support pipe at the design elevation and grade. Secure firm, uniform support. Wood support blocking is not permitted. Lay pipe so that the full length of each section of pipe and each fitting rests solidly on the pipe bedding; excavate recesses to accommodate bells, joints, and couplings. Provide anchors and supports for fastening work into place. Make provision for expansion and contraction of pipelines. Keep trenches free of water until joints have been assembled. At the end of each work day, close open ends of pipe temporarily with wood blocks or bulkheads. Do not lay pipe when conditions of trench or weather prevent installation. Provide a minimum of 3 feet depth of cover over top of pipe.

3.2.1.1.3 Tracer Wire

Install a continuous length of tracer wire for the full length of each run of metallic and nonmetallic pipe. Attach wire to top of pipe in such manner that it will not be displaced during construction operations.

3.2.1.1.4 Connections to Existing Water Lines

Make connections to existing water lines after coordination with the facility and with a minimum interruption of service on the existing line. Make connections to existing lines under pressure in accordance with the recommended procedures of the manufacturer of the pipe being tapped and as indicated, except as otherwise specified, tap concrete pipe in accordance with AWWA M9 for tapping concrete pressure pipe.

3.2.1.1.5 Sewer Manholes

No water piping is to pass through or come in contact with any part of a sewer manhole.

3.2.1.1.6 Water Piping Parallel With Sewer Piping

Lay water piping at least 10 feet horizontally from a sewer or sewer manhole whenever possible. Measure the distance edge-to-edge.

Unusual Conditions: When local conditions or barriers prevent a 10-foot lateral sepration, then:

(1) The water main shall be laid in a seperate trench and the bottom (invert) of the water piping shall be at least 18 inches above the top (crown) of the sewer piping. The water main can be laid in the same trench; however, the water main shall be laid on the opposite side of the trench on an undisturbed bench constructed 18-inches above the top of the sewer pipe.

(2) Where the horizontal separation cannot be obtained, the sewer and water piping shall be constructed of AWWA-ferrous pipe. All pipe shall be pressure tested in place without leakage prior to backfilling.

(3) The sewer manhole shall be of watertight construction and tested in place.

3.2.1.1.7 Water Piping Crossing Sewer Piping

(1) Normal Conditions: Water piping shall be laid to cross above sewer piping with a separation of at least 18 inches between the bottom of the water piping and the top of the sewer piping.

(2) Unusual Conditions: When local conditions prevent a vertical separation as described above, use the following construction:

(a) Water piping passing over sewer piping without a vertical separation of at least 18 inches between the top of the sewer piping and the bottom of the water piping; the provide adequate structural support for the water piping to prevent excessive deflection of the joints and the settling on and breaking of the sewer piping; and both the water piping and sewer piping shall be constructed of AWWA ferrous materials with joints equivalent to

water main standards for a minimum distance of 10 feet on each side of the point of crossing. For water and sewer mains, a 20 foot minimum section of AWWA ferrous piping shall be centered at the point of crossing so that joints shall be equidistant and as far as possible from the sewer piping.

(b) Water piping passing under sewer piping shall, in addition, be protected by providing a vertical separation of at least 18 inches between the bottom of the sewer piping and the top of the water piping; providing adequate structural support for the sewer piping to prevent excessive deflection of the joints and the settling on and breaking of the water piping; and both the water piping and sewer piping shall be constructed of AWWA ferrous materials with joints equivalent to water main standards for a minimum distance of 10 feet on each side of the point of crossing. For water and sewer mains, a 20 foot minimum section of AWWA ferrous piping shall be centered at the point of crossing that joints shall be equidistant and as far as possible from the sewer piping.

(c) Sewer Piping or Sewer Manholes: No water piping shall pass through or come in contact with any part of a sewer manhole.

3.2.1.1.8 Penetrations

Provide ductile-iron or Schedule 40 steel wall sleeves for pipe passing through walls of valve pits and structures. Fill annular space between walls and sleeves with rich cement mortar. Fill annular space between pipe and sleeves with mastic.

3.2.1.2 Ductile-Iron Piping

Unless otherwise specified, install pipe and fittings in accordance with the paragraph GENERAL REQUIREMENTS and with the requirements of AWWA C600 for pipe installation, joint assembly, valve-and-fitting installation, and thrust restraint.

a. Jointing: Make push-on joints with the gaskets and lubricant specified for this type joint; assemble in accordance with the applicable requirements of AWWA C600 and AWWA M41 for joint assembly. Make mechanical joints with the gaskets, glands, bolts, and nuts specified for this type joint; assemble in accordance with the applicable requirements of AWWA C600 and AWWA M41 for joint assembly and the recommendations of Appendix A to AWWA C111/A21.11. Make flanged joints with the gaskets, bolts, and nuts specified for this type joint. Make flanged joints up tight; avoid undue strain on flanges, fittings, valves, and other accessories. Align bolt holes for each flanged joint. Use full size bolts for the bolt holes; use of undersized bolts will not be permitted. Do not allow adjoining flange faces to be out of parallel to such degree that the flanged joint cannot be made watertight without overstraining the flange. When flanged pipe or fitting has dimensions that do not allow the making of a flanged joint as specified, replace it. Make insulating joints with the gaskets, sleeves, washers, bolts, and nuts previously specified for this type joint. Assemble insulating joints as specified for flanged joints, except that bolts with insulating sleeves are to be full size for the bolt holes. Ensure that there is no metal-to-metal contact between dissimilar metals after the joint has been assembled.

b. Allowable Deflection: Follow AWWA C600 and AWWA M41 for the maximum allowable deflection. If the alignment requires deflection in excess of the above limitations, provide special bends or a sufficient number of shorter lengths of pipe to achieve angular deflections within the limit set forth.

c. Exterior Protection: Completely encase buried ductile iron pipelines using Method C, with polyethylene film, in accordance with AWWA C105/A21.5.

3.2.1.3 PVC Water Main Pipe

Unless otherwise specified, install pipe and fittings in accordance with the paragraph GENERAL REQUIREMENTS and with the requirements of AWWA C605 for laying of pipe, joining PVC pipe to fittings and accessories, setting of fire hydrants, valves, and fittings; and with the recommendations for pipe joint assembly and appurtenance installation in AWWA M23, Chapter 7, "Installation in Trenches and Embankments."

a. Jointing: Make push-on joints with the elastomeric gaskets specified for this type joint, using either elastomeric-gasket bell-end pipe or elastomeric-gasket couplings. For pipe-to-pipe push-on joint connections, use only pipe with push-on joint ends having factory-made bevel; for push-on joint connections to metal fittings, valves, and other accessories, cut spigot end of pipe off square and re-bevel pipe end to a bevel approximately the same as that on ductile-iron pipe used for the same type of joint. Use a lubricant recommended by the pipe manufacturer for push-on joints. Assemble push-on joints for pipe-to-pipe joint connections in accordance with the requirements of AWWA C605 for laying the pipe and the recommendations in AWWA M23, Chapter 7, "Installation in Trenches and Embankments," for pipe joint assembly. Assemble push-on joints for connection to fittings, valves, and other accessories in accordance with the requirements of AWWA C605 for joining PVC pipe to fittings and accessories and with the requirements of AWWA C600 for joint assembly. Make compression-type joints/mechanical joints with the gaskets, glands, bolts, nuts, and internal stiffeners previously specified for this type joint; assemble in accordance with the requirements of AWWA C605 for joining PVC pipe to fittings and accessories, with the requirements of AWWA C600 for joint assembly, and with the recommendations of Appendix A to AWWA C111/A21.11. Cut off spigot end of pipe for compression-type joint/mechanical-joint connections and do not re-bevel. Assemble joints made with sleeve-type mechanical couplings in accordance with the recommendations of the coupling manufacturer using internal stiffeners as previously specified for compression-type joints.

b. Joint Offset: Construct joint offset in accordance AWWA C605. Do not exceed the minimum longitudinal bending as indicated by AWWA C605.

c. Fittings: Install in accordance with AWWA C605.

3.2.1.4 Fire Protection Service Lines for Sprinkler Supplies

Connect water service lines used to supply building sprinkler systems for fire protection to the water main in accordance with NFPA 24.

3.2.2 Backflow Preventers

Install backflow preventers of type, size, and capacity indicated a

minimum of 12 inch and a maximum of 36 inch above concrete base. Include valves and test cocks. Install according to the manufacturers requirements and the requirements of plumbing and health department and authorities having jurisdiction. Support NPS 2 1/2 inch and larger backflow preventers, valves, and piping near floor with 12 inch minimum air gap, and on concrete piers or steel pipe supports. Do not install backflow preventers that have a relief drain in vault or in other spaces subject to flooding. Do not install by-pass piping around backflow preventers.

3.2.3 Disinfection

Prior to disinfection, provide disinfection procedures, proposed neutralization and disposal methods of waste water from disinfection as part of the disinfection submittal. Disinfect new water piping and existing water piping affected by Contractor's operations in accordance with AWWA C651. Disinfect new water piping using the AWWA C651 continuous-feed method of chlorination. Ensure a free chlorine residual of not less than 10 parts per million after 24 hour holding period and prior to performing bacteriological tests.

3.2.4 Flushing

Perform bacteriological tests prior to flushing. Flush solution from the systems with domestic water until maximum residual chlorine content is within the range of 0.2 to 0.5 parts per million, the residual chlorine content of the distribution system, or acceptable for domestic use. Use AWWA C655 neutralizing chemicals. Water generated from the flushing of lines after disinfection or disinfection with hydrostatic testing must be land-applied in accordance with federal, state and local laws and regulations for land application. **No water used for disinfection and testing shall be allowed to enter the domestic water or sewer systems.**

3.2.5 Pipe Restraint

3.2.5.1 Concrete Thrust Blocks

Install concrete thrust blocks where indicated.

3.2.5.2 Restrained Joints

Install restrained joints in accordance with the manufacturer's instructions where indicated. For metal harness use tie rods and clamps as shown in NFPA 24. Provide metal harness fabricated by the pipe manufacturer and furnished with the pipe.

3.2.6 Valves

3.2.6.1 Gate Valves

Install gate valves, AWWA C500 and UL 262, in accordance with the requirements of AWWA C600 for valve-and-fitting installation and with the recommendations of the Appendix ("Installation, Operation, and Maintenance of Gate Valves") to AWWA C500. Install gate valves, AWWA C509 or AWWA C515, in accordance with the requirements of AWWA C600 for valve-and-fitting installation and with the recommendations of the Appendix ("Installation, Operation, and Maintenance of Gate Valves") to AWWA C509 or AWWA C515. Install gate valves on PVC and PVCO water mains in accordance with the recommendations for appurtenance installation in AWWA M23, Chapter 7,

"Installation." Make and assemble joints to gate valves as specified for making and assembling the same type joints between pipe and fittings.

3.2.6.2 Check Valves

Install check valves in accordance with the applicable requirements of AWWA C600 for valve-and-fitting installation, except as otherwise indicated. Make and assemble joints to check valves as specified for making and assembling the same type joints between pipe and fittings.

3.3 FIELD QUALITY CONTROL

3.3.1 Tests

Notify the Contracting Officer a minimum of five days in advance of hydrostatic testing. Coordinate the proposed method for disposal of waste water from hydrostatic testing. Perform field tests, and provide labor, equipment, and incidentals required for testing. Provide documentation that all items of work have been constructed in accordance with the Contract documents.

3.3.1.1 Hydrostatic Test

Test water mains and water service lines in accordance with the applicable specified standard, except for the special testing requirements given in paragraph entitled "Special Testing Requirements." Test ductile-iron water mains and water service lines in accordance with the requirements of AWWA C600 for hydrostatic testing. The amount of leakage on ductile-iron pipelines with mechanical-joints or push-on joints shall not exceed the amounts given in AWWA C600; no leakage will be allowed at joints made by any other method.

The maximum allowable leakage shall be as determined by the following formula:

$$L = (S \times D \times (P)^{1/2}) / 148{,}000$$

Where L = allowable leakage over the two hour test period in gallons per hour, S = length of the tested section in feet, D = diameter of the pipe in inches, and P = test pressure in psi.

3.3.1.1.1 Special Testing Requirements

For pressure test, use a hydrostatic pressure 50 psi greater than the maximum working pressure of the system, except that for those portions of the system having pipe size larger than 2 inches in diameter, hydrostatic test pressure shall be not less than 200 psi. Hold this pressure for not less than 2 hours. Prior to the pressure test, fill that portion of the pipeline being tested with water for a soaking period of not less than 24 hours. For leakage test, use a hydrostatic pressure not less than the maximum working pressure of the system. Leakage test may be performed at the same time and at the same test pressure as the pressure test.

3.3.1.2 Hydrostatic Sewer Test

The hydrostatic pressure sewer test will be performed in accordance with the applicable AWWA standard for the piping material or AWWA C600.

3.3.1.3 Leakage Test

For leakage test, use a hydrostatic pressure not less than the maximum working pressure of the system. Leakage test may be performed at the same time and at the same test pressure as the pressure test.

For PE pipe perform leak testing in accordance with AWWA M55, ASTM F2164.

3.3.1.4 Bacteriological Testing

Perform bacteriological tests in accordance with AWWA C651. For new water mains use Option A and obtain two sets of samples for coliform analysis, each sample being collected at least 16 hours apart. Take samples every 1,200 ft plus one set from the end of the line and at least one from each branch greater than one pipe length. Analyze samples by a North Carolina certified laboratory, and submit the results of the bacteriological samples.

3.3.1.5 Backflow Preventer Tests

After installation conduct Backflow Preventer Tests and provide test reports verifying that the installation meets the FCCCHR Manual Standards.

3.3.1.6 Special Testing Requirements for Fire Service

Test water mains and water service lines providing fire service or water and fire service in accordance with NFPA 24. The additional water added to the system must not exceed the limits given in NFPA 24

3.3.1.7 Tracer Wire Continuity Test

Test tracer wire for continuity after service connections have been completed and prior to final pavement or restoration. Verify that tracer wire is locatable with electronic utility locating equipment. Repair breaks or separations and re-test for continuity.

3.4 SYSTEM STARTUP

Water mains and appurtenances must be completely installed, disinfected, flushed, and satisfactory bacteriological sample results received prior to permanent connections being made to the active distribution system. Obtain approval by the Contracting Officer prior to the new water piping being placed into service.

3.5 CLEANUP

Upon completion of the installation of water lines and appurtenances, remove all debris and surplus materials resulting from the work.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 33 30 00

SANITARY SEWERAGE
05/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C94/C94M	(2025) Standard Specification for Ready-Mixed Concrete
ASTM C150/C150M	(2024) Standard Specification for Portland Cement
ASTM C443	(2021) Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
ASTM C972	(2024) Standard Test Method for Compression-Recovery of Tape Sealant
ASTM C1644	(2006; R 2017) Standard Specification for Resilient Connectors Between Reinforced Concrete On-Site Wastewater Tanks and Pipes
ASTM D412	(2016; R 2021) Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
ASTM D624	(2000; R 2020) Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers
ASTM D2321	(2020) Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D3034	(2016) Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D3212	(2020) Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM F477	(2014; R 2021) Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F949	(2025) Standard Specification for Poly(Vinyl Chloride) (PVC) Corrugated

Sewer Pipe with a Smooth Interior and Fittings

UNI-BELL PVC PIPE ASSOCIATION (UBPPA)

UBPPA UNI-B-6 (1998) Recommended Practice for Low-Pressure Air Testing of Installed Sewer Pipe

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Contractor's License; G

SD-02 Shop Drawings

Installation Drawings; G

SD-03 Product Data

Pipeline Materials

Gravity Pipe

SD-06 Test Reports

Hydrostatic Sewer Test; G

Low-Pressure Air Tests; G

SD-07 Certificates

Portland Cement

1.3 QUALITY CONTROL

1.3.1 Installer Qualifications

Install specified materials by a licensed underground utility Contractor licensed for such work in the state where the work is to be performed. Verify installing Contractor's License is current and state certified or state registered.

1.4 DELIVERY, STORAGE, AND HANDLING

1.4.1 Delivery and Storage

Check upon arrival; identify and segregate as to types, functions, and sizes. Store off the ground in a manner affording easy accessibility and not causing excessive rusting or coating with grease or other objectionable materials.

1.4.1.1 Piping

Inspect materials delivered to site for damage; store with minimum of handling. Store materials on site in enclosures or under protective coverings. Store plastic piping and jointing materials and rubber gaskets under cover out of direct sunlight. Do not store materials directly on the ground. Keep inside of pipes and fittings free of dirt and debris.

1.4.1.2 Cement, Aggregate, and Reinforcement

As specified in Section 03 30 53 MISCELLANEOUS CAST-IN-PLACE CONCRETE (SIDEWALKS).

1.4.2 Handling

Handle pipe, fittings, and other accessories in such manner as to ensure delivery to the trench in sound undamaged condition. Take special care not to damage linings of pipe and fittings; if lining is damaged, make satisfactory repairs. Carry, do not drag, pipe to trench. Store solvents, solvent compounds, lubricants, elastomeric gaskets, and any similar materials required to install the plastic pipe in accordance with the manufacturer's recommendation and discard those materials if the storage period exceeds the recommended shelf life. Discard solvents in use when the recommended pot life is exceeded.

PART 2 PRODUCTS

2.1 SYSTEM DESCRIPTION

2.1.1 Sanitary Sewer Gravity Pipeline

Provide mains and laterals of polyvinyl chloride (PVC) plastic pipe. Provide building connections of polyvinyl chloride (PVC) plastic pipe. Provide new and modify existing exterior sanitary gravity sewer piping and appurtenances. Provide each system complete and ready for operation. The exterior sanitary gravity sewer system includes equipment, materials, installation, and workmanship as specified herein more than 5 feet outside of building walls.

2.2 MATERIALS

Provide materials conforming to the respective specifications and other requirements specified below. Submit manufacturer's product specification,standard drawings or catalog cuts.

2.2.1 Gravity Pipe

2.2.1.1 PVC Gravity Sewer Piping

2.2.1.1.1 PVC Gravity Pipe and Fittings

ASTM D3034, SDR 35, or ASTM F949 with ends suitable for elastomeric gasket joints.

2.2.1.1.2 PVC Gravity Joints and Jointing Material

Provide joints conforming to ASTM D3212. Gaskets are to conform to ASTM F477.

2.2.2 Portland Cement

Submit certificates of compliance stating the type of cement used in manufacture of concrete pipe, fittings, septic tanks, and precast manholes. Provide portland cement conforming to ASTM C150/C150M, Type II for concrete used in concrete pipe, concrete pipe fittings, septic tanks, and manholes and type optional for cement used in concrete cradle, concrete encasement, and thrust blocking.

2.2.3 Portland Cement Concrete

Provide portland cement concrete conforming to ASTM C94/C94M, compressive strength of 4000 psi at 28 days, except for concrete cradle and encasement or concrete blocks for manholes. Concrete used for cradle and encasement is to have a compressive strength of 2500 psi minimum at 28 days. Protect concrete in place from freezing and moisture loss for 7 days.

2.2.4 Gaskets and Connectors

Provide gaskets for joints between manhole sections conforming to ASTM C443. Resilient connectors for making joints between manhole and pipes entering manhole are to conform to ASTM C1644.

2.2.5 External Preformed Rubber Joint Seals

An external preformed rubber joint seal is an accepted method of sealing cast iron covers to precast concrete sections to prevent ground water infiltration into sewer systems. All finished and sealed manholes constructed in accordance with paragraph entitled "Manhole Construction" are to be tested for leakage in the same manner as pipelines as described in paragraph entitled "Leakage Tests." The seal is to be multi-section with a neoprene rubber top section and all lower sections made of Ethylene Propylene Diene Monomer (EPDM) rubber with a minimum thickness of 60 mils. Each unit is to consist of a top and bottom section and have mastic on the bottom of the bottom section and mastic on the top and bottom of the top section. The mastic is to be a non-hardening butyl rubber sealant and seal to the cone/top slab of the manhole/catch basin and over the lip of the casting. Extension sections are to cover up to two more adjusting rings. Properties and values are listed in the following table:

Properties, Test Methods and Minimum Values for Rubber used in Preformed Joint Seals				
Physical Properties	Test Methods	EPDM	Neoprene	Butyl Mastic
Tensile, psi	ASTM D412	1840	2195	--
Elongation, percent	ASTM D412	553	295	350
Tear Resistance, ppi	ASTM D624 (Die B)	280	160	--
Rebound, percent, 5 minutes	ASTM C972 (mod.)	--	--	11

Properties, Test Methods and Minimum Values for Rubber used in Preformed Joint Seals				
Physical Properties	Test Methods	EPDM	Neoprene	Butyl Mastic
Rebound, percent, 2 hours	ASTM C972	--	--	12

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Installation Drawings

Submit Installation Drawings showing complete detail, both plan and side view details with proper layout and elevations.

3.2 INSTALLATION

Backfill after inspection by the Contracting Officer. Before, during, and after installation, protect plastic pipe and fittings from any environment that would result in damage or deterioration to the material. Keep a copy of the manufacturer's instructions available at the construction site at all times and follow these instructions unless directed otherwise by the Contracting Officer.

3.2.1 Connections to Existing Lines

Obtain approval from the Contracting Officer before making connection to existing line. Conduct work so that there is minimum interruption of service on existing line.

3.2.2 General Requirements for Installation of Pipelines

These general requirements apply except where specific exception is made in the following paragraphs entitled "Special Requirements."

3.2.2.1 Location

Terminate the work covered by this section at a point approximately 5 feet from the building, unless otherwise indicated. Install pressure sewer lines beneath water lines only, with the top of the sewer line being at least 2 feet below bottom of water line. When these separation distances can not be met, contact the Contracting Officer for direction.

3.2.2.1.1 Sanitary Piping Installation Parallel with Water Line

3.2.2.1.1.1 Normal Conditions

Install sanitary piping or manholes at least 10 feet horizontally from a water line whenever possible. Measure the distance from edge-to-edge.

3.2.2.1.1.2 Unusual Conditions

When local conditions prevent a horizontal separation of 10 feet, the sanitary piping or manhole may be laid closer to a water line provided that:

a. The top (crown) of the sanitary piping is to be at least 18 inches below the bottom (invert) of the water main.

b. Where this vertical separation cannot be obtained, construct the sanitary piping with AWWA-approved ductile iron water pipe pressure and conduct a hydrostatic sewer test without leakage prior to backfilling.

c. The sewer manhole is to be of watertight construction and tested in place.

3.2.2.1.2 Installation of Sanitary Piping Crossing a Water Line

3.2.2.1.2.1 Normal Conditions

Lay sanitary sewer piping by crossing under water lines to provide a separation of at least 18 inches between the top of the sanitary piping and the bottom of the water line whenever possible.

3.2.2.1.2.2 Unusual Conditions

When local conditions prevent a vertical separation described above, use the following construction:

a. Construct sanitary piping passing over or under water lines with AWWA-approved ductile iron water pressure piping and conduct a hydrostatic sewer test without leakage prior to backfilling.

b. Protect sanitary piping passing over water lines by providing:

(1) A vertical separation of at least 18 inches between the bottom of the sanitary piping and the top of the water line.

(2) Adequate structural support for the sanitary piping to prevent excessive deflection of the joints and the settling on and breaking of the water line.

(3) That the length, minimum 20 feet, of the sanitary piping be centered at the point of the crossing so that joints are equidistant and as far as possible from the water line.

3.2.2.1.3 Sanitary Sewer Manholes

No water piping must pass through or come in contact with any part of a sanitary sewer manhole.

3.2.2.2 Earthwork

Perform earthwork operations in accordance with Section 31 00 00 EARTHWORK.

3.2.2.3 Pipe Laying and Jointing

Inspect each pipe and fitting before and after installation; replace those found defective and remove from site. Provide proper facilities for lowering sections of pipe into trenches. Lay nonpressure pipe with the bell ends in the upgrade direction. Adjust spigots in bells to give a uniform space all around. Blocking or wedging between bells and spigots or tongues and grooves will not be permitted. Replace by one of the

proper dimensions, pipe or fittings that do not allow sufficient space for installation of joint material. At the end of each work day, close open ends of pipe temporarily with wood blocks or bulkheads.

3.2.3 Special Requirements

3.2.3.1 Installation of PVC Piping

Install pipe and fittings in accordance with paragraph entitled "General Requirements for Installation of Pipelines" of this section and with the requirements of ASTM D2321 for laying and joining pipe and fittings. Make joints with the gaskets specified for joints with this piping and assemble in accordance with the requirements of ASTM D2321 for assembly of joints. Make joints to other pipe materials in accordance with the recommendations of the plastic pipe manufacturer.

3.2.4 Miscellaneous Construction and Installation

3.2.4.1 Connecting to Existing Manholes

Connect pipe to existing manholes such that finish work will conform as nearly as practicable to the applicable requirements specified for new manholes, including all necessary concrete work, cutting, and shaping. Center the connection on the manhole. Holes for the new pipe are be of sufficient diameter to allow packing cement mortar around the entire periphery of the pipe but no larger than 1.5 times the diameter of the pipe. Cut the manhole in a manner that will cause the least damage to the walls.

3.2.4.2 Metal Work

3.2.4.2.1 Workmanship and Finish

Perform metal work so that workmanship and finish will be equal to the best practice in modern structural shops and foundries. Form iron to shape and size with sharp lines and angles. Do shearing and punching so that clean true lines and surfaces are produced. Make castings sound and free from warp, cold shuts, and blow holes that may impair their strength or appearance. Give exposed surfaces a smooth finish with sharp well-defined lines and arises. Provide necessary rabbets, lugs, and brackets wherever necessary for fitting and support.

3.2.4.2.2 Field Painting

After installation, clean cast-iron frames, covers, gratings, and steps not buried in concrete to bare metal, remove mortar, rust, grease, dirt, and other deleterious materials and apply a coat of bituminous paint. Do not paint surfaces subject to abrasion.

3.3 FIELD QUALITY CONTROL

The Contracting Officer will conduct field inspections and witness field tests specified in this section. Be able to produce evidence, when required, that each item of work has been constructed in accordance with the drawings and specifications.

3.3.1 Tests

Perform field tests and provide labor, equipment, and incidentals required

for testing.

3.3.1.1 Hydrostatic Sewer Test

When unusual conflicts are encountered between sanitary sewer and waterlines a hydrostatic pressure sewer test will be performed in accordance with the applicable AWWA standard for the piping material or AWWA C600.

3.3.1.2 Leakage Tests for Nonpressure Lines

Test lines for leakage by either infiltration tests and exfiltration tests. When necessary to prevent pipeline movement during testing, place additional backfill around pipe sufficient to prevent movement, but leaving joints uncovered to permit inspection. When leakage or pressure drop exceeds the allowable amount specified, make satisfactory correction and retest pipeline section in the same manner. Correct visible leaks regardless of leakage test results.

3.3.1.2.1 Low-Pressure Air Tests

3.3.1.2.1.1 PVC Pipelines

Test PVC pipe in accordance with UBPPA UNI-B-6. The allowable pressure drop is located in UBPPA UNI-B-6. Make calculations in accordance with the Appendix to UBPPA UNI-B-6.

3.3.2 Field Tests for Cast-In-Place Concrete

Field testing requirements are covered in Section 03 30 53 MISCELLANEOUS CAST-IN-PLACE CONCRETE (SIDEWALKS).

-- End of Section --

SECTION 33 40 00

STORMWATER UTILITIES
11/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A48/A48M	(2022) Standard Specification for Gray Iron Castings
ASTM C231/C231M	(2024) Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C270	(2025b) Standard Specification for Mortar for Unit Masonry
ASTM D1751	(2018) Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D1752	(2018) Standard Specification for Preformed Sponge Rubber, Cork and Recycled PVC Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM D2321	(2020) Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D2564	(2020) Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems
ASTM D3034	(2016) Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D3212	(2020) Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM F477	(2014; R 2021) Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Pipe; G

SD-07 Certificates

Hydrostatic Test on Watertight Joints; G

SD-08 Manufacturer's Instructions

Placing Pipe; G

1.3 DELIVERY, STORAGE, AND HANDLING

1.3.1 Delivery and Storage

Inspect materials delivered to site for damage and unload and store materials with minimumal handling. Do not store materials directly on the ground. Keep the inside of pipes and fittings free of dirt and debris. Before, during, and after installation, protect plastic pipe and fittings from any environment that would result in damage or deterioration to the material. Keep a copy of the manufacturer's instructions available at the construction site at all times and follow these instructions unless directed otherwise by the Contracting Officer. Store solvents, solvent compounds, lubricants, elastomeric gaskets, and any similar materials required to install plastic pipe in accordance with the manufacturer's recommendations and discard if the storage period exceeds the recommended shelf life. Discard solvents in use when the recommended pot life is exceeded.

1.3.2 Handling

Handle materials in a manner that ensures delivery to the trench in sound, undamaged condition. Carry pipe to the trench.

PART 2 PRODUCTS

2.1 PIPE FOR CULVERTS AND STORM DRAINS

Pipe sizes for culverts and storm drains are indicated on the drawings.

2.1.1 Poly Vinyl Chloride (PVC) Pipe

2.1.1.1 Type PSM PVC Pipe

ASTM D3034, maximum SDR 35.

2.2 PIPE JOINTS

2.2.1 PVC Plastic Pipe

Provide solvent cement or elastomeric gasket type joints in accordance

with the specification for the pipe and as recommended by the pipe manufacturer. Use solvent cement conforming to ASTM D2564. Provide gaskets for elastomeric joints conforming to ASTM F477.

2.3 MISCELLANEOUS MATERIALS

2.3.1 Concrete

Concrete shall have a minimum compressive strength of 3,000 psi at 28 days. Provide air content by volume of concrete mixture, based on measurements made immediately after discharge from the mixer, of 5 to 7 percent when maximum size of coarse aggregate exceeds 1-1/2 inches. Determine air content in accordance with ASTM C231/C231M. Provide a minimum concrete covering over steel reinforcing of not less than 1 inch thick for covers and not less than 1-1/2 inches thick for walls and flooring. For concrete deposited directly against the ground, provide a covering thickness of at least 3 inches between steel and ground. Provide expansion-joint filler material conforming to ASTM D1751, or ASTM D1752, or provide be resin-impregnated fiberboard conforming to the physical requirements of ASTM D1752.

2.3.2 Mortar

Mortar is not allowed for pipe joints. Provide mortar for pipe connections to drainage structures conforming to ASTM C270, Type M, except that the maximum placement time will be 1 hour. Provide a sufficient quantity of water in the mixture to produce a stiff workable mortar but in no case may the quantity exceed 5 gallons of water per sack of cement. Use water that is clean and free of harmful acids, alkalis, and organic impurities. Use the mortar within 30 minutes after the ingredients are mixed with water.

2.3.3 Downspout Boots

Use boots conforming to ASTM A48/A48M, Class 30B or 35B of the size and shape indicated for connecting exterior downspouts to the storm-drainage system.

2.4 TESTS, INSPECTIONS, AND VERIFICATIONS

2.4.1 Hydrostatic Test on Watertight Joints

2.4.1.1 PVC Pipe

Provide joints in PVC plastic pipe meeting the test requirements in ASTM D3212.

PART 3 EXECUTION

3.1 EXCAVATION FOR PIPE CULVERTS, BOX CULVERTS, STORM DRAINS, AND DRAINAGE STRUCTURES

Excavate trenches, excavate for appurtenances and backfill for culverts and storm drains, in accordance with the applicable portions of Section 31 00 00 EARTHWORK and the requirements specified below.

3.1.1 Trenching

Excavate trenches to the width indicated on the drawings or as specified

herein. Trench width should permit satisfactory jointing and thorough tamping of the bedding material under and around the pipe. Place sheeting and bracing, where required, within the trench width as specified, without any overexcavation.

3.1.2 Removal of Rock

Replace rock in either ledge or boulder formation with suitable materials to provide a compacted earth cushion. Provide a compacted earth cushion between unremoved rock and the pipe with a thickness of at least 8 inches or 1/2 inch for each foot of fill over the top of the pipe, whichever is greater, but not more than three-fourths the nominal diameter of the pipe. Maintain the cushion under the bell as well as under the straight portion of the pipe where bell-and-spigot pipe is used. Provide a compacted earth cushion between unremoved rock and the box culvert of at least 8 inches in thickness for concrete box culverts. Excavate rock as specified and defined in Section 31 00 00 EARTHWORK.

3.1.3 Removal of Unstable Material

Where wet or otherwise unstable soil incapable of properly supporting the pipe or box culvert, as determined by the Contracting Officer, is unexpectedly encountered in the bottom of a trench, remove such material to the depth required and replace with select granular material to the proper grade. Compact select granular material as specified in paragraph FINAL BACKFILL. When removal of unstable material is due to the fault or neglect of the Contractor while performing shoring and sheeting, water removal, or other specified requirements, perform such removal and replacement at no additional cost to the Government.

3.2 BEDDING AND INITIAL BACKFILL

Provide a firm bedding foundation of uniform density throughout the entire length of the pipe or box culvert.

3.2.1 Plastic Pipe

Provide bedding for PVC, PE, SRPE and PP pipe meeting the requirements of ASTM D2321. Use Class IB or II material for PVC, PE, SRPE pipe bedding, haunching, and initial backfill. Use Class I, II, or III material for PP pipe bedding, haunching and initial backfill.

3.3 PLACING PIPE

Submit printed copies of the pipe or box culvert manufacturer's recommended pipe or box culvert installation procedures prior to installation. Thoroughly examine each section of pipe or box culvert before being laid; do not use defective or damaged pipe. Protect plastic pipe, excluding SRPE pipe, from exposure to direct sunlight prior to laying, if necessary to maintain adequate pipe stiffness and meet installation deflection requirements. Lay pipelines to the grades and alignment indicated. Provide proper facilities for lowering sections of pipe into trenches. Place lifting lugs in vertically elongated corrugated steel or aluminum pipe in the same vertical plane as the major axis of the pipe. Do not lay pipe in water or when trench conditions or weather are unsuitable for such work. Divert drainage or dewater trenches during construction as necessary. Deflection of installed flexible pipe must not exceed the following limits:

TYPE OF PIPE	MAXIMUM ALLOWABLE DEFLECTION (percent)
Corrugated Steel and Aluminum	5
Ductile Iron Culvert	3
Plastic (PVC)	5

3.3.1 PVC Pipe

Lay pipe proceeding upgrade with spigot ends of bell-and-spigot pipe and tongue ends of tongue-and-groove pipe pointing in the direction of the flow.

3.4 JOINTING

3.4.1 Concrete Pipe

3.5 INSTALLATION OF TRACER WIRE AND WARNING TAPE

Install warning tape above all storm drain pipe in accordance with Section 31 00 00 EARTHWORK.

3.6 FINAL BACKFILL

Backfill trenches with satisfactory material deposited in layers of a maximum of 8 inches loose thickness and compacted to 90 percent of maximum density for cohesive soils and 95 percent of maximum density for cohesionless soils in accordance with Section 31 00 00 EARTHWORK. Testing is the responsibility of the Contractor and will be performed at no additional cost to the Government. Unless otherwise specified, determine field in-place density of final backfill at a frequency of one test per 50 linear feet, or fraction thereof, of each lift of backfill. Submit test results in accordance with Section 31 00 00 EARTHWORK. Do not displace or damage pipe or box when compacting final backfill by rolling or operating heavy equipment parallel with the pipe or box. Movement of construction machinery over a culvert or storm drain at any stage of construction will be at the Contractor's risk. Repair or replace any damaged pipe. Protect concrete pipes with a minimum of 3 feet of cover prior to permitting heavy construction equipment to pass over them during construction.

3.7 FIELD QUALITY CONTROL

3.7.1 Tests

Testing is the responsibility of the Contractor. Perform all testing and retesting at no additional cost to the Government.

3.7.2 Inspection

3.7.2.1 Post-Installation Inspection

Inspect each segment of pipe for alignment, settlement, joint separations, soil migration through the joint, cracks, buckling, bulging and

deflection. An engineer must evaluate all defects to determine if any remediation or repair is required.

3.7.3 Repair of Defects

3.7.3.1 Leakage Test

When leakage exceeds the maximum amount specified, correct source of excess leakage by replacing damaged pipe and gaskets and retest.

3.7.3.2 Inspection

Replace pipe or repair defects indicated in the Post-Installation Inspection Report.

3.8 PROTECTION

Protect storm drainage piping and adjacent areas from superimposed and external loads during construction.

3.9 WARRANTY PERIOD

Pipe segments found to have defects during the warranty period must be replaced with new pipe and retested.

-- End of Section --

SECTION 33 61 14

EXTERIOR BURIED PREINSULATED WATER PIPING
02/10

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.18	(2021) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.24	(2022) Cast Copper Alloy Pipe Flanges, Flanged Fittings, and Valves Classes 150, 300, 600, 900, 1500, and 2500
ASME B31.1	(2024) Power Piping

ASTM INTERNATIONAL (ASTM)

ASTM A193/A193M	(2025) Standard Specification for Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service and Other Special Purpose Applications
ASTM A194/A194M	(2024) Standard Specification for Carbon Steel, Alloy Steel, and Stainless Steel Nuts for Bolts for High-Pressure or High-Temperature Service, or Both
ASTM B32	(2020) Standard Specification for Solder Metal
ASTM B88	(2022) Standard Specification for Seamless Copper Water Tube
ASTM D229	(2019) Standard Test Methods for Rigid Sheet and Plate Materials Used for Electrical Insulation
ASTM D1330	(2004; R 2010) Rubber Sheet Gaskets
ASTM D1784	(2020) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D2996	(2017) Standard Specification for Filament-Wound "Fiberglass"

(Glass-Fiber-Reinforced
Thermosetting-Resin) Pipe

1.2 SYSTEM DESCRIPTION

Provide new exterior buried factory-prefabricated preinsulated water piping system to the first piping connection aboveground or within each building complete and ready for operation. Piping system includes hot domestic water piping, recirculating hot domestic water piping, chilled water piping, and related work . Hot domestic water piping within each building is specified under Section 22 00 00 PLUMBING, GENERAL PURPOSE. Chilled water piping within each building is specified under Section 23 64 26 CHILLED WATER PIPING SYSTEMS.

1.3 SUBMITTALS

Government approval is required for all submittals. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Factory-prefabricated preinsulated water piping system

Preinsulated plastic pipe field joints

Show layout of piping system. Drawings must have Professional Engineer Seal.

SD-03 Product Data

Pipe, fittings, and end connections

Factory-prefabricated preinsulated water piping system

SD-07 Certificates

Certification of welders' qualifications

SD-08 Manufacturer's Instructions

Installation manual for buried factory-prefabricated preinsulated water piping system

1.4 QUALITY ASSURANCE

1.4.1 Certification of Welders' Qualifications

Submit prior to site welding of steel piping; certifications shall be not more than one year old.

PART 2 PRODUCTS

2.1 BURIED FACTORY-PREFABRICATED PREINSULATED WATER PIPING SYSTEM

Piping (pipe, fittings, and end connections) system shall be suitable for working pressure of 125 psig at 250 degrees F, except plastic polyvinyl chloride (PVC) chilled water piping shall be suitable for working pressure

of 125 psig at 75 degrees F. Piping system shall withstand H-20 highway loading with 2 feet of compacted backfill over top of conduit. Mark each section of conduit with fabricator's name, product identification, and publications to which the items conform. Provide each section of carrier pipe including factory-applied insulation and conduit, with waterproof conduit ends at both ends of each section of carrier pipe, except for piping systems which have the field joints insulated and covered with waterproof shrink sleeves.

2.1.1 Factory-Applied Insulation

Polyurethane or polyisocyanate insulation, minimum density of 1.7 pcf, rated for not less than 250 degrees F, completely filling space between carrier pipe and conduit.

2.1.2 Factory-Applied Conduit

Conduit material, size, and thickness shall be as follows:

Carrier Pipe (Inches)	Minimum Conduit Size (Inches)	Minimum Conduit Thickness (Inches)
2	4	0.060
3	6	0.060
4	8	0.080
6	10	0.100
8	12	0.120
10	14	0.120

a. Plastic PVC pipe conduit: ASTM D1784, Class 12454-B compound extruded seamless PVC plastic pipe.

b. Plastic RTR pipe conduit: ASTM D2996, filament-wound, fiberglass RTR plastic pipe, without liner.

c. Plastic RTR factory lay-up conduit: Conduit shall be machine-applied continuous rovings of fiberglass strands saturated with isophthalic polyester or epoxy resin filament wound in helical pattern directly to the outer surface of the pipe insulation. In lieu of minimum conduit size for each size of carrier pipe, provide minimum of one inch thick insulation for 2 inch carrier pipe and provide minimum of 1.5 inch thick insulation for 3 inch and larger carrier pipe.

2.1.3 Factory-Applied End Seals

Provide watertight end seal, or factory lay-up type end seal between carrier pipe and conduit. Provide sufficient surface bonding area between carrier pipe and conduit to ensure permanent watertight end seal suitable for use with temperature limits of carrier pipe.

2.1.4 Factory-Prefabricated Carrier Piping

Pipe, fittings, flanges, and couplings shall be marked with manufacturer's name, product identification, and publication to which items conform. Carrier piping shall be as specified in this section. Buried carrier pipe connections between straight sections of pipe beyond 5 feetexterior of buildings may be manufacturer's standard O-ring connections designed to absorb pipe expansion and contraction at working pressure of 125 psig with no leakage. Connections at elbows and tees shall be other than O-ring connections.

2.2 CARRIER PIPING

2.2.1 Copper Tubing

Provide copper tubing for hot domestic water piping, recirculating hot domestic water piping, chilled water piping, chilled-hot water piping, and hot water piping.

a. Copper tubing: Provide ASTM B88, Type K copper tubing for buried factory-prefabricated preinsulated piping and for aboveground piping. Provide ASME B16.18 or ASME B16.22 solder joint fittings, unions, and flanges; provide adapters as required.

b. Solder for copper tubing: Provide ASTM B32, 95-5 tin-antimony solder or provide Plumbing Code approved lead-free solder.

c. Flanged connections: Provide ASME B16.24, Class 150, solder joint flat face flanged connections.

d. O-ring connections: Provide between straight sections of pipe beyond 5 feet of exterior of buildings.

2.3 FLANGED CONNECTIONS

Provide ASME Class 150 flat face flanged connections.

a. Gaskets: ASTM D1330, except Shore A durometer hardness shall be 55 to 65, 0.125 inch thick ethylene propylene. Provide one piece factory cut full-face gaskets.

b. Bolts: ASTM A193/A193M, Grade B7. Extend minimum of two full threads beyond nut with bolts tightened to required torque.

c. Nuts: ASTM A194/A194M, Grade 7, with Teflon coated threads.

d. Washers: Provide galvanized steel flat circular washers under bolt heads and nuts.

e. Electrically isolating (insulating) gaskets for connections between metal flanges: Provide ASTM D229 electrical insulating material of 1000 ohms minimum resistance. Provide one piece factory cut insulating gaskets between flanges. Provide silicon-coated fiberglass insulating sleeves between bolts and holes in flanges; bolts may have reduced shanks of diameter not less than diameter at root of threads. Provide 0.125 inch thick high-strength insulating washers next to flanges and provide stainless steel flat circular steel washers over insulating washers and under bolt heads and nuts. Provide bolts 0.5 inch longer than standard length to compensate for thicker insulating

gaskets and washers under bolt heads and nuts.

2.4 BURIED WARNING AND IDENTIFICATION TAPE

Provide detectable aluminum foil plastic backed tape or detectable magnetic plastic tape manufactured specifically for warning and identification of buried piping. Tape shall be detectable by an electronic detection instrument. Provide tape in rolls, 3 inches minimum width, color coded for the utility involved with warning and identification imprinted in bold black letters continuously and repeatedly over entire tape length. Warning and identification shall read "CAUTION BURIED PREINSULATED WATER PIPING BELOW" or similar wording. Use permanent code and letter coloring unaffected by moisture and other substances contained in trench backfill material.

2.5 CONCRETE THRUST BLOCKS

Provide concrete thrust blocks as specified in Section 03 30 00 CAST-IN-PLACE CONCRETE. Concrete shall be of 4000 psi minimum 28 day compressive strength, air-entrained admixture (3.6 ounces per cubic yard) with water-reducing admixture (22 ounces per cubic yard).

2.6 PIPE SLEEVES

Provide where piping passes entirely through walls and floors. Provide sleeves of sufficient length to pass through entire thickness of walls and floors. Provide one inch minimum clearance between exterior of piping or pipe insulation, and interior of sleeve or core-drilled hole. Firmly pack space with mineral wool insulation. Seal space at both ends of sleeve or core-drilled hole with plastic waterproof cement which will dry to a firm but pliable mass, or provide mechanically adjustable segmented elastomeric seal. In fire walls and fire floors, seal both ends of sleeves or core-drilled holes with UL listed fill, void, or cavity material.

a. Sleeves in masonry and concrete walls and floors: Provide hot-dip galvanized steel, ductile-iron, or cast-iron sleeves. Core drilling of masonry and concrete may be provided in lieu of sleeves when cavities in the core-drilled hole are grouted smooth.

b. Sleeves in other than masonry and Concrete walls and floors: Provide 26 gage galvanized steel sheet.

2.7 ESCUTCHEON PLATES

Provide split hinge type metal plates for piping entering walls and floors in exposed spaces. Provide polished stainless steel plates or chromium-plated finish on copper alloy plates in finished spaces. Provide paint finish on metal plates in unfinished spaces.

PART 3 EXECUTION

3.1 INSTALLATION

Installation of exterior buried factory-prefabricated preinsulated water piping systems shall be in accordance with manufacturer's installation manual. Welding of steel piping including qualification of welders shall be in accordance with ASME B31.1, metallic arc process. Deviations shall not be permitted unless authorized in writing by Contracting Officer. Install piping straight and true to bear evenly on sand bedding material.

Installation and field assembly of plastic RTR piping shall be in accordance with the Federal Agency Approved Brochure.

a. Cleaning of piping: Keep interior and ends of new piping and existing piping affected by the Contractor's operations, cleaned of water and foreign matter during installation by means of plugs or other approved methods. When work is not in progress, securely close open ends of pipe and fittings to prevent entry of water and foreign matter. Inspect piping before placing into position.

b. Demolition: Remove materials so as not to damage materials which are to remain. Replace existing work damaged by the Contractor's operations with new work of the same construction.

3.2 FIELD JOINTS

a. Carrier piping joints without concrete anchor: Pressure test and approve piping joints. Provide joints with polyurethane or polyisocyanate insulation of same type and thickness as insulation on carrier piping. Provide waterproof shrink sleeves to cover insulation and overlap not less than 6 inches of each end of conduit section.

b. Carrier piping joints with concrete anchor: Pressure test and approve piping joints. Provide each elbow and tee with concrete anchors (thrust blocks). Provide waterproof end seals between carrier piping and conduit adjacent to each carrier pipe fitting. Encase carrier pipe fitting and at least 2 inches of each end of conduit with a minimum of 6 inches of concrete.

3.3 BURIED FACTORY-PREFABRICATED PREINSULATED PIPE INSTALLATION

a. Assembly and alignment: Assemble carrier pipe and fittings according to manufacturer's installation manual. Maintain proper alignment during assembly of joints.

b. Bedding: Accurately grade trench bedding with a minimum of 6 inches of manufactured or natural sand. Backfill sand to a minimum of 6 inches above and below conduit. Lay bedding to firmly support conduit along entire length.

c. Concrete thrust blocks: Encase each elbow and tee of carrier pipe in thrust block with minimum of 3 square feet of thrust-bearing surface cast against undisturbed soil, minimum pipe-to-bearing surface single dimension of 10 inches perpendicular to bearing surface, and minimum volume of 9 cubic feet, except as indicated otherwise. Disturbed soil under and around thrust blocks shall be compacted.

3.4 FIELD QUALITY CONTROL

Before final acceptance of work, test each system to demonstrate compliance with contract requirements. Thoroughly flush and clean piping before placing in operation. Flush piping at minimum velocity of 8 fps. Correct defects in the work and repeat tests until work is in compliance with contract requirements. Furnish potable water, electricity, instruments, connecting devices, and personnel for tests.

a. Field tests of carrier piping: Do not cover carrier piping joints with insulation or concrete anchors (thrust blocks), until carrier piping joints pass field tests.

b. Hydrostatic pressure test: Test piping system at 200 psig for minimum holding period of 2 hours during which time pressure shall not drop more than 4 psi; test plastic RTR piping in accordance with Federal Agency Approved Brochure. Pressure drop greater than 4 psicorrected for temperature variation constitutes failure. Valve off piping system and disconnect method of piping system pressurization before starting the 2 hour pressure holding period. During hydrostatic pressure test, examine piping system for leaks. Repair leaking joints, replace damaged and porous pipe and fittings with new materials, and repeat tests.

c. Thrust blocks: If O-ring connections are used, provide temporary thrust blocks prior to hydrostatic pressure testing of piping system. Place bedding and backfill around center portion of piping system, leaving thrust blocks and field joints clear for observation. After successful completion of hydrostatic pressure test, cast concrete thrust blocks.

d. Field inspections: Prior to initial operation, inspect piping system for compliance with drawings, specifications, and manufacturer's submittals.

3.5 DISINFECTION

Disinfect new hot domestic water piping under Section 22 00 00 PLUMBING, GENERAL PURPOSE.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 33 71 01

OVERHEAD TRANSMISSION AND DISTRIBUTION
02/26

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ALLIANCE FOR TELECOMMUNICATIONS INDUSTRY SOLUTIONS (ATIS)

ATIS ANSI O5.1	(2017) Wood Poles -- Specifications & Dimensions

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2024) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM B117	(2025) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B398/B398M	(2022) Standard Specification for Aluminum-Alloy 6201-T81 Wire for Electrical Purposes
ASTM B399/B399M	(2023) Standard Specification for Concentric-Lay-Stranded Aluminum-Alloy 6201-T81 Conductors
ASTM D1654	(2008; R 2016; E 2017) Standard Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
IEEE C2	(2023) National Electrical Safety Code
IEEE C37.42	(2016) Specifications for High-Voltage (> 1000 V) Fuses and Accessories
IEEE C62.11	(2020) Standard for Metal-Oxide Surge Arresters for Alternating Current Power Circuits (>1kV)

IEEE C135.22	(1988) Standard for Zinc-Coated Ferrous Pole-Top Insulator Pins with Lead Threads for Overhead Line Construction

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C29.3	(2015; R 2022) American National Standard for Wet Process Porcelain Insulators - Spool Type
ANSI C29.5	(2022) Wet-Process Porcelain Insulators (Low and Medium Voltage Pin Type)
NEMA WC 70	(2021) Power Cable Rated 2000 Volts or Less for the Distribution of Electrical Energy
NEMA/ANSI C29.7	(1996; 2002) American National Standard for Wet Process Porcelain Insulators - High-Voltage Line Post Type

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

U.S. DEPARTMENT OF AGRICULTURE (USDA)

RUS 202-1	(2004) List of Materials Acceptable for Use on Systems of RUS Electrification Borrowers

UL SOLUTIONS (UL)

UL 6	(2022) UL Standard for Safety Electrical Rigid Metal Conduit-Steel
UL 486A-486B	(2025) UL Standard for Safety Wire Connectors

1.2 RELATED REQUIREMENTS

Section 26 08 00 APPARATUS INSPECTION AND TESTING applies to this section with additions and modifications specified herein.

1.3 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, must be as defined in IEEE 100.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance

with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Conductors; G

Insulators; G

Cutouts; G

Surge Arresters; G

SD-06 Test Reports

Wood Crossarm Inspection Report

Field Test Plan; G

Field Quality Control; G

Ground Resistance Test Reports; G,

G

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals, Data Package 5; G

1.5 QUALITY ASSURANCE

1.5.1 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory except of NFPA 70 when more stringent requirements are specified or indicated, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Equipment, materials, installation, and workmanship must be in accordance with the mandatory and advisory provisions of NFPA 70 and IEEE C2 unless more stringent requirements are specified or indicated.

1.5.2 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products must have been in satisfactory commercial or industrial use for 2-years prior to bid opening. The 2-year period must include applications of equipment and materials under similar circumstances and of similar size. The product must have been on sale on the commercial market through advertisements, manufacturers' catalogs, or

brochures during the 2-year period. Where two or more items of the same class of equipment are required, these items must be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.2.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.2.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site must not be used, unless specified otherwise.

1.5.3 Ground Resistance Test Reports

Submit the measured ground resistance of grounding system. When testing grounding electrodes and grounding systems, identify each grounding electrode and each grounding system for testing. Include the test method and test setup (i.e. pin location) used to determine ground resistance and soil conditions at the time the measurements were made.

1.5.4 Wood Crossarm Inspection Report

Furnish an inspection report from an independent inspection agency, approved by the Contracting Officer, stating that offered products comply with applicable AWPA and RUS standards. The RUS approved Quality Mark "WQC" on each crossarm will be accepted, in lieu of inspection reports, as evidence of compliance with applicable AWPA treatment standards.

1.5.4.1 Field Test Plan

Provide a proposed field test plan 30 days prior to testing the installed system. No field test must be performed until the test plan is approved. The test plan must consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

1.6 OPERATIONS AND MAINTENANCE DATA

Provide operation and maintenance manuals for systems in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA that provides basic data relating to the design, operation, and maintenance of the electrical distribution system.

1.6.1 Additions to Operations and Maintenance Data

In addition to requirements of Data Package 5, include the following in the operation and maintenance manuals provided:

a. Assembly and installation drawings

b. Prices for spare parts and supply list

c. Date of purchase

1.7 DELIVERY, STORAGE, AND HANDLING

Devices and equipment must be visually inspected by the Contractor when received and prior to acceptance from conveyance. Protect stored items from the environment in accordance with the manufacturer's published instructions. Replace damaged items. Store oil filled transformers and switches in accordance with the manufacturer's requirements. Store wood poles held in storage for more than 2 weeks in accordance with ATIS ANSI O5.1. Handle wood poles in accordance with ATIS ANSI O5.1, except that pointed tools capable of producing indentations more than inch in depth must not be used. Nails and holes are not permitted in top of poles.

1.8 WARRANTY

The equipment items must be supported by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

Consider materials specified herein or shown on contract drawings which are identical to materials listed in RUS 202-1 as conforming to requirements. Provide equipment and component items, not hot-dip galvanized or porcelain enamel finished, with corrosion-resistant finishes which must withstand 120 hours of exposure to the salt spray test specified in ASTM B117 without loss of paint or release of adhesion of the paint primer coat to the metal surface in excess of 1/16 inch from the test mark. Provide the described test mark and test evaluation in accordance with ASTM D1654 with a rating of not less than 7 in accordance with TABLE 1, (procedure A). Coat cut edges or otherwise damaged surfaces of hot-dip galvanized sheet steel or mill galvanized sheet steel with a zinc rich paint conforming to the manufacturer's standard.

2.2 CROSSARMS AND BRACKETS

2.2.1 Armless Construction

Pole mounting brackets for line-post or pin insulators and eye bolts for suspension insulators must be as indicated. Brackets must be attached to poles with a minimum of two bolts. Brackets may be either provided integrally as part of an insulator or attached to an insulator with a suitable stud. Bracket mounting surface must be suitable for the shape of the pole. Brackets for wood poles must have wood gripping members. Horizontal offset brackets must have a 5-degree uplift angle. Pole top brackets must conform to IEEE C135.22, except for modifications necessary to provide support for a line-post insulator. Brackets must provide a strength exceeding that of the required insulator strength, but in no case less than a 2800 pound cantilever strength.

2.3 HARDWARE

Hardware must be hot-dip galvanized in accordance with ASTM A153/A153M and ASTM A123/A123M.

2.4 INSULATORS

Provide wet-process porcelain insulators which are radio interference free.

a. Line post type insulators: NEMA/ANSI C29.7, Class 1.

b. Spool insulators: ANSI C29.3, Class 1.

c. Pin insulators: ANSI C29.5, Class 1.

2.5 OVERHEAD CONDUCTORS, CONNECTORS AND SPLICES

Conductors of bare aluminum alloy (AAAC) of sizes and types indicated. Where aluminum conductors are connected to dissimilar metal, fittings conforming to UL 486A-486B must be used.

2.5.1 Aluminum Alloy (AAAC)

ASTM B398/B398M or ASTM B399/B399M.

2.5.2 Connectors and Splices

Connectors and splices must be of copper alloys for copper conductors, aluminum alloys for aluminum-composition conductors, and a type designed to minimize galvanic corrosion for copper to aluminum-composition conductors. Aluminum-composition, aluminum-composition to copper, and copper-to-copper must comply with UL 486A-486B.

2.6 NEUTRAL-SUPPORTED SECONDARY AND SERVICE DROP CABLES

Service cables must be aluminum, triplex quadruplex with cross-linked polyethylene insulation on the phase conductors. Neutral must be bare aluminum alloy and must be the same size as the phase conductors unless otherwise indicated. Cables must conform to NEMA WC 70 for cross-linked polyethylene insulation.

2.7 SURGE ARRESTERS

IEEE C62.11, metal oxide, polymeric-housed, surge arresters arranged for equipment mounting. RMS voltage rating must be 10 kV. Arresters must be Distribution class.

2.8 FUSED CUTOUTS

Open type fused cutouts rated 200 amperes and 10,000 amperes symmetrical interrupting current at 15 kV ungrounded, conforming to IEEE C37.42. Type K fuses conforming to IEEE C37.42 with ampere ratings equal to 150 percent of the transformer full load rating. Open link type fuse cutouts are not acceptable.

2.9 CONDUIT RISERS AND CONDUCTORS

The riser shield must be PVC containing a PVC back plate and PVC extension shield or a rigid galvanized steel conduit, as indicated, and conforming to UL 6. Provide conductors and terminations as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

PART 3 EXECUTION

3.1 INSTALLATION

Provide overhead pole line installation conforming to requirements of IEEE C2 for Grade B construction of overhead lines in light loading districts and NFPA 70 for overhead services. Provide material required to make connections into existing system and perform excavating, backfilling, and other incidental labor. Consider street, alleys, roads and drives "public." Pole configuration must be as indicated.

3.1.1 Overhead Service

Terminate overhead service conductors into buildings at service entrance fittings or weatherhead outside building. Installation and connection of service entrance equipment to overhead service conductor is included in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

3.1.2 Hardware

Provide hardware with washer against wood and with nuts and lock nuts applied wrench tight. Provide locknuts on threaded hardware connections. Locknuts must be M-F style and not palnut style.

3.1.3 CONDUCTOR INSTALLATION

3.1.3.1 Line Conductors

Unless otherwise indicated, install conductors in compliance with IEEE C2 Grade B requirements and in accordance with revised manufacturer's approved tables of sags and tensions. Handle conductors with care necessary to prevent nicking, kinking, gouging, abrasions, sharp bends, cuts, flattening, or otherwise deforming or weakening conductor or any damage to insulation or impairing its conductivity. Remove damaged sections of conductor and splice conductor. Conductors must be paid out with the free end of conductors fixed and cable reels portable, except where terrain or obstructions make this method unfeasible. Bend radius for any insulated conductor must not be less than the applicable NEMA specification recommendation. Conductors must not be drawn over rough or rocky ground, nor around sharp bends. When installed by machine power, conductors must be drawn from a mounted reel through stringing sheaves in straight lines clear of obstructions. Initial sag and tension must be checked by the Contractor, in accordance with the manufacturer's approved sag and tension charts, within an elapsed time after installation as recommended by the manufacturer.

3.1.3.2 Connectors and Splices

Conductor splices, as installed, must exceed ultimate rated strength of conductor and must be of type recommended by conductor manufacturer. No splice must be permitted within 10 feet of a support. Connectors and splices must be mechanically and electrically secure under tension and must be of the nonbolted compression type. The tensile strength of any splice must be not less than the rated breaking strength of the conductor. Splice materials, sleeves, fittings, and connectors must be noncorrosive and must not adversely affect conductors. Aluminum-composition conductors must be wire brushed and an oxide inhibitor applied before making a compression connection. Connectors which are factory-filled with an inhibitor are acceptable. Inhibitors and

compression tools must be of types recommended by the connector manufacturer. Primary line apparatus taps must be by means of hot line clamps attached to compression type bail clamps (stirrups). Low-voltage connectors for copper conductors must be of the solderless pressure type. Noninsulated connectors must be smoothly taped to provide a waterproof insulation equivalent to the original insulation, when installed on insulated conductors. On overhead connections of aluminum and copper, the aluminum must be installed above the copper.

3.1.3.3 Conductor-To-Insulator Attachments

Conductors must be attached to insulators by means of clamps, shoes or tie wires, in accordance with the type of insulator. For insulators requiring conductor tie-wire attachments, tie-wire sizes must be as specified in TABLE I.

TABLE I - TIE-WIRE REQUIREMENTS	
CONDUCTOR Copper (AWG)	TIE WIRE Soft-Drawn Copper (AWG)
6	8
4 and 2	6
1 through 3/0	4
4/0 and larger	2
AAC, AAAC, or ACSR (AWG	AAAC OR AAC (AWG)
Any size	6 or 4

3.1.3.4 Armor Rods

Provide armor rods for AAC, AAAC, and ACSR conductors. Armor rods must be installed at supports, except armor rods will not be required at primary dead-end assemblies if aluminum or aluminum-lined zinc-coated steel clamps are used. Lengths and methods of fastening armor rods must be in accordance with the manufacturer's recommendations. For span lengths of less than 200 feet, flat aluminum armor rods may be used. Flat armor rods, not less than 0.03 by 0.25 inch must be used on No. 1 AWG AAC and AAAC and smaller conductors and on No. 5 AWG ACSR and smaller conductors. On larger sizes, flat armor rods must be not less than 0.05 by 0.30 inches. For span lengths of 200 feet or more, preformed round armor rods must be used.

3.1.3.5 Ties

Provide ties on pin insulators tight against conductor and insulator and ends turned down flat against conductor so that no wire ends project.

3.1.3.6 Low-Voltage Insulated Cables

Support low-voltage cables on clevis fittings using spool insulators. Provide dead-end clevis fittings and suspensions insulators where required for adequate strength. Dead-end construction must provide a strength

exceeding the rated breaking strength of the neutral messenger. Provide clevis attachments with not less than 5/8 inch through-bolts. Secondary racks may be used when installed on wood poles and where the span length does not exceed 200 feet. Secondary racks must be two-, three-, or four-wire, complete with spool insulators. Racks must meet strength and deflection requirements for heavy-duty steel racks, and must be rounded and smooth to avoid damage to conductor insulation. Each insulator must be held in place with a 5/8 inch button-head bolt equipped with a nonferrous cotter pin, or equivalent, at the bottom. Attach racks for dead-ending four No. 4/0 AWG or four larger conductors to poles with three 5/8 inch through-bolts. Attach other secondary racks to poles with at least two 5/8 inch through-bolts. Minimum vertical spacing between conductors must not be less than 8 inches.

3.1.3.7 Reinstalling Conductors

Existing conductors to be reinstalled or resagged must be strung to "final" sag table values indicated for the particular conductor type and size involved.

3.1.3.8 New Conductor Installation

String new conductors to "initial" sag table values recommended by the manufacturer for conductor type and size of conductor and ruling span indicated.

3.1.3.9 Fittings

Dead end fittings, clamp or compression type, must conform to written recommendations of conductor manufacturer and must develop full ultimate strength of conductor.

3.1.3.10 Aluminum Connections

Make aluminum connections to copper or other material using only splices, connectors, lugs, or fittings designed for that specific purpose. Keep a copy of manufacturer's instructions for applying these fittings at job site for use of the inspector.

3.1.4 Risers

Secure PVC riser shields on poles as indicated.

3.2 FIELD QUALITY CONTROL

3.2.1 General

Perform field testing in the presence of the Contracting Officer. The Contractor must notify the Contracting Officer 5 days prior to conducting tests. The Contractor must furnish materials, labor, and equipment necessary to conduct field tests. The Contractor must perform tests and inspections recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor must maintain a written record of tests which includes date, test performed, personnel involved, devices tested, serial number and name of test equipment, and test results. Field reports will be signed and dated by the Contractor.

3.2.2 Safety

The Contractor must provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor must replace any devices or equipment which are damaged due to improper test procedures or handling.

3.2.3 Devices Subject to Manual Operation

Each device subject to manual operation must be operated at least three times, demonstrating satisfactory operation each time.

3.2.4 Follow-Up Verification

Upon completion of acceptance checks and tests, the Contractor must show by demonstration in service that circuits and devices are in good operating condition and properly performing the intended function.

-- End of Section --

SECTION 33 71 02

UNDERGROUND ELECTRICAL DISTRIBUTION
08/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASSOCIATION OF EDISON ILLUMINATING COMPANIES (AEIC)

AEIC CS8	(2013) Specification for Extruded Dielectric Shielded Power Cables Rated 5 Through 46 kV

ASTM INTERNATIONAL (ASTM)

ASTM B1	(2013) Standard Specification for Hard-Drawn Copper Wire
ASTM B3	(2013; R 2024) Standard Specification for Soft or Annealed Copper Wire
ASTM B8	(2023) Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM F512	(2019) Standard Specification for Smooth-Wall Poly (Vinyl Chloride) (PVC) Conduit and Fittings for Underground Installation

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 48	(2020) Test Procedures and Requirements for Alternating-Current Cable Terminations Used on Shielded Cables Having Laminated Insulation Rated 2.5 kV through 765 kV or Extruded Insulation Rated 2.5 kV through 500 kV
IEEE 81	(2012) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
IEEE 400.2	(2024) Guide for Field Testing of Shielded Power Cable Systems Using Very Low Frequency (VLF)
IEEE 404	(2012) Standard for Extruded and Laminated Dielectric Shielded Cable Joints Rated 2500 V to 500,000 V

IEEE C2	(2023) National Electrical Safety Code
IEEE Stds Dictionary	(2009) IEEE Standards Dictionary: Glossary of Terms & Definitions

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2025) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C119.1	(2023) Electric Connectors - Sealed Insulated Underground Connector Systems Rated 600 Volts
ANSI/NEMA WC 71/ICEA S-96-659	(2014; R 2022) Standard for Nonshielded Cables Rated 2001-5000 Volts for use in the Distribution of Electric Energy
NEMA RN 1	(2005; R 2013) Polyvinyl-Chloride (PVC) Externally Coated Galvanized Rigid Steel Conduit and Intermediate Metal Conduit
NEMA TC 2	(2020) Standard for Electrical Polyvinyl Chloride (PVC) Conduit
NEMA TC 6 & 8	(2020) Standard for Polyvinyl Chloride (PVC) Plastic Utilities Duct for Underground Installations
NEMA TC 9	(2020) Standard for Fittings for Polyvinyl Chloride (PVC) Plastic Utilities Duct for Underground Installation
NEMA WC 70	(2021) Power Cable Rated 2000 Volts or Less for the Distribution of Electrical Energy
NEMA WC 74/ICEA S-93-639	(2022) 5-46 kV Shielded Power Cable for Use in the Transmission and Distribution of Electric Energy

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)

TIA-758	(2012b) Customer-Owned Outside Plant Telecommunications Infrastructure Standard

U.S. DEPARTMENT OF AGRICULTURE (USDA)

RUS Bull 1751F-644	(2002) Underground Plant Construction

UL SOLUTIONS (UL)

UL 6	(2022) UL Standard for Safety Electrical Rigid Metal Conduit-Steel
UL 83	(2017; Reprint Mar 2020) UL Standard for Safety Thermoplastic-Insulated Wires and Cables
UL 94	(2023; Reprint Jan 2024) UL Standard for Safety Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
UL 467	(2022) UL Standard for Safety Grounding and Bonding Equipment
UL 486A-486B	(2025) UL Standard for Safety Wire Connectors
UL 510	(2020; Dec 2022) UL Standard for Safety Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
UL 514A	(2024) UL Standard for Safety Metallic Outlet Boxes
UL 514B	(2012; Reprint Mar 2024) UL Standard for Safety Conduit, Tubing and Cable Fittings
UL 651	(2011; Reprint May 2022) UL Standard for Safety Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings
UL 854	(2020; Reprint Jul 2024) Standard for Service-Entrance Cables
UL 1072	(2006; Reprint Apr 2020) Medium-Voltage Power Cables
UL 1242	(2006; Reprint Apr 2022) UL Standard for Safety Electrical Intermediate Metal Conduit -- Steel

1.2 RELATED REQUIREMENTS

Section 26 08 00 APPARATUS INSPECTION AND TESTING applies to this section, with the additions and modifications specified herein.

1.3 DEFINITIONS

a. Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, are as defined in IEEE Stds Dictionary.

b. In the text of this section, the words conduit and duct are used interchangeably and have the same meaning.

c. In the text of this section, "medium voltage cable splices," and "medium voltage cable joints" are used interchangeably and have the same meaning.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Medium Voltage Cable; G

Medium Voltage Cable Joints; G

Medium Voltage Cable Terminations; G

Live End Caps; G

SD-06 Test Reports

Medium Voltage Cable Qualification and Production Tests; G

Field Acceptance Checks and Tests; G

Arc-proofing Test for cable fireproofing tape; G

SD-07 Certificates

Cable splicer/terminator; G

Cable Installer Qualifications; G

1.5 QUALITY ASSURANCE

1.5.1 Certificate of Competency for Cable Splicer/Terminator

The cable splicer/terminator must have a certification from the National Cable Splicing Certification Board (NCSCB) in the field of splicing and terminating shielded medium voltage (5 kV to 35 kV) power cable using pre-manufactured kits (pre-molded, heat-shrink, cold shrink). Submit "Proof of Certification" for approval, for the individuals that will be performing cable splicer and termination work, 30 days before splices or terminations are to be made.

1.5.2 Cable Installer Qualifications

Provide at least one onsite person in a supervisory position with a documentable level of competency and experience to supervise all cable pulling operations. Provide a resume showing the cable installers' experience in the last three years, including a list of references complete with points of contact, addresses and telephone numbers. Cable installer must demonstrate experience with a minimum of three medium voltage cable installations. The Contracting Officer reserves the right to require additional proof of competency or to reject the individual and call for an alternate qualified cable installer.

1.5.3 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Equipment, materials, installation, and workmanship must be in accordance with the mandatory and advisory provisions of IEEE C2 and NFPA 70 unless more stringent requirements are specified or indicated.

1.5.4 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products must have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year period must include applications of equipment and materials under similar circumstances and of similar size. The product must have been for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period. Where two or more items of the same class of equipment are required, these items must be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.5.4.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.4.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site are not acceptable, unless specified otherwise.

PART 2 PRODUCTS

2.1 CONDUIT, DUCTS, AND FITTINGS

2.1.1 Rigid Metal Conduit

UL 6.

2.1.1.1 Rigid Metallic Conduit, PVC Coated

NEMA RN 1, Type A40, except that hardness must be nominal 85 Shore A durometer, dielectric strength must be minimum 400 volts per mil at 60 Hz, and tensile strength must be minimum 3500 psi.

2.1.2 Intermediate Metal Conduit

UL 1242.

2.1.2.1 Intermediate Metal Conduit, PVC Coated

NEMA RN 1, Type A40, except that hardness must be nominal 85 Shore A

durometer, dielectric strength must be minimum 400 volts per mil at 60 Hz, and tensile strength must be minimum 3500 psi.

2.1.3 Plastic Conduit for Direct Burial and Riser Applications

UL 651 and NEMA TC 2, EPC-40 or EPC-80 as indicated.

2.1.4 Plastic Duct for Concrete Encasement

Provide Type EB-20 per UL 651, ASTM F512, and NEMA TC 6 & 8.

2.1.5 Duct Sealant

UL 94, Class HBF. Provide high-expansion urethane foam duct sealant that expands and hardens to form a closed, chemically and water resistant, rigid structure. Sealant must be compatible with common cable and wire jackets and capable of adhering to metals, plastics and concrete. Sealant must be capable of curing in temperature ranges of 35 degrees F to 95 degrees F. Cured sealant must withstand temperature ranges of -20 degrees F to 200 degrees F without loss of function.

2.1.6 Fittings

2.1.6.1 Metal Fittings

UL 514B.

2.1.6.2 PVC Conduit Fittings

UL 514B, UL 651.

2.1.6.3 PVC Duct Fittings

NEMA TC 9.

2.1.6.4 Outlet Boxes for Steel Conduit

Outlet boxes for use with rigid or flexible steel conduit must be cast-metal cadmium or zinc-coated if of ferrous metal with gasketed closures and must conform to UL 514A.

2.2 LOW VOLTAGE INSULATED CONDUCTORS AND CABLES

Insulated conductors must be rated 600 volts and conform to the requirements of NFPA 70, including listing requirements, or in accordance with NEMA WC 70. Wires and cables manufactured more than 24 months prior to date of delivery to the site are not acceptable. Service entrance conductors must conform to UL 854, type USE.

2.2.1 Conductor Types

Cable and duct sizes indicated are for copper conductors and THHN/THWN unless otherwise noted. Conductors No. 10 AWG and smaller must be solid. Conductors No. 8 AWG and larger must be stranded. All conductors must be copper.

2.2.2 Conductor Material

Unless specified or indicated otherwise or required by NFPA 70, wires in

conduit, other than service entrance, must be 600-volt, Type THWN/THHN conforming to UL 83. Copper conductors must be annealed copper complying with ASTM B3 and ASTM B8.

2.2.3 Jackets

Provide multiconductor cables with an overall PVC outer jacket.

2.2.4 Cable Marking

Insulated conductors must have the date of manufacture and other identification imprinted on the outer surface of each cable at regular intervals throughout the cable length.

Identify each cable by means of a fiber, laminated plastic, or non-ferrous metal tags in each manhole, handhole, junction box, and each terminal. Each tag must contain the following information; cable type, conductor size, circuit number, circuit voltage, cable destination and phase identification.

Color code conductors. Provide conductor identification within each enclosure where a tap, splice, or termination is made. Conductor identification must be by color-coded insulated conductors, plastic-coated self-sticking printed markers, colored nylon cable ties and plates, heat shrink type sleeves,or colored electrical tape. Properly identify control circuit terminations. Color must be green for grounding conductors and white for neutrals; except where neutrals of more than one system are installed in same raceway or box, other neutrals may be white with a different colored (not green) stripe for each. Color of ungrounded conductors in different voltage systems are as follows:

a. 208/120 volt, three-phase

(1) Phase A - black

(2) Phase B - red

(3) Phase C - blue

b. 480/277 volt, three-phase

(1) Phase A - brown

(2) Phase B - orange

(3) Phase C - yellow

c. 120/240 volt, single phase: Black and red

2.3 LOW VOLTAGE WIRE CONNECTORS AND TERMINALS

Provide a uniform compression over the entire conductor contact surface. Use solderless terminal lugs on stranded conductors.

a. For use with copper conductors: UL 486A-486B.

2.4 LOW VOLTAGE SPLICES

Provide splices in conductors with a compression connector on the

conductor and by insulating and waterproofing using one of the following methods which are suitable for continuous submersion in water and comply with ANSI C119.1.

2.4.1 Heat Shrinkable Splice

Provide heat shrinkable splice insulation by means of a thermoplastic adhesive sealant material applied in accordance with the manufacturer's written instructions.

2.4.2 Cold Shrink Rubber Splice

Provide a cold-shrink rubber splice which consists of EPDM rubber tube which has been factory stretched onto a spiraled core which is removed during splice installation. The installation must not require heat or flame, or any additional materials such as covering or adhesive. It must be designed for use with inline compression type connectors, or indoor, outdoor, direct-burial or submerged locations.

2.5 MEDIUM VOLTAGE CABLE

Cable (conductor) sizes are designated by American Wire Gauge (AWG) and Thousand Circular Mils (Kcmil). Conductor and conduit sizes indicated are for copper conductors unless otherwise noted. Insulated conductors must have the date of manufacture and other identification imprinted on the outer surface of each cable at regular intervals throughout cable length. Wires and cables manufactured more than 24 months prior to date of delivery to the site are not acceptable. Provide single conductor type cables unless otherwise indicated.

2.5.1 Cable Configuration

Provide Type MV cable, conforming to NEMA WC 74/ICEA S-93-639 and UL 1072. Provide cables manufactured for use in duct applications as indicated. Cable must be rated 15 kV with 133 percent insulation level.

2.5.2 Conductor Material

Provide concentric-lay-stranded, Class B compact round conductors. .

2.5.3 Insulation

Provide ethylene-propylene-rubber (EPR) insulation conforming to the requirements of ANSI/NEMA WC 71/ICEA S-96-659 and AEIC CS8.

2.5.4 Shielding

Cables rated for 2 kV and above must have a semiconducting conductor shield, a semiconducting insulation shield, and an overall copper tape shield for each phase.

2.5.5 Neutrals

Neutral conductors must be copper, employing the same insulation and jacket materials as phase conductors, except that a 600-volt insulation rating is acceptable.

2.5.6 Jackets

Provide cables with a PVC jacket. Provide PVC jackets with a separator that prevents contact with underlying semiconducting insulating shield.

2.6 MEDIUM VOLTAGE CABLE TERMINATIONS

IEEE 48 Class 1; of the molded elastomer, prestretched elastomer, or heat-shrinkable elastomer. Acceptable elastomers are track-resistant silicone rubber or track-resistant ethylene propylene compounds, such as ethylene propylene rubber or ethylene propylene diene monomer. Separable insulated connectors may be used for apparatus terminations, when such apparatus is provided with suitable bushings. Provide terminations, where required, with mounting brackets suitable for the intended installation and with grounding provisions for the cable shielding, metallic sheath, or armor. Provide terminations in a kit, including: skirts, stress control terminator, ground clamp, connectors, lugs, and complete instructions for assembly and installation. Terminations must be the product of one manufacturer, suitable for the type, diameter, insulation class and level, and materials of the cable terminated. Do not use separate parts of copper or copper alloy in contact with aluminum alloy parts in the construction or installation of the terminator.

2.6.1 Cold-Shrink Type

Terminator must be a one-piece design, utilizing the manufacturer's latest technology, where high-dielectric constant (capacitive) stress control is integrated within a skirted insulator made of silicone rubber. Termination must not require heat or flame for installation. Termination kit must contain all necessary materials (except for the lugs). Design termination for installation in low or highly contaminated indoor and outdoor locations and must resist ultraviolet rays and oxidative decomposition.

2.6.2 Heat Shrinkable Type

Terminator must consist of a uniform cross section heat shrinkable polymeric construction stress relief tubing and environmentally sealed outer covering that is nontracking, resists heavy atmospheric contaminants, ultra violet rays and oxidative decomposition. Provide heat shrinkable sheds or skirts of the same material. Design termination for installation in low or highly contaminated indoor or outdoor locations.

2.7 MEDIUM VOLTAGE CABLE JOINTS

Provide joints (splices) in accordance with IEEE 404 suitable for the rated voltage, insulation level, insulation type, and construction of the cable. Joints must be certified by the manufacturer for waterproof, submersible applications. Upon request, supply manufacturer's design qualification test report in accordance with IEEE 404. Connectors for joint must be tin-plated electrolytic copper, having ends tapered and having center stops to equalize cable insertion.

2.7.1 Heat-Shrinkable Joint

Consists of a uniform cross-section heat-shrinkable polymeric construction with a linear stress relief system, a high dielectric strength insulating material, and an integrally bonded outer conductor layer for shielding. Replace original cable jacket with a heavy-wall heat-shrinkable sleeve

with hot-melt adhesive coating.

2.7.2 Cold-Shrink Rubber-Type Joint

Joint must be of a cold shrink design that does not require any heat source for its installation. Splice insulation and jacket must be of a one-piece factory formed cold shrink sleeve made of black EPDM rubber. Splice should be packaged three splices per kit, including complete installation instructions.

2.8 TELECOMMUNICATIONS CABLING

Provide telecommunications cabling in accordance with Section 33 82 00 TELECOMMUNICATIONS OUTSIDE PLANT (OSP).

2.9 LIVE END CAPS

Provide live end caps using a "kit" including a heat-shrinkable tube and a high dielectric strength, polymeric plug overlapping the conductor. Conform to applicable portions of IEEE 48.

2.10 TAPE

2.10.1 Insulating Tape

UL 510, plastic insulating tape, capable of performing in a continuous temperature environment of 80 degrees C.

2.10.2 Buried Warning and Identification Tape

Provide detectable tape in accordance with Section 31 00 00 EARTHWORK.

2.10.3 Fireproofing Tape

Provide tape composed of a flexible, conformable, unsupported intumescent elastomer. Tape must be not less than .030 inch thick, noncorrosive to cable sheath, self-extinguishing, noncombustible, adhesive-free, and must not deteriorate when subjected to oil, water, gases, salt water, sewage, and fungus.

2.11 PULL ROPE

Plastic or flat pull line (bull line) having a minimum tensile strength of 200 pounds.

2.12 GROUNDING AND BONDING

2.12.1 Driven Ground Rods

Provide copper-clad steel ground rods conforming to UL 467 not less than 3/4 inch in diameter by 10 feet in length. Sectional type rods may be used for rods 20 feet or longer.

2.12.2 Grounding Conductors

Stranded-bare copper conductors must conform to ASTM B8, Class B, soft-drawn unless otherwise indicated. Solid-bare copper conductors must conform to ASTM B1 for sizes No. 8 and smaller. Insulated conductors must be of the same material as phase conductors and green color-coded, except

that conductors must be rated no more than 600 volts. Aluminum is not acceptable.

2.13 SOURCE QUALITY CONTROL

2.13.1 Arc-Proofing Test for Cable Fireproofing Tape

Manufacturer must test one sample assembly consisting of a straight lead tube 12 inches long with a 2 1/2 inch outside diameter, and a 1/8 inch thick wall, and covered with one-half lap layer of arc and fireproofing tape per manufacturer's instructions. The arc and fireproofing tape must withstand extreme temperature of a high-current fault arc 13,000 degrees K for 70 cycles as determined by using an argon directed plasma jet capable of constantly producing and maintaining an arc temperature of 13,000 degrees K. Temperature (13,000 degrees K) of the ignited arc between the cathode and anode must be obtained from a dc power source of 305 (plus or minus 5) amperes and 20 (plus or minus 1) volts. Direct the arc toward the sample assembly accurately positioned 5 (plus or minus 1) millimeters downstream in the plasma from the anode orifice by fixed flow rate of argon gas (0.18 g per second). Test each sample assembly at three unrelated points. Start time for tests must be taken from recorded peak current when the specimen is exposed to the full test temperature. Surface heat on the specimen prior to that time must be minimal. The end point is established when the plasma or conductive arc penetrates the protective tape and strikes the lead tube. Submittals for arc-proofing tape must indicate that the test has been performed and passed by the manufacturer.

2.13.2 Medium Voltage Cable Qualification and Production Tests

Results of AEIC CS8 qualification and production tests as applicable for each type of medium voltage cable.

PART 3 EXECUTION

3.1 INSTALLATION

Install equipment and devices in accordance with the manufacturer's published instructions and with the requirements and recommendations of NFPA 70 and IEEE C2 as applicable. In addition to these requirements, install telecommunications in accordance with TIA-758 and RUS Bull 1751F-644.

3.2 CABLE INSPECTION

Inspect each cable reel for correct storage positions, signs of physical damage, and broken end seals prior to installation. If end seal is broken, remove moisture from cable prior to installation in accordance with the cable manufacturer's recommendations.

3.3 UNDERGROUND FEEDERS SUPPLYING BUILDINGS

Terminate underground feeders supplying building at a point 5 feet outside the building and projections thereof, except that conductors must be continuous to the terminating point indicated. Coordinate connections of the feeders to the service entrance equipment with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Provide PVC, Type EPC-40 conduit from the supply equipment to a point 5 feet outside the building and projections thereof. Protect ends of underground conduit with plastic plugs until

connections are made.

Encase the underground portion of the conduit in a concrete envelope and bury as specified for underground duct with concrete encasement.

3.4 UNDERGROUND CONDUIT AND DUCT SYSTEMS

3.4.1 Requirements

Run conduit in straight lines except where a change of direction is necessary. Provide numbers and sizes of ducts as indicated. Provide a 4/0 AWG bare copper grounding conductor below medium-voltage distribution duct banks. Bond bare copper grounding conductor to ground rings (loops) in all manholes and to ground rings (loops) at all equipment slabs (pads). Route grounding conductor into manholes with the duct bank (sleeving is not required). Ducts must have a continuous slope downward toward underground structures and away from buildings, laid with a minimum slope of 3 inches per 100 feet. Depending on the contour of the finished grade, the high-point may be at a terminal, a manhole, a handhole, or between manholes or handholes. Terminate all PVC conduit end points in utility holes, switching cabinets, transform handholes and buildings with end bells. The bell end of the conduits that enter manholes and handholes must be flush with the wall.

Perform changes in ductbank direction as follows:

a. Short-radius manufactured 90-degree duct bends may be used only for pole or equipment risers, unless specifically indicated as acceptable.

b. The minimum manufactured bend radius must be 18 inches for ducts of less than 3 inch diameter, and 36 inches for ducts 3 inches or greater in diameter.

c. As an exception to the bend radius required above, provide field manufactured longsweep bends having a minimum radius of 25 feet for a change of direction of more than 5 degrees, either horizontally or vertically, using a combination of curved and straight sections. Maximum manufactured curved sections allowed for use in field manufactured longsweep bend: 30 degrees.

3.4.2 Treatment

Keep ducts clean of concrete, dirt, or foreign substances during construction. Make field cuts requiring tapers with proper tools and match factory tapers. Use a coupling recommended by the duct manufacturer whenever an existing duct is connected to a duct of different material or shape. Store ducts to avoid warping and deterioration with ends sufficiently plugged to prevent entry of any water or solid substances. Thoroughly clean ducts before being laid. Store plastic ducts on a flat surface and protected from the direct rays of the sun.

3.4.3 Conduit Cleaning

As each conduit run is completed, for conduit sizes 3 inches and larger, draw a flexible testing mandrel approximately 12 inches long with a diameter less than the inside diameter of the conduit through the conduit. After which, draw a stiff bristle brush through until conduit is clear of particles of earth, sand and gravel; then immediately install conduit plugs. For conduit sizes less than 3 inches, draw a stiff bristle

brush through until conduit is clear of particles of earth, sand and gravel; then immediately install conduit plugs.

3.4.4 Jacking and Drilling Under Roads and Structures

Conduits to be installed under existing paved areas which are not to be disturbed, and under roads and railroad tracks, must be zinc-coated, rigid steel, jacked into place. Where ducts are jacked under existing pavement, install rigid steel conduit because of its strength. To protect the corrosion-resistant conduit coating, predrilling or installing conduit inside a larger iron pipe sleeve (jack-and-sleeve) is required. For crossings of existing railroads and airfield pavements greater than 50 feet in length, the predrilling method or the jack-and-sleeve method will be used. Separators or spacing blocks must be made of steel, concrete, plastic, or a combination of these materials placed not farther apart than 4 feet on centers.

3.4.5 Multiple Conduits

Separate multiple conduits by a minimum distance of 3 inches, except that light and power conduits must be separated from control, signal, and telephone conduits by a minimum distance of 12 inches. Stagger the joints of the conduits by rows (horizontally) and layers (vertically) to strengthen the conduit assembly. Provide plastic duct spacers that interlock vertically and horizontally. Spacer assembly must consist of base spacers, intermediate spacers, ties, and locking device on top to provide a completely enclosed and locked-in conduit assembly. Install spacers per manufacturer's instructions, but provide a minimum of two spacer assemblies per 10 feet of conduit assembly.

3.4.6 Conduit Plugs and Pull Rope

Provide new conduit indicated as being unused or empty with plugs on each end. Plugs must contain a weephole or screen to allow water drainage. Provide a plastic pull rope having 3 feet of slack at each end of unused or empty conduits.

3.4.7 Conduit and Duct Without Concrete Encasement

Depths to top of the conduit must be not less than 24 inches below finished grade. Provide not less than 3 inches clearance from the conduit to each side of the trench. Grade bottom of trench smooth; where rock, soft spots, or sharp-edged materials are encountered, excavate the bottom for an additional 3 inches, fill and tamp level with original bottom with sand or earth free from particles, that would be retained on a 1/4 inch sieve. The first 6 inch layer of backfill cover must be sand compacted as previously specified. The rest of the excavation must be backfilled and compacted in 3 to 6 inch layers. Provide color, type and depth of warning tape as specified in Section 31 00 00 EARTHWORK.

3.4.7.1 Encasement Under Roads and Structures

Under roads, paved areas, and railroad tracks, install conduits in concrete encasement of rectangular cross-section providing a minimum of 3 inch concrete cover around ducts. Extend concrete encasement at least 5 feet beyond the edges of paved areas and roads, and 12 feet beyond the rails on each side of railroad tracks. Depths to top of the concrete envelope must be not less than 24 inches below finished grade.

3.4.8 Duct Encased in Concrete

Construct underground duct lines of individual conduits encased in concrete. Depths to top of the concrete envelope must be not less than 18 inches below finished grade, except under roads and pavement, concrete envelope must be not less than 24 inches below finished grade. Do not mix different kinds of conduit in any one duct bank. Concrete encasement surrounding the bank must be rectangular in cross-section and provide at least 3 inches of concrete cover for ducts. Separate conduits by a minimum concrete thickness of 3 inches. Before pouring concrete, anchor duct bank assemblies, prevent floating during concrete pouring by driving reinforcing rods adjacent to duct spacer assemblies and attaching the rods to the spacer assembly. Provide color, type and depth of warning tape as specified in Section 31 00 00 EARTHWORK.

3.4.9 Duct Sealing

Seal all electrical penetrations for radon mitigation, maintaining integrity of the vapor barrier, and to prevent infiltration of air, insects, and vermin.

3.5 CABLE PULLING

Pull cables down grade with the feed-in point at the manhole or buildings of the highest elevation. Use flexible cable feeds to convey cables through manhole opening and into duct runs. Do not exceed the specified cable bending radii when installing cable under any conditions, including turnups into switches, transformers, switchgear, switchboards, and other enclosures. Cable with tape shield must have a bending radius not less than 12 times the overall diameter of the completed cable. If basket-grip type cable-pulling devices are used to pull cable in place, cut off the section of cable under the grip before splicing and terminating.

3.5.1 Cable Lubricants

Use lubricants that are specifically recommended by the cable manufacturer for assisting in pulling jacketed cables.

3.6 CONDUCTORS INSTALLED IN PARALLEL

Group conductors such that each conduit of a parallel run contains one Phase A conductor, one Phase B conductor, one Phase C conductor, and one neutral conductor.

3.7 LOW VOLTAGE CABLE SPLICING AND TERMINATING

Make terminations and splices with materials and methods as indicated or specified herein and as designated by the written instructions of the manufacturer. Do not allow the cables to be moved until after the splicing material has completely set.

3.8 MEDIUM VOLTAGE CABLE TERMINATIONS

Make terminations in accordance with the written instruction of the termination kit manufacturer.

3.9 MEDIUM VOLTAGE CABLE JOINTS

Provide power cable joints (splices) suitable for continuous immersion in

water. Make joints only in accessible locations in manholes or handholes by using materials and methods in accordance with the written instructions of the joint kit manufacturer.

3.9.1 Joints in Shielded Cables

Cover the joined area with metallic tape, or material like the original cable shield and connect it to the cable shield on each side of the splice. Provide a bare copper ground connection brought out in a watertight manner and grounded to the manhole grounding loop as part of the splice installation. Ground conductors, connections, and rods must be as specified elsewhere in this section. Wire must be trained to the sides of the enclosure to prevent interference with the working area.

3.10 CABLE END CAPS

Cable ends must be sealed at all times with coated heat shrinkable end caps. Cables ends must be sealed when the cable is delivered to the job site, while the cable is stored and during installation of the cable. The caps must remain in place until the cable is spliced or terminated. Sealing compounds and tape are not acceptable substitutes for heat shrinkable end caps. Cable which is not sealed in the specified manner at all times will be rejected.

3.11 LIVE END CAPS

Provide live end caps for single conductor medium voltage cables where indicated.

3.12 FIREPROOFING OF CABLES IN UNDERGROUND STRUCTURES

Fireproof (arc proof) wire and cables which will carry current at 2200 volts or more in underground structures.

3.12.1 Fireproofing Tape

Tightly wrap strips of fireproofing tape around each cable spirally in half-lapped wrapping. Install tape in accordance with manufacturer's instructions.

3.12.2 Tape-Wrap

Tape-wrap metallic-sheathed or metallic armored cables without a nonmetallic protective covering over the sheath or armor prior to application of fireproofing. Wrap must be in the form of two tightly applied half-lapped layers of a pressure-sensitive 10 mil thick plastic tape, and must extend not less than one inch into the duct. Even out irregularities of the cable, such as at splices, with insulation putty before applying tape.

3.13 GROUNDING SYSTEMS

NFPA 70 and IEEE C2, except provide grounding systems with a resistance to solid earth ground not exceeding 25 ohms.

3.13.1 Grounding Electrodes

Provide cone pointed driven ground rods driven full depth plus 6 inches, installed to provide an earth ground of the appropriate value for the

particular equipment being grounded.
If the specified ground resistance is not met, provide an additional ground rod in accordance with the requirements of NFPA 70 (placed not less than 6 feet from the first rod). Should the resultant (combined) resistance exceed the specified resistance, measured not less than 48 hours after rainfall, notify the Contracting Officer immediately.

3.13.2 Grounding Connections

Make grounding connections which are buried or otherwise normally inaccessible, by exothermic weld or compression connector.

a. Make exothermic welds strictly in accordance with the weld manufacturer's written recommendations. Welds which are "puffed up" or which show convex surfaces indicating improper cleaning are not acceptable. Mechanical connectors are not required at exothermic welds.

b. Make compression connections using a hydraulic compression tool to provide the correct circumferential pressure. Tools and dies must be as recommended by the manufacturer. An embossing die code or other standard method must provide visible indication that a connector has been adequately compressed on the ground wire.

3.13.3 Grounding Conductors

Provide bare grounding conductors, except where installed in conduit with associated phase conductors. Ground cable sheaths, cable shields, conduit, and equipment with No. 6 AWG. Ground other noncurrent-carrying metal parts and equipment frames of metal-enclosed equipment. Ground metallic frames and covers of handholes and pull boxes with a braided, copper ground strap with equivalent ampacity of No. 6 AWG.

3.13.4 Ground Cable Crossing Expansion Joints

Protect ground cables crossing expansion joints or similar separations in structures and pavements by use of approved devices or methods of installation which provide the necessary slack in the cable across the joint to permit movement. Use stranded or other approved flexible copper cable across such separations.

3.14 EXCAVATING, BACKFILLING, AND COMPACTING

Provide in accordance with NFPA 70 and Section 31 00 00 EARTHWORK.

3.14.1 Reconditioning of Surfaces

3.14.1.1 Unpaved Surfaces

Restore to their original elevation and condition unpaved surfaces disturbed during installation of duct . Preserve sod and topsoil removed during excavation and reinstall after backfilling is completed. Replace sod that is damaged by sod of quality equal to that removed. When the surface is disturbed in a newly seeded area, re-seed the restored surface with the same quantity and formula of seed as that used in the original seeding, and provide topsoiling, fertilizing, liming, seeding, sodding, sprigging, or mulching.

3.14.1.2 Paving Repairs

Where trenches, pits, or other excavations are made in existing roadways and other areas of pavement where surface treatment of any kind exists , restore such surface treatment or pavement the same thickness and in the same kind as previously existed, except as otherwise specified, and to match and tie into the adjacent and surrounding existing surfaces.

3.15 CAST-IN-PLACE CONCRETE

Provide concrete in accordance with Section 03 30 00 CAST-IN-PLACE CONCRETE.

3.15.1 Concrete Slabs (Pads) for Equipment

Unless otherwise indicated, the slab must be at least 8 inches thick, reinforced with a 6 by 6 - W2.9 by W2.9 mesh, placed uniformly 4 inches from the top of the slab. Place slab on a 6 inch thick, well-compacted gravel base. Top of concrete slab must be approximately 4 inches above finished grade with gradual slope for drainage. Edges above grade must have 1/2 inch chamfer. Slab must be of adequate size to project at least 8 inches beyond the equipment.

Stub up conduits, with bushings, 2 inches into cable wells in the concrete pad. Coordinate dimensions of cable wells with transformer cable training areas.

3.15.2 Sealing

When the installation is complete, seal all conduit and other entries into the equipment enclosure with an approved sealing compound. Seals must be of sufficient strength and durability to protect all energized live parts of the equipment from rodents, insects, or other foreign matter.

3.16 FIELD QUALITY CONTROL

3.16.1 Performance of Field Acceptance Checks and Tests

Perform in accordance with the manufacturer's recommendations, and include the following visual and mechanical inspections and electrical tests, performed in accordance with NETA ATS.

3.16.1.1 Medium Voltage Cables

Perform tests after installation of cable, splices, and terminators and before terminating to equipment or splicing to existing circuits.

a. Visual and Mechanical Inspection

(1) Inspect exposed cable sections for physical damage.

(2) Verify that cable is supplied and connected in accordance with contract plans and specifications.

(3) Inspect for proper shield grounding, cable support, and cable termination.

(4) Verify that cable bends are not less than ICEA or manufacturer's minimum allowable bending radius.

(5) Inspect for proper fireproofing.

(6) Visually inspect jacket and insulation condition.

(7) Inspect for proper phase identification and arrangement.

b. Electrical Tests

(1) Perform a shield continuity test on each power cable by ohmmeter method. Record ohmic value, resistance values in excess of 10 ohms per 1000 feet of cable must be investigated and justified.

(2) Perform acceptance test on new cables before the new cables are connected to existing cables and placed into service, including terminations and joints. Perform maintenance test on complete cable system after the new cables are connected to existing cables and placed into service, including existing cable, terminations, and joints. Tests must be very low frequency (VLF) alternating voltage withstand tests in accordance with IEEE 400.2. VLF test frequency must be 0.05 Hz minimum for a duration of 60 minutes using a sinusoidal waveform. Test voltages must be as follows:

CABLE RATING AC TEST VOLTAGE for ACCEPTANCE TESTING	
5 kV	10kV rms(peak)
8 kV	13kV rms(peak)
15 kV	20kV rms(peak)
25 kV	31kV rms(peak)
35 kV	44kV rms(peak)

CABLE RATING AC TEST VOLTAGE for MAINTENANCE TESTING	
5 kV	7kV rms(peak)
8 kV	10kV rms(peak)
15 kV	16kV rms(peak)
25 kV	23kV rms(peak)
35 kV	33kV rms(peak)

3.16.1.2 Low Voltage Cables, 600-Volt

Perform tests after installation of cable, splices and terminations and before terminating to equipment or splicing to existing circuits.

a. Visual and Mechanical Inspection

(1) Inspect exposed cable sections for physical damage.

(2) Verify that cable is supplied and connected in accordance with contract plans and specifications.

(3) Verify tightness of accessible bolted electrical connections.

(4) Inspect compression-applied connectors for correct cable match and indentation.

(5) Visually inspect jacket and insulation condition.

(6) Inspect for proper phase identification and arrangement.

b. Electrical Tests

(1) Perform insulation resistance tests on wiring No. 6 AWG and larger diameter using instrument which applies voltage of approximately 1000 volts dc for one minute.

(2) Perform continuity tests to insure correct cable connection.

3.16.1.3 Grounding System

a. Visual and mechanical inspection

Inspect ground system for compliance with contract plans and specifications.

b. Electrical tests

Perform ground-impedance measurements utilizing the fall-of-potential method in accordance with IEEE 81. On systems consisting of interconnected ground rods, perform tests after interconnections are complete. On systems consisting of a single ground rod perform tests before any wire is connected. Take measurements in normally dry weather, not less than 48 hours after rainfall. Use a portable ground resistance tester in accordance with manufacturer's instructions to test each ground or group of grounds. The instrument must be equipped with a meter reading directly in ohms or fractions thereof to indicate the ground value of the ground rod or grounding systems under test. Provide site diagram indicating location of test probes with associated distances, and provide a plot of resistance vs. distance.

3.16.2 Follow-Up Verification

Upon completion of acceptance checks and tests, show by demonstration in service that circuits and devices are in good operating condition and properly performing the intended function. As an exception to requirements stated elsewhere in the contract, the Contracting Officer must be given 5 working days advance notice of the dates and times of checking and testing.

.... -- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 33 82 00

TELECOMMUNICATIONS OUTSIDE PLANT (OSP)
08/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM B1	(2013) Standard Specification for Hard-Drawn Copper Wire
ASTM B8	(2023) Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM D709	(2017) Standard Specification for Laminated Thermosetting Materials
ASTM D1557	(2012; E 2015) Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft3) (2700 kN-m/m3)

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100	(2000; Archived) The Authoritative Dictionary of IEEE Standards Terms
IEEE C2	(2023) National Electrical Safety Code

INSULATED CABLE ENGINEERS ASSOCIATION (ICEA)

ICEA S-87-640	(2016) Optical Fiber Outside Plant Communications Cable; 4th Edition
ICEA S-98-688	(2012) Broadband Twisted Pair Telecommunication Cable, Aircore, Polyolefin Insulated, Copper Conductors Technical Requirements
ICEA S-99-689	(2012) Broadband Twisted Pair Telecommunication Cable Filled, Polyolefin Insulated, Copper Conductors Technical Requirements

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C62.61	(1993) American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuits

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2026; TIA 26-1; ERTA 26-1; TIA 26-2; TIA 26-3; TIA 26-4; TIA 26-5; TIA 26-6; TIA 26-7; ERTA 26-2; ERTA 26-3) National Electrical Code

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)

TIA-455-78-B	(2020c) FOTP-78 Optical Fibres - Part 1-40: Measurement Methods and Test Procedures - Attenuation
TIA-455-107	(1999a) FOTP-107 Determination of Component Reflectance or Link/System Return Loss using a Loss Test Set
TIA-472D000	(2007b) Fiber Optic Communications Cable for Outside Plant Use
TIA-492E000	(1996; R 2002) Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1550 nm Window
TIA-526-7	(2015a) OFSTP-7 Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant
TIA-526-14	(2015c) OFSTP-14A Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant
TIA-568.1	(2020e) Commercial Building Telecommunications Infrastructure Standard
TIA-568.2	(2018d) Balanced Twisted-Pair Telecommunications Cabling and Components Standards
TIA-568.3	(2016d; Add 1 2019) Optical Fiber Cabling Components Standard
TIA-569	(2019e) Telecommunications Pathways and Spaces
TIA-590	(1997a) Standard for Physical Location and Protection of Below Ground Fiber Optic Cable Plant
TIA-606	(2021d) Administration Standard for Telecommunications Infrastructure
TIA-607	(2019d) Generic Telecommunications Bonding and Grounding (Earthing) for Customer Premises
TIA-758	(2012b) Customer-Owned Outside Plant Telecommunications Infrastructure Standard

TIA/EIA-455	(1998b) Standard Test Procedure for Fiber Optic Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and Other Fiber Optic Components
TIA/EIA-455-204	(2000) Standard for Measurement of Bandwidth on Multimode Fiber
TIA/EIA-598	(2014D; Add 2 2018) Optical Fiber Cable Color Coding

U.S. DEPARTMENT OF AGRICULTURE (USDA)

RUS 1755	Telecommunications Standards and Specifications for Materials, Equipment and Construction
RUS Bull 345-65	(1985) Shield Bonding Connectors (PE-65)
RUS Bull 345-72	(1985) Filled Splice Closures (PE-74)
RUS Bull 345-83	(1979; Rev Oct 1982) Gas Tube Surge Arrestors (PE-80)
RUS Bull 1751F-630	(1996) Design of Aerial Plant
RUS Bull 1751F-643	(2002) Underground Plant Design
RUS Bull 1751F-815	(1979) Electrical Protection of Outside Plant
RUS Bull 1753F-201	(1997) Acceptance Tests of Telecommunications Plant (PC-4)
RUS Bull 1753F-401	(1995) Splicing Copper and Fiber Optic Cables (PC-2)

UL SOLUTIONS (UL)

UL 83	(2017; Reprint Mar 2020) UL Standard for Safety Thermoplastic-Insulated Wires and Cables
UL 497	(2001; Reprint Jul 2013) Protectors for Paired Conductor Communication Circuits
UL 510	(2020; Dec 2022) UL Standard for Safety Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape

1.2 RELATED REQUIREMENTS

Section 27 10 00, BUILDING TELECOMMUNICATIONS CABLING SYSTEM, andSection 33 71 02, UNDERGROUND ELECTRICAL DISTRIBUTION apply to this section with additions and modifications specified herein.

1.3 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms

used in this specification shall be as defined in TIA-568.1, TIA-568.2, TIA-568.3, TIA-569, TIA-606, and IEEE 100 and herein.

1.3.1 Campus Distributor (CD)

A distributor from which the campus backbone cabling emanates. (International expression for main cross-connect - (MC).)

1.3.2 Entrance Facility (EF) (Telecommunications)

An entrance to the building for both private and public network service cables (including antennae) including the entrance point at the building wall and continuing to the entrance room or space.

1.3.3 Entrance Room (ER) (Telecommunications)

A centralized space for telecommunications equipment that serves the occupants of a building. Equipment housed therein is considered distinct from a telecommunications room because of the nature of its complexity.

1.3.4 Building Distributor (BD)

A distributor in which the building backbone cables terminate and at which connections to the campus backbone cables may be made. (International expression for intermediate cross-connect - (IC).)

1.3.5 Pathway

A physical infrastructure utilized for the placement and routing of telecommunications cable.

1.4 SYSTEM DESCRIPTION

The telecommunications outside plant consists of cable, conduit, manholes, poles, etc. required to provide signal paths from the closest point of presence to the new facility, including free standing frames or backboards, interconnecting hardware, terminating cables, lightning and surge protection modules at the entrance facility. The work consists of providing, testing and making operational cabling, interconnecting hardware and lightning and surge protection necessary to form a complete outside plant telecommunications system for continuous use. The telecommunications contractor must coordinate with the NMCI contractor concerning layout and configuration of the EF telecommunications and OSP. The telecommunications contractor may be required to coordinate work effort for access to the EF telecommunications and OSP with the NMCI contractor.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval.Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Telecommunications Outside Plant; G

Telecommunications Entrance Facility Drawings; G

In addition to Section 01 33 00 SUBMITTAL PROCEDURES, provide shop drawings in accordance with paragraph SHOP DRAWINGS.

SD-03 Product Data

Wire and Cable; G

Cable Splices, and Connectors; G

Closures; G

Building Protector Assemblies; G

Protector Modules; G

Submittals shall include the manufacturer's name, trade name, place of manufacture, and catalog model or number. Submittals shall also include applicable federal, military, industry, and technical society publication references. Should manufacturer's data require supplemental information for clarification, the supplemental information shall be submitted as specified in paragraph REGULATORY REQUIREMENTS and as required for certificates in Section 01 33 00 SUBMITTAL PROCEDURES.

SD-06 Test Reports

Pre-installation Tests; G

Acceptance Tests; G

Outside Plant Test Plan; G

SD-07 Certificates

Telecommunications Contractor Qualifications; G

Key Personnel Qualifications; G

Minimum Manufacturer's Qualifications; G

SD-08 Manufacturer's Instructions

Building Protector Assembly Installation; G

Cable Tensions; G

Fiber Optic Splices; G

Submit instructions prior to installation.

SD-09 Manufacturer's Field Reports

Factory Reel Test Data; G

SD-10 Operation and Maintenance Data

Telecommunications Outside Plant (OSP), Data Package 5; G

Commercial off-the-shelf manuals shall be provided for operation, installation, configuration, and maintenance of products provided as a part of the telecommunications outside plant (OSP). Submit operations and maintenance data in accordance with Section 01 78 23, OPERATION AND MAINTENANCE DATA and as specified herein not later than 2 months prior to the date of beneficial occupancy. In addition to requirements of Data package 5, include the requirements of paragraphs TELECOMMUNICATIONS OUTSIDE PLANT SHOP DRAWINGS and TELECOMMUNICATIONS ENTRANCE FACILITY DRAWINGS.

SD-11 Closeout Submittals

Record Documentation; G

In addition to other requirements, provide in accordance with paragraph RECORD DOCUMENTATION.

1.6 QUALITY ASSURANCE

1.6.1 Shop Drawings

Include wiring diagrams and installation details of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork, and other items that must be shown to ensure a coordinated installation. Wiring diagrams shall identify circuit terminals and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment. Drawings shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices. Submittals shall include the nameplate data, size, and capacity. Submittals shall also include applicable federal, military, industry, and technical society publication references.

1.6.1.1 Telecommunications Outside Plant Shop Drawings

Provide Outside Plant Design in accordance with TIA-758, RUS Bull 1751F-630 for aerial system design, and RUS Bull 1751F-643 for underground system design. Provide T0 shop drawings that show the physical and logical connections from the perspective of an entire campus, such as actual building locations, exterior pathways and campus backbone cabling on plan view drawings, major system nodes, and related connections on the logical system drawings in accordance with TIA-606. Drawings shall include wiring and schematic diagrams for fiber optic and copper cabling and splices, copper conductor gauge and pair count, fiber pair count and type, pathway duct and innerduct arrangement, associated construction materials, and any details required to demonstrate that cable system has been coordinated and will properly support the switching and transmission system identified in specification and drawings. Provide Registered Communications Distribution Designer (RCDD) approved drawings of the telecommunications outside plant. The telecommunications outside plant (OSP) shop drawings shall be included in the operation and maintenance manuals.

1.6.1.2 Telecommunications Entrance Facility Drawings

Provide T3 drawings for EF Telecommunications as specified in the paragraph TELECOMMUNICATIONS SPACE DRAWINGS of Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEMS. The telecommunications entrance facility shop drawings shall be included in the operation and maintenance manuals.

1.6.2 Telecommunications Qualifications

Work under this section shall be performed by and the equipment shall be provided by the approved telecommunications contractor and key personnel. Qualifications shall be provided for: the telecommunications system contractor, the telecommunications system installer, the supervisor (if different from the installer), and the cable splicing and terminating personnel. A minimum of 30 days prior to installation, submit documentation of the experience of the telecommunications contractor and of the key personnel.

1.6.2.1 Telecommunications Contractor Qualifications

The telecommunications contractor shall be a firm which is regularly and professionally engaged in the business of the applications, installation, and testing of the specified telecommunications systems and equipment. The telecommunications contractor shall demonstrate experience in providing successful telecommunications systems that include outside plant and broadband cabling within the past 3 years. Submit documentation for a minimum of three and a maximum of five successful telecommunication system installations for the telecommunications contractor. Each of the key personnel shall demonstrate experience in providing successful telecommunications systems in accordance with TIA-758 within the past 3 years.

1.6.2.2 Key Personnel Qualifications

Provide key personnel who are regularly and professionally engaged in the business of the application, installation and testing of the specified telecommunications systems and equipment. There may be one key person or more key persons proposed for this solicitation depending upon how many of the key roles each has successfully provided. Each of the key personnel shall demonstrate experience in providing successful telecommunications systems within the past 3 years.

Cable splicing and terminating personnel assigned to the installation of this system or any of its components shall have training in the proper techniques and have a minimum of 3 years experience in splicing and terminating the specified cables. Modular splices shall be performed by factory certified personnel or under direct supervision of factory trained personnel for products used.

Supervisors and installers assigned to the installation of this system or any of its components shall have factory or factory approved certification from each equipment manufacturer indicating that they are qualified to install and test the provided products.

Submit documentation for a minimum of three and a maximum of five successful telecommunication system installations for each of the key personnel. Documentation for each key person shall include at least two successful system installations provided that are equivalent in system size and in construction complexity to the telecommunications system proposed for this solicitation. Include specific experience in installing and testing telecommunications outside plant systems, including broadband cabling, and provide the names and locations of at least two project installations successfully completed using optical fiber and copper telecommunications cabling systems. All of the existing telecommunications system installations offered by the key persons as successful experience shall have been in successful full-time service for

at least 18 months prior to the issuance date for this solicitation. Provide the name and role of the key person, the title, location, and completed installation date of the referenced project, the referenced project owner point of contact information including name, organization, title, and telephone number, and generally, the referenced project description including system size and construction complexity.

Indicate that all key persons are currently employed by the telecommunications contractor, or have a commitment to the telecommunications contractor to work on this project. All key persons shall be employed by the telecommunications contractor at the date of issuance of this solicitation, or if not, have a commitment to the telecommunications contractor to work on this project by the date that the bid was due to the Contracting Officer.

Note that only the key personnel approved by the Contracting Officer in the successful proposal shall do work on this solicitation's telecommunications system. Key personnel shall function in the same roles in this contract, as they functioned in the offered successful experience. Any substitutions for the telecommunications contractor's key personnel requires approval from The Contracting Officer.

1.6.2.3 Minimum Manufacturer's Qualifications

Cabling, equipment and hardware manufacturers shall have a minimum of 3 years experience in the manufacturing, assembly, and factory testing of components which comply with, TIA-568.1, TIA-568.2 and TIA-568.3. In addition, cabling manufacturers shall have a minimum of 3 years experience in the manufacturing and factory testing of cabling which comply with ICEA S-87-640, ICEA S-98-688, and ICEA S-99-689.

1.6.3 Outside Plant Test Plan

Prepare and provide a complete and detailed test plan for field tests of the outside plant including a complete list of test equipment for the copper conductor and optical fiber cables, components, and accessories for approval by the Contracting Officer. Include a cut-over plan with procedures and schedules for relocation of facility station numbers without interrupting service to any active location. Submit the plan at least 30 days prior to tests for Contracting Officer approval. Provide outside plant testing and performance measurement criteria in accordance with TIA-568.1 and RUS Bull 1753F-201. Include procedures for certification, validation, and testing that includes fiber optic link performance criteria.

1.6.4 Standard Products

Provide materials and equipment that are standard products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship and shall be the manufacturer's latest standard design that has been in satisfactory commercial or industrial use for at least 2 years prior to bid opening. The 2-year period shall include applications of equipment and materials under similar circumstances and of similar size. The product shall have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period. Products supplied shall be specifically designed and manufactured for use with outside plant telecommunications systems. Where two or more items of the same class of equipment are required, these items shall be products of a

single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section. All products must be approved by BCO/TSD via CO.

1.6.4.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is provided.

1.6.4.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site shall not be used, unless specified otherwise.

1.6.5 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean BCO/TSD via the Contracting Officer. Equipment, materials, installation, and workmanship shall be in accordance with the mandatory and advisory provisions of NFPA 70 unless more stringent requirements are specified or indicated.

1.6.5.1 Independent Testing Organization Certificate

In lieu of the label or listing, submit a certificate from an independent testing organization, competent to perform testing, and approved by the Contracting Officer. The certificate shall state that the item has been tested in accordance with the specified organization's test methods and that the item complies with the specified organization's reference standard.

1.7 DELIVERY, STORAGE, AND HANDLING

Ship cable on reels in 500 feet length with a minimum overage of 10 percent. Radius of the reel drum shall not be smaller than the minimum bend radius of the cable. Wind cable on the reel so that unwinding can be done without kinking the cable. Two meters of cable at both ends of the cable shall be accessible for testing. Attach permanent label on each reel showing length, cable identification number, cable size, cable type, and date of manufacture. Provide water resistant label and the indelible writing on the labels. Apply end seals to each end of the cables to prevent moisture from entering the cable. Reels with cable shall be suitable for outside storage conditions when temperature ranges from minus 40 degrees C to plus 65 degrees C, with relative humidity from 0 to 100 percent. Equipment, other than cable, delivered and placed in storage shall be stored with protection from weather, humidity and temperature variation, dirt and dust, or other contaminants in accordance with manufacturer's requirements.

1.8 MAINTENANCE

1.8.1 Record Documentation

Provide the activity responsible for telecommunications system maintenance

and administration a single complete and accurate set of record documentation for the entire telecommunications system with respect to this project.

Provide record documentation as specified in Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEM.

1.9 WARRANTY

The equipment items shall be supported by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

Products supplied shall be specifically designed and manufactured for use with outside plant telecommunications systems and must be approved by BCO/TSD.

2.2 TELECOMMUNICATIONS ENTRANCE FACILITY

2.2.1 Building Protector Assemblies

Provide self-contained 5 pin unit supplied with a field cable stub factory connected to protector socket blocks to terminate and accept protector modules for pairs of outside cable. Building protector assembly shall have interconnecting hardware for connection to interior cabling at full capacity. Provide manufacturers instructions for building protector assembly installation. Provide copper cable interconnecting hardware as specified in Section 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEM. Coordinate multiple protectors with BCO.

2.2.2 Protector Modules

Provide in accordance with UL 497 three-electrode gas tube or solid state type 5 pin rated for the application. Provide gas tube protection modules in accordance with RUS Bull 345-83 and shall be heavy duty, A>10kA, B>400, C>65A where A is the maximum single impulse discharge current, B is the impulse life and C is the AC discharge current in accordance with ANSI C62.61. The gas modules shall shunt high voltage to ground, fail short, and be equipped with an external spark gap and heat coils in accordance with UL 497. Provide the number of surge protection modules equal to the number of pairs of exterior cable of the building protector assembly.

2.2.3 Fiber Optic Terminations

Provide fiber optic cable terminations as specified in 27 10 00 BUILDING TELECOMMUNICATIONS CABLING SYSTEM.

2.3 CLOSURES

2.3.1 Copper Conductor Closures

2.3.1.1 Underground Cable Closures

a. Aboveground: Provide aboveground closures constructed of not less than 14 gauge steel and acceptable for pole mounting in accordance with RUS 1755.910. Closures shall be sized and contain a marker as indicated. Covers shall be secured to prevent unauthorized entry.

b. Direct burial: Provide buried closure suitable for enclosing a straight, butt, and branch splice in a container into which can be poured an encapsulating compound. Closure shall have adequate strength to protect the splice and maintain cable shield electrical continuity in the buried environment. Encapsulating compound shall be reenterable and shall not alter the chemical stability of the closure. Provide filled splice cases in accordance with RUS Bull 345-72. Note: Camp Lejeune does not use buried closures.

c. In vault or manhole: Provide underground closure suitable to house a straight, butt, and branch splice in a protective housing into which can be poured an encapsulating compound. Closure shall be of suitable thermoplastic, thermoset, or stainless steel material supplying structural strength necessary to pass the mechanical and electrical requirements in a vault or manhole environment. Encapsulating compound shall be reenterable and shall not alter the chemical stability of the closure. Provide filled splice cases in accordance with RUS Bull 345-72. Closure shall only be flash tested and encapulate provided.

2.3.2 Fiber Optic Closures

2.3.2.1 Aerial

Provide aerial closure that is free breathing and suitable for housing splice organizer of non -pressurized cables. Closure shall be constructed from heavy PVC with ultraviolet resistance. Note: Camp Lejeune does not have Aerial.

2.3.2.2 Direct Burial

Provide buried closure suitable to house splice organizer in protective housing into which can be poured an encapsulating compound. Closure shall have adequate strength to protect the splice and maintain cable shield electrical continuity, when metallic, in buried environment. Encapsulating compound shall be reenterable and shall not alter chemical stability of the closure. Note: Camp Lejeune does not use buried closures.

2.3.2.3 In Vault or Manhole

Provide underground closure suitable to house splice organizer in a protective housing into which can be poured an encapsulating compound. Closure shall be of thermoplastic, thermoset, or stainless steel material supplying structural strength necessary to pass the mechanical and electrical requirements in a vault or manhole environment. Encapsulating compound shall be reenterable and shall not alter the chemical stability of the closure. Closure should only be flash tested and encapsulate provided.

2.4 CABLE SPLICES, AND CONNECTORS

2.4.1 Copper Cable Splices

Provide multipair, foldback splices of a moisture resistant, two-wire insulation displacement connector held rigidly in place to assure maximum continuity in accordance with RUS Bull 1753F-401. Cables greater than 25 pairs shall be spliced using multipair splicing connectors, which accommodate 25 pairs of conductors at a time. Provide correct connector size to accommodate the cable gauge of the supplied cable.

2.4.2 Copper Cable Splice Connector

Provide splice connectors with a polycarbonate body and cap and a tin-plated brass contact element. Connector shall accommodate 22 to 26 AWG solid wire with a maximum insulation diameter of 0.065 inch. Fill connector with sealant grease to make a moisture resistant connection, in accordance with RUS Bull 1753F-401.

2.4.3 Fiber Optic Cable Splices

Provide fiber optic cable splices and splicing materials for fusion methods at locations shown on the construction drawings. The splice insertion loss shall be 0.3 dB maximum when measured in accordance with TIA-455-78-B using an Optical Time Domain Reflectometer (OTDR). Splices shall be designed for a return loss of 40.0 db max for single mode fiber when tested in accordance with TIA-455-107. Physically protect each fiber optic splice by a splice kit specially designed for the splice.

2.4.4 Shield Connectors

Provide connectors with a stable, low-impedance electrical connection between the cable shield and the bonding conductor in accordance with RUS Bull 345-65.

2.5 CONDUIT

Provide conduit as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION, BICSI OSP Design, and guidance from BCO/TSD via Contracting Officer.

2.6 PLASTIC INSULATING TAPE

UL 510. Tape shall be premium quality, heavy-duty, weather resistant.

2.7 WIRE AND CABLE

2.7.1 Copper Conductor Cable

Solid copper conductors, covered with an extruded solid insulating compound. Insulated conductors shall be twisted into pairs which are then stranded or oscillated to form a cylindrical core. For special high frequency applications, the cable core shall be separated into compartments. Cable shall be completed by the application of a suitable core wrapping material, a corrugated copper or plastic coated aluminum shield, and an overall extruded jacket. Telecommunications contractor shall verify distances between splice points prior to ordering cable in specific cut lengths. Gauge of conductor shall determine the range of

numbers of pairs specified; 19 gauge (6 to 400 pairs), 22 gauge (6 to 1200 pairs), 24 gauge (6 to 2100 pairs), and 26 gauge (6 to 3000 pairs). PE-39 shall be used whenever available. PE-89 is only authorized when PE-39 is not available. Copper conductor shall conform to the following:

2.7.1.1 Underground

Provide filled cable meeting the requirements of ICEA S-99-689 and RUS 1755.390 (type PE-39/89). Provide enough slack for splicing.

2.7.1.2 Screen

Provide screen-compartmental core cable filled cable meeting the requirements of ICEA S-99-689 and RUS 1755.390.

2.7.2 Fiber Optic Cable

Provide single-mode, 8/125-um, 0.10 aperture 1550 nm fiber optic cable in accordance with TIA-492E000, TIA-472D000, and ICEA S-87-640 including any special requirements made necessary by a specialized design. Provide 12 optical fibers as indicated. Fiber optic cable shall be shielded and specifically designed for outside use with loose buffer construction. Provide fiber optic color code in accordance with TIA/EIA-598

2.7.2.1 Strength Members

Provide central, non-metallic strength members with sufficient tensile strength for installation and residual rated loads to meet the applicable performance requirements in accordance with ICEA S-87-640. The strength member is included to serve as a cable core foundation to reduce strain on the fibers, and shall not serve as a pulling strength member.

2.7.2.2 Shielding or Other Metallic Covering

Provide copper, copper alloy or copper and steel laminate, single tape covering or shield in accordance with ICEA S-87-640. Over all shield is for locating.

2.7.2.3 Performance Requirements

Provide fiber optic cable with optical and mechanical performance requirements in accordance with ICEA S-87-640.

2.7.3 Grounding and Bonding Conductors

Provide grounding and bonding conductors in accordance with RUS 1755.200, TIA-607, IEEE C2, and NFPA 70. Solid bare copper wire meeting the requirements of ASTM B1 for sizes No. 8 AWG and smaller and stranded bare copper wire meeting the requirements of ASTM B8, for sizes No. 6 AWG and larger. Insulated conductors shall have 600-volt, Type TW insulation meeting the requirements of UL 83.

2.8 CABLE TAGS IN MANHOLES, HANDHOLES, AND VAULTS

Provide tags for each telecommunications cable or wire located in manholes, handholes, and vaults. Cable tags shall be stainless steel and labeled in accordance with TIA-606. Handwritten labeling is unacceptable. Coordinate cable tag information with TSD.

2.8.1 Stainless Steel

Provide stainless steel, cable tags 1 5/8 inches in diameter 1/16 inch thick minimum, and circular in shape. Tags shall be die stamped with numbers, letters, and symbols not less than 0.25 inch high and approximately 0.015 inch deep in normal block style.

2.9 BURIED WARNING AND IDENTIFICATION TAPE

Provide fiber optic media marking and protection in accordance with TIA-590. Provide color, type and depth of tape as specified in paragraph BURIED WARNING AND IDENTIFICATION TAPE in Section 31 00 00, EARTHWORK.

2.10 GROUNDING BRAID

Provide grounding braid that provides low electrical impedance connections for dependable shield bonding in accordance with RUS 1755.200. Braid shall be made from flat tin-plated copper.

2.11 MANUFACTURER'S NAMEPLATE

Each item of equipment shall have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.12 FIELD FABRICATED NAMEPLATES

Provide laminated plastic nameplates in accordance with ASTM D709 for each patch panel, protector assembly, rack, cabinet and other equipment or as indicated on the drawings. Each nameplate inscription shall identify the function and, when applicable, the position. Nameplates shall be melamine plastic, 0.125 inch thick, white with black center core. Surface shall be matte finish. Corners shall be square. Accurately align lettering and engrave into the core. Minimum size of nameplates shall be one by 2.5 inches. Lettering shall be a minimum of 0.25 inch high normal block style.

2.13 TESTS, INSPECTIONS, AND VERIFICATIONS

2.13.1 Factory Reel Test Data

Test 100 percent OTDR test of FO media at the factory in accordance with TIA-568.1 and TIA-568.3. Use TIA-526-7 for single mode fiber and TIA-526-14 Method B for multi mode fiber measurements. Calibrate OTDR to show anomalies of 0.2 dB minimum. Enhanced performance filled OSP copper cables, referred to as Broadband Outside Plant (BBOSP), shall meet the requirements of ICEA S-99-689. Enhanced performance air core OSP copper cables shall meet the requirements of ICEA S-98-688. Submit test reports, including manufacture date for each cable reel and receive approval before delivery of cable to the project site.

PART 3 EXECUTION

3.1 INSTALLATION

Install all system components and appurtenances in accordance with manufacturer's instructions IEEE C2, NFPA 70, and as indicated. Provide all necessary interconnections, services, and adjustments required for a complete and operable telecommunications system.

3.1.1 Contractor Damage

Promptly repair indicated utility lines or systems damaged during site preparation and construction. Damages to lines or systems not indicated, which are caused by Contractor operations, shall be treated as "Changes" under the terms of the Contract Clauses. When Contractor is advised in writing of the location of a nonindicated line or system, such notice shall provide that portion of the line or system with "indicated" status in determining liability for damages. In every event, immediately notify the BCO/TSD vis Contracting Officer of damage.

3.1.2 Cable Inspection and Repair

Handle cable and wire provided in the construction of this project with care. Inspect cable reels for cuts, nicks or other damage. Damaged cable shall be replaced or repaired to the satisfaction of the Contracting Officer/ BCO/TSD. Reel wraps shall remain intact on the reel until the cable is ready for placement.

3.1.3 Cable Protection

Provide direct burial cable protection in accordance with NFPA 70 and as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION. Galvanized conduits which penetrate concrete (slabs, pavement, and walls) shall be PVC coated and shall extend from the first coupling or fitting outside either side of the concrete minimum of 6 inches per 12 inches burial depth beyond the edge of the surface where cable protection is required; all conduits shall be sealed on each end. Where additional protection is required, cable may be placed in galvanized iron pipe (GIP) sized on a maximum fill of 40 percent of cross-sectional area, or in concrete encased 4 inches PVC pipe. Conduit may be installed by jacking or trenching. Trenches shall be backfilled with earth and mechanically tamped at 6 inches lift so that the earth is restored to the same density, grade and vegetation as adjacent undisturbed material.

3.1.3.1 Cable End Caps

Cable ends shall be sealed at all times with coated heat shrinkable end caps. Cables ends shall be sealed when the cable is delivered to the job site, while the cable is stored and during installation of the cable. The caps shall remain in place until the cable is spliced or terminated. Sealing compounds and tape are not acceptable substitutes for heat shrinkable end caps. Cable which is not sealed in the specified manner at all times will be rejected.

3.1.4 Underground Duct

Provide underground duct and connections to existing manholes, handholes, existing ducts as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION with any additional requirements as specified herein. Ducts shall be min 103mm 4 inch and 4way.

3.1.5 Reconditioning of Surfaces

Provide reconditioning of surfaces as specified in Section 33 71 02 UNDERGROUND ELECTRICAL DISTRIBUTION.

3.1.6 Penetrations

Caulk and seal cable access penetrations in walls, ceilings and other parts of the building. Seal openings around electrical penetrations through fire resistance-rated wall, partitions, floors, or ceilings in accordance with Section 07 84 00 FIRESTOPPING.

3.1.7 Cable Pulling

Test duct lines with BCO/TSD aluminum test mandrel, after contractor removal of foreign material and before the pulling of cables. Avoid damage to cables in setting up pulling apparatus or in placing tools or hardware. Do not step on cables when entering or leaving the manhole. Do not place cables in ducts other than those shown without prior written approval of the Contracting Officer / BCO/TSD. Roll cable reels in the direction indicated by the arrows painted on the reel flanges. Set up cable reels on the same side of the manhole as the conduit section in which the cable is to be placed. Level the reel and bring into proper alignment with the conduit section so that the cable pays off from the top of the reel in a long smooth bend into the duct without twisting. Under no circumstances shall the cable be paid off from the bottom of a reel. Check the equipment set up prior to beginning the cable pulling to avoid an interruption once pulling has started. Use a cable feeder guide of suitable dimensions between cable reel and face of duct to protect cable and guide cable into the duct as it is paid off the reel. As cable is paid off the reel, lubricate and inspect cable for sheath defects. When defects are noticed, stop pulling operations and notify the Contracting Officer to determine required corrective action. Cable pulling shall also be stopped when reel binds or does not pay off freely. Rectify cause of binding before resuming pulling operations. Provide cable lubricants recommended by the cable manufacturer. Avoid bends in cables of small radii and twists that might cause damage. Do not bend cable and wire in a radius less than 10 times the outside diameter of the cable or wire. Mandrel should glide through and be hand pulled (BICSI).

3.1.7.1 Cable Tensions

Obtain from the cable manufacturer and provide to the Contracting Officer, the maximum allowable pulling tension. This tension shall not be exceeded.

3.1.7.2 Pulling Eyes

Equip cables 1.25 inches in diameter and larger with cable manufacturer's factory installed pulling-in eyes. Provide cables with diameter smaller than 1.25 inches with heat shrinkable type end caps or seals on cable ends when using cable pulling grips. Rings to prevent grip from slipping shall not be beaten into the cable sheath. Use a swivel of 3/4 inch links between pulling-in eyes or grips and pulling strand.

3.1.7.3 Installation of Cables in Manholes, Handholes, and Vaults

Do not install cables utilizing the shortest route, but route along those walls providing the longest route and the maximum spare cable lengths. Form cables to closely parallel walls, not to interfere with duct entrances, and support cables on brackets and cable insulators at a maximum of 4 feet. In existing manholes, handholes, and vaults where new ducts are to be terminated, or where new cables are to be installed, modify the existing installation of cables, cable supports, and grounding as required with cables arranged and supported as specified for new

cables. Identify each cable with corrosion-resistant embossed metal tags. Provide adequate slack for splicing operations.

3.1.8 Cable Splicing

3.1.8.1 Copper Conductor Splices

Perform splicing in accordance with requirements of RUS Bull 1753F-401 except that direct buried splices and twisted and soldered splices are not allowed. Exception does not apply for pairs assigned for carrier or CATV application.

3.1.8.2 Fiber Optic Splices

Fiber optic splicing shall be in accordance with manufacturer's recommendation and shall exhibit an insertion loss not greater than 0.2 dB for fusion splices.

3.1.9 Surge Protection

All cables and conductors, except fiber optic cable, which serve as communication lines through off-premise lines, shall have surge protection installed at each end which meet the requirements of RUS Bull 1751F-815.

3.1.10 Grounding

Provide grounding and bonding in accordance with RUS 1755.200, TIA-607, IEEE C2, and NFPA 70. Ground exposed noncurrent carrying metallic parts of telephone equipment, cable sheaths, cable splices, and terminals.

3.1.10.1 Telecommunications Master Ground Bar (TMGB)

The TMGB is the hub of the basic telecommunications grounding system providing a common point of connection for ground from outside cable, CD, and equipment. Establish a TMGB for connection point for cable stub shields to connector blocks and CD protector assemblies as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM.

3.1.10.2 Incoming Cable Shields

Shields shall not be bonded across the splice to the cable stubs. Ground shields of incoming cables in the EF Telecommunications to the TMGB.

3.1.10.3 Campus Distributor Grounding

a. Protection assemblies: Mount CD protector assemblies directly on the telecommunications backboard. Connect assemblies mounted on each vertical frame with No. 6 AWG copper conductor to provide a low resistance path to TMGB.

b. TMGB connection: Connect TMGB to TGB with copper conductor with a total resistance of less than 0.01 ohms.

3.1.11 Cut-Over

All necessary transfers and cut-overs, shall be coordinated with BCO/TSD as some may/may not be accomplished by the telecommunications contractor.

3.2 LABELING

3.2.1 Labels

Provide labeling for new cabling and termination hardware located within the facility in accordance with TIA-606. Handwritten labeling is unacceptable. Stenciled lettering for cable and termination hardware shall be provided using laser printer.

3.2.2 Cable Tag Installation

Install cable tags for each telecommunications cable or wire located in manholes, handholes, and vaults including each splice. Tag new wire and cable provided under this contract and existing wire and cable which are indicated to have splices and terminations provided by this contract. The labeling of telecommunications cable tag identifiers shall be in accordance with TIA-606. Do not provide handwritten letters. Install cable tags so that they are clearly visible without disturbing any cabling or wiring in the manholes, handholes, and vaults.

3.2.3 Termination Hardware

Label patch panels, distribution panels, connector blocks and protection modules using color coded labels with identifiers in accordance with TIA-606.

3.3 FIELD FABRICATED NAMEPLATE MOUNTING

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets.

3.4 FIELD QUALITY CONTROL

Provide the Contracting Officer 10 working days notice prior to each test. Provide labor, equipment, and incidentals required for testing. Correct defective material and workmanship disclosed as the results of the tests. Furnish a signed copy of the test results to the Contracting Officer within 3 working days after the tests for each segment of construction are completed. Perform testing as construction progresses and do not wait until all construction is complete before starting field tests.

3.4.1 Pre-Installation Tests

Perform the following tests on cable at the job site before it is removed from the cable reel. For cables with factory installed pulling eyes, these tests shall be performed at the factory and certified test results shall accompany the cable.

3.4.1.1 Cable Capacitance

Perform capacitance tests on at least 10 percent of the pairs within a cable to determine if cable capacitance is within the limits specified.

3.4.1.2 Loop Resistance

Perform DC-loop resistance on at least 10 percent of the pairs within a cable to determine if DC-loop resistance is within the manufacturer's

calculated resistance.

3.4.1.3 Pre-Installation Test Results

Provide results of pre-installation tests to the Contracting Officer at least 5 working days before installation is to start. Results shall indicate reel number of the cable, manufacturer, size of cable, pairs tested, and recorded readings. When pre-installation tests indicate that cable does not meet specifications, remove cable from the job site.

3.4.2 Acceptance Tests

Perform acceptance testing in accordance with RUS Bull 1753F-201 and as further specified in this section. Provide personnel, equipment, instrumentation, and supplies necessary to perform required testing. Notification of any planned testing shall be given to the Contracting Officer at least 14 days prior to any test unless specified otherwise. Testing shall not proceed until after the Contractor has received written Contracting Officer's approval of the test plans as specified. Test plans shall define the tests required to ensure that the system meets technical, operational, and performance specifications. The test plans shall define milestones for the tests, equipment, personnel, facilities, and supplies required. The test plans shall identify the capabilities and functions to be tested. Provide test reports in local provider format showing all field tests performed, upon completion and testing of the installed system, to the Contracting Officer /BCO /TSD. Measurements shall be tabulated on a pair by pair or strand by strand basis.

3.4.2.1 Copper Conductor Cable

Perform the following acceptance tests in accordance with TIA-758:

a. Wire map (pin to pin continuity)

b. Continuity to remote end

c. Crossed pairs

d. Reversed pairs

e. Split pairs

f. Shorts between two or more conductors

3.4.2.2 Fiber Optic Cable

Test fiber optic cable in accordance with TIA/EIA-455 and as further specified in this section. Two optical tests shall be performed on all optical fibers: Optical Time Domain Reflectometry (OTDR) Test, and Attenuation Test. In addition, a Bandwidth Test shall be performed on all multimode optical fibers. These tests shall be performed on the completed end-to-end spans which include the near-end pre-connectorized single fiber cable assembly, outside plant as specified, and the far-end pre-connectorized single fiber cable assembly.

a. OTDR Test: The OTDR test shall be used to determine the adequacy of the cable installations by showing any irregularities, such as discontinuities, micro-bendings or improper splices for the cable span under test. Hard copy fiber signature records shall be obtained from

the OTDR for each fiber in each span and shall be included in the test results. The OTDR test shall be measured in both directions. A reference length of fiber, 66 feet minimum, used as the delay line shall be placed before the new end connector and after the far end patch panel connectors for inspection of connector signature. Conduct OTDR test and provide calculation or interpretation of results in accordance with TIA-526-7 for single-mode fiber and TIA-526-14 for multimode fiber. Splice losses shall not exceed 0.3 db.

b. Attenuation Test: End-to-end attenuation measurements shall be made on all fibers, in both directions, using a 1550 nanometer light source at one end and the optical power meter on the other end to verify that the cable system attenuation requirements are met in accordance with TIA-526-7 for single-mode fiber optic cables. The measurement method shall be in accordance with TIA-455-78-B. Attenuation losses shall not exceed 0.5 db/km at 1310 nm and 1550 nm for single-mode fiber. Attenuation losses shall not exceed 5.0 db/km at 850 nm and 1.5 db/km at 1300 nm for multimode fiber.

c. Bandwidth Test: The end-to-end bandwidth of all multimode fiber span links shall be measured by the frequency domain method. The bandwidth shall be measured in both directions on all fibers. The bandwidth measurements shall be in accordance with TIA/EIA-455-204.

3.4.3 Soil Density Tests

a. Determine soil-density relationships for compaction of backfill material in accordance with ASTM D1557, Method D.

-- End of Section --

ASBESTOS AND LEAD-PAINT SURVEY

REPAIR BEQ G702

CAMP GEIGER
MCB CAMP LEJEUNE, NORTH CAROLINA 28542

ECS PROJECT NO. 49:26342

FOR: MBF ARCHITECTS PA

APRIL 23, 2026

April 23, 2026

Mr. Bill Faulkenberry
MBF Architects PA
317-C Pollock Street
New Bern, North Carolina 28560
faulkenberry@mbfarchitects.com

ECS Project No. 49:26342

Reference: Asbestos and Lead-Paint Survey, Repair BEQ G702, Camp Geiger, MCB Camp Lejeune, North Carolina

Dear Mr. Faulkenberry:

ECS Southeast, LLC (ECS) is pleased to provide MBF Architects PA with the results of the above referenced Asbestos and Lead-Paint Survey performed for the Repair BEQ G702 project located at Camp Geiger in MCB Camp Lejeune, North Carolina. This report summarizes our observations, analytical results, findings, and recommendations related to the work performed. The work described in this report was performed by ECS in general accordance with the Scope of Services described in ECS Proposal Number 49:50782P and the terms and conditions of the agreement authorizing those services.

ECS appreciates this opportunity to provide MBF Architects PA with our services. If we can be of further assistance to you, please do not hesitate to contact us.

Sincerely,

ECS Southeast, LLC

Braxton B. Dawson
Environmental Project Manager
bdawson@ecslimited.com
910-686-9114

Jenny Clark, REM
Associate Environmental Principal
jclark@ecslimited.com
404-640-9257

EXECUTIVE SUMMARY

The subject property is improved with a Bachelor's Enlisted Quarters located at Camp Geiger in MCB Camp Lejeune, Onslow County, North Carolina. The structure consists of 36,868 square feet and was reportedly originally constructed in 1999. G713 is a separate mechanical building that services G702. G575 is a sanitary sewer lift station that services G702. At the time of our survey, the subject buildings were occupied and are currently scheduled to be renovated.

The purpose of the survey was to determine whether asbestos-containing materials (ACMs) and lead-containing paint (LCP) are present on the subject property. The assessment was limited to the proposed renovation scope of work.

Asbestos Survey

On September 17, 2025, Mr. Braxton B. Dawson, an accredited inspector, performed the initial asbestos assessment. A subsequent destructive sampling scope was performed on December 30, 2025 to determine if damp-proofing on CMU behind exterior brick veneer contained asbestos. The destructive assessment also included shower pans and vanity mirrors inside the living quarters. Lift station G575 was evaluated on March 30, 2026 as part of this renovation project. Bulk samples were submitted to Scientific Analytical Institute, Inc. (SAI) in Greensboro, North Carolina for analysis via Polarized Light Microscopy (PLM) in accordance with the current EPA-600 methodology.

A total of 48 bulk samples from 19 homogeneous areas were submitted to the laboratory, of which 54 layers were analyzed from the first sampling event. For destructive testing, 4 more bulk samples from 2 homogeneous areas were submitted to the laboratory, of which 8 additional layers were analyzed. 5 samples were submitted and analysed from G575. Based on the laboratory analysis of the bulk samples collected during the survey, none of the materials were reported to contain asbestos.

Due to inaccessibility or the destructive means that asbestos sampling requires, unseen ACMs may remain within the building hidden behind inaccessible areas, which include, but are not limited to, sub-grade walls, structural members, topping slabs, sub-grade sealants, flooring located below underlayments, areas behind exterior walls, pipe trenches, and subsurface utilities.

If suspect materials are discovered during construction activities, they should be presumed to contain asbestos and be treated as ACMs or be sampled immediately upon discovery and prior to disturbance for asbestos content by an accredited or certified asbestos inspector in accordance with 29 Code of Federal Regulations (CFR) 1926.1101.

Lead Paint Survey

The lead paint assessment was conducted by the collection of paint chip samples from suspect lead paint materials. The paint chip samples were submitted to a laboratory that participates in the American Industrial Hygiene Association (AIHA) Environmental Lead Proficiency Analytical Testing (ELPAT) Program for analysis of lead concentration (percent by weight) using Flame Atomic Absorption Spectroscopy.

Based on laboratory analysis of the paint chip samples collected and analyzed for lead content, lead was not detected above the method detection limit for the samples collected from G702 and G713.

However, lead was detected above the method detection limit at Lift Station G575. The following components sampled from G575 were reported as lead-containing paint:

- White CMU Walls - Interior Walls
- White Pump Piping - Exterior Wet Well

Paint and surface coatings that contain detectable concentrations of lead are considered "lead-containing paints." Since OSHA has no specific action level for lead in paint, all paint on the site found to have a measurable concentration of lead should be assumed to be lead-containing. Work performed that may disturb lead-containing paint is regulated under OSHA, as referenced under 29 CFR 1926.62.

The executive summary is an integral portion of this report; however, ECS recommends that the report be read in its entirety.

TABLE OF CONTENTS

PAGE

1.0 SITE DESCRIPTION **1**

2.0 PURPOSE **1**

3.0 METHODOLOGY **1**

3.1 Asbestos-Containing Materials 1

3.2 Lead in Paint and Surface Coatings 2

4.0 RESULTS **2**

4.1 Asbestos Sampling 2

4.2 Suspect or Assumed Asbestos-Containing Materials 5

4.3 Lead in Paint and Surface Coatings 5

5.0 RECOMMENDATIONS AND REGULATORY REQUIREMENTS **8**

5.1 Asbestos-Containing Materials 8

5.2 Lead in Paint and Surface Coatings 8

6.0 LIMITATIONS **9**

TABLE OF APPENDICES

Appendix I: Figures

Appendix II: Site Photographs

Appendix III: Asbestos Bulk Sample Results

Appendix IV: Lead Laboratory Analytical Results

Appendix V: Licenses & Certifications

1.0 SITE DESCRIPTION

The subject property is developed with a Bachelor's Enlisted Quarters (BEQ), building G702, located at Camp Geiger on Marine Corps Base (MCB) Camp Lejeune in Jacksonville, Onslow County, North Carolina. Based on the information available, BEQ G702 comprises approximately 36,868 square feet of space and was reportedly constructed in 1999. G713 is a separate mechanical building that services G702. G575 is a sanitary sewer lift station that services G702. The buidlings are currently occupied and are slated for renovations. ECS was requested to conduct an asbestos and lead paint survey prior to the proposed renovations.

The exterior is comprised of a brick facade, with slab-on-grade, and a metal roof. Interior finishes consist of suspended ceiling tiles, concrete masonry unit (CMU) block, gypsum wallboard, ceiling texture, and coated concrete floors.

2.0 PURPOSE

The purpose of the Asbestos and Lead-Paint Survey was to identify asbestos-containing materials (ACM) and lead-containing paint (LCP), which may require special handling and/or disposal if disturbed during construction activities. The identification of ACMs requires trained labor, regulated work practices, and special disposal. The identification of LCP or other lead hazards requires disclosure to contractors and monitoring of lead exposure. The assessment was limited to the proposed renovation scope of work.

3.0 METHODOLOGY

ECS performed the authorized Scope of Services in general accordance with our proposal, standard industry practice(s) and methods specified by regulation(s) for the identification of ACMs and LCPs.

3.1 Asbestos-Containing Materials

The non-invasive asbestos survey was performed by Mr. Braxton B. Dawson (NC Asbestos Inspector No. 12830) on September 17, 2025. A subsequent destructive sampling scope was performed on December 30, 2025 to determine if damp-proofing mastic on CMU behind exterior brick veneer contained asbestos. The destructive assessment also included shower pans and vanity mirrors inside the east squadron bay bathrooms on the second floor. Lift station G575 was evaluated on March 30, 2026 as part of this renovation project. The survey consisted of observing the accessible areas of the buildings for the presence of suspect materials that may contain asbestos. The survey involved detecting both friable materials (materials that can be pulverized or reduced to a powder by hand pressure when dry) and non-friable materials (materials that pose a hazard when sawn, sanded, drilled, or pulverized). Homogeneous materials (based on material type, color, texture, etc.) were identified during the survey.

The EPA National Emissions Standard for Hazardous Air Pollutants (NESHAP) requires a survey for asbestos before renovation or demolition. Demolition is defined under NESHAP as the removal of a load-bearing structural member, and renovation is an action that disturbs building materials. Based on requirements under NESHAP and the North Carolina Asbestos Hazard Management Program (AHMP), administered by the Health Hazards Control Unit (HHCU) for renovation or demolition

activities, ECS conducted a limited survey for potential ACM. The ACM survey was limited in that we did not conduct demolition, such as jack/sledgehammering, to expose potentially concealed materials. Samples were collected in general accordance with Environmental Protection Agency (EPA) Standard 40 CFR 763 Subpart E, Asbestos Hazard Emergency Response Act (AHERA), and Occupational Safety and Health Administration (OSHA) Standard 29 CFR 1926.1101 Inspection Protocol.

Representative bulk samples were collected, placed in sealed packages, and submitted to SAI for analysis using the Environmental Protection Agency (EPA) recommended method of Polarized Light Microscopy (PLM) coupled with dispersion staining (Method No. EPA 600/R-93/116). SAI participates in the National Voluntary Laboratory Accreditation Program (NVLAP). Their NVLAP accreditation number is 200664-0. Several of the samples were layered and analyzed as multiple samples. EPA regulations require collecting multiple samples of each homogeneous area for laboratory analysis. The material type, sample location, and analytical results of each bulk sample are also summarized in the attached Asbestos Bulk Analysis report in **Appendices**.

Samples were analyzed using the "Positive Stop" methodology. If one sample of a homogeneous material is reported to contain asbestos, the remaining samples are not analyzed. If one sample of a material from a homogeneous area is reported to contain greater than 1% asbestos, then by EPA definition, it is characterized as an ACM regardless of additional analysis.

During the survey, ECS attempted to identify suspect ACMs in readily accessible areas. However, due to the destructive means required to identify some materials, certain areas were deemed inaccessible (i.e. behind walls or sub-grade materials) and were not surveyed for suspect ACMs.

3.2 Lead in Paint and Surface Coatings

ECS completed a lead paint screening within the buildings as part of our assessment activities. The collection of representative paint chip samples was performed throughout G702, G713 and G575. Samples collected were containerized, labeled, and transported to SAI. Each of the paint chip samples was subsequently analyzed for the presence of lead, reported in percent lead by weight, via EPA Method SW 846, 7000B (Flame AAS). The chain-of-custody, which includes sample numbers and sample locations, is included in an Appendix of this report.

4.0 RESULTS

The following is a summary of laboratory results, findings and observations.

4.1 Asbestos Sampling

In total, 48 bulk samples from 19 homogeneous areas were submitted to the laboratory, of which 54 layers were analyzed from the first sampling event. For destructive testing, 4 more bulk samples from 2 homogeneous areas were submitted to the laboratory, of which 8 additional layers were analyzed. 5 samples were submitted and analyzed from G575.

An ACM is defined as any material containing more than one percent (>1%) asbestos as determined using the method specified in Appendix E, Subpart E, 40 CFR Part 763, Section 1, PLM. The U.S. EPA categorizes ACM as follows:

- Friable ACMs are defined as any ACM that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure. Non-friable ACMs are defined as any ACM that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.
- Category I non-friable ACM includes packings, gaskets, resilient floor coverings, and asphalt roofing products containing more than one percent (>1%) asbestos.
- Category II non-friable ACM is listed as any material, excluding Category I non-friable ACM, containing more than one percent (>1%) asbestos.

Regulated Asbestos Containing Materials (RACM) are friable ACM or non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading, or has crumbled, been pulverized, or reduced to powder in the course of renovation and/or demolition operations.

SAI submitted a signed final laboratory report to ECS on September 25, 2025, January 6, 2026, and April 2, 2026. None of the bulk samples submitted for analysis were reported to contain asbestos in detectable concentrations. A complete list of the sampled materials submitted for analysis and sample locations is included below. Photographs of representative building materials are located in Appendix III of this report.

Asbestos Bulk Sample Locations and Analysis Results

Sample ID	Material Description	Sample Location	Analytical Results	Category
First Sampling Event, September 17, 2025				
01-1,2	Drywall & Joint Compound	Mechanical Building - G713	None Detected (ND)	Not Applicable (N/A)
02-1,2	Caulk	Mechanical Building - G713	ND	N/A
03-1,2	Caulk	HVAC - Mechanical Building G713	ND	N/A
04-1,2	Caulk	G713 - Aluminum Jacketed TSI - HVAC	ND	N/A
05-1,2	Caulk	Exterior Windows	ND	N/A
06-1,2	Caulk	Masonry Control Caulk	ND	N/A
07-1,2	White Mastic	Mechanical Rooms - Fiberglass TSI	ND	N/A

Sample ID	Material Description	Sample Location	Analytical Results	Category
08-1,2	Floor Coating	Interior	ND	N/A
09-1,2,3,4,5,6,7	Block Coating	Interior Walls	ND	N/A
10-1,2,3,4,5,6,7	Ceiling Texture	Barrack Wings	ND	N/A
11-1,2	Drywall & Joint Compound	G702 Ceilings	ND	N/A
12-1,2	Caulk	Interior Masonry Joints	ND	N/A
13-1,2	Caulk	Exterior - Structural Concrete	ND	N/A
14-1,2	Shingle	Attic (Debris)	ND	N/A
15-1,2	Ice & Water Proofing Paper	Attic	ND	N/A
16-1,2	Plumbing Vent Tar	Attic	ND	N/A
17-1,2	Tar Paper	Attic	ND	N/A
18-1,2	Ventilator Mastic	Attic	ND	N/A
19-1,2	Backer Board & Stucco	Exterior Soffit	ND	N/A
Destructive Sampling Event, December 30, 2025				
1-1,2	Damp-Proofing Black Mastic	Exterior behind Brick Veneer	ND	N/A
2-1,2	Tile, Grout, & Mortar Bed	Squadron Bay Showers	ND	N/A
Lift Station G575, March 30, 2026				
575-1-1,2,3	CMU Surfacing Material	Interior Walls	ND	N/A
575-2-1,2	Red Gaskets	Pump Equipment	ND	N/A

4.2 Suspect or Assumed Asbestos-Containing Materials

Due to the inaccessibility or the destructive means that asbestos sampling requires, additional suspect ACMs may remain within the building hidden behind inaccessible areas that include but are not limited to, sub-grade walls, structural members, topping slabs, sub-grade sealants, flooring located below underlayments, areas behind exterior walls, pipe trenches, and subsurface utilities, etc. These areas were deemed inaccessible and were not assessed.

If these materials are discovered during construction activities, they should be presumed to contain asbestos and be treated as ACMs or sampled immediately upon discovery and prior to disturbance for asbestos content by a certified asbestos inspector in accordance with 29 CFR 1926.1101.

A subsequent destructive sampling scope was performed on December 30, 2025 to determine if damp-proofing mastic on CMU behind exterior brick veneer contained asbestos. The destructive assessment also included shower pans and vanity mirrors inside the east squadron bay bathrooms on the second floor. The results of the destructive testing are as followed:

- Black damp-proofing mastic was sampled on the CMU behind exterior brick veneer. The mastic was not reported to contain asbestos.
- Shower pan membranes and mastic were not observed in the bathrooms tested. Samples of tile, grout, and mortar bed were submitted and reported to be negative for asbestos.
- The vanity mirrors in the living quarters were determined to be mechanically fastened. Mirror mastic was not observed.

4.3 Lead in Paint and Surface Coatings

Paint and surface coatings that contain detectable concentrations of lead are considered to be "lead-containing paints" (LCP). Because OSHA has no specific action level for lead in paint, all paint on the site found to have measurable lead concentrations should be assumed to be lead-containing. Work performed that may disturb lead-containing paint is regulated under OSHA, as referenced under 29 CFR 1926.62.

Based on laboratory analysis of the paint chip samples collected and analyzed for lead content, lead was not detected above the method detection limit for the samples collected from G702 and G713.

However, lead was detected above the method detection limit at Lift Station G575.

Summary Paint Chip Sampling Results

Sample ID	Location	Substrate	Component	Condition	Color	Result
G702 and G713, September 17, 2025						

Sample ID	Location	Substrate	Component	Condition	Color	Result
PC-1	G713 - Mechanical Building	Metal	Doors	Good	Blue	<0.0072 %
PC-2	G713 - Mechanical Building	Metal	Door Frame	Good	Blue	<0.0064%
PC-3	G713 - Mechanical Building	CMU	Wall	Good	White	<0.0070%
PC-4	G713 - Mechanical Building	Metal	Pipe	Good	Yellow	<0.0056 %
PC-5	Mechanical Rooms & Stairwells	CMU	Wall	Good	White	<0.0045%
PC-6	Mechanical Rooms - Interior	Metal	Doors	Good	Brown	<0.0061%
PC-7	Mechanical Rooms - Interior	Metal	Door Frames	Good	Brown	<0.0040%
PC-8	Mechanical Room	Metal	Pipe	Good	Red	<0.0047%
PC-9	Common Area - Interior	Metal	Door	Good	Red	<0.0055%
PC-10	Common Area - Interior	Metal	Door Frame	Good	Red	<0.0065%
PC-11	Barrack Halls	Metal	Pipe	Good	Red	<0.0070%
PC-12	Bathrooms	CMU	Wall	Good	White	<0.0040%

Sample ID	Location	Substrate	Component	Condition	Color	Result
PC-13	3rd Floor Attic Access Hatch	Metal	Hatch	Good	Beige	<0.0039 %
PC-14	Exterior Stairwell	CMU	Wall	Good	Gray	<0.0030%
PC-15	Exterior Stairwell	Metal	Double Doors	Good	Brown	<0.0046 %
PC-16	Exterior Stairwell	Metal	Double Door Frames	Good	Brown	<0.0043%
PC-17	Interior Barracks	Metal	Window Frames	Good	Brown	<0.0041%
PC-18	2nd & 3rd Floor Common Areas	Metal	Door	Good	Brown	<0.0038%
PC-19	2nd & 3rd Floor Common Areas	Metal	Door Frames	Good	Brown	<0.0035%
PC-20	1st Floor - Stationary Windows	Metal	Window Frames	Good	Brown	<0.0044%
PC-21	1st Floor - Entrances	Metal	Double Doors	Good	Red	<0.0053%
PC-22	1st Floor - Entrances	Metal	Double Door Frames	Good	Red	<0.0034 %
PC-23	Exterior	Metal	Downspouts	Good	White	<0.0051%
PC-24	Exterior	Metal	Window Frames	Good	Brown	<0.0054%
Lift Station G575, March 30, 2026						

Sample ID	Location	Substrate	Component	Condition	Color	Result
575-PC-1	Exteior Wet Well	Metal	Overhead Crane Mount	Poor	Grey	<0.0042%
575-PC-2	**Interior**	**CMU**	**Walls**	**Good**	**White**	**0.074%**
575-PC-3	Interior	Metal	Pump Piping	Good	White	<0.0054%
575-PC-4	**Exteior Wet Well**	**Metal**	**Pump Piping**	**Poor**	**White**	**0.0051%**
Bold = Lead-Containing Paint						

5.0 RECOMMENDATIONS AND REGULATORY REQUIREMENTS

Based on our understanding of the purpose of the Asbestos and Lead-Paint Survey, the results of laboratory analysis, and our findings and observations, ECS presents the following recommendations.

5.1 Asbestos-Containing Materials

None of the bulk samples submitted to Scientific Analytical Institute, Inc. were reported to contain detectable concentrations of asbestos. If additional suspect asbestos-containing materials are uncovered which were not accessible during this sampling event, it is recommended that these materials be sampled or tested immediately upon discovery for asbestos content by an asbestos inspector in accordance with 29 CFR 1926.1101.

5.2 Lead in Paint and Surface Coatings

Based on laboratory analysis of the paint chip samples collected and analyzed for lead content, lead was not detected above the method detection limit for the samples collected from G702 and G713.

However, lead was detected above the method detection limit at Lift Station G575. The following components sampled from G575 were reported as lead-containing paint:

- White CMU Walls - Interior Walls
- White Pump Piping - Exterior Wet Well

The presence of lead is a concern primarily when conditions exist where it may be inhaled or ingested. Regardless of the analytical results of a material, all painted and/or glazed surfaces may still contain concentrations of lead in the paint, which, when disturbed, may generate lead dust greater than the Permissible Exposure Limit (PEL) of 50 micrograms per cubic meter (ug/m3) as an 8-hour Time Weighted Average (TWA) established by the OSHA "Lead Exposure in Construction Rule (29 CFR 1926.62)."

The OSHA standard gives no guidance on acceptable levels of lead in paint at which no exposure to airborne lead (above the action level) would be expected. Rather, OSHA defines airborne concentrations and references specific types of work practices and operations from which a lead hazard may be generated (reference 29 CFR 1926.62, section d). Environmental and personnel monitoring should be conducted during any removal/demolition process (as appropriate) to verify that actual personal exposures are below the PEL of 50 µg/m^3 as an 8-hour TWA. Under OSHA requirements, the contractor performing renovation work will be required to conduct this monitoring and follow applicable requirements under 29 CFR 1926.62 if disturbing lead-containing paint.

6.0 LIMITATIONS

The conclusions and recommendations presented within this report are based upon a reasonable level of assessment within normal bounds and standards of professional practice for a site in this particular geographic setting. ECS is not responsible or liable for the discovery and elimination of hazards that may potentially cause damage, accidents, or injuries.

The observations, conclusions, and recommendations pertaining to environmental conditions at the subject site are necessarily limited to conditions observed, and/or materials reviewed at the time this study was undertaken. No warranty, expressed or implied, is made with regard to the conclusions and recommendations presented within this report. This report is provided for the exclusive use of the client. This report is not intended to be used or relied upon in connection with other projects or by other unidentified third parties without the written consent of ECS and the client.

During this study, samples were submitted for analysis at an accredited laboratory via polarized light microscopy. As with any similar survey of this nature, actual conditions exist only at the precise locations from which samples were collected. Certain inferences are based on the results of this sampling and related testing to form a professional opinion of conditions in areas beyond those from which the samples were collected. No warranty, expressed or implied, is made.

Our recommendations are in part based on federal, state, and local regulations and guidelines. ECS does not assume the responsibility of the person(s) in charge of the site, or otherwise undertake responsibility for reporting to any local, state, or federal public agencies, any conditions at the site that may present a potential danger to public health, safety, or the environment. Under this scope of services, ECS assumes no responsibility regarding any response actions initiated as a result of these findings. General compliance with regulations and response actions are the sole responsibility of the Client and should be conducted in accordance with local, state, and/or federal requirements.

Appendix I: Figures

Asbestos & Lead Paint Survey

Figure 1

Site Overview

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

IMAGE SOURCE:

Google Earth

Asbestos & Lead Paint Survey

Figure 2

Asbestos Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX-XX	Sample Location
⊗	Asbestos Not Detected

NOTES:

Floor plan not to scale.

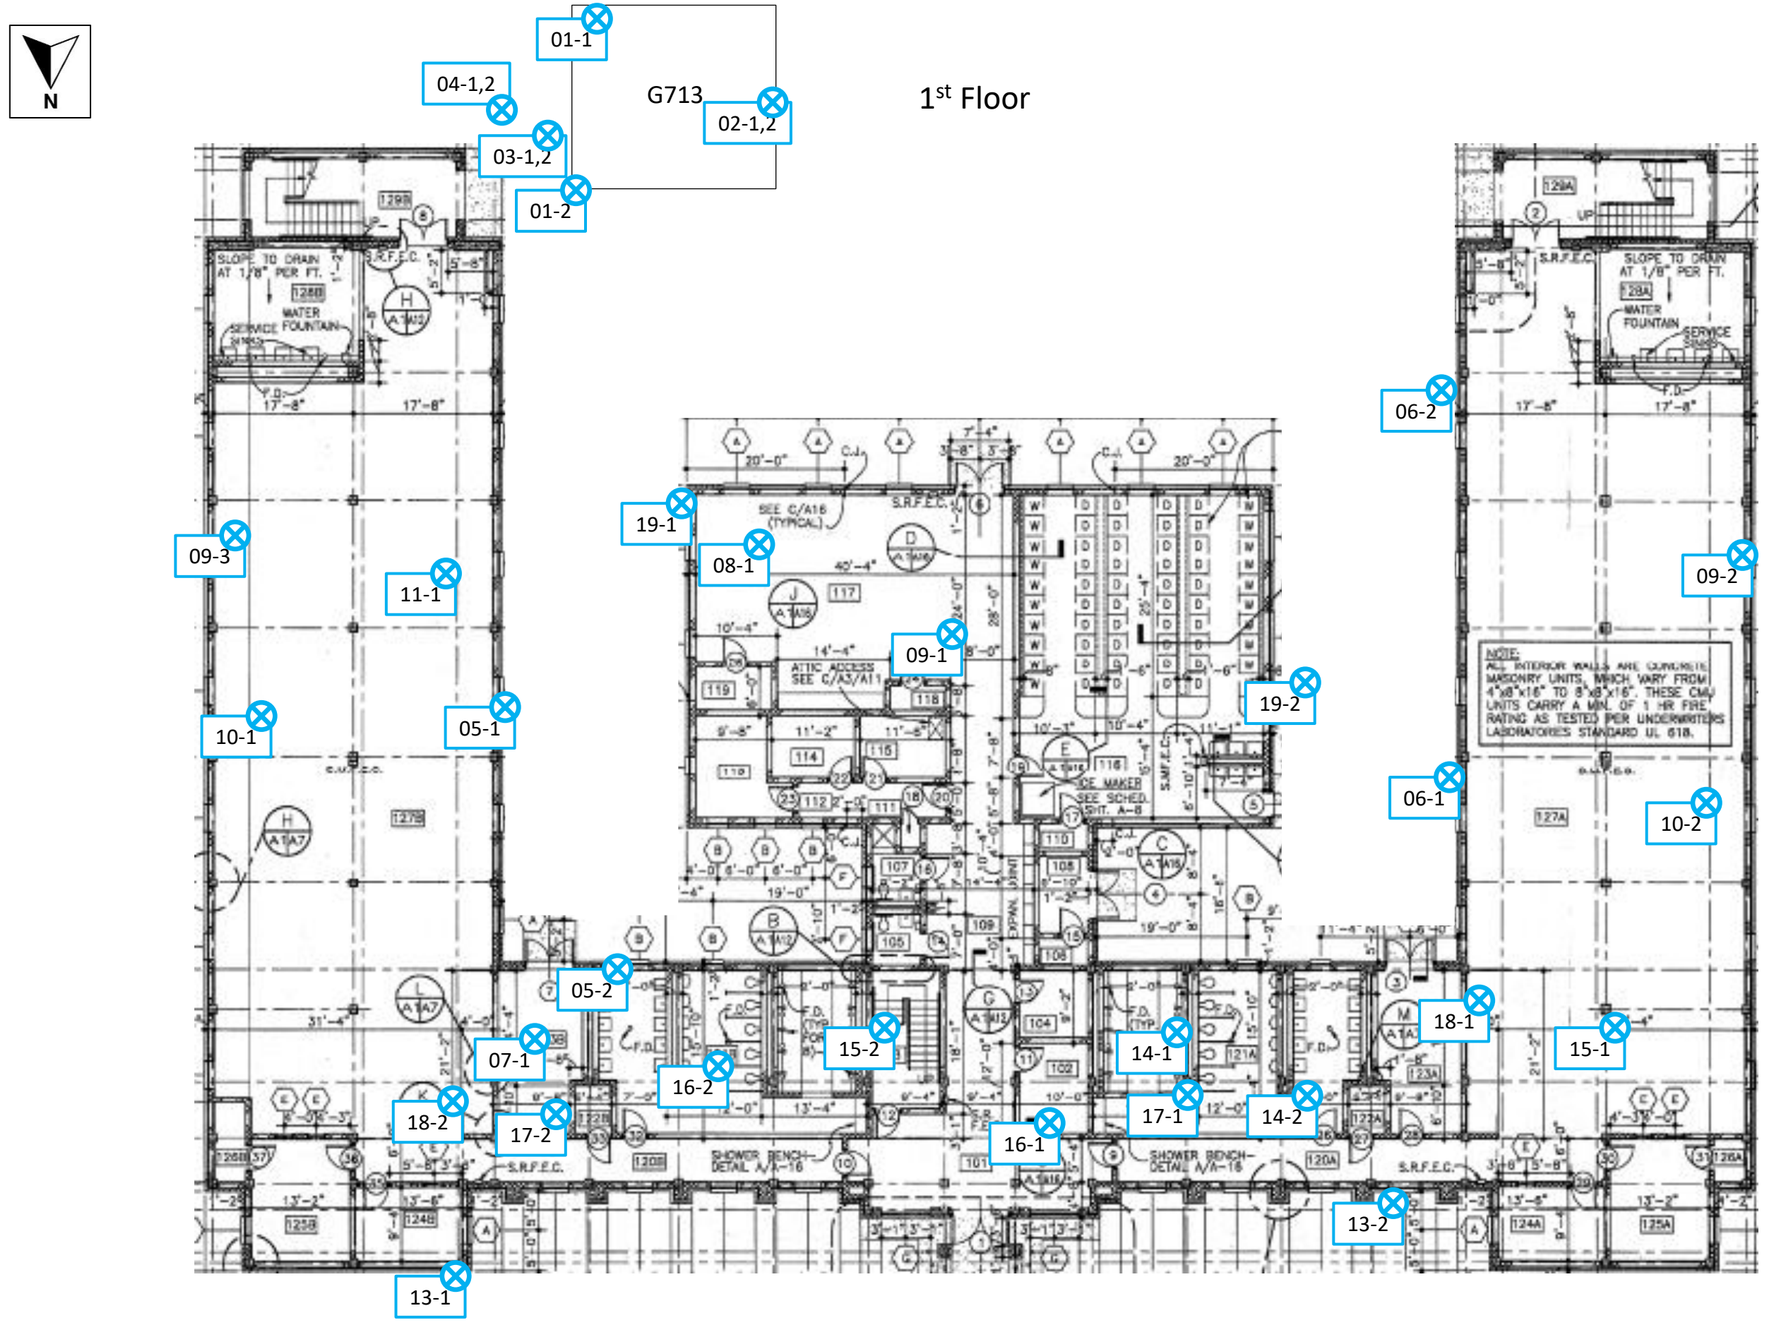

Asbestos & Lead Paint Survey

Figure 3

Asbestos Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX-XX	Sample Location
⊗	Asbestos Not Detected

NOTES:

Floor plan not to scale.

N

2nd Floor

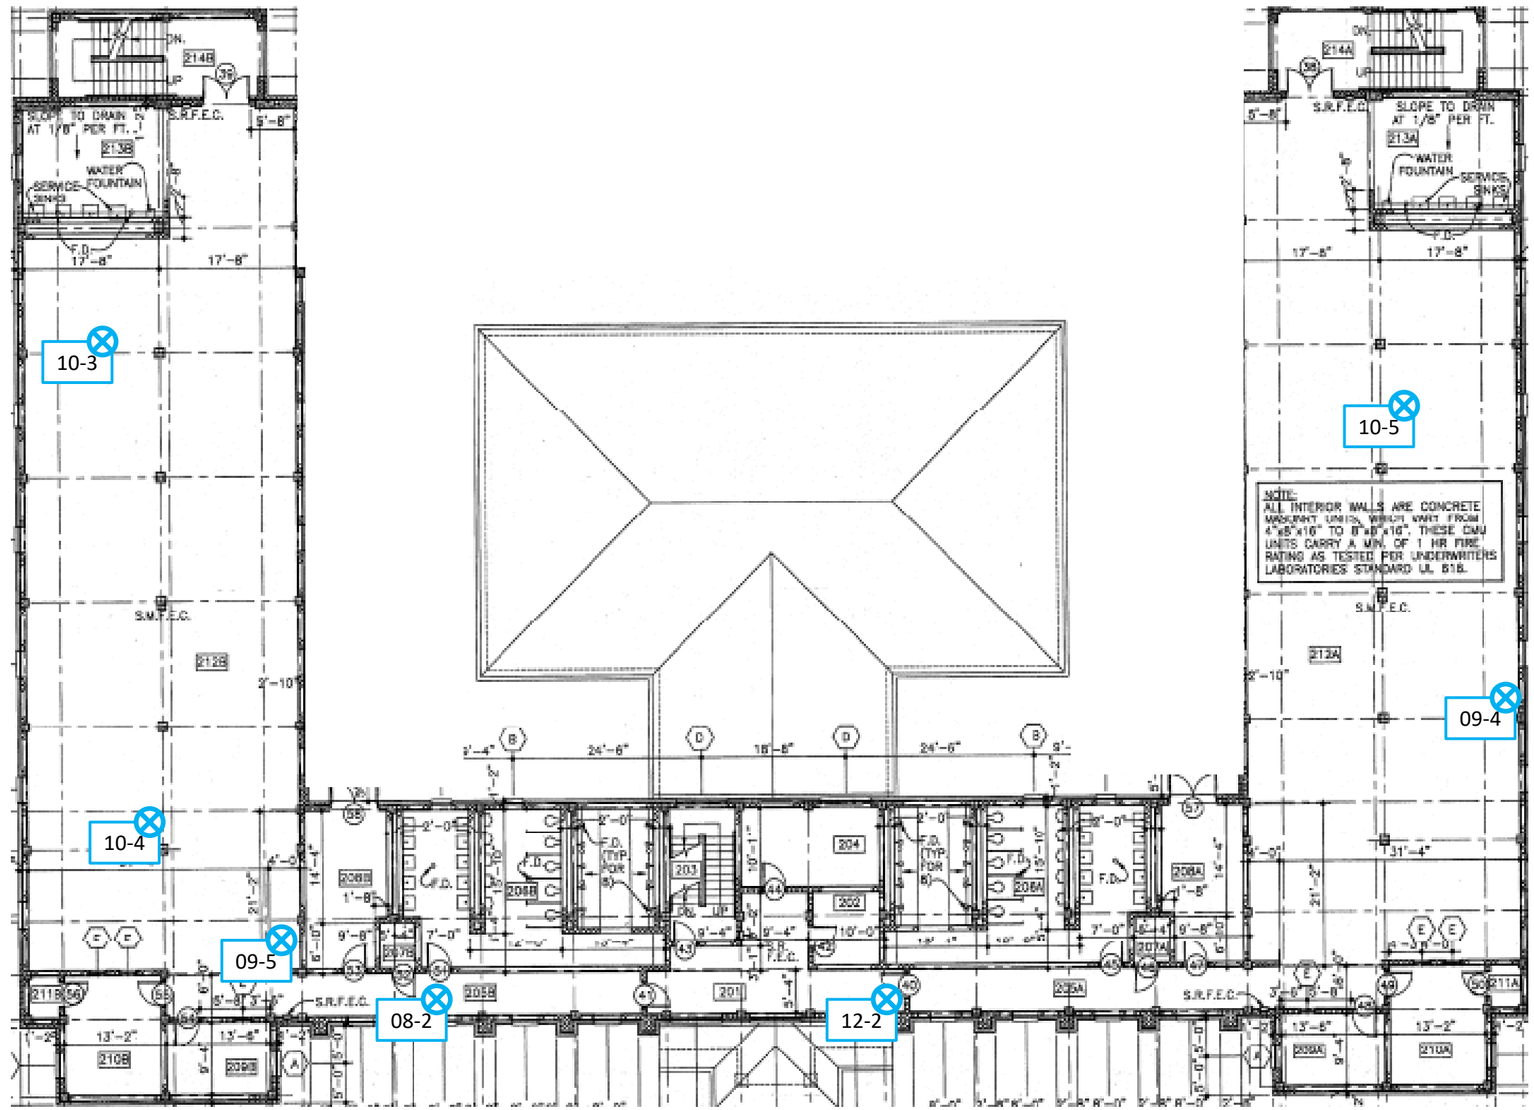

Asbestos & Lead Paint Survey

Figure 4

Asbestos Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX-XX	Sample Location
⊗	Asbestos Not Detected

NOTES:

Floor plan not to scale.

N

3rd Floor

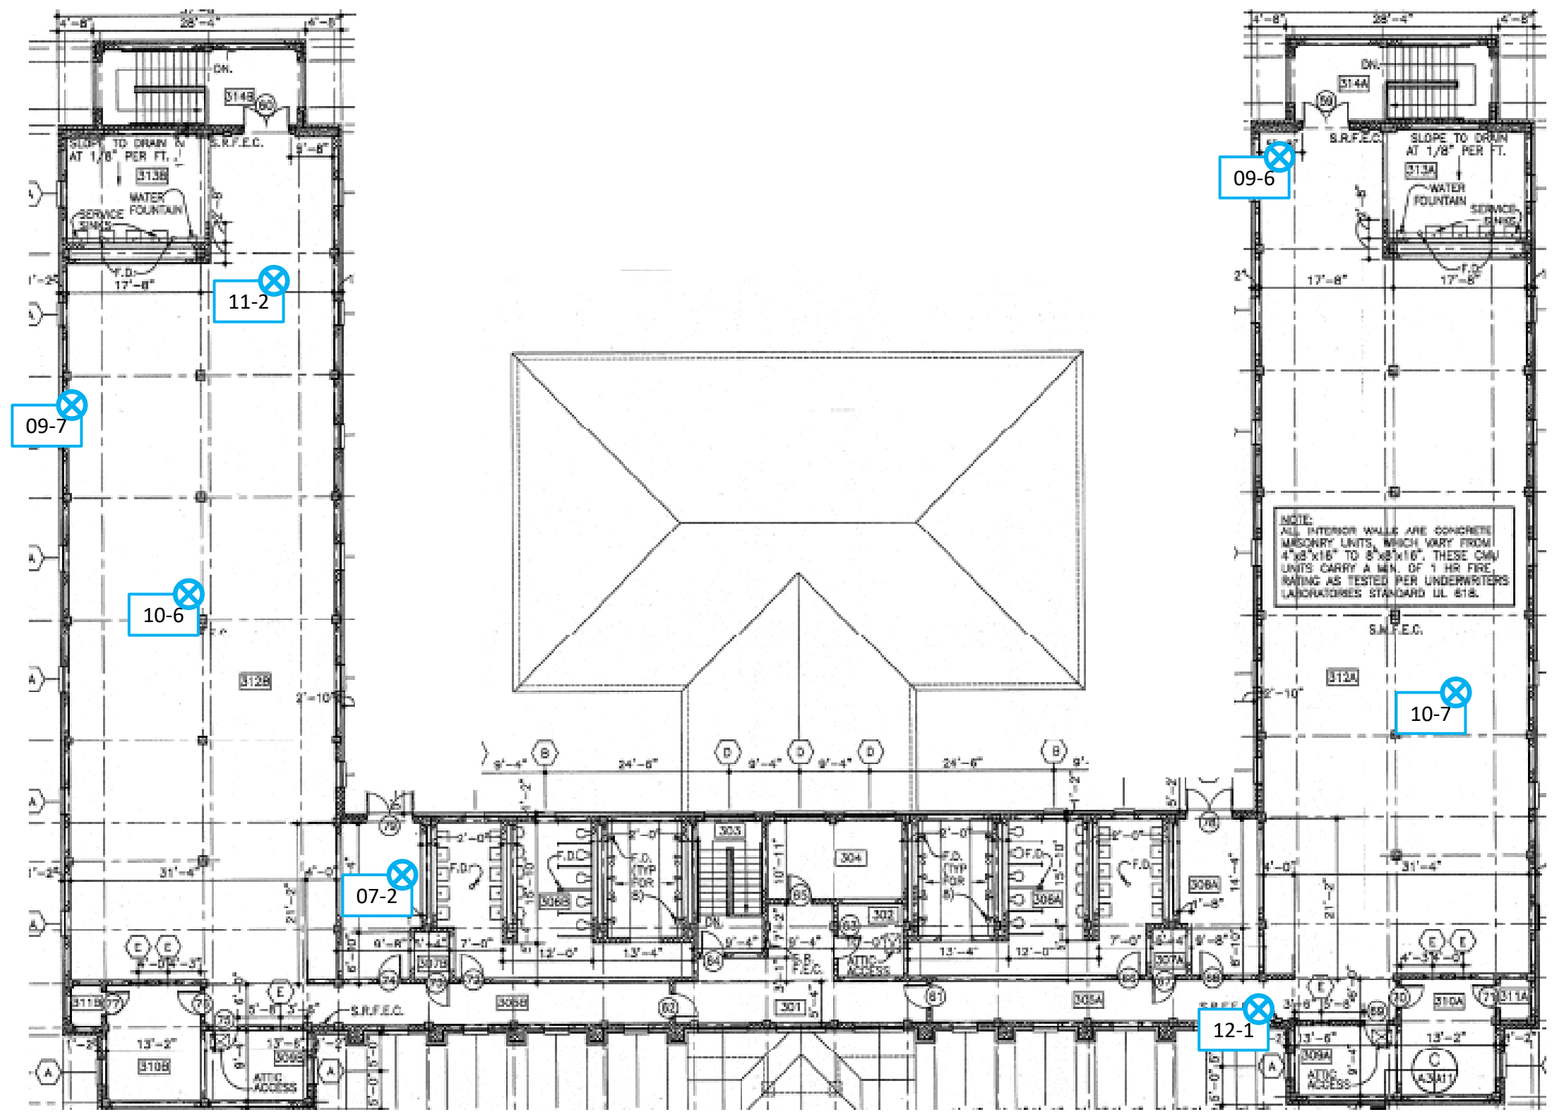

Asbestos & Lead Paint Survey

Figure 5

Lead Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX Sample Location

Below Detection Limit

NOTES:

Floor plan not to scale.

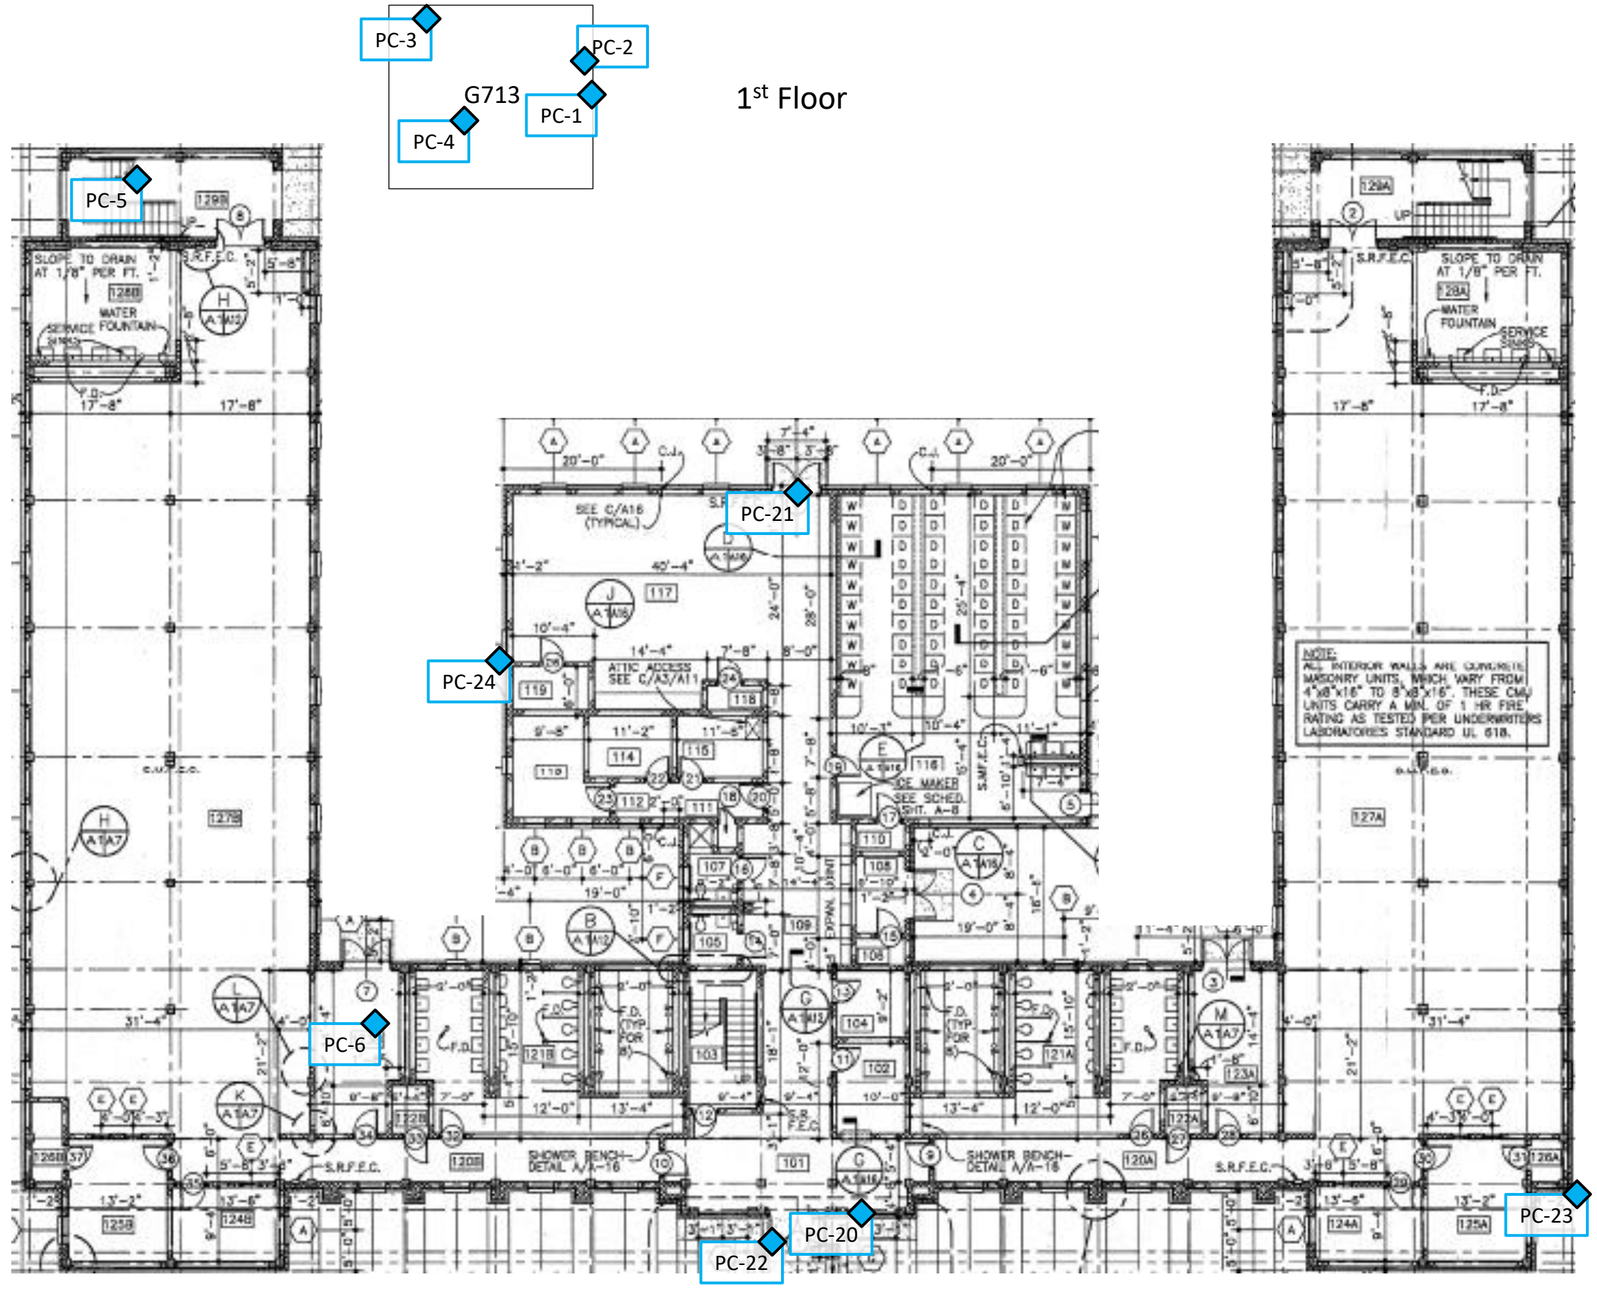

Asbestos & Lead Paint Survey

Figure 6

Lead Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX Sample Location

Below Detection Limit

NOTES:

Floor plan not to scale.

N

2nd Floor

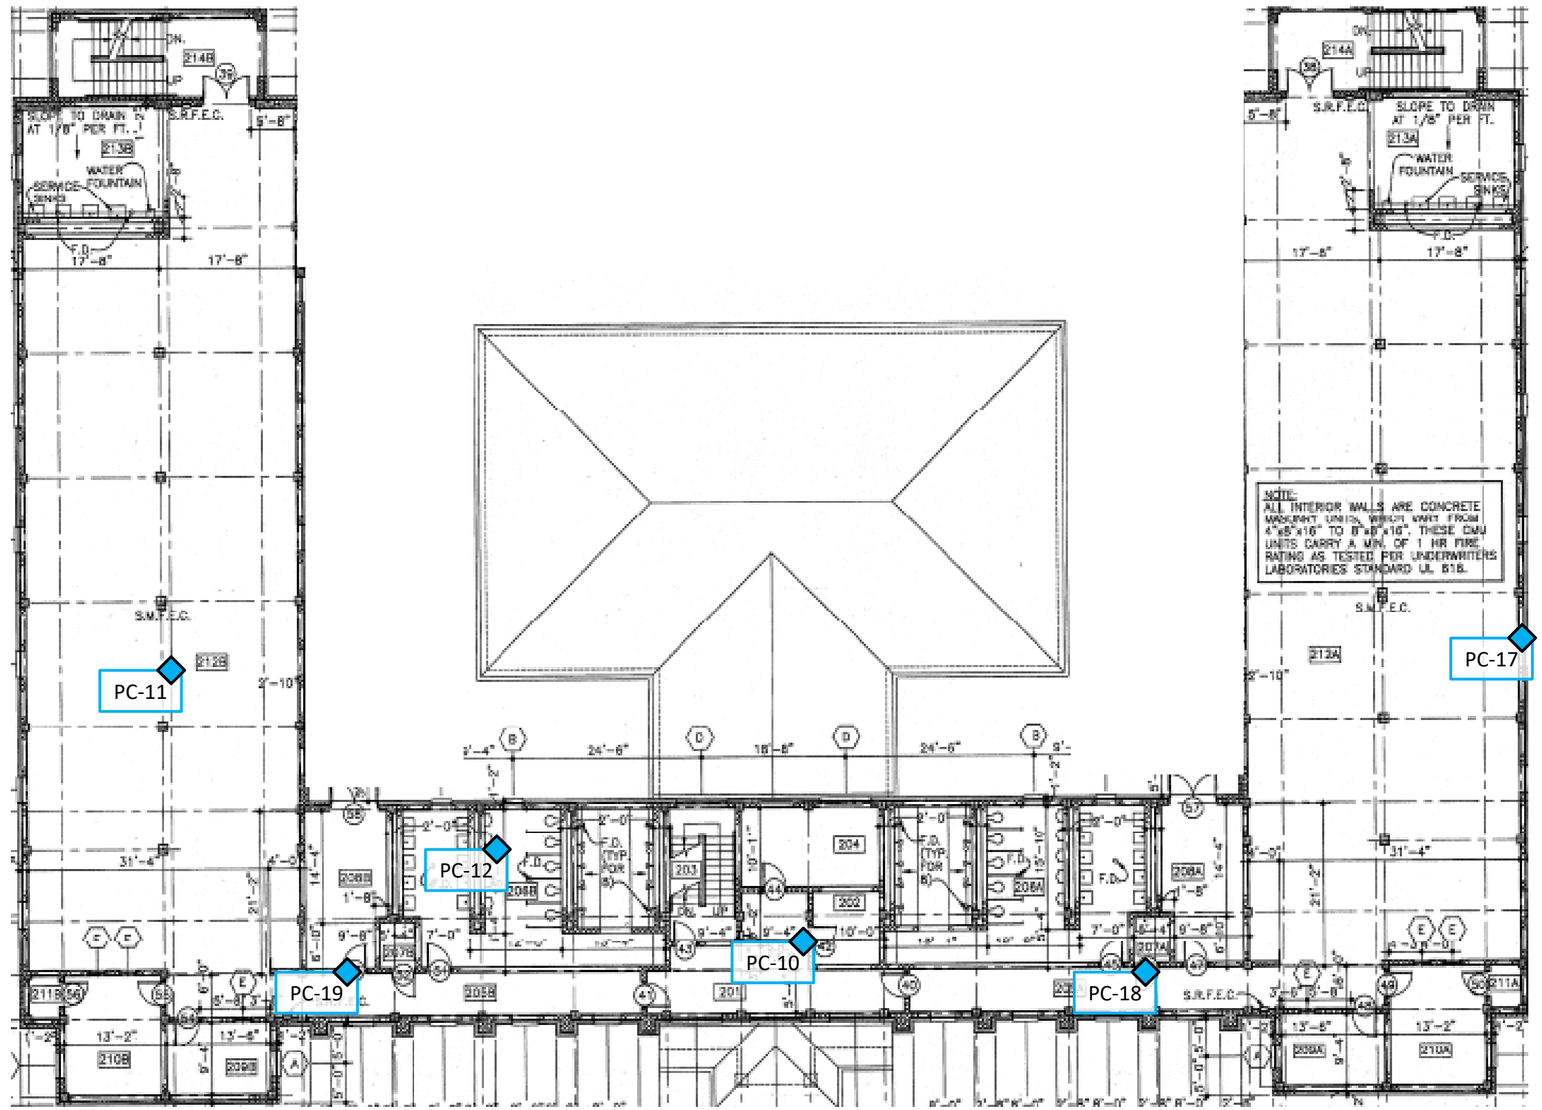

Asbestos & Lead Paint Survey

Figure 7

Lead Sample Locations

Repair BEQ G702
Camp Geiger
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

XX Sample Location

Below Detection Limit

NOTES:

Floor plan not to scale.

N

3rd Floor

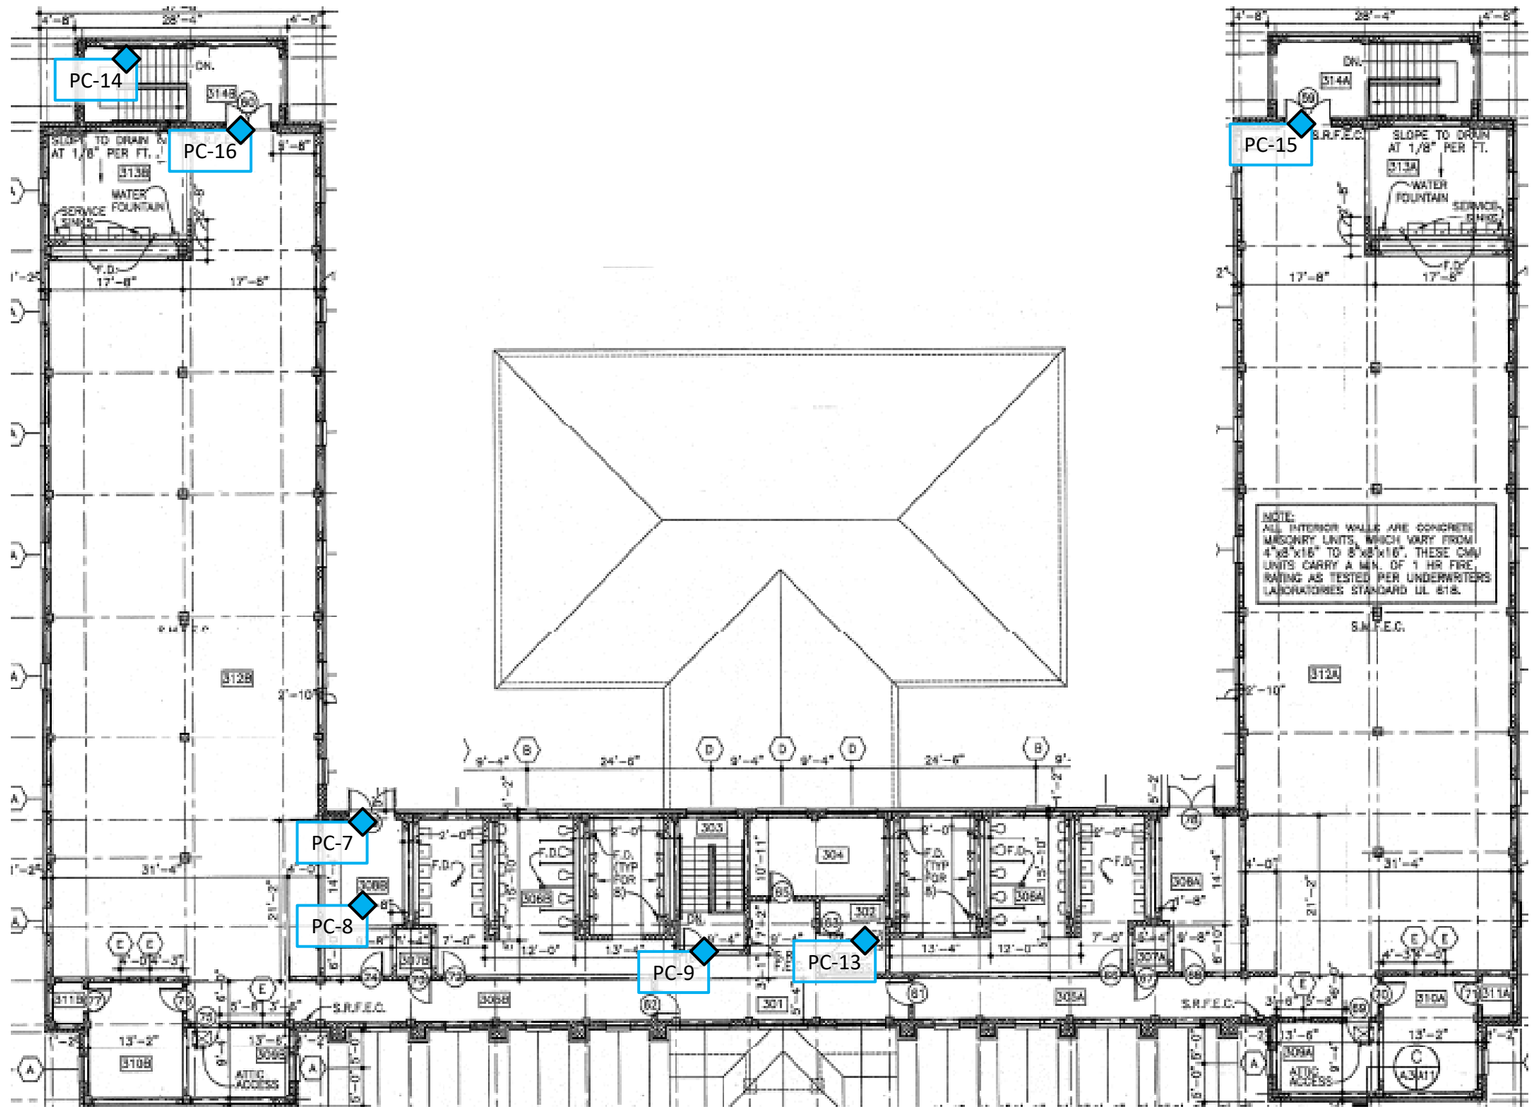

Asbestos and Lead Paint Survey

Figure 1

Site Overview

Repair BEQ G702

Camp Geiger, MCB Camp Lejune
Jacksonville, North Carolina

ECS Project No. 49-26342

IMAGE SOURCE:

Google Earth

Asbestos and Lead Paint Survey

Figure 2

Sample Locations

Repair BEQ 702

Camp Geiger, MCB Camp Lejune
Jacksonville, North Carolina

ECS Project No. 49-26342

SAMPLE LEGEND:

- XX-XX Sample Location
- Asbestos Not Detected
- Asbestos Detected >1%
- Lead-Containing Paint
- Below Detection Limits

NOTES:

Floor plan not to scale.

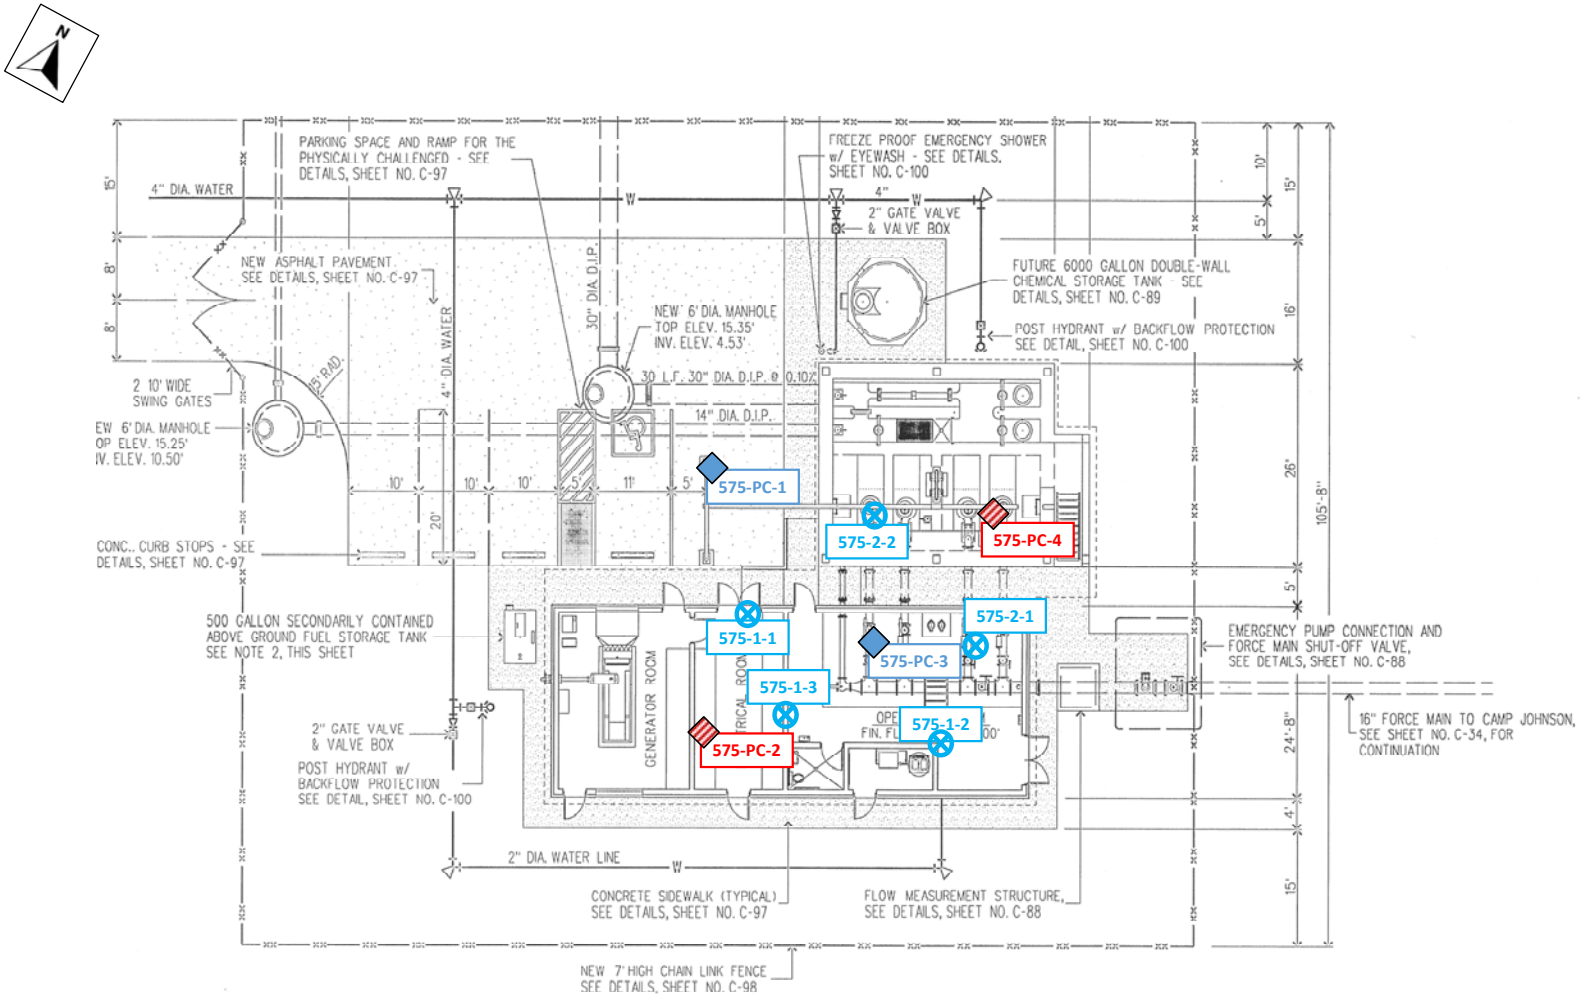

G575 – Lift Station

Appendix II: Site Photographs

1 - G702 - Open-Bay BEQ

2 - G713 - Mechanical Building

3 - G575 - Lift Station

4 - Typical View of Attic

5 - View of Typical Living Quarters

6 - View of ceiling texture in Typical Living Quarters

7 - View of exterior stairwells.

8 - View of Typical Exterior Stairwell

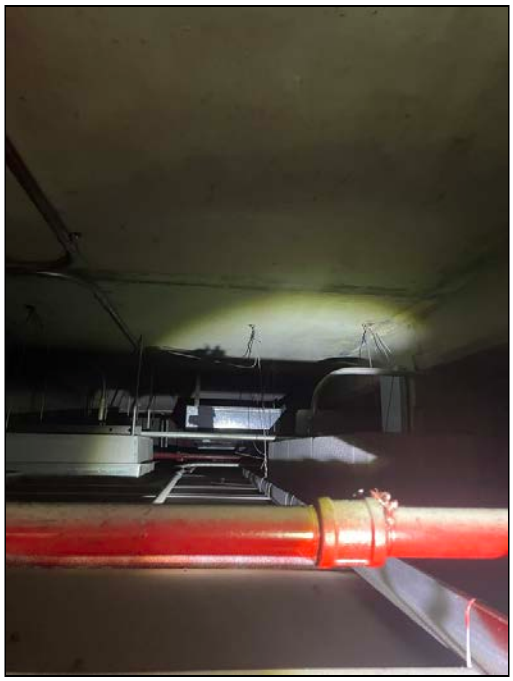

9 - View of Plenum

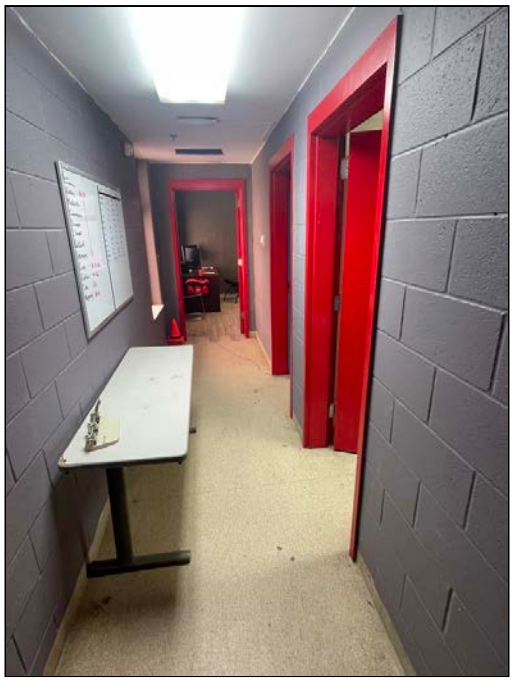

10 - View of Offices & Hallway

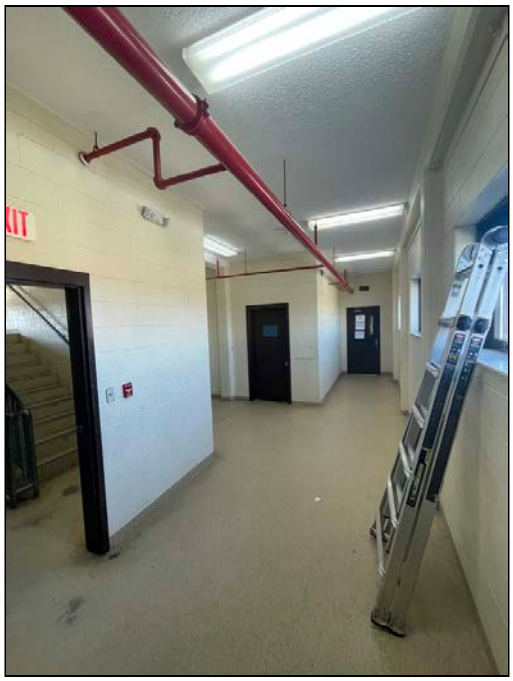

11 - View of Common Space

12 - View of Showers

13 - View of Bathroom Sinks

14 - View of Bathroom Stalls

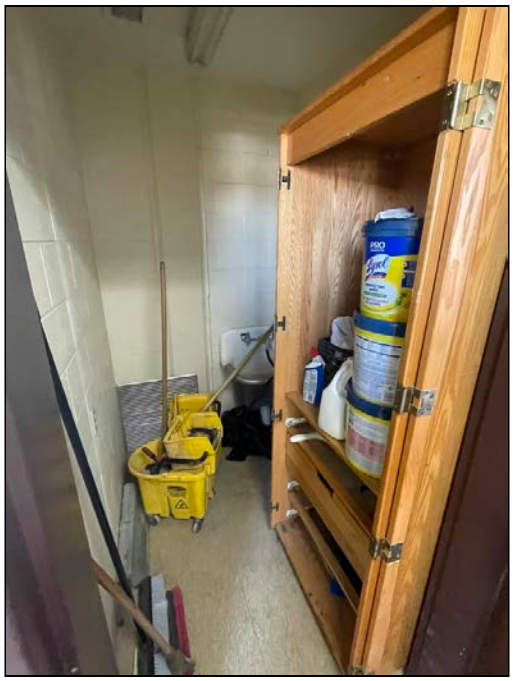

15 - View of Typical Cleaning Storage

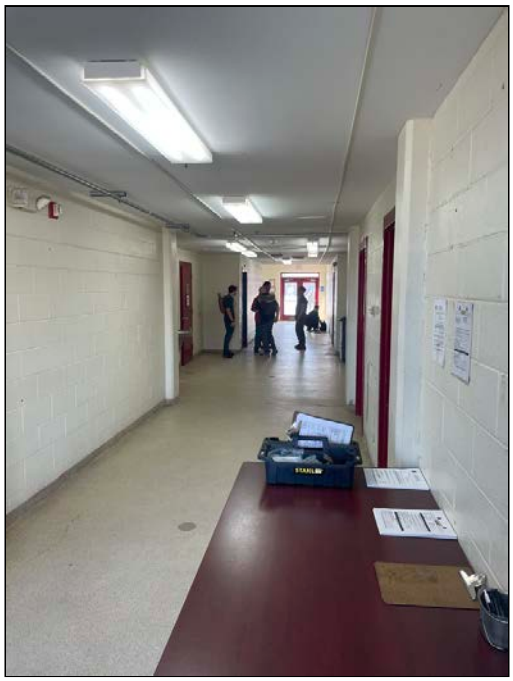

16 - View of First Floor Common Area

17 - View of Interior Mechanical Room

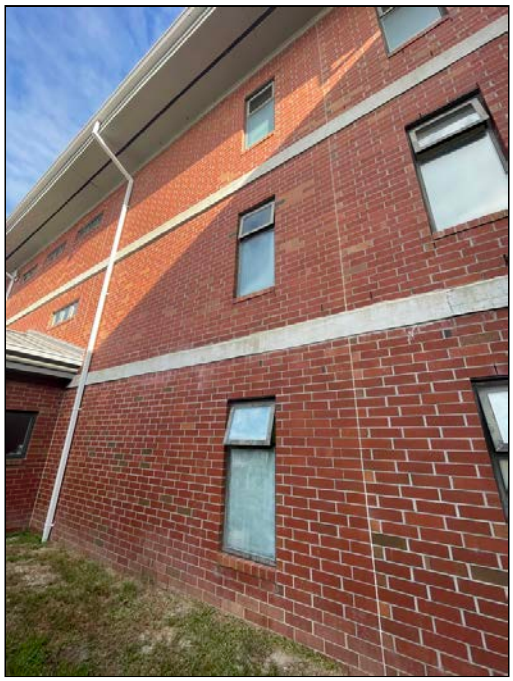

18 - View of Exterior Windows

19 - View of Roofs

20 - View of typical fiberglass and foam TSI in G713 Mechanical Building.

21 - Typical vanity mirrors -mechanically fastened.

22 - View of non-ACM damp-proofing on CMU behind exterior brick.

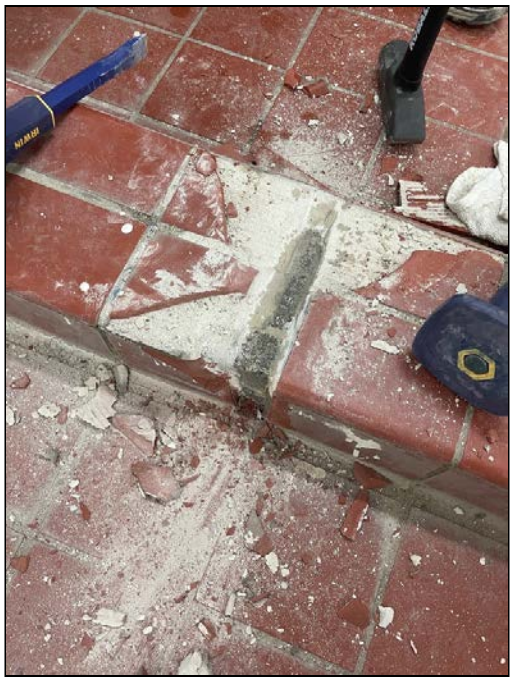

23 - View of typical shower pan thresholds (no liner or mastic)

24 - G575 - Interior

25 - G575 - Crane

26 - G575 Electrical Room

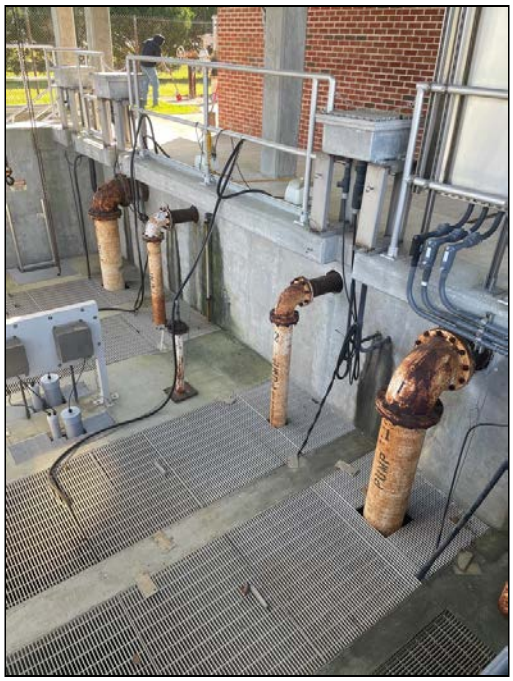

27 - G575 - Wet Well

28 - G575 typical manholes

Appendix III: Asbestos Bulk Sample Results

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
01-1	Drywall & Joint Compound	**None Detected**	**10% Cellulose**	**90% Other**	White, Gray Non-Fibrous Heterogeneous
10092579_0001	*drywall: none detected, joint compound: none detected*				Crushed
01-2	Drywall & Joint Compound	**None Detected**	**10% Cellulose**	**90% Other**	Gray, White Non-Fibrous Heterogeneous
10092579_0002	*drywall: none detected, joint compound: none detected*				Crushed
02-1	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0003					Ashed
02-2	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0004					Ashed
03-1 - A	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0005	*caulk*				Ashed
03-1 - B	Caulk	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0049	*mastic*				Ashed
03-2 - A	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0006	*caulk*				Ashed
03-2 - B	Caulk	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0050	*mastic*				Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
04-1	Caulk	**None Detected**		**100% Other**	Silver Non-Fibrous Homogeneous
10092579_0007					Ashed
04-2	Caulk	**None Detected**		**100% Other**	Silver Non-Fibrous Homogeneous
10092579_0008					Ashed
05-1 - A	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0009	*caulk*				Ashed
05-1 - B	Caulk	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0051	*mastic*				Ashed
05-2 - A	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0010	*caulk*				Ashed
05-2 - B	Caulk	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0052	*mastic*				Ashed
06-1	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0011					Ashed
06-2	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0012					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
07-1	White Mastic	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0013					Ashed
07-2	White Mastic	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0014					Ashed
08-1	Floor Coating	**None Detected**		**100% Other**	Tan Non-Fibrous Homogeneous
10092579_0015					Ashed
08-2	Floor Coating	**None Detected**		**100% Other**	Tan Non-Fibrous Homogeneous
10092579_0016					Ashed
09-1	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0017					Ashed
09-2	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0018					Ashed
09-3	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0019					Ashed
09-4	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0020					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
09-5	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0021					Ashed
09-6	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0022					Ashed
09-7	Block Coating	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10092579_0023					Ashed
10-1	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0024					Ashed
10-2	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0025					Ashed
10-3	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0026					Ashed
10-4	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0027					Ashed
10-5	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0028					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
10-6	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0029					Ashed
10-7	Ceiling Texture	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0030					Ashed
11-1	Drywall & Joint Compound	**None Detected**		**100% Other**	White Non-Fibrous Heterogeneous
10092579_0031					Crushed
11-2	Drywall & Joint Compound	**None Detected**		**100% Other**	White Non-Fibrous Heterogeneous
10092579_0032					Crushed
12-1	Caulk	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0033					Ashed
12-2	Caulk	**None Detected**		**100% Other**	White Non-Fibrous Homogeneous
10092579_0034					Ashed
13-1	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0035					Ashed
13-2	Caulk	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0036					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
14-1	Shingle	**None Detected**	**30% Fiber Glass**	**70% Other**	Black Non-Fibrous Heterogeneous
10092579_0037					Dissolved
14-2	Shingle	**None Detected**	**30% Fiber Glass**	**70% Other**	Black Non-Fibrous Heterogeneous
10092579_0038					Dissolved
15-1	Ice & Water Proofing Paper	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0039					Ashed
15-2	Ice & Water Proofing Paper	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0040					Ashed
16-1	Plumbing Vent Tar	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0041					Ashed
16-2	Plumbing Vent Tar	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0042					Ashed
17-1	Tar Paper	**None Detected**	**60% Cellulose**	**40% Other**	Black Fibrous Homogeneous
10092579_0043					Ashed
17-2	Tar Paper	**None Detected**	**60% Cellulose**	**40% Other**	Black Fibrous Homogeneous
10092579_0044					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092579**
Analysis: PLM
Date Received: 09/19/2025
Date Reported: 09/25/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
18-1	Ventilator Mastic	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0045					Ashed
18-2	Ventilator Mastic	**None Detected**		**100% Other**	Black Non-Fibrous Homogeneous
10092579_0046					Ashed
19-1 - A	Soffit Backer Board & Stucco	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0047	*board*				Crushed
19-1 - B	Soffit Backer Board & Stucco	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0053	*stucco*				Crushed
19-2 - A	Soffit Backer Board & Stucco	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0048	*board*				Crushed
19-2 - B	Soffit Backer Board & Stucco	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10092579_0054	*stucco*				Crushed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

William Blackburn (54)
Analyst

Approved Signatory

100025579

Client:	ECS Southeast, LLC	***Instructions:***	
Contact:	Braxton Dawson	*Use Column "B" for your contact info*	
Address:	6714 Netherlands Drive Wilmington, NC 28405	*To See an Example Click the bottom Example Tab.*	
Phone:	910-899-1289		
Fax:	910-686-9666		
Email:	bdawson@ecslimited.com		
cc:	bproctor@ecslimited.com	***Enter samples between "<<" and ">>"***	
Project:	BEQ G702 Camp Lejune, NC	***Begin Samples with a "<< "above the first sample and end with a ">>" below the last sample.***	
Client Notes:		*Only Enter your data on the first sheet "Sheet1"*	
Date Sampled:	9/18/2025 0:00		
P.O. #.	49-26342	*Note: Data 1 and Data 2 are optional fields that do not show up on the official report, however they will be included in the electronic data returned to you to facilitate your reintegration of the report data.*	
Date Submitted:	9/25/2024 0:00		
Analysis:	PLM Bulk w/ Positive Stop		
TurnAroundTime:	72-hr TAT		

Scientific Analytical Institute

4604 Dundas Drive
Greensboro, NC 27407
Phone: 336.292.3888
Fax: 336.292.3313
Email: lab@sailab.com

Sample Number	Notes	Sample Description	Location
<<			
01-1		Drywall & Joint Compound	Mechanical Building G713
01-2		Drywall & Joint Compound	Mechanical Building G713
02-1		Caulk	Mechanical Building G713
02-2		Caulk	Mechanical Building G713
03-1		Caulk	HVAC - Mechanical Building G713
03-2		Caulk	HVAC - Mechanical Building G713
04-1		Caulk	Aluminum Jacketed TSI - HVAC - G
04-2		Caulk	Aluminum Jacketed TSI - HVAC - G
05-1		Caulk	Exterior Windows
05-2		Caulk	Exterior Windows
06-1		Caulk	Masonry Control Caulk
06-2		Caulk	Masonry Control Caulk
07-1		White Mastic	Mechanical Rooms - On Fiberglass
07-2		White Mastic	Mechanical Rooms - On Fiberglass
08-1		Floor Coating	Interior
08-2		Floor Coating	Interior
09-1		Block Coating	Interior Walls
09-2		Block Coating	Interior Walls
09-3		Block Coating	Interior Walls
09-4		Block Coating	Interior Walls
09-5		Block Coating	Interior Walls
09-6		Block Coating	Interior Walls
09-7		Block Coating	Interior Walls
10-1		Ceiling Texture	Barrack Wings
10-2		Ceiling Texture	Barrack Wings
10-3		Ceiling Texture	Barrack Wings
10-4		Ceiling Texture	Barrack Wings
10-5		Ceiling Texture	Barrack Wings
10-6		Ceiling Texture	Barrack Wings
10-7		Ceiling Texture	Barrack Wings
11-1		Drywall & Joint Compound	G702 Ceilings
11-2		Drywall & Joint Compound	G702 Ceilings
12-1		Caulk	Interior Masonry Joints
12-2		Caulk	Interior Masonry Joints
13-1		Caulk	Exterior - Structural Concrete
13-2		Caulk	Exterior - Structural Concrete
14-1		Shingle	Attic (Debris)
14-2		Shingle	Attic (Debris)
15-1		Ice & Water Proofing Paper	Attic
15-2		Ice & Water Proofing Paper	Attic
16-1		Plumbing Vent Tar	Attic
16-2		Plumbing Vent Tar	Attic
17-1		Tar Paper	Attic
17-2		Tar Paper	Attic
18-1		Ventilator Mastic	Attic
18-2		Ventilator Mastic	Attic
19-1		Soffit Backer Board & Stucco	Exterior Soffit
19-2		Soffit Backer Board & Stucco	Exterior Soffit
>>			

Accepted ☑

Rejected ☐

Braxton B. Dawson

Received By
9/19 10:30am

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson

Project: G-703

Lab Order ID: **10099362**
Analysis: PLM
Date Received: 01/05/2026
Date Reported: 01/06/2026

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
1-1	Damp Proofing	**None Detected**	**20% Cellulose**	**80% Other**	Black Non-Fibrous Heterogeneous
10099362_0001					Dissolved, Crushed
1-2	Damp Proofing	**None Detected**	**20% Cellulose**	**80% Other**	Black Non-Fibrous Heterogeneous
10099362_0002					Dissolved, Crushed
2-1 - A	Tile, Grout, Mortar	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10099362_0003	*ceramic tile*				Dissolved, Crushed
2-1 - B	Tile, Grout, Mortar	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10099362_0009	*grout*				Crushed
2-1 - C	Tile, Grout, Mortar	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10099362_0010	*mortar*				Crushed
2-2 - A	Tile, Grout, Mortar	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10099362_0004	*ceramic tile*				Crushed, Dissolved
2-2 - B	Tile, Grout, Mortar	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10099362_0011	*grout*				Crushed
2-2 - C	Tile, Grout, Mortar	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10099362_0012	*mortar*				Crushed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

Lachlan Krenz (16)
Analyst

Approved Signatory

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson

Project: G-703

Lab Order ID: **10099362**
Analysis: PLM
Date Received: 01/05/2026
Date Reported: 01/06/2026

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
3-1	Damp Proofing	**None Detected**	**20% Cellulose**	**80% Other**	Black Non-Fibrous Homogeneous
10099362_0005					Dissolved
3-2	Damp Proofing	**None Detected**	**20% Cellulose**	**80% Other**	Black Non-Fibrous Homogeneous
10099362_0006					Dissolved
4-1 - A	Tile, Grout, Mortar	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10099362_0007	*ceramic tile*				Crushed, Dissolved
4-1 - B	Tile, Grout, Mortar	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10099362_0013	*grout*				Crushed
4-1 - C	Tile, Grout, Mortar	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10099362_0014	*mortar*				Crushed
4-2 - A	Tile, Grout, Mortar	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10099362_0008	*ceramic tile*				Crushed, Dissolved
4-2 - B	Tile, Grout, Mortar	**None Detected**		**100% Other**	Gray Non-Fibrous Homogeneous
10099362_0015	*grout*				Crushed
4-2 - C	Tile, Grout, Mortar	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10099362_0016	*mortar*				Crushed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

Lachlan Krenz (16)
Analyst

Approved Signatory

Scientific Analytical Institute
4604 Dundas Dr. Greensboro, NC 27407
Phone: 336.292.3888 Fax: 336.292.3313
www.sailab.com lab@sailab.com

Lab Use Only
Lab Order ID: 10099362
Client Code: _____

Company Contact Information

Company: ECS Southeast, LLP	Contact: Braxton Dawson
Address: 6714 Netherlands Drive	Phone ☒: 910-899-1289
Wilmington, NC 28405	Fax ☐:
	Email ☒:
	bdawson@ecslimited.com

Billing/Invoice Information

Company:	
Contact:	
Address:	

Turn Around Times

90 Min. ☐	48 Hours ☐
3 Hours ☐	72 Hours ☐
6 Hours ☐	96 Hours ☐
12 Hours ☐	120 Hours ☐
24 Hours ☑	144+Hours ☐

pl[illegible]

PO Number: 49-26366
Project Name/Number: G703

Asbestos Test Types

PLM EPA 600/R-93/116 (PLM)	☒
Positive stop	☒
PLM Point Count 400 (PT4)	☐
PLM Point Count 1000 (PTM)	☐
PCM NIOSH 7400-A Rules (PCM)	☐
B Rules (PCB) ☐ TWA (PTA)	☐
TEM AHERA (AHE)	☐
TEM Level II (LII)	☐
TEM NIOSH 7402 (TNI)	☐
TEM Bulk Qualitative (TBL)	☐
TEM Bulk Chatfield (TBS)	☐
TEM Bulk Quantitative (TBQ)	☐
TEM Wipe ASTM D6480-05	☐
TEM Microvac ASTM D5755-02	☐
TEM Water EPA 100.2 (TW1)	☐
Other: _____	☐

Sample ID #		Volume/Area	Comments
1-1,2	Damp Proofing		G702
2-1,2	Tile, Grout, Mortar		"
3-1,2	Damp Proofing		G703
4-1,2	Tile, grout, Mortar		"

Total # of Samples 8

Relinquished by	Date/Time	Received by	Date/Time
[signature]	1/2/26 6:00	CP	1/5
			10:30AM

Accepted ☑
Rejected ☐

A-F-017 EXP: 12-1-13

Bulk Asbestos Analysis

By Polarized Light Microscopy
EPA Method: 600/R-93/116 and
40 CFR, Part 763, Subpart E, App.E

NVLAP LAB CODE 200664-0

Lab ID # 173190

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson

Project: G575 Lift Station

Lab Order ID: **10104994**
Analysis: PLM
Date Received: 04/01/2026
Date Reported: 04/02/2026

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Asbestos	Fibrous Components	Non-Fibrous Components	Attributes / Treatment
575-1-1	CMU Surfacing Material	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10104994_0001					Crushed
575-1-2	CMU Surfacing Material	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10104994_0002					Crushed
575-1-3	CMU Surfacing Material	**None Detected**		**100% Other**	Off-white Non-Fibrous Homogeneous
10104994_0003					Crushed
575-2-1	Red Gaskets	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10104994_0004					Ashed
575-2-2	Red Gaskets	**None Detected**		**100% Other**	Red Non-Fibrous Homogeneous
10104994_0005					Ashed

Disclaimer: Due to the nature of the EPA 600 method, asbestos may not be detected in samples containing low levels of asbestos. We strongly recommend that analysis of floor tiles, vermiculite, and/or heterogenous soil samples be conducted by TEM for confirmation of "None Detected" by PLM. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. government. Analytical uncertainty available upon request. Scientific Analytical Institute participates in the NVLAP Proficiency Testing program. Unless otherwise noted blank sample correction was not performed. Estimated MDL is 0.1%.

Patrick Yarnell (5)
Analyst

Approved Signatory

101041994

Client:	ECS Southeast, LLC	***Instructions:***	
Contact:	Braxton Dawson	*Use Column "B" for your contact info*	
Address:	6714 Netherlands Drive Wilmington, NC 28405		
Phone:	910-899-1289	*To See an Example Click the bottom Example Tab.*	
Fax:	910-686-9666		
Email:	bdawson@ecslimited.com		
cc:		***Enter samples between "<<" and ">>"***	
Project:	G575 Lift Station	***Begin Samples with a "<< "above the first sample and end with a ">>" below the last sample.***	*Scientific Analytical Institute*
Client Notes:		*Only Enter your data on the first sheet "Sheet1"*	
Date Sampled:	3/30/2026 0:00		
P.O. #.	49-26342	*Note: Data 1 and Data 2 are optional fields that do not show up on the official report, however they will be included in the electronic data returned to you to facilitate your reintegration of the report data.*	***4604 Dundas Drive Greensboro, NC 27407 Phone: 336.292.3888 Fax: 336.292.3313 Email: lab@sailab.com***
Date Submitted:	3/31/2026 0:00		
Analysis:	PLM Bulk w/ Positive Stop		
TurnAroundTime:	72-hr TAT		

Sample Number	Notes	Sample Description	Location
<<			
575-1-1		CMU Surfacing Material	Interior Walls/Conduit
575-1-2		CMU Surfacing Material	Interior Walls/Conduit
575-1-3		CMU Surfacing Material	Interior Walls/Conduit
575-2-1		Red Gaskets	Pump Piping
575-2-2		Red Gaskets	Pump Piping
>>			

Accepted ☑

Rejected ☐

Braxton B. Dawson

Received By

YJA 4-1 10:30am

Appendix IV: Lead Laboratory Analytical Results

Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092581**
Analysis: PBP
Date Received: 09/19/2025
Date Reported: 09/23/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Mass (g)	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by weight)
PC-1 / *10092581_0001*	**Blue Metal Doors**	0.0554	72	<72	**<0.0072%**
PC-2 / *10092581_0002*	**Blue Metal Door Frames**	0.0624	64	<64	**<0.0064%**
PC-3 / *10092581_0003*	**White CMU Walls**	0.0571	70.	<70.	**<0.0070%**
PC-4 / *10092581_0004*	**Yellow Natural Gas Piping**	0.0712	56	<56	**<0.0056%**
PC-5 / *10092581_0005*	**White CMU Walls**	0.0888	45	<45	**<0.0045%**
PC-6 / *10092581_0006*	**Brown Metal Doors**	0.0661	61	<61	**<0.0061%**
PC-7 / *10092581_0007*	**Brown Metal Door Frames**	0.1010	40.	<40.	**<0.0040%**
PC-8 / *10092581_0008*	**Red Metal Sprinkler Pipe**	0.0860	47	<47	**<0.0047%**

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb). All sample dried before preparation and analysis.

Mark Doki (24)
Analyst

Approved Signatory

Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092581**
Analysis: PBP
Date Received: 09/19/2025
Date Reported: 09/23/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Mass (g)	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by weight)
PC-9 / *10092581_0009*	**Red Door**	0.0730	55	<55	**<0.0055%**
PC-10 / *10092581_0010*	**Red Door Frames**	0.0611	65	<65	**<0.0065%**
PC-11 / *10092581_0011*	**Red Pipe Above Ceiling**	0.0575	70.	<70.	**<0.0070%**
PC-12 / *10092581_0012*	**White CMU Walls**	0.1005	40.	<40.	**<0.0040%**
PC-13 / *10092581_0013*	**Attic Access Hatch**	0.1014	39	<39	**<0.0039%**
PC-14 / *10092581_0014*	**Gray CMU Walls**	0.1323	30.	<30.	**<0.0030%**
PC-15 / *10092581_0015*	**Brown Metal Double Doors**	0.0878	46	<46	**<0.0046%**
PC-16 / *10092581_0016*	**Brown Metal Double Door Frames**	0.0921	43	<43	**<0.0043%**

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb). All sample dried before preparation and analysis.

Mark Doki (24)
Analyst

Approved Signatory

Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson
Bailey Proctor

Project: BEQ G702 Camp Lejune, NC

Lab Order ID: **10092581**
Analysis: PBP
Date Received: 09/19/2025
Date Reported: 09/23/2025

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Mass (g)	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by weight)
PC-17 / *10092581_0017*	**Brown Metal Window Frames**	0.0982	41	<41	**<0.0041%**
PC-18 / *10092581_0018*	**Brown Metal Doors**	0.1058	38	<38	**<0.0038%**
PC-19 / *10092581_0019*	**Brown Metal Door Frames**	0.1134	35	<35	**<0.0035%**
PC-20 / *10092581_0020*	**Brown Stationary Window Frames**	0.0913	44	<44	**<0.0044%**
PC-21 / *10092581_0021*	**Red Metal Double Doors**	0.0761	53	<53	**<0.0053%**
PC-22 / *10092581_0022*	**Red Metal Double Door Frames**	0.1188	34	<34	**<0.0034%**
PC-23 / *10092581_0023*	**White Metal Down Spouts**	0.0788	51	<51	**<0.0051%**
PC-24 / *10092581_0024*	**Brown Metal Window Frames**	0.0746	54	<54	**<0.0054%**

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb). All sample dried before preparation and analysis.

Mark Doki (24)
Analyst

Approved Signatory

100 92581

Client:	ECS Southeast, LLC	***Instructions:**	
Contact:	Braxton Dawson	*Use Column "B" for your contact info*	
Address:	6714 Netherlands Drive Wilmington, NC 28405	*To See an Example Click the bottom Example Tab.*	
Phone:	910-899-1289		
Fax:	910-686-9666		
Email:	bdawson@ecslimited.com		
cc:	bproctor@ecslimited.com	***Enter samples between "<<" and ">>"***	
Project:	BEQ G702 Camp Lejune, NC	***Begin Samples with a "<< "above the first sample and end with a ">>" below the last sample.***	
Client Notes:		*Only Enter your data on the first sheet "Sheet1"*	
Date Sampled:	9/17/2025 0:00		
P.O. #.	49-26342	*Note: Data 1 and Data 2 are optional fields that do not show up on the official report, however they will be included in the electronic data returned to you to facilitate your reintegration of the report data.*	
Date Submitted:	9/18/2025 0:00		
Analysis:	Paint Chips by Flame AA (PBP)		
TurnAroundTime:	72-hr TAT		

Scientific Analytical Institute

4604 Dundas Drive
Greensboro, NC 27407
Phone: 336.292.3888
Fax: 336.292.3313
Email: lab@sailab.com

<<

Sample Number	Notes	Sample Description	Location
PC-1		Blue Metal Doors	G713 - Mech Building
PC-2		Blue Metal Door Frames	G713 - Mech Building
PC-3		White CMU Walls	G713 - Mech Building
PC-4		Yellow Natural Gas Piping	G713 - Mech Building
PC-5		White CMU Walls	Mech Rooms & Stairwells
PC-6		Brown Metal Doors	Mechanical Rooms - Interior
PC-7		Brown Metal Door Frames	Mechanical Rooms - Interior
PC-8		Red Metal Sprinkler Pipe	
PC-9		Red Door	Common Area Interior
PC-10		Red Door Frames	Common Area Interior
PC-11		Red Pipe Above Ceiling	Barracks
PC-12		White CMU Walls	Bathrooms
PC-13		Attic Access Hatch	3rd Floor
PC-14		Gray CMU Walls	Exterior Stairwells
PC-15		Brown Metal Double Doors	Exterior Stairwells
PC-16		Brown Metal Double Door Frames	Exterior Stairwells
PC-17		Brown Metal Window Frames	Interior Barracks
PC-18		Brown Metal Doors	Common Areas 2nd & 3rd Floor
PC-19		Brown Metal Door Frames	Common Areas 2nd & 3rd Floor
PC-20		Brown Stationary Window Frames	1st Floor
PC-21		Red Metal Double Doors	1st Floor Entrances
PC-22		Red Metal Double Door Frames	1st Floor Entrances
PC-23		White Metal Down Spouts	Exterior Stairwells
PC-24		Brown Metal Window Frames	Exterior

>>

Accepted ☑

Rejected ☐

Braxton B. Dawson

Received By

Yes 9-19 10:30am

Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B

Customer: ECS Southeast, LLP
6714 Netherlands Dr
Wilmington, NC 28405

Attn: Braxton Dawson

Project: G575 Lift Station

Lab Order ID: **10104997**
Analysis: PBP
Date Received: 04/01/2026
Date Reported: 04/06/2026

Sample ID / *Lab Sample ID*	Description / *Lab Notes*	Mass (g)	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by weight)
575-PC-1 / *10104997_0001*	**Grey Overhead Crane Mount**	0.0963	42	<42	**<0.0042%**
575-PC-2 / *10104997_0002*	**White CMU Walls**	0.0909	44	740	**0.074%**
575-PC-3 / *10104997_0003*	**White Pump Piping**	0.0736	54	<54	**<0.0054%**
575-PC-4 / *10104997_0004*	**White Pump Piping**	0.0907	44	51	**0.0051%**

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb). All sample dried before preparation and analysis.

Athena Summa (4)
Analyst

Approved Signatory

10104997

Client:	ECS Southeast, LLC	***Instructions:***	
Contact:	Braxton Dawson	*Use Column "B" for your contact info*	
Address:	6714 Netherlands Drive Wilmington, NC 28405		Lead Paint Chips
Mobile #:	910-899-1289	*To See an Example Click the bottom Example Tab.*	
Fax:	910-686-9666		
Email:	bdawson@ecslimited.com		
cc:		***Enter samples between "<<" and ">>"***	
Project:	G575 Lift Station	***Begin Samples with a "<< "above the first sample and end with a ">>" below the last sample.***	***Scientific Analytical Institute***
Client Notes:		*Only Enter your data on the first sheet "Sheet1"*	
Date Sampled:	3/30/2026 17:00		
P.O. #.	49-26342	*Note: Data 1 and Data 2 are optional fields that do not show up on the official report, however they will be included in the electronic data returned to you to facilitate your reintegration of the report data.*	***4604 Dundas Drive Greensboro, NC 27407 Phone: 336.292.3888 Fax: 336.292.3313 Email: lab@sailab.com***
Date Submitted:	3/31/2026 12:00		
Analysis:	Paint Chips by Flame AA (PBP)		
TurnAroundTime:	3-day		

Sample Number	**Notes**	**Sample Description**	**Data 2**
<<			
575-PC-1		Grey Overhead Crane Mount	Exterior Wet Well
575-PC-2		White CMU Walls	Walls/Conduit
575-PC-3		White Pump Piping	Interior
575-PC-4		White Pump Piping	Exterior Wet Well
>>			

Accepted ☑

Rejected ☐

Braxton B. Dawson

Received By

41 10:30AM

Appendix V: Licenses & Certifications

NC DEPARTMENT OF
HEALTH AND
HUMAN SERVICES

ROY COOPER • Governor
KODY H. KINSLEY • Secretary
MARK T. BENTON • Chief Deputy Secretary for Health
KELLY KIMPLE • Acting Director, Division of Public Health

January 6, 2025

Braxton B Dawson III
6714 Netherlands Drive
Wilmington, NC 28405

Dear Mr. Dawson:

Based upon the review of your accreditation application, the Health Hazards Control Unit (HHCU) has determined that you have fulfilled the requirements and are eligible for asbestos accreditation as a(n) INSPECTOR. Your assigned North Carolina accreditation number is 12830, which is reflected on your enclosed North Carolina Accreditation card. Please be sure to take this card with you to any asbestos work site where you are employed. The State requires that all persons conducting asbestos abatement or asbestos management activities be accredited and have their identification card on site.

Your North Carolina Inspector accreditation will expire on DECEMBER 31, 2025. It is NOT the policy of the HHCU to issue renewal notices. If you wish to continue working as a(n) Inspector after this expiration date, you must successfully complete the required training and submit a completed application to this office prior to December 31, 2025. If you should continue to perform asbestos management activities as a(n) Inspector without a valid North Carolina accreditation, you will be in violation of State regulations and may be cited for noncompliance.

Sincerely,

Ed Norman
gram Manager
lth Hazards Control Unit

Braxton B Dawson III
6714 Netherlands Drive
Wilmington, NC 28405

146698

North Carolina
Asbestos Accreditation

EXPIRATION			
12-31-2025			
DOB	SEX	HT	WT
04-06-1982	M	6'2"	250
CLASS		#	EXP
AIR MONITOR		80961	12-25
INSPECTOR		12830	12-25

NC DEPARTMENT OF
HEALTH AND
HUMAN SERVICES

JOSH STEIN • Governor
DEVDUTTA SANGVAI • Secretary

December 3, 2025

Braxton B Dawson III
515 Green Meadows Dr
Wilmington, NC 28405

Dear Mr. Dawson:

Based upon the review of your accreditation application, the Health Hazards Control Unit (HHCU) has determined that you have fulfilled the requirements and are eligible for asbestos accreditation as a(n) INSPECTOR. Your assigned North Carolina accreditation number is 12830, which is reflected on your enclosed North Carolina Accreditation card. Please be sure to take this card with you to any asbestos work site where you are employed. The State requires that all persons conducting asbestos abatement or asbestos management activities be accredited and have their identification card on site.

Your North Carolina Inspector accreditation will expire on NOVEMBER 30, 2026. It is NOT the policy of the HHCU to issue renewal notices. If you wish to continue working as a(n) Inspector after this expiration date, you must successfully complete the required training and submit a completed application to this office prior to November 30, 2026. If you should continue to perform asbestos management activities as a(n) Inspector without a valid North Carolina accreditation, you will be in violation of State regulations and may be cited for noncompliance.

Sincerely,

Ed Norman
Program Manager
Health Hazards Control Unit

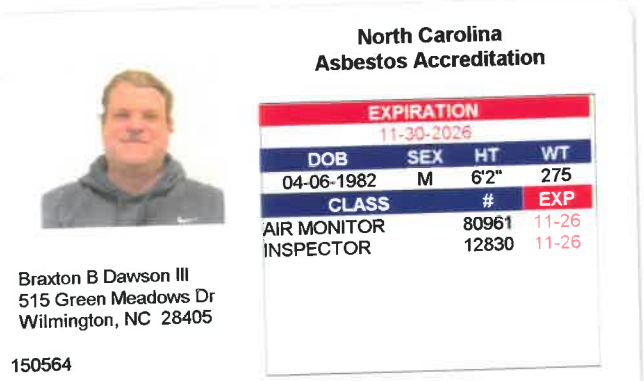

CONTRACTOR ENVIRONMENTAL GUIDE

Marine Corps Base Camp Lejeune
Camp Lejeune, North Carolina

September 2023

Table of Contents

Table of Contents i

Record of Changes x

Contractor Phone Directory xi

1.0 Contractor Environmental Guide Overview 1-1

1.1 Key Definitions and Concepts 1-1
1.1.1 Key Definitions 1-1
1.1.2 Key Concepts 1-2

1.2 Installation Background 1-2
1.2.1 Environmental Management Division and Installation and Environment Department 1-3
1.2.2 Expectations 1-4

1.3 Overview of Requirements 1-4
1.3.1 Contractor Environmental Guide 1-5
1.3.2 Environmental and EMS Training 1-5

1.4 Points of Contact 1-6

2.0 Environmental Management System 2-1

2.1 Key Definition and Concepts 2-1
2.1.1 Key Definitions 2-1
2.1.2 Key Concepts 2-1

2.2 Overview of Requirements 2-2

2.3 Environmental Management System 2-3

2.4 EMS Responsibilities 2-4

2.5 Contractor Environmental Guide and EMS 2-4

3.0 Training 3-1

3.1 Key Definitions and Concepts 3-1
3.1.1 Key Definitions 3-1
3.1.2 Key Concepts 3-1
3.1.3 Environmental Management System 3-2

3.2 Overview of Requirements 3-2

3.3 Training Requirements 3-2
3.3.1 General Environmental Awareness 3-2
3.3.2 Environmental Management System (EMS) 3-2
3.3.3 Recordkeeping 3-2

4.0 Air Quality 4-1

4.1 Key Definitions and Concepts 4-1
4.1.1 Key Definitions 4-1
4.1.2 Key Concepts 4-1
4.1.3 Environmental Management System 4-1

4.2 Overview of Requirements 4-2
4.3 Permit Requirements 4-2
4.4 Additional Activities of Concern 4-3
5.0 Environmental Emergency Planning and Response 5-1
5.1 Key Definitions and Concepts 5-1
5.1.1 Key Definitions 5-1
5.1.2 Key Concepts 5-1
5.1.3 Environmental Management System 5-2
5.2 Overview of Requirements 5-2
5.3 Spill Notification 5-3
5.3.1 POL/HazMat Spill Notification Procedures 5-3
5.3.2 Wastewater Spill and Water Line Break Notification 5-3
5.4 Follow Up 5-4
6.0 Cultural Resource 6-1
6.1 Key Definitions and Concepts 6-1
6.1.1 Key Definitions 6-1
6.1.2 Key Concepts 6-1
6.1.3 Environmental Management System 6-2
6.2 Overview of Requirements 6-2
6.3 Procedures 6-3
7.0 Hazardous Materials/Hazardous Waste Management 7-1
7.1 Key Definitions and Concepts 7-1
7.1.1 Key Definitions 7-1
7.1.2 Key Concepts 7-2
7.1.3 Environmental Management System 7-3
7.2 Overview of Requirements 7-4
7.3 Hazardous Materials Requirements 7-5
7.4 Hazardous Waste Requirements 7-8
7.4.1 Storage 7-8
7.4.2 Manifesting and Disposal 7-9
7.5 Non-RCRA-Regulated Waste Requirements 7-9
7.5.1 Used Oil and Oil Filters 7-9
7.5.2 Used Antifreeze 7-10
7.5.3 Petroleum-Contaminated Wipes and Oily Rags 7-10
7.5.4 Used Electronic Equipment 7-10
7.5.5 New and Used Batteries 7-10
8.0 Asbestos 8-1
8.1 Key Definitions and Concepts 8-1

8.1.1 Key Definitions 8-1
8.1.2 Key Concepts 8-2
8.1.3 Environmental Management System 8-2
8.2 Overview of Requirements 8-2
8.3 Responsibilities Before a Demolition or Renovation Project 8-3
8.3.1 Identification of ACM and PACM 8-3
8.3.2 Notification 8-3
8.3.3 Removal 8-3
8.3.4 Training 8-4
8.4 Responsibilities During a Demolition or Renovation Project 8-4
8.5 Disposal of ACM Waste 8-4
9.0 Lead-Based Paint 9-1
9.1 Key Definitions and Concepts 9-1
9.1.1 Key Definitions 9-1
9.1.2 Key Concepts 9-1
9.1.3 Environmental Management System 9-2
9.2 Overview of Requirements 9-2
9.3 Responsibilities Before Renovation or Demolition 9-3
9.4 Permits 9-3
9.5 Disposal 9-3
9.6 Training 9-4
10.0 Natural Resources 10-1
10.1 Key Definitions and Concepts 10-1
10.1.1 Key Definitions 10-1
10.1.2 Key Concepts 10-2
10.1.3 Environmental Management System 10-2
10.2 Overview of Requirements 10-2
10.3 National Environmental Policy Act 10-4
10.4 Timber 10-4
10.5 Wildlife and Protected Species 10-5
10.6 Wetlands and Streams 10-6
10.6.1 Impacts 10-6
10.6.2 Permitting 10-7
10.7 Temporary Construction 10-8
11.0 Stormwater 11-1
11.1 Key Definitions and Concepts 11-1
11.1.1 Key Definitions 11-1
11.1.2 Key Concepts 11-2

11.1.3 Environmental Management System ... 11-3
11.2 Overview of Requirements ... 11-4
11.3 Prior to Site Work ... 11-5
11.3.1 Construction Notifications ... 11-5
11.3.2 Familiarity with the NPDES Municipal Separate Storm Sewer System (MS4) ... 11-5
11.3.3 Project-Specific Construction Permits ... 11-5
11.4 Responsibilities During Site Work ... 11-6
12.0 Solid Waste, Recycling, and Pollution Prevention (P2) ... 12-1
12.1 Key Definitions and Concepts ... 12-1
12.1.1 Key Definitions ... 12-1
12.1.2 Key Concepts ... 12-1
12.1.3 Environmental Management System ... 12-2
12.2 Overview of Requirements ... 12-2
12.3 Solid Waste Requirements ... 12-3
12.3.1 MCB Camp Lejeune Landfill Acceptable Waste Streams ... 12-4
12.4 Recycling Requirements ... 12-5
12.4.1 Recycling Center ... 12-5
12.4.2 Other Recyclables ... 12-6
12.5 Pollution Prevention and Green Procurement ... 12-6
13.0 Potential Discovery of Undocumented Contaminated Sites ... 13-1
13.1 Key Definitions and Concepts ... 13-1
13.1.1 Key Definitions ... 13-1
13.1.2 Key Concepts ... 13-1
13.1.3 Environmental Management System ... 13-1
13.2 Overview of Requirements ... 13-1
13.3 Unforeseen Site Condition Procedures ... 13-2
13.3.1 Petroleum, Oil, and Lubricants ... 13-2
13.3.2 Munitions and Ordnance ... 13-2
14.0 Permitting ... 14-1
14.1 Key Definitions and Concepts ... 14-1
14.1.1 Key Definitions ... 14-1
14.1.2 Key Concepts ... 14-1
14.1.3 Environmental Management System ... 14-1
14.2 Overview of Requirements ... 14-1
14.3 Project Permits and Approvals ... 14-1
14.3.1 Stormwater (Section 11.0) ... 14-2
14.3.2 Asbestos (Section 9.0) ... 14-2
14.3.3 Lead-Based Paint (Section 9.0) ... 14-2
14.3.4 Air Quality (Section 4.0) ... 14-2

14.3.5 Wetlands (Section 10.6) 14-3
14.3.6 Drinking Water/Wastewater 14-3
14.3.7 Aboveground Storage Tanks 14-4

List of Tables

Table 1-1: Contacts in Case of Spill 1-6
Table 2-1: Practices Identified Under MCB Camp Lejeune's EMS 2-5
Table 5-1: Environmental Emergency Response Contacts 5-2

List of Figures

Figure 1-1: Environmental Management Division (MCB Camp Lejeune) Organization Chart 1-3
Figure 1-2: Installation and Environment Department (MCAS New River) Organization Chart 1-4
Figure 2-1: Plan, Do, Check, Act Cycle 2-2
Figure 2-2: Potential Interactions of Construction and Demolition Activities with the Environment 2-3
Figure 6-1: Possible Cultural Resource Discovery Flow Chart 6-3
Figure 7-1: Diamond Hazard Label 7-3
Figure 7-2: NAVOSHENTRACEN Compatibility Chart 7-7
Figure 12-1: Base Landfill Requirements 12-4

List of Attachments

Attachment 2-1 – Marine Corps Installations East Policy Statement on Environmental Management and Conservation
Attachment 5-1 – MCIEAST-MCB CAMP LEJEUNE Spill Report Form
Attachment 7-1 – MCIEAST-MCB CAMP LEJEUNE Satellite Accumulation Area (SAA) Weekly Inspection Form
Attachment 7-2 – Weekly Hazardous Waste (HW) Storage Area Inspection Form
Attachment 7-3 – Marine Corps Installations East Marine Corps Base Camp Lejeune Initial AUL Build Form

List of Acronyms and Abbreviations

A

ACM	Asbestos-Containing Material
AHERA	Asbestos Hazard and Emergency Response Act
AHPA	Archaeological and Historic Preservation Act
ARPA	Archaeological Resources Protection Act
ASHARA	Asbestos School Hazard Abatement Reauthorization Act
ASD	Accumulation Start Date
ASO	Air Station Order
AST	Aboveground Storage Tank
AUL	Authorized Use List

B

BMP	Best Management Practice
BO	Base Order

C

C&D	Construction and Demolition
CAA	Clean Air Act
CAMA	Coastal Area Management Act
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CETEP	Comprehensive Environmental Training and Education Program
CFC	Chlorofluorocarbon
CFR	Code of Federal Regulations
CG	Commanding General
CWA	Clean Water Act
CZMA	Coastal Zone Management Act

D

DHHS	Department of Health and Human Services
DLADS	Defense Logistics Agency Disposition Services
DM	Decision Memorandum
DMM	Discarded Military Munitions
DoD	Department of Defense
DoN	Department of Navy
DOT	Department of Transportation

E

EA	Environmental Assessment
ECATTS	Environmental Compliance Assessment, Training, and Tracking System
ECON	Environmental Conservation Branch
EHS	Extremely Hazardous Substance
EISA	Energy Independence and Security Act
ELLAP	Environmental Lead Laboratory Accreditation Program
EMD	Environmental Management Division
EMS	Environmental Management System
EO	Executive Order
EOD	Explosive Ordnance Disposal
EPA	Environmental Protection Agency

EPCRA	Emergency Planning and Community Right-to-Know Act
EPEAT	Electronic Product Environmental Assessment Tool
F	
FIFRA	Federal Insecticide, Fungicide, and Rodenticide Act
FOG	Fats, Oils, and Grease
FSC	Facilities Support Contracts
FWS	Fish and Wildlife Service
G	
GHG	Greenhouse Gas
GHS	Globally Harmonized System of Classification and Labelling of Chemicals
GIS	Geographic Information System
GP	Green Procurement
H	
HAP	Hazardous Air Pollutants
HCFC	Hydrochlorofluorocarbon
HCS	Hazard Communication Standard
HHCU	Health Hazards Control Unit (North Carolina)
HM	Hazardous Material
HMTA	Hazardous Materials Transportation Act
HQMC	Headquarters Marine Corps
HW	Hazardous Waste
HWMP	Hazardous Waste Management Plan
I	
I&E	Installation and Environment Department
IGI&S	Installation Geospatial Information & Services
INRMP	Integrated Natural Resources Management Plan
IRP	Installation Restoration Program
L	
LBP	Lead-Based Paint
LDA	Land-Disturbing Activities
LID	Low Impact Development
LQG	Large Quantity Generator
M	
MAG	Marine Aircraft Group
MCAS	Marine Corps Air Station
MCB	Marine Corps Base
MCM	Minimum Control Measure
MCIEAST	Marine Corps Installations East
MCO	Marine Corps Order
MEC	Munitions and Explosives of Concern
MEF	Marine Expeditionary Force
MMPA	Marine Mammal Protection Act
MS4	Municipal Separate Storm Sewer Systems
MSW	Municipal Solid Waste
N	
NAPL	Non-Aqueous Phase Liquid

NC	North Carolina
NCAC	North Carolina Administrative Code
NCDAQ	North Carolina Department of Air Quality
NCDCM	North Carolina Division of Coastal Management
NCDEQ	North Carolina Department of Environmental Quality
NCDFR	North Carolina Division of Forest Resources
NCDWR	North Carolina Division of Water Resources
NEPA	National Environmental Policy Act
NESHAP	National Emission Standards for Hazardous Air Pollutants
NHPA	National Historic Preservation Act
NPDES	National Pollutant Discharge Elimination System
NPL	National Priorities List
NRC	National Response Center
NRHP	National Register of Historic Places
O	
ODS	Ozone-Depleting Substance
OPA	Oil Pollution Act
OSHA	Occupational Safety and Health Administration
OWS	Oil-Water Separator
P	
P2	Pollution Prevention
PACM	Presumed Asbestos-Containing Material
PCB	Polychlorinated biphenyl
POC	Point of Contact
POL	Petroleum, Oil, and Lubricant
PPA	Pollution Prevention Act
ppm	Parts Per Million
PPV	Public-Private Venture
PWD	Public Works Division
Q	
QRP	Qualified Recycling Program
R	
RACM	Regulated Asbestos-Containing Material
RCRA	Resource Conservation and Recovery Act
RCRS	Resource Conservation and Recovery Section
ROICC	Resident Officer in Charge of Construction
RRP	Renovation, Repair, and Painting
S	
SAA	Satellite Accumulation Area
SARA	Superfund Amendments & Reauthorization Act
SCM	Stormwater Control Measure
SDS	Safety Data Sheet
SHPO	State Historic Preservation Officer
SPCC	Spill Prevention, Control, and Countermeasures
SWDA	Solid Waste Disposal Act
SWMP	Stormwater Management Plan

SWPPP	Stormwater Pollution Prevention Plan (*Also referred to as SPPP in NC*)
T	
TCLP	Toxic Characteristic Leaching Procedure
TSD	Treatment, Storage, and Disposal
TSI	Thermal System Insulation
U	
ULCP	Unit Level Contingency Plan
USC	United States Code
USACE	United States Army Corps of Engineers
USMC	United States Marine Corps
UW	Universal Waste
UXO	Unexploded Ordnance
X	
XRF	X-Ray Fluorescence

Record of Changes

Date	Description of Changes	Page #	Name/Initials

Contractor Phone Directory

In the event of an emergency, refer to the emergency numbers below. All non-emergency contractor inquirers regarding the operations at Marine Corps Base Camp Lejeune and Marine Corps Air Station New River should be directed to the Resident Officer in Charge of Construction (ROICC) or Contract Representative. The ROICC or Contract Representative will either directly contact or refer contractors to the appropriate Division or Organization.

Emergency and Important Non-Emergency Numbers

Fire and Emergency Services Division 911

Ambulance 911

Hearing Impaired ..... (910) 451-4444

CHEMTREC (Emergency 24-hour/ Outside MCB Camp Lejeune) ..... (800) 424-9300

Hazardous Chemical Spill 911

Military Police 911

National Response Center (NRC, Outside MCB Camp Lejeune) ..... Toll Free (800) 424-8802

Provost Marshall Office 911

Marine Corps Base Camp Lejeune

Operator/ Directory Assistance ..... (910) 451-1113

Confined Space Program Manager ..... (910) 451-7454

..... (910) 451-5725

Environmental Management Division ..... (910) 451-5003

- -Environmental Compliance Branch ..... (910) 451-5837
  - Asbestos Management ..... (910) 451-0718
  - Resource Conservation and Recovery Section ..... (910) 451-1482
  - Hazardous Material Consolidation Site ..... (910) 451-1482
  - Free Issue ..... (910) 451-1718
  - Recycling Center, Building 982 ..... (910) 451-4214
  - Qualified Recycling Program Manager ..... (910) 451-2037
- -Environmental Conservation Branch ..... (910) 451-9384
  - Fish & Wildlife ..... (910) 451-9384
  - Forestry Management ..... (910) 451-9384
  - NEPA ..... (910) 451-4542
  - Conservation Law Enforcement ..... (910) 451-2196/5226

-Environmental Quality Branch

Air Quality .....(910) 451-5836
Storage Tanks Manager .....(910) 451-9641

Water Quality .....(910) 451-9518

Explosives and Ordnance Disposal.....(910) 451-5419

Public Works Division .....(910) 451-5307

-Contracts Branch .....(910) 451-0034

-Officer In Charge of Construction (Main) .....(910) 451-2581 (x5237)

-Public Works Base Utility Director .....(see Water Line Break or Steam Generation)

Water Line Break/Wastewater Line Break.....(910) 451-7190 (x223)

Steam Generation and High Voltage.....(910) 581-1249

-Public Works Solid Waste Division/Landfill .....(910) 451-4998

Range Control .....(910) 451-3064

Installation Geospatial Information & Services .....(910) 451-4755

Safety Department.....(910) 451-5725

Marine Corps Air Station New River

Confined Space Program.....(910) 449-4964

Consolidated Hazardous Material Reutilization and Inventory Management Program ....(910) 449-4533

Installation and Environment (Director) .....(910) 449-5442

-Installation and Environment (Deputy Director) .....(910) 449-5441

-Installation and Environment (Environmental Supervisor).....(910) 449-6143

-Installation and Environment (GIS Manager) .....(910) 449-4731

-Installation and Environment (Hazardous Waste Manager) .....(910) 449-5997

-Conservation Law Enforcement.....(910) 449-4776

.....(910) 449-4777

Explosives Safety Officer .....(910) 449-5443

Military Police (Non-Emergency).....(910) 449-4248

-Officer In Charge of Construction .....(910) 449-5587

Safety Department.....(910) 449-5440

1.0 Contractor Environmental Guide Overview

Environmental protection is an integral part of the Marine Corps mission in order to protect public health, preserve environmental quality, comply with regulatory requirements, and develop and strengthen relationships between the Marine Corps community and external stakeholders. The purpose of this Contractor Environmental Guide is to assist contractors working aboard Marine Corps Installations East's (MCIEAST's) Marine Corps Base (MCB) Camp Lejeune and Marine Corps Air Station (MCAS) New River in maintaining the mission by complying with Federal and State environmental laws and regulations, as well as the United States Marine Corps (USMC) and installation environmental policies. This guide is written in accordance with Marine Corps Order (MCO) 5090.2 and designed to answer many of the environmental questions that arise, as well as to provide pertinent information on environmental topics and training requirements.

Note: This document should be used only as a guide to environmental issues contractors may face while working aboard MCB Camp Lejeune and MCAS New River. It is expected that contractors will work closely with the Environmental Management Division (EMD) at MCB Camp Lejeune, the Installation and Environment Department (I&E) at MCAS New River, and Contract Representatives regarding environmental management issues, concerns, and/or questions. Should the need arise, this guide provides contractors with EMD, I&E, and emergency response points of contact (POC). All initial inquiries should be directed to the Resident Officer in Charge of Construction (ROICC) or Contract Representative, who will either direct the contractor or contact the appropriate environmental office if additional clarification regarding an environmental issue is necessary. Contact the ROICC or Contract Representative with any questions.

Note: It is very important to note that this guide is designed to provide requirements specific to MCB Camp Lejeune-issued contracts. It is the contractor's responsibility to know and comply with all Federal, State, and local regulations. MCB Camp Lejeune environmental personnel will assist contractors with compliance issues; however, the primary burden of regulatory identification, familiarity, and compliance lies with the contractor. This training *does not* replace any required regulatory environmental training or certification as per contract requirements. All required environmental training should be completed *prior* to working at MCIEAST installations.

Note: It is the contractor's responsibility to review the project-specific contract and specifications. Additional environmental requirements, submissions, and/or meetings not documented in this guide may be required.

1.1 Key Definitions and Concepts

The following key definitions and concepts are used throughout this guide. Consult the ROICC or Contract Representative with any questions about these definitions or concepts, who will contact the appropriate environmental office for clarification, as necessary.

1.1.1 Key Definitions

- **Environment.** Surroundings, to include all surface water, groundwater, drinking water supply, land surface or subsurface area, or ambient air within the United States or under the jurisdiction of the United States, including manmade structures, indoor air environments, natural resources, and archeological and cultural resources.
- **Environmental Management Division.** MCB Camp Lejeune's division responsible for environmental issues and compliance at MCB Camp Lejeune.

- **Installation and Environment Department.** MCAS New River's department responsible for environmental issues and compliance at MCAS New River.
- **Environmental Management System (EMS).** A systematic approach for integrating environmental considerations and accountability into day-to-day decision-making and long-term planning processes across all missions, practices, and functions. The EMS institutionalizes processes for continual environmental improvement and reducing risks to mission through ongoing planning, review, and preventive or corrective action.

1.1.2 Key Concepts

- **Environmental Requirement.** A defined standard pertaining to environmental compliance, pollution prevention (P2), or natural/cultural resources, subject to uniform application. Environmental requirements may be in the form of a law, regulation, Executive Order (EO), policy, ordinance, permit, Base Order (BO), or other form that prescribes a standard.
- **Executive Order.** Legally binding orders given by the President, as head of the Executive Branch, to direct Federal agencies and officials in their execution of congressionally established laws or policies.
- **MCB Camp Lejeune.** Throughout this document, MCB Camp Lejeune includes all real property and associated outlying areas.
- **Marine Corps Order.** A directive of continuing authority or information, meant to be a permanent reference, and requiring continuing action issued by Headquarters Marine Corps (HQMC). In accordance with MCO 5215.1K (10 May 2007), all MCOs shall, where applicable: establish, describe, or change existing policy, programs and major activities, and organizations; define missions; assign responsibilities; issue procedural guidance; and be written in standardized format.
- **Resident Officer In Charge of Construction.** The ROICC administers construction contracts and is the contractor's first line of contact with the government.
- **Regulatory Requirements.** Government (including Federal, States, and local) environmental regulations implemented by environmental statutes. Federal regulations often establish minimum standards for State and local governments' implementing programs.
- **Statutory Requirements.** Federal environmental statutes are laws that generally require compliance by U.S. Department of Defense (DoD) installations.

1.2 Installation Background

MCB Camp Lejeune was established in 1941 in Onslow County, along the southern coast of North Carolina (NC). MCB Camp Lejeune is just south of MCAS New River. MCB Camp Lejeune takes advantage of 156,000 acres and 11 miles of beach capable of supporting amphibious operations, 32 gun positions, 48 tactical landing zones, three state-of-the-art training facilities, and 80 live fire ranges for its training mission.

The primary function of MCB Camp Lejeune is national defense, providing a home installation for the II Marine Expeditionary Force (MEF), 2nd Marine Division, 2nd Force Service Support Group, and other combat units and support commands. MCB Camp Lejeune's mission is to maintain combat-ready units for expeditionary deployment. MCB Camp Lejeune maintains and utilizes supply warehouses, maintenance shops, hazardous material storage, non-hazardous and hazardous waste storage, bulk fuel storage and transfer facilities, fleet parking, housing areas, recreational areas, two golf courses, and a marina.

MCAS New River is the principal USMC helicopter operating location on the East Coast and supports aircrew training in the CH-53 helicopter. It is also the evaluation and prospective bed-down site for the V-22 Osprey. The mission of MCAS New River is to provide the necessary support for its Marine Aircraft Group (MAG) tenant units, MAG-26 and MAG-29.

1.2.1 Environmental Management Division and Installation and Environment Department

MCB Camp Lejeune's EMD, within the GF Department, is responsible for all natural resource and environmental matters aboard the installation. EMD works closely with activities at MCB Camp Lejeune, educating and training personnel to comply with environmental laws while accomplishing the military mission.

The I&E Department at MCAS New River works closely with the EMD on environmental compliance and protection matters. Due to various joint operations, MCB Camp Lejeune and MCAS New River participate together in one EMS. See Figures 1-1 and 1-2 below for organization charts of EMD and I&E.

Figure 1-1: Environmental Management Division (MCB Camp Lejeune) Organization Chart

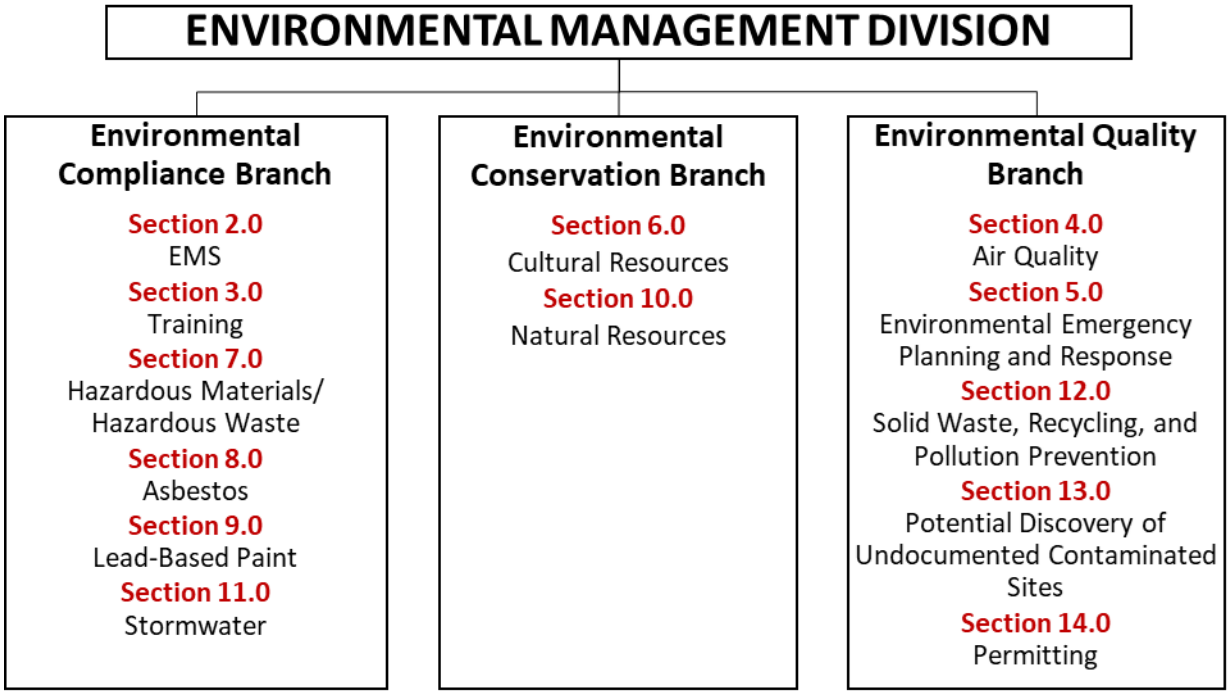

Figure 1-2: Installation and Environment Department (MCAS New River) Organization Chart

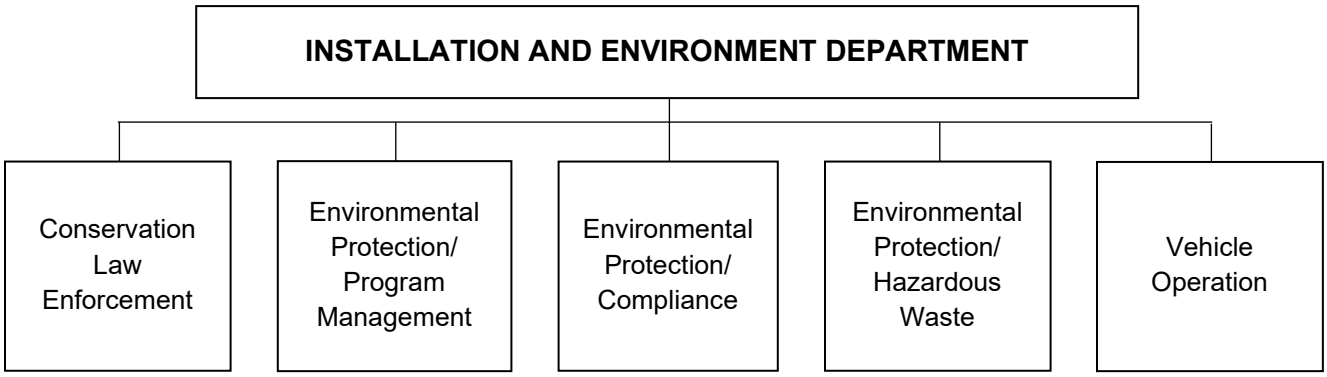

1.2.2 Expectations

Contractors aboard the installation exhibiting commitment to strict compliance with environmental laws and regulations assist MCB Camp Lejeune in providing the best possible training facilities for today's Marines and Sailors, while honoring our environmental responsibilities and objectives. Violation of environmental laws may result in severe civil or criminal penalties and fines.

1.3 Overview of Requirements

Contractors operating aboard MCB Lejeune and MCAS New River must be aware of and adhere to all applicable environmental regulations and requirements, which include but may not be limited to:

- **EO 12088, Federal Compliance with Pollution Control Standards (October 13, 1978).** Requires all facilities owned by or leased to or by the military to be designed, operated, and maintained in compliance with all applicable environmental standards. Military and civilian personnel must cooperate with Federal, State, and local environmental protection agencies and comply with applicable standards and criteria issued by these agencies to the extent permitted by law.
- **EO 13834, Efficient Federal Operations (May 17, 2018).** EO 13834 was revoked except for Sections 6, 7, and 11 by EO 13990 and revoked in full by EO 14057. The Implementing Instructions for EO 13834 (April 2019) provides instructions to Federal agencies regarding the implementation of EO 13834 including agency planning, reporting requirements (e.g., Emergency Planning and Community Right-to-Know Act [EPCRA] reporting), and accountability.
- **EO 14096, Revitalizing Our Nation's Commitment to Environmental Justice for All (April 21, 2023).** EO 14096 requires that each agency make achieving environmental justice part of its mission and requires each agency to report in accordance with sections 301 through 313 of EPCRA after considering applicable EPA guidance and without regard to the Standard Industrial Classification or North American Industry Classification System delineations. Implementation instructions for EO 14096 have not yet been released and should be available within 6 months of the date of the EO.
- **MCO 5090.2, Environmental Compliance and Protection Program Volumes 1-21 (11 June 2018).** USMC policies and responsibilities for compliance with environmental statutes and regulations, as well as the management of USMC environmental programs.

1.3.1 Contractor Environmental Guide

This guide consists of the following information:

- MCB Camp Lejeune Contractor Environmental Guide
  - EMS overview and requirements
  - Environmental program-specific requirements
- MCB Camp Lejeune General EMS and Environmental Awareness Training for Contractors and Vendors
- Signature Page

Prior to beginning work onsite, or within 30 days of beginning work onsite, all contractors and their employees performing work aboard MCB Camp Lejeune must review these materials and complete EMS and General Environmental Awareness training. This guide summarizes the EMS and environmental programs at MCB Camp Lejeune, as well as key requirements associated with the various environmental issues contractors may encounter while performing work aboard the installation. Contractors are expected to work with their ROICC or Contract Representatives and EMD/I&E when environmental concerns or issues arise.

1.3.2 Environmental and EMS Training

In accordance with DoD instructions and MCOs, EMD has implemented a Comprehensive Environmental Training and Education Program (CETEP). The goal of the CETEP is to ensure that appropriate environmental instruction and related information are provided to all levels of the Marine Corps in the most effective and efficient manner to achieve full compliance with all applicable environmental training requirements. A major component of the CETEP is to provide general environmental awareness training to all individuals associated with the installation, including contractors.

In addition to CETEP requirements, MCB Camp Lejeune has implemented an installation-wide EMS. The EMS highlights the fact that the authority and principal responsibility for controlling environmental impacts belong to those commands, units, offices, and personnel (including contractors) whose activities have the potential to impact the environment.

All contractors are required to receive both EMS and general environmental awareness training at the level necessary for their job function within the Environmental Compliance Assessment, Training, and Tracking System (ECATTS).

As such, contractors working aboard MCB Camp Lejeune will do the following:

- Conduct job responsibilities in compliance with environmental regulations and in conformance with EMS requirements.
- Complete all applicable environmental training and maintain associated records as per contract requirements.
- Complete EMS and general environmental awareness training and be aware of and understand the MCB Camp Lejeune Environmental Policy.
- Contact their ROICC or Contract Representative immediately regarding environmental and/or EMS issues.

Prior to beginning work onsite or within 30 days, all contractors must sign and date the signature page and return it to the installation Contract Representative. Anyone who works on a contract at any point during the contract period must receive this information and training.

1.4 Points of Contact

EMD Branches and phone numbers are found in the Contractor's Phone Directory on page xi of this guide. All initial inquiries regarding an environmental issue should be directed to the ROICC or Contract Representative, who will either direct the contractor to or contact the appropriate environmental office if additional clarification is necessary. In the case of a spill or environmental emergency, immediately dial 911. Additional emergency response procedures are provided in Section 5.0 of this guide.

Table 1-1: Contacts in Case of Spill

For spills of:	Call:
Hazardous waste	**911**
Unknown materials	**911**
Material on a permeable surface	**911**
Any amount of a material	**911**
Non-hazardous waste	**911**

2.0 Environmental Management System

MCB Camp Lejeune and MCAS New River jointly operate an EMS, which provides a systematic way of continually implementing environmental requirements and evaluating performance. The EMS is founded on the principles of MCB Camp Lejeune's Environmental Policy, which is endorsed by the Commanding General (CG). Three key principles of the Environmental Policy are to:

- Comply with relevant environmental laws and regulations;
- Prevent pollution; and
- Continually improve the EMS.

The EMS promotes sustained mission readiness through actively identifying and implementing opportunities for efficient resource use. The USMC implements EMS at all levels to continually improve environmental compliance programs and meet evolving EOs and DoD requirements for mission sustainability. The EMS highlights the fact that the authority and principal responsibility for controlling environmental impacts belong to those commands, units, offices, and personnel (including contractors and vendors) whose activities have the potential to impact the environment. Contact the ROICC or Contract Representative with any questions.

2.1 Key Definition and Concepts

The following key definitions and concepts are associated with an EMS. Contact the ROICC or Contract Representative with any questions about these definitions or concepts.

2.1.1 Key Definitions

- **Environment.** Surroundings in which an organization operates, including air, water, land, natural resources, flora, fauna, humans, and their interrelation.
- **Environmental Aspect.** A characteristic of an organization's activities, products, or services that may cause, in normal operation or upset mode, an impact to an environmental or other resource. Each practice may have several aspects.
- **Environmental Impact.** An effect, beneficial or adverse, of a practice's aspect on an environmental or other resource. Each practice may have several impacts.
- **Environmental Resources.** Sensitive environmental receptors (e.g., air, water, natural resources) or cultural or historic assets at MCB Camp Lejeune or MCAS New River, in the surrounding community, within the ecosystem, or beyond, that may be impacted by the operation of practices.
- **Practice.** A unit process that supports a military mission and may impact environmental resources. (It is the ability to impact an environmental resource that is key to defining a practice. However, practices may also impact other resources.)
- **Practice Owner.** Person(s) responsible for control of practices. EMS procedures use the term *practice owner* when the assignment of more specific responsibilities is left to the owning organizations.
- **Requirement.** Legislation, regulation, or policy issued by any Executive, Federal, State, local, DoD, Department of Navy (DoN), or USMC authority that addresses environmental considerations and requires action.

2.1.2 Key Concepts

- **Environmental Management System.** A systematic approach for integrating environmental considerations and accountability into day-to-day decision-making and long-term planning

processes across all missions, activities, and functions. The EMS institutionalizes processes for continual environmental improvement and reducing risks to mission through ongoing planning, review, and preventive or corrective action.

- **Environmental Policy.** Public commitment by senior leaders to the management of the installation's environmental affairs, including environmental compliance, pollution prevention, natural/cultural resource management, cleanup, risk to mission, and continual improvement of the EMS.
- **Plan, Do, Check, Act.** Four-step model by which the EMS carries out change – Plan: establish objectives and processes, Do: implement and execute the plan, Check: study and analyze the results, Act: take action based on what you learned.

Figure 2-1: Plan, Do, Check, Act Cycle

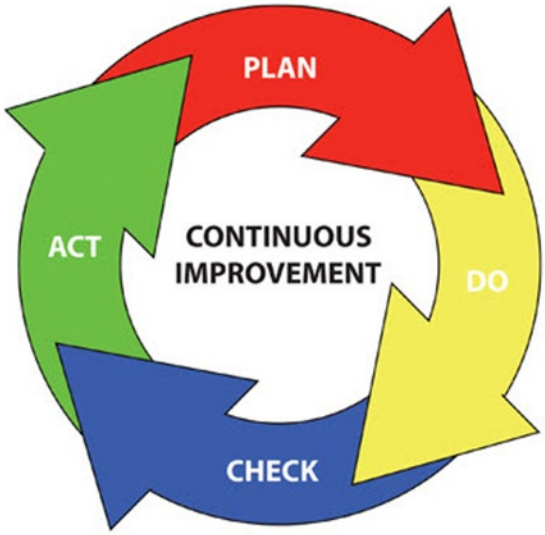

2.2 Overview of Requirements

Contractors operating aboard MCB Camp Lejeune and MCAS New River must be aware of and adhere to all applicable regulations and requirements concerning EMS, which include but may not be limited to:

- **EO 14057, Catalyzing Clean Energy Industries and Jobs Through Federal Sustainability (December 8, 2021).** EO 14057 outlines a coordinated, whole-of-government approach, along with individual agency goals and actions, to transform Federal procurement and operations to reduce greenhouse gas (GHG) emissions and environmental impacts and secure a transition to clean energy and sustainable technologies. The Implementing Instructions for EO 14057 (August 2022) states that agencies should continue to use effective management strategies, such as EMS, if it aligns with and supports their agency needs and facilitates implementation and progress toward EO goals.
- **DoD Instruction 4715.17, Environmental Management Systems (April 15, 2009, and Incorporating Change 2 from August 31, 2018).** DoD Instruction 4715.17, in accordance with DoD Directive 5134.01, establishes policy, assigns responsibilities, and prescribes procedures for achieving conformance with EMS.
- **MCO 5090.2, Environmental Compliance and Protection Program Volume 2 (11 June 2018).** Volume 2 establishes policy and responsibilities for effective environmental program

management through execution of the USMC EMS. The goal of the EMS is to enable USMC units, tenants, commands, installations, and regions to achieve, maintain, and proactively address environmental compliance and protection requirements while sustaining resources essential to combat training and readiness. This Volume further states that USMC shall implement functional EMSs at all appropriate levels (e.g., installation) to facilitate the continual improvement of USMC environmental compliance programs while meeting evolving EO and DoD policy requirements for mission sustainability.

2.3 Environmental Management System

An EMS is a systematic way to identify and eliminate or minimize the installation's environmental risk-to-mission. MCB Camp Lejeune's EMS identifies practices and their aspects as a starting point for prioritizing environmental management initiatives. Each installation practice, such as construction/renovation/demolition, equipment operation/maintenance/disposal, landscaping, or pesticide/herbicide management and application, has one or more environmental aspects. The following figure illustrates simplified potential interactions of one practice, construction/renovation/demolition, with the environment.

Figure 2-2: Potential Interactions of Construction and Demolition Activities with the Environment

2.4 EMS Responsibilities

Contractors are expected to understand that the practices they support on the installation may interact with and have impacts on the environment. Therefore, it is expected that contractors will do the following:

- Review the Contractor Environmental Guide.
- Be aware of the Environmental Policy (Attachment 2-1)
- Conduct practices in a way that avoids and/or minimizes impacts to the environment by complying with all applicable Federal, State, and local environmental regulations and BOs.
- Be familiar with spill response procedures.
- Report all environmental emergencies and spills.
- Report any environmental problems or concerns promptly and notify the ROICC or contract representative.
- Respond to data collection efforts upon request.

2.5 Contractor Environmental Guide and EMS

The Contractor Environmental Guide comprises sections that are categorized based on the type of environmental requirements routinely encountered by contractors at MCB Camp Lejeune. The following matrix is derived from MCB Camp Lejeune's EMS Working Group sessions and relates the contents of this guide to the practices aboard MCB Camp Lejeune. It is provided to assist contractors in narrowing down specific requirements that may apply to onsite activities.

Table 2-1: Practices Identified Under MCB Camp Lejeune's EMS

MCB Camp Lejeune 2020 Practices	Env. Emergency Response/Spill Response, Section 5.0	HM/HW, Section 7.0	Potential Discovery of Undocumented Contaminated Sites, Section 13.0	Asbestos, Section 8.0	Lead-Based Paint, Section 9.0	Stormwater, Section 11.0	Solid Waste, Recycling, and P2, Section 12.0	Training, Section 3.0	Cultural Resources, Section 6.0	Permitting, Section 14.0	Air Quality, Section 4.0	Natural Resources, Section 10.0
Battery management	Applicable To All Practices Conducted Aboard MCB Camp Lejeune	●	Applicable To All Practices Conducted Aboard MCB Camp Lejeune				●	Applicable To All Practices Conducted Aboard MCB Camp Lejeune				
Boat operation/ maintenance		●									●	
Boat, ramp, dock cleaning						●						
Boiler operation		●									●	
Building operation/ maintenance/repair		●		●			●					
Channel dredging						●						
Chlorination		●									●	
Composting						●	●					
Construction/demolition/ renovation				●	●	●	●		●			
Cooling tower operation and maintenance		●										
Degreasing		●									●	
Drinking water management		●										
Engine operation and maintenance		●									●	
Equipment operation/ maintenance/disposal		●		●			●					
Erosion/runoff control						●						●
Fish stocking												
Fueling and fuel management/storage		●				●					●	
Grease traps							●					
Habitat management		●									●	●
HCP operation		●										
HM storage		●				●					●	
HM transportation		●									●	
HW disposal offsite transport		●					●					
HW satellite accumulation area		●									●	
HW storage (<90 days)		●										
HW transportation		●		●	●						●	

MCB Camp Lejeune 2020 Practices	Env. Emergency Response/Spill Response, Section 5.0	HM/HW, Section 7.0	Potential Discovery of Undocumented Contaminated Sites, Section 13.0	Asbestos, Section 8.0	Lead-Based Paint, Section 9.0	Stormwater, Section 11.0	Solid Waste, Recycling, and P2, Section 12.0	Training, Section 3.0	Cultural Resources, Section 6.0	Permitting, Section 14.0	Air Quality, Section 4.0	Natural Resources, Section 10.0
Land clearing	Applicable To All Practices Conducted Aboard MCB Camp Lejeune		Applicable To All Practices Conducted Aboard MCB Camp Lejeune			●	●	Applicable To All Practices Conducted Aboard MCB Camp Lejeune	●			●
Landfill gas energy recovery system												
Landscaping		●				●						
Laundry		●										
Live fire range operations		●				●					●	●
Livestock operations						●	●					
Metal working		●					●				●	
Non-destructive inspection		●										
ODS/halon management		●									●	
Packaging/unpackaging							●					
Paint booth											●	
Paint gun cleaning		●									●	
Paint removal		●			●		●				●	
Painting		●					●				●	
Parts replacement		●		●			●					
Pesticide/herbicide management and application		●				●						
Polishing		●					●				●	
Pumping station/force main		●										
Range residue clearance		●				●	●					
Recreational facilities operation		●					●					
Road construction and maintenance						●	●		●	●	●	●
Rock-crushing operations							●				●	
Roofing kettle		●										
Sewers												
Sidewalk and road deicing		●				●						
Soil excavation/grading						●			●			●
Solid waste collection/transportation							●				●	

MCB Camp Lejeune 2020 Practices	Env. Emergency Response/Spill Response, Section 5.0	HM/HW, Section 7.0	Potential Discovery of Undocumented Contaminated Sites, Section 13.0	Asbestos, Section 8.0	Lead-Based Paint, Section 9.0	Stormwater, Section 11.0	Solid Waste, Recycling, and P2, Section 12.0	Training, Section 3.0	Cultural Resources, Section 6.0	Permitting, Section 14.0	Air Quality, Section 4.0	Natural Resources, Section 10.0
Storage tank management	Applicable To All Practices Conducted Aboard MCB Camp Lejeune	●	Applicable To All Practices Conducted Aboard MCB Camp Lejeune				●	Applicable To All Practices Conducted Aboard MCB Camp Lejeune			●	
Stormwater collection/conveyance						●						
Surface washing												
Swimming pool operation and maintenance		●										
Timber management												●
Universal waste storage/ collection		●										
Urban wildlife management							●					●
UXO/EOD operations		●									●	
Vehicle maintenance		●					●				●	
Vehicle parking						●						
Wash rack						●						

3.0 Training

The contractor is responsible for ensuring that every employee completes a program of classroom instruction or on-the-job training that teaches the employee to perform his or her duties in compliance with Federal, State, and local regulatory requirements. To minimize the environmental impact of MCB Camp Lejeune operations, all contractors are required to receive both EMS and general environmental awareness training at the level necessary for their job function.

To minimize the environmental impact of MCB Camp Lejeune operations, all civilian and military personnel, including contractors, are required to receive both EMS and general environmental awareness training at the level necessary for their job function. Required training can be conducted through ECATTS.

NOTE: The contractor is responsible for knowing and complying with Federal, State, and local regulations. MCB Camp Lejeune environmental personnel will assist contractors with compliance issues; however, the primary burden of regulatory identification, familiarity, and compliance lies with the contractor. This training ***does not*** replace any required regulatory training as per contract requirements. Required training should be completed ***prior*** to working at MCB Camp Lejeune. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section.

3.1 Key Definitions and Concepts

The following key definitions and concepts are associated with contractor training. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

3.1.1 Key Definitions

- **Explicitly Required Training.** Training expressly required by specific laws, regulations, or policies that apply due to the nature of work assignments, job functions, and/or specific licensing or certification requirements mandated by environmental laws, regulations, or policies.
- **Implicitly Required Training.** Instruction/information that is not expressly required by laws, regulations, or policies, but that may be reasonably inferred as being required to maintain compliance or is determined through EMS to reduce overall environmental risk.

3.1.2 Key Concepts

- **Comprehensive Environmental Training and Education Program (CETEP).** The USMC training program designed to ensure that high-quality, efficient, and effective environmental training, education, and information are provided at all levels of the USMC.
- **Environmental Management System (EMS).** The part of the overall management system that includes organizational structure, planning activities, responsibilities, practices, procedures, processes, and resources for developing, implementing, achieving, reviewing, and maintaining the Environmental Policy.
- **EMS Training.** All contractors are required to receive EMS training at the level necessary for their job function.
- **General Environmental Awareness Training.** Instruction designed to ensure that MCB Camp Lejeune and MCAS New River personnel become familiar with the installation environmental policies and programs for regulatory compliance, natural resource conservation, P2, and environmental protection. General EMS and Environmental Awareness Training for contractors and vendors is required for all MCB Camp Lejeune contractors. Required training can be conducted through ECATTS.

3.1.3 Environmental Management System

Training is potentially applicable to all EMS practices conducted aboard MCB Camp Lejeune.

3.2 Overview of Requirements

Contractors operating aboard MCB Lejeune and MCAS New River must be aware of and adhere to all applicable regulations and requirements concerning training.

3.3 Training Requirements

3.3.1 General Environmental Awareness

In accordance with DoD instructions and MCO, the EMD at MCB Camp Lejeune has implemented a CETEP. A major component of the CETEP is to provide general environmental awareness training to all individuals associated with the installation, including contractors and vendors. Prior to or within 30 days of beginning work onsite, all contractors and their employees performing work aboard MCB Camp Lejeune must receive general environmental awareness training.

3.3.2 Environmental Management System (EMS)

In addition to CETEP requirements, MCB Camp Lejeune has implemented an installation-wide EMS per DoD and USMC EMS policy. The EMS highlights the fact that the authority and principal responsibility for controlling environmental impacts belong to those commands, units, offices, and personnel (including contractors and vendors) whose activities have the potential to impact the environment.

Prior to or within 30 days of beginning work onsite, all contractors and their employees performing work aboard MCB Camp Lejeune must receive EMS training.

3.3.3 Recordkeeping

Upon completion of the required training in ECATTS, the contractor must provide the completed training certificate to the contracting representative if required. The contracting representative must maintain these records in the contract file.

All training records, including other applicable environmental training, must be maintained onsite for review.

4.0 Air Quality

The Air Quality Program is responsible for ensuring that the installation complies with all applicable Federal, State, and local air quality regulations. The ROICC or Contract Representative will provide a copy of BO 5090.6A, Air Quality Management, which has additional information.

4.1 Key Definitions and Concepts

The following key definitions and concepts are associated with air quality. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

4.1.1 Key Definitions

- **Criteria Pollutants.** Pollutants that the EPA Administrator has determined will cause or contribute to air pollution, that may reasonably be anticipated to endanger public health and welfare, and for which air quality criteria have been established (i.e., sulfur dioxide, nitrogen oxides, ground-level ozone, carbon monoxide, lead, and particulate matter).
- **Dust-Causing Activity.** Any activity that has the potential to generate dust, including but not limited to construction and demolition (C&D), blasting and sanding, construction of haul roads, land clearing, or fallow fields.
- **Hazardous Air Pollutants (HAP).** Air pollutants identified in 42 United States Code (USC) 7412, that cause or may cause cancer or other serious health effects, such as reproductive effects or birth defects, or have adverse environmental and ecological effects.
- **Ozone-Depleting Substance (ODS).** Chemicals, such as certain refrigerants, which cause depletion of the stratospheric ozone layer - primarily chlorofluorocarbons (CFC) and hydrochlorofluorocarbons (HCFC) and their blends.
- **Particulate Matter.** A criteria air pollutant that includes dust, soot, and other small materials that are released into and transported by air.
- **Title V Operating Permit.** Permit issued under the Clean Air Act (CAA) Amendments of 1990 for all major sources of air pollution. All emission sources at the installation must be listed on the permit.

4.1.2 Key Concepts

- **Emission Sources.** Please have the ROICC or Contract Representative contact EMD before beginning any air emissions emitting activity to determine whether any permitting, monitoring, reporting, testing, and/or recordkeeping requirements apply.
- **Permitted Sources.** Ensure that construction/authorization permits are in place prior to beginning construction and/or prior to the arrival onsite of new or additional emission sources (emergency generators, paint booths, etc.).

4.1.3 Environmental Management System

Contractors associated with air quality include the following:

- Boat operation/maintenance
- Boiler operation
- Chlorination
- Degreasing
- Engine operation and maintenance
- Fueling and fuel management/storage

- Hazardous materials (HM) storage/HM transportation
- Hazardous waste (HW) satellite accumulation area (SAA)/HW transportation
- Live fire range operations
- Metal working
- ODS/halon management
- Paint booth operations/Paint gun cleaning/Paint removal
- Polishing
- Road construction and maintenance
- Rock crushing operations
- Solid waste collection/transportation
- Storage tank management
- Unexploded Ordnance (UXO)/Explosive Ordnance Disposal (EOD) operations
- Woodworking
- Vehicle maintenance

The potential impacts of these activities on the environment include degradation of air quality, degradation of quality of life, and depletion of nonrenewable resources.

4.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding air quality, which include but may not be limited to:

- **Clean Air Act Amendments of 1990.** Protect human health and clean air resources by establishing standards and regulations for the control of air pollutants.
- **Title V Operating Permit.** Operating permit required for any major stationary source that emits or has the potential to emit 100 tons per year or more of any criteria air pollutant or 25 tons per year of HAPs and outlines the requirements to address and ensure air quality compliance.
- **BO 5090.6A, Air Quality Management.** Implements policies and procedures at the installation level that all personnel must follow in order to demonstrate compliance with the Title V permit and USMC requirements.
- **Base Bulletin 5090, Open Burning of Vegetative Debris.** Outlines procedures for conducting open burning in accordance with State regulations and installation procedures.
- **North Carolina Department of Air Quality (NCDAQ) Rules.** Outlines all State-specific air quality rules, control requirements, procedures for permits, and approvals contained in 15A North Carolina Administrative Code (NCAC) 02D and 02Q applicable to North Carolina entities.

4.3 Permit Requirements

The installation has a single permit, the CAA Title V Construction and Operating Permit that includes all stationary air emission sources at the facility; therefore, all permit application submittals to the NCDAQ must be coordinated through the EMD. The NCDAQ will review and process the application and then issue a permit to construct and operate or to modify the emission source(s). A permit may be required prior to the construction of any emission source. Timely submittal of the permit application is required to obtain the final permit prior to commencing construction. The most common types of emission sources at the installation are as follows:

- Boilers
- Generators
- Engine test stands
- Surface coating/painting operations

- Paint removal (chemical and mechanical), abrasive blasting, or other surface preparation activities
- Fuel storage and fuel dispensing
- Grinding
- Woodworking
- Welding
- ODS/refrigerant recovery and recycling operations (industrial chillers, refrigerators, air conditioning compressors, cleaning agents, etc.)
- Bulk chemical and flammable materials storage

4.4 Additional Activities of Concern

Contact the ROICC or Contract Representative for additional information regarding activities that do not necessarily require modification to the Title V permit, but that must be coordinated with or tracked by EMD or the NCDAQ. Examples of these activities include, but are not limited to, the following:

- **Use, Maintenance, and Management of Refrigerants and other ODS.** Includes installation, recovery, replacement, conversion, or service of refrigerant-containing equipment (chillers, refrigerators, air conditioning condensers, etc.). All contractors will use Best Management Practices (BMP) during refrigerant management activities. All HVAC technicians will maintain their appropriate State-specific licenses and present them to the ROICC or Contract Representative upon request.
- **Small Emergency Generators.** Includes the installation and temporary use of emergency generators during electrical failures and construction activities. All contractors will coordinate with the ROICC or Contract Representative to determine if the intended generator may be exempted or must be temporarily permitted for the intended use.
- **Open Burning (e.g., right-of-way clearing, storm debris burning).** Open burning activities aboard MCB Camp Lejeune and MCAS New River must coordinated through EMD and the Fire Department. Open burning activities are only permissible for land clearing and right-of-way maintenance when the following conditions are met:
    - The wind direction at the time the burning is initiated is away from any public transport roads within 250 feet so they are not affected by smoke, ash, or other air pollutants from the burning.
    - The burning is at least 1,000 feet from any residential building, unless an air curtain burner is used. If an air curtain burner is used, the location should be at least 500 feet from a residential building.
    - Heavy oils, asphaltic materials (e.g., shingles and other roofing materials), items containing natural or synthetic rubber, or any materials other than vegetative plant growth are not burned.
    - Initial burning must begin between 0800 and 1800. After 1800, no material may be added to the fire until 0800 the following day.
    - No fires may be started, and no vegetation may be added to existing fires, when the North Carolina Division of Forest Resources (NCDFR) has banned burning for that area.
    - Air Curtain Burners are required to have an Air Permit unless they are temporary burners to be used in instances in natural disasters.

Situations that require a regulatory exemption evaluation by the NCDAQ Regional Office Supervisor are coordinated through EMD's Environmental Quality Branch Air Quality Program Manager. The ROICC or Contract Representative will address any additional questions or provide a copy of Base Bulletin 5090, which contains a summary of the installation's open burning requirements.

The four designated sites at MCB Camp Lejeune that are permitted for storing and/or burning storm debris are in the following areas: Mainside at the borrow pit near the Piney Green landfill, Courthouse Bay, Camp Johnson, and Camp Geiger. Only storm debris may be accumulated at these sites. EMD must notify the NCDAQ if the installation intends to burn the storm debris at one of these sites. Contact the ROICC or Contract Representative for more information.

- **Fire training outside of designated fire training pits.** State approval is required to conduct fire training outside of the designated fire training pits. First, complete the Notification of Open Burning for the Training of Firefighting Personnel form. The form is available at the following site: https://www.deq.nc.gov/air-quality/compliance/openburning/ob-firefighting-training-notification-form-1272021/download?attachment

  An accredited North Carolina Asbestos Inspector must inspect any structure to be burned to ensure that it is free from asbestos before the training exercise. Turn in the completed form to EMD for submittal to NCDAQ and the Division of Public Health, Health Hazards Control Unit. Contact the ROICC or Contract Representative for additional information.

- **Dust-causing activities (e.g., concrete and rock crushing).** Wet suppression is required during the entire dust-causing operation. Ensure that an adequate water supply is available and coordinate with the Fire and Emergency Services Division if access to a fire hydrant is necessary. Applicable wet suppression may be required during temporary concrete crushing operations during C&D activities.
- **Noise Management.** USMC commands engaged in any activity resulting in noise emissions must comply with Federal, State, interstate, and local requirements for the control and management of environmental noise to minimize disruption to the local community. To the maximum extent practicable, personnel should limit the use of power tools, machinery, construction equipment, and other noisy devices to normal working hours.

5.0 Environmental Emergency Planning and Response

Emergency planning and response can reduce injuries, protect employees, reduce asset losses, minimize downtime, and minimize environmental impacts of uncontrolled releases of pollutants to air, land, and water. The purpose of emergency planning is to prepare for, mitigate, respond to, and recover from environmental emergencies while minimizing any potential impacts to human health and the environment. Contractors operating aboard MCB Camp Lejeune must be aware of and adhere to all environmental emergency response procedures and notification requirements to minimize detrimental effects from inadvertent releases.

Procedures relating to emergencies caused by unforeseen site conditions are addressed in Section 5.0 of this guide. Additional inquiries should be directed to the ROICC or Contract Representative. If it is an environmental emergency, contact 911 immediately.

5.1 Key Definitions and Concepts

The following key definitions and concepts are associated with environmental emergency response and spill response requirements. Contact the ROICC or Contract Representative with any questions.

5.1.1 Key Definitions

- **Berm.** A mound used to prevent the spread of a contaminant.
- **Discharge.** Any spilling, leaking, pumping, pouring, emitting, emptying, or dumping not explicitly permitted.
- **Navigable waters.** The waters of the United States and territorial seas, including waters that have been or may be used for commerce, waters subject to tidal flow, interstate waters and wetlands, and all other waters (intrastate lakes, rivers, streams intermittent streams, flats, wetlands, sloughs, prairies, wet meadows, natural ponds, tributaries, etc.).
- **Petroleum, Oil, and Lubricant (POL).** A broad term that includes all petroleum and associated products or oil of any kind or in any form, including, but not limited to, petroleum, fuel oil, vegetable oil, animal oil, sludge, oil refuse, and oil mixed with wastes.
- **Release.** Pumping, pouring, emitting, emptying, discharging, injecting, escaping, leaching, dumping, or disposing into the environment (including the abandonment or discarding of barrels, containers, and other closed receptacles) of any hazardous chemical, hazardous substance, or extremely hazardous substance (EHS). Releases may be aboveground, belowground, or to water.
- **Spill Event.** The reportable discharge of oil into or upon the navigable waters of the United States or adjoining shorelines in harmful quantities, as defined by the Code of Federal Regulations (CFR) in 40 CFR 110.

5.1.2 Key Concepts

- **Environmental Emergency Response Contacts.** The following table identifies the emergency contact information for various spill scenarios. In addition to these emergency response contacts, the ROICC or Contract Representative should be notified immediately after an incident.

Table 5-1: Environmental Emergency Response Contacts

For spills of:	Call:	Follow-up:
Hazardous waste	**911**	Spill Report
Unknown materials	**911**	Spill Report
Material on a permeable surface	**911**	Spill Report
Any amount of a material	**911**	Spill Report
Material that reaches stormwater inlets or waterways	**911**	Illicit Discharge Report
Non-hazardous waste	451-1482	911

- Contractors have containment and cleanup responsibilities following a spill, and there may be additional follow-up reporting or requirements. Contact the ROICC or Contract Representative for additional guidance.

5.1.3 Environmental Management System

Environmental planning and response are potentially applicable to all EMS practices conducted aboard MCB Camp Lejeune.

5.2 Overview of Requirements

Contractors operating aboard MCB Lejeune and MCAS New River must be aware of and adhere to all applicable regulations and requirements regarding emergency response and spill response procedures, which include but may not be limited to:

- **CAA of 1970, Section 112r.** Mandates the prevention and control of air emissions and specifies emergency planning where the potential exists for accidental release of hazardous air pollutants.
- **Clean Water Act (CWA) of 1972.** Establishes the basic structure for regulating discharges of pollutants into the waters of the United States. The CWA establishes that there should be no discharges of oil or hazardous substances into or upon the navigable waters of the United States or adjoining shorelines, which may affect natural resources under the management of the United States.
- **Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980.** Authorizes a Federal response to any release or threatened release of hazardous substance into the environment. This act defines hazardous substances by reference to substances that are listed or designated under other environmental statutes.
- **EPCRA of 1986, Section 304.** Establishes requirements for the reporting of a release to ensure a quick response by local emergency responders. Notification requirements apply to two chemical lists: the CERCLA Hazardous Substance list and the EHS list. The “List of Lists” provides a comprehensive identification of hazardous substances and EHSs. In addition, facilities may be required to submit a list of their hazardous materials inventory maintained onsite or Safety Data Sheets (SDS) to response personnel.
- **Oil Pollution Act (OPA) of 1990.** Addresses oil storage at facilities and emphasizes preparedness and response activities. This act prohibits the harmful discharge of oil and hazardous substances into waters of the United States. The OPA requires contingency planning for “worst case” discharges and demonstrated response capabilities through planning, equipment, training, and exercises.
- **Resource Conservation and Recovery Act (RCRA) of 1976.** Protects human health and the environment from the hazards associated with HW handling, generation, transportation,

treatment, storage, and disposal. Subtitle C of RCRA requires owners and operators of HW facilities to develop comprehensive management plans that address spill prevention and cleanup.

5.3 Spill Notification

5.3.1 POL/HazMat Spill Notification Procedures

In accordance with MCB Camp Lejeune notification requirements any discharge of oil or hazardous materials must be immediately reported to the MCB Camp Lejeune Fire Department at 911.

Contractors must develop a Unit Level Contingency Plan (ULCP) that addresses spill response for their specific sites and potential spill types. MCB Camp Lejeune maintains a Spill Prevention, Control, and Countermeasures (SPCC) Plan that establishes the procedures to prevent an oil spill and documents existing oil spill prevention structures, procedures, and equipment. The Installation SPCC Plan provides general information for any type of response actions needed for spills aboard MCB Camp Lejeune. Contractors engaged in the handling and transfer of POL or HM must develop a ULCP that addresses the spill response for their specific sites and potential spill types. This ULCP must be maintained onsite, and all personnel working within that site must be made aware of its location and use.

In the event of a spill, contact ROICC/Contract Representative after contacting emergency response to obtain a spill report form. Return the completed spill report form to EMD (Fax to (910) 451-3471) and to the ROICC or Contract Representative. A copy of the spill reporting form is included as Attachment 5-1. The following information must be provided when reporting a spill:

- Name and phone number
- Location of spill (building number, street)
- Number and type of injuries, if any
- Type and amount of spilled material
- Source of the spill (container, vehicle, etc.)
- Action being taken, if any, to control the spill
- Estimated time of spill

Do not wait to report a spill, even if all of the required information is not immediately available.

5.3.2 Wastewater Spill and Water Line Break Notification

Contractors operating aboard MCB Camp Lejeune and MCAS New River must be aware of water and wastewater utilities in their specific work/project area.

5.3.2.1 Wastewater Spills

In the event of a wastewater spill, contact the Public Works Base Utilities at (910) 451-7190 (x225) to report the incident. In addition, the incident should be immediately reported to the ROICC or Contract Representative. The contractor will be responsible for providing the following information:

- Name and phone number
- Location of spill (building number, street address)
- Type and amount of spilled material
- Source of the spill
- Action being taken, if any, to control the spill
- Estimated time of spill

5.3.2.2 Water Line Breaks

In the event of a water line break, contact the Public Works Base Utilities at (910) 451-7190 (x225) to report the incident. In addition, the incident should be immediately reported to the ROICC or Contract Representative. The contractor will be responsible for providing the following information:

- Name and phone number
- Location of spill (building number, street address)
- Reason for the break
- Estimated time of the break

5.4 Follow Up

If surface run-off is contaminated, the contractor will, under the advisement of the Fire Department or EMD, construct a temporary berm or containment area. Contaminated surface water will be removed in accordance with all safety and environmental requirements for the installation. Notify the Resource Conservation and Recovery Section (RCRS) at (910) 451-1482, which will provide concurrence for temporary containment areas and removal of contaminated runoff.

If solid or HW was generated as the result of a spill, refer to Sections 12.0 and 7.0 of this guide for disposal requirements.

6.0 Cultural Resource

MCB Camp Lejeune enjoys a rich history, and remnants of our past may be found throughout the real properties that make up the installation. All personnel at MCB Camp Lejeune are responsible for ensuring the cultural resources entrusted to the USMC care remain intact and available for future generations. Contractors are responsible for notifying the ROICC or Contract Representative immediately if suspected archaeological sites, artifacts, or human remains are encountered.

6.1 Key Definitions and Concepts

The following key definitions and concepts are associated with cultural resource management. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

6.1.1 Key Definitions

- **Archaeological Resource.** Defined by the Archaeological Resources Protection Act (ARPA) as any material remains of past human life or activities that are at least 100 years old and are capable of providing scientific or human understanding of past human behavior and cultural adaptation, including the site on which the remains are located. Examples include pottery, basketry, bottles, weapons, weapon projectiles, tools, structures or portions of structures, pit houses, rock paintings, rock carvings, intaglios, graves, human skeletal materials/remains, or any portion or piece of any of the foregoing items or structures. Non-fossilized and fossilized paleontological specimens, or any portion or piece thereof, are not considered archaeological resources unless found in an archaeological context. (According to the National Historic Preservation Act [NHPA] of 1966, some historic properties can achieve significance within the past 50 years if they are of exceptional importance [National Register Criteria Consideration G].)
- **Cultural Resource.** A generic term for the collective evidence of the past activities and accomplishments of people, including buildings, structures, districts, sites, features, and objects of significance in history, architecture, archaeology, engineering, or culture, per MCO P5090.2.
- **Effect.** Any condition of a project that may cause a change in the quality of the historic, architectural, archaeological, or cultural character of a property that qualifies it for listing in the National Register of Historic Places (NRHP). A project is considered to have an effect on a historic or cultural property when any aspect of the project changes the integrity of the location, design, setting, materials, workmanship, feeling, or association of the property that contributes to its significance.
- **Historic Property.** Any prehistoric or historic district, site, building, structure, or object significant in United States history, architecture, archaeology, engineering, or culture and included, or eligible for listing in, the NRHP per the NHPA of 1966 and MCO P5090.2.
- **State Historic Preservation Officer (SHPO).** The person designated to administer the State Historic Preservation Program, including identifying and nominating eligible properties to the NRHP and administering applications for listing historic properties in the NRHP.

6.1.2 Key Concepts

- **Notification.** Contractors must notify the ROICC or Contract Representative if any cultural resources are encountered.
- **Policy.** DoD policy is to preserve significant historic and archaeological resources.

6.1.3 Environmental Management System

Contractor practices associated with cultural resources include:

- Construction/demolition/renovation
- Land clearing
- Road construction and maintenance
- Soil excavation/grading

The potential impacts of these activities on the environment include damage, destruction, alteration, theft, or demolition of historic properties.

6.2 Overview of Requirements

It is DoD policy to integrate the archeological and historic preservation requirements of applicable laws with the planning and management of activities under DoD control; to minimize expenditures through judicious application of options available in complying with applicable laws; and to encourage practical, economically feasible rehabilitation and adaptive use of significant historical resources.

Contractors operating aboard MCB Lejeune and MCAS New River must be aware of and adhere to all applicable regulations and requirements regarding cultural resources, which include but may not be limited to:

- **BO 5090.8A.** Sets forth regulations and establishes responsibilities associated with management of archaeological and historic resources aboard MCB Camp Lejeune.
- **Archaeological and Historic Preservation Act (AHPA) of 1974 (16 USC 469 *et seq.*).** Amends the Reservoir Salvage Act to extend its provisions beyond the construction of dams to any terrain alteration resulting from any Federal construction project or federally licensed project, activity, or program.
- **Archeological Resources Protection Act of 1979 (16 USC 470 *et seq.*).** Requires Federal land managers to issue permits for the excavation or removal of artifacts from lands under their jurisdiction. The ARPA requires that relevant Native American tribes be notified of permit issuance if significant religious or cultural sites will be affected. It prohibits the excavation, damage, alteration, theft, or defacement of an archaeological site or artifacts unless permitted by the Federal Land Manager.
- **DoD Directive 4710.1, Archaeological and Historic Resources Management.** Provides policy for the management of archaeological and historic resources on land and in water under DoD control.
- **EO 11593, Protection and Enhancement of the Cultural Environment May 13, 1971.** Requires all Federal agencies to administer cultural properties under their control. Agencies are required to direct their policies, plans, and programs so that significant sites and structures are preserved.
- **Historic Sites, Buildings, and Antiquities Act of 1935 (Public Law 74-292, 16 USC 461 *et seq.*).** States that it is Federal policy to preserve historic and prehistoric properties of national significance.
- **National Environmental Policy Act (NEPA) of 1969 (42 USC 4321 *et seq.*).** States that it is Federal government policy to preserve important historic, cultural, and natural aspects of our national heritage and requires the consideration of environmental concerns during project planning and execution.
- **NHPA of 1966 (54 USC 300101 *et seq.*).** Establishes historic preservation as a national policy and requires Federal agencies undertaking actions that may affect NRHP-eligible historic

properties to consult State historic preservation offices and the Advisory Council on Historic Preservation. Section 110 of NHPA requires Federal agencies to inventory, evaluate, identify, and protect cultural resources that are determined eligible for listing in the NRHP.

- **Public Buildings Cooperative Use Act of 1976 (Public Law 94-541).** Encourages adaptive reuse of historic buildings as administrative facilities for Federal agencies.
- **Title 36 CFR Part 65, National Historic Landmarks Program.** Identifies and designates National Historic Landmarks and encourages the long-range preservation of nationally significant properties that illustrate or commemorate the history and prehistory of the United States.

6.3 Procedures

All contractors are expected to follow these procedures:

- Notify the ROICC or Contract Representative immediately concerning any encounter with suspected archaeological sites, artifacts, human remains, or any other suspected cultural resources during contractor activities.
- Stop work in the immediate area of the discovery until directed by the Contract Representative to resume work.

Be particularly aware of surroundings when working in a designated historic area. The Camp Lejeune Installation Geospatial Information & Services (IGI&ES) Office of the Geospatial Services Division can provide resource mapping of known cultural resource areas for all planners, project managers, contractors, and others through formal request. The ROICC or Contract Representative will assist with making arrangements to request access for Geographic Information System (GIS) mapping.

Figure 6-1: Possible Cultural Resource Discovery Flow Chart

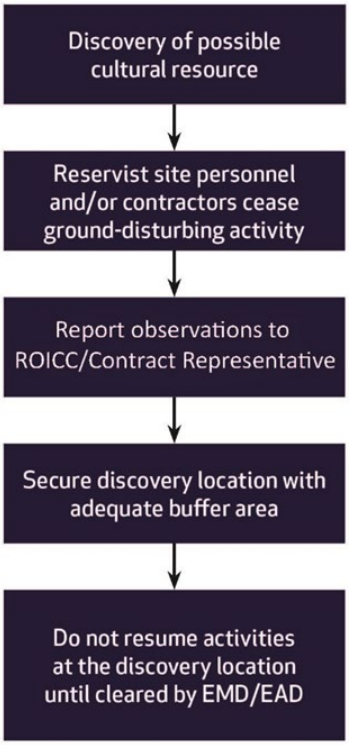

7.0 Hazardous Materials/Hazardous Waste Management

All persons on a USMC installation are subject to compliance with Federal, State, and local regulations and permit conditions addressing the proper management of hazardous materials and waste. Mishandling these wastes and materials may result in violation notices, fines, and/or penalties. The U.S. Environmental Protection Agency (EPA) regulates HW through the RCRA, which provides specific regulatory definitions for HW and its management. RCRA governs all HW from the point of generation to ultimate disposal, including HW generated by contractors aboard MCB Camp Lejeune and MCAS New River. Hazardous materials, including those used by contractors aboard the installation, are also regulated by EPCRA. Additionally, the North Carolina Department of Environmental Quality (NCDEQ) has issued more stringent rules and regulations governing HM and HW management that also apply to contractors.

7.1 Key Definitions and Concepts

The following key definitions and concepts are associated with HM, HW, and their management. Direct questions or concerns about the information in this section to the ROICC or Contract Representative, who will contact the appropriate environmental office if additional clarification is necessary.

7.1.1 Key Definitions

- **Less than 90-day Accumulation Facility.** These facilities are used to accumulate HW temporarily until it is either manifested and shipped off site for disposal or transferred to a permitted storage facility. HW may be accumulated for less than 90 days in these facilities. MCB Camp Lejeune's Less than 90-day Accumulation facility is located on Michael Road.
- **Generator.** Any person whose activity or process produces HW or whose activity or process subjects HW to regulation.
- **Hazardous Material.** A chemical compound, or a combination of compounds, posing or capable of posing a significant risk to public health, safety, or the environment as a result of its quantity, concentration, or physical/chemical/infectious properties.
- **Hazardous Waste.** Any discarded material (including solid, liquid, or gas) or combination of discarded materials which, due to quantity, concentration, or physical, chemical, or infectious characteristics may:
  - Cause or significantly contribute to an increase in mortality or cause a serious irreversible or incapacitating reversible illness; or
  - Pose a substantial present or potential hazard to human health or the environment when improperly treated, stored, transported, disposed of, or otherwise managed.
- **Manifest.** A document that allows all parties involved in HW management (e.g., generators, transporters, disposal facilities, EPA, State agencies) to track the movement of HW from the point of generation to the point of ultimate treatment, storage, or disposal. All hazardous waste manifests for waste generated aboard MCB Camp Lejeune must be reviewed and released by personnel from the Resource Conservation and Recovery Section, EMD at (910) 451-1482.
- **Non–RCRA-Regulated Waste.** Waste that is not regulated or is exempt from regulation under RCRA HW requirements but has other regulatory requirements for proper management.
- **Satellite Accumulation Area.** Designated areas at or near the point of generation, where HW is accumulated. Generators may accumulate up to 55 gallons of HW or one quart of acute HW at a satellite area. When 55 gallons of HW (or 1 quart of acute HW) are exceeded, the generator must date the container and transfer it to an approved Less than 90-day site or long-term HW storage facility within 72 hours. An EMD authorization for an SAA must be obtained and posted at the site

prior to generation or accumulation of waste. EMD authorization will establish individual limits for each SAA. No SAA authorizations will exceed 55 gallons of HW or 1 quart of acute HW. In accordance with installation policy, storage of HW in an SAA should not exceed 365 days even if the container is not full.

- **Safety Data Sheet.** A document that provides information about (1) chemical properties, environmental hazards, and health hazards and (2) protective measures, along with safety precautions, for handling, storing, and transporting. Hazard Communication Standard (HCS), 29 CFR 1910.1200(g), was revised in 2012 to mandate the use of a single Globally Harmonized System of Classification and Labelling of Chemicals (GHS) by manufacturers, distributors and importers to communicate information on chemical-related hazards. The information contained in the SDS is standardized in a 16-section format. Employers must ensure that the SDSs for all hazardous chemicals in the workplace are readily accessible to employees.
- **Treatment.** Any method, technique, or process designed to change the physical, chemical, or biological character or composition of any HW to neutralize the waste; or to recover energy or material resources from the waste; or to render such waste non-hazardous or less hazardous, safer to transport, store, or dispose of, or amenable for recovery or storage, or reduction in volume.
- **Treatment, Storage, and Disposal (TSD) Facilities.** TSD facilities conduct HW treatment, storage, or disposal operations and require an RCRA part B permit for final approval to operate. The part B permit is maintained to accurately identify the most current operations at the TSD facility. MCB Camp Lejeune does not have a TSD facility.
- **Universal Waste (UW).** Universal waste regulations streamline HW management standards for batteries, pesticides, mercury-containing equipment, aerosol cans, and fluorescent lamps. The regulations govern the collection and management of these widely generated wastes, thus facilitating environmentally sound collection and proper recycling or treatment. In North Carolina, batteries, thermostats, obsolete agricultural pesticides, aerosol cans and fluorescent lamps may be managed under the UW Rule. UW must be transferred off site within 1 year of the date when the material was first identified as waste.
- **Used Oil.** Any oil that has been refined from crude oil or synthetic oil and, as a result of use, storage, or handling, has become unsuitable for its original purpose due to the presence of impurities or loss of original properties. Used oil may be suitable for further use and is economically recyclable; therefore, it is managed as a separate category of material.

7.1.2 Key Concepts

- **HW Management.** The systematic control of the collection, source separation, storage, transportation, processing, treatment, recovery, and disposal of HW. In addition, HW Management includes processes to reduce the HW's effect on the environment and to recover resources from it.
- **HW Minimization.** The USMC policy is to reduce the quantity of HW disposed of by source reduction, recycling, treatment, and disposal. The highest priorities are reduction of HW generation, and recycling. The goal of the USMC is to achieve continuous reduction of HW generation through P2 initiatives, BMPs, and use of the best available demonstrated technology.
- **National Fire Protection Association.** The United States trade association that creates and maintains private, copyrighted standards and codes, including the diamond hazard label in Figure 7-1 below that is used by emergency personnel to quickly and easily identify the risks posed by hazardous materials.

Figure 7-1: Diamond Hazard Label

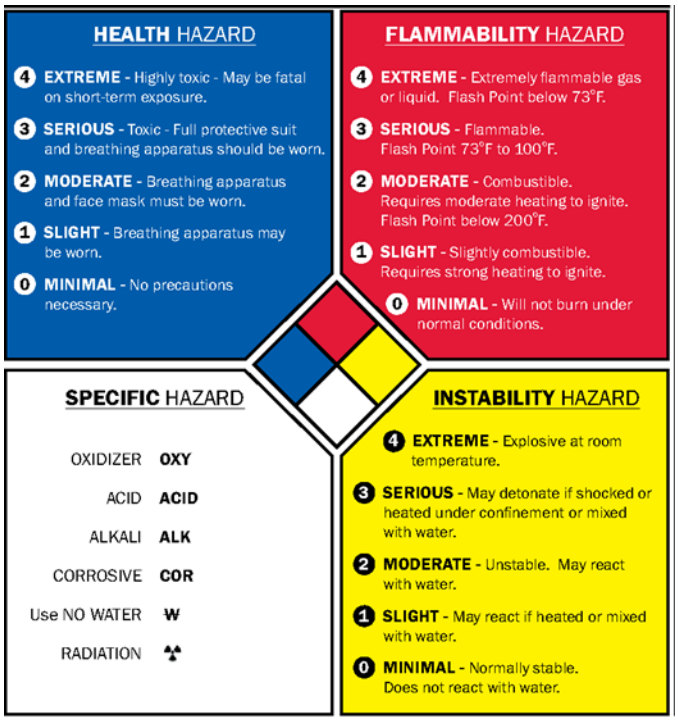

7.1.3 Environmental Management System

Contractor practices associated with HM and HW management include, but are not limited to, the following:

- Battery management
- Boat operation/maintenance
- Boiler operation
- Building operation/maintenance/repair
- Chlorination
- Cooling tower operation and maintenance
- Construction/renovation/demolition
- Degreasing
- Drinking water management
- Engine operation and maintenance
- Equipment operation/maintenance/disposal
- Fueling and fuel management/storage
- Habitat Management
- HCP operation
- HM storage
- HM transportation
- HW disposal offsite transport
- HW satellite accumulation area
- HW storage (<90 days)
- HW transportation
- Laboratory

- Landscaping
- Laundry
- Live fire range operations
- Metal working
- Non-destructive inspection
- ODS/halon management
- Paint gun cleaning
- Paint removal
- Painting
- Parts replacement
- Pesticide/herbicide management and application
- Polishing
- Pumping station/force main
- Range residue clearance
- Recreational facilities operation
- Roofing kettle
- Sidewalk and road deicing
- Storage tank management
- Swimming pool operation and maintenance
- Universal waste storage/collection
- UXO/EOD operations
- Vehicle maintenance

The potential impacts of these activities on the environment include depletion of the HW landfill, depletion of non-renewable resources, and degradation of soil quality.

7.2 Overview of Requirements

Contractors operating aboard MCB Lejeune and MCAS New River must be aware of and adhere to all applicable regulations and requirements regarding HM and HW, which include but may not be limited to:

- **BO 5090.9, Hazardous Material/Waste Management/Air Station Order (ASO) 5090.2, Environmental Compliance and Protection Program for MCAS New River.** Establishes procedures and general responsibilities for the disposal of HM and HW under environmental permits and authorizations.
- **Emergency Planning and Community Right-to-Know Act.** Establishes requirements regarding emergency planning and the reporting of hazardous chemical storage and usage.
- **Hazardous Material Transportation Act (HMTA) of 1975.** The principal Federal law regulating the transportation of HM. Established to mitigate the risks to health, property, and the environment inherent in the transportation of HM in intrastate, interstate, and foreign commerce. The HMTA is administered by the U.S. Department of Transportation (DOT) and regulates the shipping, marking, labeling, placarding, and recordkeeping requirements for HM, including HW and military munitions.
- **Resource Conservation and Recovery Act of 1976.** Establishes standards for HW generators as necessary to protect human health and the environment by instituting statutory standards for generators and transporters of HW that will ensure the following: proper recordkeeping and reporting; use of manifest system; use of appropriate labels and containers; containerization and

accumulation time; and proper management of TSD facilities. In addition, it gives the EPA and State agencies access authority to facility premises and all records regarding HW management.

- **40 CFR Subchapter I (Parts 260–299), Solid Wastes.** Federal regulations promulgated under the 1976 RCRA that regulate HW management, generators, transporters, and owners or operators of TSD facilities. North Carolina has adopted the Federal HW rules by reference.

Because the installation is designated as a Large Quantity Generator (LQG) of HW, all HW generated aboard MCB Camp Lejeune must meet the regulatory requirements of this generator designation. An LQG may maintain three types of HW accumulation/storage areas: satellite, Less than 90-day, and permitted. Typically, HW is accumulated at an SAA and later transferred to a Less than 90-day or permitted storage area.

Both MCB Camp Lejeune and MCAS New River maintain Hazardous Waste Management Plans (HWMP) that outline the specific requirements for managing HM and HW. The HWMP identifies and provides guidance to implement all regulatory HW management activities and is available to all personnel who accumulate, generate, transport (including on-installation transportation), treat, store, or dispose of HW.

Contractors are responsible for the management of all HM and the ultimate disposition of any HW generated aboard MCB Camp Lejeune during a contract performance period. The ROICC or Contract Representative will contact Environmental personnel who will provide additional guidance and oversight to verify compliance with applicable Federal, State, and local laws governing the generation, handling, and disposal of HM, HW, UW, used oil, petroleum-contaminated materials, RCRA-regulated HW, and non–RCRA-regulated waste.

Depending on the type of project, contractors may be required to submit a site-specific HWMP to the ROICC or the Contract Representative prior to beginning work. Additionally, the Contracting Officer may require a Contractor Hazardous Material Inventory Log and corresponding SDSs for all materials to be used during the execution of the contract. EMD/I&E will use the SDSs to help contractors establish their Hazardous Material Storage and SAAs.

7.3 Hazardous Materials Requirements

If a project uses HM:

- Reduce/reuse/recycle when possible; meet contract requirements for recycling.
- All contractors exceeding 30 days in a calendar year must submit an Authorized Use List (AUL) using the Marine Corps Installation East Marine Corps Base Camp Lejeune Initial AUL Build Form (MCIEAST-MCB CAMLEJ/G-F/EMD/34), Attachment 7-3, to lejeune_aul@usmc.mil for review and approval.
- Segregate incompatible materials. Consult the SDS or material manufacturers with questions about a material's compatibility. Some examples of incompatible materials likely to be used by contractors are:
    - *Corrosives* (e.g., batteries, stripping and cleaning compounds containing acids or bases) and Flammables (e.g., fuels, oils, paints, and adhesives)
    - *Corrosives and Oxidizers* (e.g., peroxide, perchlorates, sodium hypochlorite/bleach, or calcium hypochlorite)
    - *Oxidizers and Flammables*
- All compatible materials should be segregated and stored within designated storage lockers or cabinets (i.e., flammable materials should be stored in designated flammable storage lockers or cabinets and corrosives should be stored in designated corrosives storage lockers or cabinets).

- Do not store large quantities of materials. Keep on hand only what can be used.
- Maintain an inventory of all HM maintained onsite, with adequate controls in place to prevent unauthorized access.
- Do not dump any HM into floor drains, sinks, oil-water separators (OWS), or storm drains, or onto the ground.
- Store containers that hold 55 gallons or more (including in-use electrical generators and portable equipment) in proper secondary containment. Permanent secondary containment must be inspected weekly, temporary secondary containment must be inspected daily; all inspections and drainage of stormwater from secondary containment must be documented.
- Maintain SDSs and appropriate spill control/cleanup materials onsite at all times.
- Provide HM storage and usage information for regulatory reporting to the appropriate environmental office upon request.
- Stop work immediately if a project unearths any unknown HM (e.g., munitions and explosives of concern [MEC], discarded military munitions [DMM], or UXO), and immediately report the situation to the ROICC or Contract Representative.
- Do not leave HM (or HW) onsite once the contract is completed. Remove it from the installation or make arrangements through the ROICC or Contract Representative to contact RCRS or I&E for turn-in procedures upon completion of the contract.

Figure 7-2: NAVOSHENTRACEN Compatibility Chart

NAVOSHENVTRACEN COMPATIBILITY CHART

HMUG GROUP	HCC see note 2	GROUP NAME	EXAMPLES	INCOMPATIBLE MATERIALS	EXAMPLES	REACTION IF MIXED
1	C1, C2, C4, C5	ACIDS	Battery Acid Paint Removers De-Rust Spray	FLAMMABLES/ COMBUSTIBLES ALKALIS/BASES/CAUSTICS OXIDIZERS (HMUG Groups 2, 3, 4, 6, 7, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 20, 22)	Degreasers, Carbon Removers, Anti-Fogging Compounds	HEAT Gas Generation VIOLENT REACTION
2	F1 to F7, P1, T6, V3, V4	ADHESIVES	Epoxies Isocyanates Diethylenetriamine	ACIDS ALKALIS/BASES/CAUSTICS OXIDIZERS (HMUG Groups 1, 3, 18)		HEAT FIRE HAZARD
3	B1, B2	ALKALIES BASES/ CAUSTICS	Ammonia Sodium Hydroxide Cleaners	ACIDS/OXIDIZERS FLAMMABLES/COMBUSTIBLES (HMUG Groups 1, 2, 6, 8, 9, 10, 11, 14, 17, 18, 19, 20, 22)	Battery acid, Paint Removers, De-Rust Sprays, Paints, Solvents	HEAT Gas Generation VIOLENT REACTION
4	C1-C4, B1-B3, F2 to F7, T4, T6, V2-V4	CLEANING COMPOUNDS	Degreasers Carbon Removers Antifogging Compounds	DETERGENTS/SOAPS OXIDIZERS (HMUG Groups 1, 7, 18)	Calcium Hypochlorite, Sodium Nitrite, Hydrogen Peroxide	HEAT FIRE HAZARD
5	G1 to G9	COMPRESSED GASES	Acetylene, Propane, Nitrogen, Argon, Helium, Oxygen	HEAT SOURCES Consult paragraph C23 for specific handling and stowage guidance (HMUG Groups 8, 9, 10, 11, 12, 15, 18, 19)		FIRE HAZARD EXPLOSION HAZARD
6	F2 to F5, T6, V2, V3, V4	CORROSION PREVENTIVE COMPOUNDS	Corrosion Inhibitors Chemical Conversion Compounds	ACIDS/BASES OXIDIZERS IGNITION SOURCES (HMUG Group 1, 3, 18, 20)		FIRE HAZARD
7	B3	DETERGENTS/ SOAPS	Trisodium Phosphate Scouring Powders Disinfectants	ACID-CONTAINING COMPOUNDS (HMUG Groups 1, 4, 18)	Battery Acid, Paint Removers De-Rust Sprays	VIOLENT REACTION HEAT
8	F6, V6, V7	GREASES	Lithium Grease Silicone Molybdenum	OXIDIZERS ALKALIS/BASES/CAUSTICS (HMUG Groups 3, 5, 18)		FIRE HAZARD HEAT
9	T6, V4, V6, V7	HYDRAULIC FLUIDS	Petroleum-Based Synthetic Fire-Resistant	CORROSIVES, OXIDIZERS (HMUG Groups 1, 3, 5, 18)		VIOLENT REACTION
10	F2 to F4, T4, T6, V2-V6	INSPECTION PENETRANTS	Petroleum-Based Dyes	CORROSIVES, OXIDIZERS (HMUG Groups 1, 3, 5, 18)	Battery Acid Caustic Soda Chlorine laundry bleach Calcium Hypochlorite Hydrogen Peroxide OBA Canisters Paint Removers	
11	F4, T6, V2, V3, V4, V6	LUBRICANTS/ OILS	General Purpose, Gear, Turbine, Weapons			EXPLOSION HAZARD
12	F2 to F6, P1, T3, T4, T6, V1-V4	PAINT MATERIALS	Primers, Enamels, Urethanes, Lacquers, Varnishes, Non-Skid, Thinners	ACIDS, OXIDIZERS (HMUG Groups 1, 5, 18)		HEAT FIRE HAZARD
13	C1-C4, B1-B3, D1	PHOTO CHEMICALS	Developers, Stopbath, Toners, Bleaches, Replenishers	ACIDS HEAVY METALS (HMUG Groups 1, 18, 20)		HEAT FIRE HAZARD
14	F4	POLISH/WAX COMPOUNDS	Buffing Compounds Metal Polishes General Purpose Waxes	CORROSIVES OXIDIZERS (HMUG Groups 1, 3, 18)		HEAT, FIRE HAZARD VIOLENT REACTION
15	F2 to F6, T3, T4, T6, V1-V4	SOLVENTS	Methyl Ethyl Ketone (MEK) Toluene, Xylene Acetone	CORROSIVES OXIDIZERS BATTERIES (HMUG Groups 1, 5, 18, 21, 22)	Battery Acid Calcium Hypochlorite Sodium Nitrite Sodium Hydroxide	HEAT FIRE HAZARD
16	T6, T7, Z1	THERMAL INSULATION	Asbestos Fiberglass Glass Wool	MATERIAL IS NOT REACTIVE KEEP DRY		NO REACTION
17	C1-C4, B1-B3, D1	WATER TEST/ TREATMENT CHEMICALS	Nitric Acid Mercuric Nitrate Caustic Soda	CORROSIVES OXIDIZERS HEAVY METALS (HMUG Groups 1, 3, 18, 20, 21)		HEAT VIOLENT REACTION
18	D1 to D4	OXIDIZERS	Calcium Hypochlorite Laundry Bleach OBA Canisters	PETROLEUM BASED MATERIALS FUELS, SOLVENTS, CORROSIVES, HEAT (HMUG Groups 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 20, 21, 22)		FIRE HAZARD VIOLENT REACTION EXPLOSION HAZARD TOXIC GAS GENERATION
19	F1 to F4, V4, V5, V6	FUELS	JP4, JP5 Gasoline Diesel Fuel	CORROSIVES OXIDIZERS (HMUG Groups 1, 3, 5, 18)	Battery Acid Calcium Hypochlorite Sodium Nitrite Sodium Hydroxide	FIRE HAZARD TOXIC GAS GENERATION
20	T6, V7, Z2	HEAVY METALS	Mercury Lead Beryllium	CORROSIVES OXIDIZERS WATER TREATMENT/PHOTO CHEMICALS (HMUG Groups 1, 3, 6, 13, 17, 18, 21)		VIOLENT REACTION GENERATION OF TOXIC AND FLAMMABLE GAS
21	Z4 to Z7	BATTERIES	Lead-Acid Dry-Cell Alkaline	SOLVENTS HEAVY METALS OXIDIZERS (HMUG Groups 15, 17, 18, 20)	Xylene Toluene Alcohol	HEAT VIOLENT REACTION TOXIC GAS GENERATION TOXIC
22	T2 to T6	PESTICIDES	Insecticides, Fungicides Rodenticides Fumigants	CORROSIVES OXIDIZERS (HMUG Groups 1, 3, 15, 18)		TOXIC GAS GENERATION

1. This chart is to be used as a ***GUIDE ONLY!***
2. Compare the desired HMUG Group/HCC in the left column with the Incompatible Material(s) of that Group in the center column on the same row. Mixing of the HMUG Group/HCC with the Incompatible Material(s) may result in the reaction(s) listed in the right column.
3. Not all applicable HCCs are listed; only the most frequently encountered HCCs (except N1) are listed.

REV 09-03

7.4 Hazardous Waste Requirements

The appropriate environmental office must be notified before any HW is generated on projects managed by the ROICC or the Facilities Support Contracts (FSC). Have the ROICC or Contract Representative contact RCRS or I&E with questions regarding whether or not a waste meets the definition of HW. Installation personnel must approve all regulated waste and HW storage locations.

If a project generates HW:

- Minimize generation through waste minimization and P2 techniques.
- Have the ROICC or Contract Representative contact RCRS or I&E with questions regarding how to manage the waste. Do not mix waste types (e.g., used oil rags and solvent rags).
- Have the ROICC or Contract Representative contact RCRS or I&E for turn-in procedures as wastes are generated to determine if waste can be disposed of on the installation.
- Do not dump any HW into floor drains, sinks, OWSs, or storm drains, or onto the ground. Do not place HW into general/municipal trash dumpsters.
- Ensure that HW drums are properly labeled and lids are secured (wrench tight).
- Ensure that SAAs are managed properly and storage limits are not exceeded; have the ROICC or Contract Representative consult RCRS or I&E prior to creating a new SAA.

7.4.1 Storage

All HW must be properly containerized, stored, and labeled at the time the waste is first generated. HW must be stored in containers that meet applicable specifications of the DOT. HW labels, as required by the EPA and the NCDEQ, must contain the following information.

- Words: HAZARDOUS WASTE.
- Content: Noun name found on the specific Profile Sheet provided by RCRS or I&E.
- Accumulation Start Date (ASD): For HW accumulated in an SAA, the ASD will be affixed once the container is filled or at the 1-year anniversary, whichever comes first.
- Hazard indicator (ignitable, corrosive, toxic, reactive)
- Number of Containers: Reflects the total number of containers (e.g., 1 of 1, etc.).

Any HW generated by contractors must be stored in an approved HW SAA. Contractors who need an SAA should contact the ROICC or Contract Representative, who will contact RCRS or I&E personnel to help the contractor establish each SAA. A summary of procedures follows:

- The HW generator may accumulate as much as 55 gallons of a specific HW stream (or up to one quart of acute HW) in a container at or near the point of generation.
- The containers must be under the control of the contractor generating the waste and must be kept closed (wrench tight) at all times except when adding waste.
- HW containers must be inspected weekly using the *Satellite Accumulation Area* (SAA) *Weekly Inspection Form*, included as Attachment 7.1. Written records noting discrepancies and corrective actions must be maintained for a period of 3 years. Copies of inspection reports should be provided to the ROICC or Contract Representative.
- The generating contractor shall monitor the level of waste in the SAA container and contact the ROICC or Contract Representative to coordinate disposal or determine if the contractor can turn in the HW to RCRS or I&E before the container is full. If the SAA container becomes full, the generating contractor has 72 hours (3 days) to arrange for the transport of the HW to an RCRA Part B permitted storage area. Storage of HW in an SAA should not exceed 365 days, even if the container is not full.

7.4.2 Manifesting and Disposal

All disposal of HW generated by contractors must be coordinated with the RCRS on Camp Lejeune or I&E EAD on MCASNR. HW generated aboard MCB Camp Lejeune and MCAS New River must be transported off the installation by a permitted HW transporter and must include a Uniform Hazardous Waste Manifest form (EPA Form 8700-22) or an equivalent approved manifest. The following procedures must be followed for disposal of HW:

- Use the MCB Camp Lejeune or MCAS New River EPA identification number for disposal of all contractor-generated HW.
- HW may only be transported by authorized personnel or permitted companies. Prior to transportation offsite, the HW generator must ensure that all DOT requirements for labeling, marking, placarding, and containerizing are met. The HW generator must also ensure that the transporter has obtained the installation's EPA identification number for the transportation of HW and that an appropriate waste manifest accompanies each shipment.
- The HW manifest can only be signed by personnel from the installation who have been designated in writing by the CG. The ROICC or Contract Representative should contact RCRS or I&E about manifesting regulated and non-regulated wastes offsite. Under NO circumstances can a contractor, ROICC, or Contract Representative sign a HW manifest or use another EPA identification number for wastes generated at the installation.
- All HW must be submitted to a permitted TSD facility. HW generators must certify that the facility receiving the waste employs the most practical and current treatment, storage, or disposal methods for minimizing present and future threats to human health and the environment.

7.5 Non-RCRA-Regulated Waste Requirements

Non-RCRA-regulated wastes include used oil (when recycled), non-terne (tin and lead alloy) plated oil filters (not mixed with listed waste), CFC refrigerants (from totally enclosed equipment), certain Polychlorinated biphenyl (PCB) containing wastes, asbestos, and batteries not managed as UW.

7.5.1 Used Oil and Oil Filters

Used motor oil itself is not regulated as HW in North Carolina if it is recycled or burned for energy recovery. If used oil is not recycled, the generator must determine prior to disposal whether it is HW. Used oil must be collected in drums or another approved container marked "Used Oil." If the used oil storage container has a volume of 55 gallons or more, it must be stored in secondary containment.

- Do not dump used oil into drains, sinks, or trash containers, or onto the ground.
- Do not store used oil in open buckets or drip pans, damaged or rusted containers, or containers that cannot be fully closed.
- Do not mix used oil with other waste materials.

Terne plated oil filters contain an alloy of tin and lead. They are considered HW due to their lead content and are typically located on industrial and heavy-duty vehicles and equipment. All other used oil filters are not regulated as HW in North Carolina as long as they are not mixed with listed HW. To qualify for this exclusion, the following conditions must be met:

- Used oil filters must be gravity hot-drained by puncturing the filter anti-drain back valve or filter dome and hot draining into a "Used Oil" storage drum. "Hot-drained" means that the oil filter is drained at a temperature that approximates the temperature at which the engine operates.

- Any incidental spillage that occurs must be cleaned up with dry sweep, rags, or “absorbent matting.”
- Drained used oil filters must be collected in a container that is in good condition and is labeled with the words “Drained Used Oil Filters.”
- No other waste streams should be deposited in containers collecting used oil filters for disposal.
- Coordinate with the ROICC or Contract Representative to turn-in drained used oil filters and or dry sweep to RCRS or I&E.

7.5.2 Used Antifreeze

Antifreeze is composed of regulated chemicals, including ethylene glycol and propylene glycol, and during typical use may become contaminated with traces of fuel or metal particles (i.e., lead, cadmium, or chromium). It may also become HW if it has been mixed with other wastes, such as gasoline or solvents. Additional characterization may be required to determine whether or not used antifreeze is HW. Used antifreeze that is not recycled may be regulated as HW if the results from the Toxic Characteristic Leaching Procedure (TCLP) indicate metal contents that meet or exceed RCRA thresholds.

The State of North Carolina does not regulate used antifreeze as HW, as long as it is recycled by reuse, distillation, filtration, or ion exchange. Used antifreeze must be stored in closed containers on an impermeable concrete surface with adequate spill controls (secondary containment, appropriate stocked spill kits, etc.). Contact the ROICC or Contract Representative to determine if used antifreeze can be given to RCRS or I&E.

7.5.3 Petroleum-Contaminated Wipes and Oily Rags

Petroleum-contaminated wipes and oily rags are to be managed as non-regulated waste. Follow these procedures:

- Store oil-contaminated wipes and oily rags in metal containers because of their flammability/combustibility and to protect them from the weather.
- Do not throw these non-regulated waste items into solid waste dumpsters or garbage cans.
- Contact the ROICC or Contract Representative to determine if petroleum-contaminated wipes and oily rags can be given to RCRS or I&E.

7.5.4 Used Electronic Equipment

Used electronic equipment may contain lead solder or PCB oils (e.g., light ballast). Turn in these items as they are generated. Have the ROICC or Contract Representative contact RCRS or I&E for proper handling and/or turn-in procedures.

7.5.5 New and Used Batteries

- Store compatible batteries together (e.g., lithium batteries should be stored with other lithium batteries).
- Store batteries off the ground to prevent them from coming into contact with water.
- Store lead-acid batteries away from an open flame.
- Place rechargeable batteries in plastic bags before storing them with other rechargeable batteries.
- Do not dispose of batteries unless authorized.
- Have the ROICC or Contract Representative contact RCRS or I&E for proper handling and/or turn-in procedures.

8.0 Asbestos

Asbestos was widely used in many products (especially building parts) prior to 1990 for its fire resistance, strength, and affordability. However, exposure to friable asbestos can lead to lung diseases including cancer. Contractors working aboard the installation must follow all Federal, State, and local regulations/specifications for the proper notification, removal, disposal, and management of all asbestos-containing materials (ACM) associated with demolition and renovation project. If you have any additional questions, please call (910) 451-7018.

8.1 Key Definitions and Concepts

The following key definitions and concepts are associated with asbestos and its management. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate EMD program if additional clarification is necessary.

8.1.1 Key Definitions

- **Abatement.** Work performed to repair, maintain, remove, isolate, or encapsulate ACM.
- **Asbestos.** Asbestos is the generic term for a group of naturally occurring fibrous silicate minerals, including those that typically exhibit high tensile strength, flexibility, and resistance to thermal, chemical, and electrical conditions. Asbestos was commonly used in installed products such as roofing shingles, floor tiles, cement pipe and sheeting, roofing felts, insulation, ceiling tiles, fire-resistant drywall, and acoustical products.
- **Asbestos-Containing Material.** Any material containing more than 1 percent asbestos, per 29 CFR 1926.1101.
- **Category I Non-friable ACM.** Asbestos-containing packings, gaskets, resilient floor covering, and asphalt roofing products containing more than 1 percent asbestos, per 40 CFR 61, Subpart M.
- **Category II Non-friable ACM.** Any material, excluding Category I non-friable ACM, containing more than 1 percent asbestos that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure, per 40 CFR 61, Subpart M.
- **Demolition.** The wrecking or removal of any load-bearing walls or structure with any related handling operations.
- **Friable.** Any ACM that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure (may include damaged ACM that was previously identified as non-friable), per 40 CFR 763.
- **Glove Bag.** A sealed compartment with attached inner gloves that are used for handling ACM. Glove bags provide a small work area enclosure typically used for small-scale asbestos stripping operations.
- **Presumed Asbestos-Containing Material (PACM).** Thermal system insulation (TSI) and surfacing material found in buildings constructed no later than 1980, per 29 CFR 1926.1101.
- **Regulated Asbestos-Containing Material (RACM).** Includes friable ACM, Category I non-friable ACM that has become friable, Category I non-friable ACM that has been sanded, ground, cut, etc., and Category II non-friable ACM that has a high probability of becoming crumbled, pulverized, or reduced to powder during demolition or renovation, per 40 CFR 61, Subpart M.
- **Removal.** Stripping, chipping, sanding, sawing, drilling, scraping, sucking, and other methods of separating material from its installed location in a building.
- **Renovation.** Altering a facility or its components in any way, including stripping or removal of RACM, per 40 CFR 61, Subpart M.

8.1.2 Key Concepts

- **Demolition Notification.** North Carolina law requires notification for all demolition, regardless of whether asbestos is present, 10 working days prior to starting demolition.
- **Disposal.** ACM waste can be accepted at the MCB Camp Lejeune Sanitary Landfill. Work with the ROICC or Contract Representative to coordinate the disposal through the MCB Camp Lejeune Sanitary Landfill. Asbestos waste is only accepted on Mondays through Thursdays from 0700 to 1000.
- **Removal Requirements.** Permits for asbestos removal or demolition must be obtained when the ACM present exceeds 260 linear feet, 160 square feet, or 35 cubic feet. Additionally, proper work practice procedures must be followed during demolition or renovation operations.
- **Renovation Notification.** If ACM is present within a structure, North Carolina law requires notification of renovation 10 working days prior to starting renovation.

8.1.3 Environmental Management System

Contractor practices associated with asbestos management include the following:

- Building operation/maintenance/repair
- Construction/demolition/renovation
- Equipment operation/maintenance/disposal
- HW transportation
- Parts replacement

The potential impacts of these activities on the environment include soil contamination and degradation of water quality, air quality, and the potential exposure of installation occupants.

8.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding ACM, which include but may not be limited to:

- **Asbestos General Standard, 29 CFR 1910.1001 – Asbestos.** Applies to all occupational exposures to asbestos in all industries covered by OSHA.
- **Asbestos Hazard and Emergency Response Act (AHERA), 1986.** AHERA was written primarily to provide officials in schools, grades K-12, with rules and guidance for the management of ACM.
- **Asbestos School Hazard Abatement Reauthorization Act (ASHARA), 1992.** This act extended AHERA regulations to cover public and commercial buildings.
- **National Emission Standards for Hazardous Air Pollutants (NESHAP), Subpart A, General Provisions, and 40 CFR 61 – Subpart M – National Emission Standard for Asbestos.** Includes standards for asbestos demolition and renovation, disposal, and administrative requirements.
- **Naval Facilities Engineering Service Center, Facilities Management Guide for Asbestos and Lead.** Summarizes asbestos and lead requirements that routinely affect facilities operations, to protect workers, building occupants, and the environment.
- **Naval Facilities Guide Specifications and Engineering Control of Asbestos Materials.** Covers the requirements for safety procedures and requirements for the demolition, removal, encapsulation, enclosure, repair, and disposal of ACM.
- **North Carolina Asbestos Hazard Management Program, NC General Statutes, Chapter 130A, Article 19; 10A NCAC 41C.0601–.0608 and .0611.** Incorporates 40 CFR 763 and 29 CFR

1926.1101 by reference and outlines criteria for asbestos exposures in public areas, accreditation of persons conducting asbestos management activities, and asbestos permitting and fee requirements.

- **Safety and Health Regulations for Construction, Asbestos, 29 CFR 1926.1101.** Regulates asbestos in construction, demolition, alteration, repair, maintenance, or renovation of structures that contain asbestos.

8.3 Responsibilities Before a Demolition or Renovation Project

Prior to starting a demolition or renovation project, contractors must:

- Determine whether ACM, PACM, and/or RACM are present in the buildings involved in the project.
- Complete the necessary notifications to the State of North Carolina and obtain any necessary permits for the removal of ACM, PACM, and/or RACM.
- Understand what actions to take if ACM, PACM, and/or RACM are unexpectedly encountered during project execution.
- Remove all non-friable and friable ACM in accordance with all Federal, State, and local regulations, prior to demolition activities.
- Know how to properly dispose of ACM and provide any waste disposal manifests generated for disposal.

8.3.1 Identification of ACM and PACM

Contract documents will identify the presence of known ACM, PACM, and RACM. Contact the ROICC or Contract Representative with questions regarding the presence of these materials as identified in the contract documents. An inspection conducted by a North Carolina Health Hazards Control Unit (HHCU) licensed asbestos inspector may be necessary to confirm the location and quantities of any ACM, PACM, and/or RACM and determine if any previously unidentified materials are present.

8.3.2 Notification

To maintain accurate files and records, the ROICC or Contract Representative is required to notify the Asbestos Program Manager, who is part of I&E, of all work involving asbestos removals, including glove bag projects.

The North Carolina Department of Health and Human Services (DHHS) Form 3768, *Asbestos Permit Application and Notification for Demolition and Renovation*, must be submitted to the North Carolina HHCU 10 working days in advance of demolition activities, regardless of whether asbestos is present.

This form must be posted onsite during the entire duration of the project. Have the ROICC or Contract Representative contact the Asbestos Program Manager with questions or concerns about requirements for notification of demolition or renovation.

8.3.3 Removal

Any ACM, PACM, and/or RACM present must be removed before the area is disturbed during renovation or demolition activities (except in certain rare instances). Certification and handling requirements for asbestos removal are provided in 10A NCAC 41C and the Asbestos NESHAP. Refer to these regulations for detailed requirements.

8.3.4 Training

North Carolina regulations require that all persons who perform asbestos management activities in the State of North Carolina must be accredited by the North Carolina HHCU under the appropriate accreditation category (i.e., Building Inspector, Project Supervisor, and/or Abatement Worker). Training documentation should be available upon request.

8.4 Responsibilities During a Demolition or Renovation Project

North Carolina regulations require that DHHS Form 3768, *Asbestos Permit Application and Notification for Demolition and Renovation*, be acquired by the contractor and posted onsite during all permitted projects. Contractors must post this form when the project will remove the following: 260 linear feet, 160 square feet, or 35 cubic feet of RACM or asbestos that might become regulated as a result of handling. The form must also be posted for nonscheduled asbestos removal that will exceed these numbers in a calendar year.

During a renovation or demolition project, if the contractor suspects the presence of additional ACM (other than the materials identified in contract documents), the contractor must immediately report the suspected area to the ROICC or Contract Representative. Before proceeding, the facility must be inspected by an asbestos inspector licensed by the North Carolina HHCU. The individual performing the asbestos survey will coordinate with the ROICC or Contract Representative throughout the process. A legible copy of the building inspection report must be provided to the North Carolina HHCU prior to each demolition and upon request for renovations; a building inspection report will be acceptable only if the inspection was performed during the 3 years prior to the demolition. A copy of the report should also be forwarded to the Asbestos Program Manager.

For specific work procedures and requirements for glove bag projects, refer to 29 CFR 1926.1101.

8.5 Disposal of ACM Waste

Contractors can dispose of ACM waste at the MCB Camp Lejeune Sanitary Landfill after first coordinating with the MCB Camp Lejeune Landfill office through the ROICC or Contract Representative. The contractor must provide the MCB Camp Lejeune Landfill with Form DHHS 3787, *North Carolina Health Hazards Control Unit's Asbestos Waste Shipment Record*. The contractor must submit this form to the North Carolina HHCU for all permitted asbestos removal projects.

9.0 Lead-Based Paint

Lead was used in paint for its color and water-resistant properties until it was banned in 1978 for its highly toxic properties that may cause a range of health problems especially in young children. Improper removal of lead-based paint (LBP) may result in paint chips and dust, which may contaminate a structure inside and out. The North Carolina DHHS regulations require any person who performs an inspection, risk assessment, or abatement to be certified. North Carolina DHHS also requires a person to obtain a permit for conducting an abatement of a child-occupied facility or target housing. If you have any additional questions, please call Base Safety at (910) 450-5930.

9.1 Key Definitions and Concepts

The following key definitions and concepts are associated with LBP activities. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate Environmental Department or Safety Representative if additional clarification is necessary.

9.1.1 Key Definitions

- **Abatement.** The permanent removal or elimination of all LBP hazards.
- **Demolition.** The removal of any load-bearing walls or structure.
- **Inspection.** A surface-by-surface investigation to determine the presence of LBP, and a report explaining the results of the investigation.
- **Lead-Based Paint.** Surface coatings that contain lead in amounts equal to or in excess of 1.0 milligram per square centimeter, as measured by X-ray fluorescence (XRF) or laboratory analysis, or more than 0.5 percent by weight, per 40 CFR 745.
- **Lead-Containing Paint.** Surface coatings that contain lead in any amount greater than the laboratory reporting limit but less than 1.0 milligram per square centimeter, or less than 0.5 percent by weight, per 29 CFR 1926.62 and 29 CFR 1910.1025; also contained in 40 CFR 745 Subpart L and adopted by the State of North Carolina under North Carolina General Statute Chapter 130A, Article 19A.
- **Renovation.** Alteration of a facility or its components in any way.
- **Target Housing.** Any housing constructed before 1978, with the exception of housing for the elderly and persons with disabilities (unless a child under the age of six lives there) and residential dwellings where the living areas are not separated from the sleeping areas (efficiencies, studio apartments, dormitories, etc.).

9.1.2 Key Concepts

- **Disposal.** Analysis is required to determine proper disposal of waste (non-hazardous or hazardous). A TCLP analysis must be conducted to determine whether lead levels have exceeded 5 parts per million (ppm), which is the RCRA threshold for HW determination.
- **LBP Survey.** An LBP survey is required prior to disturbing painted surfaces to determine whether the paint meets the criteria of lead containing over 1.0 milligram per square centimeter or over 0.5 percent by weight.
- **Training.** LBP training requirements set forth by the OSHA must be followed by all personnel involved in all LBP removal activities. MCB Camp Lejeune Base Safety tracks this training for contract staff, as the Safety Office houses the Lead Program Manager.

9.1.3 Environmental Management System

Contractor practices associated with LBP include the following:

- Construction/demolition/renovation
- HW transportation
- Paint removal

The potential impacts of these activities on the environment include the potential degradation of soil, water, and air environments, and the potential exposure of installation occupants.

9.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable Federal, State, and local regulations and requirements regarding LBP activities, which include but may not be limited to:

- **Naval Facilities Engineering Service Center, Facilities Management Guide for Asbestos and Lead.** Summarizes asbestos and lead requirements that routinely impact facilities operations in order to protect workers, building occupants, and the environment.
- **Lead-Based Paint Hazard Management Program, NC General Statutes, Chapter 130A, Article 19A. Section 130A-453.01 through 453.11.** Requires a person who performs an inspection, risk assessment, abatement, or abatement design work in a child-occupied facility (daycares, pre-schools, etc.) or housing built before 1978 to be certified and establishes the requirements for certification, including the oversight of required training. It also requires a person who conducts an abatement of a child-occupied facility or target housing to obtain a permit for the abatement; establishes work practice standards for LBP abatement activities; and has adopted requirements included in 40 CFR Part 745, Subpart L and 40 CFR Part 745, Subpart D.
- **Lead-Based Paint Hazard Management Program for Renovation, Repair, and Painting (RRP), 10A NCAC 41C.0900.** Common renovation activities may create hazardous lead dust and chips by disturbing LBP, which may be harmful to adults and children. This article requires that dust sampling technicians, firms, and individuals performing renovation, repair, and painting projects for compensation that disturb LBP in housing and child-occupied facilities built before 1978 be certified and follow specific work practices to prevent lead contamination. Child-occupied facilities include, but are not limited to, childcare facilities and schools (with children under the age of 6) that were built before 1978.
- **10A NCAC 41C.0800, Lead-Based Paint Hazard Management Program.** Requires (1) all individuals and firms involved in LBP activities to be certified and (2) all LBP activities to be carried out in accordance with 40 CFR 745.
- **29 CFR 1926, Safety and Health Regulations for Construction.** Contains the OSHA requirements for construction activities where workers may come into contact with lead.
- **40 CFR Part 745, Lead-Based Paint Poisoning Prevention in Certain Residential Structures.** Ensures that (1) LBP abatement professionals, including workers, supervisors, inspectors, risk assessors, and project designers, are well trained in conducting LBP activities; and (2) inspections for the identification of LBP, risk assessments for the evaluation of LBP hazards, and abatements for the permanent elimination of LBP hazards are conducted safely, effectively, and reliably by requiring certification of professionals.

9.3 Responsibilities Before Renovation or Demolition

Ordinary renovation and maintenance activities may create dust that contains lead, but following lead-safe work practices may help mitigate or prevent lead hazards. The North RRP Program (10A NCAC 41C.0900) mandates that contractors, property managers, and others working for compensation in homes and child-occupied facilities built before 1978 be trained in and use lead-safe work practices, as Building constructed prior to 1978 are assumed to contain LBP. In addition, it mandates that contractors provide the owner and occupants with *The Lead-Safe Certified Guide to Renovate Right* information pamphlet, which are found at the following website:

http://epi.publichealth.nc.gov/lead/pdf/RenovateRight.pdf

Individuals must be certified by the State of North Carolina to perform RRP activities for compensation in housing and child-occupied facilities built before 1978. A firm engaged in regulated renovation activities (such as RRP that disturbs more than 6 square feet of interior painted surfaces or 20 square feet of exterior painted surfaces, or dust sampling after renovation) must be a certified renovation firm.

To address the hazards associated with the improper abatement or removal of LBP, any person who performs an inspection, risk assessment, abatement, or abatement design work in a child-occupied facility (child development centers, preschools, etc.) or housing built before 1978 must be certified by the State of North Carolina. Any person who conducts an abatement of a child-occupied facility or target housing must also obtain a permit for the abatement. Individuals conducting LBP abatement activities in North Carolina, such as inspections, risk assessments, LBP hazards abatement, clearance testing, or abatement project design in housing and child-occupied facilities built before 1978, must be certified by the State of North Carolina. A firm engaged in abatement activities must be a certified lead abatement firm.

Prior to any renovation or demolition aboard the installation that involves the disturbance of painted surfaces, an LBP survey must be completed by a North Carolina certified inspector, retained through the ROICC or Public Works Division (PWD). Certain projects will use PWD staff to conduct the sampling, and other projects will use contracted personnel. Buildings constructed prior to 1978 are assumed to contain LBP; therefore, no LBP survey is necessary. The LBP survey (through sampling and analysis) will determine whether painted surfaces meet the criteria of LBP (lead content equal to or greater than 1.0 milligram per square centimeter as measured by XRF or lab analysis, or 0.5 percent by weight). Naval Facilities Guide Specifications and contract documents must be implemented for contracts where LBP is to be abated/removed prior to demolition or renovation.

If the area is to be reoccupied, final clearance must be conducted, including a visual inspection and sample collection, prior to reoccupation. Clearance on all projects involving abatement must be done by a certified risk assessor or a certified LBP inspector. Clearance for RRP projects may be conducted by a certified risk assessor, certified LBP inspector, or certified dust sampling technician.

9.4 Permits

Contractors must obtain a North Carolina LBP Abatement Permit from North Carolina DHHS when lead paint is removed from targeted housing (child-occupied facilities or housing built prior to 1978).

9.5 Disposal

If the LBP survey determines that LBP will be abated as part of a renovation or demolition project, the contractor must take analytical samples to determine whether the waste material is hazardous. Usually, a TCLP sample is collected from a “representative” sample of the material removed. The laboratory

conducting the sample analysis must be accredited by the Environmental Lead Laboratory Accreditation Program (ELLAP). A list of these accredited labs is available by contacting (703) 849-8888 or visiting:

http://apps.aiha.org/qms_aiha/public/pages/reports/publicScopeView.aspx?ProgramCode=37&Version=2.

If the LBP is removed from the underlying building material, then the paint is the waste stream. If the LBP is removed with the building material, then both materials are considered the waste stream.

If the lead content is below HW regulatory disposal levels, consult the ROICC or Contract Representative to determine whether if the contract allows for the disposal of the material in the MCB Camp Lejeune Sanitary Landfill. Lead waste is only accepted on Mondays through Thursdays from 0700 to 1000.

If the abated LBP is above HW regulatory levels, refer to Section 7.0 of this guide for information on HW management and disposal requirements.

9.6 Training

Before the project begins, workers who are subject to lead exposure during abatement or removal activities must be trained according to the OSHA regulations in 29 CFR 1926.62 concerning lead exposure in construction, and they must receive all training and certification specified by 10A NCAC 41C.0800 and 10A NCAC 41C.0900. The contractor is responsible for providing this training certification before initiating any work aboard MCB Camp Lejeune.

10.0 Natural Resources

The installation has stewardship and recovery responsibilities over the natural resources on the installation. These responsibilities are regulated under numerous laws described in this section. The installation ensures compliance with these laws through an interdisciplinary process of review and coordination of all activities occurring on the installation.

Contractors working on the installation are responsible for complying with conditions and measures imposed on their work as a result of this process; these responsibilities include preserving the natural resources associated with the work site, restoring work sites to an equivalent or improved condition after the work is complete, and confining construction activities to the limits of the work area indicated or specified. The contractor is advised that the installation is subject to strict compliance with Federal, State, and local laws and regulations.

10.1 Key Definitions and Concepts

The following key definitions and concepts are associated with natural resources management. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the Environmental Conservation Branch (ECON).

10.1.1 Key Definitions

- **Conservation.** The planned management, use, and protection of natural resources to provide their sustained use and continued benefit to present and future generations.
- **Ecosystem.** A dynamic, natural complex of living organisms interacting with each other and with their associated nonliving environment.
- **Habitat.** An area where a plant or animal species lives, grows, and reproduces, and the environment that satisfies its life requirements.
- **Natural Resource.** The naturally occurring assets that provide use benefits through the provision of raw materials and energy used in economic activity and that are subject primarily to depletion through human use. They are subdivided into four categories: mineral and energy resources, soil resources, water resources and biological resources. Endangered or Threatened Species. Federally listed taxon that is “in danger of extinction throughout all or a significant portion of its range” or “likely to become endangered within the foreseeable future throughout all or a significant portion of its range.”
- **Riparian Buffer.** Vegetated area bordering a body of water, such as a stream, lake, or pond.
- **Timber.** A type of forest product used to create lumber, veneer, engineered wood products, poles, pilings, paper products, biofuel, etc.
- **Waters of the United States.** All waters that are currently used, were used in the past, or may be susceptible to use in interstate or foreign commerce; including tidal waters, tributaries, ponds, lakes, and impoundments of jurisdictional waters; and adjacent wetlands; as defined in 33 USC 1251 et seq. Section 328.3. Waters of the United States associated with MCB Camp Lejeune include rivers, streams, sounds, waterways, ponds, and wetlands.
- **Wetland.** Areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs and similar areas, per the EPA.
- **Streams.** A body of concentrated flowing water in a natural low area or natural channel on the land surface as defined in 15A NCAC 02B .0233(2).

10.1.2 Key Concepts

- **Ecosystem Management.** A goal-driven approach to managing natural and cultural resources that considers the environment as a complex system functioning as a whole, not as a collection of parts, and recognizes that people and their social and economic needs are a part of the whole.
- **Environmental Planning.** The process of incorporating environmental protection into overall project planning. All projects that involve Federal funding are required to engage in environmental planning and document the process according to NEPA 1969 (see section 10.2).
- **Forest Management.** The art and science of managing forests and associated resources for human and environmental benefits.

10.1.3 Environmental Management System

Contractor practices associated with natural resources include the following:

- Erosion/runoff control
- Habitat management
- Land clearing
- Building and parking lot construction
- Dock and ramp construction
- Live fire range operations
- Range construction
- Road construction and maintenance
- Soil excavation/grading
- Soil/debris/waste stockpiling and laydown yards
- Soil excavation/grading
- Timber management

The potential impacts of these activities on the environment include harmful air emissions, sedimentation, water pollution, degradation of habitat, damage to timber, and impacts to wildlife and protected species.

10.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding natural resources, which include but may not be limited to:

- **Bald and Golden Eagle Protection Act of 1940, as Amended (16 USC 688 *et seq.*).** Prohibits taking, possessing, and transporting bald eagles and golden eagles and importing and exporting their parts, nests, or eggs. The definition of “take” includes pursue, shoot, shoot at, poison, wound, capture, trap, collect, molest, or disturb.
- **BO 5090.11A, Protected Species Program.** Sets forth regulations and establishes responsibilities to ensure the conservation of threatened and endangered species and species at risk aboard MCB Camp Lejeune.
- **BO 5090.12, Environmental Impact Review Procedures.** Implements NEPA 1969 and NEPA policy and guidance in Chapter 12 of MCO P5090.2A.
- **Clean Water Act of 1972.** The CWA establishes the basic structure for regulating discharges of pollutants into the waters of the United States and regulating quality standards for surface waters. Section 404 of the CWA regulates the placement of dredged or fill material into wetlands, lakes, streams, rivers, estuaries and certain other types of waters. The goal of Section 404 is to avoid and minimize losses to wetlands and other waters and to compensate for unavoidable loss through mitigation and restoration. Section 401 of the CWA provides states and authorized tribes

with an important tool to help protect the water quality of federally regulated waters within their borders, in collaboration with federal agencies.

- **Coastal Zone Management Act of 1972 (CZMA) (16 USC 1451 *et seq.*).** Requires that Federal actions affecting any land/water use or coastal zone natural resource be implemented consistent with the enforceable policies of an approved State coastal management program. Requires concurrence from the State before taking an action affecting the use of land, water, or natural resources of the coastal zone.
- **Endangered Species Act of 1973 (16 USC 1531 *et seq.*).** Requires federal agencies, in consultation with the U.S. Fish and Wildlife Service (FWS) and/or the NOAA Fisheries Service, to ensure that actions they authorize, fund, or carry out are not likely to jeopardize the continued existence of any listed species or result in the destruction or adverse modification of designated critical habitat of such species. The law also prohibits any action that causes a “taking” of any federally listed species.
- **EO 11990, Protection of Wetlands, 24 May 1977**. Addresses Federal agency actions required to identify and protect wetlands, minimize the risk of wetlands destruction or modification, and preserve and enhance the natural and beneficial values of wetlands.
- **EO 13186, Responsibilities of Federal Agencies to Protect Migratory Birds, 10 January 2001.** Requires each Federal agency taking actions that have, or are likely to have, a measurable negative effect on migratory bird populations to develop and implement a plan to promote the conservation of migratory bird populations.
- **Marine Mammal Protection Act of 1972 (MMPA), as Amended (16 USC 1361 *et seq.*).** Mandates a moratorium on the killing, capturing, harming, and importing of marine mammals and marine mammal products. The MMPA also prohibits the taking of any marine mammal, including to harass, hunt, capture, collect, or kill any marine mammal, including any of the following: collection of dead animals or their parts, restraint or detention of a marine mammal, tagging a marine mammal, the negligent or intentional operation of an aircraft or vessel, or any other negligent or intentional act that results in disturbing or molesting a marine mammal.
- **Migratory Bird Treaty Act of 1918, as Amended (16 USC 703 *et seq.*).** Protects migratory birds (listed in 50 CFR 10.13) and their nests and eggs and establishes a permitting process for the taking of migratory birds by establishing a Federal prohibition to “pursue, hunt, take, capture, kill, attempt to take, capture or kill, possess, offer for sale, sell, offer to purchase, purchase, deliver for shipment, ship, cause to be shipped, deliver for transportation, transport, cause to be transported, carry, or cause to be carried by any means whatever, receive for shipment, transportation or carriage, or export, at any time, or in any manner, any migratory bird or any part, nest, or egg of any such bird.”
- **MCO P5090.2, Environmental Compliance and Protection Manual.** Provides guidance and instruction to installations to ensure the protection, conservation, and management of watersheds, wetlands, natural landscapes, soils, forests, fish and wildlife, and other natural resources as vital USMC assets.
- **National Environmental Policy Act of 1969 (42 USC 4321 *et seq.*).** Requires Federal agencies, including the USMC, to consider the environmental impacts of projects prior to implementation. All projects that support military training, minor and major military construction, maintenance, and natural resources management actions are reviewed for potential environmental impacts. Contractors must obtain and review any NEPA documentation associated with their projects. All NEPA documentation can be obtained from the ROICC or Contract Representative.

- **Rivers and Harbors Act of 1899.** Prohibits the excavation, filling, or alteration of the course, condition, or capacity of any port, harbor, or channel without prior approval from the Chief of Engineers.
- **Sikes Act of 1960, as Amended (16 USC 670 *et seq.*).** Requires military installations to manage natural resources for multipurpose uses and public access appropriate for those uses, as well as ensuring no net loss to training, testing or other defined missions of the installation through the development and implementation of an INRMP.
- **Neuse River Basin Riparian Buffer Rules (15A NCAC 02B.0233).** Require a 50-foot riparian buffer that is divided into two zones. The 30 feet closest to the water (Zone 1) must remain undisturbed. The outer 20 feet (Zone 2) may include managed vegetation, such as lawns or shrubbery. The riparian buffer rules also require diffuse flow of stormwater runoff. The buffers apply to intermittent streams, perennial streams, lakes, ponds, estuaries, and modified natural streams that are depicted on the most recent printed version of the soil survey map prepared by the Natural Resources Conservation Service or the 1:24,000 scale quadrangle topographic map prepared by the U.S. Geologic Survey.
- **Wetland Buffer.** MCB Camp Lejeune requires a 50-foot buffer around all wetlands and streams. Any ground disturbing activity within the buffer area will require coordination with the base EMD.
- **North Carolina Wetland Standards (15A NCAC 02B .0231).** A set of Standards set in Rule by the NC Division of Water Resources. The water quality standards for all wetlands are designed to protect, preserve, restore, and enhance the quality and uses of wetlands and other waters of the State influenced by wetlands.

10.3 National Environmental Policy Act

Staff specialists from various installation departments participate in the NEPA process, which coordinates the review of projects and documents any potential environmental impacts for projects to incorporate into the design process. Any expansion or relocation of the site or a design change that would impact resources not previously reviewed, may require the project to go back through the NEPA review process.

The documentation of this review process occasionally includes mandatory conditions affecting the design and construction/ implementation of the project. The documentation, when completed, is provided to the action proponent, who is expected to provide it to the ROICC or Contract Representative.

Consult the ROICC or Contract Representative to obtain and review any NEPA documentation associated with the project. The documentation marks the end of the NEPA review process; it does not constitute approval for the proponent of the action to implement the action. This documentation is most often a Decision Memorandum (DM) but is sometimes an Environmental Assessment (EA) or Environmental Impact Statement. Some contracts may include stipulations from the NEPA document that must be implemented prior to the onset of work to prevent environmental impacts and violations of Federal or State rules and regulations. Stipulations could include replacing monitoring wells if damages occur from contractor operations, stopping work if contamination is encountered, notification that a wetlands permit is required, seasonal restrictions, etc.

10.4 Timber

Contractors must ensure that the ROICC or Contract Representative notify the EMD's Forest Management Program prior to conducting site work. Potential timber resources are identified during the NEPA process. The contractor is responsible for advising the ROICC or Contract Representative to notify EMD's Forest Management Program at (910) 451-9384 prior to beginning site work. Additionally, the ROICC or Contract Representative and/or contractor is required to notify the Forest Management

Program if the contract has been amended with modifications to the site location. Timber will not be released to contractors without the approval of the Forest Management Program.

MCB Camp Lejeune manages its forest in accordance with the installation INRMP. The Forest Management Program maintains first right of refusal for all timber products on construction projects and will determine whether the Government will harvest the timber or release it to the contractor. The Government retains exclusive rights to all forest products on construction projects. If the Government elects to harvest the timber, only merchantable timber will be removed.

Contractors must adhere to the following requirements when performing site work that may impact timber resources:

- Do not remove, cut, deface, injure, or destroy trees or shrubs without authorization from the ROICC or Contract Representative.
- Do not fasten or attach ropes, cables, or guy wires to nearby trees for anchorages without authorization from the ROICC or Contract Representative. (If these actions are authorized, the contractor is responsible for any resultant damage.)
- Protect existing trees that are to remain in place and that may be injured, bruised, defaced, or otherwise damaged by construction operations.
- With the ROICC or Contract Representative's approval, use approved methods of excavation to remove trees with 30 percent or more of their root systems destroyed.
- With the ROICC or Contract Representative's approval, remove trees and other landscape features scarred or damaged by equipment operations, and replace with equivalent, undamaged trees and landscape features.

Please refer to Section 12.0 for disposal information for land-clearing debris.

10.5 Wildlife and Protected Species

The contractor must not disturb wildlife (birds, nesting birds, mammals, reptiles, amphibians, and fish) or the native habitat adjacent to the project area except when indicated or specified. Water flows may not be altered; the native habitat adjacent to the project and critical to the survival of fish and wildlife may not be significantly disturbed, except as indicated or specified.

Specific requirements regarding protected areas on the installation apply to contractor activities. Nine federally threatened and endangered species are currently managed at MCB Camp Lejeune – red-cockaded woodpecker, green sea turtle, loggerhead sea turtle, rough-leaved loosestrife, seabeach amaranth, piping plover, red knot, eastern black rail, and American alligator. Consult the ROICC or Contract Representative to determine if there are any project requirements regarding any threatened or endangered species.

With the exception of improved roadways, entry into a threatened or endangered species site or shorebird nesting area marked with signs and/or white paint is prohibited without written permission from installation personnel. BO 5090.11 lists threatened and endangered species that may be encountered at the installation. The following restrictions apply on the installation unless written permission is explicitly provided:

- Work on Onslow Beach or Brown's Island is not permitted between April 1 and October 31. Traffic on the beaches should be limited to below the high tide line.
- Vehicles and lighting are prohibited on the beaches overnight between May 1 and October 31.

- Construction activities are prohibited within 1,500 feet of a bald eagle's nest (JD, MC, and IF Training area).
- Cutting or damaging pine trees is not permitted.
- Altering hydrology through excavation, ditching, etc., is prohibited.
- Wildlife must not be disturbed, captured, or fed (including snakes and alligators). For assistance with a situation involving wildlife, please call (910) 451-5226 or email CLJN_LWRS@usmc.mil.

10.6 Wetlands and Streams

Wetlands and streams are protected per the CWA as waters of the United States. These areas are important for water quality, as habitat, for flood storage, and to prevent erosion. Wetlands are areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs and similar areas, per the EPA.

The base contains both freshwater and saltwater or coastal wetlands.

Coastal wetlands are specifically defined as any marsh subject to regular or occasional flooding by wind or lunar tides and also contains one or more of 10 specific plant species. They generally are located adjacent to sounds and estuaries. They are characterized by marsh grasses and rarely contain trees. Coastal wetlands are regulated by the NC Division of Coastal Management (NCDCM) in addition to the U.S. Army Corps of Engineers (USACE) and NC Division of Water Resources (NCDWR) that regulate streams and freshwater wetlands.

A stream is a body of concentrated flowing water in a natural low area or natural channel on the land surface. There are three stream types: ephemeral, intermittent, and perennial.

Ephemeral streams are features that only carry stormwater in direct response to precipitation. They may have a well-defined channel and they typically lack the biological, hydrological, and physical characteristics commonly associated with intermittent or continuous conveyances of water. These features are typically not regulated by NCDWR or USACE.

Intermittent streams have a well-defined channel that contains water for only part of the year (typically during winter and spring). The flow may be heavily supplemented by stormwater. When dry, they typically lack the biological and hydrological characteristics commonly associated with continuous conveyances of water. These features are regulated by NCDWR and typically regulated by USACE.

Perennial streams have a well-defined channel that contains water year-round during a year with normal rainfall. Groundwater is the primary source of water, but they also carry stormwater. They exhibit the typical biological, hydrological, and physical characteristics commonly associated with the continuous conveyance of water. These features are regulated by NCDWR and typically regulated by USACE.

10.6.1 Impacts

Impacts to wetlands and streams includes activities that result in adding or removing soil/construction materials, ditching and/or draining, grading, impounding, piping, addition of pollutants, and permanent conversion of vegetation type. Any disturbance to the soil or substrate (bottom material) of a wetland or water body, including a stream bed or protected buffer, is an impact and may adversely affect the soils, vegetation, and hydrology of an area.

In accordance with MCO P5090.2, all facilities and operational actions must avoid, to the maximum degree feasible, wetlands destruction or degradation, regardless of the wetland size or legal necessity for a permit. Any identified and mapped boundaries of the legally defined wetlands on all USMC lands within the project area will be distributed to the ROICC or Contract Representative for use and included in all design products, including drawings, plans, and figures.

In order to prevent impacts, there is a 50-foot buffer around all streams and wetlands on Camp Lejeune in which unauthorized ground disturbance is not allowed. Safety fencing shall be installed around wetlands, streams and the buffer in project areas where they are not to be impacted, to prevent any accidental impacts to the wetland features. This safety fence also serves as a visual cue to the construction workers/contractors to stay out of these areas.

Prior to the onset of construction, coordination with the ECON of EMD should have taken place during project design to ensure CWA permitting issues are addressed by the contractor at the earliest opportunity. Contractors must incorporate avoidance and minimization measures to the maximum extent practicable to protect wetlands, streams, and waters of the United States. Any proposed action that would significantly affect wetlands or streams must be coordinated with the CG of MCB Camp Lejeune. Contractors must incorporate avoidance and minimization measures to comply with the national policy to permit no overall net loss wetlands.

All unavoidable potential impacts to wetlands or streams require prior coordination as described in this section. Failure to acquire written authorization for impacts to wetlands and/or waters of the United States may result in significant project delays or design modifications. Impacts within a project are cumulative, meaning that if there is an increase in impacts, permits may no longer be valid and result in additional NEPA and permitting requirements. Contact the ROICC or Contract Representative if you have concerns there will be about additional impacts.

10.6.2 Permitting

No discharge of fill material, mechanized land clearing, or any other activity is allowed in jurisdictional wetlands or streams without the proper approvals. If work in wetlands is required, know who is responsible for obtaining permits and what the terms and conditions of permits require. The contractor may be responsible for obtaining the following permits (including pre-permit coordination, preparation, and submission of all permit applications and appropriate drawings after review and concurrence by the installation) and complying with all regulations and requirements stipulated by USACE and the State of North Carolina as conditions upon issuance of the permits:

- USACE, Section 404 Permit (individual or applicable nationwide permit); CWA of 1977, as Amended (Public Law 95-217, 33 U. S. C. 1251 et seq.)
- NCDWR, Section 401 Water Quality Certification – (15A NCAC 02H) NCDEQ; CWA of 1977, as Amended (Public Law 95-217, 33 U. S. C. 1251 et seq.)
- NCDWR, Discharges to Federally Non-jurisdictional Wetlands and Federally Non-jurisdiction Classified Waters (15A NCAC 02H). 1400 State issued Individual Certification Temporarily adopted Effective May 28, 2019
- NCDWR, Isolated Wetland and Isolated Waters Rules (15A NCAC 02H.1300) Effective 5/28/21
- NCDCM, Federal Consistency Determination (15A NCAC 07) NCDEQ; CZMA of 1972 (16 USC 1451 et seq.)

Two types of activities generally require a permit from the USACE:

- **Activities within navigable waters.** Activities such as dredging, constructing docks and bulkheads, and placing navigation aids require review under Section 10 of the Rivers and Harbors Act of 1899 to ensure that they will not cause an obstruction to navigation.
- **Activities in wetlands and waters of the United States (regulated by Section 404 of the CWA of 1972).** A major aspect of the regulatory program under Section 404 of the CWA is determining which areas qualify for protection as wetlands. Contractors should contact the USACE, the NCDWR, or the NCDCM if there is any question about whether activities could impact wetlands, streams, or protected buffers.

Contractors working on the installation shall not perform ANY work in waters or wetlands of the United States or State without an approved permit (even if the work is temporary). Examples of temporary discharges include dewatering of dredged material prior to final disposal and temporary fills for access roadways, cofferdams, storage, laydown yards, spoil/waste piles and work areas. Areas to be cleared of vegetation also need to be approved by the USACE and NCDWR.

It is the responsibility of the contractor constructing the project to:

1. Keep a copy of all USACE and NCDWR permits at the job site. It is the project contractor's responsibility to review and follow the conditions of these permits and permit plans.
2. Review and comply the stream and wetlands conditions of these permits and permit plans. Any questions or concerns relating to the issued permits and their implementation, the ROICC or Contract Representative should call the Environmental Planning office at (910) 451-6287.
3. Review the permit drawings for constructability and report concerns to your ROICC or Contract Representative. Any construction drawing that has a USACE or NCDWR permit for the project will reference the permit plans in the construction drawings. This is necessary to maintain compliance with the permit conditions. If your construction drawings do not show locations of all streams, wetlands, and AECs within 50 feet of the project boundary, please request this information from your ROICC or contract representative.
4. Compare construction drawings with the permit drawings to make sure the construction drawings are consistent with the permit drawings and report their findings to the Environmental Planning Office at (910) 451-6287 and ROICC or Contract Representative.
5. Protect the 50-foot stream and wetland buffer from impacts. This can be done with the installation of a safety fence along the buffer boundary to provide a visible reminder to avoid these areas.
6. Report any violation in wetlands/streams, outside the permitted areas to the base Environmental Planning office at (910) 451-6287, the Compliance Branch of ECB at (910) 450-5806, and the ROICC or Contract Representative.
7. Report any turbidity found in streams to the Compliance Branch of ECB at (910) 450-5806, the Environmental Planning Office at (910) 451-6287, and ROICC or Contract Representative. It is also the responsibility of the project contractor to locate the source of the turbidity and eliminate/repair the issue.
8. Solely be responsible for any non-compliance issues with the USACE or NCDWR issued permits. The project construction contractor will be required to restore and mitigate for the wetland/stream non-compliance issues to the satisfaction of the Regulatory Agencies.

10.7 Temporary Construction

Traces of temporary construction facilities, such as haul roads, work areas, structures, foundations of temporary structures, stockpiles of excess or waste materials, and other signs of construction, should be

removed upon completion of a contract or project. Temporary roads, parking areas, and similar temporarily used areas should be graded to conform to surrounding contours and the area restored, to the degree practical, to its state prior to any disturbing activities. The use of fabric to be placed on original ground prior to the construction of temporary roads, stockpiles, waste and other temporary features is encouraged as it makes the restoration of these areas easier and more cost effective.

11.0 Stormwater

MCIEAST – MCB CAMLEJ PWD is responsible for stormwater permits associated with construction, industrial, or municipal activities that discharge to outfalls leading to receiving waters. The most applicable permit for contractors is the construction permit since the majority of the contractor activities are affiliated with construction/renovation. However, the contractor is also responsible for adhering to the requirements of the industrial and municipal permits held by MCIEAST – MCB CAMLEJ for all of the contractor activities on the installation. All contractors are responsible for the implementation of the necessary stormwater control measures (SCM) to prevent stormwater pollution runoff from land disturbing activities (and associated construction permit requirements) as well as industrial and municipal activities. The general requirements for each area, as they apply to contractors, are discussed in the following subsections.

11.1 Key Definitions and Concepts

The following key definitions and concepts are associated with stormwater. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

11.1.1 Key Definitions

- **Stormwater Control Measures.** Schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the United States. BMPs include structural and nonstructural stormwater controls, operation and maintenance procedures, treatment requirements, and practices to control site runoff (e.g., sediment, spillage or leaks, sludge or waste disposal, or drainage from material storage). Website: https://www.epa.gov/npdes/national-menu-best-management-practices-bmps-stormwater
- **NCG01.** The permit which provides the approval for development activities that meet the requirements for coverage under a stormwater general permit.
- **Discharge (Pollutant).** The addition of any pollutant or combination of pollutants to waters of the United States from any point source, including, but not limited to, any spilling, leaking, pumping, pouring, emitting, emptying, or dumping of any pollutant; this excludes discharges in compliance with a National Pollution Discharge Elimination System (NPDES) permit.
- **Erosion and Sedimentation Control Plan.** Any plan, amended plan, or revision to an approved plan submitted to the North Carolina Division of Land Resources or its delegated authority in accordance with North Carolina General Statute 113A-57. Erosion and Sedimentation Control Plans show the devices and practices that are required to retain sediment generated by the land-disturbing activity within the boundaries of the tract during construction and upon development of the tract. *Note that in North Carolina, the Erosion and Sedimentation Control Plan and the NCG010000 Construction General Permit are considered the Stormwater Pollution Prevention Plan (SWPPP) for a construction site. Website:* https://deq.nc.gov/about/divisions/energy-mineral-and-land-resources/erosion-and-sediment-control
- **Land Disturbance.** Areas that are subject to clearing, excavating, grading, stockpiling, and placement/removal of earth material.
- **Nonpoint Source Discharge.** All discharges from stormwater runoff that isn't attributed to a discernible, confined, and discrete conveyance. (*See also point source discharge definition below.*)
- **Point Source Discharge.** Any discernible, confined, and discrete conveyance, including but specifically not limited to, any pipe, ditch, channel, tunnel conduit, well, discrete fissure, container,

rolling stock, or concentrated animal feeding operation from which pollutants are or may be discharged to waters of the State.

- **Stormwater (Runoff).** The portion of precipitation (rain and/or snowmelt) that does not naturally infiltrate into the ground or evaporate but flows via overland flows, channels, or pipes into a defined surface water channel or stormwater system during and immediately following a storm event. As the runoff flows over the land or impervious surfaces (such as streets, parking lots, and building rooftops), it accumulates sediment and/or other pollutants that could pollute receiving streams.
- **Stormwater Associated with Construction Activities.** The discharge of stormwater from construction activities, including clearing, grading, and excavating, that result in a land disturbance of equal to or greater than 1 acre, per 40 CFR 122.
- **Stormwater Associated with Industrial Activities.** The discharge from any conveyance that is used for collecting and conveying stormwater and which is directly related to manufacturing, processing, or raw materials storage areas from an applicable industrial plant or activity, per 40 CFR 122.
- **Stormwater Associated with Municipal Activities.** The discharge of stormwater from municipal activities, including public works shops, vehicle maintenance shops and other municipal activities with the potential to cause stormwater pollution.

11.1.2 Key Concepts

- **Energy Independence and Security Act (EISA).** In December 2007, Section 438 of EISA was issued. This section requires that Federal facility projects over 5,000 square feet must “maintain or restore, to the maximum extent technically feasible, the predevelopment hydrology of the property with regard to temperature, rate, volume, and duration of flow.” In January 2010, the DoD Policy of Implementing Section 438 of the EISA was issued; this document includes a flowchart with implementation steps.
- **Good Housekeeping.** Good housekeeping practices refer to the maintenance of a clean and orderly facility to prevent potential pollution sources from coming into contact with stormwater. Good housekeeping requires maintaining all areas that may contribute pollutants to stormwater discharges by ensuring that they stay in a clean, orderly state. Practices pay particular attention to areas where raw materials are stockpiled, material handling areas, liquid storage areas, and loading/unloading areas. Good housekeeping is one of the six minimum control measures (MCM) of the Municipal Separate Storm Sewer Systems (MS4) permit requirements.
- **Low Impact Development (LID).** LID is a holistic approach that incorporates site-specific ecosystem and watershed-based considerations for planning and design. The goal of LID is to mimic a site’s predevelopment hydrology by using design techniques that infiltrate, filter, store, evaporate, and detain runoff close to the source. LID seeks to control non-point source pollutants “nature’s way” through the application of plant-soil-water mechanisms that maintain and protect the ecological and biological integrity of receiving waters and wetlands.
- **National Pollution Discharge Elimination System.** The national program for issuing, modifying, revoking, reissuing, terminating, monitoring, and enforcing permits. The NPDES stormwater program regulates stormwater discharges from three potential stormwater sources, as follows:
- **Construction Activities.** Land disturbing activities which disturb one or more acres need an NPDES permit. At a minimum, these permits require the development of a site-specific Erosion and Sedimentation Control Plan to address sediment controls during construction and upon development of the tract. As previously noted, the Erosion and Sedimentation Control Plan and

the NCG010000 Construction General Permit are considered the Stormwater Pollution Prevention Plan (SWPPP) for a construction site in North Carolina. In the applicable areas of the installation, a State Stormwater Management Permit and coverage under the Construction General Permit may be required. Construction site erosion and sediment runoff control is also one of the six MCMs of the MS4 permit requirements.

  - **Industrial Activities.** Owners and operators of industrial facilities that fall into any of the 30 industrial sectors identified by EPA stormwater regulations need an NPDES Phase II permit if stormwater is discharged directly into surface water (or MS4). The permit regulations specify steps that facility operators must take prior to becoming eligible for permit coverage and actions that must be taken to continue coverage under an existing permit. These steps and actions include, but are not limited to, effluent limits, monitoring, inspection, sampling, reporting, and corrective action requirements.
  - **Municipal Separate Storm Sewer Systems.** Owners and operators of MS4s need an NPDES Phase II permit. An MS4 is a system of pipes and drainage ditches within an urbanized area used to collect storm runoff and convey it to receiving waters. Polluted runoff is commonly transported through MS4s, from which it is often discharged untreated into local waterbodies.

- **Operational Requirements.** Equipment, discharge, and material use requirements that apply to all construction and industrial activities.
- **Post-Construction Requirements.** The management of stormwater generated on a stable, established site after the construction process is complete. The Stormwater Management Plan (SWMP) sets forth requirements for post-construction stormwater program elements. Post-Construction is one of the six MCMs of the MS4 permit requirements.
- **Stormwater Pollution Prevention Plan.** A plan required by permits provided under NPDES that provides guidance to prevent stormwater pollution from construction, industrial, or municipal activities.

11.1.3 Environmental Management System

Contractor practices associated with stormwater include the following:

- Boat, ramp, dock cleaning
- Channel dredging
- Composting
- Construction/demolition/renovation
- Erosion/runoff control
- Fueling and fuel management/storage
- HM storage
- Land clearing
- Laundry
- Landscaping
- Livestock operations
- Pesticide/herbicide management and application
- Range residue clearance
- Road construction and maintenance
- Sewers
- Sidewalk and road deicing
- Soil excavation/grading

- Stormwater collection/conveyance
- Surface washing
- Vehicle parking
- Wash rack

Other activities that contractors could be involved in that may cause stormwater pollution include:

- Grounds maintenance (herbicide, pesticides, fertilizer, etc.)
- Outdoor material storage
- Building/roof repairs
- Industrial activities

11.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding potential stormwater contamination, which include but may not be limited to:

- **Clean Water Act of 1972.** Establishes the basic structure for regulating discharges of pollutants into the waters of the United States. The CWA establishes that no oil or hazardous substances should be discharged into or upon the navigable waters of the United States or adjoining shorelines, which may affect natural resources under the management of the United States through the following goals: (1) eliminate the introduction of pollutants into waters of the United States, and (2) develop water quality, which protects and propagates fish, shellfish, and wildlife and provides for recreation in and on the water.
- **40 CFR 122, National Pollutant Discharge Elimination System.** Requires industrial, construction, and municipal stormwater permits for the discharge of pollutants from any point source into waters of the United States.
- **15A NCAC Chapter 4.** Requires all persons conducting a land-disturbing activity to take all reasonable measures to protect all public and private property from damage caused by the release of sediments from the activity. The primary tool used to accomplish the objective is the development of an Erosion and Sedimentation Control Plan.
  - Identify critical areas
  - Limit exposure areas
  - Limit time of exposure
  - Control surface water
  - Control sedimentation
  - Manage stormwater runoff
- **15A NCAC 02H.1000 Stormwater Management.** The State Stormwater Management Program requires all persons conducting land-disturbing activities that (1) require a Coastal Area Management Act (CAMA) Major Development Permit or an Erosion and Sedimentation Control Plan, and (2) are located within coastal counties or drain to specific classifications of water bodies, to protect surface waters and highly productive aquatic resources from the adverse impacts of uncontrolled high-density development or the potential failure of stormwater control measures. To receive permit approval, projects must limit the density of development, reduce the use of conventional collection systems in favor of vegetative systems, and incorporate post-construction, structural SCMs.

11.3 Prior to Site Work

Contractors are responsible for preparing project-specific permit applications and related plans and coordinating the permit review schedule with the ROICC or Contract Representative. Contractors are required to address the following in the below section prior to beginning site work.

11.3.1 Construction Notifications

Any project involving land-disturbing activities aboard the installation must be reviewed by the installation's NEPA Review Board prior to the onset of work so that potential impacts of the project and associated mitigation measures (if necessary) can be determined. Documentation of this review should have been provided to the ROICC or Contract Representative and may include mandatory conditions affecting the construction/implementation of the project. Consult the ROICC or Contract Representative to obtain or review any NEPA documentation associated with the project in the contract.

11.3.2 Familiarity with the NPDES Municipal Separate Storm Sewer System (MS4)

Discharges of industrial stormwater have the potential to contain contaminants from industrial activity. Because of this, MCB Camp Lejeune holds a Stormwater Phase II industrial permit. This type of discharge is defined and regulated in 40 CFR 122, the EPA final rule regarding NPDES stormwater permitting.

Daily industrial operations discharging stormwater aboard MCB Camp Lejeune and MCAS New River are covered under an individual NPDES permit. In accordance with the permit, the installation maintains an industrial SWPPP that identifies potential sources of pollution that may affect the water quality of stormwater discharges associated with an industrial activity. Refer to the end of this section for more information on contractor responsibilities associated with this permit.

11.3.3 Project-Specific Construction Permits

Contractors are responsible for preparing all project-specific stormwater permit applications and related plans and for coordinating the permit review schedule with the ROICC or Contract Representative. MCIEAST - MCB CAMLEJ PWD is the responsible party for all project-specific stormwater permits located outside of Public-Private Venture (PPV) housing. All permit-required plans and applications must be submitted to the appropriate MCIEAST - MCB CAMLEJ organization to go through internal approval prior to submission to the appropriate State agency. The permit review schedule should allow adequate time for internal review prior to State submission deadlines. Adequate review time fluctuates and is based on the type of permit application. Stormwater compliance should be coordinated with the appropriate PPV partner for housing-related projects outside the jurisdiction of MCIEAST - MCB CAMLEJ.

Permit coverage is required under the North Carolina General Permit No. NCG010000 (General Permit) for construction activities that disturb one acre or more of land. Two copies of a proposed Erosion and Sedimentation Control Plan must be prepared and submitted to the NC DEQ Sedimentation Control Commission (or to an approved local program) at least 30 days prior to beginning construction activity to obtain coverage under the General Permit. After receiving Erosion and Sedimentation Control Plan approval, an electronic Notice of Intent form must be submitted to receive a Certificate of Coverage under the permit. No land-disturbing activities may take place prior to receiving a Certificate of Coverage. A copy of the Erosion and Sedimentation Control plan, NCG010000 permit, and the Certificate of Coverage will be kept on file at the job site at all times while the site is active. The approved plan is considered a requirement or condition of the General Permit; deviation from the approved plan will constitute a violation of the terms and conditions of the permit unless prior approval for the deviations has been obtained.

11.4 Responsibilities During Site Work

The contractor is responsible for maintaining the quality of the stormwater runoff and preventing pollution of stormwater at the construction/job site. The job site may be inspected by installation environmental personnel to ensure compliance with the contractor's construction and/or the installation's industrial SWPPP, municipal stormwater plan and applicable permits. The following requirements apply to all projects occurring at the installation that have the potential to impact water quality:

- Any changes to the project area that do not comply with the approved Erosion and Sedimentation Control Plan, alter the approved post-construction stormwater conveyance system, or could otherwise significantly change the nature or increase the quantity of pollutants discharged should be immediately communicated to the ROICC or Contract Representative.
- All permitted erosion and sedimentation control projects will be inspected by the contractor at least once every 7 calendar days (unless discharges to a 303(d)-listed water body are occurring) and within 24 hours after any storm event greater than 0.5 inch of rain per 24-hour period, as required by the North Carolina General Permit No. NCG010000 (General Permit). Inspection results shall be maintained by the designated contractor throughout the duration of the active construction project.
- Equipment used during the project activities must be operated and maintained in such a manner as to prevent the potential or actual pollution of the surface or ground waters of the State.
- POL products (e.g., fuels, lubricants, hydraulic fluids), coolants (e.g., antifreeze), or any other substance shall not be discharged onto the ground, into surface waters, or down storm drains (to include leaking vehicles, heavy equipment, pumps and/or structurally deficient containers of hazardous materials).
- Spent fluids shall be disposed of in a manner so as not to enter surface or ground waters of the State, or storm drains. Disposal of spent fluids is outlined in Section 7.0.
- Implement spill prevention measures, clean up all spills immediately, and follow spill reporting requirements presented in Section 5.0. Any spilled fluids shall be cleaned up to the extent practicable and disposed of in a manner so as not to allow their entry into the water (surface or ground) of the State. Refer to Section 5.0 for emergency and spill response procedures.
- Herbicide, pesticide, and fertilizer use shall be consistent with the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA) and shall be used in accordance with label restrictions. Refer to Section 7.0 for additional information on Hazardous Material/Hazardous Waste Management.
- Particular care must be used when storing materials outside. Materials and equipment stored outside that could potentially affect the quality of stormwater runoff include, but are not limited to, garbage dumpsters, vehicles, miscellaneous metals, chemical storage, fuels storage, wood products, and empty storage drums. These materials should be stored under cover whenever practicable. Contact the ROICC or Contract Representative with any questions about whether an outdoor storage practice is acceptable.
- Use good housekeeping practices to maintain clean and orderly work areas, paying particular attention to those areas that may contribute pollutants to stormwater.
- For industrial activities, refer to the link below for more information on SCMs to prevent stormwater pollution. EPA Industrial Fact Sheet Series for Activities Covered by EPA's multi-sector general stormwater permit: https://www.epa.gov/npdes/stormwater-discharges-industrial-activities-fact-sheets-and-guidance#factsheet.

12.0 Solid Waste, Recycling, and Pollution Prevention (P2)

The installation has a proactive P2 and recycling program. Contractors should minimize the amount of solid waste requiring disposal in a landfill. This section addresses solid waste, including both municipal solid waste (MSW) and C&D waste. HM and HW are discussed in Section 7.0 of this guide. Contractors are required to comply with all Federal, State, and local laws and regulations for proper disposal and recycling of all solid wastes.

12.1 Key Definitions and Concepts

The following key definitions and concepts are associated with solid waste, recycling, and pollution prevention. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

12.1.1 Key Definitions

- **Construction and Demolition Debris.** Inert materials generated during the construction, renovation, and demolition of buildings, roads, and bridges. C&D waste often contains bulky, heavy materials such as concrete, lumber (from buildings), asphalt (from roads and roofing shingles), gypsum (the main component of drywall), and glass (from windows).
- **Green Procurement (GP).** The purchase of products and services that are environmentally preferable, when compared with competing products that serve the same purpose, in accordance with federally mandated “green” procurement preference programs. GP is intended to have a lesser or reduced negative effect on human health and the environment, and to permit fulfilling the social, economic, and other requirements of present and future generations.
- **Pollution Prevention.** Reducing the amount of pollution entering waste streams or otherwise released to the environment through source reduction and process efficiencies.
- **Recycling.** Activities that may include collection, separation, and processing, by which products or other materials are recovered from the solid waste stream for use as raw materials in the manufacturing of new products. Recycling also includes using, reusing, or reclaiming materials, as well as processes that regenerate a material or recover a usable product from it.
- **Municipal Solid Waste.** Any solid materials discarded, including garbage, construction debris, commercial refuse, non-hazardous materials, non-recyclable wood, or other non-recyclable material per BO 11350.2D, Refuse Disposal Procedures.

12.1.2 Key Concepts

- **Pollution Prevention/Green Procurement.** Installation contractors are strongly encouraged to use P2 and GP practices.
- **Qualified Recycling Program (QRP).** An organized operation that diverts or recovers scrap or waste streams and that identifies, segregates, and maintains the integrity of the recyclable materials in order to maintain or enhance the marketability of the materials.
- **Recycling.** Recycling is required on the installation. The MCB Camp Lejeune Landfill (Base Landfill) Recycling Center accepts specified recyclables according to the schedule in Table 12-1. Call (910) 451-4214 prior to a bulk turn-in.
- **Solid Waste.** Solid waste is disposed of in accordance with contract specifications (off the installation or at the Base Landfill). Data related to disposal off the installation (to include C&D waste) must be provided to the ROICC or Contract Representative on a monthly basis.

- **Source Reduction.** Any practice that reduces the amount of any HM, pollutant, or contaminant entering any waste stream or released into the environment prior to recycling, treatment, and disposal that potentially reduce the hazard to public health and the environment. Source reduction may include equipment or technology modification; process or procedure modification; reformulation or redesign of products; substitution of raw materials; and improvements in housekeeping, maintenance, training, or inventory control.

12.1.3 Environmental Management System

Contractor practices associated with solid waste, recycling, and P2 include the following:

- Battery management
- Building operation/maintenance/repair
- Composting
- Construction/demolition/renovation
- Equipment operation/maintenance/disposal
- Grease traps
- HW disposal offsite transport
- Land clearing
- Livestock operations
- Metal working
- Packaging/unpackaging
- Paint removal
- Painting
- Parts replacement
- Polishing
- Range residue clearance
- Recreational facilities operation
- Road construction maintenance
- Rock crushing operations
- Solid waste collection/transportation
- Storage tank management
- Urban wildlife management
- Vehicle maintenance

The potential impacts of these activities on the environment include soil degradation, surface water quality degradation, depletion of landfill space, and depletion of nonrenewable resources.

12.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding solid waste disposal, recycling, and P2, which include but may not be limited to:

- **BO 5090.17, Solid Waste Reduction – Qualified Recycling Program.** Provides guidance for solid waste reduction, P2, and management of recyclable materials.
- **BO 11350.2D, Refuse Disposal Procedures.** Establishes procedures for the separation, collection, and disposal of refuse and the disposal of waste wood products.
- **DoD Instruction 4715.4, Pollution Prevention.** Establishes the DoD requirement for installation QRPs, calls for GP.

- **EO 14057, Catalyzing Clean Energy Industries and Jobs Through Federal Sustainability.** Leading the Nation on a firm path to net-zero emissions by 2050 and achieving the policy set forth in section 101 of this order will require bold action to transform Federal procurement and operations and secure a transition to clean, zero-emission technologies.
- **Pollution Prevention Act (PPA) of 1990 (42 USC 13101 et seq.).** Establishes the national policy that "pollution should be prevented or reduced at the source whenever feasible," and establishes the following hierarchy: source reduction, recycling, treatment, and disposal.
- **Resource Conservation and Recovery Act of 1976.** Governs the disposal of solid waste and establishes Federal waste disposal standards and requirements for State and regional authorities. The objectives of Subtitle D are to assist in developing and encouraging methods for the disposal of solid waste that are environmentally sound and that maximize the utilization of valuable resources recoverable from solid waste.
- **Solid Waste Disposal Act (SWDA) of 1965.** Requires Federal facilities to comply with all Federal, State, interstate, and local requirements concerning the disposal and management of solid wastes, including permitting, licensing, and reporting requirements. The SWDA encourages the reuse of waste through recycling and requires the procurement of products that contain recycled materials.

12.3 Solid Waste Requirements

Contractors shall follow all Federal, State, and local requirements regarding the collection, storage, and disposal of solid waste. Contact the ROICC or Contract Representative for additional information regarding solid waste requirements.

At a minimum, the following actions are required for all contractors:

1. Prior to performing work that will or may generate solid waste at the installation, all contractors must provide their ROICC or Contract Representative with a copy of their Solid Waste Disposal Permit unless the use of the Base Landfill is authorized for disposal. If the Base Landfill is authorized, the contractor must contact the Base Landfill Operations Clerk to ensure the contract is registered in the Landfill Tracking System. Recycling should be coordinated with the ROICC or Contract Representative and the Landfill Manager.
2. Provide the weight of ALL waste, both MSW and C&D that is either disposed of or recycled to the ROICC or Contract Representative, with a copy to the Landfill Manager. This requirement does not apply if the landfill/recycling facility picks up or accepts materials directly from the contractor. If contractors transport waste offsite for disposal, it is mandatory that they track the material weight and provide that information to their ROICC or Contract Representative for input into the annual Pollution Prevention Annual Data Summary.

In addition, contractors producing solid waste on the installation are required to take these steps:

- Pick up solid waste, separate it according to material type, and place it in covered containers of the correct type that are regularly emptied for recycling or landfilling.
- Verify that the solid waste contains no HM or HW.
- Prevent contamination of the site and the surrounding areas when handling and disposing of waste.
- Leave the project site clean upon completion of a project.

12.3.1 MCB Camp Lejeune Landfill Acceptable Waste Streams

To dispose of waste at the Base Landfill, contractors must be authorized with a valid construction pass and placard representing the related contract. Contractors must also contact the Landfill Operator prior to unloading refuse. Contact the ROICC or Contract Representative with any questions regarding use of the landfill or to coordinate disposal.

The Base Landfill accepts certain types of solid waste under the conditions specified in Table 12- 1. Base Landfill hours of operation are 0730 to 1530, Monday through Friday, but ACM waste must be delivered between 0700 and 1000, Monday through Thursday. Each material must be separated into different loads. Please utilize the base website for any changes. (https://www.lejeune.marines.mil/Disposal)

Figure 12-1: Base Landfill Requirements

No Personal Property/Off-Base Trash Accepted	
Landfill Operating Hours	
0700-1500 Monday-Thursday 0700-1400 Friday	
Wood Products	
The following products may be mixed together and delivered to the landfill: • Scrap lumber (unpainted) • Embark boxes (broken down) • Pallets (broken/untreated)	The following products must be separated and delivered to the landfill: • Trees (cut to 10 feet or less and free of soil) • Leaves and scrubs • Serviceable pallets
Lead Based Painted Wood Products	
• Delivered before 1400 Monday – Thursday • Not accepted on Friday	• Cut in less than 8-foot lengths • Wrapped in 6-millimeter plastic bags/sealed
Asbestos (all types)	
• Appointment needed (451-5011/2946) • Delivered by 1000 (Mon – Thurs.) • Not accepted on Friday	• Double wrapped in 6-millimeter plastic bags • Sealed with duct tape • Labeled and manifested prior to delivery
Organic Products	
• Leaves, pine straw, grass, and shrub clippings • No bags or containers allowed	• No twigs or limbs over 2 inches in diameter • Less than 6-foot lengths
Concrete	
• Delivered separately from other items • Wire and rebar must be cut off flush with exposed surfaces	• Concrete and culverts (no longer than 3ft x 3ft) • Bricks and blocks • Mortar products
Soil	
Non-contaminated soil accepted	
Recyclable Products **(Must be separated and dropped off at a designated recycling drop-off point or at a Recycling Center)**	
• Wood pallets (delivered separately) • White paper (mixed flat or shredded) • Newspaper • Military publications (binders removed) • Scrap fired brass shells (.50 cal and below, MDAS required)	• Plastic and glass (containers or bottles) • Toner cartridges • Cardboard (delivered separately if in bulk) • Vinyl siding (delivered separately, in less than 6-foot lengths) • Scrap Metal (iron, steel, aluminum, copper, copper wire) • Appliances (Refrigerators must be purged of refrigerant by EMI and accompanied with paperwork) • Concertina/Barbed Wire (only accepted if cut into 3 foot sections or less)

Other Related Information	
Asphalt may be accepted in small quantities, as needed, at the discretion of the Landfill Manager (large quantities of asphalt must be taken off the installation).	
All furniture must be accompanied by DD Form 1348 classification of rejected by Base Property Office.	
All other Base or USMC property must be accompanied by a DD Form 1348 downgraded to scrap by DLADS. Call (910) 451-4214 for more information.	
Scrap materials related to Ordinance or Ammunition, including containers, tubes, and packing, must also be accompanied by Material Documented As Safe (MDAS) certifications, and copies of the certifier and verifier's appointment letters.	
Phone Numbers: • Landfill Manager 451-4998 • Recycling Coordinator 451-4214 • Recycling Manager 451-2037 • Landfill Fax 451-9935	• Landfill Clerk 451-2946 • EMD 451-5837 • EOD 451-0558
Unacceptable Items	
• Hazardous Waste • Liquid Waste • Paint and Paint Cans • Electronics • Computer Equipment • Batteries (Can be turned in at Bldg. 901) • Oyster Shells	• Contaminated Soil • Tires • 55-Gallon Drums • Oil Filters • Petroleum Containers • Regulated Medical Waste • PCBs or PCB containers • Demilitarized Waste • Construction and Demolition Debris (unless specified in the contract)

12.4 Recycling Requirements

The installation's QRP is managed by the EMD in collaboration with the Public Works Division. Reducing solid waste saves money and helps protect the environment by conserving natural resources. Additionally, USMC facilities are mandated to recycle, and the installation must meet solid waste diversion goals specified in EO 14057, Catalyzing Clean Energy Industries and Jobs Through Federal Sustainability.

12.4.1 Recycling Center

The MCB Camp Lejeune Recycling Center, Building 982, is co-located with the Base Landfill on Piney Green Road. Normal working hours are Monday through Friday, 0730–1530. All materials should be brought to the Recycling Center. Have the ROICC or Contract Representative contact the Recycling Center at (910) 451-4214 for additional details. See Table 12-1 for acceptable types and categories of materials.

The following types and categories of materials are accepted for recycling but must be delivered to the Recycling Center on Piney Green Road:

- Scrap metal
- Steel (high temperature, corrosion resistant)
- Brass (includes spent/fired munitions)
- Copper and copper wire
- Aluminum (plate, sheet, scrap) and aluminum cans

Special arrangements may be made for other materials (C&D waste) or larger volumes of commonly recycled materials from events such as C&D. Regulations set forth in BO 11350.2D must be followed.

12.4.2 Other Recyclables

- **Asphalt Pavement.** Asphalt must be removed and delivered to an asphalt recycling facility. Contractors must provide a record of the total tons of asphalt recycled and the corporate name and location of the recycling facility to their ROICC or Contract Representative, with a copy to the Landfill Manager.
- **Empty Metal Paint Cans.** Take empty metal paint cans to Building S-962 for recycling. Turn in all HM cans or HM containers that are generated from MCB Camp Lejeune or MEF contracts to Building S-962 on Michael Road on the scheduled contractor turn-in day. Have the ROICC or Contract Representative contact EMD for more information. Any waste generated from this process must be managed appropriately.
- **Other Metals.** Take other metals to the Defense Logistics Agency Disposition Services (DLADS). Follow the guidelines of BO 5090.17 and utilize: https://www.lejeune.marines.mil/Disposal
- **Red Rag Recycling.** Contractors should seek a red rag program to supply and launder shop rags. This service supplies clean rags and picks them up after use. The rags are laundered offsite and returned.
- **Universal Waste.** See Section 7.0 of this guide for management procedures.
- **Unused Hazardous Materials.** Turn in these materials to the RCRS, Building 977 on Michael Road. Have the ROICC or Contract Representative contact the Free Issue Point at (910) 451-1482.
- **White Rag Recycling.** White rags are used in painting (these have no dye and thus do not interfere with these types of operations) and may be laundered offsite in a program analogous to the red rags service.

12.5 Pollution Prevention and Green Procurement

MCB Camp Lejeune is subject to GP requirements. GP implements environmentally protective principles in the procurement arena and includes preferential use of the following:

- Recovered materials products
- Biobased products
- Water- and energy-efficient products
- Alternatives to ozone-depleting substances
- Non-toxic and less-toxic products
- Electronics that meet Electronic Product Environmental Assessment Tool (EPEAT) standards
- Products that do not contain toxic chemicals, hazardous substances, and other pollutants targeted for reduction and elimination by the DoD
- Alternative fuel use/increased fuel efficiency
- Environmentally preferable purchasing practices

Contractors are encouraged to employ GP practices whenever feasible.

13.0 Potential Discovery of Undocumented Contaminated Sites

MCB Camp Lejeune was placed on the EPA National Priorities List (NPL), effective November 4, 1989. To ensure the protection of human health and the environment, a proactive Installation Restoration Program (IRP) has been established and is in the process of assessing and remediating various sites on the installation. Numerous investigations have been performed to ensure that all of the installation's contaminated sites have been found, but additional contaminated areas may still exist. It is the contractor's responsibility to notify the ROICC or Contract Representative of any unforeseen site conditions while on the installation. It is recommended that any contractors performing intrusive activities on the installation be properly trained in accordance with the Occupational Safety and Health Act (OSHA) standards in 29 CFR 1910.120(e). If intrusive activities are planned in known contaminated areas, all required environmental training should be completed prior to working at MCB Camp Lejeune. Copies of training records should be available upon request by Federal or State regulators.

13.1 Key Definitions and Concepts

The following key definitions and concepts are associated with unforeseen site conditions. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

13.1.1 Key Definitions

- **Free Product.** A discharged HM/HW, POL, or environmental pollutant that is present in the environment as a floating or sinking non-aqueous phase liquid (NAPL) that exists in its free state (i.e., exceeds the solubility limit of liquids or saturation limit of soil/solids).
- **National Priorities List.** List of sites of national priority among the known releases or threatened releases of hazardous substances, pollutants, or contaminants.
- **Petroleum, Oil, and Lubricants.** A broad term that includes all petroleum and associated products or oil of any kind or in any form, including, but not limited to, petroleum, fuel oil, vegetable oil, animal oil, sludge, oil refuse, and oil mixed with wastes.
- **Unforeseen Site Condition.** A potentially hazardous or unanticipated site condition encountered on a job site.
- **Munitions and Explosives of Concern.** Military munitions that may pose explosives safety risks, including MEC, UXO, DMM, and munitions constituents present in a high enough concentration to present an explosives hazard.

13.1.2 Key Concepts

- **Notification.** Contractors must notify the ROICC or Contract Representative, in writing, of any unforeseen site conditions prior to disturbing them.
- **Response.** Contractors must stop working and evacuate work areas if unforeseen site contaminants, HM, or MEC/DMM/UXO are suspected to be present.

13.1.3 Environmental Management System

Unforeseen site conditions are potentially applicable to all EMS practices conducted aboard MCB Camp Lejeune.

13.2 Overview of Requirements

Contractors operating aboard the installation must be aware of and adhere to all applicable regulations and requirements regarding unforeseen site conditions, which include but may not be limited to:

- **CERCLA of 1980 and Superfund Amendments & Reauthorization Act (SARA) of 1986.** Establishes the Nation's HW site cleanup program.
- **Occupational Safety and Health Standards, 29 CFR 1910.** Federal standards that govern occupational health and safety to ensure the protection of employees from recognized hazards, such as exposure to toxic chemicals, excessive noise levels, mechanical dangers, heat or cold stress, or unsanitary conditions. The standards include provisions for many facets of employee safety and health, including, but not limited to: employee training, personal protective equipment, HM communication, medical surveillance, and emergency planning.

13.3 Unforeseen Site Condition Procedures

Contractors must promptly, before the conditions are disturbed, give a written notice to the ROICC or Contract Representative of any (1) subsurface or latent physical conditions at the site that differ materially from those indicated in the contract, or (2) any unknown physical conditions at the site, of an unusual nature, that differ materially from those ordinarily encountered.

The ROICC or Contract Representative will investigate the site conditions promptly after receiving the notice.

The most common unforeseen conditions at MCB Camp Lejeune typically relate to POL contamination and MEC/DMM/UXO. Procedures for these scenarios are provided in the following sections.

13.3.1 Petroleum, Oil, and Lubricants

The condition most frequently encountered that requires EMD assistance is the presence of a POL odor while excavating. If there is an odor or encounter any free product during any construction or excavation activities, take the following actions:

- Stop work.
- Immediately clear the area of all personnel to a safe distance upwind of the suspected area.
- Call the Fire and Emergency Services Division (911) immediately if personnel are affected or injured by the suspected contaminant.
- Call the Fire and Emergency Services Division to properly secure the area.
- Notify the ROICC or Contract Representative so that the EMD Spill Response Team will be contacted to determine the appropriate course of action.

Please note that if contaminated soil is removed during excavation activities, the soil will have to be characterized prior to disposition. While it is staged and awaiting characterization sampling results, contaminated soil is to be placed within a bermed area on an impervious surface or barrier and securely covered with plastic or appropriate material. Sample results and characterization will determine the ultimate disposition of the soil. In accordance with installation policy, contaminated soils are not permitted to be reintroduced into excavations.

13.3.2 Munitions and Ordnance

MCB Camp Lejeune has been in operation as a military training installation since the early 1940s. As such, munitions or an ordnance item may be encountered during site excavation or construction activities. MEC, DMM, or UXO at MCB Camp Lejeune and its outlying areas typically include flares, mines, grenades, rockets, artillery projectiles, bulk explosives, fuses, or blasting caps. These items may vary in condition from very good/easily recognizable to unrecognizable, fragmented, or corroded scrap metal. MEC, DMM, or UXO may be encountered on the ground surface, partially buried, or completely buried.

Contractors operating aboard the installation should follow the “3R” concept if a possible munitions or ordnance item is discovered: **“Recognize, Retreat, and Report.”**

- Recognize. Contractors with the potential to encounter any possible MEC, DMM, or UXO should have a basic knowledge of these items. The item does not have to be specifically recognized or identified, but it is important for personnel to recognize the potential hazard.
- Retreat. If a suspected MEC, DMM, or UXO item is encountered, leave the immediate area and DO NOT DISTURB the item. If possible, note the general size and shape of the item, any markings, and the location.
- Report. Report all occurrences to the appropriate authority, including any observations (e.g., size, shape, markings, and location).

If a project unearths any potential MEC/DMM/UXO, recognize the potential hazard. Stop work immediately, and have all personnel clear the immediate area. Report the situation and any observations to the ROICC or Contract Representative, who will then report the item to Range Control and EOD. The following link is to a 6-minute “UXO Safety” awareness training video that provides additional guidance.

http://www.lejeune.marines.mil/OfficesStaff/ExplosivesSafety/ %20trainingandguides.aspx

For other emergency response procedures, please refer to Section 5.0 of this guide.

14.0 Permitting

Contractors operating aboard the installation must ensure that all relevant environmental permits are obtained before work commences onsite. Contractors must work with their ROICC or Contract Representative to determine permitting responsibilities prior to beginning work. Contractors must adhere to all permit conditions. Examples of environmentally related permits are provided in Section 14.3.

14.1 Key Definitions and Concepts

The following key definitions and concepts are associated with contractor permitting requirements. Please consult the ROICC or Contract Representative with any questions or concerns about the information in this section, who will contact the appropriate environmental office if additional clarification is necessary.

14.1.1 Key Definitions

- **Major Source.** Any source that emits or has the potential to emit 100 tons per year or more of any criteria air pollutant in accordance with Title V of the CAA.
- **Permit.** A legally enforceable document required by statutory regulation for potential sources of pollution that is required for operations that may have an environmental impact. Permits may be administered at the Federal, State, or local level.
- **Target Housing.** Any housing constructed before 1978, with the exception of housing for the elderly and persons with disabilities (unless a child under the age of 6 lives or is expected to live there) and residential dwellings where the living areas are not separated from the sleeping areas (efficiencies, studio apartments, dormitories, etc.).

14.1.2 Key Concepts

- **Permits.** Prior to beginning work aboard the installation, consult applicable permit requirements and ensure that they are met before work begins. Copies of all applicable permits/authorizations should be retained onsite for the life of the project. Additional information on North Carolina permits is found at the following web page:

  http://portal.ncdenr.org/web/deao/ea/pa

Consult the ROICC or Contract Representative for additional information concerning the contract's permit requirements. The contractor is responsible for ensuring that all required permits are acquired prior to any work aboard MCB Camp Lejeune.

14.1.3 Environmental Management System

Currently, no practices are associated with permitting under the EMS.

14.2 Overview of Requirements

Please refer to the individual sections of this guide for applicable permitting regulations and requirements for each environmental media. Many permits have specific timetables for submittal prior to project initiation. Contractors must consult the permit requirements and ensure that all pertaining permits are obtained in the required timeframe.

14.3 Project Permits and Approvals

Prior to work being awarded, the installation-associated action proponent should have had an environmental review by EMD's NEPA Section to comply with NEPA 1969. The outcome of this review would be in the form of a Decision Memorandum or an Environmental Assessment. Contractors must

refer to their contract and the requirements outlined in the NEPA documentation for specific permitting requirements. EMD Program Managers are available for guidance; however, if the contractor is tasked with preparing permit applications, the contractor is expected to have the capability and expertise required to complete the submittals in accordance with the guidance provided by the regulatory agency that issues the permit. In addition, EMD must be provided with copies of all permits submitted to the NCDEQ. In some cases, EMD must submit the permit application. Please direct questions to the ROICC or Contract Representative.

Some permits that may be required are discussed in applicable sections of this guide. The following list of permits is not meant to be all-inclusive; please be aware that other permits may also be required. The NCDEQ website (https://deq.nc.gov/) is a useful reference for determining required permits and obtaining necessary forms. In addition, any inspection and/or data collection required by the permits must be retained onsite for review upon request.

14.3.1 Stormwater (Section 11.0)

- **NPDES Stormwater Discharge Permit for Construction Activities (also referred to as General Permit No. NCG010000).** Required for all land-disturbing activities (LDA) that exceed 1 acre; also requires an accompanying Erosion and Sedimentation Control Plan.
- **General Permit SWG050000.** Required for residential development activities within the 20 coastal counties (including Onslow County) located within 1/2 mile and draining to class SA waters that disturb less than 1 acre if adding more than 10,000 sf of built upon area that will result in a built upon area greater than 12 percent.
- **High-Density Stormwater Permit.** Required when (1) the LDA exceeds 1 acre and impervious surfaces are greater than or equal to 25 percent of the total project area adjacent to non-SA waters (waters classified as SA are tidal salt waters that are used for commercial shellfishing or marketing purposes) or greater than or equal to 12 percent of the total project area adjacent to SA water; or (2) total development exceeds 10,000 square feet of impervious surface.
- **Low-Density Stormwater Permit.** Required when the LDA exceeds 1 acre and impervious surfaces are less than 25 percent when adjacent to non-SA waters or less than 12 percent when adjacent to SA waters.

14.3.2 Asbestos (Section 9.0)

- **Asbestos Permit Application and Notification for Demolition/Renovation.** DHHS Form 3768, available at the following website (under Forms & Applications):

http://www.epi.state.nc.us/epi/asbestos/ahmp.html

14.3.3 Lead-Based Paint (Section 9.0)

North Carolina Lead-Based Paint Abatement Permit Application. Any person or firm conducting an abatement of a child-occupied facility or target housing is required to obtain a Lead Hazard Management Plan Permit. The application is available at the following website:

http://epi.publichealth.nc.gov/lead/pdf/LeadAbatePermit08-07.pdf

14.3.4 Air Quality (Section 4.0)

- Construction Permits. Construction permits are required for all new stationary sources and all existing stationary sources that are added to or are modified with new equipment that may emit

air pollutants. Permits may be required for the construction or modification of the following types of emission sources:
  - Boilers
  - Generators
  - Engine test stands
  - Surface coating/painting operations
  - Refrigerant recovery and recycling operations for other ozone-depleting substances (ODSs), such as industrial chillers, refrigerators, air conditioning compressors, or cleaning agents.
  - Chemical or mechanical paint removal, abrasive blasting, grinding, or other surface preparation activities
  - Fuel storage and fuel dispensing
  - Woodworking shops
  - Welding shops
  - Bulk chemical or flammables storage
  - Open burning
  - Fire training
  - Rock crushing or other dust-causing activities
- New Source Review Permit. A New Source Review permit is a pre-construction permit that authorizes the construction of new major sources of air pollution or major modifications of existing sources.

14.3.5 Wetlands (Section 10.6)

Section 404 Clean Water Act Permit. Contractors working aboard the installation will not perform any work in waters of the United States or wetlands (see definition below) without an approved permit (even if the work is temporary). Unavoidable impacts to wetlands or waters of the United States will require coordination and written approval from USACE for a Section 404 CWA permit (individual or applicable nationwide permit), the NCDWR for a Section 401c Water Quality certification, and the NCDCM for a Federal Consistency Determination. Failure to acquire written authorization for making impacts to wetlands and/or waters of the United States may result in significant project delays or design modifications. Website link:

http://water.epa.gov/lawsregs/guidance/wetlands/sec404.cfm

14.3.6 Drinking Water/Wastewater

- **Approval of Engineering Plans and Specifications for Water Supply Systems.** Applicants must submit engineering plans and specifications at least 30 days prior to the date upon which the Authorization to Construct is desired. Authorization to Construct must be obtained prior to onset of work.
- **MCIEAST-MCB CAMLEJO 5090.16 Drinking Water Systems and Water Conservation.** Establishes and implements requirements for drinking water supply wells, treatment/distribution systems, and water conservation objectives. Outlines planning and management requirements for drinking water-related processes and infrastructure.
- **MCIEAST-MCB CAMLEJO 5090.5 Grease Control Program Standard Operating Procedures.** Outlines procedures to be implemented by all new and existing non-residential food preparation facilities aboard the Installation and shall be instituted by all area commanders that oversee and are involved with the construction, operation, and maintenance of facilities that generate and/or work with Fats, Oils, and Grease (FOG).

- **Wastewater Extension Permit.** NCDEQ Form FTA 04-16 (Fast Track), ASEA 04-16, SSEA 04-16. Applicant submitting any of these Forms should plan accordingly to allow the State approximately 90 days to issue the permit. The Wastewater Extension Permit must be obtained prior to onset of work.

14.3.7 Aboveground Storage Tanks

- **Removals/Closures/Installations.** When removing, closing, or installing an Aboveground Storage Tank (AST) that contains Petroleum, Oils, or Lubricants, contractors must provide the Base Tank Manager (William Ratliff (910) 451-5878) with tank information prior to completion of work. Information should include at a minimum Tank Identification Number with building number (e.g., A98-01A), Tank Volume (gallons), Tank Contents, GPS Coordinates (decimal degrees) along with any other closure documentation available.
- **Contact Tank Manager.** Coordination with the Base EMD tank manager is recommended for any work removing, closing, or installing an AST.

Attachment 2-1 – Marine Corps Installations East Policy Statement on Environmental Management and Conservation

MARINE CORPS INSTALLATIONS EAST POLICY STATEMENT ON ENVIRONMENTAL MANAGEMENT AND CONSERVATION

Marine Corps Installations East (MCIEAST) is a key national defense asset where Marines, Sailors and their families live, work, and train. MCIEAST offers unique and irreplaceable training venues in which to hone our warfighting capabilities, enable Force readiness, and prepare for future conflict. Protecting these critical assets through sound, professional environmental management and compliance is crucial for its continued, sustained availability. Failure to adequately protect natural and cultural resources and environmental non-compliance carry significant risk to our mission through fines, lawsuits, and readiness impacts such as restrictions on how, when, and where we train; delays in new construction; failure of facilities and equipment; and degraded relationships with regulatory agencies and the public whose support we need for our continued mission success. We must meet our environmental and sustainability responsibilities, meet or exceed our goals, minimize the risk to mission, and strive for continuous improvement by:

- Complying with all applicable environmental legislation, regulations, and policy in order to protect human health and the environment;
- Conserving the natural and cultural resources entrusted to us by the American people;
- Promoting environmental sustainability through pollution prevention, source reduction, recycling, sustainable procurement, water and energy efficiency and conservation, use of native plants in landscaping, and adaptive reuse of existing infrastructure;
- Initiating environmental planning actions early in project planning and involving all appropriate internal and external stakeholders;
- Proactively engaging with regulatory agencies and the public to foster partnerships and build trust.
- Remediating areas of contamination that are the result of past disposal practices; and
- Eliminating preventable accidental releases of Aqueous Film Forming Foam.

U.S. Marine Corps operational and tactical success is linked to responsible stewardship of the environment, while we enable our tenant organizations to conduct realistic, full-spectrum training in support of their readiness and mission requirements. We must understand and fulfill our collective roles in protecting the environment within our training venues, our bases, and our stations. I expect our Commanders and all personnel aboard our installations to take a personal interest in meeting our environmental responsibilities and protecting our mission. Our future Marine Corps operational readiness depends on it.

R. A. GNECCO
Sergeant Major, U. S. Marine Corps

A. GARCIA JR.
Colonel, U. S. Marine Corps
Commander

MCIEAST-MCB CAMLEJ Environmental Management Division is located in Building 12 at (910) 451-5003.

Attachment 5-1 – MCIEAST-MCB CAMP LEJEUNE Spill Report Form

MCIEAST-MCB CAMP
LEJEUNE SPILL REPORT

*** SHADED AREAS RCRS USE ONLY ***

TITLE/LOCATION

DATE | TIME

RESPONSE NAME/UNIT:

SPILL CATEGORY (SELECT ONE) ☐ HAZMAT ☐ HAZWASTE ☐ POL ☐ WASTEWATER ☐ OTHER

PRODUCT SPILLED

QUANITY SPILLED

LATITUDE | LONGITUDE

HOW WAS SPILL DISCOVERED

SOURCE OF THE SPILL

CAUSE OF THE SPILL

MISSION IMPACT

WERE SAMPLES TAKEN (CHECK ONE) YES ☐ NO ☐

ANALYSES REQUESTED / PERFORMED ON SAMPLES

DID THE SPILL (CHECK ONE)

ENTER A WATERWAY?	REACH WITHIN 100' OF SURFACE WATER?	REACH WITHIN 1500' OF A WATER SUPPLY WELL?	GO OFF BASE?
☐ YES ☐ NO	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐

HOW WAS THE SPILL CONTAINED?

WHAT DANGERS DID THE SPILL PRESENT?

WHAT WERE THE ENVIRONMENTAL IMPACTS?

WHAT RECOVERY EFFORTS WERE USED?

IF OIL SPILLED, WHAT PERCENT WAS RECOVERED?

HOW WERE RESIDUALS DISPOSED OF?

WEATHER CONDITIONS?

REPORTABLE SPILL? (CHECK ONE) ☐ YES ☐ NO WAS A REGULATORY AGENCY CONTACTED: ☐ YES ☐ NO

AGENCY NAME (IF) ☐ NCDEQ NCDEQ REPORT# ☐ NCDEM NCDEM REPORT#

REGULATORY DRIVER

NRC NOTIFIED ☐ YES ☐ NO NRC INCIDENT NUMBER:

WHAT MEASURES WERE PUT IN PLACE TO PREVENT RECURRENCE?

ADDITIONAL INFORMATION OR COMMENTS

SPILL POC | E-MAIL | PHONE

Attachment 7-1 – MCIEAST-MCB CAMP LEJEUNE Satellite Accumulation Area (SAA) Weekly Inspection Form

MCIEAST-MCB CAMP LEJEUNE **Satellite Accumulation Area (SAA) Weekly Inspection**				
Bldg Number/Location of HW Site:				
Unit Inspected:	Inspection Date:			
Inspected By:	Inspection Time:			
REQUIREMENT	**Regulation Citation**	**Yes**	**No**	**Location of Discrepancy *and* Proposed Corrective Action**
1. Is housekeeping maintained in acceptable manner?	§262.251			
2. Is waste accumulated at or near the point of generation and "under the control of the operator?"	§262.15(a)			
3. HW container is marked with the words Hazardous Waste, Hazard Indicator (i.e., toxic, flammable), and contents name.	§262.15(a)(5)			
4. HW container has less than 55 gallons of HW or less than 1 quart or acute HW.	§262.15(a)			
5. HW container in serviceable condition, non-leaking, free of rust and deterioration?	§262.15(a)			
6. Waste is compatible with container that it is stored in.	§262.15(a)(2)			
7. Each container is closed except when adding or removing waste.	§262.15(a)(4)(i)			
8. Weekly inspections are conducted?	§262.17(a)(1)(v)			
9. Is ULCP prominently posted?	§262.262			
10. Are "Dangerous-Unauthorized Personnel Keep Out" signs posted so that they may be seen from any approach?	§265.14(c)			
11. Are "No Smoking" signs posted?	§262.17(a)(1)(vi)(B)			
12. Does the site have emergency communication system or two man rule in effect? If the two man rule is implemented is there a sign with the legend "Two Man Rule in Effect" posted?	§262.252			
13. Are properly charged fire extinguishers, eye wash stations present and are they inspected monthly?	§262.253			
14. Is the proper spill response equipment readily available?	§262.261			
15. Is 911 spill response sign posted and is the post indicator valve in good operating condition and secured in the closed position? Are there any structural defects such as cracked concrete?				
16. Is the site designated, recognizable, and is the EMD SAA Authorization letter posted within the site as to be visible to personnel placing waste into the container?				
17. Are all hazardous wastes properly segregated and stored in the designated site?	§262.15(a)(3)			

Attachment 7-2 – Weekly Hazardous Waste (HW) Storage Area Inspection Form

Weekly Hazardous Waste Storage
Area Inspection Form

Squadron: _____ Inspector: _____

Date: _____ Signature: _____

Question	Yes	No	Corrective Actions or N/A
1. Is the HW container located at or near the point of generation?			
2. Is the HW container DOT approved?			
3. Is the HW container marked correctly with the words “Hazardous Waste,” correct noun name of contents, NSN’S and unit designator?			
4. Is the HW container closed and wrench tight when no one is adding to the container?			
5. If a funnel is left in place, does that funnel have a plug or ball valve to be considered closed or secured?			
6. Is the HW container in good condition? (no excessive rust or dents in critical areas, seals are in place, no bulging or collapsing and no signs of spillage or leakage)			
7. Is the Spill Contingency Plan posted and in plain view?			
8. Is the SAA Site approval letter from EAD posted at the SAA site?			
9. Is the SAA Site limited to Authorized Personnel only?			
10. Is the HW container below the proper ullage for a liquid to expand? (4 inches from the top)			
11. Are SAA HW containers moved to the 90-Day Site within 72 hours when filled to the proper ullage or weight capacity of the container?			
12. (90-Day Site only) Are all palletized waste streams correctly marked with “Hazardous Waste” or “Universal Waste,” noun name of the waste, NSN and unit designator on the pallet or wall of the waste structure?			
13. (90-Day Site only) Are all HW containers turned in prior to the 90th day after the ASD?			
14. Are adequate spill response supplies readily available for use in case of spill or leakage?			
15. Is there a means of emergency communication between storage facilities and working spaces?			
16. Is the SAA site or 90-Day Site in a good state of police?			

Attachment 7-3 – Marine Corps Installations East Marine Corps Base Camp Lejeune Initial AUL Build Form

MARINE CORPS INSTALLATIONS EAST MARINE CORPS BASE CAMP LEJEUNE INITIAL AUL BUILD FORM

Unit/Tenant Name:	Point of Contact:
Work Center Name:	Telephone:
Building:	

1. NSN/LSN	2. Manufacture	3. Material Name	4. Part #	5. MOHQ	6. Justification
Maximum on Hand Quanity (MOHQ) will be based on a 90 day					

MCI EAST – MCB CAMLEJ/G-F/EMD/34

Initial Authorized Use List (AUL) Build Form Instruction

UNIT/TENANT NAME: Provide the name of the unit/tenant where the material will be stored.
POINT OF CONTACT: Provide the name of person completing the Initial AUL build form.
WORK CENTER NAME: Should be the section (armory, maintenance, supply, boats, etc.) that will be using the HM.
PHONE NUMBER: Contact number for the POC.
BUILDING NUMBER: Enter the building number where the Work Center is located.

1. NSN/LSN: Enter the National Stock Number (NSN) (9150-00-111-6255) or Local Stock Number (LSN) (8010-MC-000-0863), using standard formatting.

2. MANUFACTURE: Enter the name as it appears on the Material Safety Data Sheet (MSDS). Manufacture is only required for materials with an LSN, for ALL NSN materials use “ALL MANUFACTURES.” If the material does not have an NSN/LSN assigned to it, the manufacture is required.

3. MATERIAL NAME: Enter the name as it appears on the MSDS from the manufacturer. If appropriate, a common or brand name (i.e., WD-40, Castrol motor oil) may be entered in parentheses.

4. PART NUMBER: Enter the part number for the material with an LSN. If the material does not have an LSN/NSN assigned, provide the part number.

5. ESTIMATED MOHQ: Enter how much of the HM you will need for no more than a 90-day supply based on standard operations, not on “worst case”, surge, or emergency operations.

6. JUSTIFICATION: Provide the proper reference that requires the use of the material. EXAMPLE: Technical Manual/Order (TM 9-2320-280-10), Owner's Manual (Johnson Operation/Maintenance Manual), Base Order (B.O. 11014.1K Facilities Maintenance) etc. Use “Special Authorization” for HMs that are deemed mission essential and may not have a guiding reference. Commanders Special Authorization (CSA) may be used on a case-by-case basis.

Environmental Standard Operating Procedure (ESOP) 5090.10.2

Last Date Updated: June 20, 2024

TITLE: Marine Corps Installations East-Marine Corps Base Camp Lejeune (MCIEAST-MCB CAMLEJ) Environmental Media Screening Procedures for Construction Sites on Marine Corps Base Camp Lejeune (MCB CAMLEJ) and Marine Corps Air Station New River (MCAS NR)

RELATED MCIEAST-MCB CAMLEJO: 5090.10

PURPOSE: To define procedures for managing environmental media (e.g., soils, groundwater, surface water, etc.) and construction debris at construction sites on MCB CAMLEJ and MCAS NR (the Base).

BACKGROUND:
Historic management of construction across the Base has identified a need to develop processes to maintain environmental compliance. This ESOP has been expanded from only soils to include different media and contaminant impacts summarized below. In addition to the purpose outlined above, this ESOP addresses the requirements outlined in the 30 Jan 2021 Naval Facilities Mid-Atlantic OPSNOTE 2021-001, which requires a Standard Operating Procedure to address management of excess soil and construction debris.

Environmental Response Sites
As part of the environmental response programs, the Base has identified several sites that have contamination to soil and/or groundwater. Site-specific contaminants impact management options for disposal of soils and/or groundwater. Environmental responses at these sites are administered under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) and Resource Conservation and Recovery Act (RCRA).

PFAS
Per- and Polyfluoroalkyl Substances (PFAS) are a family of chemicals with evolving regulatory requirements, and PFAS-impacted soil and water require special handling considerations. The existence of PFAS-impacted media resulting from the use of Aqueous Film Forming Foam and other industrial uses has been discovered across the Base. While PFAS compounds PFOA and PFOS were early compounds of concern, the list of PFAS compounds of concern continues to expand and currently includes PFOS, PFOA, PFHxS, PFNA, HFPO-DA (and its salts), and PFBS.

Base impacts were identified in September 2021, with the investigation of suspect PFAS areas during the Site Investigation step in the CERCLA process. Limited sampling has been conducted, and understanding the full nature and extent of PFAS impacts on the Base will occur over time. This guidance provides guidelines for managing PFAS-impacted soil and groundwater on the Base to protect human health and the environment.

Environmental Review Process
As required by the National Environmental Policy Act (NEPA), construction projects are required to submit a Request for Environmental Impact Review (REIR) to the NEPA coordinator. This process allows subject matter experts to review and comment on applicable environmental compliance requirements. These requirements along with guidance and contact information are documented in the Decision Memorandum (DM).

APPLICABILITY:
This ESOP applies to organizations and contractors conducting intrusive work on the Base where the removal or addition of soil or other environmental media is expected. Moving media from either the originating construction site or Base property is considered removal of media. This applies to topsoil, grub material, unsuitable soil, groundwater, surface water, and other media. This ESOP should be used as guidance for installation procedures and does not circumvent the need/recommendation for sample collection by knowledgeable environmental professionals.

RESPONSIBILITIES:
The Environmental Management Division (EMD) is responsible for communicating environmental requirements during the NEPA REIR process and supporting the planning and construction process to include providing supporting documentation where existing data is available and review of environmental sampling data.

The Public Works Division (PWD) sections charged with planning or implementing construction projects are responsible for incorporating the below procedural requirements into scope, specifications, and funding of projects.

The Resident Officer in Charge of Construction (ROICC) is responsible for implementing the requirements included in the construction contract and will provide required documentation to the appropriate EMD personnel within 30 days of project completion to ensure appropriate record keeping.

PROCEDURE:
Note: A list of program contacts is listed in Appendix A.

1. Project managers will submit project descriptions to evaluate environmental requirements through the NEPA REIR process. Please contact the NEPA coordinator to begin. Once completed, the project manager should review the DM for environmental requirements.
   Note: If your project site changes, you will need to coordinate the new boundaries with the NEPA program.
2. Project managers will coordinate with the EMD early in the project (design kickoff or Request for Proposal development) to discuss concerns with known soil and/or groundwater contamination or

unexploded ordnance (UXO). If a DM has not been generated for this project, please contact the NEPA coordinator to begin the REIR process, see Appendix A for contact information.

a. If your construction site is identified with PFAS impacts or is within a PFAS buffer area, site-specific additional sampling may be required to advise dewatering management and soil disposal requirements. The 'Sampling and Laboratory Information' section provides details on media-specific sampling methods.

3. All construction workers must receive "3R" UXO Safety Awareness Training. The Project DM will specify if a roster of attendance must be maintained on-site for the ROICC to review. Training can be obtained by watching the MCB CAMLEJ specific video online at: https://www.lejeune.marines.mil/Offices-Staff/Environmental-Mgmt/Training-Video/
4. If at any time during construction suspect munitions-related items are identified, on-site personnel will immediately stop work and notify **Emergency Response (911)** then Blackburn (910-451-3064/4449). Base Explosives Ordnance Disposal (EOD) will provide proper identification and coordinate with the Explosive Safety Officer (ESO). Additionally, incidents should be reported to the ROICC and EMD Installation Restoration (IR) Program. The sooner incidents are reported to EMD and the ESO the sooner follow-on UXO construction support actions can be managed and determined.
5. Contact information for any programs identified in this ESOP are included in **Appendix A**.
6. Follow the below media specific procedures:

a. **Soils coming onto a project site (fill):**

- Soils brought from off-Base must be received from a permitted borrow pit or permitted soils land-farm. Analytical data must be provided upon request.
- Petroleum impacted soils excavated from a construction site to be removed from the project site for any reason must be analyzed using EPA methods 8260 & 8270 to confirm that contaminant levels are below the lesser of the soil to groundwater (STG) or residential maximum soil contaminant concentration levels (MSCCs) before being considered for "unrestricted use". MSCC Tables are provided as Enclosure (1). Petroleum impacted soils above the lesser of their respective STG or residential MSCCs must be properly disposed at an appropriate permitted disposal facility.
- If soils are brought from any other on-base source a soil characterization must be completed using US Environmental Protections Agency (EPA) methods 6010 (metals), 8260 (VOCs), 8270 (SVOCs), and 1633 (PFAS) must be used to confirm that contaminant levels are below the lesser of the STG or residential MSCCs (See Enclosure (1).
- If soils brought from any other off-base source a

soil characterization must be completed using US Environmental Protections Agency (EPA) methods 6010 (metals), 8260 (VOCs), 8270 (SVOCs), 8081 (pesticides), 8151 (herbicides), and 1633 (PFAS) must be used to confirm that contaminant levels are below the lesser of the STG or residential MSCCs (See Enclosure (1).

- Sampling data can be provided to IR program contacts if you are unsure if soil analytical data meets acceptance criteria.

b. Soils excavated from an on-base construction site (cut):

All soils leaving a project site:

Surplus soil shall be mechanically screened* before leaving its originating site to remove all objects greater than 3 inches and deleterious material (organic debris such as roots, stumps, timber) or construction debris. Dispose of deleterious material and objects larger than 3 inches in accordance with state and federal regulations, and applicable contract requirements. Construction debris, to include hazardous and non-hazardous waste, shall be properly disposed in accordance with the RCRA and applicable federal and state regulations.

*In special circumstances (i.e., site is <1 acre) manual screening can be done with proper justification and written approval by the ROICC. Details on how the screening is being performed shall additionally be provided to the ROICC. Spreading material out on the ground in lifts, for example, and manually removing debris larger than 3 inches is an adequate method to visually inspect soil prior to leaving a site. Observing an excavator direct load into a dump truck is not considered an acceptable method of screening soil.

The contractor shall provide a daily written certification statement, signed by the Quality Control (QC) Manager, indicating volume, in cubic yards (CY), stating that the material is free of deleterious material greater than 3 inches, stating where the surplus soil was delivered, and confirming the material is free of contaminants. Documentation regarding disposal of deleterious material shall also be provided in writing.

Uncontaminated, screened, surplus soil can be stored at one of the designated locations on government property (see stipulations below), reused on base at another approved location, or it can be disposed off-base as determined by the contractor. The government has first right of refusal for screened soil. Written documentation of proper screening and where the soil will be going is required a minimum 10 days prior to allowing any soil to leave the base. The contractor could be held civilly and/or

criminally liable if it transports soil impacted with contaminants, munitions, solid waste, or other possible harmful contaminants to any location without proper approval from the Government and in compliance with applicable federal and state regulations.

Proper documentation and waste characterization is required for transporting and disposing of contaminated soils or debris (i.e., hazardous or non-hazardous waste manifest signed by a Base representative designated in writing by the Commanding General to sign hazardous waste manifests). The waste manifests must properly characterize, document volume and concentrations, and should be coordinated with the Resource Conservation and Recovery Section (RCRS) or Consolidated Hazardous Material Reutilization and Inventory Control Program (CHRIMP), see Appendix A for contact information. Under no circumstances shall a contractor sign on behalf of the government on a waste profile or a waste manifest. Contaminated soils cannot be stored on base or transported off-base without proper documentation.

A review of the project DM will provide guidance on whether your site is known or suspected of having contaminated soil. Additional documentation on what contaminants and contaminant levels can be requested from the program specified in the DM. EMD contacts are listed at the end of this ESOP.

NOTE: Rubbish and other construction debris shall be transported off-base for disposal in accordance with RCRA and federal and state solid waste regulations. A minimum 24-hours advanced written notice shall be provided to the Contracting Office of the Contractor’s intention to dispose of rubbish and debris off-base. Disposal at sites or landfills not holding a valid state of North Carolina permit is prohibited. The prohibition also applies to sites where a permit may have been applied for but not yet obtained. If construction debris has been disposed off-base outside the parameter of this ESOP at a site without state permits or not in accordance with regulatory requirements, the Contractor is to remove, transport, and relocate the debris to a state-approved site at the Contractor’s expense. Any fines, penalties, or fees related to the illegal disposal of construction debris will be paid by the Contractor, not the Government. All soil transported off its originating site shall be screened for construction debris and other trash by the Contractor generating the waste prior to transportation, either on-base or off-base.

i. PFAS-impacted soils (non-comingled)
PFAS-impacted soils are defined as soil with any

detections of PFAS compounds (presence/absence). Laboratory guidance is provided in the 'Laboratory Information' section below. Currently, there are no promulgated State of North Carolina or federal soil cleanup standards. However, the State of North Carolina Department of Environmental Quality (NCDEQ) verbally clarified that soils containing PFAS compounds may only be disposed of in a subtitle C or D landfill.[2] Additional constraints may exist on accepting NCDEQ permitted facilities.

All PFAS analytical results should be provided to EMD. Your project DM will state if PFAS impacted soils are expected on site. PFAS-impacted soil, with no other contaminants, may be managed with the following options:

- Left on-site (Preferred):
  - PFAS-Impacted or potentially-impacted materials (i.e., soil) can be left on site (i.e., within the original construction footprint/area of disturbance) in a manner which minimizes cross-contamination and prevents the spread of the impacted footprint. Soils will be managed to prevent runoff, i.e., stockpiled on site with sediment and erosion controls. Soil not impacted by PFAS can be used as fill for a PFAS-impacted site, but PFAS-impacted soil cannot be transported to other, non-contiguous sites on the Base that are not permitted to receive the waste, even if the other areas are also impacted by PFAS. Sampling is not required if the soil does not leave the site.
- Landfilled:
  - PFAS-impacted soil leaving the construction site of origin must go to a lined, permitted landfill and will require sampling and testing of the soil as determined by the accepting landfill. It cannot be reused/recycled, or land-farmed. Testing requirements for the receiving facility may vary. Coordination with the receiving facilities should be included in planning stages to confirm PFAS acceptance levels and sampling requirements.

    ON BASE LANDFILL: Any acceptance of PFAS-impacted soils will need to be negotiated with the Base Landfill contacts listed in appendix A.

    OFF BASE LANDFILL: PFAS impacted soils can be disposed of at an off-base permitted

subtitle D (non-hazardous landfill). This will require disclosure that the soil contains or may contain PFAS. PFAS-impacted soils can be disposed of at a Subtitle C landfill (hazardous waste landfill); however, this may be costly. A copy of the landfill's current permit license, EPA ID, and a recent Enforcement and Compliance History Online report from the EPA's website must be provided to the appropriate installation material collection section, along with the Waste Profile to validate the receiving facility is approved and not out of compliance.

- Manifesting requirements: All impacted soils leaving the Base will be manifested through the appropriate installation material collection section:

  MCB CAMLEJ: Resource Conservation and Recovery Section (RCRS),
  MCAS NR: Consolidated Hazardous Material Reutilization and Inventory Control Program (CHRIMP)

  Once analytical data are generated, a waste profile must be created. The waste manifests must properly characterize, document volume and concentrations, and clearly indicate that PFAS compounds are present and should be coordinated with RCRS/CHRIMP, see appendix A.

- No Impacts: Areas outside of known PFAS impacts may require PFAS sampling if receiving facilities have their own sampling requirements, which may require PFAS testing even if the base does not. If soil and/or groundwater are determined to be "impacted" at any point, including if the contractor has tested the soil due to off-base soil receiving facility testing requirements, the requirements outlined above for impacted media will apply. Due to the limited nature and extent of installation PFAS data available, appropriate precautions and contingency cost planning should be done in the project planning process.
- For PFAS impacted soils comingled with other contaminants see following sections.

ii. <u>Petroleum impacted soils:</u>

- Soil may remain on the construction site footprint and/or placed back into the excavation if Gasoline Range Organics (GRO) are below 50

mg/kg and Diesel Range Organics (DRO) are below 100 mg/kg using the Total Petroleum Hydrocarbon (TPH) Gasoline Range Organics/Diesel Range Organics method referenced in 'Sampling and Laboratory Information' below.

- Alternatively, the North Carolina Department of Environmental Quality (NCDEQ) allows the use of EPA methods 8260 for Volatile Organic Carbons (VOCs) & 8270 Semi-Volatile Organic Carbons(SVOCs) to be used to confirm that contaminant levels are below the lesser of the STG or residential MSCCs, see enclosure (1). If soils remain on site, PFAS sampling is not required.
- Soil leaving the construction site to be reused (i.e., to be used as backfill elsewhere) must be characterized using EPA methods 8260 (VOCs) & 8270 (SVOCs) to confirm that contaminant levels are below the lesser of the STG or residential MSCCs. Note: accepting facilities may require additional sampling, including PFAS.
- Soils leaving the project site with detections of GRO above 50 mg/kg or DRO above 100 mg/kg using the TPH GRO/DRO method or soils above the lesser of the STG or residential MSCCs must be disposed of at a NC permitted land application or landfill facility.
    - If this soil has PFAS impacts it should be disposed of at a permitted subtitle D or C landfill (lined landfill) and follow the same requirements listed above for landfilled PFAS soils, see Section 5.b.i.
    - Note: NC Land application facilities are likely to require PFAS sampling prior to accepting material.

iii. <u>Contaminated (other than PFAS or Petroleum) Soil</u>
If contaminated soils are suspected or confirmed through presence of UXO, odors, visual staining, or were previously identified in the project (i.e., constructing in a known impacted area), affected soils must be properly characterized, manifested, transported, and disposed of in accordance with RCRA and federal and state regulations.

- Soils deemed non-hazardous through waste characterization are to be disposed of at a permitted subtitle D landfill or an offsite treatment facility permitted to receive such wastes. Non-hazardous soils can be disposed at the on-base landfill, accompanied by their waste

profile, with acceptance from landfill personnel. Disposal requirements should be confirmed with the receiving facility.

- Soils deemed hazardous through waste characterization are to be disposed of at a permitted subtitle C treatment, storage, and disposal facility. Any Personal Protective Equipment (PPE) associated with the generation of hazardous waste must be properly contained and disposed of in the same manner. Disposal requirements should be confirmed with the receiving facility.
- Soils comingled with any contaminant and PFAS impacts should be disposed of at a permitted subtitle D or C landfill (lined landfill), based on the hazardous/non-hazardous characterization.

iv. On-Base Reuse on an Active Construction Site

If not taken to one of the soil storage locations listed below, screened, uncontaminated (by PFAS, petroleum, or other compounds as described above), surplus soil can be reused on base at another construction site, if the following conditions are met:

- The proposed site has an active erosion control permit, managed by PWD, in place.
- The soil has already been mechanically screened by the construction contractor **prior to** leaving its originating construction site (cannot be screened at the new location).
- The contractor has received written authorization to use the soil at the new construction site by the ROICC for both the originating and receiving sites (i.e., for reuse, not to be "disposed of" at the new site).
- The contractor shall provide ROICC a daily written certification statement to the ROICC, signed by the QC Manager, indicating volume, in Cubic Volume (CY), and stating that the material is free of deleterious material greater than 3 inches, where the surplus soil was delivered, and confirming the material is free of contaminants.
- Documentation regarding disposal of deleterious material shall also be provided by the construction contractor to the ROICC in writing.

v. On-Base Surplus Soil Storage Locations

Screened, uncontaminated (by PFAS, petroleum, or other compounds as described above), surplus soil can be

stored at the following on-Base designated locations, if authorized by the area manager. The project manager should coordinate with the area manager prior to contract award and while developing the design or Request for Proposals. Verify again at the start of project to determine capacity available and contact POCs listed below 7 to 10 days in advance to coordinate delivery of material at the storage locations. Provide an estimate of the volume of soil to be delivered and an estimated timeline for soil delivery.
On base locations include the following:

Area managed by PWD for use as daily cover:

A. Base landfill, located on Piney Green Road, building 982, approximate coordinates 34°41'26.9"N 77°19'27.4"W. All deliveries will be screened and weighed at the Landfill scale house. The contractor shall provide temporary silt fencing around designated stockpile areas as needed. The project manager will coordinate with landfill contacts listed in Appendix A. Landfill use letters will be provided by the ROICC so that deliveries can be tracked.
This site operates Monday through Thursday between 0730 and 1500 and on Friday between 0700 and 1400.

B. Area managed by G-3/5 for reuse on training areas for various maintenance activities:
3.5-acre storage, adjacent to Tactical Landing Zone Condor off Verona Loop Road, approximate coordinates 34°38'07.3"N 77°26'41.7"W.
The project manager will coordinate with G-3/5 Project Development Specialist, listed in Appendix A, to determine capacity available at the storage location, prior to delivery.
This site operates Monday through Thursday between 0730 and 1500.

- All contractors will be provided a designated area by the ROICC, as defined by the storage location manager and the ROICC, in which they will be responsible for all management of soil, to include: constructing and maintaining a perimeter silt fence; installing signage to identify the Contract, Contractor point of contact (POC), and Government POC; frequent shaping of stockpiled material to ensure economical use of space and proper drainage, as determined by the Landfill Manager or G-3/5 Project Development Specialist; applying grass seed as needed or monthly at a minimum to

minimize erosion; properly closing out site by removing silt fencing/signage, and properly shaping and seeding the stockpiled material.

- The contractor is responsible for providing all material, equipment, and labor for placement and management of the surplus material at the designated on-base locations. Grade surplus material to a flat condition and slope to provide positive drainage daily.
- The contractor is responsible for submitting the following verification documents to the ROICC and the storage location manager for review and approval at the end of each day soil is delivered, worked, and/or site work is completed.
- The contractor is responsible for providing photographic documentation that surplus soil has been properly placed. Photograph will include time and date of image. Photos of each truck delivery are required.
- The contractor is responsible to provide a certification statement, signed by the QC Manager, indicating volume, in cubic yards (CY), stating that the material is free of deleterious material greater than 3 inches, stating where the surplus soil was delivered, and confirming the material is free of contaminants.
- If soil delivered does not meet the requirements outlined in this ESOP (i.e., it is not properly screened, or is not being stacked and managed properly at the on-base soil storage location), the contractor will be responsible for correcting or removing said soil and will no longer be allowed to use on-base soil storage locations.

vi. Off-Base Disposal of Surplus Soil

Screened, uncontaminated (by PFAS, petroleum, or other compounds as described above), surplus soil can be disposed of off-base if the following conditions are met:

- Soil has been properly screened on-site, prior to removal, as outlined in the previous sections.
- The contractor shall provide a daily written certification statement to the ROICC, signed by the QC Manager, indicating volume, in CY, and stating that the material is free of deleterious material greater than 3 inches, where the surplus soil was delivered, and confirming the material is free of contaminants.

- The contractor shall provide documentation regarding disposal of deleterious material to the ROICC in writing.

vii. Addressing Munitions Concerns

The above screening stipulations will likely capture any potential munitions-related items (should they be present). However, sites with a potential for munitions and explosives of concern (MEC) or material potentially presenting an explosive hazard (MPPEH) may require an additional level of UXO construction support. The project DM will explain if your site is in one of these areas. Sites recommended to have UXO soil screening or UXO construction support include the following:

- Construction is located on a Munitions Response Program (MRP) Site, which is a former live-fire range that has been officially closed and assessed under the CERLA. MRP sites that are currently or have previously been assessed and documented to have MEC/MPPEH present will have UXO screening requirements specific to their project site. Contact the IR Program Manager for details on what munitions have been found and what level of UXO construction support will be required. Reference MCO 8020.10 for guidance.
- Construction is located within operational training area. This may require some level of UXO construction support, depending on the current and historic use of the property. Consult with G-3/5 and the MCIEAST-MCB CAMLEJ Explosives Safety Officer (not EMD) on what level of UXO screening and/or construction support is warranted.
- Documentation exists that the property was previously used for training (maneuver and live fire areas, to include firing lines and impact areas), and was administratively closed as a training area in accordance with MCO 5090.2, Volume 10 (administrative closure), **and** there exists documentation or evidence that MEC or MPPEH have been found on or close to the property.
    - Recent construction on sites documented as non-live fire maneuver areas have resulted in practice munitions being discovered during survey and ground intrusive activities supporting construction. Consult with the IR Program Manager, Base EOD, and/or the ESO on whether additional UXO construction support is warranted.

- Documentation exists that MCB CAMLEJ EOD has responded to and identified munitions-related items on the proposed project site. This may include the current project (i.e., if munitions items are found during the project, UXO screening and/or construction support may be required to complete the project). The items found will determine what level of UXO screening or construction support are warranted (e.g., finding a flare would not necessarily require soil screening, but finding a 3.5" practice rocket might).
    - This can be determined through interviews of EOD or MCIEAST-MCB CAMLEJ Explosives Safety Office (ESO) personnel.
    - Confirm with MARCORSYSCOM and the ESO if the items found by EOD require soil screening and/or UXO construction support.
- Exceptions:
    - Sites currently or previously assessed under the MRP with documentation concluding no further action (NFA) with regards to munitions would **not** need to be rescreened for UXO or require the soil from that site to remain on base. The IR Program Manager will identify sites that have been assessed under the MRP.
      Note: soil screening to remove deleterious material is still required.
    - Sites that have already been developed and are being redeveloped (i.e., demolish and rebuild, installation of utilities, etc.), regardless of their historic use as a training area are not recommended for UXO soil screening, unless EOD has responded to the area, or if there is past or current documentation to indicate the presence of munitions-related items (i.e., MRP).
      Note: soil screening to remove deleterious material is still required.

c. **Groundwater**

i. <u>PFAS Impacted groundwater</u>:
PFAS-impacted groundwater is defined as any exceedances of PFAS levels per current DoD guidance.

- Dewatering PFAS-impacted groundwater: Per Department of Navy Policy, groundwater impacted above 70 parts per trillion (ppt) PFOA and/or PFOS must be treated to below 70 ppt prior to release (additional permitting may be required); otherwise, it must be containerized and properly manifested for disposal at a permitted

facility. For construction sites identified as impacted and groundwater concentrations are unknown, sampling must be conducted to determine PFAS concentrations in groundwater if dewatering is required. If groundwater is found to be above 70 ppt PFOA and PFOS (combined), treatment is required prior to discharging onsite.
Note: In April 2024, EPA finalized National Primary Drinking Water Regulation for five PFAS and their mixtures (PFOA, PFOS, PFNA, PFHxS, or HPFO-DA). The EPA or the State may eventually list certain PFAS as hazardous wastes under regulations implementing the Resource Conservation and Recovery Act. In anticipation of additional regulations and implementing policy, it is recommended to use MCL concentrations in lieu of the above DON policy of a combined 70 ppt of PFOS and PFOA.
Coordinate with the Installation restoration program to confirm current DON policy for PFAS management.

- Extracted groundwater with confirmed PFAS below applicable maximum contaminant levels (and not containing any other contaminants) does not currently require special management.
  a. Currently applies to five PFAS compounds and their mixtures (PFOA, PFOS, PFNA, PFHxS, or HPFO-DA).
- Soils leaving the originating construction site within known groundwater should be tested for PFAS impacts unless existing soil data is available.

ii. Petroleum and VOC Impacted Groundwater:
Sites with known VOC impacted groundwater plumes will be identified in the project DM. Groundwater extracted (through dewatering, etc.) from these areas must be properly tested, manifested through RCRS/CHRIMP, and disposed of in accordance with state and federal regulations. Contact the IR program, for more information. Refer to the most current *Investigation and Remediation Waste Management Plan* for additional guidance.

- If contaminated groundwater is suspected or confirmed through presence of odors, visual staining, or was previously identified in the project (i.e., constructing in a known impacted area) affected groundwater must be properly tested, manifested, and disposed of in accordance

with applicable federal and state RCRA regulations.

- Contaminated groundwater must be containerized, characterized to determine if it is hazardous or non-hazardous, manifested, and disposed of or treated at an appropriately permitted facility. Any PPE associated with the generation of hazardous waste must be properly contained and disposed of in the same manner. Disposal requirements should be confirmed with the receiving facility.

d. **Leachate, Sediment and/or Surface water**

It is unlikely that construction would require collecting these environmental samples. In the event leachate, sediment or surface water sampling is required, coordinate with the IR Program.

i. For PFAS or Petroleum/VOC impacts, follow groundwater sampling guidance listed above.

ii. Contractors and planners can use Table 1 to determine which sample method to use depending on their target media. However, this is not an exhaustive list and should be used as supplemental guidance

e. **Drilling Mud Disposal**

The contractor, prior to using drilling fluid additives, must submit the Safety Data Sheets to Contract Representative and EMD/RCRS for review to ensure harmful chemicals are not being injected into the ground. Excess soil cuttings and drilling fluids shall be managed to not impact surface water or stormwater conveyance systems. Assuming the material is not contaminated by regulated compounds or impacted by PFAS, excess drilling mud and soil cuttings can either be spread on site around the borehole, or once dried on site, transported to the base landfill for use as daily cover. Material transported to the base landfill must be coordinated in advance with the Base Landfill Manager and must pass paint filter test for excess moisture. Additional testing requirements may be required, coordinate with the landfill manager.

f. Concrete and construction debris

Concrete sampling should be coordinated with the IR program, see appendix A for contact information. There are limited sampling methods available for concrete/construction debris. In most applications, a swipe sample can be collected and tested using many established sampling methods shown in Table 1. However, with emerging contaminants, such as PFAS, these methods may not be appropriate.

g. **Drinking Water, Wastewater, and Biosolids**
Sampling for Drinking Water or Wastewater/Biosolids should not be conducted as part of construction and are beyond the scope of this ESOP. If you have a project requiring sampling of drinking water, wastewater or biosolids please coordinate with the Water Quality Program points of contact listed in Appendix A.

h. **Other Media**
If your work requires sampling of any media not listed within this ESOP, please coordinate with the IR Program.

Sampling and Laboratory Information:

The publicly accessible Department of Defense (DoD) Environment, Safety & Occupational Health Network and Information Exchange (DENIX) database should be used as a starting point when selecting a laboratory for a project. It does not provide all information needed (e.g., version of method or requirements and list of analyte lists under accreditation). To ensure the laboratory you select is accredited for your project analytes, the project manager/chemist must review the laboratory's scope of accreditation, which is found on their accreditation body's website.

To find a DoD-Environmental Laboratory Accreditation Program (ELAP) accredited laboratory, use the following link under the heading "Search Accredited Labs" on the Environmental Data Quality Workgroup page on the DENIX website:
http://www.denix.osd.mil/edqw/home/
(https://www.denix.osd.mil/edqw/accreditation/accreditedlabs/index.html)

A list of DoD-ELAP laboratories that are currently accredited to perform analysis of drinking water samples can be generated by performing a method search for the analytical method (e.g., EPA 537.1). To determine the version of EPA Method the laboratory is accredited for, the laboratory's DoD-ELAP Scope of Accreditation Certificate must be reviewed.

PFAS sampling protocols have stringent requirements, very low detection levels, and cross contamination is a concern. It is recommended that an experienced environmental professional, particularly those in the environmental remediation and site assessment industry, should collect samples and interpret results. Please consult your environmental professional on disposal facilities that will accept PFAS-impacted media. See below and Table 1 for PFAS testing methods.

- Drinking Water: Both EPA Method 533, which analyzes for 25 PFAS Compounds, and EPA Method 537.1, which analyzes for an additional 4 PFAS compounds, should be used to sample drinking water ONLY.

- **All other media (to include Soil or groundwater): EPA Method 1633, which analyzes for 40 different PFAS compounds, is currently the only DoD approved method for PFAS testing in media other than drinking water.**

- Regardless of the media analyzed, the most up-to-date, DoD-approved method should be utilized and performed by an appropriate DoD-ELAP accredited laboratory.

POL impacted wastes are typically tested using TPH-GRO and TPH-DRO (Method 8015C) and RCRA 9 Metals (Method SW846-6010B/7000).

Media impacted with contaminants other than PFAS or Petroleum should be characterized through Toxicity Characteristic Leaching Procedure (TCLP) analyses listed in Table 1. Note: If you are unsure what the most appropriate method is, contact the IR Program.

Table 1 – Summary of Applicable Sampling Methods

METHOD	Contaminant Family	Media Matrix
Method 8015	Petroleum Organics	water, aqueous wastes, extracts
Method 6010	Metals	groundwater, digested aqueous and solid matrices
Method 7000	Metals	groundwater, aqueous samples, soils, sludges, sediments
Method 1010	Ignitability	petroleum products, biodiesel
Method 9040	Corrosivity	aqueous wastes, multiphase wastes
Method 8081	Pesticides	solid matrices, liquid matrices
Method 8082	PCBs	solid matrices, aqueous matrices, tissue, oils, wipe samples
Method 8151	Herbicides	water, soils, wastes
Method 8260	VOCs	ground and surface water, aqueous sludges, soils, and sediments
Method 827O	SVOCs	solid waste matrices, soils, air sampling media, water samples
Method 9012	reactive cyanide	wastes, leachates
Method 9034	reactive sulfide	sample extracts
Method 1633	PFAS	media other than drinking water
Method 537.1	PFAS	drinking water ONLY
Method 533	PFAS	drinking water ONLY

RECORD RETENTION: Copies of soil screening documentation/ certification shall be maintained in accordance with Navy Document retention policies (reference SECNAV M5210.1), shall be kept on-site through the duration of the construction project, and shall be made available for inspection upon request. Copies of all waste manifests, including those for soil going to the base landfill, shall be maintained by the EMD RCRS/CHRIMP for at least 30 years after the calendar year in which they are created.

REGULATORY CITATION:

MCO 5090.2
BO5090.12
OPNAVINST 8020.15B-MCO 8020.13A
MCO 8020.10
MCIEAST-MCB CAMLEJO 5090.10
MCO 8023.3B
DDESB TP-18
SECNAV M5210.1
RCRA, 42 USC 6901
CERCLA of 1980, 42 U.S.C. 9601 and Superfund Amendments and Reauthorization Act (SARA) of 1986
MCIEAST-MCB CAMLEJ Decision Memorandum ER13-321 (dtd 24 Oct 2013)
OPSNOTE 2021-001

TRAINING:

"3R" UXO Safety Training, available through the ROICC, OICC, EMD, or following website:

https://www.lejeune.marines.mil/Offices-Staff/Environmental-Mgmt/Training-Video/

REFERENCES:

CH2M, 2023. *Investigation and Remediation Waste Management Plan Marine Corps Base Camp Lejeune and Marine Corps Air Station New River, North Carolina.*

[1] DASN (E) POLICY MEMO, "ADDITIONAL AQUEOUS FILM FORMING FOAM CONTROL, REMOVAL, AND DISPOSAL REQUIREMENTS," 6 MARCH 2018

[2] BASED ON DISCUSSIONS WITH NCDEQ AND MCIEAST ON DISPOSAL OF PFAS CONTAINING SOILS.

[3] DISCUSSION WITH PWO CDR CAMPBELL AND E-MAIL FROM B. WOODALL DATED 5 OCTOBER 2021.

ENCLOSURES:

(1) NCDEQ's Maximum Soil Contaminant Concentration Levels (MSCCs)

Acronyms:

CERCLA Comprehensive Environmental Response, Compensation, and Liability
CHRIMP Consolidated Hazardous Material Reutilization and Inventory Control Program
CY Cubic Yards
DENIX DoD Environment, Safety & Occupational Health Network and Information Exchange
DM Decision Memorandum
DoD Department of Defense
DRO Diesel Range Organics
ELAP Environmental Laboratory Accreditation Program
EMD Environmental Management Division
EOD Explosives Ordnance Disposal
EPA US Environmental Protections Agency
ESO Explosive Safety Officer
ESOP Environmental Standard Operating Procedure
GRO Gasoline Range Organics
IR Installation Restoration
MCAS NR Marine Corps Air Station New River
MCB CAMLEJ Marine Corps Base Camp Lejeune
MCIEAST-MCB CAMLEJ Marine Corps Installations East-Marine Corps Base Camp Lejeune
MCO Marine Corps Order
MEC Munitions and Explosives of Concern
MPPEH Material Potentially Presenting an Explosive Hazard
MRP Munitions Response Program
MSCCs Maximum Soil Contaminant Concentrations
NCDEQ North Carolina Department of Environmental Quality
NEPA National Environmental Policy Act
PFAS Per- and Polyfluoroalkyl Substances
PFHxS Perfluorohexanesulfonic acid
PFNA Perfluorononanoic acid
PFHpA Perfluoroheptanoic acid
PFDA Perfluorodecanoic acid
PFBS Perfluorobutanesulfonic Acid
PFOA Perfluorooctanoic Acid
PFOS Perfluorooctanesulfonic Acid
POC Point of Contact
PPE Personal Protective Equipment
PWD Public Works Division
QC Quality Control
RCRA Resource Conservation and Recovery Act
RCRS Resource Conservation and Recovery Section
REIR Request for Environmental Impact Review
ROICC Resident Officer in Charge of Construction

STG	Soil to Groundwater
SVOC	Semi-Volatile Organic Carbons
TCLP	Toxicity Characteristic Leaching Procedure
TPH	Total Petroleum Hydrocarbon
UXO	UneXploded Ordnance
VOC	Volatile Organic Carbons

Appendix A – Contact information:

IR Program:
Thomas Richard, thomas.richard@usmc.mil, (910)451-9641
Laura Spung, laura.spung@usmc.mil, (910)451-9610

POL/UST Program:
Jessica Pierson, jessica.pierson@usmc.mil, (910)451-5878

Water Quality Program:
Travis Voorhees, travis.voorhees@usmc.mil (910)451-9518
Daniel Straub, daniel.straub@usmc.mil (910)451-9122

NEPA Program:
Jessi Baker, jessi.baker@usmc.mil, (910)451-4542
Brent Sayler, brent.sayler@usmc.mil, (910)451-9454

RCRS (Camp Lejeune Waste Manifesting):
Felicia Padilla, felicia.padilla@usmc.mil, (910)451-5256/1482
Jeff Zahniser, jeffrey.zahniser@usmc.mil, (910)451-5306/1482

CHRIMP (New River Waste Manifesting):
Greg Ottey, gregory.r.ottey.civ@usmc.mil, (910)449-6143

G-3/5 Project Development Specialist:
(910) 451-1379

Base Landfill:
Steven Beckner, steven.beckner@usmc.mil, (910)451-8666