PHOENIX
1102 W Southern Ave., Ste 4
Tempe, Arizona 85282
(o) 602-272-PTX1 (7891)
Dispatch 602-272-7890
(f) 602-272-7892
www.protex-az.com

TUCSON
916 West Grant Road
Tucson, Arizona 85705
(o) 520-352-1050
Dispatch 520-352-0150
(f) 520-352-0150
www.protex-az.com

February 20, 2026

Carl F. Moser, Jr., Civ, DAF
Environmental Program Manager
56 CES/CEIEA
13970 Gillespie Drive
Luke AFB, AZ 85309

RE: Limited Asbestos Survey — ProTeX Job# 17332
Luke Air Force Base
Building 1365
Glendale, Arizona 85309

Dear Mr. Moser:

In accordance with your authorization to proceed, ProTeX has conducted a limited asbestos survey of Building 1365 located at Luke Air Force Base in Glendale, Arizona. This letter report includes summaries of our activities, findings, and recommendations.

PROJECT BACKGROUND

ProTeX was retained by Luke Air Force Base (AFB) Environmental Management to conduct a limited asbestos survey of Building 1365 at the above referenced address. The survey was limited to the suspect building materials scheduled to be impacted by a scheduled renovation project.

ACTIVITIES

On February 12, 2026, Mrs. Sarah Ellwanger, an Environmental Protection Agency (EPA) and **Asbestos Hazard Emergency Response Act** (AHERA) Certified Building Inspector with ProTeX, collected twelve (12) bulk samples of suspect building materials from the site.

The samples were submitted via chain of custody protocol to Eurofins EMLab P&K, LLC of Phoenix, Arizona for asbestos analysis via PLM. Eurofins EMLab P&K is approved by the Arizona Department of Health Services pursuant to Arizona Revised Statute (A.R.S.) § 36-495.02 (5) to perform airborne and bulk asbestos fiber analysis (ADHS No. AZ0964). In addition, Eurofins EMLab P&K is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP No. 500031-0) for bulk asbestos fiber analysis. Sample analysis was conducted via Polarized Light Microscopy (PLM) in general accordance with EPA Method 600/R-93/116 and/or EPA 600/M4-82-020. The analytical laboratory reports are attached to this letter report.

FINDINGS

According to federal regulations, any material containing greater than one percent (1%) asbestos as determined by PLM is considered asbestos-containing material (ACM). Materials considered asbestos containing are highlighted in **bold.** A summary of the samples collected by ProTeX inspectors is presented in the following table:

Sample	Sample Description	Location	Approximate Quantity (SF)	Friable Y/N	Asbestos Content
1A	Drywall System	Walls & Ceiling -Bathroom	3,550 SF	Y	ND
1B		Walls & Ceiling -Office		Y	ND
1C		Walls & Ceiling -Hallway		Y	ND
2A	**1" x 1" Cream Ceramic Tile with Grout and Black Mastic Underneath**	**Bathroom Floor**	**20 SF**	**N**	**10% Chrysotile (Black Mastic)**
2B		**Bathroom Floor**		**N**	**10% Chrysotile (Black Mastic)**
2C		**Bathroom Floor**		**N**	**10% Chrysotile (Black Mastic)**
3A	Gray 4" Vinyl Cove Base	Base of Bathroom Floor	5 SF	N	ND
3B		Base of Bathroom Floor		N	ND
3C		Base of Bathroom Floor		N	ND
4A	Block and Mortar	Exterior Walls of Building	8,500 SF	N	ND
4B		Exterior Walls of Building		N	ND
4C		Exterior Walls of Building		N	ND
SF = Square Feet **ND = Non-Detect or Below Laboratory Detection Limits**					

CONCLUSIONS AND RECOMMENDATIONS

According to federal regulations, any material containing greater than one percent (1%) asbestos as determined by PLM is considered asbestos-containing material (ACM). **One (1)** of the materials sampled are considered to be asbestos-containing material (ACM):

- *Samples 3A, 3B, 3C: The black mastic beneath the 1" x 1" cream ceramic tile in the bathroom of Building 1365 contains 10% chrysotile asbestos. The black mastic is a non-friable Category II asbestos and is approximately 20 square feet in quantity.*

If additional suspect building materials are discovered during renovation/demolition activities, the materials should be sampled and analyzed for asbestos content prior to disturbance or should be assumed ACM and handled as such.

LIMITATIONS

ProTeX's conclusions and recommendations, as presented in this report, are based on limited sampling and analysis. The samples collected and used for testing, and the observations made, are believed to be representative of the area(s) evaluated.

The environmental services described in this report have been conducted in general accordance with current regulatory guidelines and the standard-of-care exercised by environmental consultants performing similar work in the project area. No other warranty, expressed or implied, is made regarding the professional conclusions presented in this report. Variations in site conditions may exist and conditions not observed or described in this report may be encountered during subsequent activities.

ProTeX the PT Xperts appreciates the opportunity to provide environmental consulting services to Luke Air Force Base and looks forward to future projects. Please contact us at (602) 272-PTX1 (7891) if you have any questions pertaining to this report.

Respectfully Submitted,
ProTeX, the PT Xperts, LLC

Emily Rogers, RG
Environmental Professional
Environmental Project Manager
B.S. Geology

Sarah Ellwanger
Environmental Consultant
AHERA Building Inspector

Figure 1 – ACM Sample Location Map

Appendix A – Personnel Certifications
Appendix B – Laboratory Reports and Chain-of-Custody

Distribution: (1) Addressee (PDF)

FIGURE 1

ACM Sample Location Map

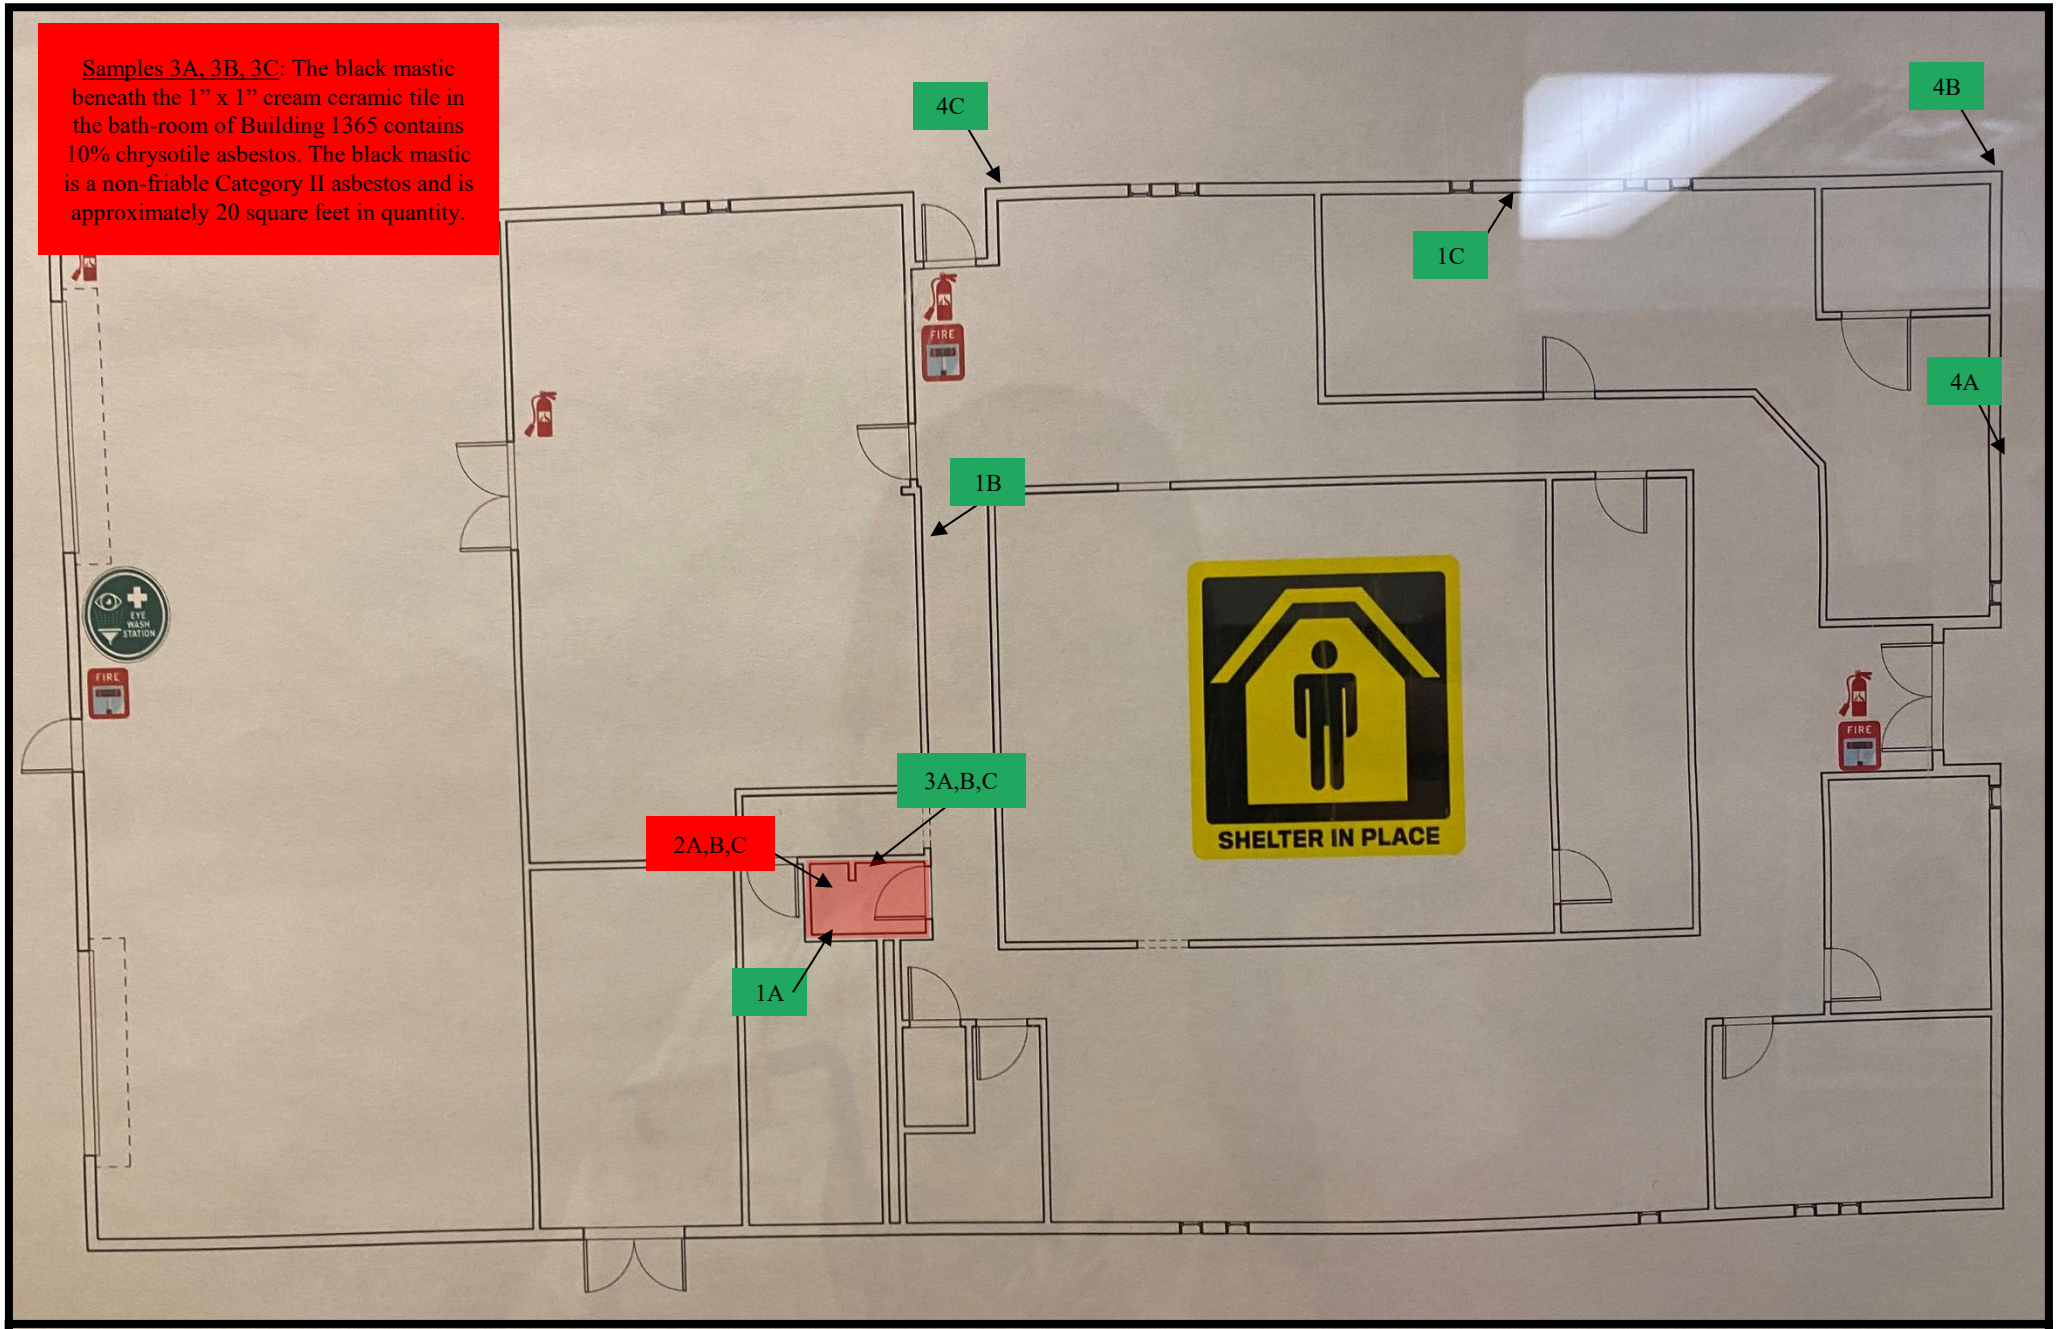

Fig. 1 (ACM Interior Sample Location)

Comprehensive Asbestos Survey

Scale: NTS	Drawn By: SE	**Date: 02/18/2026**

Luke Air Force Base
Building 1365
Glendale, AZ

ProTeX Job No.17332

APPENDIX A

PERSONNEL CERTIFICATIONS

THE ASBESTOS INSTITUTE

Certifies that

Sarah Ellwanger

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

May 19, 2025

and successfully completed and passed the competency exam.

Certificate:
ON-188748-9895-051925

Date of Examination:
19-May-2025
Date of Expiration:
19-May-2026

A. Zwanenburg
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

APPENDIX B

LABORATORY REPORTS AND CHAIN-OF-CUSTODY

eurofins | Built Environment Testing

Report for:

Christine McNally, CSM
ProTex
1945 E Watkins Street
Phoenix, AZ 85034

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: Luke Air Force Base; Building 1365
EML ID: 4414515

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 02-18-2026

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA 600/R-93-116, EBET-PLM-SOP83921)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	3

Location: 1A, Drywall System Lab ID-Version‡: 22149578-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: 1B, Drywall System Lab ID-Version‡: 22149579-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Sample Composite Homogeneity:	Good

Location: 1C, Drywall System Lab ID-Version‡: 22149580-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 2A, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149581-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

Location: 2B, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149582-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

Location: 2C, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149583-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 3A, Gray 4" VCB

Lab ID-Version‡: 22149584-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Sample Composite Homogeneity:	Good

Location: 3B, Gray 4" VCB

Lab ID-Version‡: 22149585-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: 3C, Gray 4" VCB

Lab ID-Version‡: 22149586-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: 4A, Block + Mortar

Lab ID-Version‡: 22149587-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 4B, Block + Mortar

Lab ID-Version‡: 22149588-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

Location: 4C, Block + Mortar

Lab ID-Version‡: 22149589-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

Analyst: Jason Bosse

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins | Built Environment Testing

www.eurofinsus.com/Built

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	ProTex	Address:	1102 W. Southern Ave
Contact:	Christine McNally	Special Instructions:	
Phone:	602-272-7891		

PROJECT INFORMATION

Project ID:	Luke Air Force Base		
Project Description:	Building 1365		
Project Zip Code:		Sampling Date/Time:	2/12/26 1300
PO Number:		Sampled By:	Sarah Ellig

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate
Other Requests

004414515

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
1A	DRYWALL SYSTEM	B	STD	[redacted]	BATHROOM
1B	"			1?	[redacted] OFFICE
1C	"				HALLWAY
2A	1"x1" CREAM CT w/			20 SF	
2B	GROUT w/ BLACK			1	
2C	" " MASTIC				
3A	GRAY 4" VCB			5 SF	
3B	"			1	
3C	"				
4A	BLOCK + MORTAR				N SIDE
4B	"				W. SIDE
4C	"	✓			" "
5A					
5B					
5C					

Spore Trap Analysis; Other biological particles - supplement; Direct Microscopic Exam (Qualitative); Quantitative spore count direct exam; Dust Characterization; 1-Media Surface Fungi (Genus ID + Asj; Culturable Air Fungi (Genus ID + Asp.; Gram Stain and Counts (Culturable Air; *Legionella* culture; Total Coliform, *E.coli* (Presence/Absen; QuantiTray-Sewage Screen; OTHER: (please specify test)

Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400); Asbestos Bulk - PLM; Lead (Pb) - Flame AA; PCR (please specify test); Allergens (please specify test)

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Sarah Ellig	2/13/26 0700		
		[signature]	8:15am 2/13/26

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-and-forms

©COPYRIGHT 2022 EUROFINS EPK BUILT ENVIRONMENT TESTING, LLC

PHOENIX
1102 W Southern Ave., Ste 4
Tempe, Arizona 85282
(o) 602-272-PTX1 (7891)
Dispatch 602-272-7890
(f) 602-272-7892
www.protex-az.com

TUCSON
916 West Grant Road
Tucson, Arizona 85705
(o) 520-352-1050
Dispatch 520-352-0150
(f) 520-352-0150
www.protex-az.com

February 20, 2026

Carl F. Moser, Jr., Civ, DAF
Environmental Program Manager
56 CES/CEIEA
13970 Gillespie Drive
Luke AFB, AZ 85309

RE: Limited Asbestos Survey — ProTeX Job# 17332
Luke Air Force Base
Building 1365
Glendale, Arizona 85309

Dear Mr. Moser:

In accordance with your authorization to proceed, ProTeX has conducted a limited asbestos survey of Building 1365 located at Luke Air Force Base in Glendale, Arizona. This letter report includes summaries of our activities, findings, and recommendations.

PROJECT BACKGROUND

ProTeX was retained by Luke Air Force Base (AFB) Environmental Management to conduct a limited asbestos survey of Building 1365 at the above referenced address. The survey was limited to the suspect building materials scheduled to be impacted by a scheduled renovation project.

ACTIVITIES

On February 12, 2026, Mrs. Sarah Ellwanger, an Environmental Protection Agency (EPA) and **Asbestos Hazard Emergency Response Act** (AHERA) Certified Building Inspector with ProTeX, collected twelve (12) bulk samples of suspect building materials from the site.

The samples were submitted via chain of custody protocol to Eurofins EMLab P&K, LLC of Phoenix, Arizona for asbestos analysis via PLM. Eurofins EMLab P&K is approved by the Arizona Department of Health Services pursuant to Arizona Revised Statute (A.R.S.) § 36-495.02 (5) to perform airborne and bulk asbestos fiber analysis (ADHS No. AZ0964). In addition, Eurofins EMLab P&K is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP No. 500031-0) for bulk asbestos fiber analysis. Sample analysis was conducted via Polarized Light Microscopy (PLM) in general accordance with EPA Method 600/R-93/116 and/or EPA 600/M4-82-020. The analytical laboratory reports are attached to this letter report.

FINDINGS

According to federal regulations, any material containing greater than one percent (1%) asbestos as determined by PLM is considered asbestos-containing material (ACM). Materials considered asbestos containing are highlighted in **bold.** A summary of the samples collected by ProTeX inspectors is presented in the following table:

Sample	Sample Description	Location	Approximate Quantity (SF)	Friable Y/N	Asbestos Content
1A	Drywall System	Walls & Ceiling -Bathroom	3,550 SF	Y	ND
1B		Walls & Ceiling -Office		Y	ND
1C		Walls & Ceiling -Hallway		Y	ND
2A	**1" x 1" Cream Ceramic Tile with Grout and Black Mastic Underneath**	**Bathroom Floor**	**20 SF**	**N**	**10% Chrysotile (Black Mastic)**
2B		**Bathroom Floor**		**N**	**10% Chrysotile (Black Mastic)**
2C		**Bathroom Floor**		**N**	**10% Chrysotile (Black Mastic)**
3A	Gray 4" Vinyl Cove Base	Base of Bathroom Floor	5 SF	N	ND
3B		Base of Bathroom Floor		N	ND
3C		Base of Bathroom Floor		N	ND
4A	Block and Mortar	Exterior Walls of Building	8,500 SF	N	ND
4B		Exterior Walls of Building		N	ND
4C		Exterior Walls of Building		N	ND
SF = Square Feet **ND = Non-Detect or Below Laboratory Detection Limits**					

CONCLUSIONS AND RECOMMENDATIONS

According to federal regulations, any material containing greater than one percent (1%) asbestos as determined by PLM is considered asbestos-containing material (ACM). **One (1)** of the materials sampled are considered to be asbestos-containing material (ACM):

- *Samples 3A, 3B, 3C: The black mastic beneath the 1" x 1" cream ceramic tile in the bathroom of Building 1365 contains 10% chrysotile asbestos. The black mastic is a non-friable Category II asbestos and is approximately 20 square feet in quantity.*

If additional suspect building materials are discovered during renovation/demolition activities, the materials should be sampled and analyzed for asbestos content prior to disturbance or should be assumed ACM and handled as such.

LIMITATIONS

ProTeX's conclusions and recommendations, as presented in this report, are based on limited sampling and analysis. The samples collected and used for testing, and the observations made, are believed to be representative of the area(s) evaluated.

The environmental services described in this report have been conducted in general accordance with current regulatory guidelines and the standard-of-care exercised by environmental consultants performing similar work in the project area. No other warranty, expressed or implied, is made regarding the professional conclusions presented in this report. Variations in site conditions may exist and conditions not observed or described in this report may be encountered during subsequent activities.

ProTeX the PT Xperts appreciates the opportunity to provide environmental consulting services to Luke Air Force Base and looks forward to future projects. Please contact us at (602) 272-PTX1 (7891) if you have any questions pertaining to this report.

Respectfully Submitted,
ProTeX, the PT Xperts, LLC

Emily Rogers, RG
Environmental Professional
Environmental Project Manager
B.S. Geology

Sarah Ellwanger
Environmental Consultant
AHERA Building Inspector

Figure 1 – ACM Sample Location Map

Appendix A – Personnel Certifications
Appendix B – Laboratory Reports and Chain-of-Custody

Distribution: (1) Addressee (PDF)

FIGURE 1

ACM Sample Location Map

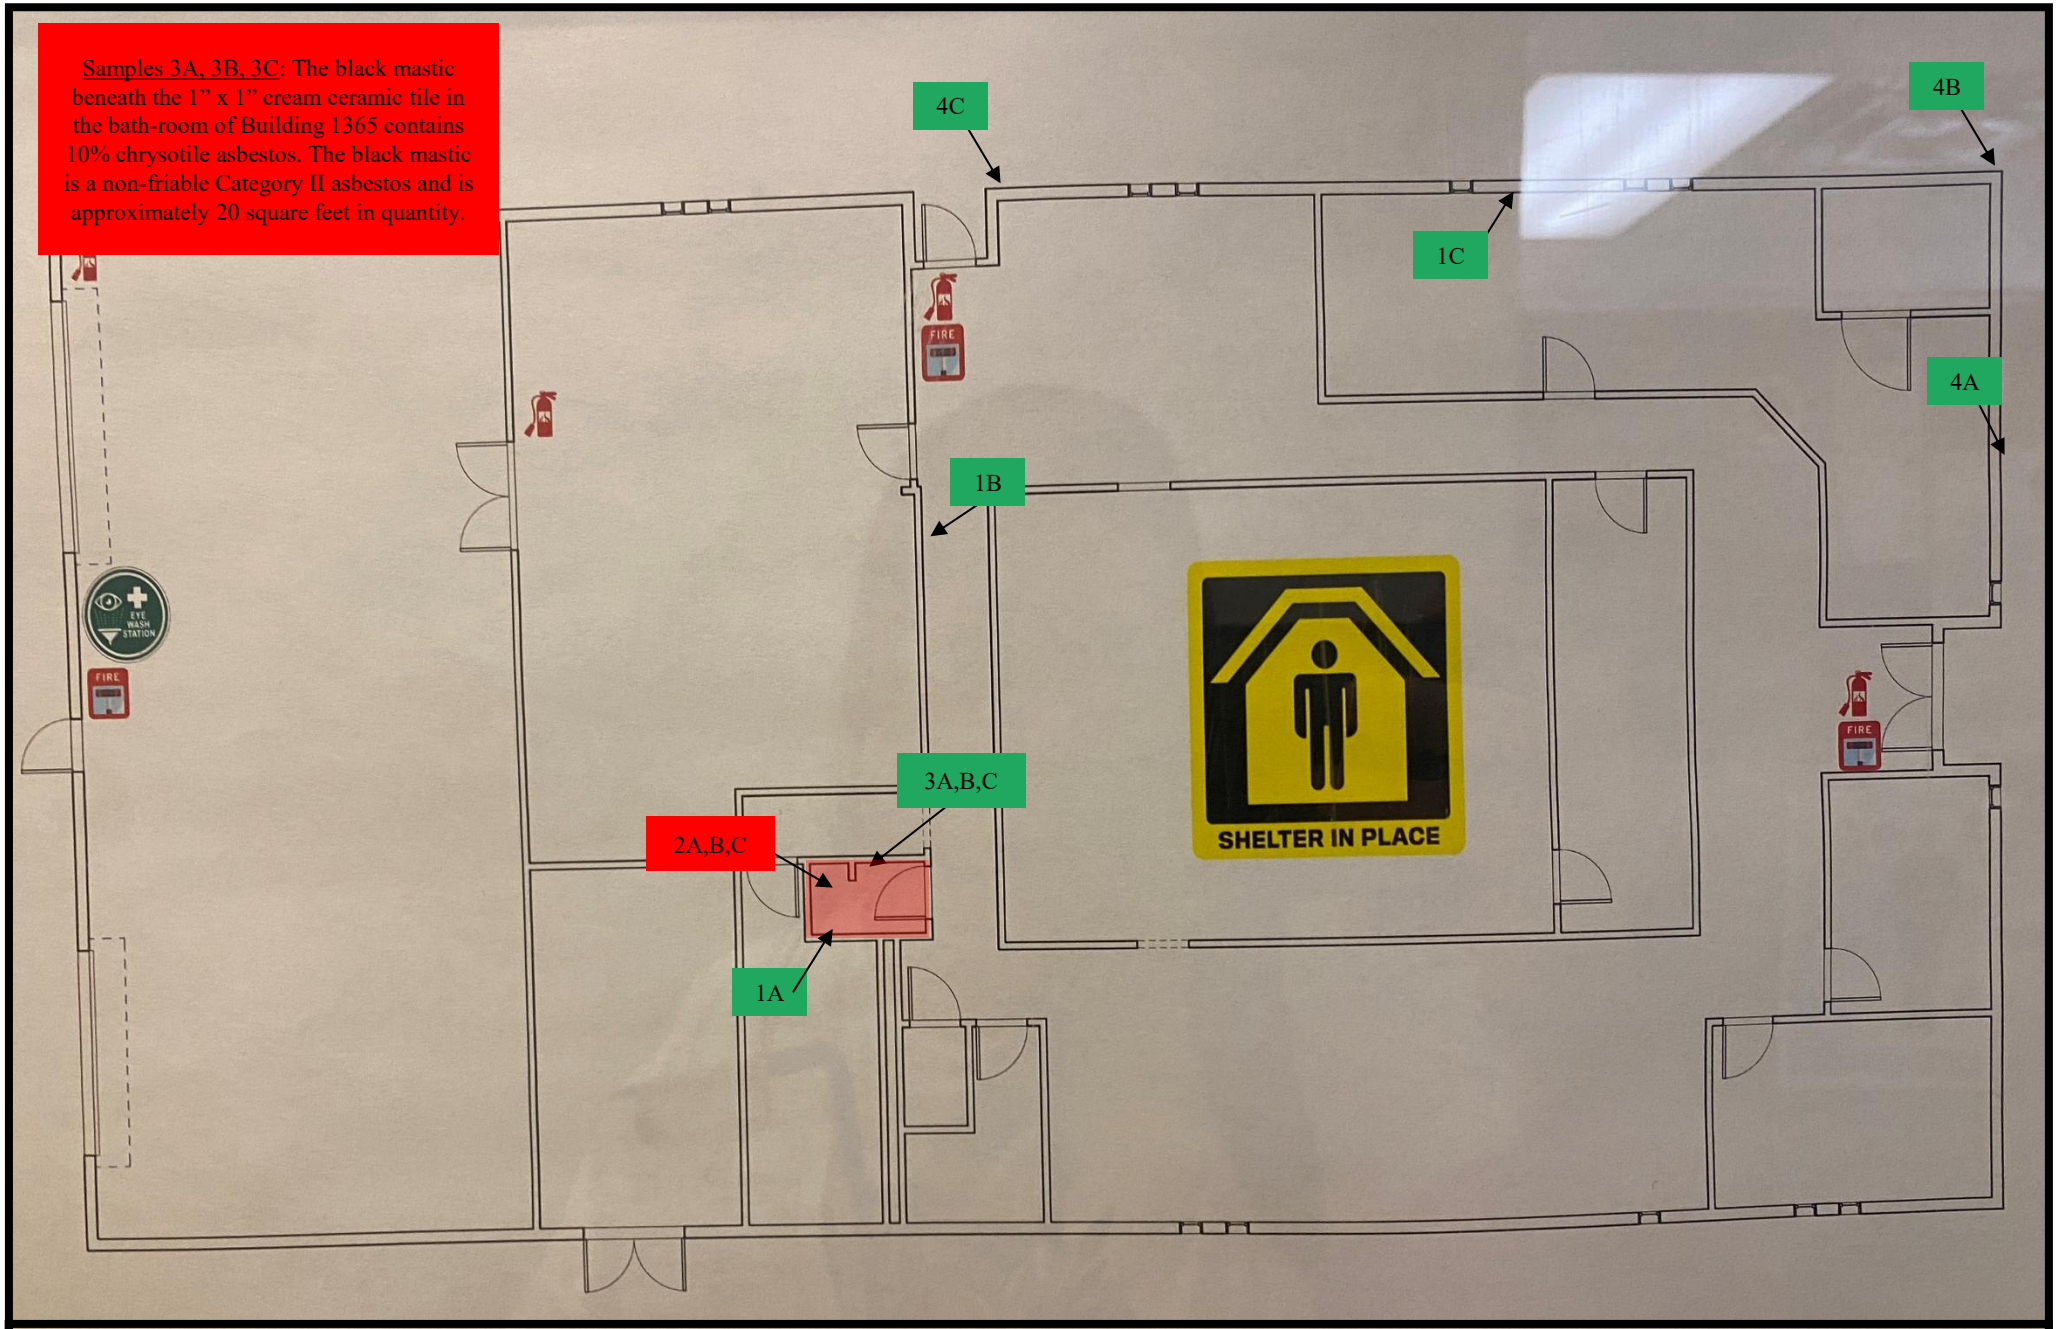

Fig. 1 (ACM Interior Sample Location)

Comprehensive Asbestos Survey

Scale: NTS	Drawn By: SE	**Date: 02/18/2026**

Luke Air Force Base
Building 1365
Glendale, AZ

ProTeX Job No.17332

APPENDIX A

PERSONNEL CERTIFICATIONS

THE ASBESTOS INSTITUTE

Certifies that

Sarah Ellwanger

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

May 19, 2025

and successfully completed and passed the competency exam.

Certificate:
ON-188748-9895-051925

Date of Examination:
19-May-2025
Date of Expiration:
19-May-2026

A. Zwanenburg
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

APPENDIX B

LABORATORY REPORTS AND CHAIN-OF-CUSTODY

eurofins | Built Environment Testing

Report for:

Christine McNally, CSM
ProTex
1945 E Watkins Street
Phoenix, AZ 85034

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: Luke Air Force Base; Building 1365
EML ID: 4414515

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 02-18-2026

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA 600/R-93-116, EBET-PLM-SOP83921)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	3

Location: 1A, Drywall System Lab ID-Version‡: 22149578-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: 1B, Drywall System Lab ID-Version‡: 22149579-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Sample Composite Homogeneity:	Good

Location: 1C, Drywall System Lab ID-Version‡: 22149580-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 2A, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149581-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

Location: 2B, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149582-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

Location: 2C, 1"x1" Cream CT w/ Grout w/ Black Mastic Lab ID-Version‡: 22149583-1

Sample Layers	Asbestos Content
Cream Ceramic Tile	ND
Tan Glue Dot	ND
Brown Grout	ND
Gray Grout	ND
White Mortar	ND
Black Mastic	10% Chrysotile
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 3A, Gray 4" VCB

Lab ID-Version‡: 22149584-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Sample Composite Homogeneity:	Good

Location: 3B, Gray 4" VCB

Lab ID-Version‡: 22149585-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: 3C, Gray 4" VCB

Lab ID-Version‡: 22149586-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: 4A, Block + Mortar

Lab ID-Version‡: 22149587-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

Location: 4B, Block + Mortar

Lab ID-Version‡: 22149588-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

Location: 4C, Block + Mortar

Lab ID-Version‡: 22149589-1

Sample Layers	Asbestos Content
White Compound with Paint	ND
Gray Cementitious Material	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: ProTex
C/O: Christine McNally, CSM
Re: Luke Air Force Base; Building 1365

Date of Sampling: 02-12-2026
Date of Receipt: 02-13-2026
Date of Report: 02-18-2026

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

Analyst: Jason Bosse

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins | Built Environment Testing

www.eurofinsus.com/Built

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	ProTex	Address:	1102 W. Southern Ave
Contact:	Christine McNally	Special Instructions:	
Phone:	602-272-7891		

PROJECT INFORMATION

Project ID:	Luke Air Force Base		
Project Description:	Building 1365		
Project Zip Code:		Sampling Date/Time:	2/12/26 1300
PO Number:		Sampled By:	Sarah Ellig

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate
Other Requests

004414515

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
1A	DRYWALL SYSTEM	B	STD	[redacted]	BATHROOM
1B	"			1?	[redacted] OFFICE
1C	"				HALLWAY
2A	1"x1" CREAM CT w/			20 SF	
2B	GROUT w/ BLACK			1	
2C	" " MASTIC				
3A	GRAY 4" VCB			5 SF	
3B	"			1	
3C	"				
4A	BLOCK + MORTAR				N SIDE
4B	"				W. SIDE
4C	"	✓			" "
5A					
5B					
5C					

Spore Trap Analysis; Other biological particles - supplement; Direct Microscopic Exam (Qualitative); Quantitative spore count direct exam; Dust Characterization; 1-Media Surface Fungi (Genus ID + Asj; Culturable Air Fungi (Genus ID + Asp.; Gram Stain and Counts (Culturable Air; *Legionella* culture; Total Coliform, *E.coli* (Presence/Absen; QuantiTray-Sewage Screen; OTHER: (please specify test)

Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400); Asbestos Bulk - PLM; Lead (Pb) - Flame AA; PCR (please specify test); Allergens (please specify test)

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Sarah Ellig	2/13/26 0700		
		[signature]	8:15am 2/13/26

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-and-forms

©COPYRIGHT 2022 EUROFINS EPK BUILT ENVIRONMENT TESTING, LLC