MOUNTAIN HOME THEATRE

Finish Revisions 1/28/2026

Updated 06/30/2026

Bldg. 35

P.2	Broadloom/Stair Rod	Revision_AE601, AE801
P.3	First Floor Finish Plan	Revision_AE601, AE801
P.4	Second Floor Finish Plan	Revision_AE601, AE801
P.5	Restroom Floor Plan	Revision_AE601, AE801
P.6	Restroom Elevations	Revision_AE601, AE410
P.7	Restroom Finishes	Revision_AE601, Plumbing
P.8	Restroom Finishes	Revision_AE601, Fixtures
P.9	Stain Finishes	Revision_AE601
P.10	Plaster & Chair Details	Revision_AE601
P.11	Auditorium Details	Revision_AC141, AE101, AE601, AE605
P.12	Electrical Outlets/Vents	Revision_Electrical
P.13	Solar Control Windows	Revision_AE601
P.14	Finish Schedule	
P.15	Finish Schedule	

NOTE:

Verify All Finishes With VA Interior Designer

BROADLOOM / STAIR ROD
AE801

Placement:
Grand Staircases runner, Auditorium 101, Balcony 201, Lobby 200 Two Area Rugs

Broadloom

Basis of Design - CPT-1
Manufacture: Shaw Contract
Style Name: Batik Ultraloc
Style Number: 60785
Color Name: Recollect
Color Number: 85215
Collection: Gather
Product Type: Broadloom
Construction: Multi-level pattern loop

Carpet Tile

Basis of Design - CPT-2
Manufacture: Shaw Contract
Style Name: Ikat Tile
Style Number: 5T346
Color Name: Recollect
Color Number: 85215
Collection: Gather
Product Type: Carpet Tile
Construction: Multi-level pattern loop

Placement:
Grand Staircases

Stair Rod

Basis of Design
Manufacture: Eastern Promise
Finials: Cairo
Diameter: 5/8"
Color Name: Antique Brass
Rod Type: Reeded
Measuring: Length should be approx. 6" over the width of the carpet. (3" ea. side)

First Floor Finish Plan
AE601, AE801

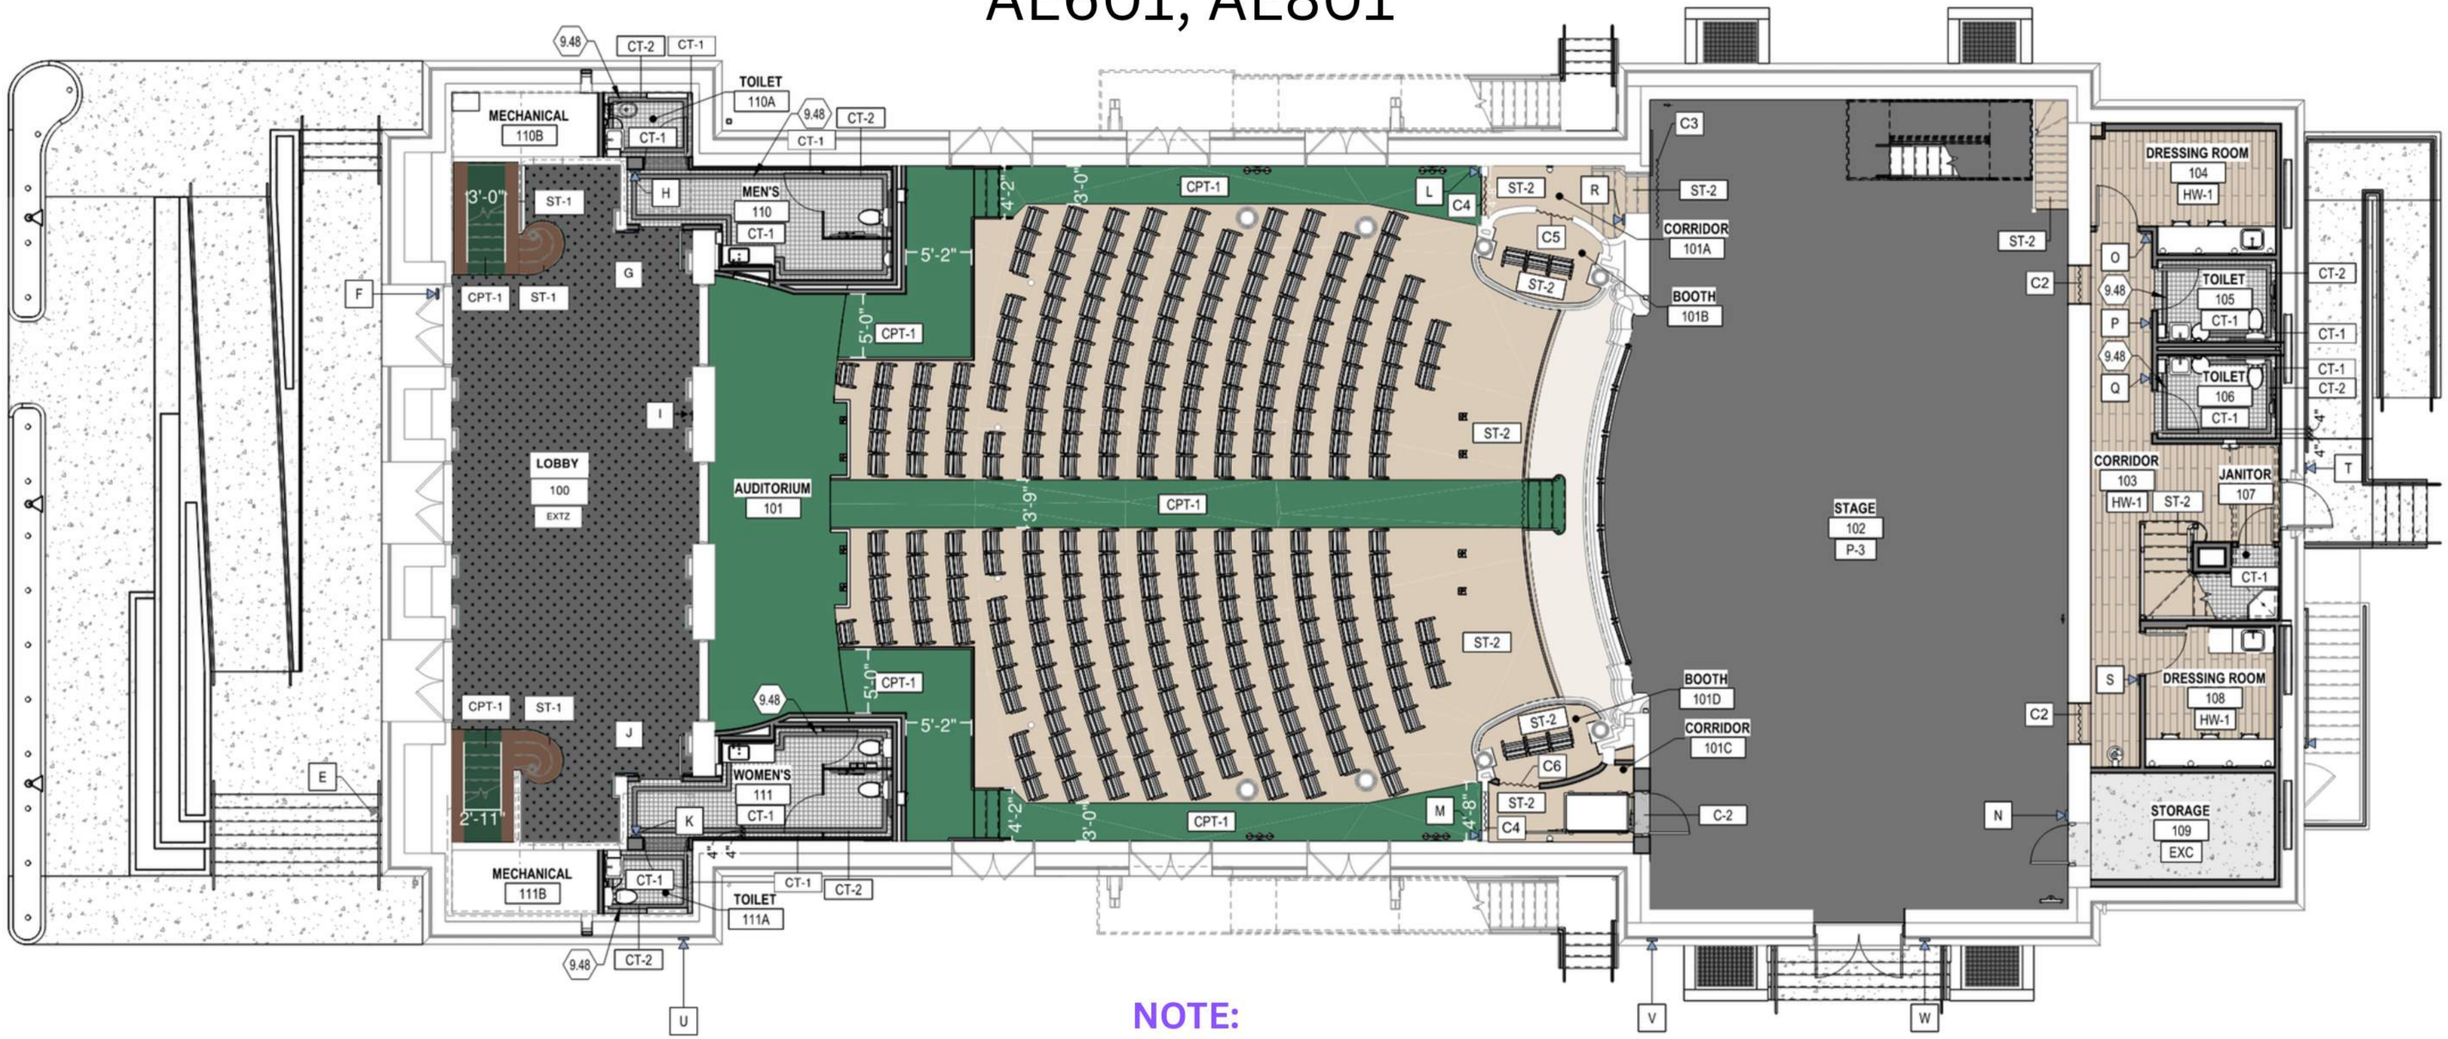

2 FIRST FLOOR FINISH PLAN
1/8" = 1'-0"

NOTE:

Lobby 101: Remove Existing Carpet, Sand, Repair, and Refinish
Existing Hardwood and Existing Terrazzo.
No Stairs into Orchestra Pit
Install Carpet as Illustrated. All Exposed Edges to Have Serged Edge Binding w/Standard Non Skid Backing on Stairs w/Stair Rods

Balcony, Second Floor Finish Plan
REVISION_AE802

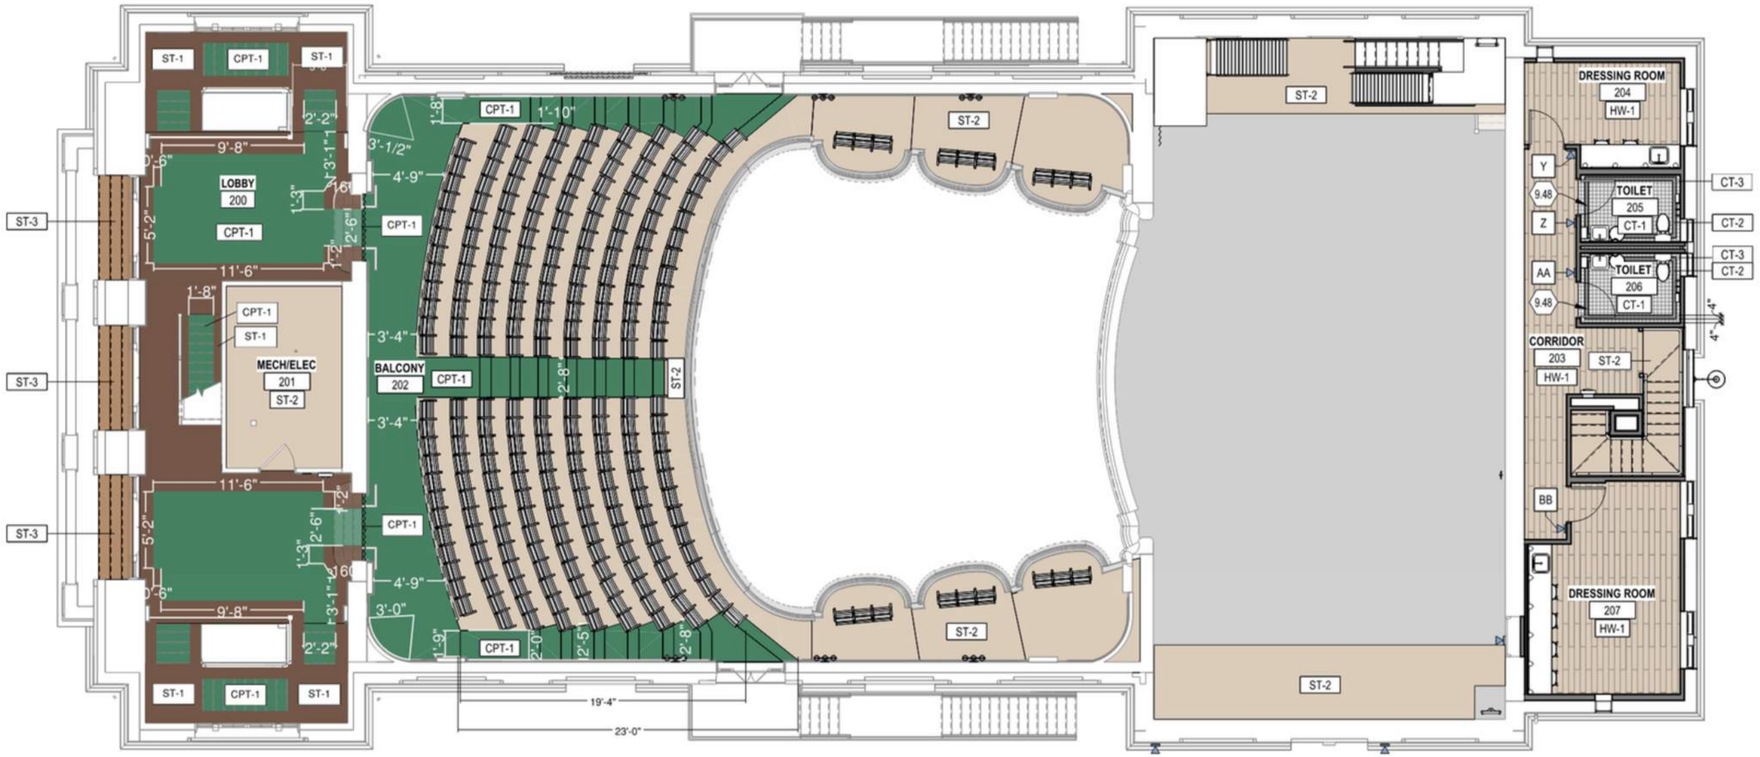

1 BALCONY, SECOND FLOOR, & CATWALK FINISH PLAN
1/8" = 1'-0"

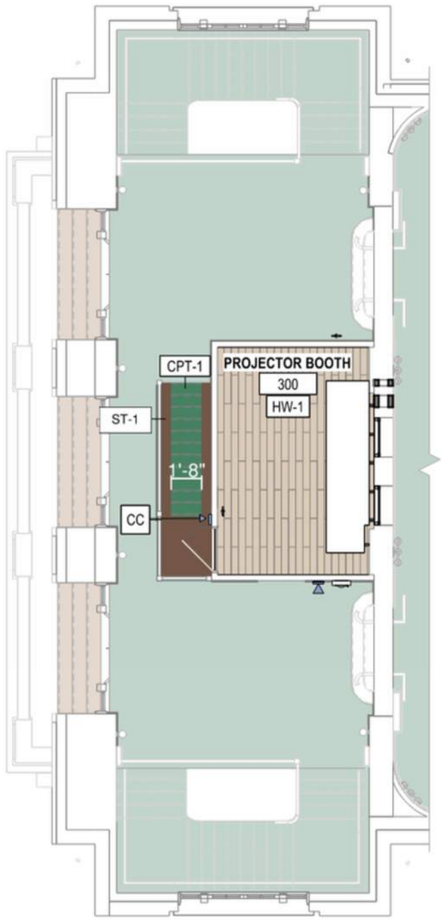

2 PROJECTOR BOOTH FINISH PLAN
1/8" = 1'-0"

NOTE:

Lobby 200: Remove Existing Carpet, Sand, Repair, and Refinish Existing Hardwood.

Install Carpet as Illustrated. All Exposed Edges to Have Serged Edge Binding w/Standard Non Skid Backing on Stairs w/Stair Rods

RESTROOM FLOOR PLAN
REVISIONS TO AE601, AE801,

Placement:
All Restrooms



Main Floor Tile

Basis of Design
Manufacture: Shaw Floors
Style Name: RETRO NECTAR
Style Number: 395TS
Color Name: Black
Color Number: 00900
Collection: Ceramic Solutions
Product Type: Accent
Construction: Glass
Size: 12.63" x 13.25"
Thickness: 0.236"
Shade Texture Variation: M
Surface Texture: Mesh Mounted Glass Hex Mosaic
Surface Finish: Matte
Water Absorption: > 0.50% (Vitreous)
Wet CoF: > 0.42
Country of Origin: China

Placement:
All Restrooms, @ the
base of parimeter walls

Basis of Design
Manufacture: Schluter Systems
Style Name: Anodized Aluminum
Style Number: A80AM
Color Name: Dilex (antique bronze)
Color Number: 00900

Placement:
All Restrooms



Accent Tile

Basis of Design
Manufacture: Shaw Floors
Style Name: RETRO HEX
Style Number: 392TS
Color Name: BLACK HEX
Color Number: 00900
Collection: Ceramic Solutions
Product Type: Accent
Construction: Glass
Size: 12" x 12.25"
Thickness: 0.236"
Shade Texture Variation: M
Surface Finish: Matte
Water Absorption: > 0.50% (Vitreous)
Country of Origin: China

Placement:
All Restrooms



Accent Tile

Basis of Design
Manufacture: Shaw Floors
Style Name: RETRO HEX
Style Number: 392TS
Color Name: WHITE HEX
Color Number: 00100
Collection: Ceramic Solutions
Product Type: Accent
Construction: Glass
Size: 12" x 12.25"
Thickness: 0.236"
Shade Texture Variation: M
Surface Finish: Matte
Water Absorption: > 0.50% (Vitreous)
Country of Origin: China

Basis of Design
Manufacture: TEC_Grout
Color Name: Jet Black
Color Number: 950
ALL FLOOR TILE GROUT

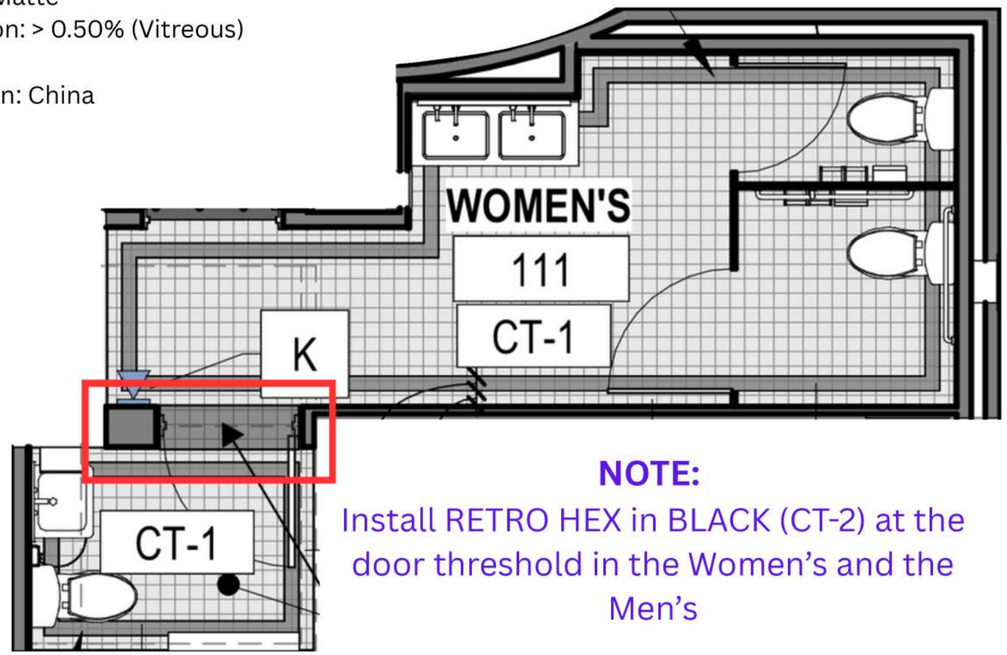

NOTE:
Install RETRO HEX in BLACK (CT-2) at the door threshold in the Women's and the Men's

RESTROOM INTERIOR ELEVATIONS
Revisions_AE601 & AE410

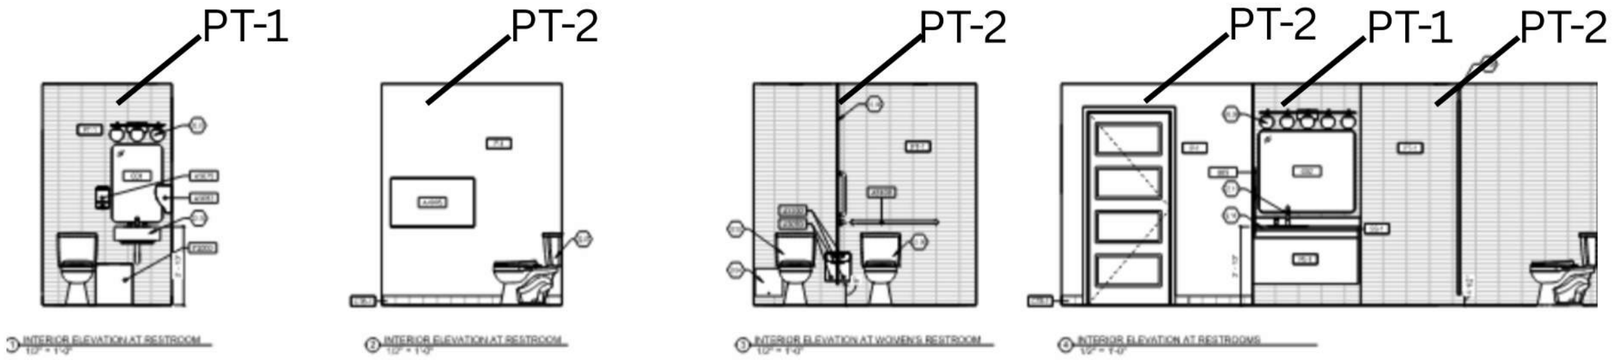

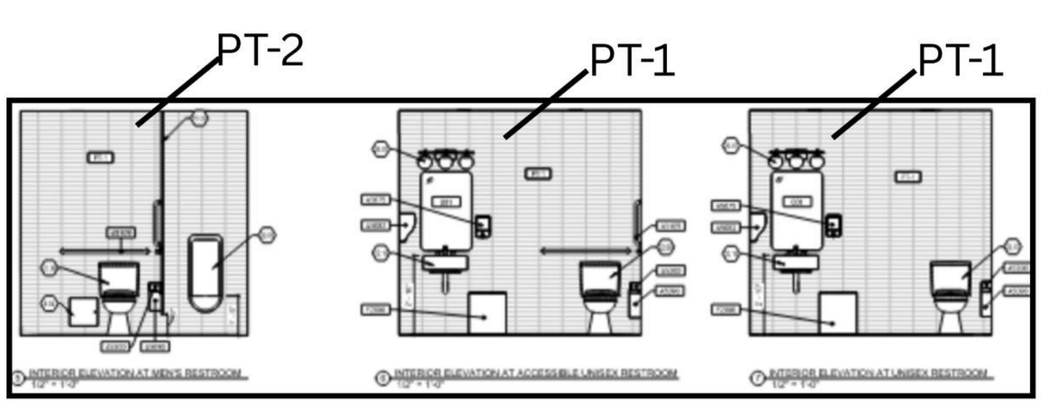

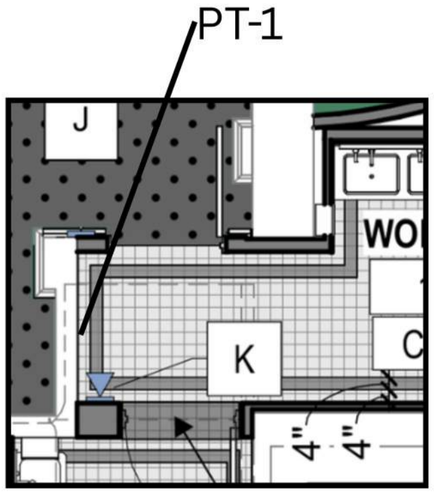



Basis of Design

Tag: PT1 - VERTICAL INSTALLATION
Manufacture: Landmark Ceramics
Style Name: Handmade Collection
Color: Forrest Green Glossy Finish
Application: Wall
Item: 201-1903

Basis of Design

Tag: PT2
Manufacture: Landmark Ceramics
Style Name: Exquisite Collection
Color: Calacatta Gold
Size: 12 x 24
SKU #: 190-2036
Application: Wall

Basis of Design

Manufacture: TEC_Grout
Color Name: Design FX Bronze
ALL WALL TILE GROUT

NOTE:

ADD WOOD CROWN TO MATCH EXISTING THEATRE CROWN
ALL SINK WALLS ARE PT-1, ALL OTHER WALLS PT-2

RESTROOM FINISHES

Rms 110, 111

Thornhill Double Brass Console Bathroom Sink
(INC. Custome Countertop, Upstand and Sink
47" (W) x 34" (H) x 24" (D) Double Sink

(MAKE NECESSARY PLUMBING ARRANGEMENTS TO ACCOMODATE DOUBLE SINK)

Rooms

Basis of Design

Manufacture: Rutland London
Material: Polished (Unlacquered) Brass
upstand Color: Antique Brass
Custom Counter: MFR: Cambria
Counter Name: Hermitage
Counter Color: White, Beige, Waterstone
Counter: Finsih: Cambria Satin
Counter: Thickness: 3 cm
Counter Edge Detail: Half Bullnose Edge
P-Trap: Dorset

Front of House Vanity Counter Rms 111, 112

Basis of Design

MFR: Cambria
Counter Name: Hermitage
Counter Color: White, Beige, Waterstone
Counter: Finish: Polished
Counter Thickness: 3 cm
Counter Edge Detail: Half Bullnose Edge

Vanity Counter_Dressing Rooms 104, 108, 204, 207



Basis of Design

MFR: Corian
Counter Name: Ash Aggregate
Counter Color: Mid Tone Grey
Counter: Finish: Polished
Counter Thickness: 3 cm
Counter Edge Detail: Half Bullnose Edge

Dorset P-Trap

Basis of Design

Manufacture: Rutland London
Material: Polished (Unlacquered) Brass
Upstand Color: Antique Brass
P-Trap: Dorset

3 Hole Sink Faucet

Basis of Design

Manufacture: Rutland London
Material: Polished (Unlacquered) Brass
Upstand Color: Antique Brass
Monkwell Black Ceramic Lever
Swan Neck

Rms 110A, 111A

Dulwich Single Brass Console Bathroom Sink
24" (W) x 34" (H) x 24" (D) Single Sink

Basis of Design

Manufacture: Rutland London
Material: Polished (Unlacquered) Brass
Upstand Color: Antique Brass
P-Trap: Dorset

Salsibury Tilting Mirror

Basis of Design

Manufacture: Rutland London
Material: Polished (Unlacquered) Brass
Upstand Color: Antique Brass
Custom Dimensions:
30" H x 42" W x 2.5" D
30" H x 24" W x 2.5" D

Antique Brass Finish

Rutland London Quotes:

Contact: Rupert
Email: Sales@Rutlandlondon.com
Order Product From: Mountainland in Utah
Custom Manufactured to meet ADA standards

NOTE: Door Schedule_ Rm 110 & 111

Solid core doors need to be removed and replaced with matching historic doors.

RESTROOM FINISHES

Revision_AE801 & AE602

Ironwood Bathroom Stalls

Basis of Design
Manufacture: Ironwood
Material: High Pressure Laminate
Color: 909-58 Matte Black
Door style: Molding
Mounting Style: Headrail Braced
Hardware: Continuous Hardware
Privacy: Zero Sightline
All hardware: Gold

Stall Door Molding

Black Matte Laminate Sheet

Hardware Finish

Elvari Manuel Liquid or foam Soap Dispenser, Surface Mount

Basis of Design
Manufacture: Bradely
Color Brass
Model 6B1-11

Horizontal BabElvari Grabbar

Basis of Design
Manufacture: Bradley
Color: Brass
Model: 8B1

Horizontal Baby Changer Station

Basis of Design
Manufacture: Bradley
Model: 9633 Black Bradex
Dimensions: 34 1/4" H x 15 3/8" W x 4" D

Elvari Coat/Robe Hook

Basis of Design
Manufacture: Bradley
Model: 9B1
Color: Brushed Black
Inside of Bathroom Stall Doors
Mtd at 36" A.F.F.

Elvari Napkin Disposal, Surface Mount

Basis of Design
Manufacture: Bradley
Model: 4B2-11
Material: Stainless Steel
Color: Brass
Dimensions: 11-1/16" H x 10 3/4" W x 4" D

Elvari Toilet Paper, Surface Mount or Recessed

Basis of Design
Manufacture: Bradley
Model: 5B2
Material: Brass
Color: Brass
Dimensions: 11-1/16" H x 10 3/4" W x 4" D

Elvari Surface-Mounted Towel Dispensar

Basis of Design
Manufacture: Bradley
Model: 2B1
Material: Stainless Steel
Color: Brushed Black
Dimensions: 9-13/16" H x 13 15/15" W x 4" D

Elvari Surface-Mounted Towel Dispensar

Basis of Design
Manufacture: Bradley
Model: 3B1-00 or 3B1-10 Series
Material: Stainless Steel
Color: Brushed Black
Dimensions: 18 Gallon or 12 Gallon

ST-1_Wood Stain

Revision_AE601

All Stains are to match existing
Arms of Auditorium are to match darker wall stain

P-6

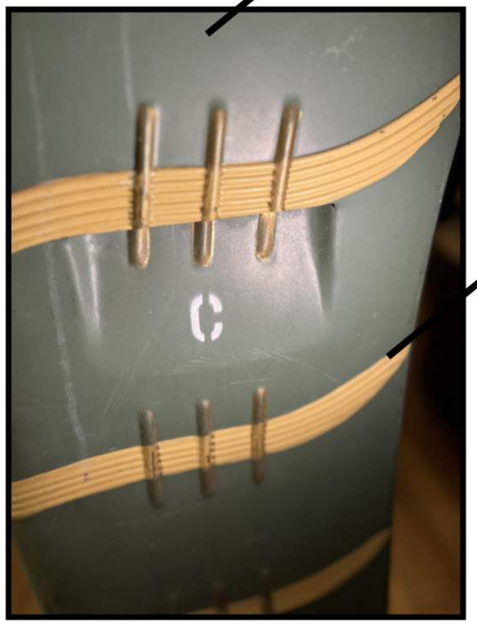

P-5

Basis of Design
Manufacture: Absecon
Color: Bedford-Butternut

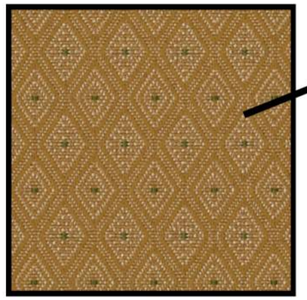

Match Stain on arms of the chairs to the Wood Work on Box Seat

Plaster & Chair Details

Revision_AE601

Venetian Plaster

P-1 - PPG Paint Oatmeal (1023-1)



Auditorium Chair Accent Color

P-5 - PPG Paint (MTL 137)

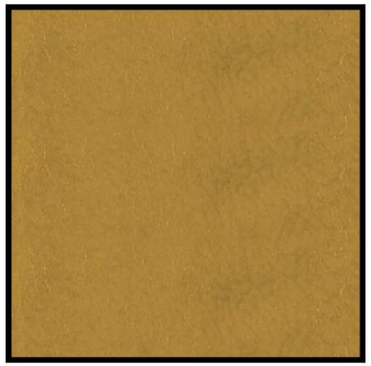

Auditorium Chair Paint Color

P-6 - PPG Paint Evergreen Boughs (1129-7)

Auditorium Chair Fabric

Basis of Design

Manufacture: Absecon

Color: Bedford-Butternut

NOTE:

Varify All Finishes With VA Interior Designer

AUDITORIUM Details

Revision_AC141, AE101, AE601, AE605

Reflected Ceiling

Revision_AC141

Basis of Design

TAG: D1

Manufacture: Beaux-Arts Classic Products.com
Style: Victorian Medallion
Color: Rubbed Bronze
Size: 4"
SKU: Lr-141

Recessed Lighting Covers for all can lights

CUSTOM LIGHTING

Revision_AC141

Basis of Design

TAG: CH1

Custom Beaux-Arts Chandelier
Custom Beaux-Arts Wall Sconce
Custom Beaux-Arts Vanity Light

STAGE CURTAIN

AE605

Basis of Design

Manufacture: Fred Krieger Fabrics
Color: Hunter
Item: Epic Velour 25 oz-IFR
Fabric Width: 54"



Custom Beaux-Arts Stage Curtains

REMOVE STAIRS TO ORCHESTRA PIT

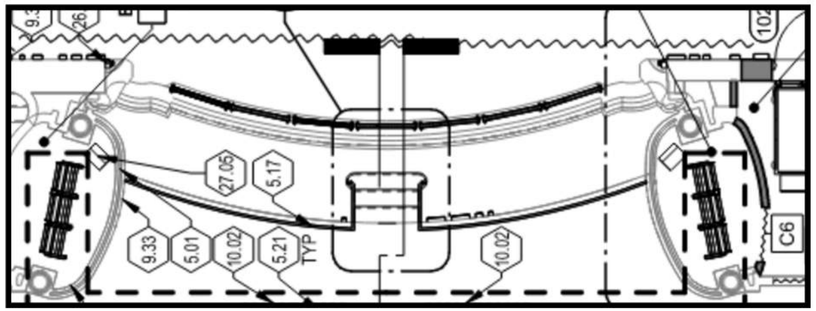

ORCHESTRA PIT

AE101

Basis of Design

Orchestra pit railing_wood post, curtain and matching brass railing.

No stairs will be built from the auditorium to orchestra pit.

ELECTRICAL OUTLETS/VENTS

Basis of Design
Manufacture: House of Antique Hardware
Style: Art Nouveau
Material: Solid Brass
Color: Hand Applied Patina

All Outlets and Light Switches

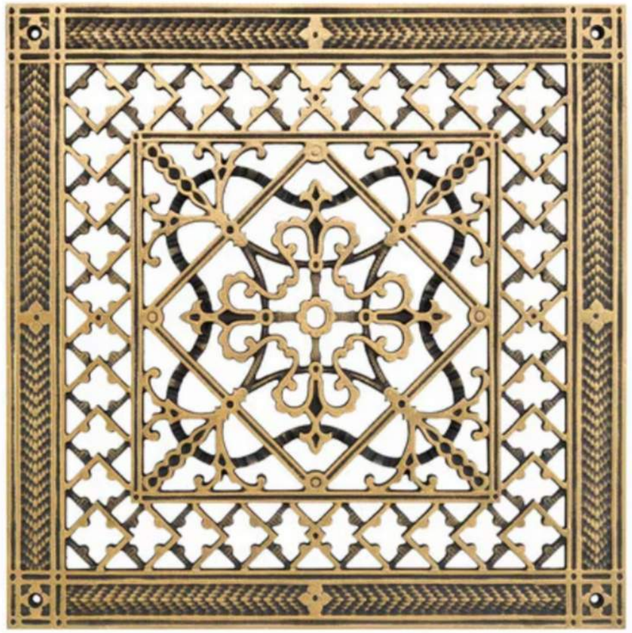

Basis of Design
Manufacture: House of Antique Hardware
Style: Art Nouveau
Material: Solid Brass
Color: Hand Applied Patina

For All Vents, Verify With VA Interior Designer

Solar Control Window Film

*ALL EXTERIOR WINDOWS

% Total Solar Transmittance	% Total Solar Reflectance	% Total Solar Absorptance	% Visible Light Transmittance	% Visible Reflectance (exterior)	% Visible Reflectance (interior)	Winter U-value	Shading Coefficient	% Ultraviolet Ray Protection (wavelengths 300-380nm)	Emissivity	Solar Heat Gain Coefficient	% Total Solar Energy Rejected	Light-to-Solar Heat Gain Ratio (LSG)*	% Summer Solar Heat Gain Reduction*	% Winter Heat Loss Reduction*	% Glare Reduction*	% IR Energy Rejection (IRER)**	% Selective IR Rejection (SIRR)***
41	6	53	78	9	9	1.04	0.66	>99	0.89	0.57	43	1.37	34	0	13	60	85

ROOM FINISH SCHEDULE

NUMBER	NAME	AREA	WALL FINISH NORTH	WALL FINISH EAST	WALL FINISH SOUTH	WALL FINISH WEST	BASE FINISH	FLOOR FINISH	CEILING FINISH	NOTES
00-BASEMENT										
001	MECH/ELEC ROOM	174 SF	P-1	P-1	P-1	P-1	--	EXC	--	
002	MECH/ELEC ROOM	1632 SF	P-1	P-1	P-1	P-1	--	EXC	--	
003	MECH/ELEC ROOM	418 SF	EXB	EXB	EXB	EXB	--	C-1	--	
003A	IT CLOSET	83 SF	P-1	P-1	P-1	P-1		C-1	EXPOSED	
005	ELECTRICAL ROOM	161 SF	P-1	P-1	P-1	P-1	--	EXC	--	
006	EMERG ELEC ROOM	68 SF	EXB	EXB	EXB	EXB	--	C-1	--	
00.1-ORCHESTRA PIT										
004	ORCHESTRA PIT	201 SF	RW-4	RW-4	RW-4	RW-4	EXWB	ST-1	--	
01.1-STAGE										
102	STAGE	1888 SF	EXB	EXB	EXB	EXB	--	P-3	CP-1	
104	DRESSING ROOM	112 SF	P-4	P-1	P-1	P-1	WB-2		CP-1	
105	TOILET	52 SF	P-1	PT-1	P-1	P-1	~~PTB-1~~	CT-1/CT-2	CP-1	ROOM FINISH NOTE #1
106	TOILET	53 SF	P-1	P-1	P-1	PT-1	~~PTB-1~~	CT-1/CT-2	CP-1	ROOM FINISH NOTE #1
107	JANITOR	28 SF	P-1	P-1	P-1	P-1	~~PTB-1~~	CT-1	CP-1	ROOM FINISH NOTE #1
01.2-FIRST FLOOR										
100	LOBBY	812 SF	P-1	P-1	P-1	P-1	EXMB	EXTZ	CP-1	
101	AUDITORIUM	2655 SF	P-1	P-1/P-2	P-1	P-1	EXWB	CPT-1	CP-1	
101A	CORRIDOR	39 SF	P-1	P-1	P-1	P-1	EXWB	ST-1	CP-1	
101B	BOOTH	46 SF	P-1	P-1	P-1	P-1	EXWB	ST-1	CP-1	
101C	CORRIDOR	45 SF	P-1	P-1	P-1	P-1	EXWB	ST-1	CP-1	
101D	BOOTH	40 SF	P-1	P-1	P-1	P-1	WB-2	ST-1	CP-1	
103	CORRIDOR	249 SF	P-1	P-1	P-1	P-1	WB-2	HW-1	CP-1	
108	DRESSING ROOM	98 SF	P-4	P-1	P-1	P-1	WB-2	CPT-2	CP-1	
109	STORAGE	106 SF	P-1	P-1	P-1	P-1	WB-2	EXC	CP-1	
110	MEN'S	125 SF	PT-2	PT-2	PT-2	PT1/PT-2	~~PTB-1~~	CT-1/CT-2	CP-1	NO COVE BASE, RUN TO FLOOR/INSTALL SLUTER STRIP
110A	TOILET	31 SF	PT-2	PT-2	PT-1	PT-2	~~PTB-1~~	CT-1/CT-2	CP-1	NO COVE BASE, RUN TO FLOOR/INSTALL SLUTER STRIP
110B	MECHANICAL	50 SF	--	--	--	--	--	--	--	
111	WOMEN'S	125 SF	PT-2	PT1/PT-2	PT-2	PT-2	~~PTB-1~~	CT-1/CT-2	CP-1	NO COVE BASE, RUN TO FLOOR/INSTALL SLUTER STRIP
111A	TOILET	30 SF	PT-2	PT-2	PT-1	PT-2	~~PTB-1~~	CT-1/CT-2	CP-1	NO COVE BASE, RUN TO FLOOR/INSTALL SLUTER STRIP
111B	MECHANICAL	50 SF	--	--	--	--	--	--	--	
02.1-BACK LEVEL 2										
203	CORRIDOR	251 SF	P-1	P-1	P-1	P-1	EXWB	HW-1	CP-1	
204	DRESSING ROOM	115 SF	P-4	P-1	P-1	P-1	WB-2	CPT-2	CP-1	
205	TOILET	51 SF	P-1	PT-1	P-1	P-1	~~PTB-1~~	CT-1	CP-1	ROOM FINISH NOTE #1
206	TOILET	53 SF	P-1	P-1	P-1	PT-1	~~PTB-1~~	CT-1	CP-1	ROOM FINISH NOTE #1
207	DRESSING ROOM	226 SF	P-4	P-1	P-1	P-1	EXWB	CPT-2	CP-1	
02.2-BALCONY										
200	LOBBY	571 SF	P-1	P-1	P-1	P-1	EXWB	CPT-1	CP-1	
201	MECH/ELEC	160 SF	P-1	P-1	P-1	P-1	EXWB	ST-1	CP-1	
202	BALCONY	1950 SF	P-1	P-1/P-2	P-1	P-1	EXWB	ST-1	CP-1	
03-BOOTH										
300	PROJECTOR BOOTH	171 SF	P-1	P-1	P-1	P-1	EXWB	CPT-2	CP-1	

DOOR SCHEDULE

DOOR NUMBER	DOOR HARDWARE	ACCESS CONTROL	HARDWARE FINISH	DOOR WIDTH	DOOR HEIGHT	THICKNESS	DOOR/FRAME TYPE	DOOR MATERIAL	FRAME MATERIAL	HEAD	JAMB	SILL	FIRE RATING	NOTES
00-BASEMENT														
001	HW-4D	--	630 SATIN STAINLESS STEEL	2' - 6"	7' - 0"	0' - 1 3/4"	A.1	HM	HM	EXIST.	EXIST.		--	
003	HW-SH-3D	YES	630 SATIN STAINLESS STEEL	3' - 0"	7' - 0"	0' - 1 3/4"	A.1	HM	HM	H1	J1		--	
004	HW-1B	--	630 SATIN STAINLESS STEEL	2' - 10"	6' - 6"	0' - 1 3/4"	C	HM	HM	H3	H3		90MIN	
005	HW-13	--	EXISTING	3' - 4"	7' - 0"	0' - 1 3/4"	B	EXISTING	EXISTING	EXIST.	EXIST.		--	
006	HW-SH-3D	YES	630 SATIN STAINLESS STEEL	3' - 0"	7' - 0"	0' - 1 3/4"	A.1	HM	HM	H1	J1		--	
01.1-STAGE														
102A	HW-1B	--	SATIN BRASS, CLEAR COATED	3' - 5"	7' - 0"	0' - 1 3/4"	C	HM	HM	EXIST.	EXIST.		90MIN	
102B	HW-4A	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	A.1	HM	HM	H4	J4		--	
102C	HW-E9C	--	SATIN BRASS, CLEAR COATED	(2) 3' 2 1/2"	10' - 2"	0' - 1 3/4"	K	SCWD	HM	H4	J4		--	
103	HW-SH12A	YES	SATIN BRASS, CLEAR COATED	3' - 4"	7' - 0"	0' - 1 3/4"	D	HM	HM	H5	J5		--	INSULATED EXTERIOR DOOR
104	HW-4D.1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
105	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
106	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
107	HW-5		SATIN BRASS, CLEAR COATED	2' - 6"	6' - 10"	0' - 1 3/4"	A	SCWD	HM	H1	J1		90MIN	
108	HW-4D.1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
109	HW-5	--	SATIN BRASS, CLEAR COATED	2' - 10"	6' - 6"	0' - 1 3/4"	A.2	HM	HM	H4	J4		90MIN	
01.2-FIRST FLOOR														
100A	HW-E9A	YES	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 1 3/4"	H	EXISTING	EXISTING	H6	J6.1		--	
100B	HW-E9A	--	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 1 3/4"	H	EXISTING	EXISTING	H6	J6.1		--	
100C	HW-SH15A	--	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 1 3/4"	H	EXISTING	EXISTING	H6	J6.1		--	
100D	HW-E11	--	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 3"	G	EXISTING	EXISTING	H7	J7		--	REPLACE CURTAINS AT DOOR ON LOBBY SIDE - TYPE C8 - SEE AE605
100E	HW-E11	--	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 3"	G	EXISTING	EXISTING	H7	J7		--	REPLACE CURTAINS AT DOOR ON LOBBY SIDE - TYPE C8 - SEE AE605
100F	HW-E11	--	SATIN BRASS, CLEAR COATED	(2) 2' - 9"	7' - 3"	0' - 3"	G	EXISTING	EXISTING	H7	J7		--	REPLACE CURTAINS AT DOOR ON LOBBY SIDE - TYPE C8 - SEE AE605
101A	HW-E9B	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
101B	HW-E9C	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
101C	HW-E9C	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
101D	HW-E9B	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
101E	HW-E9C	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
101F	HW-E9C	--	SATIN BRASS, CLEAR COATED	(2) 2' - 11"	8' - 4"	0' - 1 3/4"	J	EXISTING	EXISTING	H6	J6.2		--	AUTO OPERATOR CONNECTED TO SMOKE CONTROL SYSTEM
110	HW-1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	E	SCWD	WD	H8	J8		--	
110A	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	E	SCWD	HM		SEE 7/AE501		--	
111	HW-1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	E	SCWD	WD	H8	J8		--	
111A	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	E	SCWD	HM		SEE 7/AE501		--	
02.1-BACK LEVEL 2														
204	HW-4D.1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
205	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
206	HW-2F	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
207	HW-4D.1	--	SATIN BRASS, CLEAR COATED	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	HM	H1	J1		--	
02.2-BALCONY														
200A	HW-E10	--	DARK SATUARY BRONZE, CLEAR COATED	(2) 2' - 6"	7' - 9"	0' - 1 3/4"	L	EXISTING	EXISTING	H6	J6.1		--	
200B	HW-E10	--	DARK SATUARY BRONZE, CLEAR COATED	(2) 2' - 6"	7' - 9"	0' - 1 3/4"	L	EXISTING	EXISTING	H6	J6.1		--	
200C	HW-E10	--	DARK SATUARY BRONZE, CLEAR COATED	(2) 2' - 6"	7' - 9"	0' - 1 3/4"	L	EXISTING	EXISTING	H6	J6.1		--	
201	HW-4F	--	SATIN BRASS, CLEAR COATED	3' - 0"	6' - 6"	0' - 1 3/4"	A.1	EXISTING	EXISTING	EXIST.	EXIST.		--	
202A	HW-E4B	--	SATIN BRASS, CLEAR COATED	(2) 1' - 6"	8' - 4"	0' - 1 3/4"	M	EXISTING	EXISTING	H6	J6.1		--	REPLACE CURTAINS AT DOOR - TYPE C8 - SEE AE605
202B	HW-E4B	--	SATIN BRASS, CLEAR COATED	(2) 1' - 6"	8' - 4"	0' - 1 3/4"	M	EXISTING	EXISTING	H6	J6.1		--	REPLACE CURTAINS AT DOOR - SEE 1/AE423
03-BOOTH														
300	HW-4E	--	SATIN BRASS, CLEAR COATED	3' - 0"	6' - 6"	0' - 1 3/4"	A.1	EXISTING	EXISTING	EXIST.	EXIST.		--	
04.2-ATTIC														
400	HW-5A	--	630 SATIN STAINLESS STEEL	2' - 0"	6' - 4"	0' - 1 3/4"	A.2	HM	HM	H4	J4		90MIN	INSULATED EXTERIOR DOOR
05-RAFTERS														
500	HW-5A	--	630 SATIN STAINLESS STEEL	2' - 6"	5' - 6"	0' - 1 3/4"	A.2	HM	HM	H4	J4		90MIN	INSULATED EXTERIOR DOOR

FINISH LEGEND

MARK	DESCRIPTION	BASIS OF DESIGN	SIZE	STYLE/ COLOR	FIRE CLASS	COMMENTS	FINISH PHASE
NEW							
C-1	SEALED CONCRETE	--	--	--	--		NEW
CPT-1	CARPET	SHAWCONTRACT	--	GATHER COLLECTION - BATIK ULTRALOC 60785 - RECOLLECT - 85215	--		NEW
CRT-1	CURTAIN FABRIC	FRED KRIEGER FABRICS	--	IFR EPIC VELOUR 25OZ - HUNTER - EV25012	--	AUDITORIUM OPENINGS AND DOORS	NEW
CRT-2	CURTAIN FABRIC	FRED KRIEGER FABRICS	--	IFR ODYSSEY VELOUR 15OZ - BLACK		BACKSTAGE CURTAINS	NEW
CT-1	PORCELAIN FLOOR TILE		1" HEXAGON		--		NEW
CT-2	PORCELAIN FLOOR TILE - ACCENT BAND		1" HEXAGON		--	ACCENT BAND FLOOR TILE	NEW
~~CTB-1~~	~~PORCELAIN TILE BASE~~	~~DEL CONCA FAETENO~~	~~2" x 6" BULLNOSE~~		--	~~TILE BASE TO MATCH MAIN FLOOR TILE SELECTION~~	NEW
FAB-1	CHAIR FABRIC	ABSECON	--	BEDFORD -BUTTERNUT	--	REUPHOLSTER EXISTING CHAIRS	NEW
HW-1	HARDWOOD FLOOR	--	--	MATCH EXISTING	--	MATCH EXISTING HARDWOOD FLOORING. STAIN ST-2	NEW
P-1	PAINT - TYPE 1	PPG	--	OATMEAL ALL PLASTER WALLS TO RECIEVE VENETIAN PLASTER	--	ALL WALLS TO RECEIVE THIS PAINT UNLESS NOTED OTHERWISE.	NEW
P-2	PAINT - TYPE 2	--	--	MATCH EXISTING COLOR AND SHEEN	--	TRIM AND ORNAMENTATION PAINT. MATCH EXISTING APPLICATION METHOD.	NEW
P-3	PAINT - TYPE 3	PPG	--	STARLESS SKY - PPG0995-7 MATTE FINISH	--	ALL EXPOSED DUCTWORK AT STAGE AND NEW METAL STAIR AND SHIPS LADDERS	NEW
PL-1	PLASTIC LAMINATE	TO BE SELECTED	--				NEW
PT-1	PORCELAIN WALL TILE	LANDMARK CERAMICS	2 1/2" x 10"	HANDMADE COLLECTION, ITEM #201-1903 - FOREST GREEN GLOSS FINISH	--		NEW
SS-1	SOLID SURFACE	CAMBRIA	2" THICKNESS	SIGNATURE SERIES - HERMITAGE POLISHED	--		NEW
SS-2	SOLID SURFACE	CORIAN	--	DEEP NOCTURNE	--	PROJECTOR BOOTH COUNTERTOP	NEW
ST-1	STAIN - TYPE 1	MINIWAX	--	MATCH EXISTING STAIN	--	REFINISH WOOD STAIR TREADS AND RISERS AND HANDRAILS	NEW
ST-2	STAIN - TYPE 2	MINIWAX	--	MATCH EXISTING STAIN	--	REFINISH HARDWOOD FLOORS AND STAIR TREADS AND RISERS	NEW
ST-3	STAIN - TYPE 4	--	--	MATCH EXISTING STAIN	--	STAIN NEW STAIRS AT EXTERIOR BALCONY	NEW
TP-1	TOILET PARTITION	IRONWOOD	--	HIGH PRESSURE LAMINATE - MATTE BLACK		MOLDING ON DOOR, HEADRAIL BRACED, CONT. HARDWARE, ZERO SIGHTLINE, GOLD HARDWARE	NEW
WB-1	WOOD BASE - TYPE 1	--	--	MATCH EXISTING PROFILE - MATCH EXISTING STAIN	--	PROFILE TO MATCH EXISTING DEMOLISHED WOOD BASE	NEW
WB-2	WOOD BASE - TYPE 2	--	--	MATCH EXISTING PROFILE - STAIN TO MATCH EXISTING	--	PROFILE TO MATCH EXISTING DEMOLISHED WOOD BASE	NEW
P-4	PAINT - TYPE 4	PPG	-	OBLIGATION (PPG1135-7)	-	THEATER SEAT PAINT	NEW
P-5	PAINT - TYPE 5	PPG	-	MTL 137	-	ACCENT PAINT ON THEATER SEATS	NEW
P-6	PAINT - TYPE 6	PPG	-	EVERGREEN BOUGHS (PPG1129-7)	-	ACCENT WALLS	NEW
CPT-2	CARPET TILE	SHAW CONTRACT	18"X36"	GATHER COLLECTION - IKAT TILE 5T346 - RECOLLECT - 85216=5	-		NEW

DOOR SCOPE GENERAL NOTES

A. VERIFY IN FIELD ALL CONDITIONS INCLUDING DIMENSIONS

B. PROVIDE CONTINUOUS HINGE AT RESTROOM DOORS.

C. DOOR SCOPE IS DIVIDED INTO NEW AND EXISTING SCOPE. FOR NEW SCOPE - PROVIDE AS SHOWN. FOR ALL EXISTING DOORS - PROVIDE THIS SCOPE:

1. REMOVE PAINT/FINISH ON DOORS AND FRAMES. REMOVE EXISTING SEALANT
2. CLEAN AND PREPARE SURFACES FOR NEW FINISHES
3. SEAL ALL EXPOSED EDGES AROUND FRAME WITH CLEAR PAINTABLE SEALANT.
4. REFINISH EXISTING SURFACES PER ELEVATIONS ON AE602.
5. PROVIDE HARDWARE SET PER SCHEDULE
4. ALL NEW DOORS TO REPLICATE EXISTING DOORS AND HARDWARE

FINISH LEGEND NOTES

1. ALL PRODUCTS LISTED IN THE FINISH LEGEND ARE BASIS OF DESIGN ONLY UNLESS NOTED OTHERWISE.

2. PROVIDE TRANSITION STRIPS AT TRANSITIONS FOR ALL DISSIMILAR FLOORING MATERIALS, TYPICAL. SEE DIVISION 9 SPECIFICATIONS.

3. ALL PLASTERED PAINTED WALLS TO RECEIVE P-1 UNLESS NOTED OTHERWISE.

4. ALL PLASTER WALLS TO RECIEVE VENETIAN PLASTER

ROOM FINISH SCHEDULE NOTES

1. NO COVE BASE ON TILE WALLS, RUN TO FLOOR/INSTALL SLUTER STRIP, DRYWALL WALLS WB-2

LUMINAIRES

NOTES:

MARK	LAMPS: DELIVERED LUMENS	LAMPS: COLOR	LOAD (VA)	VA / FT	FIXTURE VOLTAGE	Manufacturer	CATALOG NO.	DESCRIPTION	DIFFUSING MEDIA	MOUNTING (S-SURFACE R-RECESSED SM-STEM MTD WM-WALL MTD C-CHAIN MTD UC-UNDER CAB CS-CEIL SURFACE PL-POLE MOUNTED)	SEE NOTE
BL1	1428	4000K	15		120	BEGA	B99058 K4	LED PATHWAY BOLLARD	GLASS	PL	8,9,12,14, 19
C1	3966	3500K	30		120	LITHONIA	ZL1D L48 3000LM FST MVOLT 35K 80CRI	LED 4' STRIP LIGHT	DROP LENS	S	1,4,5
C2	4190	3500K	36		120	LITHONIA	ZL1D L24 3500LM FST MVOLT 35K 80CRI HC36 M12	LED 2' STRIP LIGHT	DROP LENS	C	5,6,7
C4	2742	3500K	30		120	LITHONIA	ZL1D L48 3000LM FST MVOLT 35K 80CRI HC36 M12	LED 4' STRIP LIGHT	DROP LENS	C	5,6,7
CH1	7800	3000K	108		120		SELECTED BY VA	CHANDELIER W/ LED		C	1,4,5,6,7,8, 13,15,18
D1	810	3500K	9		120	LITHONIA	LDN4-07LM-35K-L04-MVOLT-UGZ	LED 4" DOWNLIGHT	ACRYLIC	R	3,5,6,7
D2	500	3000K	26		120		SELECTED BY VA	VINTAGE STYLE LED GLOBE DOWNLIGHT		S	3,5,6,7,15, 18
FL1	10000	4000K	80		120	LITHONIA	DSXF2 LED P2 40K 70CR1 MFL MVOLT ISDBLXD	OUTDOOR LED FLOODLIGHT	GLASS	PL	8,9,12,14, 19
J1	2580	BLUE	15		120	CANLET	68-15-L-W-F-OG-59-1	LED BLUE JELLY JAR LIGHT	THERMOSET POLYESTER	WM	5
RL1	310LM/FT	3000K	<VARIES>	2 VA	120	TSLC	IR316-1.66-PM-30-2.4-C-24	INTEGRATED LED HANDRAIL LIGHTING	ACRYLIC	R	2,5,19
RL2	180LM/FT	3000K	<VARIES>	3 VA	120	KELVIX	UNI1-WL-I-100-35K-24V-NA	LED STEP LIGHTING	ACRYLIC	R	5,8,17
S1	350	3500K	4		120	DAINOLITE	BUR-51W-AGB-WH	6" WALL SCONCE W/ G9 BULB			16
S2	1200	3000K	14		120		SELECTED BY VA	VINTAGE STYLE LED 3 BULB SCONCE		WM	1,5,8,15,18
S3	6000	3000K	30		120		SELECTED BY VA	VINTAGE STYLE LED OUTDOOR SCONCE		WM	1,5,8,9,12, 15,18,19
V1	1050	3500K	12		120	DAINOLITE	VAD-233W-MB-AGB	LED 3 LIGHT 24" WIDE BATHROOM VANITY LIGHT W/ G9 BULBS		WM	1,2,5,16
V2	1750	3500K	20		120	DAINOLITE	VAD-415W-MB-AGB	LED 5 LIGHT 41" WIDE BATHROOM VANITY LIGHT W/ G9 BULBS		WM	1,2,5,16
X1		GREEN	1		120	LITHONIA	LE S 1 G	WALL MOUNTED EXIT SIGN	ACRYLIC	WM	10,11
X1a		GREEN	1		120	LITHONIA	LE S 1 G	CEILING MOUNTED EXIT SIGN	ACRYLIC	CS	10,11
X2		GREEN	1		120	LITHONIA	LE S 2 G	WALL MOUNTED DOUBLE SIDED EXIT SIGN	ACRYLIC	WM	10,11

TAG: CH2 Small Chandelier for Front Restrooms

Reflected Ceiling

Revision_E300

Recessed Lighting Covers

Basis of Design

TAG: D1

Manufacture: Beaux-Arts Classic Products.com
Style: Victorian Medallion
Color: Rubbed Bronze
Size: 4"
SKU: Lr-141

Vanity Pendants

Basis of Design

TAG: V1
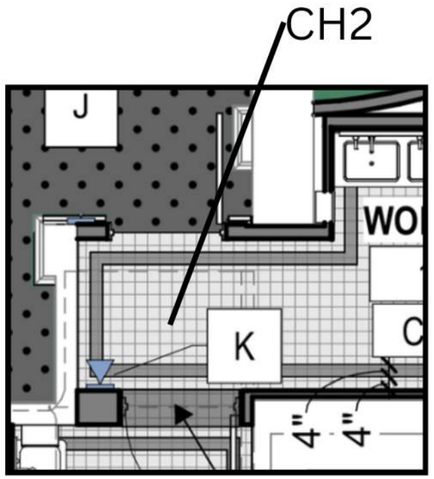
Manufacture:
Style: Beaux Arts, Pendants, Ea. Side of Mirror
Color: Bronze
Size:
SKU: