PROJECT SPECIFICATIONS

General Construction
100% Construction Documents

STRATTON VA MEDICAL CENTER

FAÇADE A WING, B-WING CHAPEL AREA AND CORE ENTRANCE ROOF REPAIRS

VA PROJECT NO. 528A8-21-812



Professional Seal

FELLENZER ENGINEERING, LLP
22 MULBERRY STREET
MIDDLETOWN, NY 10940
(845) 343-1481

FE PROJECT NO. 23-030 October 25, 2024

SECTION 00 01 15
LIST OF DRAWINGS

The drawings listed below accompanying this specification form a part of the contract.

Page	Drawing No.	Title
1	GI-001	TITLE SHEET WITH INDEX TO DRAWINGS
2	GI-002	GENERAL CONTRACTUAL: SITE SAFETY & PROPOSED STAGING PLAN
3	HA-100	ABATEMENT: A WING ELEVATIONS A-3
4	HA-101	ABATEMENT: B WING PARTIAL 11TH FLOOR ABATEMENT PLAN, ELEVATIONS AND MOLD REMEDIATION
5	SS-101	B WING PARTIAL ELEVATIONS B-1 & B-10
6	AS-001	PARTIAL KEY PLAN, PHASING NOTES, ICRA & GENERAL NOTES
7	AS-101	A WING ELEVATIONS A-1 & A-2
8	AS-102	A WING ELEVATIONS A-3 & A-4
9	AS-103	A WING ELEVATIONS A-5 & PARTIAL ELEVATIONS A-7, A-8, A-9, A-12
10	AS-104	A WING ROOF PLAN 15, 16, 17, 18 & CORE ROOF PLANS 44A, 44B, 44C
11	AS-201	B WING ELEVATIONS B-1 & B-10
12	AS-301	B WING ELEVENTH FLOOR PLANS
13	AS-501	REPAIR PROCEDURES 1-32
14	AS-502	REPAIR PROCEDURES 41-111
15	AS-601	SCAFFOLDING DETAILS & NOTES
16	AS-602	DETAILS
17	AS-602A	DETAILS
18	AS-603	ROOF DETAILS
19	AS-604	ROOF DETAILS & SIGN DETAILS
20	MH-101	MECHANICAL: LOUVER DETAILS

- - - E N D - - -

SECTION 01 00 00
GENERAL REQUIREMENTS

TABLE OF CONTENTS

1.1 SAFETY REQUIREMENTS..... 1

1.2 GENERAL INTENTION..... 1

1.3 STATEMENT OF BID ITEM(S)..... 2

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR..... 2

1.5 CONSTRUCTION SECURITY REQUIREMENTS..... 2

1.6 OPERATIONS AND STORAGE AREAS..... 4

1.7 ALTERATIONS..... 9

1.8 DISPOSAL AND RETENTION..... 10

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS..... 10

1.10 RESTORATION..... 11

1.11 PHYSICAL DATA..... 12

1.12 PROFESSIONAL SURVEYING SERVICES..... 12

1.13 LAYOUT OF WORK..... 12

1.14 AS-BUILT DRAWINGS..... 13

1.15 WARRANTY MANAGEMENT..... 13

1.16 USE OF ROADWAYS..... 18

1.17 RESIDENT ENGINEER'S FIELD OFFICE..... 18

1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT..... 18

1.19 TEMPORARY USE OF EXISTING ELEVATORS..... 18

1.20 TEMPORARY USE OF NEW ELEVATORS..... 19

1.21 TEMPORARY TOILETS..... 19

1.22 AVAILABILITY AND USE OF UTILITY SERVICES..... 19

1.23 NEW TELEPHONE EQUIPMENT..... 20

1.24 TESTS..... 20

1.25 INSTRUCTIONS..... 21

1.26 GOVERNMENT-FURNISHED PROPERTY..... 22

1.27 RELOCATED ITEMS 22

1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT
..... 22

1.29 CONSTRUCTION SIGN..... 23

1.30 SAFETY SIGN..... 23

1.31 PHOTOGRAPHIC DOCUMENTATION..... 24

1.32 FINAL ELEVATION Digital Images..... 27

1.33 HISTORIC PRESERVATION..... 27

1.34 VA TRIRIGA CPMS..... 27

SECTION 01 00 00
GENERAL REQUIREMENTS

1.1 SAFETY REQUIREMENTS

Refer to section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements.

1.2 GENERAL INTENTION

A. Contractor shall completely prepare site for building operations, including demolition and removal of portions of existing structures, and furnish labor and materials and perform work for Façade A Wing, B-Wing Chapel area and A-Wing and Core Entrance Roof Repairs Phase 1A as required by drawings and specifications.

B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer coordinated through the Contracting Officer.

C. Offices of Fellenzer Engineering, LLP, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

D. Contractor shall be responsible for all required testing of material as part of this contract. Testing of unforeseen items shall be performed by the testing agency retained by Department of Veterans Affairs, such as asbestos. The Contractor shall notify the COR of any unforeseen conditions, in sufficient time to enable testing.

E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.3 STATEMENT OF BID ITEM(S)

A. ITEM I, GENERAL CONSTRUCTION: BASE BID: Work includes general construction, Asbestos Remediation, structural repairs, alterations, Façade & Roof Repairs, cleaning structure and similar work necessary repairs and upgrades of existing structures and construction and certain other items, inclusive of all work noted on the plan set, including but not limited to Chapel are renovation and necessary electrical and mechanical work to perform renovations

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractor's expense,.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:
   1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
   2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:
   1. General Contractor’s employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
   2. Before starting work the General Contractor shall give one week’s notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
   3. No photography of VA premises is allowed without written permission of the Contracting Officer.
   4. VA reserves the right to close down or shut down the project site and order General Contractor’s employees off the premises in the

event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Guards:

1. The General Contractor shall not be required to provide unarmed guards after construction hours for this project.

D. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting officers representative (COR) for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.

E. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".

7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
   a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
   b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

F. Motor Vehicle Restrictions
   1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
   2. A limited number of (2 to 5) permits shall be issued for General Contractor and its employees for parking in designated areas only.

1.6 OPERATIONS AND STORAGE AREAS

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

(FAR 52.236-10)

D. Working space and space available for storing materials shall be as shown on the drawings.

E. Workers are subject to rules of Medical Center applicable to their conduct.

F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.
   1. Do not store materials and equipment in other than assigned areas.
   2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
   3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.

G. Phasing:

The Medical Center must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service must be scheduled and coordinated with the COR to ensure that no lapses in operation occur. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks. The work to be outlined shall include, but not be limited to: **work required to completely repair deficiencies noted on elevation drawings, further elaborated with deficiency general repair procedures and associated details.**

To ensure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to ensure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, COR and Contractor, as shown on plans.

Specific phasing details must be provided per division 01 "project schedule submission".

H. Building(s) No.(s) 1 will be occupied during performance of work.

1. It is the contactor’s responsibility to coordinate immediate areas of repair work with COR that will have direct access to patient and employee privacy.

Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of

Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting etc to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.

2. All efforts must be made to protect patient privacy.

I. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.

J. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:

1. Contractor shall maintain in operating condition existing lightning protection system.

K. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director’s prior knowledge and written approval.
2. Contractor shall submit a request to interrupt any such services to COR, in writing, 7 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COR.
5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.

L. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

M. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.

N. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

A. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be retained and re-used. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR, in designated storage area.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.

3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items will be removed and stored by the Government in advance of work to avoid interfering with Contractor's operation.

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS

A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

(FAR 52.236-9)

C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.10 RESTORATION

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workers to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.

D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.11 PHYSICAL DATA

A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

1. The indications of physical conditions on the drawings and in the specifications are the result of site investigations by Fellenzer Engineering, LLP and E.D. Pons Associates, P.C.

(FAR 52.236-4)

B. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated. Bidders are expected to examine site of work; and, after investigation, decide for themselves character of materials and make their bids accordingly.

1.12 PROFESSIONAL SURVEYING SERVICES

A registered professional land surveyor or registered civil engineer services are not anticipated to be required for this contract.

1.13 LAYOUT OF WORK

A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

(FAR 52.236-17)

B. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to COR.

1.14 AS-BUILT DRAWINGS

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings shall be made available for the COR review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.15 WARRANTY MANAGEMENT

A. Warranty Management Plan: Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction in at least 30 days before the planned pre-warranty conference, submit one set of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesman, or of engineering background, not necessarily familiar with this contract. The term “status” as indicated below must include due date and whether item has been submitted or was approved. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly invoice for payment. Assemble approved information in a binder and turn over to the Government upon acceptance of the work. The construction warranty period will begin on the date of the project acceptance and continue for the product warranty period. A joint 4 month and 9 month warranty inspection will be conducted, measured from time of acceptance, by the Contactor and the Contracting Officer. Include in the warranty management plan, but not limited to, the following:

1. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the company of the Contractor, subcontractors, manufacturers or suppliers involved.
2. Furnish with each warranty the name, address and telephone number of each of the guarantor's representatives nearest project location.
3. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, for all commissioned systems such as lightning protection systems, etc.
4. A list for each warranted equipment item, feature of construction or system indicating:
   a. Name of item.
   b. Model and serial numbers.
   c. Location where installed.
   d. Name and phone numbers of manufacturers and suppliers.
   e. Name and phone numbers of manufacturers or suppliers.
   f. Names, addresses and phone numbers of sources of spare parts.
   g. Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
   h. Starting point and duration of warranty period.
   i. Summary of maintenance procedures required to continue the warranty in force.
   j. Cross-reference to specific pertinent Operation and Maintenance manuals.
   k. Organizations, names and phone numbers of persons to call for warranty service.
   l. Typical response time and repair time expected for various warranted equipment.
5. The plans for attendance at the 4 and 9-month post construction warranty inspections conducted by the government.
6. Procedure and status of tagging of all equipment covered by extended warranties.
7. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.

B. Performance Bond: The Performance Bond must remain effective throughout the construction period.
   1. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
   2. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the contractor's expenses, the Contracting Officer will have the right to recoup expenses from the bonding company.
   3. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.

C. Pre-Warranty Conference: Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/ reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contract will be located within the local service area of the warranted construction, be continuously available and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in conjunction with other portions of this provision.

D. Contractor's Response to Construction Warranty Service Requirements: Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. Submit a report on any warranty item that has been repaired during the warranty period. Include within the report the cause of the problem, date reported, corrective action taken, and when the repair was completed. If the Contractor does not perform the construction warranty within the timeframe specified, the Government will perform the work and back charge the construction warranty payment item established.

1. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
2. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours, initiate work within 24 hours and work continuously to completion or relief.
3. Third Priority Code 3. All other work to be initiated within 3 work days and work continuously to completion or relief.
4. The "Construction Warranty Service Priority List" is as follows:

<u>Code 1-Electrical</u>

a. Security lights.

<u>Code 3-Electrical</u>

a. Exterior lights not operational.

<u>Code 1-Gas</u>

a. Leaks and pipeline breaks.

<u>Code 1-Plumbing</u>

a. Leaking water supply pipes. (Hose bibs)

<u>Code 1-Roof Leaks</u>

a. Damage to property is occurring.

<u>Code 3</u>

a. All work not listed above.

E. Warranty Tags: At the time of installation, tag each warranted item with a durable, oil and water-resistant tag approved by the Contracting

Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also submit two record copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Type of product/material	
Model number	
Serial number	
Contract number	
Warranty period from/to	
Inspector's signature	
Construction Contractor	
Address	
Telephone number	
Warranty contact	
Address	
Telephone number	
Warranty response time priority code	

1.16 USE OF ROADWAYS

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

1.17 RESIDENT ENGINEER'S FIELD OFFICE - NOT USED

1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT - NOT USED

1.19 TEMPORARY USE OF EXISTING ELEVATORS

A*. Use of existing elevator for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the COR for use of elevators. The COR will ascertain that elevators are in proper condition. Contractor may use elevators for daily use between the hours of 8 and 5 and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor covers and provides maximum protection of following elevator components:
   a. Entrance jambs, heads soffits and threshold plates.
   b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
   c. Finish flooring.
3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes at the contractors expense.

1.20 TEMPORARY USE OF NEW ELEVATORS – NOT USED

1.21 TEMPORARY TOILETS

A. All contractors workmen’s will use the facilities within the main building as designated by the COR.

1.22 AVAILABILITY AND USE OF UTILITY SERVICES

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The Contractor shall carefully conserve any utilities furnished without charge.

B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters.

C. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:

1. Obtain heat by connecting to Medical Center heating distribution system.

   a. Steam is available at no cost to Contractor.

D. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. Electricity for all other uses is available at no cost to the Contractor.

E. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (COR discretion) of use of water from Medical Center's system.

1.23 NEW TELEPHONE EQUIPMENT - NOT USED

1.24 TESTS

A. Conduct final tests required of any reinstalled devices in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.

B. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components (i.e. Parapet flashing, roof and roof drain tests shall be submitted together).

1.25 INSTRUCTIONS

A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance manuals and one compact disc (four hard copies and one electronic copy each) for roof coating shall be delivered to the COR coincidental with the delivery of the material to the job site. Manuals shall be complete, detailed guides for the maintenance of roof covering. They shall include complete information necessary for maintaining roof warranty for warranty period.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in

the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.26 GOVERNMENT-FURNISHED PROPERTY - NOT USED

1.27 RELOCATED EQUIPMENT AND ITEMS

A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated by symbol "R" or otherwise shown to be relocated by the Contractor.

B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.

C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, at the main whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".

D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

E. Contractor shall employ services of an installation engineer, who is an authorized representative of the manufacturer of this equipment to supervise assembly and installation of existing equipment, required to be relocated.

F. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT - NOT USED

1.29 CONSTRUCTION SIGN

A. Provide a Construction Sign where directed by the COR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.

C. Maintain sign and remove it when directed by the COR.

D. Detail Drawing of construction sign showing required legend and other characteristics of sign is shown on the drawings. 1-AS-604.

1.30 SAFETY SIGN

A. Provide a Safety Sign where directed by COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.

B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.

C. Maintain sign and remove it when directed by COR.

D. Standard Detail Drawing Number SD10000-02(Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings. 1-AS-604.

E. Post the number of accident free days on a daily basis.

1.31 PHOTOGRAPHIC DOCUMENTATION

ESTIMATED COST		**NO. OF PHOTOGRAPHS**
UP TO	**$250,000**	**50 TO 100**
" "	**$500,000**	**100 TO 150**
" "	**$1,000,000**	**150 TO 200**
" "	**$2,000,000**	**200 TO 250**
" "	**$5,000,000**	**250 TO 300**
" "	**$10,000,000**	**300 TO 400**
MORE THAN	**$10,000,000**	**400 TO 500**

A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. The photographer or the subcontractor used for this work shall meet the following qualifications:
   1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.
   2. Demonstrable ability to service projects throughout North America, which shall be demonstrated by a representative portfolio of active projects of similar type, size, duration and complexity as the Project.

B. Photographic documentation elements:
   1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.

2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.
3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture actual conditions throughout construction and at critical milestones. Documentation shall be accessible on-line through use of an internet connection. Documentation shall allow for secure multiple-user access, simultaneously, on-line.
4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.
5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building.
6. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the COR in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
7. As-built finished conditions of the exterior of each building including roofs, railings, ladders and walls shall be documented, as directed by the COR. Overlapping photographic techniques shall be

used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.

8. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently, shall be dated, labeled and inserted into a Section in the navigation structure entitled “Slideshows,” allowing this information to be stored in the same “place” as the formal scope.
9. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and navigation accomplished through interactive architectural plans.
10. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photopath.
11. In event a greater or lesser number of images than specified above are required by the COR, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

C. Images shall be taken by a competent photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.

D. Coordination of photo shoots is accomplished through COR. Contractor shall also attend construction team meetings as necessary. Contractor’s operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Builts viewable on-line and anticipated future shoot dates.

E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.

F. Contractor shall provide technical support related to using the system or service.

G. Upon completion of the project, final copies of the documentation (the "Permanent Record") with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

1.32 FINAL ELEVATION DIGITAL IMAGES

A. A minimum of four (4) images of each elevation shall be taken with a minimum 6 MP camera, by a competent photographer with different settings to allow the COR to select the image to be printed. All images are provided to the COR on a CD.

B. Photographs shall be taken upon completion, including landscaping. They shall be taken on a clear sunny day to obtain sufficient detail to show depth and to provide clear, sharp pictures. Pictures shall be provided in digital files on a CD.

1.33 HISTORIC PRESERVATION

Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up.

1.34 VA TRIRIGA CPMS – NOT USED

- - - E N D - - -

SECTION 01 00 07 S

GENERAL PROJECT GUIDELINES

1.1 SAFETY PRECAUTIONS

1. The supervisor shall ensure that all workers wear adequate, approved protective clothing and are provided with protective equipment during work operations and as required at other times.
2. Check manufacturer's literature for precautions and effects of products and procedures on adjacent building materials, components, and especially vegetation. Take appropriate protective measures.
3. All workers must be protected from the effects of chemicals during repair or cleaning operations.
    1. DO NOT save unused portions of stain-removal materials.
    2. DO NOT store any chemicals in unmarked containers.
    3. EXCELLENT VENTILATION MUST BE PROVIDED WHEREVER ANY SOLVENT IS USED. USE RESPIRATORS WITH SOLVENT FILTERS.
    4. No use of organic solvents indoors should be allowed without substantial air movement. Use only spark-proof fans near perations involving flammable liquids.
    5. Provide adequate clothing and protective gear where the chemicals are indicated to be dangerous.
    6. Have available antidote and accident treatment chemicals.
    7. Avoid skin contact and inhalation of any chemical. Rubber or plastic gloves should be worn when handling hazardous (flammable or toxic) chemicals.
        1. Follow storage and handling procedures printed on the container labels of the cleaning solutions, provide good ventilation while working, and thoroughly wash hands after completion of the work.
        2. Provide protective clothing which must be worn and protective creams for exposed skin areas.
        3. Accidental contact with unprotected skin to these materials must be treated immediately by washing with soap and water, never with solvents.
        4. Exercise care to avoid skin contact to tool cleaning solvents and to provide adequate ventilation for clean-up operations.
4. When removing bird droppings: Bird droppings may expose workers to the effects of cryptococcosis and histoplasmosis which endanger the human respiratory system. The following items, but not limited to these items,

are recommended appropriate precautions.

1. All contractor personnel must wear a National Institute for Occupational Safety and Health (NIOSH) approved full face respirator with a high efficiency particulate air (HEPA) filter for screening particles of 0.3 micron size. Dust and particle masks are not appropriate.
2. Respirators must be used in accordance with OSHA regulation, 29 CFR 1910.134 and GSA policy, PBS P 5900.2C, Chapter 3, section 8. This includes fit-testing of respirators, maintenance, training, and storage requirements.
3. All contractor personnel must wear protective coveralls, gloves, boots, and hats.
4. Prior to removal, all excrement must be saturated with water under low pressure to prevent debris from becoming airborne.
5. Removed excrement must be collected in plastic bags, sealed, and disposed of by the contractor at a sanitary landfill.
6. All work must be performed from the outside of the building. Building occupants and the general public must be kept clear of the work site during all operations. It is the contractor's responsibility to provide all barricades, signage, etc. necessary for public protection.

5. When removing paint:

1. Paint being removed may contain lead, painted surfaces should be tested prior to beginning any surface preparation. All workers must wear protective clothing (including hair), goggles and respirators with proper filters where lead paint has been encountered.
2. No food or drink should be allowed near any work station so as to prevent contamination from paint, paint chips, dust or chemical removers which contain lead and other toxic substances.
3. Protective clothing should be removed at the end of each day and kept at the site to prevent workers from tracking dust and paint chips to other parts of the site or to their homes.
4. Wash hands and face often, especially before eating and at the end of the day.
5. All waste material shall be collected at the end of each work day and disposed of in a manner consistent with local environmental regulations. If paint has been deemed to contain lead, waste is considered Hazardous Waste, and is to be disposed of accordingly.

1.2 SUBMITTALS

1. Product Data (when applicable):

1. Submit to COR manufacturer's technical data for each product indicated including chemical analysis, recommendations for their application and use, and any other available technical data. Include test reports and certifications substantiating that products comply with requirements.
2. MANUFACTURERS OFFERING OTHER THAN BRAND NAME ITEMS IDENTIFIED IN THE PROCEDURE SHOULD FURNISH ADEQUATE INFORMATION TO ENSURE THAT A DETERMINATION CAN BE MADE AS TO EQUALITY OF THE PRODUCT(S) OFFERED.

2. Samples:
   1. Clearly labelled samples of all materials to be used on the job shall be submitted to the COR for approval before work starts.
   2. The approved samples will become the standard materials used on the job. Substitutions will not be permitted without written approval from the COR.
3. Quality Control Submittals:
   1. Submit written program for each phase of process including protection of surrounding materials during operations. Describe in detail materials, methods and equipment to be used for each phase of work.
   2. If alternative methods and materials to those indicated are proposed for any phase of work, provide written description to COR, including evidence of successful use on other, comparable projects, and program of testing to demonstrate effectiveness for use on this project.
   3. The contractor shall supply proof of work on this type of project by submitting a list of pertinent projects the subcontractor has worked on which includes the scope of work, the budget for the scope of work, and a way to contact the owner and architect of each project.
4. Design Data/Test Reports/Certificates:
   1. Routine testing of proposed materials, and of final work for compliance with the procedure will be carried out by the COR or his\her appointed representative.
      1. Cleaning methods shall be tested prior to selecting the one for use. The simplest and least aggressive method(s) shall be selected.
      2. The level of cleanliness desired also shall be determined. A like-new appearance is both inappropriate and requires an overly harsh cleaning method.
      3. If test results show that performance criteria are not met, removal

and repair of rejected work shall be performed.

1.3 QUALITY ASSURANCE

1. Qualifications:
    1. Restoration Specialist: Work must be performed by a firm having not less than five years successful experience in comparable projects and employing personnel skilled in the processes and operations indicated. Project supervisor must have five years experience in work similar to this procedure. Additional personnel must also have experience.
    2. A supervisory craftsperson will be present when a craftsperson begins to perform the work in order to explain any procedures. Any modification of the written procedures will be made at that time.
    3. The supervisory craftsperson shall also be present during the work to instruct personnel as required.
        1. Source of Materials: Obtain materials from a single source for each type material required.
2. Regulatory Requirements:
    1. Engage an approved independent testing laboratory to examine materials prior to use and continuously inspect the work for compliance with this procedure and any related documents.
    2. The required research report and manufacturer's data shall be at the site and used for reference.
    3. Conform with all applicable safety guidelines.
    4. For Cleaning: Comply with municipal and Federal regulations governing cleaning, chemical waste disposal, scaffolding and protection of adjacent surfaces.
3. Mock-ups: After acceptance of the list of materials and proposed method of cleaning, repair or refinishing, a representative sample area shall be cleaned, repaired or refinished as specified.
    1. Employ the method proposed and accepted for use. Obtain acceptance of the sample area from the COR before proceeding with remainder of the procedure.
    2. Maintain the sample area in its accepted condition until final acceptance of the completed work. Manufacturer's Representative should be present during mock-up and its inspection for approval. Sample work shall be preformed in an area approved by the COR.
    3. A SMALLER TEST FOR EACH PRODUCT SHALL BE DONE ON EACH MATERIAL IN AN INCONSPICUOUS AREA TO CHECK FOR ADVERSE EFFECTS AND DAMAGE TO THE MATERIAL.

4. For Cleaning:
    1. Before cleaning, all drains to be used shall be tested to ensure they are functioning properly. Any clogged drains shall be reported immediately.
    2. During cleaning, prevent cleaning residue from entering the drains or drain lines. Drains or drain lines that become blocked with cleaner residue must be cleaned out immediately.

1.4 DELIVERY, STORAGE AND HANDLING

1. Packing and Shipping: Deliver materials to site in manufacturer's original and unopened containers and packaging, bearing labels as to type and names of products and manufacturers.
2. Acceptance at Site: Handle materials in accordance with project safety guidelines and manufacturer's recommendations.
3. Storage and Protection:
    1. Every effort must be made to use and reuse materials that are original to the structure. When removed from their rightful place, these materials must be stored under cover inside the building where they cannot be damaged.
    2. When pieces are to be removed, mark pieces inconspicuously in a consistent manner as to their original location. Document original position and label accordingly.
    3. If salvage material is to be used, treat it as new or original material with regard to its storage.
    4. Protect all materials during storage and construction from wetting by rain, snow or ground water, and from intermixture with earth or other types of materials.
    5. Protect materials from deterioration by moisture and temperature.
        1. Store cementitious materials off ground, under cover and in a dry location. Protect liquid components from freezing.
        2. Comply with manufacturer's recommendations for minimum and maximum temperature requirements for storage.
        3. Store all chemicals in metal cabinets. No cans shall be left open or out of the cabinet overnight.

1.5 PROJECT/SITE CONDITIONS

1. Environmental Requirements:
    1. Proceed with the work only when forecasted weather conditions are favorable.

2. Wet weather: Do not attempt repairing of feature in raining or foggy weather. Do not apply primer, paint, putty, or epoxy when the relative humidity is above 80%. Do not remove exterior elements of structures when rain is in the forecast or in progress.
3. Work in the shade when the temperature is above 75 degrees F. Work around the structure in the shade away from the sun.
4. Do not perform exterior wet work when the air temperature is below 40 degrees F.
5. NEVER begin cleaning, patching, etc. when there is any likelihood of frost or freezing.
6. If cleaning is done in very hot, sunny weather, the feature/area should be shielded from excessive heat by hanging protective netting or tarpaulins around it.
7. No cleaning shall be executed when either the air or the masonry surface temperature is below 45 degrees F, unless adequate, approved means are provided for maintaining a 45 degrees F temperature of the air and materials during, and for 48 hours subsequent to, cleaning.
8. Perform cleaning and rinsing of the exterior masonry only during daylight hours.
9. Hot weather maximum application temperatures:
    1. paint - 85 degrees F
    2. putty - 80 degrees F
    3. epoxy - 80 degrees F
10. Cold weather minimum application temperatures:
    1. paint - 50 degrees F
    2. putty - 50 degrees F
    3. epoxy - 55 degrees F

2. Existing Conditions:

Check manufacturer's literature for precautions and effects of products and procedures on adjacent building materials, components, and especially vegetation.

1.6 SEQUENCING AND SCHEDULING

1. Preventive Maintenance and Repair activities shall be scheduled during appropriate environmental conditions to avoid weather related failures.
2. Submit a work schedule indicating the proposed timing and extent of the work.
3. Co-ordinate the work schedule with that of other trades on site.

4. When cyclical maintenance work requires the use of high ladders and other access equipment, perform as many work items as possible.

1.7 GENERAL PROTECTION

1. Do not change sources or brands of materials during the course of the work.
2. All necessary precautions shall be taken to protect all parts of the building not being cleaned or repaired from effects of the work, including excessive amounts of water that should not be allowed to pond in any area. Also provide protection as required to prevent damage to adjacent property.
3. Provide protection against the spread of dust, debris and water at or beyond the work area by suitable enclosures of sheeting and tarpaulins.
4. Provide masking or covering on adjacent surfaces and permanent equipment. Secure coverings without the use of adhesive type tape or nails. Impervious sheeting which produces condensation should not be used.
5. Prevent the entry of dust, debris and water into the building by sealing all openings.
6. Provide protection from water damage to building, structure, or building contents as required.
7. Protect all landscape work adjacent to or within maintenance work areas:
    1. Provide plank barriers to protect tree trunks. Bind spreading shrubs.
    2. Covering should allow plants to breathe and should be removed at the end of each work day. Do not cover plant material with a waterproof membrane for more than 8 hours at one time.
    3. Set scaffolding and ladder legs away from plants. Pruning requests should be directed to the COR.
8. Test all drains and other water removal systems to assure that drains and systems are functioning properly prior to performing any cleaning operations. Notify Contracting Officer or designated representative immediately of any and all drains or systems that are found to be stopped or blocked. Contractor shall repair drains if so directed by the Contracting Officer or designated representative. Do not begin work of this Section until the drains are in working order.
9. Provide a method to prevent solids such as stone or mortar residue from entering the drains or drain lines. Contractor shall be responsible for cleaning out drains and drain lines that become blocked or filled by sand or any other solids because of work performed under this Contract.
10. Scaffolding, ladders and working platforms, required for the execution of this work shall be provided by contractor. These items shall not be attached to the building. Mast climber scaffolding may be attached to

building, with COR approval. Method of repair to penetrations and/or damage incurred upon scaffolding removal, must be approved in advance by COR for areas affected.

- - - END - - -

SECTION 01 32 16.15
PROJECT SCHEDULES
(SMALL PROJECTS – DESIGN/BID/BUILD)

PART 1- GENERAL

1.1 DESCRIPTION:

A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COR).

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.

C. The Contractor’s representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

A. The Contractor shall submit a qualification proposal to the COR, within 10 days of bid acceptance. The qualification proposal shall include:

1. The name and address of the proposed consultant.
2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor’s monthly payment request and the signed look ahead report. The COR shall identify the five different report formats that the contractor shall provide.

B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA will report errors in computer-produced reports to the Contractor’s representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer’s representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; an electronic file through Autodesk Build an interim schedule and as in the previously approved CPM schedule program. The submittal shall also include a computer-produced activity/event ID schedule showing project

duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer’s written approval before incorporating them into the network diagram. The Contracting Officer’s separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

D. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit, through

Autodesk Build, the revised Project Schedule, the revised computer-produced activity/event ID schedule as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

E. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

F. The Complete Project Schedule shall be broken down by phase as per AS-001 (12 phases. With each phase, identify major work activities on the schedule (i.e. mobilization, scaffolding, removals, repair, roofing, parapet, cleaning, de-mobilization, etc.). There is roughly 3-7 major events/activities per phase, or approximately 60 work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 – 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS).

C. In accordance with FAR 52.236 – 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 – 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this

Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for all BID ITEMS. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:
   a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
   b. COR and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
   c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
   d. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.

4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:
1. The appropriate project calendar including working days and holidays.
2. The planned number of shifts per day.
3. The number of hours per shift.

Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COR’s approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s),through Autodesk Build, containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

A. Monthly, the contractor shall submit an application and certificate for payment using the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 - 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from

the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

A. Monthly schedule update meetings will be held on dates mutually agreed to by the COR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
5. Completion percentage for all completed and partially completed activities/events.
6. Logic and duration revisions required by this section of the specifications.
7. Activity/event duration and percent complete shall be updated independently.

B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule.

The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the Contracting Officer. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the Contracting Officer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
   1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
   2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
   3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
   1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
   2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
   3. The schedule does not represent the actual prosecution and progress of the project.
   4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and

sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the

facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI’s, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 – GENERAL

1.1 DESCRIPTION

A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.

B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.

C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

1.2 DEFINITIONS

A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.

B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.

C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.

E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.

F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.

H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.

I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.

J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.

K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.

B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.

C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.

ENG_FORM_4288-R.pdf

D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.

E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.

B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.

C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.

D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.

C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.

D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with review.

E. Provide a transmittal form for each submittal with the following information:

1. Project title, location and number.
2. Construction contract number.
3. Date of the drawings and revisions.
4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
7. Product identification and location in project.

F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.

G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

CONTRACTOR
(Firm Name)
_____Approved
_____Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

1.6 SUBMITTAL FORMAT AND TRANSMISSION

A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.

B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.

C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.

D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.

E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.

F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

A. Submit two sets of physical samples showing range of variation, for each required item.

B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.

C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.

D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.

E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.

F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.

B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.

C. Period of review for each resubmittal is the same as for initial submittal.

D. VA review period is 15 working days for submittals.

E. VA review period is 10 working days for RFIs.

F. The VA will return submittals to the Contractor with the following notations:

1. "Approved": authorizes the Contractor to proceed with the work covered.
2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.

B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 35 26
SAFETY REQUIREMENTS

TABLE OF CONTENTS

1.1 APPLICABLE PUBLICATIONS 2

1.2 DEFINITIONS 3

1.3 REGULATORY REQUIREMENTS 4

1.4 ACCIDENT PREVENTION PLAN (APP) 5

1.5 ACTIVITY HAZARD ANALYSES (AHAs) 9

1.6 PRECONSTRUCTION CONFERENCE 10

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) 11

1.8 TRAINING 12

1.9 INSPECTIONS 13

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS 14

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE) 14

1.12 INFECTION CONTROL 15

1.13 FIRE SAFETY 22

1.14 ELECTRICAL 23

1.15 FALL PROTECTION 25

1.16 SCAFFOLDS AND OTHER WORK PLATFORMS 25

1.17 CRANES 26

1.18 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT) 26

1.19 CONFINED SPACE ENTRY 27

1.20 WELDING AND CUTTING 27

1.21 LADDERS 27

1.22 FLOOR & WALL OPENINGS 28

SECTION 01 35 26
SAFETY REQUIREMENTS

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health Planning

A10.34-2012.....Protection of the Public on or Adjacent to Construction Sites

A10.38-2013.....Basic Elements of an Employer's Program to Provide a Safe and Healthful Work Environment American National Standard Construction and Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2013.....Standard for Portable Fire Extinguishers

30-2012.....Flammable and Combustible Liquids Code

51B-2014.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

70-2014.....National Electrical Code

70B-2013.....Recommended Practice for Electrical Equipment Maintenance

70E-2015 .....Standard for Electrical Safety in the Workplace

99-2012.....Health Care Facilities Code

241-2013.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

F. The Joint Commission (TJC)

TJC Manual .....Comprehensive Accreditation and Certification Manual

G. U.S. Nuclear Regulatory Commission

10 CFR 20 .....Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1904 .....Reporting and Recording Injuries & Illnesses

29 CFR 1910 .....Safety and Health Regulations for General Industry

29 CFR 1926 .....Safety and Health Regulations for Construction Industry

CPL 2-0.124.....Multi-Employer Citation Policy

I. VHA Directive 2005-007

1.2 DEFINITIONS:

A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.

B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).

C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.

D. High Visibility Accident. Any mishap which may generate publicity or high visibility.

E. Accident/Incident Criticality Categories:

1. No impact - near miss incidents that should be investigated but are not required to be reported to the VA;
2. Minor incident/impact - incidents that require first aid or result in minor equipment damage (less than $5000). These incidents must be investigated but are not required to be reported to the VA;
3. Moderate incident/impact - Any work-related injury or illness that results in:

a. Days away from work (any time lost after day of injury/illness onset);
b. Restricted work;
c. Transfer to another job;
d. Medical treatment beyond first aid;
e. Loss of consciousness;

4. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,

5. Any incident that leads to major equipment damage (greater than $5000).

F. These incidents must be investigated and are required to be reported to the VA;

1. Major incident/impact - Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than $20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

G. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

1.3 REGULATORY REQUIREMENTS:

A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer Representative or Government Designated Authority.

1.4 ACCIDENT PREVENTION PLAN (APP):

A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any

portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
2. Address both the Prime Contractors and the subcontractors work operations.
3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
4. Address all the elements/sub-elements and in order as follows:

   a. SIGNATURE SHEET. Title, signature, and phone number of the following:

   1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);
   2) Plan approver (company/corporate officers authorized to obligate the company);
   3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).

   b. BACKGROUND INFORMATION. List the following:

   1) Contractor;
   2) Contract number;

3) Project name;
4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).

c. STATEMENT OF SAFETY AND HEALTH POLICY. Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.

d. RESPONSIBILITIES AND LINES OF AUTHORITIES. Provide the following:

1) A statement of the employer's ultimate responsibility for the implementation of his Safety and Occupational Health (SOH) program;
2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
5) Requirements for pre-task Activity Hazard Analysis (AHAs);
6) Lines of authority;
7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

e. SUBCONTRACTORS AND SUPPLIERS. If applicable, provide procedures for coordinating SOH activities with other employers on the job site:

1) Identification of subcontractors and suppliers (if known);
2) Safety responsibilities of subcontractors and suppliers.

f. TRAINING.

1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.
2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc…) and any requirements for periodic retraining/recertification are required.
3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. SAFETY AND HEALTH INSPECTIONS.

1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING. The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the Contracting Officer Representative:

1) Exposure data (man-hours worked);
2) Accident investigation reports;
3) Project site injury and illness logs.

i. PLANS (PROGRAMS, PROCEDURES) REQUIRED. Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific

compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

1) Emergency response;
2) Contingency for severe weather;
3) Fire Prevention;
4) Medical Support;
5) Posting of emergency telephone numbers;
6) Prevention of alcohol and drug abuse;
7) Site sanitation (housekeeping, drinking water, toilets);
8) Night operations and lighting;
9) Hazard communication program;
10) Welding/Cutting "Hot" work;
11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
12) General Electrical Safety;
13) Hazardous energy control (Machine LOTO);
14) Site-Specific Fall Protection & Prevention;
15) Excavation/trenching;
16) Asbestos abatement;
17) Lead abatement;
18) Crane Critical lift;
19) Respiratory protection;
20) Health hazard control program;
21) Radiation Safety Program;
22) Abrasive blasting;
23) Heat/Cold Stress Monitoring;
24) Crystalline Silica Monitoring (Assessment);
25) Demolition plan (to include engineering survey);
26) Formwork and shoring erection and removal;
27) PreCast Concrete;
28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

C. Submit the APP to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.

D. Once accepted by the Contracting Officer Representative, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.

E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer Representative. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAS):

A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)

B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.

C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted

to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.

2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
   a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.
   b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.
3. Submit AHAs to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the Contracting Officer Representative.

1.6 PRECONSTRUCTION CONFERENCE:

A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor

superintendents, and any other assigned safety and health professionals.

B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.

C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within 14 days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):

A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.

B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as

part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.

E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING:

A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.

C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.

D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.

E. Submit training records associated with the above training requirements to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance.

F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the COR that individuals have undergone contractor's safety briefing.

G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.9 INSPECTIONS:

A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of the their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative.

B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
2. The Contracting Officer Representative will be notified immediately prior to start of the inspection and invited to accompany the inspection.
3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
4. A report of the inspection findings with status of abatement will be provided to the Contracting Officer Representative within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify the Contracting Officer Representative as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incident, High Visibility Incident or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Contracting Officer Representative determine whether a government investigation will be conducted.

B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least $20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent), and provide the report to the Contracting Officer Representative within 5 calendar days of the accident. The Contracting Officer Representative will provide copies of any required or special forms.

C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the Contracting Officer Representative monthly.

D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the Contracting Officer Representative monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the Contracting Officer Representative as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE):

A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on

electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats - unless written authorization is given by the Contracting Officer. Representative in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the Contracting Officer Representative in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the Contracting Officer Representative in circumstances of no foot hazards.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.

B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the Contracting Officer Representative before beginning any construction work. Risk classifications of Class III or higher will require a

permit before beginning any construction work. Infection Control permits will be applied for and coordinated with the COR. Infection Control permit will be issued by the Infection Control Department and shall be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class [II}**, however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:

1. Class I requirements:
   a. During Construction Work:
      1) Notify the Contracting Officer Representative
      2) Execute work by methods to minimize raising dust from construction operations.
      3) Ceiling tiles: Immediately replace a ceiling tiles displaced for visual inspection.
   b. Upon Completion:
      1) Clean work area upon completion of task,
      2) Notify the Contracting Officer Representative
2. Class II requirements:
   a. During Construction Work:
      1) Notify the Contracting Officer Representative
      2) Provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.
      3) Water mist work surfaces to control dust while cutting.
      4) Seal unused doors with duct tape.
      5) Block off and seal air vents.
      6) Remove or isolate HVAC system in areas where work is being performed.
   b. Upon Completion:
      1) Wipe work surfaces with cleaner/disinfectant.
      2) Contain construction waste before transport in tightly covered containers.
      3) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.
      4) Upon completion, restore HVAC system where work was performed

5) Notify the Contracting Officer Representative

3. Class III requirements:

a. During Construction Work:

1) Obtain permit from the Infection Control Department.

2) Remove or Isolate HVAC system in area where work is being done to prevent contamination of duct system.

3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.

4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.

5) Contain construction waste before transport in tightly covered containers.

6) Cover transport receptacles or carts. Tape covering unless solid lid.

b. Upon Completion:

1) Do not remove barriers from work area until completed project is inspected by the Contracting Officer Representative and thoroughly cleaned by the Contractor.

2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.

3) Vacuum work area with HEPA filtered vacuums.

4) Wet mop area with cleaner/disinfectant.

5) Upon completion, restore HVAC system where work was performed.

6) Return permit to the Contracting Officer Representative

4. Class IV requirements:

a. During Construction Work:

1) Obtain permit from the Infection Control Department.

2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
5) Seal holes, pipes, conduits, and punctures.
6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.

b. Upon Completion:
1) Do not remove barriers from work area until completed project is inspected by the Contracting Officer Representative with thorough cleaning by the Contractor.
2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
3) Contain construction waste before transport in tightly covered containers.
4) Cover transport receptacles or carts. Tape covering unless solid lid.
5) Vacuum work area with HEPA filtered vacuums.
6) Wet mop area with cleaner/disinfectant.
7) Upon completion, restore HVAC system where work was performed.
8) Return permit to the Contracting Officer Representative

C. Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:
   1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
   2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
      a. Class III & IV (where dust control is the only hazard, and an agreement is reached with the COR and Medical Center) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
      b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
      c. Class III & IV - Seal all penetrations in existing barrier airtight
      d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
      e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
      f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

D. Products and Materials:
   1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes
   2. Barrier Doors: Self Closing Two-hour fire-rated solid core wood in steel frame, painted
   3. Dust proof two-hour fire-rated drywall
   4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and

replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.

5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
7. Disinfectant: Hospital-approved disinfectant or equivalent product
8. Portable Ceiling Access Module

E. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

F. A dust control program will be establish and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

G. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Contractor shall verify that construction dust and debris will not be introduced into the medical center through intake vents, or building openings. HEPA filtration is required where dust may enter the medical center.
2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.

5. The contractor shall not haul debris through patient care areas without the prior written approval of the COR. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

H. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from roofs, areaways, staging areas and interior spaces that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area of any interior rooms disturbed. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. Any reinstalled air ducts shall be cleaned prior to final inspection.

I. Exterior Construction

1. Contractor shall verify that dust will not be introduced into the medical center through intake vents, or building openings. HEPA filtration on intake vents is required where dust may be introduced.
2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary.
3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

1.13 FIRE SAFETY

A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.

B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

D. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.

E. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Contracting Officer Representative.

F. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Contracting Officer Representative.

G. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

H. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

I. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with the Contracting Officer Representative. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests

performed shall be recorded by the medical center and copies provided to the COR.

K. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with the Contracting Officer Representative.

L. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Designate contractor's responsible project-site fire prevention program manager to permit hot work. The contractor shall obtain a Hot Work permit from the VA prior to starting any hot work. This permit request shall be made at least 12 hours prior to the anticipated start of work.

M. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Contracting Officer.

N. Smoking: Smoking is prohibited on the VA Medical Center property, including parking lots and storage areas. 'Smoking' includes the use of electronic cigarettes and cigars.

O. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

P. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.14 ELECTRICAL

A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.

B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance

with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The VA Safety Department with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA Safety Department prior to the start of that activity.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the Contracting Officer Representative.

D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alterative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools

related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C)(2).

1.15 FALL PROTECTION

A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.

1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.16 SCAFFOLDS AND OTHER WORK PLATFORMS

A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.

B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.

C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.

3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
4. Emergency descent devices shall not be used as working platforms.

D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
1. The Competent Person's name and signature;
2. Dates of initial and last inspections.

E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.17 CRANES

A. All crane work shall comply with 29 CFR 1926 Subpart CC.

B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date.

C. A detailed lift plan for all lifts shall be submitted to the COR 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.

D. Crane operators shall not carry loads
1. over the general public or VAMC personnel
2. over any occupied building unless
   a. the top two floors are vacated
   b. or overhead protection with a design live load of 300 psf is provided

1.18 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced

operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.19 CONFINED SPACE ENTRY

A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].

B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the COR.

1.20 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

1.21 LADDERS

A. All Ladder use shall comply with 29 CFR 1926 Subpart X.

B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.

C. Manufacturer safety labels shall be in place on ladders

D. Step Ladders shall not be used in the closed position

E. Top steps or cap of step ladders shall not be used as a step

F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.

1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.

G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with

similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.22 FLOOR & WALL OPENINGS

A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.

B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.

C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.

1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
2. Covers shall be secured when installed, clearly marked with the word “HOLE”, “COVER” or “Danger, Roof Opening-Do Not Remove” or color-coded or equivalent methods (e.g., red or orange “X”). Workers must be made aware of the meaning for color coding and equivalent methods.
3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.
http://www.aluminum.org

AABC Associated Air Balance Council
https://www.aabc.com

AAMA American Architectural Manufacturer's Association
http://www.aamanet.org

AASHTO American Association of State Highway and Transportation Officials
http://www.aashto.org

AATCC American Association of Textile Chemists and Colorists
http://www.aatcc.org

ACGIH American Conference of Governmental Industrial Hygienists
http://www.acgih.org

ACI American Concrete Institute
http://www.aci-int.net

ACPA American Concrete Pipe Association
http://www.concrete-pipe.org

ACPPA American Concrete Pressure Pipe Association
http://www.acppa.org

ADC Air Diffusion Council
http://flexibleduct.org

AGA American Gas Association
http://www.aga.org

AGC Associated General Contractors of America
http://www.agc.org

AGMA American Gear Manufacturers Association, Inc.
http://www.agma.org

AH American Hort
https://www.americanhort.org

AHAM Association of Home Appliance Manufacturers
http://www.aham.org

AIA American Institute of Architects

	http://www.aia.org
AISC	American Institute of Steel Construction
	http://www.aisc.org
AISI	American Iron and Steel Institute
	http://www.steel.org
AITC	American Institute of Timber Construction
	https://aitc-glulam.org
AMCA	Air Movement and Control Association, Inc.
	http://www.amca.org
ANSI	American National Standards Institute, Inc.
	http://www.ansi.org
APA	The Engineered Wood Association
	http://www.apawood.org
ARI	Air-Conditioning and Refrigeration Institute
	http://www.ari.org
ARPM	Association for Rubber Product Manufacturers
	https://arpm.com
ASABE	American Society of Agricultural and Biological Engineers
	https://www.asabe.org
ASCE	American Society of Civil Engineers
	http://www.asce.org
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers
	http://www.ashrae.org
ASME	American Society of Mechanical Engineers
	http://www.asme.org
ASSE	American Society of Sanitary Engineering International
	http://www.asse-plumbing.org
ASTM	American Society for Testing and Materials International
	http://www.astm.org
AWI	Architectural Woodwork Institute
	https://www.awinet.org
AWS	American Welding Society
	https://www.aws.org
AWWA	American Water Works Association
	https://www.awwa.org

BHMA	Builders Hardware Manufacturers Association https://www.buildershardware.com
BIA	The Brick Industry Association http://www.gobrick.com
CAGI	Compressed Air and Gas Institute https://www.cagi.org
CGA	Compressed Gas Association, Inc. https://www.cganet.com
CI	The Chlorine Institute, Inc. https://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association https://www.cisca.org
CISPI	Cast Iron Soil Pipe Institute https://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute https://www.chainlinkinfo.org
CPA	Composite Panel Association https://www.compositepanel.org
CPMB	Concrete Plant Manufacturers Bureau https://www.cpmb.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute https://www.crsi.org
CTI	Cooling Technology Institute https://www.cti.org
DHA	Decorative Hardwoods Association https://www.decorativehardwoods.org
DHI	Door and Hardware Institute https://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute https://www.eei.org
EPA	United States Environmental Protection Agency https://www.epa.gov

ETL	ETL Testing Services http://www.intertek.com
FAA	Federal Aviation Administration https://www.faa.gov
FCC	Federal Communications Commission https://www.fcc.gov
FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org\
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry http://msshq.org
NAAMM	National Association of Architectural Metal Manufacturers https://www.naamm.org

PHCC	Plumbing-Heating-Cooling Contractors Association https://www.phccweb.org
NBS	National Bureau of Standards See - NIST
NBBI	The National Board of Boiler and Pressure Vessel Inspectors https://www.nationalboard.org
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association https://www.nema.org
NFPA	National Fire Protection Association https://www.nfpa.org
NHLA	National Hardwood Lumber Association https://www.nhla.com
NIH	National Institute of Health https://www.nih.gov
NIST	National Institute of Standards and Technology https://www.nist.gov
NELMA	Northeastern Lumber Manufacturers Association, Inc. http://www.nelma.org
NPA	National Particleboard Association (See CPA, Composite Panel Association)
NSF	National Sanitation Foundation http://www.nsf.org
OSHA	Occupational Safety and Health Administration Department of Labor https://www.osha.gov
PCA	Portland Cement Association https://www.cement.org
PCI	Precast Prestressed Concrete Institute https://www.pci.org
PPI	Plastics Pipe Institute https://www.plasticpipe.org
PEI	Porcelain Enamel Institute http://www.porcelainenamel.com
PTI	Post-Tensioning Institute http://www.post-tensioning.org

RFCI	Resilient Floor Covering Institute https://www.rfci.com
RIS	Redwood Inspection Service (See Western Wood Products Association) https://www.wwpa.org
SCMA	Southern Cypress Manufacturers Association http://www.cypressinfo.org
SDI	Steel Door Institute http://www.steeldoor.org
SJI	Steel Joist Institute https://www.steeljoist.org
SMACNA	Sheet Metal & Air-Conditioning Contractors' National Association https://www.smacna.org
SSPC	The Society for Protective Coatings https://www.sspc.org
STI	Steel Tank Institute https://www.steeltank.com
SWI	Steel Window Institute https://www.steelwindows.com
TCNA	Tile Council of North America https://www.tcnatile.com
TEMA	Tubular Exchanger Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute https://www.tpinst.org
UBC	The Uniform Building Code (See ICC)
UL	Underwriters' Laboratories Incorporated https://www.ul.com
ULC	Underwriters' Laboratories of Canada https://www.ulc.ca
WCLB	West Coast Lumber Inspection Bureau http://www.wclib.org
WDMA	Window and Door Manufacturers Association https://www.wdma.com

WRCLA Western Red Cedar Lumber Association

https://www.realcedar.com

WWPA Western Wood Products Association

http://www.wwpa.org

- - - E N D - - -

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by the Contractor.

1.2 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Concrete Institute (ACI):

506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

C. American Society for Testing and Materials (ASTM):

A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

C140-12.....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength of Masonry Prisms

D422-63(2007).....Standard Test Method for Particle-Size Analysis of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort

D1140-00(2006).....Standard Test Methods for Amount of Material in Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000ft lbf/ft3 (2,700 KNm/m3))

D2166-06.....Standard Test Method for Unconfined Compressive Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2216-10.....Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as used in Engineering Design and Construction

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

E94-04(2010).....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection

E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing

E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle Examination

E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

F3125/F3125M-15.....Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040

MPa) Minimum Tensile Strength, Inch and Metric Dimensions

D. American Welding Society (AWS):
D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 SITE WORK CONCRETE:

Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.2 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COR with concurrence of Contracting

Officer and perform periodic inspections thereafter as determined by COR.

2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor’s expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m^3 (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the

beginning of each day's pumping operations to determine change in slump.

5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m^3 (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m^3 (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
    a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
    b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing and top and bottom concrete cover. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.

14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
    a. Inspect handling, conveying, and placing equipment.
    b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
    a. Monitor and record amount of water added at project site.
    b. Observe minimum and maximum mixing times.

C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
2. Furnish certified compression test reports (duplicate) to COR. In test report, indicate the following information:
    a. Cylinder identification number and date cast.
    b. Specific location at which test samples were taken.
    c. Type of concrete, slump, and percent air.
    d. Compressive strength of concrete in MPa (psi).
    e. Weather conditions during placing.
    f. Temperature of concrete in each test cylinder when test cylinder was molded.
    g. Maximum and minimum ambient temperature during placing.
    h. Ambient temperature when concrete sample in test cylinder was taken.
    i. Date delivered to laboratory and date tested.

3.3 REINFORCEMENT:

A. Make one tensile and one bend test in accordance with ASTM A370 from each pair of samples obtained.

B. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.

C. Perform tension tests of mechanical and welded splices in accordance with ASTM A370.

3.4 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:
   a. Comply with ASTM C780.
   b. Obtain samples during or immediately after discharge from batch mixer.
   c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
   d. Test one sample at 7 days and 2 samples at 28 days.
2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
   a. Comply with ASTM C1019.
   b. Test one sample at 7 days and 2 samples at 28 days.
   c. Perform test for each 230 m^2 (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
   a. Comply with ASTM C140.
   b. Test 3 samples for each 460 m^2 (5000 square feet) of wall area.

D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m^2 (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.5 TYPE OF TEST:

Approximate Number of Tests Required

A. Concrete:

Making and Curing Concrete Test Cylinders (ASTM C31)	6
Compressive Strength, Test Cylinders (ASTM C39)	6
Concrete Slump Test (ASTM C143)	3
Concrete Air Content Test (ASTM C173)	3
Aggregate, Normal Weight: Gradation (ASTM C33)	3

B. Reinforcing Steel:

Tensile Test (ASTM A370)	1
Bend Test (ASTM A370)	1
Mechanical Splice (ASTM A370)	1

C. Masonry:

Sampling and Testing Mortar, Comp. Strength (ASTM C780)	6
Sampling and Testing Grout, Comp. Strength (ASTM C1019)	6
Masonry Unit, Compressive Strength (ASTM C140)	1
Prism Tests (ASTM C1314)	1

D. Inspection:

Technical Personnel (Man-days)	245

E. Technical Personnel: (Minimum 9 months)

1. Technicians to perform tests and inspection listed above. Laboratory will be equipped with concrete cylinder storage facilities, compression machine, cube molds, proctor molds, balances, scales, moisture ovens, slump cones, air meter, and all necessary equipment for compaction control.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 45 35
SPECIAL INSPECTIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This guide specification will be applicable to both new buildings and existing building rehabilitations/renovations. Special Inspection and testing specified requirements must be performed during construction. All deficiencies will be immediately reported to the Contracting Officer.

B. Structural:

Design Data for Existing Building

Building 1 - Risk Category IV

Seismic Design Category C per ASCE 7

Building Height is in excess of 75’

Wind Speed Vasd <110 mph for location based on Risk Category IV

1.2 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

B. American Society of Civil Engineers (ASCE)

1. ASCE 7 - (2010; Errata 2011; Supp 2 2013) Minimum Design Loads for Buildings and Other Structures

C. International Code Council (ICC)

2. ICC IBC - (2015) International Building Code

1.3 GENERAL REQUIREMENTS

A. Perform Special Inspections in accordance with the Statement of Special Inspections, Schedule of Special Inspections and Chapter 17 of ICC IBC. The Statement of Special Inspections and Schedule of Special Inspections are included as an attachment to this specification. Special Inspections are to be performed by an independent third party and are intended to ensure that the work of the prime contractor is in accordance with the Contract Documents and applicable building codes. Special inspections do not take the place of the three phases of control inspections performed by the Contractor's QC Manager or any testing and inspections required by other sections of the specifications.

1.4 **DEFINITIONS**

A. Continuous Special Inspections – The constant monitoring of specific tasks by a special inspector. These inspections must be carried out continuously over the duration of the particular tasks.

B. Periodic Special Inspections – Special Inspections by the special inspector who is intermittently present where the work to be inspected has been or is being performed. Specific time interval on a specific Special Inspection should be indicated on the Schedule of Special Inspections.

C. Perform – Perform these Special Inspections tasks for each welded joint or member.

D. Observe – Observe these Special Inspections items on a random daily basis. Operations need not be delayed pending these inspections.

E. Special Inspector (SI) – A qualified person retained by the contractor and approved by the Contracting Officer as having the competence necessary to inspect a particular type of construction requiring Special Inspections. The SI must be an independent third party hired directly by the Prime Contractor.

F. Associate Special Inspector (ASI) – A qualified person who assists the SI in performing Special Inspections but must perform inspection under the direct supervision of the SI and cannot perform inspections without the SI on site.

G. Third Party – A third party inspector must not be company employee of the Contractor or any Sub-Contractor performing the work to be inspected.

H. Special Inspector of Record (SIOR) – SIOR must be an independent third party hired directly by the Prime Contractor and is required for the following project conditions:

1. Seismic Design Category D, E, or F; and assigned to Risk Category III, IV, or V. (Not Applicable)
2. Seismic Design Category D, E, or F; and with a height greater than 22860mm 75 ft. (Not Applicable)
3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two (2) stories above grade plane. (Not Applicable)
4. Nominal design wind speed in excess of 49 m/sec 110 mph; and assigned to Risk Category III, IV, or V. (Not applicable)

5. Nominal design wind speed in excess of 49 mm/sec 110mph; and with a height greater than 23m 75ft. (Not applicable)
6. In addition to these conditions, the DOR is encouraged to consider using an SIOR on large magnitude or critical projects where this additional level of quality control is affordable.

I. Contracting Officer – The Government official having overall authority for administrative contracting actions. Certain contracting actions may be delegated to the Contracting Officer's Representative (COR).

J. Contractor’s Quality Control (QC) Manager – An individual retained by the prime contractor and qualified in accordance with the Section 01 45 00.00 10 QUALITY CONTROL having the overall responsibility for the contractor's QC organization.

K. Designer of Record (DOR) – A registered design professional is contracted by the Government as an A/E responsible for the overall design and review of submittal documents prepared by others. The DOR is registered or licensed to practice their respective design profession as defined by the statutory requirements of the professional registration laws in state in which the design professional works. The DOR is also referred to as the Engineer of Record (EOR) in design code documents.

L. Statement of Special Inspections (SSI) – A document developed by the DOR identifying the material, systems, components and work required to have Special Inspections and covering Elements having enhanced local resistance. This work to include inspections of masonry work and welded elements in the parapet area and of grout, wall ties, reinforcement and anchorage where used in all others areas.

The Statement of Special Inspections and the Schedule of Special Inspections will be included as an attachment to this specification

a) Schedule of Special Inspections – A schedule which lists each of the required Special Inspections, the extent to which each Special Inspections is to be performed, and the required frequency for each in accordance with ICC IBC Chapter 17. See 01 45 35.1 Schedule of Special Inspection and 01 45 35.2 Statement of Special Inspection.

M. Submittals: Government approval is required for all submittals. CQC Special Inspection reports shall be submitted under this Specification section and follow the [Special Inspection]: [Applicable Specification section or description] naming convention. Submit the following:

1) SD-01 Preconstruction Submittals;
2) SIOR Letter of Acceptance;
3) Special Inspections Project Manual;
4) Special Inspections Agency's Written Practices
5) NDT Procedures and Equipment' Calibration Records;
6) SD-06 Test Reports;
7) Special Inspections
8) Daily Reports;
9) Special Inspections; Biweekly Reports;
10) SD-07 Certificates;
11) Fabrication Plant
12) Steel Truss Plant; (Not Applicable)
13) Wood Truss Plant; (Not Applicable)
14) AC472 Accreditation;
15) Steel Joist Institute Membership; (Not Applicable)
16) Precast Concrete Institute (PCI) Certified Plant; (Not Applicable)
17) Certificate of Compliance;
18) Special Inspector of Record Qualifications;
19) Special Inspector Qualifications;
20) Qualification Records for NDT technicians;
21) SD-11 Closeout Submittals;
22) Interim Final Report of Special Inspections;
23) Comprehensive Final Report of Special Inspections;

N. Special Inspector Qualifications: Submit qualifications for each SI, ASI, and the SIOR from the following certifying associations: American Concrete Institute (ACI); American Welding Society (AWS); Factory Mutual (FM); International Code Council (ICC); Nondestructive Testing (NDT); National Institute for Certification in Engineering Technologies (NICET); Underwriters Laboratories (UL). Qualifications should be in accordance with the following minimums

QUALIFICATIONS

Area	Special Inspector	Associated Special Inspector	SIOR
Nondestructive Testing of Welds	NDT Level II Certificate	NDT Level II Certificate plus one year of related experience	
Cold Formed Steel Framing	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or ICC Commercial Building Inspector with one year of experience; or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	
Masonry Construction	ICC Structural Masonry Special Inspector Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Fire-Resistant Penetrations and Joints	Passed the UL Firestop Exam with one year of related experience, or Passed the FM Firestop Exam with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	

PART 2 - PRODUCTS

2.1 FABRICATORS SPECIAL INSPECTION - NOT USED

PART 3 - EXECUTION

3.1 RESPONSIBILIES MATRIX

Inspector	Responsibility	Condition
SIOR	a. Supervise all Special Inspectors required by the contract documents and the IBC. b. Submit a SIOR Letter of Acceptance to the Contracting Officer attesting to acceptance of the duties of SIOR, signed and sealed by the SIOR. c. Verify the qualifications of all of the Special Inspectors. d. Verify the qualifications of fabricators.	Applicable when SIOR is required
SIOR	e. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. f. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.	Applicable when SIOR is required and when the structural design is required to follow AISC341 for seismic design of steel structures
SIOR	g. Prepare a Special Inspections Project Manual, which will cover the following: 1. Roles and responsibilities of the following individuals during Special Inspections: SIOR, SI, General Contractor, Subcontractors, QC Manager, and DOR. 2. Organizational chart and/or communication plan, indicating lines of communication 3. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection	Applicable when SIOR is required

Inspector	Responsibility	Condition
	requests, and availability of alternate inspectors. 4. Indicate the government reporting procedures. 5. Propose forms or templates to be used by SI and SIOR to document inspections. 6. Indicate procedures for tracking nonconforming work and verification that corrective work is complete. 7. Indicate how the SIOR and/or SI will participate in weekly QC meetings. 8. Indicate how Special Inspections of shop fabricated items will be handled when the fabricator's shop is not certified per paragraph FABRICATOR SPECIAL INSPECTIONS. 9. Include a section in the manual that covers each specific item requiring Special Inspections that is indicated on the Schedule of Special Inspections. Provide names and qualifications of each special inspector who will be performing the Special Inspections for each specific item. Provide detail on how the Special Inspections are to be carried out for each item so that the expectations are clear for the General Contractor and the Subcontractor performing the work. Make a copy of the Special Inspections Project Manual available on the job site during construction. Submit a copy of the Special Inspections Project Manual for approval. h. Attend coordination and mutual understanding meeting where the information in the Special Inspections Project Manual will be reviewed to verify that all parties have a clear understanding of the Special Inspections provisions and the individual duties and responsibilities of each party. i. Maintain a 3- ring binder for the Special Inspector's daily and biweekly reports and the Special Inspections Project Manual. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR. j. Submit a copy of the Special Inspector's daily reports to the QC Manager. k. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves	

Inspector	Responsibility	Condition
	the site the observed discrepancies must be documented in the daily report. l. Submit a biweekly Special Inspections report until all work requiring Special Inspections is complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame. 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems, that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test results including nondestructive testing reports.	
QC Manager	a. If there is no SIOR, QC Manager must Supervise all Special Inspectors required by the contract documents and the IBC; Verify the qualifications of all of the Special Inspectors; Verify the qualifications of fabricators; Maintain a 3-ring binder for the Special Inspector's daily and biweekly reports. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR.	Applicable when SIOR is not required
QC Manager	b. Maintain a rework items list that includes discrepancies noted on the Special Inspectors daily report.	n/a
Special Inspectors	a. Inspect all elements of the project for which the special inspector is qualified to inspect and are identified in the Schedule of Special Inspections. b. Attend preparatory phase meetings related to the Definable Feature of Work (DFOW) for which the special inspector is qualified to inspect.	n/a
Special Inspectors	c. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following:	Applicable when SIOR is NOT required and when the structural

Inspector	Responsibility	Condition
	1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. d. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. e. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.]	design is required to follow AISC 341 for seismic design of steel structures
Special Inspectors	f. Submit a copy of the daily reports to the QC Manager. g. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report. h. Submit a biweekly Special Inspection Report until all inspections are complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test result including nondestructive testing reports. i. At the completion of the project submit a comprehensive final report of Special Inspections that documents the Special Inspections completed for the project and corrections of all discrepancies noted in the daily reports. The comprehensive final report of Special Inspections must be signed, dated	Applicable when SIOR is not required

Inspector	Responsibility	Condition
	and indicate the certification of the special inspector qualifying them to conduct the inspection.	
Special Inspectors	j. Submit daily reports to the SIOR	Applicable when SIOR is required

3.2 DEFECTIVE WORK

Check work as it progresses, but failure to detect any defective work or materials must in no way prevent later rejection if defective work or materials are discovered, nor obligate the Government to accept such work.

-- End of Section -

SCHEDULE OF SPECIAL INSPECTIONS

Reference 01 45 35 for all requirements not noted as part of this schedule.

INSPECTION DEFINITIONS:

PERFORM: Perform these tasks for each weld, fastener or bolted connection, and noted verification.

OBSERVE: Observe these items randomly during the course of each work day to insure that applicable requirements are being met. Operations need not be delayed pending these inspections at contractor's risk.

DOCUMENT: Document, with a report, that the work has been performed in accordance with the contract documents. This is in addition to any other reports required in the Special Inspections guide specification.

CONTINUOUS: Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

A. STRUCTURAL - STEEL – WELDING SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

STEEL INSPECTION PRIOR TO WELDING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table C-N5.4-1		
TASK	INSPECTION TYPE[1]	DESCRIPTION
1. Verify that the welding procedures specification (WPS) is available	**PERFORM**	
2. Verify manufacturer certifications for welding consumables are available	**PERFORM**	
3. Verify material identification	**PERFORM**	Type and grade.
4. Welder Identification System	**PERFORM**	The fabricator or erector, as applicable, shall maintain a system by which a welder who has welded a joint or member can be identified. Stamps, if used, shall be the low-stress type.
5. Fit-up of groove welds (including joint geometry)	OBSERVE	✓ Joint preparation ✓ Dimensions (alignment, root opening, root face, bevel) ✓ Cleanliness (condition of steel surfaces) ✓ Tacking (tack weld quality and location) ✓ Backing type and fit (if applicable)
6. Configuration and finish of access holes	OBSERVE	

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

7. Fit-up of fillet welds	OBSERVE	✓ Dimensions (alignment, gaps at root) ✓ Cleanliness (condition of steel surfaces) ✓ Tacking (tack weld quality and location)
STEEL INSPECTION DURING WELDING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table C-N5.4-2		
TASK	INSPECTION TYPE	DESCRIPTION
8. Use of qualified welders	**PERFORM**	Welding by welders, welding operators, and tack welders who are qualified in conformance with requirements.
9. Control and handling of welding consumables	OBSERVE	✓ Packaging ✓ Electrode atmospheric exposure control
10. No welding over cracked tack welds	OBSERVE	
11. Environmental conditions	OBSERVE	✓ Wind speed within limits ✓ Precipitation and temperature
12. Welding Procedures Specification followed	OBSERVE	✓ Settings on welding equipment ✓ Travel speed ✓ Selected welding materials ✓ Shielding gas type/flow rate ✓ Preheat applied ✓ Interpass temperature maintained (min./max.) ✓ Proper position (F, V, H, OH) ✓ Intermix of filler metals avoided
13. Welding techniques	OBSERVE	✓ Interpass and final cleaning ✓ Each pass within profile limitations ✓ Each pass meets quality requirements

A. STRUCTURAL - STEEL – WELDING SECTION (CONTINUED)

STEEL INSPECTION AFTER WELDING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 2015 1705.2.1, AISC 360-10: Table C-N5.4-3		
TASK	INSPECTION TYPE [1]	DESCRIPTION
14. Welds cleaned	OBSERVE	
15. Size, length, and location of all welds	**PERFORM**	Size, length, and location of all welds conform to the requirements of the detail drawings.
16. Welds meet visual acceptance criteria	**PERFORM AND DOCUMENT**	✓ Crack prohibition ✓ Weld/base-metal fusion ✓ Crater cross section ✓ Weld profiles ✓ Weld size ✓ Undercut ✓ Porosity
17. Arc strikes	**PERFORM**	
18. k-area	**PERFORM**	When welding of doubler plates, continuity plates or stiffeners has been performed in the k-area, visually inspect the web k-area for cracks.
19. Backing removed, weld tabs removed and finished, and fillet welds added where required	**PERFORM**	
20. Repair activities	**PERFORM AND DOCUMENT**	
21. Document acceptance or rejection of welded joint or member	**PERFORM**	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

B. STRUCTURAL - STEEL – BOLTING SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

STEEL INSPECTION TASKS PRIOR TO BOLTING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table C-N5.6-1		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Manufacture's certifications available for fastener materials	**PERFORM**	
2. Fasteners marked in accordance with ASTM requirements	OBSERVE	
3. Proper fasteners selected for joint detail (grade, type, bolt length if threads are to be excluded from shear plane)	OBSERVE	
4. Proper bolting procedure selected for joint detail	OBSERVE	
5. Connecting elements, including appropriate faying surface condition and hole preparation, if specified, meet applicable requirements	OBSERVE	
6. Proper storage provided for bolts, nuts, washers, and other fastener components	OBSERVE	
STEEL INSPECTION TASKS DURING BOLTING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table C-N5.6-2		
TASK	INSPECTION TYPE [1]	DESCRIPTION
7. Fastener assemblies of suitable condition, placed in all holes and washers (if required) are positioned as required	OBSERVE	
8. Joint brought to the snug-tight condition prior to pretensioning operation	OBSERVE	
9. Fastener component not turned by the wrench prevented from rotating	OBSERVE	
10. Bolts are pretensioned in accordance with RCSC Specification, progressing systematically from the most rigid point toward the free edges	OBSERVE	
STEEL INSPECTION TASKS AFTER BOLTING – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table C-N5.6-3		
TASK	INSPECTION TYPE [1]	DESCRIPTION
11. Document acceptance or rejection of all bolted connections	**DOCUMENT**	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

C. STRUCTURAL - STEEL - NON DESTRUCTIVE TESTING SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

NONDESTRUCTIVE TESTING OF WELDED JOINTS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Section N5.5		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Use of qualified nondestructive testing personnel	**PERFORM**	Visual weld inspection and nondestructive testing (NDT) shall be conducted by personnel qualified in accordance with AWS D1.8 clause 7.2
2. CJP groove welds	OBSERVE	**[NOTE: DOR must delete this row if section D (SEISMIC PROVISIONS SECTION) is checked]** Dye penetrant testing (DT) and ultrasonic testing (UT) shall be performed on 20% of CJP groove welds for materials greater than 5/16" (8mm) thick. Testing rate must be increased to 100% if greater than 5% of welds tested have unacceptable defects.
3. Welded joints subject to fatigue	OBSERVE	Dye penetrant testing (DT) and Ultrasonic testing (UT) shall be performed on 100% of welded joints identified on contract drawings as being subject to fatigue.
4. Weld tab removal sites	OBSERVE	At the end of welds where weld tabs have been removed, magnetic particle testing shall be performed on the same beam-to-column joints receiving UT

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

D. STRUCTURAL - STEEL – AISC 341 REQUIREMENTS (SEISMIC PROVISIONS) SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

NONDESTRUCTIVE TESTING OF WELDED JOINTS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 341-10: Section J6.2		
TASK	INSPECTION TYPE [1]	DESCRIPTION
[NOTE: DOR may uncheck this section for projects NOT designed in accordance with AISC 341 (Seismic Provisions) or for projects designed according to AISC 341, but using an R value equal to 3]		
5. CJP groove welds	OBSERVE	Dye penetrant testing (DT) and ultrasonic testing (UT) shall be performed on 100% of CJP groove welds for materials greater than 5/16" thick (8mm).
6. Beam cope and access hole.	OBSERVE	At welded splices and connections, thermally cut surfaces of beam copes and access holes shall be tested using magnetic particle testing (MT) or dye penetrant testing (DT), when the flange thickness exceeds 1 1/2 in. for rolled shapes, or when the web thickness exceeds 1 1/2 in. for built-up shapes.
7. K-area NDT (AISC 341)	**PERFORM**	Where welding of doubler plates, continuity plates or stiffeners has been performed in the k-area, the web shall be tested for cracks using magnetic particle testing (MT). The MT inspection area shall include the k-area base metal within 3-inches of the weld. The MT shall be performed no sooner than 48 hours following completion of the welding.
8. Placement of reinforcing or contouring fillet welds	**DOCUMENT**	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

E. STRUCTURAL - STEEL - COMPOSITE CONSTRUCTION [1]

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

COMPOSITE CONSTRUCTION PRIOR TO PLACING CONCRETE – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 360-10: Table N6.1, AISC 341-10: Table J9-1		
TASK	INSPECTION TYPE [2]	DESCRIPTION
1. Placement and installation of steel headed stud anchors	**PERFORM**	
2. Material identification of reinforcing steel (Type/Grade)	OBSERVE	
3. Determination of carbon equivalent for reinforcing steel other than ASTM A706	OBSERVE	
4. Proper reinforcing steel size, spacing, clearances, support, and orientation	OBSERVE	
5. Reinforcing steel has been tied and supported as required	OBSERVE	

END SECTION

F. STRUCTURAL - STEEL - OTHER INSPECTIONS

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

OTHER STEEL INSPECTIONS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.1, AISC 341-10: Tables J8-1 & J10-1		
TASK	INSPECTION TYPE [2]	DESCRIPTION
1. Anchor rods and other embedments supporting structural steel	**PERFORM**	Verify the diameter, grade, type, and length of the anchor rod or embedded item, and the extent or depth of embedment prior to placement of concrete.
2. Fabricated steel or erected steel frame	OBSERVE	Verify compliance with the details shown on the construction documents, such as braces, stiffeners, member locations and proper application of joint details at each connection.
3. Reduced beam sections (RBS) where/if occurs	**DOCUMENT**	✓ Contour and finish ✓ Dimensional tolerances
4. Protected zones	**DOCUMENT**	No holes or unapproved attachments made by fabricator or erector
5. H-piles where/if occurs	**DOCUMENT**	No holes or unapproved attachments made by the responsible contractor

END SECTION

[1] See Concrete Construction Section for all concrete related inspection of composite steel construction.

[2] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

G. STRUCTURAL - COLD-FORMED METAL DECK - PLACEMENT SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

METAL DECK INSPECTION PRIOR TO DECK PLACEMENT – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.1		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Verify compliance of materials (deck and all deck accessories) with construction documents, including profiles, material properties, and base metal thickness	**PERFORM**	
2. Document acceptance or rejection of deck and deck accessories	**DOCUMENT**	
METAL DECK INSPECTION DURING DECK PLACEMENT – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.2		
TASK	INSPECTION TYPE [1]	DESCRIPTION
3. Verify compliance of deck and all deck accessories installation with construction documents	**PERFORM**	
4. Verify deck materials are represented by the mill certifications that comply with the construction documents	**PERFORM**	
5. Document acceptance or rejection of installation of deck and deck accessories	**DOCUMENT**	
METAL DECK INSPECTION AFTER DECK PLACEMENT – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.3		
TASK	INSPECTION TYPE [1]	DESCRIPTION
6. Welding procedure specification (WPS) available	**PERFORM**	
7. Manufactures certifications for welding consumables available	OBSERVE	
8. Material identification (type/grade)	OBSERVE	
9. Check welding equipment	OBSERVE	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

H. STRUCTURAL - COLD-FORMED METAL DECK – WELDING SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

METAL DECK INSPECTION DURING WELDING – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.4		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Use of qualified welders	OBSERVE	
2. Control and handling of welding consumables	OBSERVE	
3. Environmental conditions (wind speed, moisture, temperature)	OBSERVE	
4. WPS followed	OBSERVE	
METAL DECK INSPECTION AFTER WELDING – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.5		
TASK	INSPECTION TYPE [1]	DESCRIPTION
5. Verify size and location of welds, including support, sidelap, and perimeter welds.	**PERFORM**	
6. Welds meet visual acceptance criteria	**PERFORM**	
7. Verify repair activities	**PERFORM**	
8. Document acceptance or rejection of welds	**DOCUMENT**	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

I. STRUCTURAL - COLD-FORMED METAL DECK – FASTENING SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

METAL DECK INSPECTION BEFORE MECHANICAL FASTENING – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.6		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Manufacturer installation instructions available for mechanical fasteners	OBSERVE	
2. Proper tools available for fastener installation	OBSERVE	
METAL DECK INSPECTION DURING MECHANICAL FASTENING – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.7		
TASK	INSPECTION TYPE [1]	DESCRIPTION
3. Fasteners are positioned as required	OBSERVE	
4. Fasteners are installed in accordance with manufacturer's instructions	OBSERVE	
METAL DECK INSPECTION AFTER MECHANICAL FASTENING – VERIFY THE FOLLOWING ARE IN COMPLIANCE SDI QA/QC-2011, Appendix 1, Table 1.8		
TASK	INSPECTION TYPE [1]	DESCRIPTION
5. Check spacing, type, and installation of support fasteners	**PERFORM**	
6. Check spacing, type, and installation of sidelap fasteners	**PERFORM**	
7. Check spacing, type, and installation of perimeter fasteners	**PERFORM**	
8. Verify repair activities	**PERFORM**	
9. Document acceptance or rejection of mechanical fasteners	**DOCUMENT**	

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.

J. STRUCTURAL - LIGHT GAUGE STEEL FRAMING AND/OR LIGHT GAUGE TRUSSES SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

LIGHT GAUGE STEEL CONSTRUCTION AND CONNECTIONS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.2.2, 1705.11.2, 1705.11.3, UFC 4 023 03		
TASK	INSPECTION TYPE[1]	DESCRIPTION
1. Trusses spanning 60-feet or greater where/if applies	**PERFORM**	Verify that temporary and permanent truss restraint/bracing is installed in accordance with approved truss submittal package.
2. Welded connections (seismic and/or wind resisting system)	OBSERVE	Visually inspect all welds composing part of the main wind or seismic force resisting system, including shearwalls, braces, collectors (drag struts), and hold-downs. **[NOTE: DOR must identify critical wind and/or seismic force resisting welds in the contract drawings so that the special inspector can confirm compliance.]**
3. Connections (seismic and/or wind resisting system)	OBSERVE	Visually inspect all screw attachment, bolting, anchoring and other fastening of components within the main wind or seismic force resisting system, including roof deck, roof framing, exterior wall covering, wall to roof/floor connections, braces, collectors (drag struts) and hold-downs. **[NOTE: DOR must identify critical wind and/or seismic force resisting connection/fastener components in the contract drawings so that the special inspector can confirm compliance.]**
4. Cold-formed steel (progressive collapse resisting system where/if applies)	OBSERVE	Verify proper welding operations, screw attachment, bolting, anchoring and other fastening of components within the progressive collapse resisting system, including horizontal tie force elements, vertical tie force elements and bridging elements (UFC 4 023 03). **[NOTE: DOR must identify critical progressive collapse resisting connection/fastener components in the contract drawings so that the special inspector can confirm compliance.]**

END SECTION

K. STRUCTURAL - OPEN-WEB STEEL JOISTS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

OPEN-WEB STEEL JOISTS AND JOIST GIRDERS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC TABLE 1705.2.3		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Installation of open-web steel joists and joist girders	OBSERVE	✓ End connections – welded or bolted ✓ Bridging – horizontal and diagonal

END SECTION

[1] **PERFORM**: Perform these tasks for each weld, fastener or bolted connection, and required verification.
OBSERVE: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

L. STRUCTURAL - CONCRETE CONSTRUCTION SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

CONCRETE CONSTRUCTION, INCLUDING COMPOSITE DECK – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC TABLE 1705.3 (ACI 318 REFERENCES NOTED IN IBC TABLE)		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Inspect reinforcement, including prestressing tendons, and verify placement.	OBSERVE	Verify prior to placing concrete that reinforcing is of specified type, grade and size; that it is free of oil, dirt and unacceptable rust; that it is located and spaced properly; that hooks, bends, ties, stirrups and supplemental reinforcement are placed correctly; that lap lengths, stagger and offsets are provided; and that all mechanical connections are installed per the manufacturer's instructions and/or evaluation report.
2. Reinforcing bar welding	OBSERVE	✓ Verify weldability of reinforcing bars other than ASTM A 706 ✓ Inspect single-pass fillet welds, maximum 5/16" in accordance with AWS D1.4
3. All other welding	**CONTINUOUS**	Visually inspect all welds in accordance with AWS D1.4
4. Cast in place anchors and post installed drilled anchors (downward inclined)	OBSERVE	Verify prior to placing concrete that cast in place anchors and post installed drilled anchors have proper embedment, spacing and edge distance.
5. Post-installed adhesive anchors in horizontal or upward inclined orientations	**CONTINUOUS AND DOCUMENT**	✓ Inspect as required per approved ICC-ES report ✓ Verify that installer is certified for installation of horizontal and overhead installation applications ✓ Inspect proof loading as required by the contract documents
6. Verify use of required mix design	OBSERVE	Verify that all mixes used comply with the approved construction documents
7. Prior to concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete	**CONTINUOUS**	At the time fresh concrete is sampled to fabricate specimens for strength test verify these tests are performed by qualified technicians.
8. Inspect concrete and/or shotcrete placement for proper application techniques	**CONTINUOUS**	Verify proper application techniques are used during concrete conveyance and depositing avoids segregation or contamination. Verify that concrete is properly consolidated.
9. Verify maintenance of specified curing temperature and technique	OBSERVE	Inspect curing, cold weather protection, and hot weather protection procedures.
10. Pre-stressed concrete	**CONTINUOUS**	Verify application of prestressing forces and grouting of bonded prestressing tendons.

CONTINUED ON FOLLOWING PAGE

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.
CONTINUOUS: Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

K. STRUCTURAL - CONCRETE CONSTRUCTION (CONTINUED)

CONCRETE CONSTRUCTION, INCLUDING COMPOSITE DECK – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC TABLE 1705.3 (ACI 318 REFERENCES NOTED IN IBC TABLE)		
TASK	INSPECTION TYPE [1]	DESCRIPTION
11. Inspect erection of precast concrete members	OBSERVE	
12. Verify in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete and prior to removal of shores and forms from beams and structural slabs.	OBSERVE	
13. Inspect formwork for shape, location and dimensions of the concrete member being formed.	OBSERVE	

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
DOCUMENT: Document in a report that the work has been performed as required. This is in addition to all other required reports.
CONTINUOUS: Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

M. STRUCTURAL - MASONRY CONSTRUCTION SECTION (ALL RISK CATEGORIES)

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☒

MASONRY CONSTRUCTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE AT START OF CONSTRUCTION IBC 1705.4 (ACI 530-13 TABLE 3.1.2 & 3.1.3)		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Compliance with approved submittals prior to start	OBSERVE	
2. Proportions of site-mixed mortar.	OBSERVE	
3. Grade and type of reinforcement, anchor bolts, and prestressing tendons and anchorages	OBSERVE	
4. Prestressing technique	OBSERVE	
5. Properties of thin bed mortar for AAC masonry	OBSERVE	
MASONRY CONSTRUCTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE PRIOR TO GROUTING IBC 1705.4 (ACI 530-13 TABLE 3.1.2 & 3.1.3)		
TASK	INSPECTION TYPE [1]	DESCRIPTION
6. Grout space	**CONTINUOUS**	
7. Proportions of site-prepared grout and prestressing grout for bonded tendons	OBSERVE	
8. Proportions of site-mixed grout and prestressing grout for bonded tendons	OBSERVE	
9. Placement of masonry units and mortar joints	OBSERVE	
10. Welding of reinforcement	**CONTINUOUS**	
MASONRY CONSTRUCTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE DURING CONSTRUCTION IBC 1705.4 (ACI 530-13 TABLE 3.1.2 & 3.1.3)		
TASK	INSPECTION TYPE [1]	DESCRIPTION
11. Size and location of structural elements is in compliance	OBSERVE	
12. Preparation, construction, and protection of masonry during cold weather (temperature below 40°F (4.4°c) or hot weather (temp above 90°F (32.2°C))	OBSERVE	
13. Application and measurement of prestressing force	**CONTINUOUS**	
14. Placement of grout and prestressing grout for bonded tendons	**CONTINUOUS**	
15. Placement of AAC masonry units and construction of thin bed mortar joints	**CONTINUOUS**	Continuous for first 5000 square feet only (465 square meters).
16. Observe preparation of grout specimens, mortar specimens, and/or prisms	OBSERVE	
17. Type, size and placement of reinforcement, connectors, anchor bolts and prestressing tendons and anchorages, including details of anchorage of masonry to structural members, frames, or other construction	**CONTINUOUS**	

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.
CONTINUOUS: Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

N. STRUCTURAL - WOOD CONSTRUCTION – SPECIALTY ITEMS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

WOOD CONSTRUCTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.5		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. High-load diaphragms where applicable	OBSERVE	Verify thickness and grade of sheathing, size of framing members at panel edges, nail diameters and length, and the number of fastener lines and that fastener spacing is per approved contract documents.
2. Metal-plate connected wood trusses spanning 60 feet or greater	OBSERVE	Verify that the temporary installation restraint/bracing and the permanent individual truss member restraint/bracing are installed in accordance with the approved truss submittal package

END SECTION

O. STRUCTURAL - WOOD CONSTRUCTION - SEISMIC & WIND SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

WOOD CONSTRUCTION SEISMIC AND WIND – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.5		
TASK	INSPECTION TYPE [1]	DESCRIPTION
[NOTE: DOR may uncheck this section where sheathing nailing/fasteners (both shearwall and roof) are consistently greater than 4" on center, or if the design wind speed is less than 110 mph (49 meters/sec) AND the seismic design category is A or B]		
1. Nailing, bolting, anchoring and other fastening of elements of the main wind/seismic force-resisting system	OBSERVE	Includes connectors for: shearwall sheathing, roof/floor sheathing, drag struts/collectors, braces, hold downs, roof and floor framing connections to exterior walls.

END SECTION

P. STRUCTURAL – ISOLATION AND ENERGY DISSIPATION SYSTEMS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

ISOLATION AND ENERGY DISSIPATION SYSTEMS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC TABLE 1705.2.3		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Fabrication and installation	OBSERVE	Verify that fabrication and installation of isolator units and energy dissipation devices conform to manufacturer's recommendations and approved construction documents

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

Q. GEOTECHNICAL - SOILS INSPECTION SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

SOILS INSPECTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.6		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Materials below shallow foundations are adequate to achieve the design bearing capacity.	OBSERVE	
2. Excavations are extended to proper depth and have reached proper material	OBSERVE	
3. Verify use of proper materials, densities and lift thicknesses during placement and compaction of compacted fill	**CONTINUOUS**	
4. Prior to placement of compacted fill, inspect subgrade and verify that site has been prepared properly.	OBSERVE	During fill placement, the special inspector shall verify that proper materials and procedures are used in accordance with the provisions of the approved geotechnical report

END SECTION

R. GEOTECHNICAL - DRIVEN DEEP FOUNDATION ELEMENTS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

DEEP DRIVEN FOUNDATION CONSTRUCTION – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.5		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Verify element materials, sizes and lengths comply with requirements	**CONTINUOUS**	
2. Inspect driving operations and maintain complete and accurate records for each element	**CONTINUOUS**	
3. Verify placement locations and plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achiever design capacity, record tip and butt elevations and document ay damage to foundation element	**CONTINUOUS**	

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

CONTINUOUS: Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

S. GEOTECHNICAL - HELICAL PILE FOUNDATIONS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

HELICAL PILE FOUNDATIONS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.9		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Record installation equipment used, pile dimensions, tip elevations, final depth, final installation torque and other pertinent installation data. The approved geotechnical report and the contract documents shall be used to determine compliance	**CONTINUOUS**	

END SECTION

T. GEOTECHNICAL - CAST IN PLACE DEEP FOUNDATION ELEMENTS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

CAST IN PLACE DEEP FOUNDATION ELEMENTS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.8		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Inspect drilling operations and maintain complete and accurate records for each element.	**CONTINUOUS**	
2. Verify placement locations and plumbness, confirm element diameters, bell diameters (if applicable), lengths, embedment into bedrock (if applicable and adequate end-bearing strata capacity. Record concrete or grout volumes	**CONTINUOUS**	

END SECTION

[1] **CONTINUOUS:** Constant monitoring of identified tasks by a special inspector over the duration of performance of said tasks.

U. FIRE PROTECTION - SPRAYED FIRE-RESISTANT MATERIALS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

SPRAYED FIRE RESISTANT MATERIALS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.14		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Surface condition	OBSERVE	Prior to application confirm that surface has been prepared per the approved fire-resistance design and manufacturer's instructions.
2. Application	OBSERVE	Prior to application confirm that the substrate meets the minimum ambient temperature per the approved fire-resistance design and manufacturer's instructions.
3. Material thickness	OBSERVE	Verify that the thickness of the SFRM to structural elements is not less than the thickness require by the fire-resistant design in more that 10 percent of the measurement, but in no case less than minimum allowable thickness required by 1705.14.
4. Material density	OBSERVE	Verify that the thickness of the SFRM to structural elements is not less than the thickness require by the fire-resistant design in more than 10 percent of the measurement, but in no case less than minimum allowable thickness required by IBC 1705.14.5
5. Bond strength	OBSERVE	Verify cohesive/adhesive bond strength of the cured SFRM applied to the structural element is not less than 150psf and according to IBC 1705.14.6

END SECTION

V. FIRE PROTECTION - MASTIC AND INTUMESCENT COATINGS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

MASTIC AND INTUMESCENT FIRE-RESISTANT COATINGS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.15		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Surface preparation	OBSERVE	Inspections shall be performed in accordance with AWCI 12-B and the contract documents

END SECTION

W. FIRE PROTECTION – FIRE RESISTANT PENETRATIONS AND JOINTS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

FIRE RESISTANT PENETRATIONS AND JOINTS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.17		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Inspections of penetration firestop systems conducted in accordance with ASTM E 2174.	OBSERVE	**[NOTE: This section applies to Risk Category III, IV, & V only. DOR may choose to uncheck this section where project is assigned to Risk Category I or II. Confirm Risk Category with Structural Engineer]**
2. Inspections of fire-resistant joint systems conducted in accordance with ASTM E 2393	OBSERVE	

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

X. FIRE PROTECTION – SMOKE CONTROL SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

SMOKE CONTROL – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.17		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Verify device locations and perform leakage testing	OBSERVE	Perform during erection of ductwork and prior to concealment
2. Pressure difference testing, flow measurements and detection and control verification	OBSERVE	Perform prior to occupancy and after sufficient completion

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

Y. ARCHITECTURAL - EXTERIOR INSULATION AND FINISH SYSTEMS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS) – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.16		
TASK	INSPECTION TYPE [1]	DESCRIPTION
1. Water resistive barrier coating applied over a sheathing substrate.	OBSERVE	Verify that water resistive barrier coating complies with ASTM E 2570. **[NOTE: not applicable to masonry or concrete wall applications. Uncheck this section in those cases]**

END SECTION

Z. ARCHITECTURAL – ARCHITECTURAL COMPONENTS

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

ARCHITECTURAL COMPONENTS – VERIFY THE FOLLOWING ARE IN COMPLIANCE IBC 1705.12.5, 1705.12.7		
TASK	INSPECTION TYPE [1]	DESCRIPTION
[NOTE: This section is not applicable to Seismic Design Categories A, B, & C. Uncheck this section if one of those categories applies. Confirm Seismic Design Category with the structural engineer]		
1. Erection and fastening of exterior cladding and interior and exterior veneer.	OBSERVE	Verify appropriate materials, fasteners and attachment at commencement of work and at completion. **Inspector Note: Inspection not required if height is less than 30 feet or weight is less than 5psf**
2. Interior and exterior non-load bearing walls	OBSERVE	Verify appropriate materials, fasteners and attachment at commencement of work and at completion. **Inspector Note: Inspection not required if height is less than 30 feet. Also, Interior non-load bearing walls need not be inspected if weighing less than 15psf**
3. Access floors	OBSERVE	Verify that anchorage complies with approved construction documents. Inspection of post-installed anchors shall comply with approved ICC-ES report
4. Storage racks	OBSERVE	Verify that anchorage complies with approved construction documents. Inspection of post-installed anchors shall comply with approved ICC-ES report. **Inspector Note: Not required for racks less than 8 feet in height**

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

AA. PLUMBING/MECHANICAL/ELECTRICAL DESIGNATED SEISMIC SYSTEMS SECTION

THIS SECTION APPLICABLE IF BOX IS CHECKED: ☐

PLUMBING, MECHANICAL AND ELECTRICAL - DESIGNATED SEISMIC SYSTEMS IBC 1705.12.4		
TASK	INSPECTION TYPE [1]	DESCRIPTION
[NOTE: This section is not applicable to Seismic Design Categories A or B. Uncheck this section if one of those categories applies. Confirm Seismic Design Category with structural engineer]		
1. Designated Seismic Systems equipment verification	OBSERVE	✓ Verify model number and serial number are in conformance with project specific seismic qualification (PSSQ) ✓ Verify Tag ID is correct and installed per specifications
2. Designated Seismic Systems equipment Mounting	OBSERVE	✓ Verify that Anchor Base Bolting is installed per PSSQ ✓ Verify that Equipment Bracing is Installed per PSSQ ✓ Verify that Bracing Attachments are installed per PSSQ
3. Designated Seismic Systems utility Conduit/Piping	OBSERVE	✓ Verify that Conduit/Piping is connected to the equipment per PSSQ (flex or rigid) ✓ Verify that Conduit/Piping is seismically supported independently of equipment and in accordance with PSSQ support requirements
4. Designated Seismic Systems clearance	OBSERVE	✓ Adjacent Equipment – Verify that there is adequate gap to eliminate possibility of pounding ✓ Conduit/Piping - Verify that there is adequate gap to eliminate possibility of pounding

END SECTION

[1] **OBSERVE**: Observe these items on a random sampling basis daily to insure that applicable requirements are met. Operations need not be delayed pending these inspections at contractor's risk.

Project: VA Stratton Façade Repair Phase 2
Location: Albany, NY
Project #: 528A8-22-811
Date: 11/009/21

STATEMENT OF SPECIAL INSPECTIONS

Project Seismic Design Category: B
Project Risk Category: IV
Project Design Wind Speed (mph): >110
Number of Stories: 14 Plus
Structure Height Above Grade (ft): 128'+
Hazardous Occupancy or attached to such? No Group H Occupancies (2015 IBC, Section 415)

Special Inspector of Record (SIOR)

A Special Inspector of Record (SIOR) **IS** required (per UFGS 01 45 35, Section 1.3.8)

SIOR Name (Registered Professional):
Professional Registration Number:
Consulting Firm Name (if any):
SIOR Office AND Mobile Phone Number:

Lateral Force Resisting System (LFRS)

2015 IBC 1704.3.2 and 1704.3.3

Following is a listing of critical main wind/seismic force resisting systems for this structure. Carefully inspect these elements as part of the roles and responsiblities of the Special Inspector (reference the Schedule of Special Inspections for inspection checklists).

Vertical LFRS Elements	Notes
Ordinary Concentric Braced Frames	North - South Direction Only, See Plan
Special Concentric Braced Frames	Lettered Gridline only, see plan for call out
Ordinary Steel Moment resisting Frames (SMRF)	Both orthoginal Directions, See plan for call out
Ordinary Reinforced Concrete Shearwalls	See Key Notes
Concrete Grade Beams Resisting Lateral Loads	Office Portion Only, see plan key notes
Ordinary Reinforced Masonry Shear Walls	High Bay, Numbered Gridlines only, see plan
OSB Sheathed Shear Walls (nailing, sill bolting, Etc)	See schedule on plan
Shear Wall Hold Downs	Identified on Plan & in Detail Sheet X.XX
Horizontal LFRS Elements	**Notes**
Continuous Roof Ties	See Key Notes on Roof Plan
Collector Elements	Identified on plan with key notes
Concrete over metal deck	2nd floor and roof
Metal Roof Deck & Related Fastening System	See Roof Plan
Out of Plane Wall Connections	See Structural Details XX & XX
Diaphragm Cross Rod Bracing	See Roof Plan for locations
Cast in Place Concrete Floor and Roof Diaphragms	See sheet XX for details and rebar schedule
Special Force Transfer Connection	See Detail X on Sheet X.XX

Project: VA Stratton Façade Repair Phase 2
Location: Albany, NY
Project #: 528A8-22-811
Date: 11/009/21

Designated Seismic Systems (DSS)

(2015 IBC 1705.13.3.4) (ASCE 7-10, 13.2.2, C13.2.2) (UFC 3-310-04, 2-11.2 & 2-13.2.2)

DESIGNATED SEISMIC SYSTEMS DO NOT APPLY TO THIS PROJECT, due to the Seismic Design Category being less than C.

ELECTRICAL Designated Seismic Systems (DSS) Requiring a Certificate of Compliance

1.	DSS Emergency or Standby Power System
2.	DSS Component XX
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX

If additional space is required, append an additional sheet listing the remaining DSS

MECHANICAL/PLUMBING Designated Seismic Systems (DSS) Requiring a Certificate of Compliance	
1.	DSS Gas lines and associated fittings, anchorage, & flexible Connections
2.	DSS Component XX
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX
6.	DSS Component XX

If additional space is required, append an additional sheet listing the remaining DSS

OTHER Designated Seismic Systems (DSS) Requiring a Certificate of Compliance	
1.	DSS Building egress stair systems
2.	DSS Building fire sprinkler systems
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX
6.	DSS Component XX

Final Walk Down Inspection and Report

(UFC 3 301 01 SECTION 2-2.4.3)

Designated Seismic Systems shall receive a final walk-down inspection by the Registered Design Professional in Responsible Charge

Final Walk Down Report, Prepared by the Registered Design Professional in Responsible Charge, Must Include:

1. Record observations of Final Walk Down Inspection
2. Document that Inspections were performed in accordance with the Schedule of Special Inspections
3. Document that all Designated Seismic Systems are installed according to construction/manufacturer document requirements, and that Compliance Certificates have been collected (UFC 03 301 01, 2-13.2.2.1).

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.

B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
   1. Adversely effect human health or welfare,
   2. Unfavorably alter ecological balances of importance to human life,
   3. Effect other species of importance to humankind, or;
   4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.

C. Definitions of Pollutants:
   1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
   2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
   3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
   4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
   5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.

6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
7. Sanitary Wastes:
   a. Sewage: Domestic sanitary sewage and human and animal waste.
   b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

A. Establish and maintain quality control for the environmental protection of all items set forth herein.
B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
B. U.S. National Archives and Records Administration (NARA):
   33 CFR 328.....Definitions

1.4 SUBMITTALS

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
   1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the COR and GEMS Coordinator to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the GEMS Coordinator and COR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
      a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
      b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
      c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.

d. Description of the Contractor's environmental protection personnel training program.
e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
h. Permits, licenses, and the location of the solid waste disposal area.
i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
l. Inclusion of “best management practices” and methodologies.

B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
   a. Box and protect from damage existing trees and shrubs to remain on the construction site.
   b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
   c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.

4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
   a. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features shown, on the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
7. Manage and control spoil areas on Government property to limit spoil to areas shown on the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses or lakes.
8. Protect adjacent areas from despoilment by temporary excavations and embankments.
9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
11. Handle discarded materials other than those included in the solid waste category as directed by the COR.

C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to

control water pollution by the listed construction activities that are included in this contract.

1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
3. Monitor water areas affected by construction.

D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.

E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of New York and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.

1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.

3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.

F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities producing repetitive, high-level impact noise may only be performed after 5:00 p.m. and before 8:00 a.m. and unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

MATERIALS HANDLING

CONCRETE MIXERS	75
CONCRETE PUMPS	75
CRANES	75
JACK HAMMERS	75
PNEUMATIC TOOLS	80
SAWS	75
VIBRATORS	75

b. Use shields or other physical barriers to restrict noise transmission.

c. Provide soundproof housings or enclosures for noise-producing machinery.

d. Use efficient silencers on equipment air intakes.

e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.

f. Line hoppers and storage bins with sound deadening material.

g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.

3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.

G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to its original construction or installation condition before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

1. Waste Management Plan development and implementation.
2. Techniques to minimize waste generation.
3. Sorting and separating of waste materials.
4. Salvage of existing materials and items for reuse or resale.
5. Recycling of materials that cannot be reused or sold.

D. At a minimum the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc).
6. Metal products (eg, steel, wire, beverage containers, copper, etc).
7. Sheathings
8. Cardboard, paper and packaging.
9. Bitumen roofing materials.
10. Plastics (eg, ABS, PVC).
11. Carpet and/or pad.
12. Gypsum board.
13. Insulation.
14. Paint.
15. Fluorescent lamps.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:

1. Excess or unusable construction materials.
2. Packaging used for construction products.
3. Poor planning and/or layout.
4. Construction error.
5. Over ordering.
6. Weather damage.
7. Contamination.
8. Mishandling.
9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
   1. Procedures to be used for debris management.
   2. Techniques to be used to minimize waste generation.
   3. Analysis of the estimated job site waste to be generated:
      a. List of each material and quantity to be salvaged, reused, recycled.
      b. List of each material and quantity proposed to be taken to a landfill.
   4. Detailed description of the Means/Methods to be used for material handling.
      a. On site: Material separation, storage, protection where applicable.
      b. Off site: Transportation means and destination. Include list of materials.
         1) Description of materials to be site-separated and self-hauled to designated facilities.
         2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
            a. The names and locations of mixed debris reuse and recycling facilities or sites.
            b. The names and locations of trash disposal landfill facilities or sites.
            c. Documentation that the facilities or sites are approved to receive the materials.
C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
E. Target waste diversion rate by material and an overall diversion rate.
F. Final report documenting the results of implementation of the preconstruction waste management plan.

1.6 APPLICABLE PUBLICATIONS

A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC):LEED Green Building Rating System for New Construction

1.Green Building Initiative (GBI): Green Globes for New Construction 2019

1.7 RECORDS

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

A. List of each material and quantity to be salvaged, recycled, reused.

B. List of each material and quantity proposed to be taken to a landfill.

C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.

C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of elements of buildings, other structures and debris.

1.2 RELATED WORK:

A. Demolition and removal of portions of on-grade slabs outside buildings to be repaired.

B. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).

C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.

D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.

E. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

F. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.

G. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS, Article 1.12, INFECTION CONTROL.

1.3 PROTECTION:

A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.

B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.

C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.

D. The use of dust chutes is prohibited for this project.

E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Clean the work area daily.

F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
   1. No wall or part of wall shall be permitted to fall outwardly from structures.
   2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
   3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4.5 m (15 feet) of fire hydrants.

G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR’s approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

PART 2 - PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 DEMOLITION:

A. Completely remove elements of buildings and structures, including all appurtenances related or connected thereto, as noted below:
   1. As required for installation of replacement materials and elements.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Debris that cannot be removed daily is to be stored in the area as shown on sheet GI-002 of the drawings. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 82 11
TRADITIONAL ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Contract Documents and Related Requirements: Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show or describe the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of Work:

1. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy themselves of the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements or debris in an appropriate regulated area for the following approximate quantities;

a. Exterior Caulking Removal - 120 lin. ft.
b. Exterior Window System glazing compound removal - 180 lin. ft. of glazing compound.

3. Related Work:
a. Section 02 41 00, DEMOLITION
b. Division 09, FINISHES

C. Tasks:
1. The work tasks are summarized briefly as follows:
a. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
b. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
c. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

D. Contractors Use of Premises:
a. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
b. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 10 percent) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

A. If the Contracting Officer; their field representative; the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor’s competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities if:

a. Airborne PCM analysis results equal to or greater than 0.01 f/cc above background levels inside the building but outside the regulated area;
b. breach or break in regulated area containment barrier(s);
c. less than -0.02 inch WCG pressure in the regulated area;
d. serious injury/death at the site;
e. fire/safety emergency at the site;
f. respiratory protection system failure;
g. power failure or loss or inadequate use of wetting agent;
h. any visible emissions observed outside the regulated area; or
i. failure to follow project specification requirements.

1.4 DEFINITIONS

A. General: Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary:

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aerosol - Solid or liquid particulate suspended in air.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive air sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 3, Fifth Edition is used to determine the fiber levels in air. For personal samples, area air samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis, the NIOSH Method 7402 (Issue 2, Fourth Edition) can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester (MCE) membrane for PCM (Phase Contrast Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.8 micron pore size) and MCE for TEM (Transmission Electron Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.45 micron pore size).

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor – Some states require that any person conducting asbestos abatement air sampling, clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as doors, windows, penetrations or any other opening into the regulated area.

Primary Barrier – Plastic barriers placed over critical barriers and exposed directly to abatement work or to secondary barrier.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial

hygienist must meet the qualification requirements of a PIH and may report to a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace – An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6-mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance – Asbestos Operations and Maintenance Activities (OSHA Class III) that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag, which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent asbestos as determined using the method specified in 40 CFR 763, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter – An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training,

experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement air sampling, clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL or Excursion Limit (EL).

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02 inch water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for as an eight (8) hour time-weighted average (TWA). For asbestos fibers, the eight (8) hour time-weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit (EL) is 1.0 fibers per cubic centimeter (1 f/cc).

Personal protective equipment (PPE) – equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, fall protection, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Pipe tunnel – An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, debris or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6-mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator, respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH/CIH) or Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Subpart E, Appendix C, Part I; (B)(5).

Assigned protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-2018.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, decorative, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) – The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may report to a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

VA Total – means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) – The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations: See Section 01 42 19 REFERENCED STANDARDS.

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability of Codes, Regulations, and Standards:

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and Local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system and/or the Contractor’s on-site Field Office. These standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 may be made available electronically.

B. Asbestos Abatement Contractor Responsibility: The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE), respiratory protection, and respirator fit testing, as required by applicable Federal, State and Local regulations. The

Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State/Local requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements:

1. Federal requirements which govern asbestos abatement include, but are not limited to, the following regulations:
   a. Occupational Safety and Health Administration **(OSHA)**
      1) Title 29 CFR 1926.1101 - Construction Standard for Asbestos
      2) Title 29 CFR 1926 Subpart E - Personal Protective Equipment and Life Saving Equipment
      3) Title 29 CFR 1910.134 - Respiratory Protection
      4) Title 29 CFR 1926 - Construction Industry Standards
      5) Title 29 CFR 1926.33 - Access to Employee Exposure and Medical Records
      6) Title 29 CFR 1926.59 same as 1910.1200 - Hazard Communication
      7) Title 29 CFR 1926 Subpart C – General Safety and Health Provisions and Subpart D – Occupational Health and Environmental Controls
   b. Environmental Protection Agency **(EPA)**:
      1) 40 CFR 61 Subpart M - National Emission Standard for Hazardous Air Pollutants - Asbestos.
      2) 40 CFR 763 - Asbestos Hazard Emergency Response Act (AHERA) and Asbestos Hazard Abatement Reauthorization Act (ASHARA)
   c. Department of Transportation **(DOT)**
      1) Title 49 CFR 171 - 180 – Transportation

D. State Requirements:

1. State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following: New York State – NYCRR Part 56

E. Local Requirements:

1. If local requirements are more stringent than federal or state standards, the local standards are to be followed.

F. Standards:

1. Standards which govern asbestos abatement activities include, but are not limited to, the following:
   a. American National Standards Institute (ANSI)/ASSP Z9.2-2018 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI/ASSE Z88.2-2015 - Practices for Respiratory Protection.
   b. Underwriters Laboratories (UL) 586-2009 - UL Standard for Safety of HEPA Filter Units, 9th Edition; ANSI Approval 2017-12-19.
2. Standards which govern encapsulation work include, but are not limited to the following:
   a. American Society for Testing and Materials International (ASTM)
3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   a. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   b. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   c. NFPA 101 - Life Safety Code

G. EPA Guidance Documents:

1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference.
2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
3. Asbestos Waste Management Guidance EPA 530-SW-85-007
4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

H. Notices:

1. State and Local agencies: Send written notification as required by State and Local regulations prior to beginning any work on ACM as follows: Per NYCRR Part 56.

2. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.

I. Permits/Licenses: The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

J. Posting and Filing of Regulations: Maintain two (2) copies of applicable Federal, State, and Local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another hard copy or electronic copy in the Contractor's office.

K. VA Responsibilities prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

L. Emergency Action Plan and Arrangements:

1. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1926, Subpart C, Standard 1926.35 Employee Emergency Action Plans.
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
   a. For non-life-threatening situations - employees injured or otherwise incapacitated shall be decontaminated following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
   b. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, medical personnel shall remove them from the regulated area if back or neck injury is present, and secure proper medical treatment.
6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event

of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

M. Pre-Construction Meeting:

1. Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPIH/CIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:
   a. Proof of Contractor licensing.
   b. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
   c. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
   d. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
   e. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
   f. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
   g. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
      1) Regulated area preparation procedures;
      2) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d) Multi-Employer Worksites;
      3) Decontamination area set-up/layout and decontamination procedures for employees;
      4) Abatement methods/procedures and equipment to be used;
      5) Personal protective equipment to be used.
   h. At this meeting the Contractor shall provide all submittals as required.

i. Procedures for handling, packaging and disposal of asbestos waste.
j. Emergency Action Plan and Contingency Plan Procedures.
k. Notification Compliance Data: Within 2 days after notification is sent to the regulatory agencies submit one copy of each notice sent to each regulatory agency (USEPA and DOL).
l. Waste Transporter Permit: One copy of transporter's current waste transporter permit from NYS DEC (NYS Part 364 Permit)
m. Landfill: Landfill to be used for ACM disposal shall be licensed to receive asbestos waste by NYS DEC (NYS Part 360 Permit) and by USEPA. Out of state landfills shall provide licenses from local agencies having jurisdiction.
n. Negative Air Pressure Equipment: Copy of manufacturer's and performance data of all units and HEPA filters used.

1.6 PROJECT COORDINATION

A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work.
1. Personnel:
a. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
b. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; last four digits of social security number; qualifications; accreditation card with color picture, if required by state; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
c. Minimum qualifications for Contractor and assigned personnel are:

1) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of Federal (and State or Local as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable state; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical

and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

d. All personnel shall be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program: The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.134. ANSI Standard Z88.2-2015 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator: The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years of experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection and Use of Respirators: The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit or in the onsite Contractor’s office, for reference by employees or authorized visitors.

D. Minimum Respiratory Protection: Shall be a ½-mask negative pressure air purifying respirator equipped with P100 filters, provided personal air samples in the workplace remain at or below 0.1 f/cc, determined as an 8-hour TWA. Full face powered air purifying respirator equipped with P100 filters shall be required until Contractor demonstrates that personal air samples are at or below 0.1 f/cc, determined as an 8-hour TWA. A higher level of respiratory protection shall be required, if fiber levels exceed 1 f/cc as an 8-hour TWA, inside the regulated work area. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h) and 29 CFR 1910.134 (d)(3)(i)(A) Table 1, except as

indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion: No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test: All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

G. Respirator Fit Check: The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from entering the regulated area until resolution of the problem.

H. Maintenance and Care of Respirators: The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

I. Supplied Air Systems: If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

A. Training of Abatement Personnel: Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training

must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations: Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion that the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Regulated Area Entry Procedure: The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

D. Decontamination Procedure: The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

1. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
2. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
   a. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
   b. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay

particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.

c. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.

3. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
4. Shower and wash body completely with soap and water. Rinse thoroughly.
5. Rinse shower room walls and floor to drain prior to exiting.
6. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

E. Regulated Area Requirements: The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

A. Description: Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

B. General Requirements: All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF

and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6-mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6-mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape or approved equivalent so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

C. Temporary Facilities to the PDF and W/EDF: The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70 degrees F throughout the PDF and W/EDF.

D. Personnel Decontamination Facility (PDF): The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3

layers of 6-mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6-mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry and sanitary condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Male/Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male/female can enter or exit the PDF during his/her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6-mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be

changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.

3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The Competent Person shall ensure that most gross contamination is removed from the outside of PPE, suits and respirators in the regulated work area, prior to entering the Equipment Room. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6-mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6-mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6-mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6-mil opaque fire retardant poly.

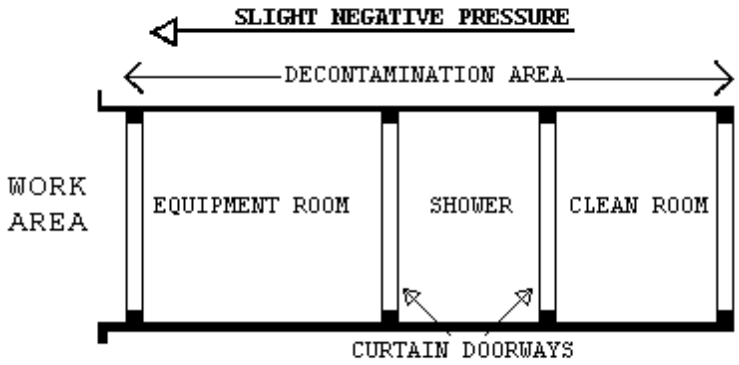

E. Waste/Equipment Decontamination Facility (W/EDF):

1. The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:
   a. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
   b. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2 inches x 4 inches) wood framing or approved equivalent and 3 layers of 6-mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6-mil fire retardant poly.
   c. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2 inches x 4 inches) wood framing or approved equivalent and 3 layers of 6-mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes

through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6-mil fire retardant poly.

d. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 inches x 4 inches wood framing or approved equivalent and 2 layers of 6-mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6-mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.

e. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

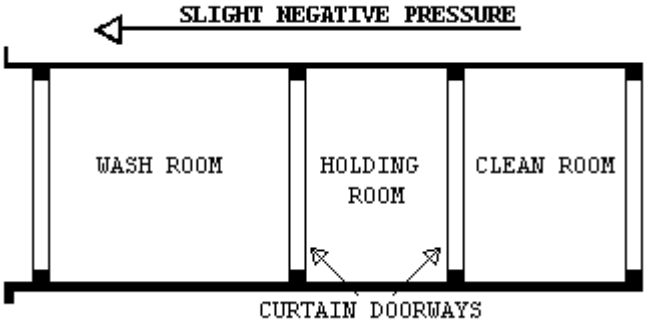

F. Waste/Equipment Decontamination Procedures: At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and

disposal. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. General Requirements: Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

1. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
2. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
3. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
4. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
5. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
6. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape, poly tape, furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or approved equivalent procedures capable of sealing

polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.

7. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6-mil fire retardant poly.
8. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
9. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
10. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
11. Disposal bags - 2 layers of 6-mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
12. The VA shall be provided an advance copy of the Safety Data Sheets (SDS) as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-start meeting submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
13. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
14. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 MONITORING, INSPECTION AND TESTING

A. General:

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples inside the building, but outside the regulated area. Inside the building, but outside the regulated area air samples shall be collected in the Clean Room of the PDF, at the approximate location of HEPA exhaust discharge, and at a minimum of three (3) locations in areas immediately outside the regulated work area to satisfy this specification. Additional inspection and testing requirements are also indicated in other parts of this specification.
2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be

required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

B. Scope of Services of the VPIH/CIH Consultant:

1. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
   a. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
   b. Task 2: Perform representative air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any

adverse impact on the surroundings from regulated area activities.

c. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
d. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
e. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
f. Task 6: Issue certificate of decontamination for each regulated area and project report.

2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection and Testing by Contractor CPIH/CIH: The Contractor’s CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor’s personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field

experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytical Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples and have experience in substantially similar projects in size and scope. The analytical laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for personal and area air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two (2) personal air samples or 25 percent of representative workforce per shift shall be collected, whichever is greater, in the regulated area; a minimum of three (3) area air samples at locations inside the building but immediately outside the regulated work area; one (1) area air sample shall be collected daily in the Clean Room of the PDF; and one (1) area air sample shall be collected daily at the approximate location of HEPA exhaust discharge. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.3 ASBESTOS HAZARD ABATEMENT PLAN

A. The Contractor shall have an established an Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAPs are:

1. Minimum Personnel Qualifications
2. Emergency Action Plan/Contingency Plans and Arrangements
3. Security and Safety Procedures
4. Respiratory Protection/Personal Protective Equipment Program and Training
5. Medical Surveillance Program and Recordkeeping
6. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
7. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
8. Negative Pressure Systems Requirements
9. Monitoring, Inspections, and Testing
10. Removal Procedures for ACM
11. Removal of Contaminated Soil (if applicable)
12. Encapsulation Procedures for ACM
13. Disposal of ACM waste/equipment
14. Regulated Area Decontamination/Clean-up
15. Regulated Area Visual and Air Clearance
16. Project Completion/Closeout

2.4 SUBMITTALS

A. Pre-Start Meeting Submittals:

1. Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:
   a. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.

b. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
c. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
d. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
    1) Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
    2) Waste water filtration system, shower system, containment barriers.
    3) Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
    4) Respirators, protective clothing, fall protection and other required personal protective equipment.
    5) Fire safety equipment to be used in the regulated area.
e. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
f. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
g. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk

samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.

h. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
   2) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
   3) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including the company’s officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.

i. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulation. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
   1) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; medical opinion; and current respirator fit test.

2) Competent Person(s)/Supervisor(s): Number; names; last four digits of social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
3) Workers: Numbers; names; last four digits of social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.

j. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAPs incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical methods used.
k. Rented equipment must be decontaminated prior to returning to the rental agency.
l. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all SDS and application instructions.

B. Submittals During Abatement:
1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel

entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; and representative air monitoring and results/TWA's/EL's. Submit this information daily to the VA's representative.

2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
   a. Removal of any poly barriers.
   b. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
   c. Packaging and removal of ACM waste from regulated area.
   d. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

C. Submittals at Completion of Abatement: The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

2.5 ENCAPSULANTS

A. Types of Encapsulants:
   1. The following four types of encapsulants, if used, must comply with performance requirements as stated in paragraph 2.5.2:
      a. Removal encapsulant - used as a wetting agent to remove ACM.
      b. Bridging encapsulant - provides a tough, durable coating on ACM.
      c. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2 inches).
      d. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

B. Performance Requirements:

1. Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:
   a. General Requirements for all Encapsulants:
      1) ASTM E84: Flame spread of 25; smoke emission of 50.
      2) University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
      3) ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
      4) ASTM E96: Permeability - minimum of 0.4 perms.
   b. Bridging/Penetrating Encapsulants:
      1) ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 pounds/square foot).
      2) ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
      3) ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
      4) ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.
   c. Lockdown Encapsulants:
      1) ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
      2) ASTM E736: Bond Strength - 48 kPa (100 pounds/square foot) (test compatibility with cementitious and fibrous fireproofing).
      3) In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or creating any noxious gaseous or vapors during or after application.

C. Certificates of Compliance: The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

A. Site Security:

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and Local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
3. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed and demarcated as an asbestos regulated work area to prevent entry to or exit from the regulated area unless in the event of an emergency. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24-hour security system shall be provided at the entrance to the regulated area to assure that all

entrants are logged in/out and that only authorized personnel are allowed entrance.

6. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
7. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police shall be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

B. Signage and Power Management:

1. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
2. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
3. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of independently installed 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

C. Negative Pressure Filtration System:

1. The Contractor shall provide enough HEPA negative air machines to effect ≥ - 0.02 inch WCG pressure differential inside the regulated work area. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect ≥ - 0.02 inch WCG pressure inside the regulated work area. Provide standby units in the event of machine failure and/or emergency in an adjacent area. HEPA equipped negative air machines shall be discharged outside of the building a minimum of 30 feet from building make-up air, doors, open windows, patients, visitors and staff.
2. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50 percent efficiency. The contractor shall consider this in their determination of number of units needed to provide ≥ - 0.02 inch WCG pressure differential inside the regulated work area. The contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2 inches pressure drop across the filters.
3. Design and Layout:
   a. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
      1) Method of supplying power to the units and designation/location of the panels.
      2) Description of testing method(s) for correct air volume and pressure differential.
      3) If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.
4. Negative Air Machines (Hepa Units):

a. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30 inches in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
b. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
c. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97 percent. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
d. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.

e. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
f. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
g. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
h. It is essential that replacement HEPA filters be tested using an “in-line” testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters.

5. Pressure Differential: The fully operational negative air system within the regulated area shall continuously maintain a pressure differential $\geq$ - 0.02 inch WCG inside the regulated work area. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(g)(5)(i). The Competent Person shall be responsible for providing, maintaining,

and documenting the negative pressure and air changes as required by OSHA and this specification.

6. Monitoring: The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least $\geq$ - 0.02 inch WCG pressure differential inside the regulated work area for the duration of the project.
7. In the event of electric power supply failure, abatement shall stop immediately and shall not resume until power is restored and exhaust units are operating fully. In the event of extended power failure (longer than one hour), after evacuation of all persons from the regulated abatement work area, the decontamination system enclosure facilities shall be sealed airtight.
8. Supplemental Make-Up Air Inlets: Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.
9. Testing The System: The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Verification and documentation of adequate negative pressure differential across each barrier must be done at the start of each work shift.
10. Demonstration of the Negative Pressure Filtration System:

a. The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:
   1) Plastic barriers and sheeting move lightly in toward the regulated area.
   2) Curtains of the decontamination units move in toward regulated area.
   3) There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
   4) Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at > - 0.02 inch across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

11. Use of the Negative Pressure Filtration System During Abatement Operations:
   a. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of > - 0.02 inch water column gauge, for the duration of the work until a final visual clearance and final air clearance has been successfully completed.
   b. No negative air units shall be shut down at any time unless authorized by the VA Contracting Officer, verbally and in writing.
   c. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
   d. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately

begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.

e. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been successfully completed for that regulated area.

12. Dismantling The System: After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The unit exterior surfaces shall have been completely decontaminated; pre-filters are not to be removed and the units inlet/outlet sealed with 2 layers of 6-mil poly immediately after shut down. No filter removal shall occur at the VA site following successful completion of site clearance. OSHA/EPA/DOT asbestos labels shall be attached to the units.

D. Containment Barriers and Coverings in the Regulated Area:

1. General: Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, Contractor shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.
2. Preparation Prior To Sealing: The Regulated Area: Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects not scheduled for removal remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.
3. Controlling Access to The Regulated Area: Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER

demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6-mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

4. Critical Barriers: Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6-mil fire retardant poly and duct tape. Individually seal with 2 layers of 6-mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.
5. Primary Barriers:
   a. Cover the regulated area with two layers of 6-mil fire retardant poly on the floors and two layers of 4 mil, fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12 inches). Seams must overlap at least 1800 mm (6 feet) and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6-mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.
   b. If stairs and ramps are covered with 6-mil plastic, two layers must be used. Provide 19 mm (3/4 inch) exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.
6. Secondary Barriers: A loose layer of 6-mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work.
7. Extension of the Regulated Area: If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be

started immediately and continue until air monitoring indicates background levels are met.

8. Firestopping:
   a. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
   b. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
   c. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

E. Sanitary Facilities: The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

F. Personal Protective Equipment: Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

G. Pre-Cleaning:
   1. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
   2. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been

established in the work area. All workers performing pre-cleaning activities must don appropriate personal protective equipment (PPE), as specified throughout this document and as approved in the Contractor's work plan. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

3. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items shall be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Carpeting will be disposed of prior to abatement if in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.
4. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.
5. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with

equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

H. Pre-Abatement Activities:

1. Pre-Abatement Meeting: The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.
2. Pre-Abatement Construction and Operations:
   a. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
   b. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.

c. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
d. Upon satisfactory inspection of the installation of and operation of systems, the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3. Pre-Abatement Inspections and Preparations:
   a. Before any work begins on the construction of the regulated area, the Contractor will:
      1) Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
      2) A NESHAP (destructive) ACM inspection shall be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawlspaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings. Verify during NESHAP survey that no other suspect ACM is present.
      3) Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
      4) If present and required, remove and dispose of carpeting from floors in the regulated area.
      5) Inspect existing firestopping in the regulated area. Correct as needed.

3.2 REMOVAL OF ACM

A. Wetting ACM:

1. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
2. Amended Water: Provide water to which a surfactant has been added to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting of one ounce of 50 percent polyoxyethylene ester and 50 percent polyoxyethylene ether mixed with 5 gallons (19L) of water.
3. Removal Encapsulant: When authorized by VA, provide a removal encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

B. Secondary Barrier and Walkways:

1. Install as a drop cloth a 6-mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
2. Install walkways using 6-mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

C. Wet Removal of ACM:

1. Adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time must be

allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**

2. If ACM does not wet well with amended water due to composition, coating or jacketing, remove as follows:
   a. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
   b. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material, while still wet into disposal bags. Twist the bag neck tightly, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of the bag of any residue and move to washdown station adjacent to W/EDF.
   c. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not over saturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6 meters), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Periodically re-wet the substrate with amended water as needed to

prevent drying of the material before the residue is removed from the substrate.

d. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not over saturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2 feet x 6 feet (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.

D. Wet Removal of Amosite:

1. The following areas shown on drawings indicate locations of amosite ACM which will require local exhaust ventilation and collection as described below, in addition to wet removal. Provide specific description /locations/ drawings.
2. Provide local exhaust ventilation and collection systems to assure collection of amosite fibers at the point of generation. A 300 mm (12") flexible rigid non-collapsing duct shall be shall be located no more than 600 mm (2 feet) from any scraping/brushing activity. Primary filters must be replaced every 30 minutes on the negative air machines. Each scraping/brushing activity must have a negative air machine devoted to it. For pre-molded pipe insulation or cutting wire lathe attach a 1200 mm (4 feet) square flared end piece on the intake of the duct. Support the duct horizontally at a point 600 mm (2 feet) below the work to effect capture. One person in the crew shall be assigned to operate the duct collection system on a continual basis.
3. Amosite does not wet well with amended water. Submit full information/documentation on the wetting agent proposed prior to start for review and approval by the VPIH/CIH and VA Contracting Officer. Insure that the material is worked on in small sections and

is thoroughly and continuously wetted. Package as soon as possible while wet. Remove as required.

3.3 LOCKDOWN ENCAPSULATION

A. General: Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, the contractor shall encapsulate all surfaces with a bridging encapsulant.

B. Delivery and Storage: Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the SDS for the material.

C. Worker Protection: Before beginning work with any material for which an SDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when an organic solvent based encapsulant or other solvent is used. The CPIH/CIH shall be responsible for provision of adequate respiratory protection. Note: Flammable and combustible encapsulants or solvents shall not be used, unless authorized in writing by the VA.

D. Encapsulation of Scratch Coat Plaster or Piping:

1. Apply two coats of lockdown encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be approved by the VA's representative in writing prior to commencing the work.
2. Apply the lockdown encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions.

Color the lockdown encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

E. Sealing Exposed Edges: Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of bridging encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the bridging encapsulant. Apply in accordance with 3.3.4 (B).

3.4 DISPOSAL OF ACM WASTE MATERIALS

A. General: Dispose of waste ACM and debris which is packaged in accordance with these specifications, in accordance with OSHA, EPA, State, Local and DOT requirements. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 171-180 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

B. Procedures:

1. The VA must be notified at least 24 hours in advance of any waste removed from the containment.
2. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures is this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be evacuated with HEPA vacuum and securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

3. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped and HEPA vacuumed.
4. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.5 PROJECT DECONTAMINATION

A. General:
1. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
2. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
3. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance: Clearance air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

C. Work Description: Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

D. Pre-Decontamination Conditions:
1. Before decontamination starts, all ACM waste from the regulated area shall be collected and removed, and the loose 6-mil layer of poly

removed while being adequately wetted with amended water and disposed of along with any gross debris generated by the work.

2. At the start of decontamination, the following shall be in place:
   a. Primary barriers consisting of 2 layers of 6-mil poly on the floor and 4 mil poly on the walls.
   b. Critical barriers consisting of 2 layers of 6-mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
   c. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

E. First Cleaning: Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

F. Pre-Clearance Inspection and Testing: The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

G. Lockdown Encapsulation of Abated Surfaces: With the express written permission of the VA's representative, perform lockdown encapsulation

of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING

A. General: Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

B. Final Visual Inspection: Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no additional cost to the VA. Dust/material samples may be collected and analyzed at no additional cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

C. Final Air Clearance Testing:

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of two field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA presented in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**

2. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. Final Air Clearance Procedures:

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol and < 70 AHERA asbestos structures per square millimeter (s/mm2) by AHERA TEM. No averaging of results will be used for this project. All five (5) TEM samples inside the regulated area shall be at or below 70 asbestos s/mm2 to satisfy the project final clearance criteria.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
   a. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
   b. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ MCE for TEM. A minimum of 3850 Liters of air using calibrated sampling pumps shall be collected for PCM samples and a minimum of 1200 Liters of air using calibrated sampling pumps shall be collected for TEM clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.
   c. Final clearance for soil that is not encapsulated, samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ MCE filters for TEM. A minimum of 3850 Liters of air using calibrated sampling pumps shall be collected for PCM samples and a minimum of 1200 Liters of air using calibrated sampling pumps shall be

collected for TEM clearance samples. Air clearance of work areas where contaminated soil has been removed is in addition to the requirement for clearance by bulk sample analysis discussed within these specifications. There will be no aggressive air sampling for the clearance of soil due to the fact that aggressive air sampling may overload the cassettes.

d. Random bulk samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 square feet of soil – 3 samples; >1000 to <5000 square feet of soil – 5 samples; and >5000 square feet of soil – 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method. The clearance level to determine the soil clean is <1 percent asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1 percent asbestos, the areas shall be re-cleaned until the sample results are <1 percent.

E. Clearance Sampling Using PCM – Less than 260LF/160SF:

1. The VPIH/CIH will perform clearance samples as indicated by the specification.
2. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 3850 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.
3. Random bulk samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 square feet of soil – 3 samples; >1000 to <5000 square feet of soil – 5 samples; and >5000 square feet of soil – 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method. The clearance level to determine the soil clean is <1 percent asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1 percent asbestos,

the areas shall be re-cleaned until the sample results are <1 percent.

F. Clearance Sampling Using Tem - Equal to or more than 260LF/160SF: TEM
   1. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.
   2. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance samples shall be collected. All samples must be equal to or less than 70 AHERA structures per square millimeter (s/mm2) AHERA TEM, no averaging of results for this specific project.

G. Laboratory Testing of PCM Clearance Samples: The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24-36 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA’s representative and the Contractor.

H. Laboratory Testing of Tem Samples: Samples shall be sent by the VPIH/CIH to a NIST NVLAP accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24-36 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

I. Laboratory Testing of Bulk Samples: Samples shall be sent by the VPIH/CIH or CPIH/CIH to a NIST NVLAP accredited laboratory for analysis by PLM. The laboratory shall successfully participate in the NIST NVLAP Bulk Asbestos Analysis (PLM) program. Verbal/faxed results from the laboratory shall be available within 24-36 hours after receipt of the samples. A complete record, certified by the laboratory, of all PLM and/or TEM results shall be furnished to the VA's representative and the Contractor.

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work:
   1. After thorough decontamination, seal negative air machines with 2 layers of 6-mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:
      a. Remove all equipment and materials from the project area.
      b. Dispose of all packaged ACM waste as required.
      c. Repair or replace all interior finishes damaged during the abatement work, as required.
      d. Fulfill other project closeout requirements as required in this specification.

B. Certificate of Completion By Contractor: The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts: All work shall generally be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

D. Re-Insulation: If required as part of the contract, replace all asbestos containing insulation/fire-proofing with suitable non-asbestos material. Provide SDS’s for all replacement materials in advance of installation for VA approval. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #:_____

PROJECT NAME:_____ Abatement Contractor:_____

VAMC/ADDRESS:_____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
   which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer’s recommendations.

CPIH/CIH Signature/Date:_____

CPIH/CIH Print Name:_____

Abatement Contractor Signature/Date:_____

Abatement Contractor Print Name:_____

ATTACHMENT #2
CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME:_____DATE:_____

PROJECT ADDRESS:_____

ABATEMENT CONTRACTOR'S NAME:_____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate of worker’s acknowledgement you are indicating to the owner that your employer has met these obligations.
RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.
TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32-hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:_____

Printed Name:_____

Social Security Number:_____

Witness:_____

ATTACHMENT #3
AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER:_____

VA MEDICAL FACILITY:_____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:_____

1. I verify that the following individual

Name:_____ Social Security Number:_____
who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address:_____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH:_____ Date:_____

Printed Name of CPIH/CIH:_____

Signature of Contractor:_____ Date:_____

Printed Name of Contractor:_____

ATTACHMENT #4
ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location:_____

VA Project #:_____

VA Project Description:_____

1. This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

2 I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

3. At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature_____Date_____

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 82 13.19
ASBESTOS FLOOR TILE AND MASTIC ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Contract Documents and Related Requirements: Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of Work:

1. Below is a brief description of the estimated quantities of asbestos flooring materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as to the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of ACM flooring in an appropriate regulated area in the following approximate quantities:
   a. Remove anchoring devices and remove / decontaminate pews and other items anchored through asbestos containing floor tile of all ACM. - 150 sq. ft.
   b. Floor Tile & Mastic on concrete floor - 2,050 sq. ft.

C. Related Work:
   1. Section 02 82 11, CLASS I ABATEMENT
   2. Section 02 41 00, DEMOLITION
   3. Division 09, FINISHES
D. Tasks:
   1. The work tasks are summarized briefly as follows:
      a. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for asbestos work.
      b. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
      c. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.
E. Abatement Contractors Use of Premises:
   1. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
   2. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design Construction Procedure drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA Representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings.

1.2 VARIATIONS IN QUANTITY

A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are

limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 10 percent) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

A. If the Contracting Officer; their field representative; the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor’s competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities if:

1. Airborne PCM analysis results equal to or greater than 0.01 f/cc above background levels inside the building but outside the regulated area;

2. breach or break in regulated area containment barrier(s);
3. less than -0.02 inch WCG pressure in the regulated area;
4. serious injury/death at the site;
5. fire/safety emergency at the site;
6. respiratory protection system failure;
7. power failure or loss or inadequate use of wetting agent;
8. any visible emissions observed outside the regulated area; or
9. failure to follow project specification requirements.

1.4 DEFINITIONS

A. General: Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary:

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aerosol - Solid or liquid particulate suspended in air.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive air sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400

Method, Issue 3, Fifth Edition is used to determine the fiber levels in air. For personal samples, area air samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis, the NIOSH Method 7402 (Issue 2, Fourth Edition) can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester (MCE) membrane for PCM (Phase Contrast Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.8 micron pore size) and MCE for TEM (Transmission Electron Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.45 micron pore size).

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement air sampling, clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as doors, windows, penetrations or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work or to secondary barrier.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's Professional Industrial Hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may report to a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6-mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance – Asbestos Operations and Maintenance Activities (OSHA Class III) that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag, which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent asbestos as determined using the method specified in 40 CFR 763, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter – An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement air sampling, clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL or Excursion Limit (EL).

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02 inch water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for as an eight (8) hour time-weighted average (TWA). For asbestos fibers, the eight (8) hour time-weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit (EL) is 1.0 fibers per cubic centimeter (1 f/cc).

Personal protective equipment (PPE) – equipment designed to protect user from injury and/or specific job hazard. Such equipment may include

protective clothing, hard hats, safety glasses, fall protection, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Pipe tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, debris or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6-mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator, respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA’s PIH (VPIH/CIH) or Contractor’s PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Subpart E, Appendix C, Part I; (B)(5).

Assigned protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-2018.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, decorative, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) – The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may report to a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

VA Total – means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) – The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations: See Section 01 42 19 REFERENCED STANDARDS.

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability of Codes, Regulations, and Standards:

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and Local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system and/or the Contractor’s on-site Field Office. These standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 may be made available electronically.

B. Contractor Responsibility: The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE), including respiratory protection and respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor’s failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State/Local requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements:

1. Federal requirements which govern asbestos abatement include, but are not limited to, the following regulations:
   a. Occupational Safety and Health Administration **(OSHA)**
      1) Title 29 CFR 1926.1101 - Construction Standard for Asbestos
      2) Title 29 CFR 1926 Subpart E - Personal Protective Equipment and Life Saving Equipment
      3) Title 29 CFR 1910.134 - Respiratory Protection
      4) Title 29 CFR 1926 - Construction Industry Standards
      5) Title 29 CFR 1926.33 - Access to Employee Exposure and Medical Records
      6) Title 29 CFR 1926.59 same as 1910.1200 - Hazard Communication
      7) Title 29 CFR 1926 Subpart C – General Safety and Health Provisions and Subpart D – Occupational Health and Environmental Controls
   b. Environmental Protection Agency **(EPA)**:
      1) 40 CFR 61 Subpart M - National Emission Standard for Hazardous Air Pollutants - Asbestos.
      2) 40 CFR 763 - Asbestos Hazard Emergency Response Act (AHERA) and Asbestos Hazard Abatement Reauthorization Act (ASHARA)
   c. Department of Transportation **(DOT)**
      1) Title 49 CFR 171 - 180 – Transportation

D. State Requirements:
   1. State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following: New York State - NYCRR Part 56 - Asbestos

E. Local Requirements:
   1. If local requirements are more stringent than federal or state standards, the local standards are to be followed.

F. Standards:
   1. Standards which govern asbestos abatement activities include, but are not limited to, the following:
      a. American National Standards Institute (ANSI)/ASSP Z9.2-2018 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI/ASSE Z88.2-2015 - Practices for Respiratory Protection.

b. Underwriters Laboratories (UL) 586-2009 - UL Standard for Safety of HEPA Filter Units, 9th Edition; ANSI Approval 2017-12-19.

2. Standards which govern encapsulation work include, but are not limited to the following:
   a. American Society for Testing and Materials International (ASTM)
3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   a. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   b. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   c. NFPA 101 - Life Safety Code

G. EPA Guidance Documents:
1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference.
2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
3. Asbestos Waste Management Guidance EPA 530-SW-85-007
4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

H. Notices:
1. State and Local agencies: Send written notification as required by State and Local regulations prior to beginning any work on ACM as follows: Per NYCRR Part 56.
2. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local regulations prior to beginning any work on ACM as follows.

I. Permits/Licenses: The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

J. Posting and Filing of Regulations: Maintain two (2) copies of applicable Federal, State, and Local regulations. Post one copy of each

at the regulated area where workers will have daily access to the regulations and keep another hard copy or electronic copy in the Contractor's office.

K. VA Responsibilities prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

L. Site Security:

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and Representatives, State and Local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and shall be posted in the clean room of the decontamination unit.
2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA Representative.
3. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be through a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated

area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed.

5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24-hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
6. The regulated area shall be locked during non-working hours and secured by VA security guards.

M. Emergency Action Plan and Arrangements:

1. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1926, Subpart C, Standard 1926.35 Employee Emergency Action Plans.
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.

a. For non-life-threatening situations - employees injured or otherwise incapacitated shall be decontaminated following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
b. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, medical personnel shall remove them from the regulated area if back or neck injury is present, and secure proper medical treatment.

6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

N. Pre-Construction Meeting:

1. Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPIH/CIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:
   a. Proof of Contractor licensing.

b. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
c. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
d. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
e. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
f. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
g. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
    1) Regulated area preparation procedures;
    2) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d) Multi-Employer Worksites;
    3) Decontamination area set-up/layout and decontamination procedures for employees;
    4) Abatement methods/procedures and equipment to be used;
    5) Personal protective equipment to be used.
h. At this meeting the Contractor shall provide all submittals as required.
i. Procedures for handling, packaging and disposal of asbestos waste.
j. Emergency Action Plan and Contingency Plan Procedures.
k. Notification Compliance Data: Within 2 days after notification is sent to the regulatory agencies submit one copy of each notice sent to each regulatory agency (USEPA and DOL).
l. Waste Transporter Permit: One copy of transporter’s current waste transporter permit from NYS DEC (NYS Part 364 Permit).
m. Landfill: Landfill to be used for ACM disposal shall be licensed to receive asbestos waste by NYS DEC (NYS Part 360 Permit) and by

USEPA. Out of state landfills shall provide licenses from local agencies having jurisdiction.

o. Negative Air Pressure Equipment: Copy of manufacturer’s and performance data of all units and HEPA filters used.

1.6 PROJECT COORDINATION

A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1. Personnel:

a. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

b. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; last four digits of social security number; qualifications; accreditation card with color picture, if required by state; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

c. Minimum qualifications for Contractor and assigned personnel are:

1) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of Federal (and State or Local as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable state; has adequate and qualified personnel available to complete the work; has comprehensive Abatement Hazard Abatement Plans for asbestos work; has adequate materials, equipment and supplies to perform the work.

2) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; and has certificate of training/current refresher and State accreditation/license.

d. All personnel shall be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program: The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.134. ANSI Standard Z88.2-2015 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP

shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator: The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years of experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection and Use of Respirators: The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit or in the onsite Contractor’s office, for reference by employees or authorized visitors.

D. Minimum Respiratory Protection: Shall be a ½-mask negative pressure air purifying respirator equipped with Combination P100 filters and Organic Vapor Cartridge, provided personal air samples in the workplace remain at or below 0.1 f/cc, and the applicable PEL for solvents, both determined as an 8-hour TWA. Full face powered air purifying respirator equipped with P100 filters and Organic Vapor Cartridge shall be required until Contractor demonstrates that personal air samples are at or below 0.1 f/cc, and the applicable PEL for solvents, both determined as an 8-hour TWA. A higher level of respiratory protection shall be required, if fiber levels exceed 1 f/cc as an 8-hour TWA, inside the regulated work area. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h) and 29 CFR 1910.134 (d)(3)(i)(A) Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion: No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test: All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit

tests shall be done for PAPRs which have been put into a motor/blower failure mode.

G. Respirator Fit Check: The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from entering the regulated area until resolution of the problem.

H. Maintenance and Care of Respirators: The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

I. Supplied Air Systems: If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

A. Training of Abatement Personnel: Prior to to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations: Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion that the person has been evaluated for working in a heat and cold stress

environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Personal Protective Equipment: Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

D. Regulated Area Entry Procedure: The Competent Person shall ensure that each time workers enter the regulated area they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

E. Decontamination Procedure: The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

1. When exiting the regulated area, remove all disposable PPE and dispose of in a disposable bag provided in the regulated area.
2. Carefully decontaminate and clean the respirator. Put in a clean container/bag.

F. Regulated Area Requirements: The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class II regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work and this specification. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

A. Description: Provide each each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

B. General Requirements: All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29

CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3-layers of 6-mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3-layers of 6-mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

C. Temporary Facilities to the PDF and W/EDF: The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141 (d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

D. Personnel Decontamination Facility (PDF):

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3-layers of 6-mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6-mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry and sanitary condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC,

shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Male/Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male/female can enter or exit the PDF during his/her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3-layers of 6-mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be

separated from the regulated area by a minimum 3 foot wide door made with 2-layers of 6-mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3-layers of 6-mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6-mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6-mil opaque fire retardant poly.

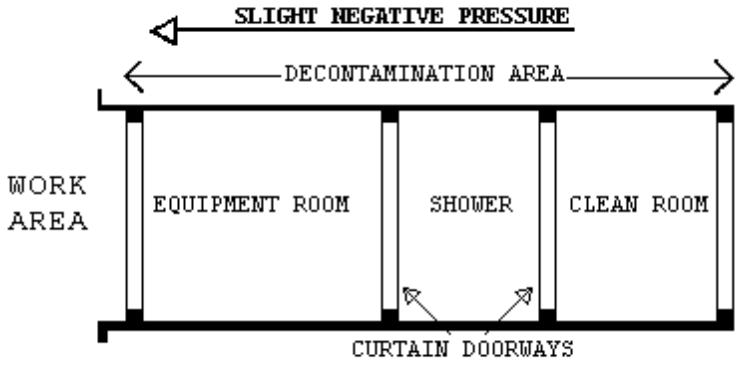

E. Waste/Equipment Decontamination Facility (W/EDF):

1. The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

a. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
b. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2 inches x 4 inches) wood framing or approved equivalent and 3-layers of 6-mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2-layers of 6-mil fire retardant poly.
c. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2 inches x 4 inches) wood framing or approved equivalent and 3-layers of 6-mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6-mil fire retardant poly.
d. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 inches x 4 inches wood framing or approved equivalent and 2-layers of 6-mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2-layers of 6-mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
e. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

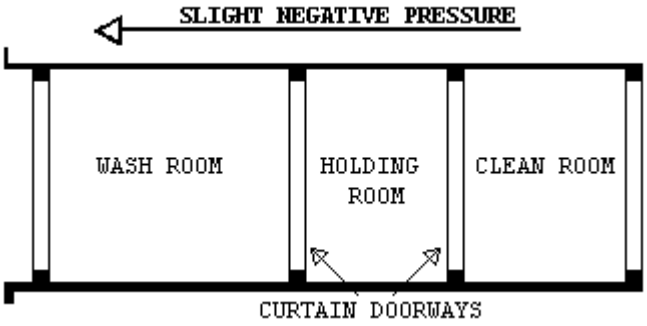

F. Waste/Equipment Decontamination Procedures: At the washdown station, in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. General Requirements (All Abatement Project): Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's Representative.

1. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
2. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage

or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.

3. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
4. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
5. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
6. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape, poly tape, furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other approved equivalent procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
7. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6-mil fire retardant poly.
8. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
9. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.

10. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
11. Disposal bags - 2 layers of 6-mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
12. The VA shall be provided an advance copy of the Safety Data Sheets (SDS) as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
13. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
14. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

B. Negative Pressure Filtration System:

1. The Contractor shall provide enough HEPA negative air machines to continuously maintain a negative pressure differential of -0.02 inches water column gauge (WCG) inside the regulated work area relative to adjacent non-work building areas. OSHA 29 CFR 1926.1101 (g)(5)(i)(A)(2) also requires at least four (4) air changes per hour. Contractor shall increase air changes per hour as necessary to maintain volatile organic compounds below the applicable OSHA PEL. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a negative pressure differential of -0.02 inches WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area. HEPA equipped negative air machines shall be discharged outside of the building a minimum of 3

feet from building make-up air, doors, open windows, patients, visitors and staff.

2. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50 percent efficiency. The contractor shall consider this in their determination of number of units needed to continuously maintain a pressure differential of -0.02 inches WCG. The contractor shall use 8 air changes per hour or double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2 inches pressure drop across the filters.

C. Design and Layout:

1. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
   a. Method of supplying power to the units and designation/location of the panels.
   b. Description of testing method(s) for correct air volume and pressure differential.
   c. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

D. Negative Air Machines (HEPA Units)

1. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30 inches in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
2. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.

3. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97 percent. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
4. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 micron or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 micron or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
5. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
6. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.

7. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
8. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters.
9. Pressure Differential: The fully operational negative air system within the regulated area shall continuously maintain a pressure differential $\geq$ -0.02 inches WCG inside the regulated work area. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(g)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

A. General:

1. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, Contractor shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Specification Section 07 84 00; FIRESTOPPING and Section 2.2.6.
2. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall

be completely covered with 2-layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area

B. Controlling Access to the Regulated Area: Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6-mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

C. Critical Barriers: Completely separate any operations in the regulated area from adjacent areas using 2-layers of 6-mil fire retardant poly and duct tape. Individually seal with 2-layers of 6-mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

D. Secondary Barriers: A loose layer of 6-mil poly shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

E. Extension of the Regulated Area: If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

F. Firestopping:

1. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire

rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed

2.3 MONITORING, INSPECTION AND TESTING

A. General:

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples inside the building, but outside the regulated area. Inside the building, but outside the regulated area air samples shall be collected in the Clean Room of the PDF, at the approximate location of HEPA exhaust discharge, and at a minimum of three (3) locations in areas immediately outside the regulated work area to satisfy this specification. Additional inspection and testing requirements are also indicated in other parts of this specification.
2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully

decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's Representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's Representative

B. Scope of Services of the VPIS/CIH Consultant:

1. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

a. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
b. Task 2: Perform Representative air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
c. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
d. Task 4: Provide support to the VA Representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
e. Task 5: Perform, in the presence of the VA Representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
f. Task 6: Issue certificate of decontamination for each regulated area and project report.

2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection and Testing by Contractor CPIH/CIH: The Contractor’s CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor’s personnel. Safety and health conditions and the

provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytical Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples and have experience in substantially similar projects in size and scope. The analytical laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for personal and area air monitoring for asbestos in 29 CFR 1926.1101 (f), (g) and Appendix A. This log shall be made available to the VA Representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each Representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two (2) personal air samples or 25 percent of Representative workforce per shift shall be collected, whichever is greater, in the regulated area; a minimum of three (3) area air samples at locations inside the building but immediately outside the regulated work area; one (1) area air sample shall be collected daily in the Clean Room of the PDF; and one (1) area air sample shall be collected daily at the approximate location of HEPA exhaust discharge. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings

within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.4 ASBESTOS HAZARD ABATEMENT PLAN

A. The Contractor shall have an established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP(s) shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

1. Minimum Personnel Qualifications
2. Emergency Action Plan/Contingency Plans and Arrangements
3. Security and Safety Procedures
4. Respiratory Protection/Personal Protective Equipment Program and Training
5. Medical Surveillance Program and Recordkeeping
6. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
7. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
8. Negative Pressure Systems Requirements
9. Monitoring, Inspections, and Testing
10. Removal Procedures for ACM
11. Removal of Contaminated Soil (if applicable)
12. Encapsulation Procedures for ACM
13. Disposal of ACM waste/equipment
14. Regulated Area Decontamination/Clean-up
15. Regulated Area Visual and Air Clearance
16. Project Completion/Closeout

2.5 SUBMITTALS

A. Pre-Start Meeting Submittals:

1. Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

a. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
b. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
c. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
d. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
    1) Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
    2) Waste water filtration system, shower system, containment barriers.
    3) Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
    4) Respirators, protective clothing, fall protection and other required personal protective equipment.
    5) Fire safety equipment to be used in the regulated area.
e. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
f. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

g. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.
h. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
   2) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
   3) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including the company’s officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
i. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
   1) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; medical opinion; and current respirator fit test.

2) Competent Person(s)/Supervisor(s): Number; names; last four digits of social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.

3) Workers: Numbers; names; last four digits of social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.

j. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of the AHAP incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical methods used.

k. Rented equipment must be decontaminated prior to returning to the rental agency.

l. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all SDS, and application instructions.

B. Submittals During Abatement:

1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the

resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; Representative air monitoring and results/TWAs/ELs. Submit this information daily to the VA's Representative.

2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
   a. Removal of any poly barriers.
   b. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
   c. Packaging and removal of ACM waste from regulated area.
   d. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's Representative on a weekly basis.

C. Submittals at Completion of Abatement: The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

A. Pre-Abatement Meeting: The VA Representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person, the VA Representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to

provide any supplemental information/documentation to the VA's Representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's Representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

B. Pre-Abatement Inspections and Preparations:

1. Before any work begins on the construction of the regulated area, the Contractor will:

   a. Conduct a space-by-space inspection with an authorized VA Representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

   b. The VA Representative, the Contractor, and the VPIH/CIH must be aware of AEQA 10-95 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAP (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

   c. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.

d. If present and required, remove and dispose of carpeting from floors in the regulated area. If carpet comes up without disturbing ACM flooring material, the carpet can be disposed of as C&D waste. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet, that section of the carpet will be disposed of as asbestos waste.
e. Inspect existing firestopping in the regulated area. Correct as needed.

C. Pre-Abatement Construction and Operations:
1. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
2. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's Representative when the work is completed in accordance with this specification. The VA's Representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
3. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's Representative.
4. Upon satisfactory inspection of the installation of and operation of systems the VA's Representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations

3.2 REGULATED AREA PREPARATIONS

A. OSHA DANGER Signs: Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

B. Controlling Access to the Regulated Area: Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6-mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

C. Shut Down - Lock Out Electrical: Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

D. Shut Down - Lock Out HVAC: Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's Representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of independently installed 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

E. Sanitary Facilities: The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

F. Water for Abatement: The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

G. Preparation Prior to Sealing Off: Place all tools, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2-layers of 6-mil fire retardant poly sheeting and secure with duct tape.

H. Critical Barriers: Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6-mils thick and duct tape. Individually seal with 2-layers of independently installed 6-mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

I. Floor Barriers: If floor removal is not being done, all floors in the regulated area shall be covered with 2-layers of 6-mil fire retardant poly and brought up the wall 24 inches.

J. Pre-Cleaning Movable Objects:

1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area. Pre-cleaning may not be required if flooring materials are in good condition and are the only ACM present.

K. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

L. Pre-Cleaning Fixed Objects:

1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.
2. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2-layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or

enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

M. Pre-Cleaning Surfaces in the Regulated Area:
   1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.
   2. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

N. Extension of the Regulated Area: If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

3.3 REMOVABLE OF CLASS II FLOORING AND MASTIC, MATERIALS

A. General: All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact to the extent feasible; wet while working with it; wrap as soon as possible with 2-layers of 6-mil plastic for disposal.

B. Removal of Flooring Materials:
   1. All requirements of OSHA Flooring agreement provisions shall be followed:
      a. The Contractor shall provide enough HEPA negative air machines to effect > -0.02 inches WCG pressure. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area. The contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2 inches pressure drop across the filters.

b. Flooring shall be removed intact, as much as feasible. Do not rip or tear flooring.
c. Mechanical chipping or sanding is not allowed.
d. Flooring may be removed with an infra-red heating unit operated by trained personnel following the manufacturer's instructions.
e. Wet clean and HEPA vacuum the floor before and after removal of flooring.
f. Place a 6-mil poly layer 4 feet by 10 feet adjacent to the regulated area for use as a decontamination area. All waste must be contained in the regulated area.
g. Package all waste in 6-mil poly lined fiberboard drums or double bag in 6-mil polyethylene bags.

C. REMOVAL OF MASTIC
1. All chemical mastic removers must be low in volatile organic compound (VOC) content, have a flash point greater than 200 degrees Fahrenheit, contain no chlorinated solvents, and comply with California Air Resources Board (CARB) thresholds for VOCs (effective January 1, 2010).
2. Negative air machine as required under flooring removal shall be provided and operated in accordance with this project specification.
3. Follow all manufacturers' instructions in the use of the mastic removal material. Verify that there are no ignition sources in the work area and minimize the amount of mastic removal material used at any given time to eliminate fire hazards and objectionable odors.
4. Package all waste in 6-mil poly lined fiberboard drums or double bag in 6-mil polyethylene bags.

3.4 DISPOSAL OF CLASS II WASTE MATERIAL

A. General: Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 171-180 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable State and Local regulations.

3.5 PROJECT DECONTAMINATION

A. General:
1. The VA must be notified at least 24 hours in advance of any waste removed from the containment.

2. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
3. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
4. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance: Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures

C. Work Description: Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

D. Pre-Decontamination Conditions:
1. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
2. At the start of decontamination, the following shall be in place:
   a. Critical barriers over all openings consisting of two layers of 6-mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
   b. Decontamination facilities, if required for personnel and equipment in operating condition.

E. Cleaning: Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste.

Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

3.6 VISUAL INSPECTION AND AIR CLEARANCE TESTING

A. General: Notify the VA Representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

B. Visual Inspection: Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no additional cost to the VA. Dust/material samples may be collected and analyzed at no additional cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done

C. Air Clearance Testing:

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of two field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA presented in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**

2. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. FinaL Air Clearance Procedures:

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol and $\leq$ 70 AHERA asbestos structures per square millimeter (s/mm^2) by AHERA TEM. No averaging of results will be used for this project. All five (5) TEM samples inside the regulated area shall be at or below 70 asbestos s/mm^2 to satisfy the project final clearance criteria.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures.
   a. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
   b. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ MCE for TEM. A minimum of 3850 Liters of air using calibrated sampling pumps shall be collected for PCM samples and a minimum of 1200 Liters of air using calibrated sampling pumps shall be collected for TEM clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work:
   1. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:

a. Remove all equipment, materials, and debris from the project area.
b. Package and dispose of all asbestos waste as required.
c. Repair or replace all interior finishes damaged during the abatement work.
d. Fulfill other project closeout requirements as specified elsewhere in this specification

B. Certificate of Completion by Contractor: The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts: All work shall generally be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

ATTACHMENT #1
CERTIFICATE OF COMPLETION

DATE: _____ VA Project #:_____

PROJECT NAME:_____ Abatement Contractor:_____

VAMC/ADDRESS:_____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
   which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer’s recommendations.

CPIH/CIH Signature/Date:_____

CPIH/CIH Print Name:_____

Abatement Contractor Signature/Date:_____

Abatement Contractor Print Name:_____

ATTACHMENT #2
CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME:_____DATE:_____

PROJECT ADDRESS:_____

ABATEMENT CONTRACTOR'S NAME:_____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate of worker’s acknowledgement you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32-hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:_____

Printed Name:_____

Social Security Number:_____

Witness:_____

ATTACHMENT #3
AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER:_____

VA MEDICAL FACILITY:_____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:_____

1. I verify that the following individual

Name:_____ Social Security Number: _____who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address:_____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH:_____ Date:_____

Printed Name of CPIH/CIH:_____

Signature of Contractor:_____ Date:_____

Printed Name of Contractor:_____

ATTACHMENT #4
ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location:_____

VA Project #:_____

VA Project Description:_____

1. This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

2 I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

3. At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature_____Date_____

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 03 30 53
(SHORT-FORM) CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast-in-place structural concrete.
2. Slab on grade infill.
3. Suspended slab infill on metal deck.
4. Foundation wall infill.
5. Concrete for metal pan stair fill.
6. Footings.
7. Equipment pads.
8. Preparation of existing surfaces to receive concrete.
9. Preparation of existing surface to received concrete topping.

1.2 RELATED REQUIREMENTS

A. Materials Testing and Inspection During Construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.

B. American Concrete Institute (ACI):

1. 117-15 - Tolerances for Concrete Construction, Materials and Commentary.
2. 117M-10(R2015) - Tolerances for Concrete Construction, Materials and Commentary.
3. 211.1-91(R2009) - Proportions for Normal, Heavyweight, and Mass Concrete.
4. 211.2-98(R2004) - Selecting Proportions for Structural Lightweight Concrete.
5. 301/310M-10 - Structural Concrete.
6. 305.1-14 - Hot Weather Concreting.
7. 306.1-90(R2002) - Cold Weather Concreting.
8. 318/318M-14 - Building Code Requirements for Structural Concrete and SP-66-04-ACI Detailing Manual.
9. 347-04 - Guide to Formwork for Concrete.

C. ASTM International(ASTM):

1. A615/A615M-15ae1 - Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
2. A996/A996M-15 - Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.
3. A1064/A1064M-15 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
4. C33/C33M-13 - Concrete Aggregates.
5. C39/C39M-15a - Compressive Strength of Cylindrical Concrete Specimens.
6. C94/C94M-15a - Ready-Mixed Concrete.
7. C143/C143M-15 - Slump of Hydraulic Cement Concrete.
8. C150/C150M-15 - Portland Cement.
9. C171-07 - Sheet Material for Curing Concrete.
10. C192/C192M-15 - Making and Curing Concrete Test Specimens in the Laboratory.
11. C219-14a - Terminology Relating to Hydraulic Cement.
12. C260/C260M-10a - Air-Entraining Admixtures for Concrete.
13. C330/C330M-14 - Lightweight Aggregates for Structural Concrete.
14. C494/C494M-15 - Chemical Admixtures for Concrete.
15. C618-15 - Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
16. C881/C881M-14 - Epoxy-Resin-Base Bonding Systems for Concrete.
17. C989/C989M-14 - Slag Cement for Use in Concrete and Mortars.
18. C1240-15 - Silica Fume Used in Cementitious Mixtures.
19. D1751-04(2013el) - Preformed Expansion Joint Fillers for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types).
20. E1155-14 - Determining FF Floor Flatness and FL Floor Levelness Numbers.
21. E1745-11 - Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.

D. International Concrete Repair Institute:
1. 310.2R-2013 - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals

requiring Contracting Officer’s Representative (COR) review and approval.

B. Submittal Drawings: NOT USED

C. Manufacturer's Literature and Data:

1. Concrete Mix Design.
2. Air-entraining admixture, chemical admixtures, and curing compounds.
3. Indicate manufacturer's recommendation for each application.
4. Bonding and anti-corrosion agents

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Certificates: Certify products comply with specifications.

a. Each ready mix concrete batch delivered to site.

1.5 DELIVERY

A. Deliver each ready-mixed concrete batch with mix certification in duplicate according to ASTM C94/C94M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.

B. Pozzolans:

1. Fly Ash: ASTM C618, Class C or F including supplementary optional physical requirements.
2. Slag: ASTM C989/C989M; Grade 80, Grade 100 or Grade 120.
3. Silica Fume: ASTM C1240.

C. Coarse Aggregate: ASTM C33/C33M.

1. Size 467 for footings and walls over 300 mm (12 inches) thick.
2. Size 7 for coarse aggregate for applied topping and metal pan stair fill.
3. Size 67 for other applications.

D. Fine Aggregate: ASTM C33/C33M.

E. Lightweight Aggregate for Structural Concrete: ASTM C330/C330M, Table 1.

F. Mixing Water: Fresh, clean, and potable.

G. Air-Entraining Admixture: ASTM C260/C260M.

H. Chemical Admixtures: ASTM C494/C494M.

I. Vapor Barrier: ASTM E1745, Class A with a minimum puncture resistance of 2200 g (4.85 lbs); minimum 0.38 mm (0.015”)(15 mil) thick.

J. Reinforcing Steel: ASTM A615/A615M or ASTM A996/A996M, deformed.

K. Forms: Wood, plywood, metal, or other materials, approved by COR, of grade or type suitable to obtain type of finish specified.

1. Plywood: Exterior grade, free of defects and patches on contact surface.
2. Lumber: Sound, grade-marked, S4S stress graded softwood.
3. Form coating: As recommended by Contractor.

L. Expansion Joint Filler: ASTM D1751.

M. Sheet Materials for Curing Concrete: ASTM C171.

N. Abrasive Aggregates: Aluminum oxide grains or emery grits.

O. Liquid Densifier/Sealer: 100 percent active colorless aqueous siliconate solution.

P. Grout, Non-Shrinking: Premixed ferrous or non-ferrous. Grout to show no settlement or vertical drying shrinkage at 3 days. Compressive strength for grout, at least 18 MPa (2500 psi) at 3 days and 35 MPa (5000 psi) at 28 days.

2.2 ACCESSORIES

A. Bonding Agent: ASTM C 1059/C 1059M, Type II.

B. Structural Adhesive: ASTM C881, 2-component material suitable for use on dry or damp surfaces. Provide material Type, Grade, and Class to suit Project requirements.

C. Water Stops: Rubber base with self-healing properties. Expanding clay based products not acceptable.

D. Weeps: Geotextile type as recommended by Contractor and approved by COR.

2.3 CONCRETE MIXES

A. Design concrete mixes according to ASTM C94/C94M, Option C.

B. Compressive strength at 28 days: minimum 25 MPa (3,000 psi).

C. Submit mix design and results of compression tests to the COR for his evaluation. Identify all materials, including admixtures, making-up the concrete. All exterior concrete shall be air-entrained.

D. Maximum Slump for Vibrated Concrete: 100 mm (4 inches) tested according to ASTM C143.

E. Cement and Water Factor (See Table I):

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE				
Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
25 (3000)1,2	300 (500)	*	310 (520)	*

Footnotes:
1. If trial mixes are used, achieve a compressive strength 8.3 MPa (1 200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve a compressive strength 9.7 MPa (1,400 psi) in excess of f’c.
2. Lightweight Structural Concrete: Pump mixes may require higher cement values as specified in ACI 318/318M.
3. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.
* Laboratory Determined according to ACI 211.1 for normal weight concrete or ACI 211.2 for lightweight structural concrete.

F. Air-entrainment as specified, and conform with the following for air content table:

TABLE II - TOTAL AIR CONTENT FOR VARIOUS SIZES OF COARSE AGGREGATES	
Nominal Maximum Size of Coarse Aggregate	Total Air Content, percent
10 mm (3/8 inches)	6 Moderate exposure; 7.5 severe exposure
13 mm (1/2 inches)	5.5 Moderate exposure; 7 severe exposure

TABLE II - TOTAL AIR CONTENT FOR VARIOUS SIZES OF COARSE AGGREGATES	
Nominal Maximum Size of Coarse Aggregate	Total Air Content, percent
19 mm (3/4 inches)	5 Moderate exposure; 6 severe exposure
25 mm (1 inches)	4.5 Moderate exposure; 6 severe exposure
40 mm (1 1/2 inches)	4.5 Moderate exposure; 5.5 severe exposure

2.4 BATCHING AND MIXING

A. Store, batch, and mix materials according to ASTM C94/C94M.

1. Job-Mixed: Batch mix concrete in stationary mixers as specified in ASTM C94/C94M.
2. Ready-Mixed Concrete: Comply with ASTM C94/C94M, except use of non-agitating equipment for transporting concrete to Site is not acceptable.
3. Mixing Structural Lightweight Concrete: Charge mixer with 2/3 of total mixing water and total aggregate for each batch. Mix ingredients minimum 30 seconds in stationary mixer or minimum 10 revolutions at mixing speed in truck mixer. Add remaining mixing water and other ingredients and continue mixing. Above procedure may be modified as recommended by aggregate producer.
4. When aggregate producer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

PART 3 - EXECUTION

3.1 FORMWORK

A. Installation: Conform to ACI 347. Construct forms to obtain concrete of the shapes, dimensions and profiles indicated, with tight joints.

B. Design and construct forms to prevent bowing-out of forms between supports and to be removable without prying against or otherwise damaging fresh concrete.

C. When patching formed concrete, seal form edges against existing surface to prevent leakage; set forms so that patch is flush with adjacent surfaces.

D. Treating and Wetting: Treat or wet concrete contact surfaces:
   1. Coat plywood and lumber forms with non-staining form sealer.
   2. Wet wood forms thoroughly when they are not treated with form release agent.
   3. Prevent water from accumulating and remaining within forms.
   4. Clean and coat removable metal forms with light form oil before reinforcement is placed.
   5. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
   6. Prevent water from accumulating and remaining within forms.

E. Inserts, Sleeves, and Similar Items: Install flashing reglets, masonry ties, anchors, inserts, wires, hangers, sleeves, boxes for floor hinges, and other cast-in items specified in other Sections. Place where indicated, square, flush and secured to formwork.

F. Construction Tolerances - General: Install and maintain concrete formwork to assure completion of work within specified tolerances.

G. Adjust or replace completed work exceeding specified tolerances before placing concrete.

3.2 REINFORCEMENT

A. Install concrete reinforcement according to ACI 318 and ACI SP-66.

B. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.

C. Drilling for Dowels in Existing Concrete: Use sharp bits, drill hole slightly oversize, fill with epoxy grout, inset the dowel, and remove excess epoxy.

3.3 VAPOR BARRIER

A. Except where membrane waterproofing is required, place interior concrete slabs on a continuous vapor barrier.

B. Lap joints 150 mm (6 inches) and seal with a compatible pressure-sensitive tape.

C. Patch punctures and tears.

3.4 PLACING CONCRETE

A. Remove water from excavations before concrete is placed. Remove hardened concrete, debris and other foreign materials from interior of forms, and from inside of mixing and conveying equipment. Obtain

approval from Contracting Officer's Representative before placing concrete.

B. Install screeds at required elevations for concrete slabs.

C. Roughen and clean free from laitance, foreign matter, and loose particles before placing new concrete on existing concrete.

1. Vacuum areas and immediately coat contact areas with adhesive in compliance with manufacturer's instructions.

D. Place structural concrete according to ACI 301 and ACI 318.

E. Convey concrete from mixer to final place of deposit by method that will prevent segregation or loss of ingredients. Do not deposit, in Work, concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop freely more than 1.5m (5 feet) in unexposed work nor more than 1 m (3 feet) in exposed work.

F. Place and consolidate concrete in horizontal layers not exceeding 30 cm (12 inches) in thickness. Consolidate concrete by spading, rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Continuously vibrate during placement of concrete.

G. Concrete Fill in Stair Tread and Landing Pans: Coat steel with bonding agent and fill pans with concrete. Reinforce with 2 inch by 2 inch by 1.6 mm (0.06 inch) welded wire mesh at midpoint.

H. Hot Weather Concrete Placement: As recommended by ACI 305.1 to prevent adversely affecting properties and serviceability of hardened concrete.

I. Cold Weather Concrete Placement: As recommended by ACI 306.1, to prevent freezing of thin sections less than 300 mm (12 inches) and to permit concrete to gain strength properly.

1. Do not use calcium chloride without written approval from Contracting Officer's Representative.

3.5 TOLERANCES

A. Slab on Grade Finish Tolerance: Comply with ACI 117, FF-number and FL-number method.

1. Paragraph 4.8.3, Class A 3 mm (1/8 inches) for offset in form-work.
2. Table R4.8.4, "Flat" 6 mm (1/4 inch) in 3 m (10 feet) for slabs.

3.6 PROTECTION AND CURING

A. Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical damage, and excessive hot or cold temperatures.

B. Curing Methods: Cure concrete with curing compound using wet method with sheets.

C. Formed Concrete Curing: Wet the tops and exposed portions of formed concrete and keep moist until forms are removed.

1. If forms are removed before 14 days after concrete is cast, install sheet curing materials as specified above.

D. Concrete Flatwork Curing:

1. Install sheet materials according to the manufacturer's instructions.

a. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.7 FORM REMOVAL

A. Maintain forms in place until concrete is self-supporting, with construction operation loads.

B. Remove fins, laitance and loose material from concrete surfaces when forms are removed. Repair honeycombs, rock pockets, sand runs, spalls, or otherwise damaged surfaces by patching with the same mix as concrete minus the coarse aggregates.

C. Finish to match adjacent surfaces.

3.8 FINISHES

A. Vertical and Overhead Surface Finishes:

1. Surfaces Concealed in Completed Construction: As-cast; no additional finishing required.

2. Surfaces Exposed to View Scheduled for Paint Finish: Remove fins, burrs and similar projections by mechanical means approved by Contracting Officer's Representative flush with adjacent surface. Lightly rub with fine abrasive stone or hone. Use ample amount of water during rubbing without working up a lather of mortar or changing texture of concrete.

3. Surfaces Exposed to View in Finished Areas: Grout finish, unless otherwise shown, for uniform color and smooth finish treated.

a. Remove laitance, fins and burrs.

b. Scrub concrete with wire brushes. Clean stained concrete surfaces with hone or stone.

c. Apply grout composed of 1 part Portland cement and 1 part clean, fine sand (smaller than 600 micro-m (No. 30) sieve). Work grout into surface of concrete with cork floats or fiber brushes until pits and honeycomb are filled.

d. After grout has hardened, but is still plastic, remove surplus grout with sponge rubber float and by rubbing with clean burlap.

e. In hot, dry weather fog spray surfaces with water to keep grout wet during setting period. Complete finished areas in same day. Confine limits of finished areas to natural breaks in wall surface. Do not leave grout on concrete surface overnight.

B. Slab Finishes:

1. Allow bleed water to evaporate before surface is finished. Do not sprinkle dry cement on surface to absorb water.

2. Scratch Finish: Rake or wire broom after partial setting slab surfaces to received bonded applied cementitious application, within 2 hours after placing, to roughen surface and provide permanent bond between base slab and applied cementitious materials.

3. Float Finish: Interior and exterior ramps, interior stair treads, and platforms, both equipment pads, and slabs to receive non-cementitious materials, except as specified.

   a. Screen and float to smooth dense finish.

   b. After first floating, while surface is still soft, check surfaces for alignment using straightedge or template. Correct high spots by cutting down with trowel or similar tool. Correct low spots by filling in with material same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat slab to uniform sandy texture.

4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and other

monolithic concrete floor slabs exposed to view without other finish indicated or specified.

a. Delay final steel troweling to secure smooth, dense surface, usually when surface can no longer be dented by fingers. During final troweling, tilt steel trowel at slight angle and exert heavy pressure on trowel to compact cement paste and form dense, smooth surface.

b. Finished surface: Free from trowel marks. Uniform in texture and appearance.

5. Broom Finish: Finish exterior slabs, ramps, and stair treads with bristle brush moistened with clear water after surfaces have been floated.

6. Finished Slab Flatness (FF) and Levelness (FL):

a. Slab on Grade: Specified overall value FF 25/FL 20. Minimum local value FF 17/FL 15.

b. Test flatness and levelness according to ASTM E1155.

3.9 SURFACE TREATMENTS

A. Mix and apply the following surface treatments according to manufacturer's instructions.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Liquid Densifier/Sealer: Use for exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.

C. Slip Resistant Finish:

1. Except where safety nosing and tread coverings are shown, apply abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms.

a. Broadcast aggregate uniformly over concrete surface. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water sufficiently to slightly expose abrasive aggregate.

3.10 APPLIED TOPPING

A. Install concrete topping with thickness and strength shown with only enough water to ensure stiff, workable, plastic mix.

B. Continuously place applied topping until entire area is complete, struck off with straightedge, compact by rolling or tamping, float and steel trowel to hard smooth finish.

3.11 RESURFACING FLOORS

A. Remove existing flooring by abrasive blasting or grinding, in areas to receive resurfacing, to expose existing structural slab. Achieve a surface profile of 2 to 4 according to ICRI 310.2R for the condition found at Site.

B. Prepare exposed structural slab surface by cleaning, wetting, and applying adhesive according to manufacturer's instructions as specified in the flooring section.

3.12 FOUNDATION WALL INFILL

A. Install air-entrained concrete at foundation wall infill, as indicated.

B. Install expansion and contraction joints, waterstops, weep holes, reinforcement and railing sleeves, as indicated.

C. Finish exposed surfaces to match adjacent concrete surfaces, new or existing.

D. Place porous backfill, as indicated on Drawings.

- - E N D - -

SECTION 04 01 00
MAINTENANCE OF MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Repointing existing damaged masonry joints.
2. Replacing existing damaged masonry units.

1.2 RELATED REQUIREMENTS

A. Mortars for new masonry: Section 04 05 13, MASONRY MORTARING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C67/C67M-20- Sampling and Testing Brick and Structural Clay Tile.
2. C144-18 - Aggregate for Masonry Mortar.
3. C150/C150M-20 - Portland Cement.
4. C207-18 - Hydrated Lime for Masonry Purposes.
5. C216-19 - Facing Brick (Solid Masonry Units Made from Clay or Shale).
6. C270-19al - Mortar for Unit Masonry.
7. C295/C295M-19 - Petrographic Examination of Aggregates for Concrete.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Replacement units indicating manufacturer recommendation for each application.

C. Samples:

1. Pointing Mortar: Molded, 150 mm (6 inches) long for each type, texture, and color.

D. Test reports:

1. Preconstruction test results of existing masonry mortar and units.
2. Recommended mortar mix and mortar materials sources.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Documented experience in completion of work, similar in design, material, and extent specified.

B. Preconstruction Testing:
   1. Existing Brick: according to ASTM C67.
   2. Existing Mortar: according to ASTM C295/C295M.
      a. Recommend mortar mix compatible with existing and mortar material sources required to match existing color and texture.

C. Mockups: Prepare 1m x 1m (3 feet x 3 feet) mockup, demonstrating quality and aesthetics of tuck pointing masonry unit replacement and cleaning.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store materials covered, protected from weather, and elevated above grade.
   1. Prevent contamination of aggregates.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Cold Weather Requirements: Maintain mortar ingredients and substrate within temperature range between 4 degrees C (40 degrees F) and 49 degrees C (120 degrees F) when outside temperature is less than 4 degrees C (40 degrees F).
   2. Hot Weather Requirements: Protect mortar-joint from evaporation of moisture from mortar material. When required, provide adequately shaded work area.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Mortar Components:
   1. Hydrated Lime: ASTM C207, Type S.
   2. Aggregate: ASTM C144.
   3. Portland Cement: ASTM C150/C150M, Type I.
   4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Match existing as approved by department of interior and COR
B. Provide each product from one manufacturer and from one production run.

2.3 REPLACEMENT MASONRY UNITS

A. Face Brick:
   1. ASTM C216, Grade SW, Type FBS matching existing.
   2. Efflorescence: Rated slight efflorescent when tested according to ASTM C67.
B. Other Masonry Units: Match existing.

2.4 MIXES

A. Tuck Pointing Mortar: ASTM C270; Appendix X3.
   1. Type N

2.5 ACCESSORIES

A. Cleaning Agent: Soapless, non-acidic, detergent, specially prepared for cleaning brick, stone, and concrete masonry.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
   1. Protect from mortar droppings and cleaning operations.
C. Remove existing fixtures and fittings concealing masonry joints to permit repointing and repair.

3.2 EXISTING MORTAR JOINTS

A. Cut out existing bed and head mortar joints, to uniform depth of 25 mm (1 inches), or to sound mortar without damaging edges and faces of existing masonry units to remain.

B. Remove dust and debris from joints.

1. Do not rinse when temperature is below freezing.

3.3 TUCK POINTING

A. Dampen joints immediately before tuck pointing. Allow masonry units to absorb surface water.

B. Tightly pack tuck pointing mortar into joints in thin layers, 6 mm (1/4 inch) thick, maximum.

C. Allow layer to become slightly hardened before applying next layer.

D. Tool final layer to match existing joints of masonry units.

3.4 MASONRY UNIT REPLACEMENT

A. Cut out mortar joints surrounding masonry units requiring replacement.

1. Remove existing masonry units creating opening for replacement masonry unit installation.
2. Remove mortar, dust, and debris from opening perimeter surfaces.
3. Prevent debris from falling into cavity.

B. Dampen surfaces of surrounding existing masonry before installing replacement masonry units.

1. Allow existing masonry to absorb surface moisture before installing replacement units.
2. Butter contact surfaces of existing masonry and replacement masonry units with mortar.
3. Center replacement masonry units in opening and press into position.
4. Remove excess mortar.
5. Tuck point replacement masonry units to ensure full head and bed joints.

3.5 JOINT TOOLING

A. Tool repointed and replaced masonry joints when mortar becomes slightly hardened.

B. Produce smooth, compacted, joint matching existing.

3.6 CLEANING

A. Remove mortar splatter from exposed surfaces immediately.

B. Clean exposed masonry surfaces on completion.

C. Remove mortar droppings and other foreign substances from wall surfaces.

D. Wet surfaces with clean water.

E. Wash with cleaning agent.

F. Brush masonry surfaces with stiff fiber brushes while washing.

G. Immediately after washing, rinse with clean water.

1. Remove traces of detergent, foreign streaks or stains.

- - E N D - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Masonry mortar installed by other concrete and masonry sections.

1.2 RELATED REQUIREMENTS

A. Mortar used in Section:

1. Section 04 01 00, MAINTENANCE OF MASONRY.
2. Section 04 05 16, MASONRY GROUTING.
3. Section 04 20 00, UNIT MASONRY.
4. Section 04 43 01, MASONRY RESTORATION.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
2. C91/C91M-12 - Masonry Cement.
3. C144-11 -Aggregate for Masonry Mortar.
4. C150/C150M-15 - Portland Cement.
5. C207-06(2011) - Hydrated Lime for Masonry Purposes.
6. C270-14a - Mortar of Unit Masonry.
7. C595/C595M-15e1 - Blended Hydraulic Cements.
8. C780-15 - Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
9. C979/C979M-10 - Pigments for Integrally Colored Concrete.
10. C1329/C1329M-15 - Mortar Cement.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Mortar.
2. Admixtures.

D. Certificates: Certify each product complies with specifications.

1. Portland cement.

2. Masonry cement.
3. Mortar cement.
4. Hydrated lime.
5. Fine aggregate.
6. Color admixture.

E. Qualifications: Substantiate qualifications comply with specifications.
1. Testing laboratory.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:
1. Engage independent testing laboratory to tests and submit reports.
a. Deliver samples to laboratory in number and quantity required for testing.
2. Test mortar and materials specified.
3. Mortar:
a. Test for compressive strength and water retention according to ASTM C270.
b. Minimum Mortar compressive strengths 28 days:
1) Type M: 17.2 MPa (2,500 psi).
2) Type S: 12.4 MPa (1,800 psi).
3) Type N: 5.1 MPa (750 psi).
4. Non Staining Cement: Test for water soluble alkali.
a. Water Soluble Alkali: Maximum 0.03 percent.
5. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store masonry materials under waterproof covers on planking clear of ground.
1. Protect loose, bulk materials from contamination.
B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Hydrated Lime: ASTM C207, Type S.

B. Aggregate for Masonry Mortar: ASTM C144 and as follows:

1. Light colored sand for mortar for laying face brick.
2. White plastering sand meeting sieve analysis for mortar joints for pointing except that 100 percent passes No. 8 sieve, and maximum 5 percent retained on No. 16 sieve.
3. Test sand for color value according to ASTM C40/C40M. Sand producing color darker than specified standard is unacceptable.

C. Blended Hydraulic Cement: ASTM C595/C595M, Type IS, IP.

D. Masonry Cement: ASTM C91/C91M. Type N, S, Or M.

1. Use white masonry cement whenever white mortar is specified.

E. Mortar Cement: ASTM C1329/C1329M, Type N, S or M.

F. Portland Cement: ASTM C150/C150M, Type I.

1. Use white Portland cement wherever white mortar is specified.

G. Pigments: ASTM C979/C979M; inorganic, inert, mineral pigments only, unaffected by atmospheric conditions, nonfading, alkali resistant, and water insoluble.

H. Water: Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Match existing and as approved by Interior Design and COR.

B. Provide each product from one manufacturer and from one production run.

2.3 MIXES

A. Pointing Mortar for New Work:

1. For Cast Stone or Precast Concrete: Proportion by volume; one part white Portland cement, two parts white sand, and 1/5 part hydrated lime.
2. Pointing Mortar for Glazed Structural Facing Tile:

a. Proportion by volume: One part white Portland cement, two parts of graded white sand passing Number 50 sieve, and 1/8 part hydrated lime.

B. Tuck Pointing Mortar for Repair Work: Tuck pointing mortar specified in Section 04 01 00, MAINTENANCE OF MASONRY.

C. Masonry Mortar: ASTM C270.

1. Admixtures:

a. Do not use mortar admixtures, and color admixtures unless approved by Contracting Officer's Representative.

b. Do not use antifreeze compounds.

D. Colored Mortar:

1. Maintain uniform mortar color for exposed work, throughout.

2. Match mortar color in approved sample or sample panel specified in Section 04 20 00, UNIT MASONRY.

3. Alteration Work Mortar Color: Match existing mortar as approved by Interior Design and COR.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.2 MIXING

A. Measure ingredients by volume using known capacity container.

B. Mix for 3 to 5 minutes in a mechanically operated mortar mixer.

C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.

D. Mortar Stiffened Because of Water Loss Through Evaporation:

1. Re-temper by adding water to restore to proper consistency and workability.

2. Discard mortar reaching initial set or unused within two hours of mixing.

E. Pointing Mortar:

1. Mix dry ingredients with enough water to produce damp mixture of workable consistency retaining shape when formed into ball.

2. Allow mortar to stand in dampened condition for 60 to 90 minutes.

3. Add water to bring mortar to a workable consistency before use.

3.3 MORTARING

A. Type M Mortar: Use for parging below grade.

B. Type S Mortar: Use for masonry containing vertical reinforcing bars (non-engineered), masonry below grade, and setting cast stone.

C. Brick Veneer Over Frame Back Up Walls: Use Type S Portland cement-lime mortar.

D. Type N Mortar: Use for other masonry work.

E. Type N Mortar: Use for pointing items and tuck pointing specified.

3.4 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

1. Take and test samples during progress of work according to ASTM C780.

- - E N D - -

THIS PAGE INTENTIONALLY BLANK

SECTION 04 05 16
MASONRY GROUTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Grout for filling hollow concrete masonry cores.

1.2 RELATED REQUIREMENTS

A. Grout used in Section:

1. Section 04 20 00, UNIT MASONRY

B. Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

American National Standards Institute (ANSI):

1. A118.6-19 - Standard Cement Grouts for Tile Installation.

B. ASTM International (ASTM):

1. C40/C40M-20 - Organic Impurities in Fine Aggregates for Concrete.
2. C150/C150M-20 - Portland Cement.
3. C207-18 - Hydrated Lime for Masonry Purposes.
4. C404-18 - Aggregates for Masonry Grout.
5. C476-20 - Grout for Masonry.
6. C595/C595M-20 - Blended Hydraulic Cement.
7. C979/C979M-16 - Pigments for Integrally Colored Concrete.
8. C1019-19 - Sampling and Testing Grout.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Sustainable Construction Submittals:

1. Recycled Content: Identify pre-consumer recycled content percentage by weight.

D. Test Reports: Certify each product complies with specifications.

1. Grout, each type.
2. Cement.
3. Aggregate.

E. Certificates: Certify each product complies with specifications.
   1. Blended hydraulic cement.
   2. Portland cement.
   3. Grout.
   4. Hydrated lime.
   5. Aggregate.
   6. Color admixture.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:
   1. Engage independent testing laboratory to perform tests and submit reports.
      a. Deliver samples to laboratory in number and quantity required for testing.
   2. Grout:
      a. Test compressive strength according to ASTM C1019 standard.
   3. Cement:
      a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
      b. Nonstaining cement containing more than 0.03 percent water soluble alkali.
   4. Aggregate:
      a. Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

1.7 STORAGE AND HANDLING

A. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.
B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Grout Components:
   1. Hydrated Lime: ASTM C207, Type S.
   2. Aggregate For Masonry Grout: ASTM C404, Size 8.
   3. Blended Hydraulic Cement: ASTM C595, Type IS, IP.
   4. Portland Cement: ASTM C150, Type I.
   5. Liquid Acrylic Resin:
      a. A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.
   6. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer and from one production run.

2.3 MIXES

A. Grout: ASTM C476; fine grout and coarse grout.
   1. Color Admixture:
      a. Pigments: ASTM C979, inert, stable to atmospheric conditions, nonfading, alkali resistant, and water insoluble.
      b. Use mineral pigments only. Organic pigments are not acceptable.

B. Ready-Mixed Grout: ANSI A118.8.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Clean mortar from masonry cells protruding more than 13 mm (1/2 inch) to permit grout flow.

D. Remove debris from grout spaces.

E. Verify reinforcement is correctly placed before placing grout.

3.2 MIXING

A. Mix grout in mechanically operated mixer.
   1. Mix grout for five minutes, minimum.

B. Measure ingredients by volume using container of known capacity.

C. Mix water with grout dry ingredients.
   1. Slump Range: 200 to 275 mm (8 to 11 inches).

3.3 GROUTING

A. Install grout according to Section 04 20 00, UNIT MASONRY.
B. Use fine grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is 50 mm (2 inches) or less.
C. Use either fine grout or coarse grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is greater than 50 mm (2 inches).
D. Use grout for filling bond beam or lintel units.

- - E N D - -

SECTION 04 20 00
UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Concrete masonry unit (CMU) assemblies for:
   1. Exterior walls.

1.2 RELATED REQUIREMENTS

A. Sealants and Sealant Installation: Section 07 92 00, JOINT SEALANTS.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Concrete Institute (ACI):
   1. 315-99 - Details and Detailing of Concrete Reinforcement.
   2. 530.1/ASCE 6/TMS 602-13 - Specification for Masonry Structures.
C. ASTM International (ASTM):
   1. A615/A615M-15ae1 - Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
   2. A951/A951M-14 - Steel Wire for Masonry Joint Reinforcement.
   3. A1064/A1064M-15 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
   4. C34-13 - Structural Clay Load-Bearing Wall tile.
   5. C55-14a - Concrete Building Brick.
   6. C56-13 - Structural Clay Nonloadbearing Tile.
   7. C62-13a - Building Brick (Solid Masonry Units Made from Clay or Shale).
   8. C67-14 - Sampling and Testing Brick and Structural Clay Tile.
   9. C90-14 - Load-Bearing Concrete Masonry Units.
   10. C126-15 - Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units.
   11. C216-15 - Facing Brick (Solid Masonry Units Made From Clay or Shale).
   12. C612-14 - Mineral Fiber Block and Board Thermal Insulation.
   13. C744-14 - Prefaced Concrete and Calcium Silicate Masonry Units.
   14. D1056-14 - Flexible Cellular Materials - Sponge or Expanded Rubber.
   15. D2240-05(2010) - Rubber Property-Durometer Hardness.
   16. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.
D. American Welding Society (AWS):

1. D1.4/D1.4M-11 - Structural Welding Code - Reinforcing Steel.

E. Brick Industry Association (BIA):

1. TN 11B-88 - Guide Specifications for Brick Masonry, Part 3.

F. Federal Specifications (Fed. Spec.):

1. FF-S-107C(2) - Screws, Tapping and Drive.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies.
2. Special masonry shapes, profiles, and placement.
3. Masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Samples:

1. Face brick: Sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
2. Ceramic Glazed Facing Brick: Sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
3. Concrete masonry units, when exposed in finish work.
4. Anchors and Ties: Each type.
5. Joint Reinforcing: 1.2 m (48 inches) long each type.
6. Glazed Structural Facing Tile: Clipped panels (triplicate) of four wall units with base units, showing color range, each color and texture.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

F. Test reports: Certify products comply with specifications.

1. Ceramic glazed facing brick.

G. Certificates: Certify products comply with specifications.

1. Face brick.
2. Solid and load-bearing concrete masonry units, including fire-resistant rated units.
3. Ceramic glazed facing brick.
4. Glazed structural clay facing tile.
5. Structural clay tile units.

1.5 QUALITY ASSURANCE

A. Welders and Welding Procedures Qualifications: AWS D1.4/D1.4M.

B. Mockups:

1. Before starting masonry, build a mockup panel minimum 0.9 m by 0.9 m (3 feet by 3 feet) with 600 mm (24 inch) 90 degree return for outside corner.
   a. Use masonry units from random cubes of units delivered on site.
   b. Include structural backup, reinforcing, ties, and anchors.
2. Mockup panel approved by Contracting Officer's Representative set workmanship and aesthetic quality for masonry work.
3. Clean sample panel to test cleaning methods.
4. Remove mockup panel when directed by Contracting Officer's Representative.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products above grade, protected from contamination.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Hot and Cold Weather Requirements: Comply with ACI 530.1/ASCE 6/TMS 602.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: Match existing as approved by Interior Design and COR. Glen-Gery – Beige with Speck (S42) Brick, Extruded, smooth Finish, Standard Size. Belden Brick – Dark Range Shale and Fireclay Ironspot (PLT4) 470-479 Brick, Extruded, Smooth Texture, Standard Size.

B. Provide each product from one manufacturer and from one production run.

2.2 UNIT MASONRY PRODUCTS

A. Brick:

1. Face Brick:
   a. ASTM C216, Grade SW, Type FBS.
   b. Brick when tested according to ASTM C67: Classified slightly efflorescent or better.
   c. Size:
      1) Standard.
2. Building Brick: ASTM C62, Grade MW for backup and interior work; Grade SW where in contact with earth.
3. Ceramic Glazed Facing Brick: ASTM C126.
4. One Face Exposed: Grade S, Type I.
5. Two Faces Exposed: Grade S, Type II.

B. Concrete Masonry Units (CMU):

1. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
   a. Unit Weight: Normal weight.
2. Sizes: Modular, 200 mm by 400 mm (8 inches by 16 inches) nominal face dimension; thickness as indicated on drawings.
3. For molded faces used as a finished surface, use concrete masonry units with uniform fine to medium surface texture unless specified otherwise.
4. Use bullnose concrete masonry units at corners exposed in finished work with 25 mm (1 inch) minimum radius rounded vertical exterior corners (bullnose units).
5. Customized Units:
   a. Glazed Face Units: Facing conform to ASTM C744.

2.3 ANCHORS, TIES, AND REINFORCEMENT

A. Steel Reinforcing Bars: ASTM A615/A615M; Grade 60, deformed bars.

B. Joint Reinforcement:

1. Form from wire complying with ASTM A951/A951M.
2. Hot dipped galvanized after fabrication.
3. Width of joint reinforcement 40 mm (1.6 inches) less than nominal thickness of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement minimum 3 m (10 feet) long, factory cut.
6. Joint reinforcement with crimp formed drip is not acceptable.
7. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
8. Ladder Design:
   a. Longitudinal wires deformed 5 mm (0.20 inch) diameter wire.
   b. Cross wires 4 mm (0.16 inch) diameter.
9. Trussed Design:
   a. Longitudinal and cross wires minimum 4 mm (0.16 inch nominal) diameter.
   b. Longitudinal wires deformed.
10. Multiple Wythes and Cavity Wall Ties:
   a. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
   b. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe minimum 75 mm (3 inches) spaced 400 mm on center (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).

C. Individual Ties:

1. Rectangular ties: Form from 5 mm (3/16 inch) diameter galvanized steel rod to rectangular shape minimum 50 mm (2 inches) wide by sufficient length for ends of ties to extend within 25 mm (1 inch) of each face of wall. Ties that are crimped to form drip are not acceptable.
2. Adjustable Cavity Wall Ties:
   a. Adjustable wall ties may be furnished at Contractor's option.
   b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.

c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
d. Form one piece to rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into bed joint 50 mm (2 inches).
e. Form other piece to 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having 75 mm (3 inch) long bent section for engaging 105 mm (4-1/8 inch) wide piece to form adjustable connection.

D. Wall Ties, (Mesh or Wire):
1. Mesh wall ties formed of ASTM A1064/A1064M, W0.5, 2 mm, (0.08 inch) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
2. Rectangular wire wall ties formed of W1.4, 3 mm, (0.12 inch) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

E. Adjustable Steel Column Anchor:
1. Two piece anchor consisting of a 6 mm (1/4 inch) diameter steel rod to be welded to steel with offset ends, rod to permit 100 mm (4 inch) vertical adjustment of wire anchor.
2. Triangular shaped wire anchor 100 mm (4 inches) wide formed from 5 (3/16 inch) diameter galvanized wire, to extend minimum 75 mm (3 inches) into joints of masonry.

F. Adjustable Steel Beam Anchor:
1. Z or C type steel strap, 30 mm (1 1/4 inches) wide, 3 mm (1/8 inch) thick.
2. Flange hook minimum 38 mm (1 1/2 inches) long.
3. Length to embed in masonry minimum 50 mm (2 inches) in 100 mm (4 inch) nominal thick masonry and 100 mm (4 inches) in thicker masonry.
4. Bend masonry end minimum 40 mm (1 1/2 inches).

2.4 ACCESSORIES

A. Shear Keys:
1. Solid extruded cross-shaped section of rubber, neoprene, or polyvinyl chloride, with durometer hardness of approximately 80 when tested according to ASTM D2240, and minimum shear strength of 3.5 MPa (500 psi).
2. Shear Key Dimensions: Nominal 70 mm by 8 mm for long flange and 38 mm by 16 mm for short flange (2-3/4 inches by 5/16 inch for long flange, and 1-1/2 inches by 5/8 inch for short flange).

B. Weeps:
   1. Weep Hole Wicks: Cotton fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
   2. Weep Tubing: Round, polyethylene, 9 mm (3/8 inch) diameter, 100 mm (4 inches) long.
   3. Weep Hole: Flexible PVC louvered configuration with rectangular closure strip at top.
C. Cavity Drain Material: Open mesh polyester sheets or strips to prevent mortar droppings from clogging the cavity.
D. Preformed Compressible Joint Filler:
   1. Thickness and depth to fill joint.
   2. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
   3. Non-Combustible Type: ASTM C612, Type 5, Max. Temp.1800 degrees F.
E. Box Board:
   1. Mineral Fiber Board: ASTM C612, Type 1.
   2. 25 mm (1 inch) thickness.
   3. Other spacing material having similar characteristics is acceptable subject to Contracting Officer's Representative's approval.
F. Masonry Cleaner:
   1. Detergent type cleaner selected for each type masonry.
   2. Acid cleaners are not acceptable.
   3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.
G. Fasteners:
   1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
   2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
   3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.
H. Welding Materials: AWS D1.4/D1.4M, type to suit application.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Keep finish work free from mortar smears or spatters, and leave neat and clean.

C. Wall Openings:

1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
2. When items are not available when walls are built, prepare openings for subsequent installation.

D. Tooling Joints:

1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
2. Tool while mortar is soft enough to be compressed into joints and not raked out.
3. Finish joints in exterior face masonry work with jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
4. Tool Exposed interior joints in finish work concave unless specified otherwise.

E. Lintels:

1. Lintels are not required for openings less than 1 mm(40 inches) wide that have hollow metal frames.
2. Openings 1.02 m (41 inches) wide to 1.6 m (63 inches) wide without structural steel lintel or frames, require lintel formed of concrete masonry lintel or bond beam units filled with grout and reinforced with one No. 16 Metric (No. 5 Imperial) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.
3. Precast concrete lintels of 25 MPa (3,000 psi) concrete, same thickness as partition, and with one No. 16 Metric (No. 5 Imperial) deformed bar top and bottom for each 100 mm (4 inches) of nominal thickness, is acceptable in lieu of reinforced CMU masonry lintels.
4. Use steel lintels, for openings greater than 1600 m (63 inches) wide, brick masonry openings, and elevator openings unless shown otherwise.
5. Doors having overhead concealed door closers require steel lintel, and pocket for closer box.

6. Lintel Bearing Length: Minimum 100 mm (4 inches) at both ends.
7. Build masonry openings or arches over wood or metal centering and supports when steel lintels are not used.

F. Use minimum 100 mm (4 inches) nominal thick masonry for fireproofing steel columns unless indicated otherwise.

G. Before connecting new masonry with previously laid masonry, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.

H. When new masonry partitions start on existing floors, machine cut existing floor finish material down to concrete surface.

I. Structural Steel Encased in Masonry:
1. Where structural steel is encased in masonry and voids between steel and masonry are filled with mortar, provide minimum 25 mm (1 inch) mortar free expansion space between masonry and steel by applying box board material to steel before masonry is laid.
2. Do not install spacing material where steel is bearing on masonry or masonry is bearing on steel.

J. Chases:
1. Do not install chases in masonry walls and partitions exposed to view in finished work, including painted or coated finishes on masonry.
2. Masonry 100 mm (4 inch) nominal thick may have electrical conduits 25 mm (1 inch) or less in diameter when covered with soaps, or other finishes.
3. Fill recess chases after installation of conduit, with mortar and finish flush.
4. When pipes or conduits, or both occur in hollow masonry unit partitions retain minimum one web of hollow masonry units.

K. Wetting and Wetting Test:
1. Test and wet brick and clay tile according to BIA TN 11B.
2. Do not wet concrete masonry units or glazed structural facing tile before laying.

L. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.

M. Construct formwork to conform to shape, line and dimensions indicated on drawings. Make sufficiently tight to prevent mortar, grout, or concrete leakage. Brace, tie and support formwork as required to

maintain position and shape during construction and curing of reinforced masonry.

N. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and other reasonable temporary construction loads.

O. Minimum Curing Times Before Removing Shores and Forms:
   1. Girders and Beams: 10 days.
   2. Slabs: 7 days.
   3. Reinforced Masonry Soffits: 7 days.

3.2 INSTALLATION - ANCHORAGE

A. Veneer to Framed Walls:
   1. Install adjustable veneer anchors.
   2. Fasten anchor to stud through sheathing with self-drilling and tapping screw, one at both ends of loop type anchor.
   3. Space anchors maximum 400 mm (16 inches) on center vertically at each stud.

B. Veneer to Concrete Walls:
   1. Install dovetail slots in concrete vertically at 400 mm (16 inches) on centers.
   2. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals.
   3. Anchor new masonry facing to existing concrete with adjustable cavity wall ties spaced at 400 mm, (16 inches) maximum vertical intervals, and at 400 mm (16 inches) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.

C. Masonry Facing to Backup and Cavity Wall Ties:
   1. Use individual ties for new work.
   2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 400 mm (16 inches) horizontally.
   3. At openings, provide additional ties spaced maximum .0 m (36 inches) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
   4. Anchor new masonry facing to existing masonry with adjustable cavity wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.

5. Option: Install joint reinforcing for multiple wythes and cavity wall ties spaced maximum 400 mm (16 inches) vertically.
6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals maximum 400 mm (16 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

D. Anchorage of Abutting Masonry:
1. Anchor interior 100 mm (4 inch) thick masonry partitions to exterior masonry walls with wall ties. Space ties at 600 mm (24 inches) maximum vertical intervals. Extend ties 100 mm (4 inches) minimum into masonry.
2. Anchor interior masonry bearing walls or interior masonry partitions over 100 mm (4 inches) thick to masonry walls with rigid wall anchors spaced at 400 mm (16 inch) maximum vertical intervals.
3. Anchor abutting masonry walls and partitions to concrete with dovetail anchors. Install dovetail slots vertically in concrete at centerline of abutting wall or partition. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals. Secure anchors to existing wall with two 9 mm (3/8 inch) by 75 mm (3 inch) expansion bolts or two power-driven fasteners.
4. Anchor abutting interior masonry partitions to existing concrete and existing masonry construction, with adjustable wall ties. Extend ties minimum 100 mm (4 inches) into joints of new masonry. Fasten ties to existing concrete and masonry construction, with powder actuated drive pins, nail or other means that provides rigid anchorage. Install anchors at 400 mm (16 inch) maximum vertical intervals.

E. Masonry Furring:
1. Anchor masonry furring less than 100 mm (4 inches) nominal thick to masonry walls or to concrete with adjustable wall ties or dovetail anchors.
2. Space at maximum 400 mm (16 inches) on center in both directions.

F. Anchorage to Steel Beams or Columns:
1. Use adjustable beam anchors on each flange.

2. At columns weld steel rod to steel columns at 300 mm (12 inch) intervals, and place wire ties in masonry courses at 400 mm (16 inches) maximum vertically.

3.3 INSTALLATION - REINFORCEMENT

A. Joint Reinforcement:
   1. Install joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
   2. Reinforcing is acceptable in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
   3. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
   4. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry.
   5. Wherever brick masonry is backed up with stacked bond masonry, install multiple wythe joint reinforcement in every two courses of CMU backup, and in corresponding joint of facing brick.

B. Steel Reinforcing Bars:
   1. Install reinforcing bars in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for horizontal reinforcement. Install in wall cavities of reinforced masonry walls where indicated on drawings.
   2. Bond Beams:
      a. Form Bond beams of load-bearing concrete masonry units filled with grout and reinforced with two No. 15m (No. 5) reinforcing bars unless shown otherwise. Do not cut reinforcement.
      b. Brake bond beams only at expansion joints and at control joints, if shown.
   3. Stack Bond:
      a. Locate additional joint reinforcement in vertical and horizontal joints as indicated on drawings.
      b. Anchor vertical reinforcement into foundation or wall or bond beam below.
      c. Provide temporary bracing for walls over 8 feet tall until permanent horizontal bracing is completed.

3.4 INSTALLATION - BRICK EXPANSION AND CMU CONTROL JOINTS

A. Provide brick expansion joint (EJ) and CMU control joints (CJ) where indicated on drawings.

B. Keep joint free of mortar and other debris.

C. Joints Occur In Masonry Walls:

1. Install preformed compressible joint filler in brick wythe.
2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on both sides of shear key.

D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.

E. Interrupt joint reinforcement at expansion and control joints.

F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.5 INSTALLATION - BUILDING EXPANSION AND SEISMIC JOINTS

A. Keep expansion and seismic joints open and free of mortar. Remove mortar and other debris.

B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.

C. Fill opening in exposed face of expansion and seismic joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.6 INSTALLATION - ISOLATION JOINT

A. Where full height walls and partitions lie parallel or perpendicular to and under structural beams and shelf angles, provide minimum 9 mm (3/8 inch) separation between walls and partitions and bottom of beams and shelf angles.

B. Insert continuous full width strip of non-combustible type compressible joint filler.

C. Fill opening in exposed face of isolation joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.7 INSTALLATION - BRICKWORK

A. Lay clay brick according to BIA TN 11B.

B. Laying:

1. Lay brick in one-half running bond with bonded corners, unless indicated otherwise. Match bond of existing building on alterations and additions.
2. Maintain bond pattern throughout.
3. Do not use brick smaller than half-brick at any angle, corner, break, and jamb.
4. Where length of cut brick is greater than one half length, maintain vertical joint location.
5. Lay exposed brickwork joints symmetrical about center lines of openings.
6. Do not structurally bond multi-wythe brick walls, unless indicated on drawings.
7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
8. Lay brick for sills with wash and drip.
9. Build solid brickwork as required for anchorage of items.

C. Joints:
1. Exterior And Interior Joint Widths: Lay for three equal joints in 200 mm (8 inches) vertically, unless shown otherwise.
2. Rake joints for pointing with colored mortar when colored mortar is not full depth.
3. Arches:
   a. Flat arches (jack arches) lay with camber of 1 in 200 (1/16 inch per foot) of span.
   b. Face radial arches with radial brick with center line of joints on radial lines.
   c. Form Radial joints of equal width.
   d. Bond arches into backing with metal ties in every other joint.

D. Weep Holes:
1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in wall.
2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.

E. Solid Exterior Walls:
   1. Build with 100 mm (4 inches) of nominal thick facing brick, backed up with concrete masonry units or 100 mm (4 inches) nominal thick face brick.
   2. Construct solid brick jambs minimum 20 mm (0.81 inches) wide at exterior wall openings and at recesses, except where exposed concrete unit backup is shown.
   3. Do not install full bonding headers.
   4. Parging:
      a. For solid masonry walls, lay backup to height of six brick courses, parge backup with 13 mm (1/2 inch) of mortar troweled smooth; then lay exterior wythe to height of backup.
      b. Make parging continuous over backup, and extend 150 mm (6 inches) onto adjacent concrete or masonry.
      c. Parge ends and backs for recesses in exterior walls to thickness of 13 mm (1/2 inch).
      d. Parge inside surface of exterior walls to produce true even surface to receive insulation.
   5. Coordinate with building insulation for thickness of insulation and allowance of air space behind exterior wythe.
   6. In locations where hurricane driven rains are expected, install bituminous dampproofing on cavity side of inner wythe.

F. Cavity Walls:
   1. Keep air space clean of mortar accumulations and debris.
   2. Lay the interior wythe of the masonry wall full height where dampproofing or air barrier is required on cavity face. Coordinate to install dampproofing or air barrier before laying outer wythe.
   3. Insulated Cavity Type Exterior Walls:
      a. Install insulation against cavity face of inner masonry wythe.
      b. Place insulation between rows of ties or joint reinforcing. Adhere insulation to masonry surface with a bonding agent as recommended by insulation manufacturer.
      c. Lay outer masonry wythe up with air space between insulation and masonry units.
   4. Veneer Framed Walls:
      a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.

b. Keep air space clean of mortar accumulations and debris.

3.8 INSTALLATION - CONCRETE MASONRY UNITS

A. Types and Uses:

1. Provide special concrete masonry shapes as required, including lintel and bond beam units, sash units, and corner units. Provide solid concrete masonry units, where full units cannot be installed, or where needed for anchorage of accessories.
2. Provide solid load-bearing concrete masonry units or grout cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Do not install brick jambs in exposed finish work.
5. Install concrete building brick only as filler in backup material where not exposed.
6. Construct fire resistance in fire rated partitions meeting fire ratings indicated on drawings.

B. Laying:

1. Lay concrete masonry units with 9 mm (3/8 inch) joints, with a bond overlap of minimum 1/4 of unit length, except where stack bond is indicated on drawings.
2. Do not wet concrete masonry units before laying.
3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill voids with mortar or grout.
7. Provide 6 mm (1/4 inch) open joint for sealant between existing construction, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings minimum 50 mm (2 inches) by 75 mm (3 inches).

10. Do not wedge masonry against steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes indicated on drawings.
12. At time of placement, ensure steel reinforcement is free of loose rust, mud, oil, and other contamination capable of affecting bond.
13. Place steel reinforcement at spacing indicated on drawings before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place vertically by centering clips, caging devices, tie wire, or other approved methods.
16. Support vertical bars near each end and at maximum 192 bar diameter on center.
17. Splice reinforcement or attach reinforcement to dowels by placing in contact and securing with wire ties.
18. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
19. Grout cells of concrete masonry units, containing reinforcing bars, solid as specified.
20. Install cavity and joint reinforcement as masonry work progresses.
21. Rake joints 6 to 10 mm (1/4 to 3/8 inch) deep for pointing with colored mortar when colored mortar is not full depth.

C. Waterproofing Parging:
1. Parge earth side of concrete masonry unit basement walls with mortar applied in two coats, each coat 6 mm (1/4 inch) thick.
2. Clean wall surfaces to receive parging of dirt, oil, or grease, and moisten before application of first coat.
3. Roughen first coat when partially set, permit to hardened for 24 hours, and moisten before application of second coat.
4. Keep second coat damp for minimum 48 hours.
5. Thicken parging and round to form a cove at the junction of outside wall face and footing.

3.9 INSTALLATION - GLAZED STRUCTURAL FACING TILE

A. Lay facing tile in running bond unless indicated otherwise. Match existing adjacent bond and joints in alteration work.

B. Laying:

1. Set facing tile units in full bed of mortar with ends buttered, and units shoved into place. Fill joints with mortar, and rake out 9 mm (3/8 inch) deep for pointing.
2. Install clean units when set.
3. Perform cutting and grinding with power-driven cutting saws and grinders.
4. Cut or drill units to accommodate electrical outlets, plumbing fixtures, grab-bars, fittings, and equipment.
5. Cove Base Units:
   a. Set base flush with finish floor.
   b. Form base course of two-face partitions of two units to required thickness.
6. Lay out partitions enclosing pipes or conduits with thickness to provide 50 mm (2 inch) minimum coverage of pipes or conduits.
7. Joints:
   a. 6 mm (1/4 inch) nominal width for new work, match existing for alteration work.
   b. Maximum variations in joint width 2 mm (1/16 inch).
   c. Reinforce Two-Face partitions of 100 mm (4 inch) nominal thickness with continuous joint reinforcement, or wire mesh ties in joints at top of base, at top of glazed structural facing tile, and at three-course intervals.

3.10 POINTING

A. Fill joints with pointing mortar using rubber float trowel to apply mortar solidly into raked joints.
B. Wipe off excess mortar from joints of glazed masonry units with dry cloth.
C. Tool exposed joints to smooth concave joint.
D. At joints with existing work, match existing joint.

3.11 GROUTING

A. Preparation:
   1. Clean grout space of mortar droppings before placing grout.
   2. Close cleanouts.
   3. Install vertical solid masonry dams across grout space for full height of wall at intervals of maximum 9 m (30 feet). Do not bond dam units into wythes as masonry headers.

4. Verify reinforcing bars are installed as indicated on drawings.

B. Placing:

1. Place grout in grout space in lifts as specified.
2. Consolidate each grout lift after free water has disappeared but before plasticity is lost.
3. Do not slush with mortar or use mortar with grout.
4. Interruptions:
   a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inches) below top of last masonry course.
   b. Grout from dam to dam on high lift method.
   c. Longitudinal run of masonry may be stopped off only by raking back one-half masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:

1. Consolidate by puddling with grout stick during and immediately after placing.
2. Grout cores of concrete masonry units containing reinforcing bars solid as masonry work progresses.

D. Low Lift Method:

1. Construct masonry to 1.5 m (5 feet) maximum height before grouting.
2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:

1. Do not pour grout until masonry wall has cured minimum of 4 hours.
2. Place grout in 1.5 m (5 feet) maximum lifts.
3. Exception:
   a. Where following conditions are met, place grout in 3.86 m (12.67 feet) maximum lifts.
   b. Masonry has cured minimum of 4 hours.
   c. Grout slump is maintained between 250 and 275 mm (10 and 11 inches).
   d. No intermediate reinforced bond beams are placed between top and bottom of grout lift.
4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into preceding lift.

3.12 PLACING REINFORCEMENT

A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on drawings or approved submittal drawings, or bars with reduced cross-section due to excessive rusting or other causes.

B. Position reinforcement accurately at spacing indicated on drawings. Support and secure vertical bars against displacement. Install horizontal reinforcement as masonry work progresses. Where vertical bars are shown in close proximity, provide clear distance between bars of minimum one bar diameter or 25 mm (1 inch), whichever is greater.

C. Splice reinforcement bars only where indicated on drawings, unless approved by Contracting Officer's Representative. Provide lapped splices. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.

D. Provide minimum lap as indicated on approved submittal drawings, or if not indicated, minimum 48 bar diameters.

E. Weld splices where indicated on drawings according to AWS D1.4/D1.4M.

F. Embed metal ties in mortar joints as work progresses, with minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.

G. Embed prefabricated horizontal joint reinforcement as work progresses, with minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement minimum 150 mm (6 inches) at ends. Use prefabricated “L” and “T” sections to provide continuity at corners and intersections. Cut and bend joint reinforcement for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.

H. Anchoring: Anchor reinforced masonry work to supporting structure as indicated on drawings.

I. Anchor reinforced masonry walls at intersections with non-reinforced masonry.

3.13 INSTALLATION OF REINFORCED BRICK MASONRY

A. Mortar Jointing and Bedding:

1. Pattern Bond: Lay exterior wythes in pattern bond shown, or if not shown, lay in 1/2 running bond with vertical joints in each course centered on units in courses above and below. Lay inner wythes (if

any) with units in each wythe bonded by lapping minimum 50 mm (2 inches). Bond and interlock each course of each wythe at corners and intersections. Do not use units with less than 100 mm (4 inch) nominal horizontal face dimension at corners or jambs.

2. Lay exterior wythes with bed (horizontal) and head (vertical) joints between units completely filled with mortar. Top of bed joint mortar may be sloped toward center of walls. Butter ends of units with sufficient mortar to completely fill head joints and shove into place. Do not furrow bed joints or slush head joints. Remove any mortar fins which protrude into grout space.
3. Maintain joint widths shown for head and bed joints, except for minor variations required to maintain pattern bond. If not shown, lay with 9 mm (3/8 inch) head and bed joints.
4. Maintain joint widths shown for head and bed joints, but adjust thickness of bed joints, if required, to allow for minimum 6 mm (1/4 inch) thickness of mortar between reinforcement and masonry units, except 6 mm (1/4 inch) bars (if any) may be laid in 13 mm (1/2 inch) thick bed joints and 5 mm (0.2 inch) diameter or smaller wire reinforcing may be laid in 9 mm (3/8 inch) thick bed joints.

B. Two-Wythe Wall Construction: Lay both wythes as specified for exterior wythes. Maintain grout space (collar or continuous vertical joint between wythes) of width indicated, but adjust, if required, to provide grout space minimum 13 mm (1/2 inch) wider than the sum of the vertical and horizontal reinforcement bars shown in grout space. Do not parge or fill grout space with mortar.

C. Multi-Wythe Wall Construction: Where walls of three or more wythes are indicated, lay exterior wythes as specified. Maintain space between wythes as required to allow for laying of number of wythes of unit width shown with minimum grout space between wythes. Allow for minimum 19 mm (3/4 inch) grout between wythes if non-reinforced; if reinforced, allow for grout space minimum 13 mm (1/2 inch) wider than sum of vertical and horizontal reinforcement bars indicated in grout space. Place or float interior wythe units in grout poured between exterior wythes as work progresses. Position units to allow minimum 19 mm (3/4 inch) grout between ends and sides of adjacent units.

D. Limit extent of masonry construction to sections which do not exceed maximum grouting requirements. Provide temporary dams or barriers to

control horizontal flow of grout at ends of wall sections. Build dams full height of grout pour. If masonry units are used, do not bond into permanent masonry wythes. Remove temporary dams after completion of grout pour.

E. Low-Lift Grouting:
   1. Use Low-Lift grouting technique with fine grout for the following:
      a. Two-wythe walls with grout space of 50 mm (2 inch) or less in width.
      b. Multi-wythe walls.
      c. Columns, piers or pilasters where masonry units are shown in core areas enclosed by exterior masonry units.
   2. At Contractor’s option, low-lift grouting technique is acceptable for reinforced masonry construction with grout spaces wider than 50 mm (2 inches), except use coarse grout and place in lifts maximum 200 mm (8 inches) in height.
   3. Construct low-lift masonry by placing reinforcement, laying masonry units and pouring grout as work progresses.
   4. Place vertical reinforcement bars and supports before laying of masonry units. Extend above elevation of maximum pour height as required to allow for splicing. Horizontal reinforcement bars may be placed progressively with laying of masonry units.
   5. Limit grout pours as required to prevent displacement of masonry by grout pressures (blowout), but do not exceed 1.2 mm (4 feet) pour height.
   6. Lay masonry units before each grout pour, but do not construct more than 300 mm (12 inches) above maximum grout pour height in exterior wythe and 100 mm (4 inches) above in other exterior wythe. Provide metal wall ties if required to prevent blowouts.
   7. Consolidate immediately by rodding or puddling; do not use trowels. Place grout continuously; do not interrupt pouring of grout for more than one hour. If poured in lifts, place from center-to-center of masonry courses. Terminate pour 38 mm (1 1/2 inches) below top of highest course in pour.

F. High-Lift Grouting:
   1. High-Lift grouting technique is acceptable for the following masonry construction:

a. Two-wythe walls with grout spaces of 60 mm (2 1/2 inches) or greater width.
b. Columns, piers, or pilasters when no unit masonry fill is shown to be placed in reinforced grout space.

2. Place reinforcement and support in proper position, before laying of masonry units, except if shown to be placed in mortar joints, place as masonry units are laid. Place horizontal bars in grout spaces on same side of vertical bars.
3. Construct high-lift masonry by laying masonry to full height and width before placing grout. Provide cleanout holes in first course of masonry, and use high-pressure water jet stream to remove excess mortar from grout spaces, reinforcement bars and top surface of structural members which support wall. Clean grout spaces daily during construction of masonry.
4. Walls: Omit every other masonry unit in first course of one wythe to provide cleanout holes. Tie wythes together with metal ties as indicated on drawings or as required by code, but provide minimum 3.8 mm diameter (9 gage) wire ties spaced maximum 600 mm (24 inches) on center horizontally and 400 mm (16 inches) on center vertically for running pattern bond or 300 mm (12 inches) on center vertically for stack bond (if any).
5. Columns, Piers and Pilasters: Omit every other masonry unit around perimeter of member to provide cleanout holes. Provide reinforcing bands placed in bed joints as the masonry work progresses. Provide bands of the size and vertical spacing show, or as required by code, but minimum 3.8 mm diameter (9 gage) wire spaced 300 mm (12 inches) on center vertically.
6. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dirt, dust, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper positioning. Clean top surface of structural members supporting masonry to ensure bond. After cleaning and inspection, close cleanout holes with matching masonry units and brace closures to resist grout pressures.
7. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist grout pressure, but minimum 3

days curing time. Install shores and bracing, if required, before starting grouting operations.

8. Place grout by pumping into grout spaces, unless alternate methods are acceptable to Contracting Officer's Representative.
9. Install coarse grout. Rod or vibrate each grout lift during placing and after excess moisture has been absorbed, but before plasticity is lost. Do not penetrate or damage grout placed in previous lifts or pours.
10. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Limit pours so as not to exceed the capacity of masonry to resist displacement or loss of mortar bond due to grout pressures.
11. Do not exceed 3.6 m (12 feet) pour height.
12. Do not exceed 7.6 m (25 feet) horizontal pour dimension.
13. Where pour height exceeds 1.2 m (4 feet), place grout in series of lifts not exceeding 1.2 m (4 feet) height. Place each lift as continuous pouring operation. Allow minimum 30 minutes and maximum one hour between lifts of given pour.
14. When more than one pour is required to complete each section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, remove temporary dams, and lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence, if more pours are required.

3.14 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

A. Do not wet concrete masonry units (CMU).

B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to distance behind face equal to thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed 9 mm (3/8 inch) joint widths.

C. Where solid CMU units are shown, lay with full mortar head and bed joints.

D. Walls:

1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below,

unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.

2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontally reinforced beams (bond beams) are indicated on drawings, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Columns, Piers and Pilasters:

1. Use CMU units of size, shape and number of vertical core spaces shown. If not shown, use units which provide minimum clearances and grout coverage for number and size of vertical reinforcement bars shown.
2. Provide pattern bond shown, or if not shown, alternate head joints in vertical alignment.

F. Grouting:

1. Use fine grout for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use coarse grout for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At Contractor’s option, use either low-lift or high-lift grouting techniques.

G. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 sq. mm (8 sq. inches) in vertical cores to be grouted.
2. Place vertical reinforcement before grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).

3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 feet) height, or if bond beam occurs below 1.5 m (5 feet) height, stop pour 38 mm (1-1/2 inches) below top of bond beam.
4. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.
5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as indicated on drawings. Place grout in bond beam course before filling vertical cores above bond beam.

H. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 sq. mm (10 sq. inches), respectively.
2. Provide cleanout holes in first course at vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour before placing grout.
5. Limit grout lifts to maximum height of 1.5 m (5 feet) and grout pour to maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, to suit application. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosen before mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.
8. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
9. Place horizontal beam reinforcement as masonry units are laid.

10. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
11. Where lateral ties are shown in contact with vertical reinforcement bars, embed additional lateral tie reinforcement in mortar joints. Place as indicated on drawings, or if not shown, provide as required to prevent grout blowout or rupture of CMU face shells, but provide minimum 4.1 mm diameter (0.16 inch) wire ties spaced 400 mm (16 inches) on center for members with 500 mm (20 inches) or less side dimensions, and 200 mm (8 inches) on center for members with side dimensions exceeding 500 mm (20 inches).
12. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.
13. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
14. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow minimum 30 minutes and maximum one hour between lifts. Mechanically consolidate each lift.
15. Place grout in lintels or beams over openings in one continuous pour.
16. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.
17. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

3.15 CONSTRUCTION TOLERANCES

A. Lay masonry units plumb, level and true to line within tolerances according to ACI 530.1/ASCE 6/TMS 602 and as follows:

B. Maximum variation from plumb:

1. In 3.0 m (10 feet) - 6 mm (1/4 inch).
2. In 6.0 m (20 feet) - 9 mm (3/8 inch).
3. In 12.0 m (40 feet) or more - 13 mm (1/2 inch).

C. Maximum variation from level:

1. In any bay or up to 6.0 m (20 feet) - 6 mm (1/4 inch).
2. In 12.0 m (40 feet) or more - 13 mm (1/2 inch).

D. Maximum variation from linear building lines:

1. In any bay or up to 6.0 m (20 feet) - 13 mm (1/2 inch).
2. In 12.0 m (40 feet) or more - 19 mm (3/4 inch).

E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:

1. Minus 6 mm (1/4 inch).
2. Plus 13 mm (1/2 inch).

F. Maximum variation in prepared opening dimensions:

1. Accurate to minus 0 mm (0 inch).
2. Plus 6 mm (1/4 inch).

3.16 CLEANING AND REPAIR

A. General:

1. Clean exposed masonry surfaces on completion.
2. Protect adjoining construction materials and landscaping during cleaning operations.
3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:

1. First wet surfaces with clean water, then wash down with detergent solution. Do not use muriatic acid.
2. Brush with stiff fiber brushes while washing, and immediately wash with clean water.
3. Remove traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:

1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
2. Allow mud to dry before brushing.

D. Glazed Structural Facing Tile or Brick Units:

1. Clean as recommended manufacturer. Protect light colored mortar joints from discoloration during cleaning.
2. Use on solid masonry walls.
3. Prepare schedule of test locations.

- - E N D - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 04 43 01
MASONRY RESTORATION

PART I - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of contract, including general and supplementary conditions and Division 1 specification sections, apply to work of this section:
B. Section 04 20 00, Unit Masonry

1.2 DESCRIPTION OF WORK

A. Extent of masonry restoration work is indicated in drawings.

B. Masonry restoration work includes the following:
1. Removing and rebuilding damaged masonry.
2. Reconstructing masonry, including parapets and copings.
3. Repointing mortar joints.
4. Masonry patching and Dutchman repairs
5. Crack repairs.
6. Reinforcing existing masonry.
7. Installing joint reinforcing.
8. Installing restoration anchors.
9. Progress cleaning of masonry surfaces.
10. Repairing and painting relieving angles and lintels.
11. Repairing damaged and deteriorated wall parging.

C. Mortar for rebuilding and repointing is specified in Section 04 05 13.

D. Grouting of masonry for rebuilding is specified in Section 04 05 16.

E. Concrete masonry units for rebuilding are specified in Section 04 20 00.

F. Flashing is specified in Section 07 60 00.

G. Sealants are specified in Section 07 92 00.

H. Cleaning of existing masonry surfaces is specified in Section 04 01 23.

1.3 QUALITY ASSURANCE

A. Masonry Specialist: Work shall be performed by a firm with minimum 5-years successful experience in comparable masonry reconstruction projects and employing skilled personnel in restoration processes and operations indicated.

B. Field Supervision: Retain an experienced full-time supervisor on the project site at all times when masonry restoration is in progress. A single individual shall be responsible for supervising the masonry restoration work throughout the duration of the project.

C. Adhesive Grout Anchors into Existing Masonry: Manufacturer's Representative shall visit site to instruct workers as to proper installation techniques for placing and testing anchors. Manufacturer's Representative shall prepare a written report and submit to Contractor, Design Engineer, and COR.

D. Testing Agency Qualifications: Independent Testing Agency shall demonstrate to COR's satisfaction that it has experience and capability to satisfactorily perform testing indicated without delaying progress of work.

E. Field-Constructed Mock-Ups: Prior to beginning masonry restoration, prepare a test samples on existing building to further verify selections made under sample submittals and to demonstrate aesthetic effects and qualities of materials and execution. Sample areas to be selected by COR and will be close to grade to allow observations. Do not proceed further with the work of this section until the test sample has been approved by the COR. Approved test samples will be used as quality standards for the remaining work. Use the materials indicated for work:
   1. Removals: One 1m by 1m (3-foot by 3-foot) sample area for demonstrating removal techniques using specified tools. Samples shall constitute a standard for acceptance or rejection of completed work.
   2. Rebuilding: One 1m by 1 m (3-foot by 3-foot) sample area for demonstrating rebuilding.
   3. Repointing: Two separate 1m by 1 m (3-foot by 3-foot) sample areas, one for demonstrating raking out of joints and one for repointing.
   4. Lintels and Relieving Angles: Clean one lintel in its entirety or 2 m (6 feet) length of relieving angle. Coat two-thirds of the cleaned length with anti-corrosive primer. Include flashing and drip edge installation over half of painted length.
   5. Progress Cleaning: Test clean one-half of repointing sample.
   6. Wall Parging: Two sample areas, .6m x .6m (2 feet by 2 feet), for demonstrating removal techniques and proper surface preparation procedures. Patch one of the removal sample areas for demonstrating proper mixing of materials, material installation, finishing, and curing.

F. Source of Materials: Obtain materials for masonry restoration from single source for each type of material required (face brick, stone, cement, sand, etc.) to ensure match of quality, color, pattern, and texture.

1.4 SUBMITTALS

A. Qualifications:
   1. Submit descriptions of projects completed within last ten years of similar scope and cost. Include project location and contact information.
   2. Submit project experience for field supervisor responsible for work to be performed under this section.

B. Product Data: Submit manufacturer's technical data for each product indicated, including recommendations for its application and

installation instructions. Include test reports and certifications substantiating product complies with requirements.

C. Material Test Data: Prior to construction, submit test data for materials indicated to verify compliance with these specifications.

D. Restoration Program: Submit written program for each phase of restoration process, including protection of surrounding materials on building and site during operations. Describe in detail materials, methods, and equipment to be used for each phase of restoration and reconstruction work.

E. Samples: Submit for verification prior to construction:
1. Face brick: Eight units of brick for color verification.
2. Anchors and ties: One of each type.
3. Replacement limestone
4. Stone patching material
5. Brick patching material

1.5 DELIVERY, STORAGE AND HANDLING

A. Carefully pack, handle, and ship masonry units and accessories strapped together in suitable packs or pallets or heavy cartons. Carefully unload and handle to prevent chipping and breakage.

B. Deliver other materials to site in manufacturer’s original, unopened containers and packaging, bearing labels as to types and names of products and manufacturers.

C. Protect masonry materials during storage and construction from wetting by rain, snow, or ground water and from staining or intermixture with earth or other types of materials.

D. Protect grout, mortar, and other materials from deterioration by moisture and temperature. Store in dry location or in waterproof containers. Keep containers tightly closed and away from open flames. Protect liquid components from freezing. Comply with manufacturer’s recommendations for minimum and maximum temperature requirements for storage.

1.6 PROJECT CONDITIONS

A. Only clean masonry surfaces when air temperature is 40 degrees F (4 degrees C) or above and will remain so until masonry has dried out. Temperature must remain above 40 degrees F (4 degrees C) for minimum seven days after completing cleaning.

B. Unless temporary protection is provided, do not repoint mortar joints, rebuild masonry, or repair masonry unless air temperature is between 40 degrees F (4 degrees C) and 90 degrees F (32 degrees C) and will remain so for at least 48 hours after completion of work.

C. Prevent grout and mortar used in repointing and repair work from staining face of surrounding masonry or other surfaces. Immediately remove grout and mortar in contact with exposed masonry or other surfaces.

D. Protect sills, ledges, and projections from mortar droppings.

PART 2 - PRODUCTS

2.1 MASONRY MATERIALS

A. Face Brick: Provide units with color, texture, and size to match existing as approved by Interior Design and COR. Basis of design is: Glen-Gery – Beige with Speck (S42) Brick, Extruded, smooth Finish, Standard Size. Belden Brick – dark Range Shale and fireclay Ironspot (PCT4) 470-479 Brick, Extruded, Smooth Texture, Standard Size. The exact existing face brick manufacturer and type is unknown. The contractor is to best match the existing brick color and style. Contractor shall supply a sample to the VA prior to any installation. Refer to spec sections 04 20 00 "Unit Masonry" & 01 33 23 "Shop Drawings, Product Data and Samples" for specific requirements. Units shall comply with ASTM C 216, Grade SW. Test brick in comparison to the original existing brick using ASTM C67. Do not reuse existing brick unless noted otherwise.
1. Ceramic glazed facing: ASTM C126; Grade S, Type I (single faced units) where only one face is exposed; Grade S, Type II (two faced units) where two opposite finished faces are exposed.

B. Stone Units: Reuse existing stone when possible. Replace damaged units indicated in drawings. Contractor shall replace units damaged during restoration process.
1. Provide replacement stone units to match in type, color, shape, size, texture, and finish-profile the appearance of the existing stone.
2. Test replacement stone units in comparison with existing stone using ASTM C170.

2.3 CLEANING MATERIALS AND EQUIPMENT

A. Water for Cleaning: Clean, potable, free of oils, acids, alkalis, salts, and organic matter.

B. Brushes: Stiff mylar or fiber bristle only.

C. Acidic, Alkali, and Detergent Cleaning Agents: Do not use unless proposed, tested, and accepted by the COR as part of the Preconstruction Testing Phase prior to beginning work.

2.4 BRICK AND STONE PATCHING MATERIALS

A. Brick Patching Material: “Custom System 45, Grade TC”, by Edison Coatings, Inc.; “Jahn M100” by Cathedral Stone Products Inc.; or accepted equivalent. Custom match color of existing masonry.

B. Limestone/Calcareous Cast Stone Patching Material: “Custom System 45, Grade LC”, by Edison Coatings, Inc.; “Jahn M70”, by Cathedral Stone Products Inc.; “Last Patch Limestone” by Bonstone Manufacturing Corp. or accepted equivalent. Custom match color of existing masonry.

2.5 WALL PARGING REPAIR MATERIALS

A. Bonding Grout: Mathys Pegacrete by Advanced Coating Technology, or accepted equivalent.

B. Trowel Applied Patching Material: Mathys Pegacrete by Advanced Coating Technology, or accepted equivalent.

C. Aggregate: Mortar sand or pea gravel 6.35 to 9.25 mm (1/4 to 3/8 inch).

2.6 MISCELLANEOUS MATERIALS

A. Restoration Anchors:
1. Stainless steel threaded rod, 9.25 mm (3/8-inch) diameter for attachment to masonry. Attach with chemical adhesive.

B. Veneer Anchor: Stainless steel threaded rod, 9.25 mm (3/8-inch) diameter for attachment to hollow masonry. Attach with chemical adhesive.

C. Veneer Tie: "No. 103-C Dovetail Triangular Veneer Tie," with 12 gage x 25.4 mm (1-inch) stainless steel clip and 4.76mm (3/16-inch) diameter, stainless steel triangular tie by Heckmann Building Products, Inc.; or accepted equivalent. Field verify length.

E. Joint Reinforcing for Crack Repair:
1. Stainless steel threaded rod, 3.175mm (1/8-inch) diameter.

F. Head Joint Weeps: "Cell Vent Weep-Hole Ventilator" by Dur-O-Wal or accepted equivalent.

G. Drainage Plane Flashing: "Flash-Vent" flashing drainage plane, 5 oz./sq. ft., stainless steel by York Manufacturing, Inc.; or accepted equivalent.

H. Self-adhered Membrane Waterproofing: Self-adhered 40-mil laminated, composition membrane "Perm-A-Barrier" by W.R. Grace or accepted equivalent. Provide compatible primer and mastic/edge sealant.

I. Metal Drip Edge: "DA 1525 Drip Edge Flashing" 26 gauge, stainless steel by Dur-O-Wal or accepted equivalent. Provide compatible mastic/edge sealant.

J. Drainage Board: "Hydroduct 220" by W.R. Grace or accepted equivalent.

K. Weather Cap: Weathercap by Weathercap or accepted equivalent.

L. Compressible Filler: Closed-cell polyethelene type.

M. Anti-Corrosive Primer (for use on tightly bonded rust): "Rust Destroyer" by Advanced Protective Products, Inc.; "M82 Rust Converter Coating" by Benjamin Moore & Co.; "Sur-Prep V Rust Converter" by Coronado; or accepted equivalent.

N. Lintel Paint and Relieving Angle Paint: "Tnemec" or accepted equivalent.
   1. Intermediate Coat: "Epoxy Coating Series 27" by Tnemec; or accepted equivalent.
   2. Finish Coat: "Epoxy Coating Series 27" by Tnemec; or accepted equivalent. Color as selected by COR.

O. Flashing under Stone Coping: See Section 07 60 00.

P. Sealant: See Section 07 92 00.

Q. Chemical Adhesive:
   1. For anchoring to solid concrete, grouted CMU, solid brick, or stone: "HIT-HY 70" by Hilti, Inc. or approved equal.
   2. For anchoring to terra cotta, hollow brick or hollow CMU: "HIT-HY 70" by Hilti, Inc. or approved equal. Provide manufacturer's standard screen tubes for use with anchors.

S. Stone to Stone Adhesive: "Flexi-Weld 520T" by Edison Coatings, Inc.; "Jahn Restoration Adhesive" by Cathedral Stone Products Inc.; or accepted equivalent.

T. Stone Repair Pin: 3.75 mm (1/8 inch) diameter round stock, stainless steel rod, Type 302 or 304.

PART 3 - EXECUTION

3.1 BRICK AND COPING STONE REMOVAL AND REBUILDING

A. Removals:
   1. Carefully remove bricks and coping stone units in sections as indicated in drawings. Cut out full brick and stone units from joint to joint in manner to permit replacement with full-sized units.
   2. Support and protect masonry indicated to remain that surrounds removal area.
   3. Clean remaining edges of removal areas by removing mortar, dust, and loose debris in preparation for rebuilding.
   4. Save sufficient removed brick to replace damaged brick where indicated in drawings. Clean bricks that are to be reused. Remove mortar from cores.
   5. Clean removed coping stones and save for reuse where indicated in the drawings. Replace units damaged by removals.

B. Brick Rebuilding:
   1. Repoint exposed backup masonry prior to rebuilding brick veneer. Replace loose and deteriorated masonry units as required to provide solid back-up surface.
   2. Install flashings, veneer anchors, veneer ties, and weeps as work progresses.
   3. Install new brick to replace removed brick. Fit replacement units into bonding and coursing pattern of existing brick. If cutting is required, use motor-driven saw designed to cut masonry with clean, sharp, unchipped edges.
   4. Lay replacement brick with completely filled bed and head joints. Completely fill collar joints where indicated in drawings. Butter ends with sufficient mortar to fill head

joints and shove into place. Wet clay brick that have ASTM C 67 initial rates of absorption (suction) of more than 30 grams per square inch per minute. Use wetting methods that ensure units are nearly saturated but surface dry when laid. Maintain joint width for replacement units to match existing.

5. Tool exposed mortar joints in repaired areas to match joints of surrounding existing masonry.
6. Repoint new mortar joints in repaired area to comply with requirements for repointing existing masonry, except rake out joints before mortar sets.
7. Cleanup as work proceeds. Avoid spillage onto existing building.

C. Coping Stone Rebuilding:
1. Repoint exposed backup masonry prior to rebuilding. Replace loose and deteriorated masonry units as required to provide solid back-up surface.
2. Attach Type 1 or Type 2 restoration anchors to existing structural steel framing and existing masonry backup.
3. Install flashing and weeps.
4. Saw cut edge of stone, precast concrete, and terra cotta trim units for new anchors. Install Type 4 restoration anchors and reinstall units. Lay units with completely filled bed and head joints. Use non-corrosive setting buttons. Rake joints to receive sealant in locations indicated in drawings.
5. Tool exposed mortar joints in repaired areas to match joints of surrounding existing masonry.
6. Coordinate stone, precast concrete, and terra cotta trim rebuilding with brick reconstruction.
7. Clean up as work proceeds. Avoid spillage onto existing building.

3.2 BRICK, STONE, AND CAST STONE REANCHORING

A. Existing Brick:
1. Drill existing masonry and install restoration anchors following manufacturer’s installation instructions.
2. Point over hole at brick veneer anchors.

3.3 BRICK AND STONE PATCHING

A. Remove loose, weakened, or damaged masonry in areas indicated. Sound the masonry with a hammer to verify its integrity. Loose mortar, laitance, spalling, cracked, and debonded masonry shall be removed with hand tools unless otherwise indicated.

B. Prepare surfaces as recommended by the patch material manufacturer. Clean surfaces of dust, debris, sealant residue, and other contaminants.

C. Follow manufacturer’s instructions for placement of patch material.

D. Match the patching material finish, color, texture, and surface detail with exposed surfaces of existing masonry. The finishing and texturing shall conceal bond lines between the repaired area and adjacent surfaces. The texturing shall provide replication of all surface details, including tooling and machine marks.

E. Provide at least one stone repair pin per 101mm (4 inch) square of repair surface area to ensure that the patch is tied to the existing masonry. Drill holes for anchors with a diameter of 3.175mm (1/8 inch) large than the anchor diameter. Drill holes with a minimum depth of 101.6 mm (4 inches), unless noted otherwise. Set anchors back from face of masonry a minimum of 25.4mm (1 inch).

3.4 DUTCHMAN REPAIRS

A. Provide a Dutchman for all stone repairs exceeding 76mm (3 inches) in depth.

B. Remove defective area of stone by making squared vertical and horizontal saw cuts. Make back of removal area flat and parallel to stone face.

C. Cut and trim Dutchman unit to accurately fit area where material was removed from original stone. Fabricate to size required to produce joints with tolerances of no more than 1.58mm (1/16 inch) in width. Cut Dutchman to match the orientation of the natural bedding planes of the original stone.

D. Provide stone repair pins as necessary for the extent of the repair. Center and space rods back from face of masonry a minimum of 25.4mm (1 inch).

E. Apply stone to stone adhesive to comply with the adhesive manufacturer’s written instructions. Coat all bonding surfaces, completely filling all joints and voids. Protect surrounding stone from adhesive droppings.

3.5 RELIEVING ANGLE AND LINTEL REPAIRS

A. Remove loose rust and coat steel in contact with masonry that is exposed by masonry removals.

B. Install flashing and drip edge. Adhesive attach flashing to drip edge.

C. Install weeps and rebuild masonry.

D. Clean and finish paint steel that is to be left exposed. Paint full lintel.

3.6 REPOINTING EXISTING MASONRY

A. Joint Raking:
   1. Cut out old mortar by hand with chisel and mallet unless otherwise indicated.
   2. Use of noise & vibration emitting power tools may be used during the hours of 7:30 - 5:00 PM. Monday - Friday. Within noise & vibration limits specified by the VA. Permission must be requested at least 72 hours in advance & approval authorized before use of any such equipment. VA COR or safety officer can stop the use of such equipment at any time if the noise & vibration impacts any hospital function. If this

occurs, work must be performed off hours or by use of hand tools. Remove mortar by chisel.

3. Rake out mortar from joints to depths equal to 2 1/2 times their widths but not less than 25.4mm (1 inch).
4. Remove mortar from masonry surfaces within raked-out joints to provide reveals with square backs and to expose masonry for contact with pointing mortar. Brush, vacuum, or flush joints to remove dirt and loose debris.
5. Do not spall edges of masonry units or widen joints. Replace damaged masonry units.
6. When cutting-out is completed in each area, brush joints clean of debris and vacuum clean.

B. Joint Pointing:

1. Rinse masonry joint surfaces with water to remove dust-mortar particles. Time application of rinsing so that at time of pointing, excess water has evaporated or runoff and joint surfaces are damp but free of standing water.
2. Apply first layer of pointing mortar to areas where existing mortar was removed to depths greater than surrounding areas. Apply in layers not greater than 9.5mm (3/8 inch) until a uniform depth is formed. Compact each layer thoroughly. Allow to become thumbprint-hard before applying next layer.
3. Install joint reinforcing of type and in locations indicated in drawings.
4. After joints have been filled to uniform depth, place remaining pointing mortar in three layers with first and second layers each filling approximately two-fifths of joint depth and third layer the remaining one-fifth. Fully compact each layer and allow to become thumbprint-hard before applying next layer. Where existing bricks have rounded edges, recess final layer slightly from face. Do not spread mortar over edges onto exposed masonry surfaces or featheredge mortar.
5. When mortar is thumbprint-hard, tool joint to match original appearance of joints unless otherwise indicated. Remove excess mortar from joint edge by brushing.
6. Cure mortar by maintaining in a damp condition for minimum 72 hours.
7. Where repointing work precedes cleaning of existing masonry, allow mortar to harden minimum 30 days before beginning cleaning work.

3.7 CONTROL JOINTS

A. Saw cut control joints full depth of exterior wythe only in locations indicated in drawings.

B. Brush, vacuum, or flush joints to remove dirt and loose debris.

C. Install backer rod and sealant.

3.8 PROGRESS CLEANING OF MASONRY

A. Each day, clean work surfaces to remove excess mortar and foreign matter on exposed masonry surfaces.

B. After mortar has fully hardened, thoroughly clean exposed masonry surfaces of excess mortar and foreign matter using stiff nylon or bristle brushes and clean water sprayed at low pressure.

C. Do not use metal scrapers or brushes.

D. Use of acid or alkali cleaning agents shall not be permitted unless proposed, tested, and accepted in Preconstruction Testing Phase prior to beginning cleaning.

F. See Section 04 01 23 for Existing Masonry Cleaning.

3.9 WALL PARGING REPAIR

A. Removals:
1. Locate delaminations in wall parging by sounding entire surface with a hammer. Mark limited of delaminated area with point, chalk, or crayon. Designate area to be removed with straight lines in rectangular patterns for neat patch.
2. Saw cut perimeter of repair area to required depth without overrunning cuts at corners. Make shallow cuts inside area to be removed. This second cutting shall facilitate removal of parging.
3. Remove unsound parging within marked areas. Do not damage sound surface.
4. After required parging has been removed, clean surface to be patched using 200-300 psi pressure washing with a 45 degree fan shaped tip to remove loose materials.
5. Notify COR when removals have been completed so they may be observed. Unsatisfactory cavity preparation shall be corrected as required by COR.

B. Wall Parging Repair:
1. Apply bonding grout to surfaces to receive patching material. Apply grout according to manufacturer’s written instructions.
2. Place trowel-applied patching material in cavity, making sure that materials are well consolidated. Place in lifts as recommended by manufacturer. Apply finish to match existing surface.
3. Protect and cure surface in accordance with manufacturer’s recommendations.
4. Test patched areas after three days for soundness and delamination by sounding with a hammer. Repair hollow sounding areas by replacing patch in affected area at no additional cost to government.
5. Apply surface coating.

- - - E N D - - -

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel shapes, plates, and bars.
2. Structural pipe.
3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

A. Materials Testing And Inspection During Construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Fireproofing: Section 07 81 00, APPLIED FIREPROOFING.

C. Steel Framing: Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS

D. Steel Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.

E. Painting: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Institute of Steel Construction (AISC):

1. AISC Manual - Steel Construction Manual, 14th Ed.
2. 303-10 - Code of Structural Steel Buildings and Bridges.
3. 360-10: Specification for Structural Steel Buildings.

C. The American Society of Mechanical Engineers (ASME):

1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.

D. American Welding Society (AWS):

1. D1.1/D1.1M-15 - Structural Welding Code - Steel.

E. ASTM International (ASTM):

1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
2. A36/A36M-14 - Carbon Structural Steel.
3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
5. A242/A242M-13 - High-Strength Low-Alloy Structural Steel.
6. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel

Plates.

7. A307-14 - Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
8. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
9. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
10. A572/A572M-15 - High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
11. A992/A992M-15 - Structural Shapes.
12. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
13. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

F. Master Painters Institute (MPI):

1. No. 18 - Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):

1. MIL-P-21035 - Paint, High Zinc Dust Content, Galvanizing, Repair.

H. Occupational Safety and Health Administration (OSHA):

1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.

I. Research Council on Structural Connections (RCSC) of The Engineering Foundation:

1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Test Reports: Certify products comply with specifications.

1. Welders' qualifying tests.

D. Certificates: Certify each product complies with specifications.

1. Structural steel.
2. Steel connections.
3. Welding materials.

4. Shop coat primer paint.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Fabricator with project experience list .

2. Installer with project experience list .

3. Welders and welding procedures.

F. Delegated Design Drawings and Calculations: Signed and sealed by the responsible Engineer in Charge who is a licensed Professional Engineer in the State of New York. .

1. Connection calculations.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: AISC Quality Certification participant designated as AISC Certified Plant, Category STD.

1. Regularly fabricates specified products.

2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.

B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC-Certified Erector, Category ACSE.

1. Regularly installs specified products.

2. Installed specified products with satisfactory service on five similar installations for minimum five years.

C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.

D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where project is located.

B. Design structural steel framing connections complying with specified performance:

1. Load Capacity: Resist loads indicated on drawings and described in this specification section. Account for connection and member loads and eccentricities.

a. Where reactions are not shown, request additional design criteria including reactions from the Engineer of Record to complete connection design.

2. Configuration: Design and detail all connections for each member

size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with details shown on drawings, supplementing where necessary. The details shown on drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the Contracting Officer Representative of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the Contracting Officer's Representative. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

2.2 MATERIALS

A. W-Shapes:

1. ASTM A992/A992M.

B. Channel and Angles:

1. ASTM A36/A36M.

C. Plates and Bars:

1. ASTM A36/A36M.

D. Hollow Structural Sections:

1. ASTM A500/A500M.

E. Structural Pipe: ASTM A53/A53M, Grade B.

F. Bolts, Nuts and Washers: Galvanized for galvanized framing and plain finish for other framing .

1. High-strength bolts, including nuts and washers: ASTM F3125.

2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.

3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.

G. Welding Materials: AWS D1.1, type to suit application.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.

2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:

a. Paints and coatings.

2.4 FABRICATION

A. Fabricate structural steel according to Chapter M, AISC 360.

B. Shop and Field Connections:

Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.

1. High-Strength Bolts: High-strength bolts tightened to a snug tight condition. an acceptable alternate fastener for slip critical connections.

2.5 ACCESSORIES

A. General: Shop paint steel according to AISC 303, Section 6.

B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.

C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

A. Erect structural steel according to AISC 303 and AISC 360.

B. Set structural steel accurately at locations and elevations indicated on drawings.

C. Maintain erection tolerances of structural steel within AISC 303 requirements.

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

A. After welding, clean and prime weld areas to match adjacent finish.

B. Touch-up primer damaged by construction operations.

C. Apply galvanizing repair paint to galvanized coatings damaged by construction operations.

D. Finish Painting: As specified in Section 09 91 00, PAINTING.

3.3 FIELD QUALITY CONTROL

A. Record Survey:

1. Engage registered civil engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS to perform survey.

2. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.

3. Identify deviations from allowable tolerances specified in AISC Manual.

- - E N D - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 05 50 00
METAL FABRICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.

B. Items specified.

1. Support for Wall and Ceiling Mounted Items: (SD055000-01, SD055000-02, SD102113-01, SD102600-01, SD123100-01 & SD123100-02)
2. Frames
3. Loose Lintels
4. Safety Nosings
5. Ladders
6. Railings:

1.2 RELATED WORK

A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.

B. Colors, finishes, and textures: Section 09 06 00, SCHEDULE FOR FINISHES.

C. Prime and finish painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

Steel frames	Loose Lintels
Ladders	Railings
Steel Bollards- See Civil	
Manhole Covers- See Civil	Safety nosing

C. Shop Drawings:

1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various

components and assemblies, finish, and location, size and type of anchors.

2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
3. Provide templates and rough-in measurements as required.

D. Manufacturer's Certificates:
1. Anodized finish as specified.
2. Live load designs as specified.

E. Design Calculations for specified live loads including dead loads.
1. Manufacturer shall provide calculations and drawings with Engineer’s Stamp documenting the supplied products comply with loading requirements as indicated or per Code requirements.

F. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.4 QUALITY ASSURANCE

A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.

B. Each product type shall be the same and be made by the same manufacturer.

C. Assembled product to the greatest extent possible before delivery to the site.

D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):
B18.6.1-97.....Wood Screws
B18.2.2-87(R2010).....Square and Hex Nuts

C. American Society for Testing and Materials (ASTM):
A36/A36M-14.....Structural Steel
A47-99(R2014).....Malleable Iron Castings
A48-03(R2012).....Gray Iron Castings

A53-12.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless

A123-15.....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A240/A240M-15.....Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.

A307-14.....Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength

A391/A391M-07(R2015)....Grade 80 Alloy Steel Chain

A786/A786M-15.....Rolled Steel Floor Plate

C1107-13.....Packaged Dry, Hydraulic-Cement Grout (Nonshrink)

F436-16.....Hardened Steel Washers

F468-06(R2015).....Nonferrous Bolts, Hex Cap Screws, Socket Head Cap Screws and Studs for General Use

F593-13.....Stainless Steel Bolts, Hex Cap Screws, and Studs

F1667-15.....Driven Fasteners: Nails, Spikes and Staples

D. American Welding Society (AWS):

D1.1-15.....Structural Welding Code Steel

D1.2-14.....Structural Welding Code Aluminum

D1.3-18.....Structural Welding Code Sheet Steel

E. National Association of Architectural Metal Manufacturers (NAAMM)

AMP 521-01(R2012).....Pipe Railing Manual

AMP 500-06.....Metal Finishes Manual

MBG 531-09(R2017).....Metal Bar Grating Manual

MBG 532-09.....Heavy Duty Metal Bar Grating Manual

F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:

SP 1-15.....No. 1, Solvent Cleaning

SP 2-04.....No. 2, Hand Tool Cleaning

SP 3-04.....No. 3, Power Tool Cleaning

G. Federal Specifications (Fed. Spec):

RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

A. Manufacturer shall provide calculations and drawings with Engineer's Stamp documenting the supplied products comply with loading requirements as indicated or per Code requirements.

B. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.

C. Ladders and Rungs: 120 kg (250 pounds) at any point.

D. Railings and Handrails: 900 N (200 pounds) in any direction at any point.

2.2 MATERIALS

A. Structural Steel: ASTM A36.

B. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.

C. Steel Pipe (Bollard): ASTM A53.

1. Galvanized for exterior locations.
2. Type S, Grade A unless specified otherwise.
3. NPS (inside diameter) as shown.

D. Cast-Iron: ASTM A48, Class 30, commercial pattern.

E. Malleable Iron Castings: A47.

F. Primer Paint: As specified in Section 09 91 00, PAINTING.

G. Stainless Steel Tubing: ASTM A269, type 302 or 304.

H. Modular Channel Units:

1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
2. Form channel within turned pyramid shaped clamping ridges on each side.
3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.

5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.

I. Grout: ASTM C1107, pourable type.

2.3 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:
   a. ASME B18.2.2.
   b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
   c. ASTM F468 for nonferrous bolts.
   d. ASTM F593 for stainless steel.
2. Screws: ASME B18.6.1.
3. Washers: ASTM F436, type to suit material and anchorage.
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.

2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self-drilling and tapping screws or bolts.

E. Workmanship

1. General:
   a. Fabricate items to design shown.
   b. Furnish members in longest lengths commercially available within the limits shown and specified.

c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
f. Prepare members for the installation and fitting of hardware.
g. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:
   a. Weld in accordance with AWS.
   b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
   c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
   d. Finish welded joints to match finish of adjacent surface.
3. Joining:
   a. Miter or butt members at corners.
   b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
4. Anchors:
   a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
   b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
5. Cutting and Fitting:
   a. Accurately cut, machine and fit joints, corners, copes, and miters.
   b. Fit removable members to be easily removed.
   c. Design and construct field connections in the most practical place for appearance and ease of installation.

d. Fit pieces together as required.
e. Fabricate connections for ease of assembly and disassembly without use of special tools.
f. Joints firm when assembled.
g. Conceal joining, fitting and welding on exposed work as far as practical.
h. Do not show rivets and screws prominently on the exposed face.
i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:
1. Finish exposed surfaces in accordance with NAAMM AMP 500 Metal Finishes Manual.
2. Aluminum: NAAMM AMP 501.
   a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.
   b. Clear anodic coating, AA-C22A41, chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.
   d. Painted: AA-C22R10.
3. Steel and Iron: NAAMM AMP 504.
   a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
   b. Surfaces exposed in the finished work:
      1) Finish smooth rough surfaces and remove projections.
      2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
   c. Shop Prime Painting:
      1) Surfaces of Ferrous metal:
         a) Items not specified to have other coatings.
         b) Galvanized surfaces specified to have prime paint.
         c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
         d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
         e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.

2) Nonferrous metals: Comply with MAAMM-500 series.

4. Stainless Steel: NAAMM AMP-504 Finish No. 4.

G. Protection:

1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.
2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.5 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes as shown.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flatted for anchorage to stud.
5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

C. FOR TRAPEZE BARS:

1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
2. Fabricate trapeze supports as shown, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
3. Fabricate concealed components of structural steel shapes unless shown otherwise.
4. Stainless steel ceiling plate drilled for eye bolt.

5. Continuously weld connections where welds shown.
6. Use modular channel where shown with manufacturers bolts and fittings.
   a. Weld ends of steel angle braces to steel plates and secure to modular channel units as shown. Drill plates for anchor bolts.
   b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.

D. For Intravenous Track and Cubical Curtain Track:
1. Fabricate assembly of steel angle as shown.
2. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.
3. Provide pipe sleeve welded to angle.

E. Supports at Ceiling for Imaging Equipment:
1. Fabricate hangers braces, and track of modular channel units assembly as shown.
2. Fabricate steel plates for anchor to structure above.
3. Drill bent plates for bolting at mid height at concrete beams.

F. Supports for Items at Various Conditions at Suspended Ceilings:
1. Fabricate of structural steel shapes as shown.
2. Drill for anchor bolts of suspended item.

2.6 FRAMES

A. Door Frames:
1. Fabricate of structural steel sections of size shown.
2. Miter and weld frames at corners.
3. Where anchored to masonry or embedded in concrete, weld to back of frame at each jamb, 5 mm (3/16 inch) thick by 44 mm (1-3/4 inch) wide steel strap anchors with ends turned 50 mm (2 inches), and of sufficient length to extend at least 300 mm (12 inches) into wall. Space anchors 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb. Weld clip angles to bottom of jambs and provide holes for expansion bolts.
4. Where anchored to concrete or masonry in prepared openings, drill holes at jambs for anchoring with expansion bolts. Weld clip angles to bottom of frame and provide holes for expansion bolt anchors as shown. Drill holes starting 600 mm (24 inches) above bottom of frame

and 600 mm (24 inches) o.c. to top of jamb and at top of jamb. Provide pipe spacers at holes welded to channel.

5. Where closure plates are shown, continuously weld them to the channel flanges.
6. Weld continuous 19 x 19 x 3 mm (3/4 x 3/4 x 1/8 inch) thick steel angles to the interior side of each channel leg at the head and jambs to form a caulking groove.
7. Prepare frame for installation of hardware specified in Section 08 71 00, DOOR HARDWARE.
   a. Cut a slot in the lock jamb to receive the lock bolt.
   b. Where shown use continuous solid steel bar stops at perimeter of frame, weld or secure with countersunk machine screws at not more than 450 mm (18 inches) on center.

B. Frames for Lead Lined Doors:
1. Obtain accurate dimensions and templates from suppliers of lead lined doors, finish hardware, and hollow steel door frames.
2. Fabricate as shown for use in connection with lead lined doors.
3. Deliver assembled frames with removable shipping spreaders at top and bottom.
4. Extend angles at jambs from floor to structural slab above. At floors of interstitial spaces, terminate jamb sections and provide anchors as shown.
5. Continuously weld plates and reinforcements to frame members and head members of angle frames between jambs.
6. Weld strap anchors, not over 600 mm (24 inches) on centers, to the back of angles for embedment in masonry or concrete unless shown otherwise.7. Type 15 Door Frames:
   a. Structural steel angle frames with plate or bar full height to heads. Extend reinforcing at hinge cutouts two inches beyond cutout.
   b. Fabricate top anchorage to beam side at mid height.
   c. Weld clip angles to both legs of angle at top and bottom.
   d. Drill clips and plates, at top and bottom for anchoring jamb angles with two 9 mm (3/8 inch) expansion bolts at each location.
   e. Cut rabbet for pivot hinges and lock strike.

2.7 LOOSE LINTELS

A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.

B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.

C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.

1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).

D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).

E. Provide bearing plates for lintels where shown.

F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.

G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.

H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.

2.8 SHELF ANGLES

A. Fabricate from steel angles of size shown.

B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.

C. Provide adjustable malleable iron inserts for embedded in concrete framing.

2.9 SAFETY NOSINGS

A. Fed. Spec. RR-T-650, Type C.

1. Aluminum: Class 2, Style 2.
2. Cast iron: Class 4.

B. Fabricate nosings for exterior use from cast aluminum, and nosings for interior use from either cast aluminum or cast iron. Use one Class throughout.

C. Fabricate nosings approximately 100 mm (4 inches) wide with not more than 9 mm (3/8 inch) nose.

D. Provide nosings with integral type anchors spaced not more than 100 mm (4 inches) from each end and intermediate anchors spaced approximately 375 mm (15 inches) on center.

E. Fabricate nosings to extend within 100 mm (4 inches) of ends of concrete stair treads except where shown to extend full width.

F. Fabricate nosings to extend full width between stringers of metal stairs and full width of door openings.

G. On curved steps fabricate to terminate at point of curvature of steps having short radius curved ends.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.

B. Items set into concrete or masonry.

1. Provide temporary bracing for such items until concrete or masonry is set.
2. Place in accordance with setting drawings and instructions.
3. Build strap anchors, into masonry as work progresses.

C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.

D. Field weld in accordance with AWS.

1. Design and finish as specified for shop welding.
2. Use continuous weld unless specified otherwise.

E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.

F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.

G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.

H. Secure escutcheon plate with set screw.

3.2 INSTALLATION OF SUPPORTS

A. Anchorage to structure.

1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
2. Secure supports to concrete inserts by bolting or continuous welding as shown.
3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
4. Secure steel plate or hat channels to studs as detailed.

C. Supports for Wall Mounted items:

1. Locate center of support at anchorage point of supported item.
2. Locate support at top and bottom of wall hung cabinets.
3. Locate support at top of floor cabinets and shelving installed against walls.
4. Locate supports where required for items shown.

D. Support at Ceiling for Diagnostic Equipment:

1. Bolt modular steel channel frames to hangers as shown, anchored to structure above.
2. Fasten frames with modular channel manufacturers fittings, bolts, and nuts. Space modular channel supports and hangers as shown and as required to suit equipment furnished.
3. Install closure plates in channels at ceiling where channel opening is visible. Coordinate and cut plates to fit tight against equipment anchors after equipment anchors are installed.

F. Supports for intravenous (IV) Track and Cubicle Curtain Track:

1. Install assembly where shown after ceiling suspension grid is installed.
2. Drill angle for bolt and weld nut to angle prior to installation of tile.

G. Support for cantilever grab bars:
   1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
   2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
   3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
   4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.

H. Supports for Trapeze Bars:
   1. Secure plates to overhead construction with fasteners as shown.
   2. Secure angle brace assembly to overhead construction with fasteners as shown and bolt plate to braces.
   3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
      a. Install closure plates in channel between eye bolts.
      b. Install eyebolts in channel.

3.3 FRAMES FOR LEAD LINED DOORS

A. Secure jamb angle clips and plates, at top and bottom with two, 9 mm (3/8 inch) expansion bolts to concrete.

B. Secure 150 x 90 x 13 mm (6 x 3-1/2 x 1/2 inch) angle to steel framing for anchorage when expansion bolts to concrete is not possible.

C. Secure clips by welding to steel.

D. At interstitial spaces, anchor jamb angles as shown.

3.4 DOOR FRAMES

A. Secure clip angles at bottom of frames to concrete slab with expansion bolts as shown.

B. Level and plumb frame; brace in position required.

C. At masonry, set frames in walls so anchors are built-in as the work progresses unless shown otherwise.

D. Set frames in formwork for frames cast into concrete.

E. Where frames are set in prepared openings, bolt to wall with spacers and expansion bolts.

3.5 OTHER FRAMES

A. Set frame flush with surface unless shown otherwise.

B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.

C. Set in formwork before concrete is placed.

3.6 STEEL LINTELS

A. Use lintel sizes and combinations shown or specified.

B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.

C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.7 SHELF ANGLES

A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.

B. Provide expansion space at end of members.

3.8 SAFETY NOSINGS

A. Except as specified and where preformed rubber treads are shown or specified install safety nosings at the following:

1. Exterior concrete steps.
2. Door sills of areaway entrances curbs.
3. Exposed edges of curbs of door sills at transformer and service rooms.
4. Interior concrete steps, including concrete filled treads of metal stairs of service stairs.

B. Install flush with horizontal and vertical surfaces.

C. Install nosing to within 100 mm (4 inches) of ends of concrete stair treads, except where shown to extend full width.

D. Extend nosings full width of door openings.

E. Extend nosings, full width between stringers of metal stairs, and terminate at point of curvature of steps having short radius curved ends.

3.9 STEEL COMPONENTS FOR MILLWORK ITEMS

Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.10 CLEAN AND ADJUSTING

A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.

B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Complete roof removal for new roof system installation.
   2. Partial roof removal for new roof system installation.
   3. Roofing membrane and selective roofing system component removal for new roof membrane installation.
   4. Existing roofing membrane preparation for new roofing membrane system installation.

B. Existing Roofing System: EPDM Carlisle Modified bituminous. System components include:
   1. Roof insulation.
   2. Roofing membrane.
   3. Cover board.
   4. Roof insulation.
   5. Vapor retarder.
   6. Substrate board.

1.2 RELATED WORK

A. New Roofing System: Section 07 52 16.11, COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING, Section 07 01 50.72, REHABILITATION OF BUILT-UP ROOFING.

B. Sheet Metal Counterflashing: Section 07 60 00, FLASHING AND SHEET METAL.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
   1. FX-1 (R2016) Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.

C. American Society for Nondestructive Testing (ASNT):
   1. SNT-TC-1A (2019)- Personnel Qualification and Certification for Nondestructive Testing.

D. ASTM International (ASTM):
   1. C208-12 (2017)e2- Cellulosic Fiber Insulating Board.

2. C578-19 - Rigid, Cellular Polystyrene Thermal Insulation.
3. C728-17a - Perlite Thermal Insulation Board.
4. C1177/C1177M-17 - Glass Mat Gypsum Substrate for Use as Sheathing.
5. C1153-97(2015) - Location of Wet Insulation in Roofing Systems Using Infrared Imaging.
6. C1278/C1278M-17 – Standard Specification Fiber-Reinforced Gypsum Panel.
7. D4263-83(2018) - Indicating Moisture in Concrete by the Plastic Sheet Method.

E. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
1. DOC PS 1-19 - Structural Plywood.
2. DOC PS 2-18 - Performance Standard for Wood-Based Structural-Use Panels.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting minimum 30 days before beginning Work of this section.
1. Required Participants:
a. Contracting Officer's Representative.
b. Engineer.
c. Inspection and Testing Agency.
d. Contractor.
e. Installer.
f. Manufacturer's field representative.
g. Other installers responsible for adjacent and intersecting work, including mechanical and electrical equipment installers.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
a. Removal and installation schedule.
b. Removal and installation sequence.
c. Preparatory work.
d. Protection before, during, and after installation.
e. Removal and installation.
f. Temporary roofing including daily terminations.
g. Transitions and connections to other work.
h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings:

1. Show size, configuration, and installation details of temporary roofing.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Description of temporary roof system and components.
3. List of patching materials.
4. Recover board fastening requirements.
5. Temporary roofing installation instructions and removal instructions. Preparation instructions to receive new roofing.
6. Existing roofing warrantor's instructions.
7. Product samples for roofing materials

D. Photographs: Document existing conditions potentially affected by roofing operations before work begins.

E. Field Inspection Reports:

1. Certify warrantor inspected completed roofing and existing warranty remains in effect.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Same installer as Section 07 52 16.11, COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING, Section 07 01 50.72, REHABILITATION OF BUILT-UP ROOFING.
2. Approved by existing roofing system warrantor when work affects existing roofing system under warranty.

1.7 FIELD CONDITIONS

A. Building Occupancy: Perform work to minimize disruption to normal building operations.

1. Verify occupants are evacuated from affected building areas when working on structurally impaired roof decking above occupied areas.

2. Provide COR notice minimum 72 hours before beginning activities affecting normal building operations.

B. Existing Roofing Available Information:

1. The following are available for Contractor reference:
   a. Test cores analysis.
   b. Construction drawings and project manual.
2. Examine available information before beginning work of this section.
3. A roof moisture survey is not available. An Infrared Roof Moisture Survey must be completed as per Part 3 - Execution.

C. Weather Limitations: Proceed with reroofing preparation only during dry weather conditions as specified for new roofing installation in Section 07 52 16.11, COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING, Section 07 01 50.72,REHABILITATION OF BUILT-UP ROOFING.

1. Remove only as much roofing in one day as can be made watertight in same day.

D. Hazardous materials are not expected in existing roofing system.

1. Known hazardous materials were removed before start of work.
2. Do not disturb suspected hazardous materials. When discovered, notify Contracting Officer's Representative.
3. Hazardous materials discovered during execution of the work will be removed by Government as work of a separate contract.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Existing Warranties: Perform work to maintain existing roofing warranty in effect.

1. Notify, and follow, warrantor before beginning, and upon completion of reroofing.
2. Obtain warrantor's instructions for maintaining existing warranty.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Patching Materials: Match existing roofing system materials.

B. Sheet Metal Counterflashing: Section 07 60 00, FLASHING AND SHEET METAL.

C. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
2. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

D. Temporary Roofing System Materials: Contractor's option with COR approval.

E. Fasteners: Type and size required by roof membrane manufacturer to resist wind uplift.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Infrared Roof Moisture Survey: Ground-based, walk-over type performed according to ASTM C1153.
   1. Record the entire survey on DVD and provide one copy to Contracting Officer's Representative with report.
   2. Include in report thermograms of suspect areas and corresponding daytime photos of same locations.
   3. Conduct inspection by NDT test technician certified to at least Level 2 in Thermal/Infrared test method according to ASNT SNT-TC-1A.
   4. Mark out roof areas determined to be wet to indicate minimum areas to be removed.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing roofing system indicated to remain.
   1. Cover roof membrane with temporary protection materials without impeding drainage.
   2. Limit traffic and material storage to protected areas.
   3. Maintain temporary protection until replacement roofing is completed.

C. Protect existing construction and completed work from damage.

D. Protect landscaping from damage.

E. Maintain access to existing walkways and adjacent occupied facilities.

F. Coordinate use of rooftop fresh air intakes with Contracting Officer's Representative to minimize effect on indoor air quality.

G. Ensure temporary protection materials are available for immediate use in case of unexpected rain.

H. Ensure roof drainage remains functional.
   1. Keep drainage systems clear of debris.
   2. Prevent water from entering building and existing roofing system.

I. Coordinate rooftop utilities remaining active during roofing work with Contacting Officer's Representative.

3.3 RE-ROOFING PREPARATION - GENERAL

A. Notify Contacting Officer's Representative of planned operations, daily.
   1. Identify location and extent of roofing removal.
   2. Request authorization to proceed.

3.4 OVERBURDEN REMOVAL

A. Remove insulation from protected roofing membrane.
   1. Furnish and install new insulation, match existing thickness.

3.5 PARTIAL ROOFING SYSTEM REMOVAL

A. Remove existing roofing completely, exposing structural roof deck at locations and to extent indicated on drawings.
   1. Remove cover board, roof insulation, vapor retarder, and substrate board.
   2. Remove or cut-off roofing system fasteners.

3.6 DECK PREPARATION

A. Inspect structural roof deck after roofing system removal.
B. Concrete Roof Decks:
   1. Visually confirm concrete roof deck is dry.
   2. Perform moisture test according to ASTM D4263 each day for each separate roof area.
      a. Proceed with roofing work only when moisture is not observed.

3.7 TEMPORARY ROOFING

A. Install temporary roofing to maintain building watertight.
B. Remove temporary roofing before installing new roofing.

3.8 EXISTING MEMBRANE PREPARATION FOR NEW ROOFING

A. Remove existing roofing surface projections and irregularities. Produce smooth surface to receive new coating.
   1. Broom clean existing surface.

3.9 BASE FLASHING REMOVAL

A. Expose base flashings to permit removal.
   1. Two-Piece Counterflashings: Remove cap flashing and store for reuse.
   2. Single Piece Counterflashings: Carefully bend counterflashing.
   3. Metal Copings: Remove decorative cap and store for reuse.

B. Remove existing base flashings.
   1. Clean substrates to receive new flashings.
C. Replace counterflashings damaged during removal.
   1. Counterflashings: See Section 07 60 00 FLASHING AND SHEET METAL.
D. Remove existing parapet metal wall panel and inspect parapet framing.
   1. Notify Contracting Officer's Representative of damaged framing.
E. Install metal wall panel.

3.10 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
   1. Fastener Pull Out Tests: ANSI/SPRI FX-1.
B. Existing Roofing System Warrantor Services:
   1. Inspect reroofing preparation and roofing installation to verify compliance with existing warranty conditions.
   2. Submit reports of field inspections, and supplemental instructions issued during inspections.

3.11 DISPOSAL

A. Collect waste materials in containers.
B. Remove waste materials from project site, regularly, to prevent accumulation.
C. Legally dispose of waste materials.

- - E N D - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 070150.72
REHABILITATION OF BUILT-UP ROOFING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, *apply to this Section.*

1.2 SUMMARY

A. This Section includes the following:

1. Application of reinforced fluid-applied roof membrane and flashings over existing built-up asphalt roofing.

B. Related Requirements:

1. Division 07 Section "Preparation for Re-roofing" for preparation of existing roof substrate.

2. Division 07 Section "Flashing and Sheet Metal" for formed metal roof flashings and counterflashings,

3. Division 07 Section "Roof Specialties."

1.3 ROOFING CONFERENCES

A. Roofing Rehabilitation Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 07 Section "Preparation for Re-roofing." Review methods and procedures related to roofing system.

1. Meet with COR; roofing re-coating materials manufacturer's representative; roofing re-coating Installer including project manager and foreman; and installers whose work interfaces with or affects re-coating including installers of roof accessories and roof-mounted equipment requiring removal and replacement as part of the Work.

2. Review methods and procedures related to re-coating preparation, including membrane roofing system manufacturer's written instructions.

3. Procedures for salvaging and recycling of demolition and construction waste

4. Review temporary protection requirements for existing roofing system that is to remain, during and after installation.

5. Review roof drainage during each stage of re-coating and review roof drain plugging and plug removal procedures.

6. Review and finalize construction schedule, and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.

7. Review base flashings, special roofing details, drainage, penetrations, equipment curbs, and condition of other construction that will affect re-coating.

8. Review protection of HVAC systems, primarily the air intakes and snorkel extensions.

9. Review relocation of lightning protection system.

10. Review procedures for unexpected discovery of asbestos-containing materials. If asbestos-containing materials are suspect, contact COR for testing requirements.

11. Review governing regulations and requirements for insurance and certificates if applicable.

12. Review existing conditions that may require notification of COR before proceeding.

1.4 MATERIALS OWNERSHIP

A. Demolished materials shall become Contractor's property and shall be removed from Project site.

1.5 DEFINITIONS

A. Roofing Terminology: Refer to ASTM D 1079 and glossary in NRCA's "The NRCA Roofing Manual" for definition of terms related to roofing work in this Section.

B. Roofing Re-Coating Preparation: Existing roofing that is to remain and be prepared to accept restorative coating application.

C. Patching: Removal of a portion of existing membrane roofing system from deck or removal of selected components and accessories from existing membrane roofing system and replacement with similar materials.

D. Remove: Detach items from existing construction and legally dispose of them off-site unless indicated to be removed and reinstalled.

E. Existing to Remain: Existing items of construction that are not indicated to be removed.

F. Construction Waste: Building and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.

G. Demolition Waste: Building and site improvement materials resulting from re-roofing preparation, demolition or selective demolition operations.

H. Disposal: Removal off-site of demolition and construction waste and subsequent sale, recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.

I. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.

J. Salvage: Recovery of demolition or construction waste and subsequent sale or reuse in another facility.

K. Salvage and Reuse: Recovery of demolition or construction waste and subsequent incorporation into the Work.

1.6 ACTION SUBMITTALS

A. Product Data: For each type of product specified.

1. Indicate Cool Roof Rating Council (CRRC) Compliance.

1.7 INFORMATIONAL SUBMITTALS

A. Contractor's Product Certificate: Submit notarized certificate, indicating products intended for Work of this Section, including product names and numbers and manufacturers' names, with statement indicating that products to be provided meet the requirements of the Contract Documents.

B. Qualification Data: For Installer, Manufacturer, and Roofing Inspector.

1. Letter written for this Project indicating manufacturer approval of Installer to apply specified products and provide specified warranty.

C. Product Test Reports: Based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, for components of roofing rehabilitation system.

D. Warranties: Unexecuted sample copies of special warranties.

E. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection, and for dust control. Indicate proposed locations and construction of barriers.

F. Inspection Reports: Daily reports of Roofing Inspector. Include weather conditions, description of work performed, tests performed, defective work observed, and corrective actions required and carried out.

1.8 CLOSEOUT SUBMITTALS

A. Maintenance Data: To include in maintenance manuals.

B. Warranties: Executed copies of approved warranty forms.

1.9 QUALITY ASSURANCE

A. Installer Qualifications: An employer of workers trained and certified by manufacturer, including a full-time on-site supervisor with a minimum of three years' experience installing products comparable to those specified, able to communicate verbally with Contractor, Engineer, and employees, and the following:

1. Qualified by the manufacturer to install manufacturer's product and furnish warranty of type specified.

B. Manufacturer Qualifications: Primary product manufacturer with minimum five years' experience in manufacture of comparable products in successful use in similar applications, and able to furnish warranty with provisions matching specified requirements.

1. Approval of Other Manufacturers and Comparable Products: Submit the following in accordance with project substitution requirements, within time allowed for substitution review:

a. Product data, including certified independent test data indicating compliance with requirements.

b. Samples of each component.

c. Sample submittal from similar project.

d. Project references: Minimum of five installations of specified products with COR and Engineer contact information.

e. Sample warranty.

C. Roofing Inspector Qualifications: A technical representative of manufacturer not engaged in the sale of products and experienced in the installation and maintenance of the specified roofing system, qualified to perform roofing observation and inspection specified in Field Quality Control Article, to determine Installer's compliance with the requirements of this Project, and approved by the manufacturer to issue warranty certification. The Roofing Inspector shall be one of the following:

1. An authorized full-time technical employee of the manufacturer.

2. An independent party certified as a Registered Roof Observer by the Roof Consultants Institute, retained by the Contractor or the Manufacturer and approved by the Manufacturer.

1.10 PROJECT CONDITIONS

A. Weather Limitations: Proceed with rehabilitation work only when existing and forecasted weather conditions permit Work to proceed without water entering into existing roofing system or building.

1. Store all materials prior to application at temperatures between 60 and 90 deg. F (15 and 32 deg. C).

2. Apply coatings within range of ambient and substrate temperatures recommended by manufacturer. Do not apply materials when air temperature is below 50 or above 110 deg. F (below 10 deg. C or above 43 deg. C).

3. Do not apply roofing in snow, rain, fog, or mist.

B. Protect building to be rehabilitated, adjacent buildings, walkways, site improvements, exterior plantings, and landscaping from damage or soiling from rehabilitation operations.

C. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities.

D. Daily Protection: Coordinate installation of roofing so insulation and other components of roofing system not permanently exposed are not subjected to precipitation or left uncovered at the end of the workday or when rain is forecast.

E. Medical Center will occupy building immediately below re-coating area. Conduct re-coating so Medical Center operations will not be disrupted. Provide COR with not less than 72 hours' notice of activities that may affect Medical Center operations.

1.11 WARRANTY

A. Manufacturer's Warranty for Roof Rehabilitation: Written warranty in which Manufacturer agrees to repair roof rehabilitation installations that fail due to defects in rehabilitation materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Rehabilitated membrane failures including rupturing or cracking due to a manufacturing or installation defect.

b. Deterioration of applied rehabilitation materials beyond normal weathering.

2. Warranty Coverage for Repair of Roof Rehabilitation: The Contractor shall remedy at the Contractor’s expense any failure to conform, or any defect. In addition, the Contractor shall remedy at the Contractor’s expense any damage to Government-owned or controlled real or personal property, when the damage is the result of:

a. The Contractor’s failure to conform to contract requirements; or
b. Any defect of equipment, material, workmanship, or design furnished.

3. Qualified Installer Warranty Requirement: Installer must meet requirements of Quality Assurance Article.

4. Installation Inspection Warranty Requirement: By Roofing Inspector in accordance with requirements of Part 3 Field Quality Control Article.

5. Warranty Period: 20 years from date of Substantial Completion.

B. Manufacturer Inspection and Preventive Maintenance Requirement: By manufacturer's technical representative, to report maintenance responsibilities to COR necessary for preservation of Medical Center’s warranty rights. The cost of manufacturer's inspections and preventive maintenance is included in the Contract Sum. Inspections to occur in Years 2, 5, 10 and 15 following date of Substantial Completion.

C. Installer's Warranty: Submit roofing Installer's warranty, signed by Installer, covering the Work of this Section and related Sections indicated above, including all new components of rehabilitated roofing such as coating application, flashings, roof insulation, fasteners, and walkway products, for the following warranty period:

1. Warranty Period: Two years from date of Substantial Completion.

D. Extended Roof System Warranty: Warranties specified in this Section include the following components and systems specified in other sections supplied by or approved by the roofing rehabilitation coating Manufacturer, and installed by the roofing system Installer:

1. Sheet metal flashing and trim, including roof penetration flashings.

2. Manufactured copings, roof edge, counterflashings, and reglets.

3. Roof curbs, hatches, and penetration flashings.

4. Roof and parapet expansion joint assemblies.

5. Metal roof, wall, and soffit panels and trim.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by a manufacturer meeting qualification requirements in Quality Assurance Article.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Tremco Roofing, Inc.

2. Kemper.

3. Sika.

4. Or Approved Equal.

C. Source Materials: Obtain roofing materials from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. General Performance: Rehabilitated roofing shall withstand exposure to weather without failure or leaks due to defective manufacture or installation.

1. Accelerated Weathering: Roofing system shall withstand 2000 hours of exposure when tested according to ASTM G 152, ASTM G 154, or ASTM G 155.

B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by roofing manufacturer based on testing and field experience.

C. Exterior Fire-Test Exposure: ASTM E 108, Class A; for application and roof slopes indicated, as determined by testing identical membrane roofing materials by a qualified testing agency. Materials shall be identified with appropriate markings of applicable testing agency.

D. Energy Performance: Provide rehabilitated roofing according to one of the following when tested according to CRRC-1:

1. Three-year, aged solar reflectance of not less than 0.55 and emissivity of not less than 0.75.

E. Three-year, aged solar reflectance index of not less than 64 when calculated according to ASTM E 1980.

2.3 MATERIALS

A. General: Re-coating materials recommended by roofing system manufacturer for intended use and compatible with components of existing membrane roofing system.

B. Infill Materials: Where required to replace test cores and to patch existing roofing, use infill materials matching existing membrane roofing system materials, unless otherwise indicated.

1. Existing Roof System Composition

a. White Coated, Smooth surfaced Cap Sheet with 2 base plies over polyisocyanurate insulation. Concrete deck.

C. Temporary Roof Drainage: Design and selection of materials for temporary roof drainage are responsibilities of the Contractor.

2.4 FLUID-APPLIED ROOFING MEMBRANE

A. Polyurethane Elastomeric Fluid-Applied System: Two-coat fluid-applied roofing membrane formulated for application over prepared existing roofing substrate.

B. Bio-Based Polyurethane Roof Coating Base Coat: ASTM D7311, Two-part catalyzed low-odor polyurethane roof base coating formulated for direct application and for use with fiber reinforcement in conjunction with a compatible top coat.
   1. Basis of Design Product: Tremco, AlphaGuard BIO Base Coat, or approved equal.
   2. Volatile Organic Compounds (VOC), maximum, ASTM D3960: 1 g/L.
   3. Combustion Characteristics, UL 790: Class A.
   4. Bio-Based Content: Not less than 20 percent solids, by volume, ASTM D 2697, minimum: 87 percent.

   5. Polyurethane roof coating system topcoat, low odor low VOC single-part, for application over compatible base coat.

C. Bio-Based Polyurethane Roof Coating Top Coat: ASTM D7311, Two-part catalyzed low-odor polyurethane roof top coating formulated for direct application over compatible reinforced base coat.
   1. Basis of Design Product: Tremco, AlphaGuard BIO Top Coat, or approved equal.
   2. Volatile Organic Compounds (VOC), maximum, ASTM D 3960: 6 g/L.
   3. Combustion Characteristics, UL 790: Class A.
   4. Bio-Based Content: Not less than 20 percent.
   5. Percent solids, by volume, ASTM D 2697: 100.
   6. Percent solids, by weight, ASTM D 1644: 100.
   7. Water Vapor Transmission, ASTM E 96, Wet Cup: 0.020 perm-in.

2.5 AUXILIARY MATERIALS

A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with existing roofing system and fluid-applied roofing system.

B. Roof Infill Materials

   1. Smooth Surface Cap Sheet- Powerply Premium Smooth

   2. Base Plies (2 base plies) Burmastic Compositeply HT

   3. Interply Adhesive- Burmastic SF

   4. Insulation Adhesive- Tremco Low Rise Foam Insulation Adhesive

   5. Polyisocyanurate Insulation to match existing thickness

   6. Primer- Tremprime WB

   7. Or approved equivalent

C. Seam Sealer Mastic: Waterproof seam and patching material compatible with applied coating.

1. Solvent free.

D. Miscellaneous Accessories: Provide miscellaneous accessories recommended by roofing system manufacturer.

2.6 WALKWAYS

A. Walkway Product:

1. Polyurethane Top Coat, Slip-Resistant:Second top coat applied at walkway locations shown on roof drawings, with broadcast slip-resistant aggregate..

a. Basis of design product: Tremco, AlphaGuard Bio Top Coat Slip-Resistant.

b. Volatile Organic Compounds (VOC), maximum, ASTM D 3960: 40 g/L.

c. Tensile Strength at 77 deg. F (25 deg. C), minimum, ASTM D 6083: 1,400 psi.

d. Solar Reflectance Index (SRI), ASTM E 1980: Not less than 108.

B. Slip Resistant Product for Fluid-Applied Walkways:

1. Aggregate, Slip Resistant Silica Sand.

a. Basis of design product: Aggregate, Slip Resistant Silica Sand.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine existing roofing substrates, with Installer present, for compliance with requirements and for other conditions affecting application and performance of roof coatings.

1. For the record, prepare written report, endorsed by Installer, listing conditions detrimental to performance.

2. Verify compatibility of approved re-coating system with and suitability of substrates.

3. Verify that substrates are visibly dry and free of moisture.

4. Verify that roofing membrane surfaces have adequately aged to enable proper bond with re-coating system base coat.

5. Verify that existing roofing membrane is free of blisters, splits, open laps, indications of shrinkage, and puncture damage or other indications of impending roof system failure.

6. Commencing application of fluid-applied re-coating membrane indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Protect existing roofing system that is indicated not to be rehabilitated, and adjacent portions of building and building equipment.

1. Mask surfaces to be protected. Seal joints subject to infiltration by coating materials.

2. Limit traffic and material storage to areas of existing roofing membrane that have been protected.

3. Maintain temporary protection and leave in place until replacement roofing has been completed.

B. Pollution Control: Comply with environmental regulations of authorities having jurisdiction. Limit spread of dust and debris.

1. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

2. Remove debris from building roof by hoist, or other device that will convey debris to grade.

C. Verify protection of air intake equipment in the vicinity of the Work in coordination with the COR. Air intake louvers shall be fitted with snorkels before proceeding with re-coating work that could affect indoor air quality or activate smoke detectors in the ductwork.

1. This project does not intend for any rooftop utilities or service piping to be affected by the roof re-coating work.

D. Maintain roof drains in functioning condition to ensure roof drainage at end of each workday. Prevent debris from entering or blocking roof drains and conductors. Use roof-drain plugs specifically designed for this purpose. Remove roof-drain plugs at end of each workday, when no work is taking place, or when rain is forecast.

1. Do not permit water to enter into or under existing membrane roofing system components that are to remain.

3.3 ROOFING COATING PREPARATION

A. Removal of Wet, Damp or Otherwise Damaged Insulation: Remove portions of roofing membrane with underlying wet, damp or damaged insulation. Remove wet, damp or damaged insulation, fill in tear-off areas to match existing insulation and membrane, and prepare patched membrane for application of roof coating specified below.

B. Membrane Surface Preparation:

1. Remove loose granular aggregate from granular aggregate-surfaced built-up bituminous roofing with a vacuum.

2. Remove pavers and accessories from roofing membrane. Discard damaged pavers.

3. Remove blisters, ridges, buckles, roofing membrane fastener buttons projecting above the membrane, and other substrate irregularities from existing roofing membrane that would inhibit application of uniform, waterproof coating.

4. Broom clean existing substrate.

5. Substrate Cleaning: Clean substrate in accordance with requirements of Section 07 "Preparation for Re-roofing".

6. Verify that existing substrate is dry before proceeding with application of coating. Spot check substrates with an electrical capacitance moisture-detection meter.

7. Verify adhesion of new products.

C. Existing Flashing and Detail Preparation: Repair flashings, gravel stops, copings, and other roof-related sheet metal and trim elements. Reseal joints, replace loose or missing fasteners, and replace components where required to leave in a watertight condition.

1. Do not damage metal counterflashings that are to remain. Replace metal counterflashings damaged during removal with counterflashings of same metal, weight or thickness, and finish.

2. Roof Drains: Remove drain strainer and clamping ring. Grind metal surfaces down to clean, bare, metal.

D. Surface Priming: Prime surfaces to receive fluid-applied coating using coating manufacturer's recommended product for substrate material. Apply at application rate recommended by manufacturer.

1. Ensure primer does not puddle and substrate has complete coverage.

2. Allow to cure completely prior to application of coating.

3.4 FLUID-APPLIED FLASHING APPLICATION

A. Fluid-Applied Flashing and Detail Base Coat Application: Complete base coat and fabric reinforcement at parapets, curbs, penetrations, and drains prior to application of field of fluid-applied membrane. Apply base coat in accordance with manufacturer's written instructions.

1. Extend coating minimum of 8 inches (203 mm) up vertical surfaces and 4 inches (100 mm) onto horizontal surfaces.

2. Back roll to achieve minimum coating thickness as follows, unless additional thickness is recommended by manufacturer; verify thickness of base coat as work progresses.

   a. Flashing Base Coat Application Minimum Thickness: 48 wet mils (1.2 wet mm).

3. Embed fabric reinforcement into wet base coat. Lap adjacent flashing pieces of fabric minimum 3 inches (75 mm) along edges and 6 inches (150 mm) at end laps.

4. Roll surface of fabric reinforcing to completely embed and saturate fabric. Leave finished base coat with fabric free of pin holes, voids, or openings.

5. Roof Drains: Install base coat onto surrounding membrane surface and metal drain bowl flange. Install target piece of fabric reinforcement immediately into wet base coat and roll to fully embed and saturate fabric. Reinstall clamping ring and strainer following application of top coat. Replace broken drain ring clamping bolts.

6. Allow base coat to cure prior to application of top coat.

7. Following curing of base coat and prior to application of top coat, sand raised or exposed edges of fabric reinforcement.

B. Fluid-Applied Flashing and Detail Top Coat Application: Apply top coat uniformly in a complete installation to flashings.

1. Prime base coat prior to application of top coat if top coat is not applied within 72 hours of the base coat application, using manufacturer's recommended primer.

2. Apply top coat to flashings extending coating up vertical surfaces and out onto horizontal surfaces 4 inches. Install top coat over field base coat and spread coating evenly.

3. Back roll to achieve minimum coating thickness as follows, unless greater thickness is recommended by manufacturer. Verify thickness of top coat as work progresses:

   a. Flashing Top Coat Application Minimum Thickness: 48 wet mils (1.2 wet mm).

4. Avoid foot traffic on new fluid-applied membrane for a minimum of 24 hours.

3.5 FLUID-APPLIED MEMBRANE APPLICATION

A. Base Coat: Apply base coat to field of membrane in accordance with manufacturer's written instructions.

1. Apply base coat on prepared and primed surfaces and spread coating evenly.

2. Back roll to achieve minimum coating thickness as follows, unless greater thickness is recommended by manufacturer; verify thickness of base coat as work progresses.

   a. Base Coat Application Minimum Thickness: 48 wet mils (1.2 wet mm).

3. Fabric Reinforcement: Embed fabric reinforcement into wet base coat. Lap adjacent pieces of fabric minimum 3 inches (75 mm) along edges and 6 inches (150 mm) at end laps.

   a. Roll surface of fabric reinforcing to completely embed and saturate fabric. Leave finished base coat with fabric free of pin holes, voids, or openings.

   b. Following curing of base coat and prior to application of top coat, sand raised or exposed edges of fabric reinforcement.

4. Allow base coat to cure prior to application of top coat.

B. Top Coat: Apply top coat to field of membrane and flashings uniformly in a complete, continuous installation.

1. Prime base coat prior to application of top coat if top coat is not applied within 72 hours of the base coat application, using manufacturer's recommended primer.

2. Apply top coat extending coating up vertical surfaces and out onto horizontal surfaces. Install top coat over field base coat and spread coating evenly.

3. Back roll to achieve coating thickness as follows, unless additional thickness is recommended by manufacturer. Verify thickness of top coat as work progresses:

   a. Top Coat Application Minimum Thickness: 48 wet mils (1.2 wet mm).

4. Avoid foot traffic on new fluid-applied membrane for a minimum of 24 hours.

C. Joint Sealant: Apply joint sealant at terminations of coating application and in locations required for complete weathertight application.

D. Slip-Resistant Walkway Top Coat: Apply walkway second top coat following application and curing of top coat. Locate as indicated on Drawings.

1. Mask walkway location with tape.

2. Prime first top coat prior to application of walkway top coat if walkway top coat is not applied within 72 hours of the first top coat application, using manufacturer's recommended primer.

3. Back roll to achieve coating thickness as follows, unless additional thickness is recommended by manufacturer. Verify thickness of top coat as work progresses:

   a. Walkway Top Coat Application Minimum Thickness: 20 wet mils (0.5 wet mm).

4. Broadcast 20 to 30 lb per 100 sq. ft. (9.6 to 14.6 kg per 10 sq. m) of Slip-Resistant Top Coat Aggregate in wet top coat.

5. Back roll sand and top coat creating even dispersal of sand. Remove masking immediately.

3.6 FIELD QUALITY CONTROL

A. Roofing Inspector: Contractor shall engage a qualified roofing inspector to perform roof tests and inspections and to prepare test reports, at Contractors expense.

B. Roof Inspection: Engage roofing system manufacturer's technical personnel to inspect roofing installation, and submit report to the Engineer. Notify Engineer and COR 48 hours in advance of dates and times of inspections. Inspect work as follows:

   1. Upon completion of preparation of first component of work, prior to application of re-coating materials.

   2. Following application of re-coating to flashings and application of base coat to field of roof.

   3. Upon completion of re-coating but prior to re-installation of other roofing components.

C. Repair fluid-applied membrane where test inspections indicate that they do not comply with specified requirements.

D. Arrange for additional inspections, at Contractor's expense, to verify compliance of replaced or additional work with specified requirements.

3.7 DISPOSAL

A. Collect demolished materials and place in containers. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.

   1. Storage or sale of demolished items or materials on-site is not permitted.

B. Transport and legally dispose of demolished materials off Medical Centers property.

3.8 PROTECTING AND CLEANING

A. Protect roofing system from damage and wear during remainder of construction period.

B. Correct deficiencies in or remove coating that does not comply with requirements, repair substrates, and reapply coating.

C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

--- END ---

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 22 00
ROOF AND DECK INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

B. Roof and deck insulation, substrate board, vapor retarder, and cover board on existing existing concrete or metal deck substrates ready to receive roofing or waterproofing membrane.

C. Repairs and alteration work to existing roof insulation.

1.2 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):

1. Standard 90.1-13 - Energy Standard for Buildings Except Low-Rise Residential Buildings.

C. ASTM International (ASTM):

1. C208-12(2017)e2 - Cellulosic Fiber Insulating Board.
2. C552-17e1 - Cellular Glass Thermal Insulation.
3. C726-17 - Mineral Fiber Roof Insulation Board.
4. C728-17a - Perlite Thermal Insulation Board.
5. C1177/C1177M-17 - Glass Mat Gypsum Substrate for Use as Sheathing.
6. C1278/C1278M-17 - Fiber-Reinforced Gypsum Panel.
7. C1289-19 - Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
8. C1396/C1396M-17 - Gypsum Board.
9. D41/D41M-11 (2016) - Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing.
10. D312/D213M-11 - Asphalt Used in Roofing.
11. D1970/D1970M-20 - Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
12. D2178/D2178M-15a - Asphalt Glass Felt Used in Roofing and Waterproofing.
13. D2822/D2822M-05 (2011)e1 - Asphalt Roof Cement, Asbestos Containing.
14. D4586/D4586M-07(2018) - Asphalt Roof Cement, Asbestos-Free.

15. E84-20 - Surface Burning Characteristics of Building Materials.
16. F1667-18a - Driven Fasteners: Nails, Spikes, and Staples.

D. National Roofing Contractors Association (NRCA):
1. Manual-15 - The NRCA Roofing Manual: Membrane Roof Systems- 2019.

E. UL LLC (UL):
1. Listed - Online Certifications Directory.

F. U.S. Department of Agriculture (USDA):
1. USDA BioPreferred Program Catalog.

G. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
1. DOC PS 1-19 - Structural Plywood.
2. DOC PS 2-18 - Performance Standard for Wood-Based Structural-Use Panels.

1.3 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and installation details.
   a. Nailers, cants, and terminations.
   b. Layout of insulation showing slopes, tapers, penetrations, and edge conditions.

C. Manufacturer's Literature and Data:
1. Description of each product.

D. Samples:
1. Roof insulation, each type.
2. Fasteners, each type.

E. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
   a. Show type and quantity for each product.
3. Low Pollutant-Emitting Materials:
   a. Show volatile organic compound types and quantities.
   b. Certify each composite wood and agrifiber product contain no added urea formaldehyde.

F. Qualifications: Substantiate qualifications meet specifications.
1. Installer.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Same installer as Division 07 roofing section installer.

1.5 DELIVERY

A. Comply with recommendations of NRCA Manual.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Comply with recommendations of NRCA Manual.

B. Store products indoors in dry, weathertight facility.

C. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

A. Environment:

1. Install products when existing and forecasted weather permit installation according to manufacturer's instructions.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant substrate board, vapor retarder, insulation, and cover board against material and manufacturing defects as part of Division 07 roofing system warranty.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Insulation Thermal Performance:

1. Overall Average R-Value: RSI-57 (R-33), minimum.
2. Any Location R-Value: RSI-17 (R-10), minimum.

B. Fire and Wind Uplift Resistance: Provide roof insulation complying with requirements specified in Division 07 roofing section.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

B. Sustainable Construction Requirements:

1. Insulation Recycled Content:

a. Mineral Fiber: 75 percent total recycled content, minimum.

b. Fiberglass: 20 percent total recycled content, minimum.

c. Cellulose: 75 percent post-consumer recycled content, minimum.

d. Perlite Composite Board: 23 percent post-consumer recycled content, minimum.

e. Rigid Foam: 9 percent total recycled content, minimum.

f. Glass Fiber Reinforced Rigid Foam: 6 percent total recycled content, minimum.

2. Low Pollutant-Emitting Materials: Comply with VOC limits for the following products:

a. Non-flooring adhesives and sealants.

b. Composite wood and agrifiber. Composite wood and agrifiber products used within the weatherproofing membrane must contain no added urea-formaldehyde resins.

3. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.

2.3 ADHESIVES

A. Primer: ASTM D41/D41M.

B. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.

C. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

D. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

E. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

F. Roof Cement: Asbestos free, ASTM D2822/D2822M, Type I or Type II; or, ASTM D4586/D4586M, Type I or Type II.

2.4 ROOF AND DECK INSULATION

A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer.

B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, faced with glass fiber reinforced cellulosic felt facers on both major surfaces of the core foam.

C. Tapered Roof Insulation System:

1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
2. Cut to provide high and low points with crickets and slopes as shown.
3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
4. Minimum slope 1/48 (1/4 inch per 12 inches) on new insulation areas.

2.5 INSULATION ACCESSORIES

A. Glass (Felt): ASTM D2178/D2178M, Type VI, heavy duty ply sheet.

B. Cants and Tapered Edge Strips:

1. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
2. Tapered Edge Strips: 1/12 (1 inch per 12 inches), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
   a. Cellulosic Fiberboard: ASTM C208.
   b. Mineral Fiberboard: ASTM C726.
   c. Perlite Board: ASTM C728.

C. Vapor Retarder:

1. Glass-Fiber Felts: ASTM D2178/D2178M, Type IV, asphalt impregnated.
2. Self-Adhering Sheet Vapor Retarder: ASTM D1970/D1970M, minimum 1.0 mm (40 mils) thick membrane of HDPE film fully coated with asphalt adhesive, or 0.76 to 1.0 mm (30 to 40 mils) thick membrane of butyl rubber based adhesive backed by a layer of high density cross-laminated polyethylene; maximum permeance rating of 6 ng/Pa/s/sq. m (0.1 perms).

D. Substrate Board:

1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 13 mm (1/2 inch) Type X, 16 mm (5/8 inch) thick, factory primed.
2. Cellulosic-Fiber-Reinforced, Water-Resistant Gypsum Roof Board: ASTM C1278/C1278M, (1/2 inch) 16 mm (5/8 inch) thick.

E. Cover Board:

1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 13 mm (1/2 inch) 16 mm (5/8 inch) thick, factory primed.
2. Cellulosic-Fiber-Reinforced, Water-Resistant Gypsum Roof Board: ASTM C1278/C1278M, 13 mm (1/2 inch) thick.

2.6 ACCESSORIES

A. Fasteners: Corrosion-resistant carbon steel fasteners and galvalume-coated steel or plastic round plates for fastening substrate board and insulation to roof deck.

B. Nails: ASTM F1667; type to suit application.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Comply with requirements of Division 07 roofing section.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Comply with requirements of UL for insulated steel roof deck.

C. Attach substrate board and other products to meet requirements to withstanding the effects of the following loads.

1. Wind Loads: (Per ASCE 7-10)
2. Risk Category: IV
3. Ultimate Wind Speed: Vult: 120 mph
4. Allowable Wind Speed: 93 mph
5. Exposure Category: B
6. Internal Pressure Coefficient: +/- 0.18

3.4 VAPOR RETARDER INSTALLATION

A. Vapor Retarder Installation, General:
   1. Install continuous vapor retarder on roof decks where indicated.
   2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
   3. Seal penetrations through vapor retarder with roof cement to prevent moisture entry from below.

B. Cast in Place Concrete Decks, Except Insulating Concrete:
   1. Prime deck as specified.
   2. Apply two plies of asphalt saturated felt mopped down to deck.

C. Precast Concrete Unit Decks Without Concrete Topping:
   1. Prime deck as specified.
   2. Apply two plies of asphalt saturated felt.
   3. Mop to deck, keeping bitumen 100 mm (4 inches) away from joints of precast units. Bridge joints with felt. Mop between plies as specified.

3.5 INSULATION INSTALLATION

A. Insulation Installation, General:
   1. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate before installation of insulation.
   2. Cant Strips: Install preformed insulation cant strips wood at junctures of roofing system with vertical construction.
   3. Use same insulation as existing for roof repair and alterations unless specified otherwise.

B. Insulation Thickness:
   1. Thickness of roof insulation shown on drawings is nominal. Provide thickness required to match existing thickness and slope.
   2. Insulation on Metal Decks: Provide insulation to match existing thickness and slope, R-30 min. where achievable.
   3. When actual insulation thickness differs from drawings,coordinate insulation thickness and slope in alignment and location of roof drains, flashing, gravel stops, fascias and similar items.
   4. Where tapered insulation is used, maintain insulation thickness at high points and roof edges shown on drawings.
      a. Low Point Thickness: Minimum 38 mm (1-1/2 inches).

5. Use minimum two layers of insulation when required thickness is 68 mm (2.7 inch) or greater.

C. Lay insulating units with close joints, in regular courses and with end joints staggered.
   1. Stagger joints between layers minimum 150 mm (6 inches).

D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.

E. Seal cut edges at penetrations and at edges against blocking with bitumen or roof cement.

F. Cut to fit tightly against blocking or penetrations.

G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.

H. Installation Method:
   1. Adhered Insulation:
      a. Prime substrate as required.
      b. Set each layer of insulation firmly in ribbons of bead-applied insulation adhesive.
      c. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.
   2. Mechanically Fastened Insulation:
      a. Fasten insulation according to load requirements listed above.
      b. Fasten insulation to resist uplift pressures.
   3. Mechanically Fastened and Adhered Insulation:
      a. Fasten first layer of insulation according to "Mechanically Fastened Insulation" requirements.
      b. Fasten each subsequent layer of insulation according to "Adhered Insulation" requirements.

3.6 COVER BOARD INSTALLATION

A. Install cover boards over insulation with long joints in continuous straight lines with staggered end joints.

B. Offset cover board joints from insulation joints 150 mm (6 inches), minimum.

C. Secure cover boards according to "Adhered Insulation" and/or "Mechanically Fastened Insulation" requirements.

- - E N D - -

SECTION 07 40 00
ROOFING AND SIDING PANELS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This project intends for the removal and re-installation of existing wall panels to the greatest extent possible. Where damaged during removal, new panels are to be provided and installed to match existing panels in their original construction or installation condition before damage, at no cost to the VA.. This section specifies requirements for any new uninsulated metal wall panels and installation requirements for both new and re-installed panels.

1.2 RELATED WORK:

A. Sealant: Section 07 92 00, JOINT SEALANTS.

B. Color and texture of finish to match existing.

1.3 QUALITY ASSURANCE:

A. Manufacturer’s Qualifications: Provide metal wall panels products of a manufacturer regularly engaged for not less than five (5) years in the fabrication of metal panels of the type and design indicated.

B. Installer: A firm with three (3) years of successful experience with installation of roofing and siding panels of type and scope equivalent to Work of this Section. Submit installer qualifications.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples: Metal panel, 152 mm (6 inch) square, showing finish, each color and texture.

C. Shop Drawings: Wall panels, showing details of construction and installation. Thickness and kind of material, closures, flashing, fastenings and related components and accessories. Show interfaces and relationships to work at other trades and continuity with adjacent thermal, weather, air and vapor barriers.

E. Manufacturer's Literature and Data: Wall panels.

F. Fire Test Report: Report of fire test by recognized testing laboratory for fire rating specified, showing details of construction.

G. Manufacturer’s Certificates: Indicating manufacturer’s qualifications specified.

H. Installer qualifications.

I. Manufacturer warranty.

1.5 QUALITY ASSURANCE:

A. Approval by Contracting Officer Representative (COR) is required of products of proposed manufacturer.

B. Certify manufacturer has five (5) years continuous documented experience in fabrication of metal roofing and siding panels.

C. Source: For each material type required for work of this section, provide primary materials, which are products of one manufacturer. Provide secondary or accessory materials, which are acceptable to manufacturers of primary materials.

D. Installer: A firm with a minimum of three (3) years' experience in type of work required by this section and which is acceptable to manufacturers of primary materials.

1.6 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their metal wall panels for a minimum of ten (10) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

C. Warranty on Panel Finishes: Manufacturer's shall warrant their wall panel finish and provide standard agreement to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

   a. Color fading more than 5 Hunter units when tested according to ASTM D2244.

   b. Chalking in excess of a No. 8 rating when testing according to ASTM D4214.

   c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of installation and final acceptance by the COR.

1.7 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.

B. American Architecture Manufacturers Association (AAMA):

611-14 ..... Anodized Architectural Aluminum

621-02 ..... Voluntary Specifications for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

2605-13 ..... Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels

C. American Iron and Steel Institute (AISI):

SG03-02 ..... Cold-Formed Steel Design Manual

D. ASTM International (ASTM):

A463/A463M-15 ..... Steel Sheet, Cold-Rolled, Aluminum-Coated, by the Hot-Dip Process

A653/A653M-20 ..... Steel Sheet, Zinc-Coated (Galvanized), or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

A924/A924M-19 ..... Steel Sheet, Metallic Coated by the Hot-Dip Process

A1008/A1008M-18 ..... Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy

B209-14 ..... Aluminum and Aluminum Alloy Sheet and Plate

B209M-14 ..... Aluminum and Aluminum Alloy Sheet and Plate (Metric)

C553-19 ..... Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications

C591-20 ..... Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation

C612-14 (2019) ..... Mineral Fiber Block and Board Thermal Insulation

C1396/C1396M-17 ..... Gypsum Board

D2244-16..... Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates

D4214-07 (2015)..... Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films

E119-20 ..... Fire Test of Building Construction and Materials

E283-19..... Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

E331-00(2016)..... Test Method for Water Penetration of Exterior Windows, Skylight, Doors, and Curtain Walls by Uniform Static Air Pressure Difference

E1592-10 (2017)..... Terminology Relating to Occupational Health and Safety

E1646-95(2018)..... Test Method for Water Penetration of Exterior Metal Roof Panel Systems by Uniform Static Air Pressure Difference

E1680-16..... Test Method for Rate of Air Leakage Through Exterior Metal Roof Panel Systems

E1980-11 (2019)..... Calculating Solar Reflectance Index of Horizontal and Low-Sloped Opaque Surfaces

E2140-01(2017)..... Test Method for Water Penetration of Metal Roof Panel Systems by Static Water Pressure Head

E. Cool Roof Rating Council (CRRC):

1 Standard-14

F. FM Global:

4471-10..... Class 1 Panel Roofs

G. Underwriters Laboratories (UL):

580-05(R2018)..... Tests for Uplift Resistance of Roof Assemblies

Fire Resistance Directory

PART 2 - PRODUCTS

A. Basis of Design: “Tremlock Coping Cap and Tremlock Flush Wall Panel” by Tremco, or equivalent.

2.1 PERFORMANCE REQUIREMENTS FOR WALL PANELS:

A. Structural Performance: Provide metal panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E1592.
   1. Wind Loads: (Per ASCE 7-10)
   2. Risk Category: IV
   3. Ultimate Wind Speed: Vult: 120 mph
   4. Allowable Wind Speed: 93 mph
   5. Exposure Category: B
   6. Internal Pressure Coefficient: +/- 0.18
   7. Deflection Limits: For wind loads, no greater than 1/180 of the span.

B. Air Infiltration: Air leakage of not more than 0.3 L/s per sq. m (0.06 cfm/sq. ft.) when tested according to ASTM E283 at the following test-pressure difference:
   1. Test-Pressure Difference: 75 Pa (1.57 lbf/sq. ft.).

C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E331 at the following test-pressure difference:
   1. Test-Pressure Difference: 137 Pa (2.86 lbf/sq. ft.).

D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joints sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
   1. Temperature Change (Range): 67 degrees C (120 degrees F), ambient; 100 degrees C (180 degrees F), material surfaces.

2.2 SHEET STEEL:

A. Minimum 0.8 mm (0.31 inch) thick for wall and roof panels.

B. Steel, Sheet, Galvanized: ASTM A653/A653M and AISI SG03-3, Structural.
   1. Grade 40, galvanized coating conforming to ASTM A924/A924M, Class Z 275 G-90.

C. Steel, Sheet, Commercial: ASTM A1008, Type C.

D. Steel, Sheet, Aluminized: ASTM A463/A463M and AISI SG03-3. Steel to be coated on both sides with 0.15 Kg/sq. m (0.5 ounce of aluminum per square foot).

2.3 FASTENERS:

A Fasteners for Steel Panels galvanized or cadmium plated steel.

B. Fasteners of size, type and holding strength as recommended by panel manufacturer.

2.4 THERMAL INSULATING MATERIALS:

A. Urethane or Isocyanurate Board: ASTM C591, Type I.

B. Mineral Fiber Blankets: ASTM C553, Type I.

C. Mineral Fiber Board: ASTM C612, Class I.

2.5 FABRICATION:

A. General:

1. Furnish panels in one continuous length for full height, with no horizontal joints, except at cut-outs or openings as required for the passage of pipes, conduits, vents and the like.
2. Construct panels by pressing members together to form a structural unit with closed ends.
3. Overall thickness of panels is shown of the contract documents.
4. Provide connection between panels by interlocking male and female joints interlocking joints filled with sealant. Seal joints between related components as required to make the work water-tight. Refer to Section 07 92 00, JOINT SEALANTS for sealing compounds.
5. Provide metal and bituminous closures, fastenings, flashing, clip, caulking, panel reinforcements for support of mechanical and electrical work as shown on the contract documents, and related components and accessories.
   a. Sub-girts: 1.0 mm (0.0396 inches) thick galvanized steel hat channels deigned to receive panel fasteners or clips.
   b. Accessories, fastenings, and flashings to be the same material and finish as the panels. Thickness and installation of accessories and flashing to be as recommended by the panel manufacturer.

B. Uninsulated Metal Panels:

1. Panels to consist of a structurally reinforced air-space fastened between two metal face sheets.
2. Panels:
   a. 0.85 mm (0.0336 inch) thick galvanized steel.

2.6 FINISH:

A. For insulated and uninsulated wall panels, provide finishes as follows for face sheets. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

B. Provide finishes for steel face sheets as follows. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat.
2. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish coating not less than 70 percent PVDF resin by weight in both color coat and clear topcoat.
3. Concealed Finish: Apply pretreatment and manufacturer's standard white or light-colored acrylic or polyester backer finish consisting of prime coat and wash coat with a minimum total dry film thickness of 3 mm (0.5 mil).

PART 3 - EXECUTION

3.1 INSTALLATION:

A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise.

B. Install panels in full and firm contact with supports and with each other at side and end laps.

C. Where panels are cut in the field, or where factory applied coverings or coatings are abraded or damaged in handling or installation, make finish repairs with material of the same type and color as the weather coating, before being installed.

D. Seal cut ends and edges, including those at openings through the sheets.

E. Correct defects or errors in the materials in a manner approved by the COR.

F. Replace defective materials which cannot be corrected with nondefective material.

G. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.

H. Wall Panels:

1. Apply panels with the configuration in a vertical position.

2. Provide panels in the longest obtainable lengths, with end laps occurring only at structural members full heights from base to eave with no horizontal joints except at the junctions of door frames, window frames, louver panels, and similar locations.
3. Seal side and end laps with joint sealing material.
4. Flash and seal walls at the base, at the top, around windows, door frames, framed louvers, and other similar openings. Install closure strips, flashings, and sealing material in an approved manner that will assure complete weather tightness.
5. Flashing is not required where approved "self-flashing" panels are used.

I. Flashing:
1. Provide flashing and related closures and accessories in connection with the preformed metal panels as indicated and as necessary to provide a watertight installation.
2. Install details of installation, which are not indicated, in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings.
3. Allow for expansion and contraction of flashing.

J. Fasteners:
1. Space fasteners in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated.
2. Install fasteners in valleys or crowns as recommended by the manufacturer of the panel being used.
3. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay.
4. Drive exposed penetrating type fasteners normal to the surface, and to a uniform depth to seat gasketed washers properly, and drive so as not to damage factory applied coating.
5. Exercise care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Do not torque fasteners to exceed values recommended by the manufacturer.
6. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels.

7. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

3.2 ISOLATION OF ALUMINUM:

A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze, or other metal compatible with aluminum by one of the following:
   1. Painting the dissimilar metal with a prime coat of Zinc-Molybdate followed by two coats of aluminum paint.
   2. Placing a non-abrasive tape or gasket between the aluminum and the dissimilar metal.

B. Paint aluminum in contact with, or built into mortar, concrete, plaster, or other masonry materials with a coat of alkali-resistant bituminous paint.

C. Paint aluminum in contact with wood or other absorptive materials that may become repeatedly wet, with two coats of bituminous paint, or two coats of aluminum paint. Seal joints with caulking material.

3.3 PROTECTION AND CLEANING:

A. Protect panels and other components from damage during and after erection, and until project is accepted by the COR.

B. After completion of work, all exposed finished surfaces of panels are to be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 52 16.11
COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Modified bituminous sheet roofing and base flashing installed using cold-applied adhesive with granular coating
   2. Repairs and alteration work, including temporary roofs.

1.2 RELATED REQUIREMENTS

A. Preparation of Existing Membrane Roofs and Repair Areas: Section 07 01 50.19, PREPARATION FOR REROOFING.
B. Roof Insulation: Section 07 22 00, ROOF AND DECK INSULATION.
C. Sheet Metal Components: Section 07 60 00, FLASHING AND SHEET METAL.
D. Roofing Membrane Color: White

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
   1. FX-1-01(R2006) - Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.
C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):
   1. 7-16 - Minimum Design Loads for Buildings and Other Structures.
D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
   1. 90.1-13 - Energy Standard for Buildings Except Low-Rise Residential Buildings.
E. ASTM International (ASTM):
   1. C1370-00(R2012) - Determining Chemical Resistance of Aggregates for Use in Chemical-Resistant Sulfur Polymer Cement Concrete and Other Chemical-Resistant Polymer Concretes.
   2. C1371-15 - Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers.

3. C1549-16 - Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer.
4. D146/D146M-04 (2012)e1 - Sampling and Testing Bitumen-Saturated Felts and Woven Fabrics for Roofing and Waterproofing.
5. D1644-01(2017) - Nonvolatile Content of Varnishes.
6. D2523/D2523M-13(2019)e1 - Testing Load-Strain Properties of Roofing Membranes.
7. D4073-06(2019)e1 - Tensile-Tear Strength of Bituminous Roofing Membranes.
8. D4263-83(2018) - Indicating Moisture in Concrete by the Plastic Sheet Method.
9. D4586/D4586M-07(2018) - Asphalt Roof Cement, Asbestos Free.
10. D4601/D4601M-04(2020) - Asphalt-Coated Glass Fiber Base Sheet Used in Roofing.
11. D4897/D4897M-16 - Asphalt Coated Glass Fiber Venting Base Sheet Used in Roofing.
12. D5147/D5147M-18 - Sampling and Testing Modified Bituminous Sheet Material.
13. D5201-05a(2014) - Calculating Formulation Physical Constants of Paints and Coatings.
14. D6162/D6162M-16 - Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using a Combination of Polyester and Glass Fiber Reinforcements.
15. D6163/D6163M-16 - Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using Glass Fiber Reinforcements.
16. D6164/D6164M-16 - Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using Polyester Reinforcements.
17. D6511/D6511M-18 - Solvent Bearing Bituminous Compounds.
18. E108-20a - Fire Tests of Roof Coverings.
19. E408-13 (2019) - Total Normal Emittance of Surfaces Using Inspection-Meter Techniques.
20. E1918-16 - Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.
21. E1980-11 (2019) - Calculating Solar Reflectance of Horizontal and Low-Sloped Opaque Surfaces.

F. Cool Roof Rating Council (CRRC):
1. 1-20 - Product Rating Program.

G. National Roofing Contractors Association (NRCA):
   1. Manual-19 - The NRCA Roofing Manual: Membrane Roof Systems.
H. U.S. Department of Agriculture (USDA):
   1. BioPreferred® Program Catalog.
I. UL LLC (UL):
   1. 580-06 - Tests for Uplift Resistance of Roof Assemblies.
   2. 1897-20 - Uplift Tests for Roof Covering Systems.
J. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
   1. DOC PS 1-19 - Structural Plywood.
   2. DOC PS 2-18 - Performance Standard for Wood-Based Structural-Use Panels.
K. U.S. Environmental Protection Agency (EPA):
   1. EPA 600/R-93/116-93 - Method for the Determination of Asbestos in Bulk Building Materials.
   2. Energy Star ENERGY STAR Program Requirements for Roof Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Engineer.
      c. Inspection and Testing Agency.
      d. Contractor.
      e. Installer.
      f. Manufacturer's field representative.
      g. Other installers responsible for adjacent and intersecting work, including roof deck, flashings, roof specialties, roof accessories, utility penetrations, rooftop curbs and equipment, lightning protection, and parapet repairs.
   2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
      a. Installation schedule.
      b. Installation sequence.
      c. Preparatory work.

d. Protection before, during, and after installation.
e. Installation.
f. Terminations.
g. Transitions and connections to other work.
h. Inspecting and testing.
i. Other items affecting successful completion.
j. Pull out test of fasteners.
k. Material storage, including roof deck load limitations.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Roofing membrane layout.
2. Roofing membrane fastener pattern and spacing
3. Roofing membrane seaming and joint details.
4. Roof membrane penetration details.
5. Base flashing and termination details.

C. Manufacturer’s Literature and Data:
1. Description of each product.
2. Minimum fastener pullout resistance.
3. Installation instructions.
4. Warranty.

D. Samples:
1. Roofing Membrane: 150 mm (6 inch) square.
2. Base Flashing: 150 mm (6 inch) square.
3. Fasteners: Each type.
4. Roofing Membrane Seam: 300 mm (12 inches) square.

E. Sustainable Construction Submittals:
1. Solar Reflectance Index (SRI) for roofing membrane.
2. Biobased Content: Materials and equipment being installed or used that are listed on the USDA BioPreferred program product category list must meet or exceed USDA’s minimum biobased content threshold. Refer to individual specification sections for detailed requirements applicable to that section.

a. Show type and quantity for each product.

3. Low Pollutant-Emitting Materials: see section 2.3 this specification

a. Show volatile organic compound types and quantities.

4. Energy Star label for roofing membrane.

F. Certificates: Certify products comply with specifications.

1. Fire and windstorm classification.
2. High wind zone design requirements.
3. Energy performance requirements.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer, including supervisors with project experience list.
2. Manufacturer’s field representative with project experience list.

H. Field quality control reports.

I. Temporary protection plan. Include list of proposed temporary materials.

J. Operation and Maintenance Data:

1. Maintenance instructions.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
2. Regularly installs specified products.
3. Installed specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer’s Representative and installer’s personnel.

B. Manufacturer’s Field Representative:

1. Manufacturer’s full-time technical employee or independent roofing inspector.
2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

1.7 DELIVERY

A. Deliver products in manufacturer’s original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer’s name or brand, type, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Comply with NRCA Manual storage and handling requirements.

B. Store products indoors in dry, weathertight facility.

C. Store adhesives according to manufacturer’s instructions.

D. Protect products from damage during handling and construction operations.

E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 4 degrees C (40 degrees F) for minimum 48 hours before installation.
2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions. Do not install in windy conditions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant roofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.

1. Warranty Period: 20 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Roofing System: Modified bituminous sheet roofing and base flashing installed using cold-applied adhesive with solar reflective granular coating.

2.2 SYSTEM PERFORMANCE

A. Design roofing system meeting specified performance:

1. Load Resistance: ASCE/SEI 7; Design criteria as necessary for manufacturer warranty of 20 years, and speeds of 110 mph.

2. Energy Performance:
   a. EPA Energy Star Listed for low-slope roof products.
   b. ASTM E1980; Minimum 78 Solar Reflectance Index (SRI).
   c. CRRC-1; Minimum 0.70 initial solar reflectance and minimum 0.75 emissivity.
   d. Three-Year Aged Performance: Minimum 0.55 solar reflectance tested in according to ASTM C1549 or ASTM E1918, and minimum 0.75 thermal emittance tested in according to ASTM C1371 or ASTM E408.
      1) Where tested aged values are not available:
         a) Calculate compliance adjusting initial solar reflectance according to ASHRAE 90.1.
         b) Provide roofing system with minimum 64 three-year aged Solar Reflectance Index calculated according to ASTM E1980 with 12 W/sq. m/degree K (2.1 BTU/h/sq. ft.) convection coefficient.

B. Roofing Membrane System Load-Strain Properties: Provide a roofing membrane identical to component systems that have been successfully tested by a qualified independent testing and inspecting agency to meet the following minimum load-strain properties at membrane failure when tested according to ASTM D2523:

C. Tensile strain at failure, at -18 degrees C (0 degrees F): 2.67 kgf (600 lbf.) cross machine direction, minimum; 4.0 to 5.5 percent elongation at break.

2.3 PRODUCTS - GENERAL

A. Basis of Design: POWERply by Tremco, Inc. or approved equal.

B. Provide roof system components from one manufacturer.

C. Sustainable Construction Requirements:
   1. Solar Reflectance Index: 78 minimum.
   2. Biobased Content: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.
   3. Low Pollutant-Emitting Materials: Comply with VOC limits for the following products:

a. Non-flooring adhesives and sealants.

1. Multipurpose Construction Adhesives: 70 g/L.
2. Metal-to-Metal Substrate Adhesives: 30 g/L.
3. Plastic Foam Substrate Adhesive: 50 g/L.
   1. Porous Material (Except Wood) Substrate Adhesive: 50 g/L.
4. Wood Substrate Adhesive: 30 g/L.
5. Fiberglass Substrate Adhesive: 80 g/L.
6. Architectural Non-Porous Sealant Primer: 250 g/L.
7. Architectural Porous Sealant Primer: 775 g/L.
8. Other Sealant Primer: 750 g/L.
9. PVC Welding Adhesives: 510 g/L.
10. CPVC Welding Adhesives: 490 g/L.
11. ABS Welding Adhesives: 325 g/L.
12. Plastic Cement Welding Adhesives: 250 g/L.
13. Adhesive Primer for Plastic: 550 g/L.
14. Contact Adhesive: 80 g/L.
15. Special Purpose Contact Adhesive: 250 g/L.
16. Sheet Applied Rubber Lining Operations: 850 g/L.
17. Top and Trim Adhesive: 250 g/L.
18. Architectural Sealants: 250 g/L.
19. Other Sealants: 420 g/L.

2.4 MEMBRANE AND SHEET MATERIALS

A. Membrane Materials, General: Provide combination of base, ply, and cap sheet materials that have been tested in combination and comply with specified load/strain performance.

B. Base Sheet: ASTM D4897/D4897M, Type IV, asphalt and glass-fiber roofing ply sheet. as approved by modified bitumen roof membrane manufacturer.

1. Basis of design product: Tremco, THERMglass Type IV.
   a. Net Dry Mass of asphalt impregnated glass felt, ASTM D146: 7.5 lb/100 sq ft (360 g/ sq m).
2. Breaking Strength, minimum, ASTM D146/D146M: cross machine direction, 12.2 kN/m (70 lbf/in).
3. Pliability, 12.7 mm (1/2 inch) radius bend, ASTM D146/D146M: No failures.

C. Vapor Barrier Sheet: ASTM D4601 Type II, SBS-modified asphalt coated composite polyester / fiberglass/fiberglass mat reinforced Type II, nonperforated, with the following properties:
   1. Basis of design product: Tremco, BURmastic Composite Ply HT.
      a. Tensile Strength at 77 deg. F (25 deg. C), minimum, ASTM D5147: Machine direction, 165 lbf/in (725 N); Cross machine direction, 150 lbf/in (660 N).
      b. Tear Strength at 77 deg. F (25 deg. C), minimum, ASTM D5147: Machine direction, 260 lbf (1150 N); Cross machine direction, 230 lbf (1120 N).
      c. Thickness, minimum, ASTM D5147: 0.060 inch (1.5 mm).

D. Membrane Ply Sheet & Flashing Backer SheetASTM D4601 Type II , SBS/SEBS-modified asphalt coated composite polyester / fiberglass/ fiberglass mat Reinforced , Type II, nonperforated, with the following minimum properties:
   1. Basis of design product: Tremco, BURmastic Composite Ply HT.
   2. Tensile Strength at 25 degrees C (77 degrees F), minimum, Machine direction, 165 lbf/in (725 N); cross machine direction, ASTM D5147/D5147M: 660N (150 lbf/in).
   3. Tear Strength at 25 degrees C (77 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 1150 N (260 lbf.).

E. Membrane Cap Sheet& Flashing Cap Sheet: ASTM D6162 Grade G Type III, asphalt-coated composite polyester and glass-fiber-reinforced, white granular surface with the following properties:
   1. Basis of design product: Tremco, POWERply Endure 300 FR.
      a. Tensile Strength at 77 deg. F (25 deg. C), minimum, ASTM D5147: Machine direction 345 lbf/in (60 kN/m); Cross machine direction 340 lbf/in (60 kN/m).
      b. Tear Strength at 77 deg. F (25 deg. C), minimum, ASTM D5147: Machine direction, 600 lbf (2668 N); Cross machine direction 580 lbf (2579 N).
      c. Elongation at 77 deg. F (25 deg. C), minimum, ASTM D5147: Machine direction 12 percent; Cross machine direction 8 percent.
      d. Low Temperature Flex, maximum, ASTM D5147: -35 deg. F (-37 deg. C).
      e. Thickness, minimum, ASTM D5147: 0.145 inch (3.7 mm).

2.5 ADHESIVE AND ASPHALT MATERIALS

A. General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.

B. Water-Based Asphalt Primer: Water-based, polymer modified, asphalt primer with the following physical properties:

1. Asbestos Content, EPA 600/R-93/116: None.

C. Cold-Applied Adhesive for Vapor Barrier Ply Sheets, Cap Sheet and Flashing Sheets: Cold-applied bio-based low odor urethane roofing adhesive, two-part, USDA Bio-Preferred, formulated for compatibility and use with specified roofing membranes and flashings.

1. Basis of design product: Tremco, POWERply Endure BIO Adhesive TF.
   a. Volatile Organic Compounds (VOC), maximum, ASTM D3690: 0 g/L.
   b. Low Temperature Flexibility, ASTM D2240: Pass at -30 deg F (-34 deg C).
   c. Solids, by Volume, ASTM D2697: 100 percent.
   d. Bio-base Content, Minimum, ASTM D6866: 70 percent.

2.6 FLUID-APPLIED FLASHING MATERIALS

A. Fluid-Applied Flashing Material: Polyurethane roof coating system base coat, bio-based, low-odor low-VOC two-part, for use with a compatible topcoat.

1. Basis of design product: Tremco, AlphaGuard BIO Base Coat.
   a. Combustion Characteristics, UL 790: Maintains combustion characteristics of existing roof system.
   b. Volatile Organic Compounds (VOC), maximum, ASTM D3960: 1 g/L.
   c. Accelerated Weathering, 5000 hours, ASTM G154: Pass.
   d. Hardness, Shore A, minimum, ASTM D2240: 80.
   e. Solids, by volume, ASTM D2697: 100 percent.
   f. Bio-Based Content, Minimum: 70 percent.
   g. Minimum Thickness, Base Coat reinforced over Smooth BUR, MB, Concrete, Single-Ply: 48 mils (1.22 mm) wet.

B. Polyurethane roof coating system topcoat, bio-based low-odor low-VOC two-part, for application over compatible base coat.

1. Basis of design product: Tremco, AlphaGuard BIO Topcoat. Combustion Characteristics, UL790: Maintains combustion characteristics of existing roof system.

a. Volatile Organic Compounds (VOC), maximum, ASTM D3960: 6 g/L.
b. Solar Reflectance Index (SRI), ASTM E1980: For white, not less than 103.
c. Accelerated Weathering, 5000 hours, ASTM G 154: Pass.
d. Hardness, Shore A, minimum, ASTM D2240: 81.
e. Solids, by volume, ASTM D2697: 100 percent.
f. Bio-Based Content, Minimum: 60 percent.
g. Minimum Thickness, reinforced system: 32 mils (0.81 mm) wet.
h. Color: White.

C. Polyester Reinforcing and Protection Fabric: 100 percent stitch-bonded mildew-resistant polyester fabric intended for reinforcement of compatible fluid-applied membranes and flashings and as a protection layer under pavers or stone aggregates.
1. Basis of design product: Tremco, Permafab.
a. Tensile Strength, Minimum, ASTM D1682: 50 lbf (23 kg) avg.
b. Elongation, Minimum, ASTM D1682: 60 percent.
c. Tear Strength, Minimum, ASTM D1117: 16 lbf (7.3 kg) avg.
d. Weight: 3 oz./sq. yd (102 g/sq. m).

2.7 FASTENERS

A. Roofing Fasteners: Coated, corrosion-resistant steel fasteners and metal or plastic plates, where applicable, tested by fastener manufacturer for required uplift resistance, and recommended by roofing manufacturer for application.

B. Accessory Fasteners: Corrosion-resistant fasteners compatible with adjacent materials and recommended for application by manufacturer of component to be fastened.

2.8 COATINGS

A. White Roof Coating: Intumescent, fire-retardant, Energy Star Certified, CRRC listed and California Title 24 Energy Code compliant elastomeric, acrylic latex roof coating formulated for use on bituminous roof surfaces, with the following physical properties:
1. Basis of design product: Tremco, Polarcote FR.
2. Asbestos Content, EPA/600/R13/116: None.
3. Volatile Organic Compounds (VOC), maximum, ASTM D3960: 50 g/L.
4. Reflectance, minimum, ASTM C1549: 86 percent.
5. Solar Reflectance Index (SRI), ASTM E1980: 103 initial 80 3 years.

2.9 ROOF WALKWAY

A. Roof Walkways, General: coated walkway area with slip resistant surface.

B. Basis of Design Product: Tremco Alpha guard Bio top coat with sand for slip-resistance.

C. Color: Beige, or as selected by VA, to provide contrast to roof covering.

2.10 ACCESSORIES

A. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine and verify substrates for product installation with roofing Installer and roofing inspector present.

1. Verify roof penetrations are complete, secured against movement, and firestopped.
2. Verify roof deck is adequately secured to resist wind uplift.
3. Verify roof deck is clean, dry, and in-plane ready to receive roofing system.

B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

A. Complete roof deck construction before commencing roofing work:

1. Curbs, blocking, edge strips, nailers, cants, and other components to which roofing and base flashing is attached, in place ready to receive insulation and roofing.
2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of work day.

B. Dry out surfaces including roof deck flutes that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.

C. Broom clean roof decks. Remove dust, dirt and debris.

D. Remove projections capable of damaging roofing materials.

E. Concrete Decks, except Insulating Concrete:

1. Test concrete decks for moisture according to ASTM D4263 before installing roofing materials.
2. Prime concrete decks, including precast units, with primer as specified. Keep primer back 100 mm (4 inches) from precast concrete deck joints.
3. Allow primer to dry before application of bitumen.

F. Insulating Concrete Decks:

1. Allow to dry out minimum five days after installation before installing roofing materials.
2. If rain occurs during or at end of drying period or during installation of roofing, allow additional drying time before the placement of the roofing materials.

G. Existing Membrane Roofs and Repair Areas:

1. Comply with requirements in Section 07 01 50.19 PREPARATION FOR REROOFING.

3.3 TEMPORARY PROTECTION

A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.

B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.

C. Temporarily seal exposed insulation surfaces within roofing membrane.

1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.

2. Direct water away from work. Provide drainage, preventing water accumulation.
3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.

D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.
1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.

E. Remove sandbags and store for reuse.

3.4 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Comply with NRCA Manual installation instructions.

C. Comply with UL 580, UL 1897, for uplift resistance.

3.5 INSTALLATION OF MODIFIED BITUMEN MEMBRANE

A. Primer: Apply primer to substrates where recommended by roofing manufacturer, in application quantities recommended by roofing manufacturer.

B. Install vapor barrier to concrete decks according to manufacturers' instructions.

C. Cold-Applied Adhesive: Apply cold-applied adhesive in application quantities recommended by roofing manufacturer at substrate, between membrane sheets, and as glaze coat where required.

D. Membrane Sheets:
1. Number of Plies: Three, including two (2) ply sheet(s) and one (1) cap sheet.
2. Begin laying sheets at the low points.
3. Using a weighted roller, roll sheets into cold-applied adhesive to firmly embed, free of wrinkles, fishmouths, blisters, bubbles, voids, air pockets or other defects that prevent complete adhesion.
4. Cut to fit closely around pipes, roof drains, bitumen stops, and similar roof projections.
5. Lap sheets shingle fashion starting with starter strips at right angles to slope of roof.

6. Laps for Top Sheet and Base Sheet:
   a. Base sheet, lapped 75 mm (3 inches).
   b. Install 450 mm (18 inch) starting widths, lap top sheet 475 mm (19 inches).
   c. Lap end joints of sheet 150 mm (6 inches). Stagger end joints in relation to end joints in adjacent and proceeding plies.

E. Roof Edges and Terminations:
   1. Where nailers occur at roof edges under gravel stops or penetrations to receive metal base flashing, apply a continuous strip of underlayment over the nailers before the first ply sheet is applied. Strip shall be installed on top of venting base sheet if any.
   2. After membrane is installed, turn the underlayment back over the roofing, and secure in place with cold-applied adhesive before gravel stops or other metal flanges extending out onto the membrane are installed.
   3. Where cants occur at vertical surfaces, cut off roofing sheets 50 mm (2 inches) above top of cant strips, except at prefabricated curbs, scuttles and other roof accessories having integral cants, extend membrane over cant and up vertical surface to top of curb or nailer as shown.
   4. Where fascia-cant occurs at roof edges, extend membrane beyond outside cant face and cut off at outside after base flashing is installed.
   5. Where reglet occurs at vertical surfaces, extend plies roofing sheets up into reglet the full depth of the reglet.

3.6 BASE FLASHING

A. Provide built-up base flashing over cants and as necessary to make work watertight.

B. Prime vertical surfaces of masonry and concrete with asphalt primer if required by manufacturer.

C. Apply flashing on top of roofing, up face of cant and up the face of the vertical surface, at least 200 mm (8 inches) above the roofing but maximum 350 mm (14 inches) above the roofing, generally full height beneath counter flashing or top of curb flashing.
   1. At fascia-cants, extend to top of cant and cut off at top of cant.
   2. At reglet, extend full depth into the reglet.

D. Apply two plies of modified bituminous sheet.
   1. Extend the first ply 100 mm (4 inches) out on the roofing, and the second ply 75 mm (3 inches) beyond the first ply. Lap ends 75 mm (3 inches) with joints broken 450 mm (18 inches) in each ply. Use smooth surface modified bituminous sheet for first ply.
   2. Use granular surfaced modified bitumen cap sheet.
E. Set base flashing in a solid application of cold-applied adhesive.
   1. Set cap sheet in cold-applied adhesive with laps sealed with cold-applied adhesive.
F. Except at metal fascia cants, secure top edge of base flashing with nails on a line approximately 25 mm (1 inch) below top edge, spaced maximum 200 mm (8 inches) on center.
   1. Cover nail heads with roof cement.
   2. Cover the top of the base flashing with counterflashing as specified in Section 07 60 00, FLASHING AND SHEET METAL. At the fascia cants secure the top edge of the flashing with fascia compression clamp as specified in Section 07 60 00, FLASHING AND SHEET METAL.

3.7 APPLICATION OF COATING

A. Apply coating on cap sheet when required to meet solar reflectance performance requirements.
B. Apply coating to membrane and base flashings according to manufacturer's instructions by spray or roller.

3.8 STRIPPING

A. Coordinate to set flanges of metal flashing in roof cement on top sheet of the modified bituminous roofing and mailing to blocking with Section 07 60 00, FLASHING AND SHEET METAL.
B. Cover that portion of the horizontal flanges of metal base flashings, gravel stops, and other flanges extending out onto the roofing with modified bituminous sheet.
C. Extend the sheet out on the roofing 150 mm (6 inches) beyond the edge of the metal flange. Cut edge to fit tight against vertical members of flange.
D. Prime flange before stripping, embed sheet in cold-applied adhesive.

3.9 WALKWAY INSTALLATION

A. Install roof walkways where shown.

3.10 FIELD QUALITY CONTROL

A. Field Inspections:

B. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

1. Fastener Pull Out Tests: ANSI/SPRI FX-1; one test for every 230 sq. m (2,500 sq. ft.) of deck. Perform tests for each combination of fastener type and roof deck type before installing roof insulation.
   a. Test at locations selected by Contracting Officer's Representative.
   b. Do not proceed with roofing work when pull out resistance is less than manufacturer's required resistance.
   c. Test Results:
      1) Repeat tests using different fastener type or use additional fasteners achieve pull out resistance required to meet specified wind uplift performance.
      2) Patch cementitious deck to repair areas of fastener tests holes.
2. Examine and probe roofing membrane and flashing seams in presence of Contracting Officer's Representative and Manufacturer's field representative.
3. Probe seams to detect marginal bonds, voids, skips, and fishmouths.
4. Cut 100 mm (4 inch) wide by 300 mm (12 inch) long samples through seams where directed by Contracting Officer's Representative.
5. Cut one sample for every 450 m (1500 feet) of seams.
6. Cut samples perpendicular to seams.
7. Failure of samples to pass ASTM D1876 test will be cause for rejection of work.
8. Repair areas where samples are taken and where marginal bond, voids, and skips occur.
9. Repair fishmouths and wrinkles by cutting to lay flat. Install patch over cut area extending 100 mm (4 inches) beyond cut.

C. Manufacturer Services:

1. Inspect initial installation, installation in progress, and completed work.
2. Issue supplemental installation instructions necessitated by field conditions.

3. Prepare and submit inspection reports.
4. Certify completed installation complies with manufacturer's instructions and warranty requirements.

3.11 CLEANING

A. Remove excess adhesive before adhesive sets.
B. Clean exposed roofing surfaces. Remove contaminants and stains to comply with specified solar reflectance performance.

3.12 PROTECTION

A. Protect roofing system from traffic and construction operations.
   1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
   2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.
B. Loose lay temporary insulation board overlaid with plywood or OSB.
   1. Weight boards to secure against wind uplift.
C. Remove protective materials immediately before acceptance.
D. Repair damage.

- - - E N D - - -

SECTION 07 60 00
FLASHING AND SHEET METAL

PART 1 - GENERAL

1.1 DESCRIPTION

Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, and formed expansion joint covers are specified in this section.

1.2 RELATED WORK

A. Manufactured flashing, copings, roof edge metal, and fasciae: Section 07 71 00 ROOF SPECIALTIES.
B. Flashing components of factory finished roofing and wall systems: Division 07 roofing and wall system sections.
C. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
D. Color of factory coated exterior architectural metal and anodized aluminum items: Section 09 06 00, match existing colors.
E. Integral flashing components of manufactured roof specialties and accessories or equipment: Section 07 71 00, ROOF SPECIALTIES, Section 07 72 00, ROOF ACCESSORIES.

1.3 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
B. Aluminum Association (AA):

AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick

AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick

AA-C22A44.....Chemically etched medium matte with electrolytically deposited metallic compound,

integrally colored coating Class I Architectural, 0.7-mil thick finish

C. American National Standards Institute/Single-Ply Roofing Institute/Factory Mutual (ANSI/SPRI/FM):

4435/ES-1-11.....Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems

D. American Architectural Manufacturers Association (AAMA):

AAMA 620-02.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Aluminum

AAMA 621-02.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

E. ASTM International (ASTM):

A240/A240M-20.....Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.

A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc Alloy Coated (Galvanized) by the Hot- Dip Process

B32-08 (2014) .....Solder Metal

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate

B370-12 (2019).....Copper Sheet and Strip for Building Construction

D173/D173M-03(2018).....Bitumen-Saturated Cotton Fabrics Used in Roofing and Waterproofing

D412-16.....Vulcanized Rubber and Thermoplastic Elastomers-Tension

D1187/D1187M-97(R2018)..Asphalt Base Emulsions for Use as Protective Coatings for Metal

D1784-20.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds

D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns

D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos Free

F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.

G. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

H. Federal Specification (Fed. Spec):
A-A-1925A.....Shield, Expansion; (Nail Anchors)
UU-B-790A.....Building Paper, Vegetable Fiber

I. International Code Commission (ICC): International Building Code, Current Edition

1.4 PERFORMANCE REQUIREMENTS

A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
1. Wind Zone 2: 40(60) lbf/sq. ft.: 65(108)-lbf/sq. ft. perimeter uplift force, 90(148)-lbf/sq. ft. corner uplift force, and 45(75)-lbf/sq. ft. outward force. Pressures given are based on Allowable Stress Load combinations. Values in ( ) are ultimate loads.

B. Wind Design Standard: Fabricate and install copings roof-edge flashings tested per ANSI/SPRI/FM ES-1 to resist design pressure 90(150) lbf/sq. ft

1.5 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: For all specified items, including:
1. Flashings
2. Copings

C. Manufacturer's Literature and Data: For all specified items, including:
1. Two-piece counterflashing
2. Thru wall flashing
3. Nonreinforced, elastomeric sheeting
4. Polyethylene coated copper
5. Bituminous coated copper
6. Fascia-cant

D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

A. Stainless Steel: ASTM A240, Type 302B, dead soft temper.

B. Copper ASTM B370, cold-rolled temper.

C. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or, copper sheets may be bonded between two layers of coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.

D. Polyethylene Coated Copper: Copper sheet ASTM B370, weighing 1 Kg/m² (3 oz/sf) bonded between two layers of (two mil) thick polyethylene sheet.

E. Aluminum Sheet: ASTM B209, alloy 3003-H14 except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14.

F. Galvanized Sheet: ASTM, A653.

G. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.

B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m²(6 lbs/100 sf).

C. Bituminous Paint: ASTM D1187, Type I.

D. Fasteners:

1. Use copper, copper alloy, bronze, brass, or stainless steel for copper and copper clad stainless steel, and stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.

2. Nails:
   a. Minimum diameter for copper nails: 3 mm (0.109 inch).
   b. Minimum diameter for aluminum nails 3 mm (0.105 inch).
   c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
   d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
3. Rivets: Not less than 3 mm (1/8 inch) diameter.
4. Expansion Shields: Fed Spec A-A-1925A.

E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

F. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:

B. Concealed Locations (Built into Construction):
1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
2. Stainless steel: 0.25 mm (0.010 inch) thick.
3. Copper clad stainless steel: 0.25 mm (0.010 inch) thick.
4. Galvanized steel: 0.5 mm (0.021 inch) thick.

C. Exposed Locations:
1. Copper: 0.4 Kg (16 oz).
2. Stainless steel: 0.4 mm (0.015 inch).
3. Copper clad stainless steel: 0.4 mm (0.015 inch).

D. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

A. Jointing:
1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
3. Joints shall conform to following requirements:

a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.

4. Flat and lap joints shall be made in direction of flow.
5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
6. Soldering:
   a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of uncoated copper, stainless steel, and copper clad stainless steel.
   b. Wire brush to produce a bright surface before soldering lead coated copper.
   c. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
   d. Completely remove acid and flux after soldering is completed.

B. Expansion and Contraction Joints:
1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
2. Space joints as shown or as specified.
3. Space expansion and contraction joints for copper, stainless steel, and copper clad stainless steel at intervals not exceeding 7.2 m (24 feet).
4. Space expansion and contraction joints for aluminum at intervals not exceeding 5.4 m (18 feet), except do not exceed 3.0 m (10 feet) for gravel stops and fascia-cant systems.
5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
6. Fabricate joint covers of same thickness material as sheet metal served.

C. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 30 cm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 30 cm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips or minimum 0.6 Kg (24 ounce)copper 0.6 mm (0.024 inch) thick stainless steel, or 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3.0 m (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 1 Kg (32 oz) copper, 0.8 mm (0.031 inch) thick stainless steel, or 1.6 mm (0.0625 inch) thick aluminum.

E. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:
   1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
   2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
   3. All metal roof edges shall meet requirements of IBC, current edition.
G. Metal Options:
   1. Where options are permitted for different metals use only one metal throughout.
   2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
   3. Where copper gravel stops, copings and flashings will carry water onto cast stone, stone, or architectural concrete, or stainless steel.

2.5 FINISHES

A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
C. Finish exposed metal surfaces as follows, unless specified otherwise:
   1. Copper: Mill finish.
   2. Stainless Steel: Finish No. 2B or 2D.
   3. Aluminum:
      a. Clear Finish: AA-C22A41 medium matte, clear anodic coating, Class 1 Architectural, 18 mm (0.7 mils) thick.
      b. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.
      c. Fluorocarbon Finish: AAMA 620, high performance organic coating.
      d. Mill finish.
   4. Steel and Galvanized Steel:

a. Finish painted under Section 09 91 00, PAINTING unless specified as prefinished item.
b. Manufacturer's finish:
   1) Baked on prime coat over a phosphate coating.
   2) Baked-on prime and finish coat over a phosphate coating.
   3) Fluorocarbon Finish: AAMA 621, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
   1. Fabricate in not less than 2.4 m (8 feet) lengths; 3.0 m (10 feet) maximum lengths.
   2. Fabricate so keying nests at overlaps.
B. For Masonry Work When Concealed Except for Drip:
   1. Either copper, stainless steel, or copper clad stainless steel.
   2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
   3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
   1. Use same metal and thickness as counter flashing.
   2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
   3. Form exposed portion as snap lock receiver for counter flashing upper edge.
D. For Flashing at Architectural Precast Concrete Panels or Stone Panels.
   1. Use plan flat sheet of stainless steel.
   2. Form exposed portions with drip as specified or receiver.
E. Window Sill Flashing and Lintel Flashing:
   1. Use either copper, stainless steel, copper clad stainless steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
   2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.

3. Turn up back edge as shown.
4. Form exposed portion with drip as specified or receiver.

F. Door Sill Flashing:
1. Where concealed, use either 0.5 Kg (20 oz) copper, 0.5 mm (0.018 inch) thick stainless steel, or 0.5 mm (0.018 inch) thick copper clad stainless steel.
2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use either 0.6 Kg (24 ounce) copper, 0.6 mm (0.024 inch) stainless steel, or 0.6 mm (0.024 inch) thick stainless steel.
3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.7 BASE FLASHING

A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.
1. Use either copper, or stainless steel, thickness specified unless specified otherwise.
2. When flashing is over 25 cm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) copper or 0.5 mm (0.018 inch) stainless steel.
3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
4. Use either copper, or stainless steel at pipe flashings.

B. Fabricate metal base flashing up vertical surfaces not less than 20 cm (8 inch) nor more than 40 cm (16 inch).

C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2.4 m (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.

D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.

E. Pipe Flashing: (Other than engine exhaust or flue stack)
1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.

2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
3. At low pipes 200 mm (8 inch) to 45 cm (18 inch) above roof:
   a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
   b. Allow for loose fit around and into the pipe.
4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
   a. Extend sleeve up not less than 30 cm (12 inch) above roofing.
   b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. Either copper or stainless steel, unless specified otherwise.
B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
   1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
   2. In general, form flashing in lengths not less than 2.4 m (8 feet) and not more than 3.0 m (10 feet).
   3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
   4. Manufactured assemblies may be used.
   5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
   6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
C. One-piece Counterflashing:
   1. Back edge turned up and fabricate to lock into reglet in concrete.
   2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).
D. Two-Piece Counterflashing:
   1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.

2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:

1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 40 cm (16 inch) centers between upper and lower edge.

F. Pipe Counterflashing:

1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) over lap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.6 Kg (24 oz) copper or 0.33 mm (0.013 inch) thick stainless steel or copper coated stainless steel.
4. Use stainless steel bolt on draw band tightening assembly.
5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.9 REGLETS

A. Fabricate reglets of one of the following materials:

1. 0.4 Kg (16 ounce) copper.
2. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
3. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1.0 m (40 inches) on centers.

4. Plastic, ASTM D1784, Type II, not less than 2 mm (0.075 inch) thick.

B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.

C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.

D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.

E. Fabricate mitered corners, fittings, and special shapes as may be required by details.

F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

2.10 INSULATED EXPANSION JOINT COVERS

A. Either type optional, use only one type throughout.

B. Types:

1. Construct of two preformed, stainless steel strips, not less than 0.4 mm (0.015 inch) thick, mechanically and adhesively bonded to both sides of a 2 mm (1/16 inch) thick neoprene or butyl sheet, or to a 0.4 mm (32 mil) thick reinforced chlorinated polyethylene sheet. Adhesively attach a 10 mm (3/8 inch) thick sheet of closed cell, neoprene foam insulation, to the underside of the neoprene, butyl, or chlorinated polyethylene sheet.

2. Constructed of a 2 mm (1/16 inch) thick vinyl sheet, flanged at both sides with stainless steel strips not less than 0.4 mm (0.015 inch) thick. Vinyl sheet locked and encased by the stainless steel strip and prepunched for nailing. A 10 mm (3/8 inch) thick closed cell polyvinyl chloride foam insulating strip shall be heat laminated to the underside of the vinyl sheet between the stainless steel strips.

C. Expansion joint covers shall have factory fabricated mitered corners, crossing tees, and other necessary accessories. Furnish in the longest available lengths.

D. Metal flange of sufficient width to extend over the top of the curb and down curb sides 50 mm (2 inches) with hemmed edge for lock to edge strip.

2.11 SCUPPERS

A. Fabricate scuppers with minimum of 100 mm (4 inch) wide flange.
B. Provide flange at top on through wall scupper to extend to top of base flashing.
C. Fabricate exterior wall side to project not less than 13 mm (1/2 inch) beyond face of wall with drip at bottom outlet edge.
D. Fabricate not less than 100 mm (4 inch) wide flange to lap behind gravel stop fascia.
E. Fabricate exterior wall flange for through wall scupper not less than 25 mm (one inch) wide on top and sides with edges hemmed.
F. Fabricate gravel stop bar of 25 mm x 25 mm (one by one inch) angle strip soldered to bottom of scupper.
G. Fabricate scupper not less than 200 mm (8 inch) wide and not less than 125 mm (5 inch) high for through wall scupper.
H. Solder joints watertight.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:
1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each

ply 50 mm (2 inch) with the slope and nail with large headed copper nails.

7. Confine direct nailing of sheet metal to strips 30 cm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
    a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
    b. Paint dissimilar metal with a coat of bituminous paint.
    c. Apply an approved caulking material between aluminum and dissimilar metal.
15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
17. Bitumen Stops:

a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
b. Nail leg of bitumen stop at 30 cm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

3.2 THROUGH-WALL FLASHING

A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches)and use thickness of metal as specified for exposed locations.
3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.

13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
14. Continue flashing around columns:
    a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
    b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).

B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.

C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).

D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.

E. Flashing at Veneer Walls:
    1. Install near line of finish floors over shelf angles or where shown.
    2. Turn up against sheathing.
    3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
    4. At concrete backing, extend flashing into reglet as specified.
    5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

F. Lintel Flashing when not part of shelf angle flashing:
    1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
    2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
    3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Window Sill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

I. Flashing at Masonry, Stone, or Precast Concrete Copings:

1. Install flashing with drips on both wall faces unless shown otherwise.
2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

3.3 BASE FLASHING

A. Install where roof membrane type base flashing is not used and where shown.

1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored

with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.

B. For long runs of base flashings install in lengths of not less than 2.4 m (8 feet) nor more than 3.0 m (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2.4 m (8 feet) in length. Lock and solder corner joints at corners.

C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.
   a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 40 cm (16 inch) on center:
      1) Locate fasteners in masonry mortar joints.
      2) Use screws to sheet metal or wood.

b. Fill joint at top with sealant.

C. Two-Piece Counterflashing:

1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
2. Surface applied type receiver:
   a. Secure to face construction in accordance, with manufacturers instructions.
   b. Completely fill space at the top edge of receiver with sealant.
3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.

D. Where vented edge occur install so lower edge of counterflashing is against base flashing.

E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

A. Install reglets in a manner to provide a watertight installation.

B. Locate reglets not less than 225 mm (9 inch) nor more than 40 cm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 32.5 cm (13 inch) above cant strip.

C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:

1. Coordinate reglets for anchorage into concrete with formwork construction.
2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.6 COPINGS

A. General:

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.

3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 71 00
ROOF SPECIALTIES

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies copings, gravel stops, fascias, and expansion joints.

1.2 RELATED WORK:

A. Sealant Material and Installation: Section 07 92 00, JOINT SEALANTS.

B. Rigid Insulations for Roofing: Section 07 22 00, ROOF AND DECK INSULATION

1.3 QUALITY CONTROL:

A. Provide roof accessories that products of manufacturers regularly engaged in producing the kinds of products specified.

B. For each accessory type provide products made by the same manufacturer.

C. Assemble each accessory to the greatest extent possible before delivery to the site.

1.4 PERFORMANCE REQUIREMENTS:

A. Provide roof accessories that withstand exposure to weather and resist thermal movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, or installation.

B. Manufacture and install roof accessories to allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects.

1. Provide clips that resist rotation and avoid shear stress as a result of thermal movements.
2. For design purposes, base provisions for thermal movement on assumed ambient temperature (range) from minus 18 degrees C (0 degrees F), ambient to 82 degrees C (180 degrees F).

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples: Representative sample panel of color-anodized aluminum not less than 101 x 101 mm (4 x 4 inches), except extrusions are to be of a width not less than section to be used. Submit sample that shows

coating with integral color and texture. Include manufacturer's identifying label.

D. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.

E. Manufacturer's Literature and Data: Each item specified.

F. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar

B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate

B209M-14.....Aluminum and Aluminum Alloy-Sheet and Plate (Metric)

B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B221M-13.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)

B32-08(2014).....Solder Metal

B370-12 (2019).....Copper Sheet and Strip for Building Construction

B882-10 (2018).....Pre-Patinated Copper for Architectural Applications

C612-14(2019).....Mineral Fiber Block and Board Thermal Insulation

D1187/D1187M-97 (2018)..Asphalt-Base Emulsions for Use as Protective Coatings for Metal

D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection

D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing

D4869/D4969M-16a.....Asphalt-Saturated Organic Felt Underlayment Used In Steep Slope Roofing

C. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

D. American Architectural Manufacturers Association (AAMA):

2605-11.....High Performance Organic Coatings on Architectural Extrusions and Panels.

611-14.....Anodized Architectural Aluminum

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Aluminum, Extruded: ASTM B221M (B221).

B. Aluminum Sheet: ASTM B209M (B209).

C. Galvanized Sheet Steel: ASTM A653/A653M; G-90 coating.

D. Insulation: ASTM C1289, Type II, Class 1, Grade 2.

E. Asphalt Coating: ASTM D1187, Type I, quick setting.

2.2 COPINGS:

A. Fabricate of aluminum sheet not less than 0.125 inch thick; 16 oz. copper 0.5 mm (0.018 inch) thick; stainless steel.

B. Turn outer edges down each face of wall as shown on construction documents.

C. Maximum lengths of 3.05 M (10 feet).

D. Shop fabricate external and internal corners as one-piece assemblies with not less than 305 mm (12 inch) leg lengths.

E. Provide 101 mm (4 inch) wide 0.81 mm (0.032 inch) thick watertight joint covers.

F. Provide anchor gutter bar of 0.81 mm (0.032 inch) thick with anchor holes formed for underside of joint.

G. Provide concealed guttered splice plate of 0.81 mm (0.032 inch) thick with butyl or other resilient seal strips anchored to splice plate for underside of joint. Use galvanized steel anchor plate providing compression spring anchoring of coping cover.

H. Finish: Three-coat fluoropolymer to match existing color and finish.

2.3 EXTRUDED ALUMINUM ROOF EXPANSION JOINT COVERS:

A. Fabricate in 3.0 M (10 foot) lengths with fastener openings slotting for expansion not over 610 mm (24 inch) centers.

B. Provide four-way expansion, for joint widths shown on construction documents.

C. Mill finish.

D. Form waterstop or moisture seals of continuous sheets of neoprene, not less than 0.81 mm (0.032 inch) thick.

E. Fabricate corners as one (1) piece assembly with mitered and welded joint and least dimension legs not less than 300 mm (12 inches) long.

F. Factory fabricate end caps and transitions to insure waterproof assembly.

G. Five (5) piece assembly:

1. Roof expansion joint cover system consists of an extruded aluminum cover, extruded frame or curb vertical section, galvanized steel cant, and aluminum compression clamp counter flashing, complete with moisture seals. Form cover and vertical section from extruded aluminum, 2 mm (0.080 inch) minimum thickness with spring stainless steel tension or pivot bar.
2. Form cant from galvanized steel not less than 0.8 mm (0.029 inch) thick formed to profile shown on construction documents.
3. Form splice plates of not less than 0.81 mm (0.032 inch) thick aluminum sheet.
4. Form counter flashing member of 1.3 mm (0.050 inch) thick sheet aluminum, secured with screws to the top edge of the vertical section and providing compression clamp over base flashing.
5. Provide compression gasket separating cover from curb bearing.

H. Two (2) piece assembly:

1. Roof expansion joint system consists of an extruded aluminum cover combination extruded aluminum frame or curb with integral adjustable counter flashing flange, and moisture seals.
2. Form cover from extruded aluminum 2 mm (0.078 inch) minimum thickness.
3. Form cover anchor system of stainless steel pivot bar.
4. Form frame assembly of not less than 2 mm (0.076 inch) aluminum except for flashing portion.

5. Provide compression gasket separating cover from curb at bearing.

2.4 FINISH:

A. In accordance with NAAMM AMP 500-505.

B. Aluminum, Mill Finish: AA-MIX, as fabricated.

C. Aluminum, Clear Anodic Finish AAMA 611: AA-M12C22A41, Class I, 0.017 mm (0.7 mil) thick (min.). AA12C22A31 Class II, Architectural, 0.010 mm (0.4 mil) thick (min.).

D. Aluminum Color Anodic Finish AAMA 611: AA-C22A42 (anodized or AA0C22A44 (electrolytically deposited metallic compound), Class 1, Architectural, 0.017 mm (0.7 mil) thick (min. Class II, Architectural, 0.010 mm (0.4 mil) thick (min.). Dyes will not be accepted.

E. Fluoropolymer Finishes: High performance organic coating. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in both color coat and top color coat.
2. Concealed Surface Finish: Apply pretreatment and manufacturer's standard acrylic or polyester backer finish consisting of prime coat and wash coat with a minimum total dry film thickness of 0.013 mm (0.5 mil).

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Examine substrates, areas, and conditions, to verify actual locations, dimensions, and other conditions affecting performance of the Work.

B. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.

C. Install roof accessories where indicated in construction documents.

D. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise. Provide fasteners suitable for application, for metal types being secured and designed to meet performance requirements.

E. Coordinate to install insulation where shown; see Section 07 22 00, ROOF AND DECK INSULATION.

F. Comply with section 07 92 00, JOINT SEALANTS to install sealants where required by manufactures installation instructions.

G. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.

H. Aluminum Coping:

1. Install sections of coping with approximately 6 mm (1/4-inch) space between ends of sections.
2. Center joint gutter bar and covers at joints and lock in place.
3. When snap-on system is installed ensure front and back edges are locked in place.

I. Expansion Joint Covers:

1. Install to terminate base flashing 203 mm (8 inches) above roof.
2. Install moisture seals to drain water to outlets that do not permit water to enter building.
3. Provide stainless steel screws when exposed.
4. Three piece assembly:
   a. Install curb section with screws to wood blocking, allowing 6 mm (1/4 inch) at butt joints between sections with splice plate at joint.
   b. Install cant to wood blocking by nailing along horizontal flange every 152 mm (6 inches), with galvanized roofing nails 25 mm (1 inch) long.
   c. After completion of base flashing install cap flashing and compression clamp and fasten to the curb or metal cant with stainless steel self-tapping screws with neoprene washers under head spaced approximately 457 mm (18 inches) on center.
   d. Install expansion joint cover with a 6 mm (1/4 inch) wide end joints.
   e. Install over end joint a cover plate complete with concealed aluminum flashing, centered under each joint. Fabricate flashing to lap cover not less than 101 mm (4 inches.
5. Two piece assembly:
   a. Install curb section with screws allowing 6 mm (1/4 inch) space at end joints with splice plate at joint.
   b. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
   c. Install expansion joint cover with 6 mm (1/4 inch) wide space at end joints and tension bars at 610 mm (24 inches) on center.

d. Install cover plates with formed aluminum flashing concealed and centered on joint. Flashing to lap cover not less than 101 mm (4 inches).

3.2 PROTECTION OF ALUMINUM:

A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on one (1) side.

B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two (2) coats of asphalt coating.

3.3 ADJUSTING:

A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION:

A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 72 00
ROOF ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies roof hatches; equipment supports; gravity ventilators; and metal grating roof walkway system.

1.2 RELATED WORK:

A. Color and texture of finish: match existing color and texture.

B. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.

C. Rigid insulations for roofing: Section 07 22 00, ROOF AND DECK INSULATION

1.3 QUALITY ASSURANCE:

A. Provide roof accessories that are the products of manufacturers regularly engaged in producing the kinds of products specified.

B. For each accessory type provide the same product made by the same manufacturer.

C. Assemble each accessory to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples: Submit representative sample panel of color anodized aluminum not less than 101 x 101 mm (4 x 4 inches). For extrusions, submit width not less than section to be installed. Show coating with integral color and texture and include manufacturer's identifying label.

C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.

D. Manufacturer's Literature and Data: Each item specified.

E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.5 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) By the Hot-Dip Process

B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)

B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)

C726-17.....Mineral Wool Roof Insulation Board

C1289-19.....Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board

D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal

C. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06 Series.....Metal Finishes Manual

D. American Architectural Manufacturers Association (AAMA):

2603-20.....Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels

2605-20.....High Performance Organic Coatings on Architectural Extrusions and Panels.

611-14.....Anodized Architectural Aluminum

621-02.....High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

E. American Society of Civil Engineers (ASCE):

ASCE/SEI 7-16.....Minimum Design Loads for Buildings and Other Structures

F. U.S. Occupational Safety and Health Standards (OSHA):

29 CFR 1910 Subpart D... Walking-Working Surfaces (1910.21-1910.30)

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Aluminum, Extruded: ASTM B221M (B221).

B. Aluminum Sheet: ASTM B209M (B209).

C. Galvanized Sheet Steel: ASTM A653/A653M; G-90 coating.

D. Asphalt Coating: ASTM D1187/D1187M, Type I, quick setting.

2.2 EQUIPMENT SUPPORTS:

A. Supported Load Capacity: Existing equipment.

B. Fabricate equipment supports from 1.3 mm (0.0516 inch) thick galvanized ASTM A653/A653M steel fabricate with welded corners and with seams joined by continuous water and air tight welds.

C. Equipment supports to be internally reinforced with angles 1.22 m (48 inches) on center.

D. Form exterior curb with integral base.

E. Use galvanized steel liners for curbs having inside dimension over 305 mm (12 inches).

F. Internally insulate with 38 mm (1-1/2 inch) glass-fiber board insulation (ASTM C726).

G. Fabricate curb with a minimum height of 203 mm (8 inches) above roof surface.

H. Attach preservative treated wood nailers to top of curb. Provide 50 mm (2 inch) by 50 mm (2 inch) minimum nominal size on curb with openings and 50 mm (2 inch) thick, width of curb up to 305 mm (12 inches) on equipment support curbs.

H. Make size of supports suit size of equipment furnished, with height as shown on construction documents, but not less than 203 mm (8 inches) above roof surface.

I. Top of Equipment Supports: Level with pitch built into curb when deck slopes. Equip supports with water diverter or cricket on side that obstructs water flow.

2.3 FINISH:

A. In accordance with NAAMM AMP 500 Series.

B. Aluminum, Mill Finish: AA-MIX, as fabricated.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Install roof specialties where indicated on construction documents.

B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.

C. Coordinate to install insulation where shown; Section 07 22 00, ROOF AND DECK INSULATION.

D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where required by manufactures installation instructions require sealant.

E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.

1. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
2. Install expansion joint cover with 6 mm (1/4 inch) wide space at end joints and tension bars at 610 mm (24 inches) on center.
3. Install cover plates with formed aluminum flashing concealed and centered on joint. Flashing to lap cover not less than 101 mm (4 inches).

F. Equipment Supports: Do not anchor to insulating concrete or metal deck. Anchor only to building structure as per manufacturer’s recommendations.

3.2 PROTECTION OF ALUMINUM:

A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.

B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.3 PROTECTION:

A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

SECTION 07 84 00
FIRESTOPPING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.

B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK:

A. Sealants and application: Section 07 92 00, JOINT SEALANTS.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Installer qualifications.

D. Inspector qualifications.

E. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.

F. List of FM, UL, or WH classification number of systems installed.

G. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

H. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

1.4 DELIVERY AND STORAGE:

A. Deliver materials in their original unopened containers with manufacturer’s name and product identification.

B. Store in a location providing protection from damage and exposure to the elements.

1.5 QUALITY ASSURANCE:

A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL’s “Qualified Firestop Contractor Program Requirements.” Submit qualification data.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

E84-20.....Surface Burning Characteristics of Building Materials

E699-16.....Standard Practice for Evaluation of Agencies Involved in Testing, Quality Assurance, and Evaluating of Building Components

E814-13a (2017).....Fire Tests of Through-Penetration Fire Stops

E2174-20a.....Standard Practice for On-Site Inspection of Installed Firestops

E2393-20.....Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers

C. FM Global (FM):

Annual Issue Approval Guide Building Materials

4991-13.....Approval of Firestop Contractors

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

723-Edition 11(2018)....Standard for Test for Surface Burning Characteristics of Building Materials

1479-04(2015).....Fire Tests of Through-Penetration Firestops

E. Intertek Testing Services - Warnock Hersey (ITS-WH):

Annual Issue Certification Listings

F. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS:

A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.

B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 in.) nominal pipe or 0.01 sq. m (16 sq. in.) in overall cross sectional area.

C. Firestop sealants used for firestopping or smoke sealing to have the following properties:
   1. Contain no flammable or toxic solvents.
   2. Release no dangerous or flammable out gassing during the drying or curing of products.
   3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
   4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:
   1. Classified for use with the particular type of penetrating material used.
   2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.

E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.

F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.

G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.

H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
   1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
   2. For floor penetrations with annular spaces exceeding 101 mm (4 in.) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.
   3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS:

A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
B. Provide mineral fiber filler and bond breaker behind sealant.
C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.
D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION:

A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.
B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION:

A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION:

A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP:

A. As work on each floor is completed, remove materials, litter, and debris.

B. Clean up spills of liquid type materials.

C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.

D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK:

A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).

B. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

A. Masonry Control and Expansion Joint in new construction: Section 04 20 00, UNIT MASONRY.

B. Masonry Control and Expansion Joint: Section 04 20 00, UNIT MASONRY.

C. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING.

1.3 QUALITY ASSURANCE:

A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.

B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.

C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.

1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1.1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
   1. Locate test joints where indicated in construction documents or, if not indicated, as directed by COR.
   2. Conduct field tests for each application indicated below:
      a. Each type of elastomeric sealant and joint substrate indicated.
      b. Each type of non-elastomeric sealant and joint substrate indicated.
   3. Notify COR seven (7) days in advance of dates and times when test joints will be erected.
   4. Arrange for tests to take place with joint sealant manufacturer’s technical representative present.

E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/1 VOC content.

F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections and to demonstrate aesthetic effects and qualities of materials and execution:
   1. Joints in mockups of assemblies that are indicated to receive elastomeric joint sealants, which are specified by reference to this section.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Installer qualifications.

C. Contractor certification.

D. Manufacturer's installation instructions for each product used.

E. Cured samples of exposed sealants for each color.

F. Manufacturer's Literature and Data:
   1. Primers
   2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

G. Manufacturer warranty.

1.5 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
   a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
   b. When joint substrates are wet.

B. Joint-Width Conditions:
   1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:
   1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.7 DEFINITIONS:

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Backing Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.

B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5)years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material

C612-14.....Mineral Fiber Block and Board Thermal Insulation

C717-14a.....Standard Terminology of Building Seals and Sealants

C734-06(R2012).....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering

C794-10.....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants

C919-12.....Use of Sealants in Acoustical Applications.

C920-14a.....Elastomeric Joint Sealants.

C1021-08(R2014).....Laboratories Engaged in Testing of Building Sealants

C1193-13.....Standard Guide for Use of Joint Sealants.

C1248-08(R2012).....Test Method for Staining of Porous Substrate by Joint Sealants

C1330-02(R2013).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants

C1521-13.....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints

D217-10.....Test Methods for Cone Penetration of Lubricating Grease

D1056-14.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber

E84-09.....Surface Burning Characteristics of Building Materials

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

D. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:

1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade P.
5. Shore hardness of 15-45.

F. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.

4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7:
1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

H. S-8:
1. ASTM C920, silicone, acetify cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

I. S-9:
1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

J. S-10:
1. ASTMC C920, coal tar extended fuel resistance polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 15-20.

K. S-11:
1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

L. S-12:

1. ASTM C920, polyurethane.
2. Type M/S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade P/NS.
5. Shore A hardness of 25 to 50.

M. Exterior Sealants:
1. Vertical surfaces, provide non-staining ASTM C920, Type S or M, Grade NS, Class 25, Use NT.
2. Horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T.
3. Provide location(s) of exterior sealant as follows:
   a. Joints formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Provide sealant at exterior surfaces of exterior wall penetrations.
   b. Metal to metal.
   c. Masonry to masonry or stone.
   d. Stone to stone.
   e. Cast stone to cast stone.
   f. Masonry expansion and control joints.
   g. Wood to masonry.
   h. Masonry joints where shelf angles occur.
   i. Voids where items penetrate exterior walls.
   j. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.

2.2 COLOR:

A. Sealants used with exposed masonry are to match color of mortar joints.
B. Sealants used with unpainted concrete are to match color of adjacent concrete.
C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
   1. Type C: Closed-cell material with a surface skin.

C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 WEEPS:

A. Weep/Vent Products: Provide the following unless otherwise indicated or approved.
   1. Round Plastic Tubing: Medium-density polyethylene, 10 mm (3/8-inch) OD by thickness of stone or masonry veneer.
   2. Louvered Weep.

2.5 FILLER:

A. Mineral fiberboard: ASTM C612, Class 1.

B. Mineral wool batt: ASTM C665, Type I.

C. Thickness same as joint width.

D. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

2.7 CLEANERS-NON POROUS SURFACES:

A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:
   a. Metal.
   b. Glass.
   c. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.

3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.

1. Apply primer prior to installation of back-up rod or bond breaker tape.
2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.

B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.

C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.

D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.

E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.

4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to “skin” over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
11. Replace sealant which is damaged during construction process.

B. Weeps: Place weep holes and vents in joints where moisture may accumulate, including at base of cavity walls, above shelf angles, at all flashing, and as indicated on construction documents.
   1. Use round plastic tubing to form weep holes.
   2. Space weep holes formed from plastic tubing not more than 406 mm (16 inches) o.c.
   3. Trim tubing material used in weep holes flush with exterior wall face after sealant has set.

C. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.

3.6 FIELD QUALITY CONTROL:

A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
   1. Extent of Testing: Test completed elastomeric sealant joints as follows:
      a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.

b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.

B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.

C. Inspect tested joints and report on following:

1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
2. Compare these results to determine if adhesion passes sealant manufacturer’s field-adhesion hand-pull test criteria.
3. Whether sealants filled joint cavities and are free from voids.
4. Whether sealant dimensions and configurations comply with specified requirements.

D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.

E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.

F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.

B. Leave adjacent surfaces in a clean and unstained condition.

3.8 LOCATIONS:

A. Exterior Building Joints, Horizontal and Vertical:

1. Metal to Metal: Type S-1, S-2
2. Metal to Masonry or Stone: Type S-1
3. Coping Stone to Coping Stone: Type S-1
4. Masonry Expansion and Control Joints: Type S-6

B. Metal Reglets and Flashings:

1. Flashings to Wall: Type S-6
2. Metal to Metal: Type S-6

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 51 13
ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum windows for renovation work .

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS: Sealing Joints.

B. Section 08 80 00, GLAZING: Glazing.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Architectural Manufacturers Associations (AAMA):

AAMA/WDMA/CSA 101/I.S.2/A440-17 Windows, Doors, and Skylights.

AAMA 505-17.....Dry Shrinkage and Composite Performance Thermal Cycle Test Procedures.

AAMA 2605-20.....Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.

AAMA TIR A8-16.....Structural Performance of Composite Thermal Barrier Framing System.

C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):

7-16.....Minimum Design Loads for Buildings and Other Structures.

D. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):

90.1-19.....Energy Standard for Buildings Except Low-Rise Residential Buildings.

E. ASTM International (ASTM):

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric).

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).

E283-19.....Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.

E331-00(2016).....Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Architect/Engineer.
   c. Contractor.
   d. Installer.
   e. Manufacturer's field representative.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Transitions and connections to other work.
   g. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTAL

A. Submit according to Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Indicate window types required for project.
2. Identify window unit components by name and type of metal or material, show construction, locking systems, mechanical operators, trim, installation and anchorages.
3. Include glazing details and standards for factory glazed units.

C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.
   3. Warranty.
D. Samples:
   1. Window Frame: 150 mm (6 inch) long samples showing finishes, specified.
E. Test reports: Indicate each product complies with specifications.
   1. Windows.
   2. Operating hardware.
F. Certificates: Indicate each product complies with requirements (window characteristics may be on window schedule or other drawings).

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:
   1. Regularly manufactures specified products.
   2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
B. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.
C. Quality Certified Labels or Certificates:
   1. AAMA Label affixed to each window indicating compliance with specification.
   2. Certificates in lieu of label with copy of test report maximum 4 years old from independent testing laboratory and certificate signed by window manufacturer stating that windows provided comply with specified requirements and AAMA/WDMA/CSA 101/I.S.2/A440 for type of window specified.

1.7 STORAGE AND HANDLING

A. Protect windows from damage during handling and construction operations before, during and after installation.
B. Store windows under cover, setting upright.
C. Do not stack windows flat.
D. Do not lay building materials or equipment on windows.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant windows against material and manufacturing defects.
   1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design windows complying with specified performance:
   1. Load Resistance: Design criteria as indicated on Drawings .
      a. Performance Grade: AAMA/WDMA/CSA 101/I.S.2/A440 required to resist maximum positive and negative wind load.
   2. Thermal Transmittance: Maximum U-value watt/square meter/degree K (Btu/square foot/hour/degree F).
      a. Insulating Glass Windows: U-2.8 (U-0.5).
      b. Dual Glazed Windows: U-4.0 (U-0.7), or as required by ASHRAE 90.1.
   3. Condensation Resistance Factor (CRF): NFRC 500 Minimum CRF of C 55 .
   4. Water Resistance: ASTM E331; No uncontrolled penetration at 390 Pa (8.00 pound square foot) , minimum, pressure differential.
   5. Air Infiltration Resistance: ASTM E283; 0.5 liter/second/square meter (0.1 cubic foot/minute/square foot.) minimum, pressure differential.

B. Provide the following operation types for locations indicated on the Drawings.
   1. Fixed Windows:
      a. Performance Class and Grade: AAMA/WDMA/CSA 101/I.S.2/A440, minimum AW-40 .

2.2 MATERIALS

A. Aluminum Extrusions: ASTM B221M (ASTM B221); 6063 alloy, T6 temper.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Kawneer OPTIQ AA 4325 Series High Thermal Window - Fixed.
   1. Front Glazed, thermally broken, hurricane resistant.

B. Provide windows from one manufacturer.

2.4 ALUMINUM WINDOWS

A. Frames and Sashes: Aluminum extrusions, AAMA/WDMA/CSA 101/I.S.2/A440.

B. Thermal-Break Window Construction:
   1. Manufacturer’s Standard.

2. Low conductance thermal barrier.
3. Capable of structurally holding sash in position and together.
4. Thermal Break Assemblies: Tested according to AAMA TIR A8 and AAMA 505.
5. Design location of thermal break so that, in closed position, outside air does not come in direct contact with interior frame of window.

C. Mullions: Match window units.

D. Provide anchors and other related accessories required for installation.

2.5 GLAZING

A. Glass and Glazing: As specified in Section 08 80 00, GLAZING.
1. Factory glaze windows.
2. Weep holes through glazed areas are not acceptable.

2.6 FABRICATION

A. Fabricate windows to comply specified performance class and grade.
1. Assemble frame and sash so fasteners are concealed when window is closed.
2. Where extrusion wall thickness is less than 3 mm (0.125 inch) thick, provide backup plates or similar reinforcements for fasteners.

B. Aluminum Trim:
1. Trim includes casings, closures, and panning.
2. Fabricate to shapes shown, minimum 1.6 mm (0.062 inch) thick.
3. Extruded or formed sections, straight, true, and smooth on exposed surfaces.
4. Exposed external corners mitered and internal corners coped; fitted with hairline joints.
5. Reinforce 1.6 mm (0.062 inch) thick members with minimum 3 mm (1/8 inch) thick aluminum.
6. Except for strap anchors, provide reinforcing for fastening near ends and spaced maximum 300 mm (12 inches) on center.
7. Design to allow unrestricted expansion and contraction of members and window frames.
8. Secure to window frames with machine screws or expansion rivets.
9. Exposed screws, fasteners or pop rivets are not acceptable on exterior of casing or trim cover system.

C. Aluminum Subsills and Stools:
   1. Fabricate to shapes shown, minimum 2 mm (0.080 inch) thick extrusion.
   2. One piece full length of opening with concealed anchors.
   3. Sills turned up back edge minimum 6 mm (1/4 inch). Front edge provide with drip.
   4. Sill back edge behind face of window frame. Do not extend to interior surface or bridge thermal breaks.
   5. Do not perforate for anchorage, clip screws, or other requirements.

2.7 FINISHES

A. Finish window units according to NAAMM AMP 500 series.
B. Anodized Aluminum:
   1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.8 ACCESSORIES

A. Fasteners: AAMA/WDMA/CSA 101/I.S.2/A440; non-magnetic stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Verify openings are within acceptable tolerances.
B. Protect existing construction and completed work from damage.
C. Remove existing windows to permit new installation when replacement window is available, and ready for immediate installation.
   1. Remove existing work carefully; avoid damage to existing work indicated to remain.
   2. Perform other operations as necessary to prepare openings for proper installation and operation of new windows.
   3. Do not leave openings uncovered at end of working day, during precipitation or temperatures below 16 degrees C (60 degrees F).

3.2 INSTALLATION, GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings .
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Where type, size or spacing of fastenings for securing window accessories or equipment to building construction is not shown or specified, provide expansion or toggle bolts or screws, as best suited to construction material.
   1. Provide bolts or screws minimum 6 mm (1/4 inch) in diameter.
   2. Sized and spaced to resist tensile and shear loads imposed.
   3. Do not install exposed fasteners on exterior, except when unavoidable for application of hardware.
   4. Provide non-magnetic stainless steel Phillips flat-head machine screws for exposed fasteners, where required, or special tamper-proof fasteners.
   5. Locate fasteners to avoid disturbing window thermal break.
C. Set windows plumb, level, true, and in alignment; without warp or rack of frames or sash.
D. Anchor windows on four sides with anchor clips or fin trim.
   1. Do not allow anchor clips to bridge thermal breaks.
   2. Use separate clips for both sides of thermal breaks.
   3. Make connections to allow for thermal and other movements.
   4. Do not allow building load to bear on windows.
   5. Use manufacturer's standard clips at corners and maximum 600 mm (24 inches) on center.
   6. Where fin trim anchorage is indicated build into adjacent construction, anchoring at corners and maximum 600 mm (24 inches) on center.
E. Sills and Stools:
   1. Set in bed of mortar or other compound to fully support, true to line shown.
   2. Do not extend sill to inside window surface or past thermal break.
   3. Leave space for sealants at ends and to window frame unless indicated otherwise.

3.3 MULLIONS CLOSURES, TRIM, AND PANNING

A. Cut mullion full height of opening and anchor directly to window frame on both sides.
B. Closures, Trim, and Panning: External corners mitered and internal corners coped, fitted with hairline, tightly closed joints.

1. Secure to concrete and solid masonry with expansion bolts, expansion rivets, split shank drive bolts, or powder actuated drive pins.
2. Toggle bolt to hollow masonry units.
3. Screw to wood and metal.

C. Fasten except for strap anchors, near ends and corners and maximum 300 mm (12 inches) on center.

D. Seal units following installation to provide weathertight system.

3.4 FIELD TESTING

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

B. Test Method: AAMA 502.

C. Test Specimen:

1. Include window assembly and construction. Affix test chamber to interior side of test specimen and the conduct testing using positive static air pressure (Test method A).
2. Test specimens to be selected by the Contracting Officer's Representative after windows have been installed according to the drawings and specification.

3.5 CLEANING

A. Remove excess glazing and sealant compounds.

B. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.

- - E N D - -

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the following:
   1. Glass.
   2. Glazing materials and accessories for both factory and field glazed assemblies.

1.2 RELATED WORK

A. Section 08 51 13, ALUMINUM WINDOWS: Aluminum Windows.

1.3 LABELS

A. Temporary labels:
   1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
   2. Label in accordance with NFRC label requirements.
   3. Temporary labels are to remain intact until glass is approved by Contracting Officer Representative (COR).

B. Permanent labels:
   1. Locate in corner for each pane.
   2. Label in accordance with ANSI Z97.1 and SGCC label requirements.
      a. Tempered glass.
      b. Laminated glass or have certificate for panes without permanent label.
      c. Organic coated glass.
   3. Bullet resistance glass or plastic assemblies:
      a. Bullet resistance glass or plastic assemblies in accordance with UL 752 requirements for power rating specified.
      b. Identify each security glazing permanently with glazing manufacturer's name, date of manufacture, product number, and DOS Code number inconspicuously located in lower corner on protective side and visible after glazing is framed.
      c. The "attack (threat) side" is to be identified in bold lettering on each side of glazing with removable label.
   4. Fire rated glazing assemblies: Mark in accordance with IBC.

1.4 PERFORMANCE REQUIREMENTS

A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual,

and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing system; deflections beyond specified limits; or other defects in construction.

B. Glazing Unit Design: Design glass, including engineering analysis meeting requirements of authorities having jurisdiction. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.
   1. Design glass in accordance with ASTM E1300, and for conditions beyond the scope of ASTM E1300, by a properly substantiated structural analysis.
   2. Design Wind Pressures: In accordance with ASCE 7 and applicable code.
   3. Wind Design Data: In accordance with ASCE 7 and applicable code.
   4. Maximum Lateral Deflection: For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than the structural capacity of the glazing unit, the threshold at which frame engagement is no longer safely assured, 1/100 times the short-side length, or 19 mm (0.75 inch), whichever is less.

C. Ballistic- and Blast- resistant glass or plastic glazing assemblies:
   1. For blast-resistant and ballistic-resistant units comply with requirements in Physical Security Design Manual for VA Mission Critical Protected Facilities, and project-specific criteria provided on the drawings and specifications.
   2. Spall Resistance: Laminated glazing is not permitted to produce spall to interior (protected side) when impacted with scheduled ballistics.
   3. Tolerances:
      a. Outside dimensions: Overall outside dimensions (height and width) of laminated security glazing is to maintain tolerance of ± 3 mm (± 0.12 inch).

b. Warpage: Out-of-flat (warpage or bowing) condition of laminates is not to exceed 2.5 mm per lineal meter (0.10 inch per 3.3 lineal foot). The condition, if present, is to be localized to extent not greater than 0.75 mm (0.03 inch) for any 0.3 meter (0.98 feet) section.

D. Windborne-Debris-Impact Resistance: Comply with enhanced-protection testing requirements in ASTM E1996 for project wind zone when tested according to ASTM E1886, based upon testing of specimens not less than the size required for project and utilizing installation method identical to that specified for project.

1. Project Wind Zone: Wind Zone 2.
2. Large-Missile Test: For glazing located within 9.1 m (30 feet) of grade.
3. Small-Missile Test: For glazing located more than 9.1 m (30 feet) above grade.

E. Building Enclosure Vapor Retarder and Air Barrier:

1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Certificates:

1. Certificate stating that fire-protection and fire-resistive glazing units meet code requirements for fire-resistance-rated assembly and applicable safety glazing requirements.
2. Certificate on solar heat gain coefficient when value is specified.
3. Certificate on "R" value when value is specified.
4. Certificate test reports confirming compliance with specified bullet resistive rating.
5. Certificate that blast resistant glass meets the specified requirements.

C. Manufacturer Warranty.

D. Manufacturer's Literature and Data:

1. Glass, each kind required.
2. Insulating glass units.

3. Transparent (one-way vision glass) mirrors.
4. Elastic compound for metal sash glazing.
5. Putty, for wood sash glazing.
6. Glazing cushion.
7. Sealing compound.
8. Bullet resistive material.
9. Plastic glazing material, each type required.

E. Samples:
1. Size: 305 mm by 305 mm (12 inches by 12 inches).
2. Tinted glass.
3. Reflective glass.

F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer’s test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":
1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling to comply with manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.

2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
3. Temporary protections: The glass front and polycarbonate back of glazing are to be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces is to be approved and applied by manufacturer.
4. Edge protection: To cushion and protect glass clad, and polycarbonate edges from contamination or foreign matter, the four (4) edges are to be sealed the depth of glazing with continuous standard-thickness thermoplastic rubber tape. Alternatively, continuous channel shaped extrusion of thermoplastic rubber are to be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 degrees C (60 to 75 degrees F), during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS:

A. Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY

A. Construction Warranty: Comply with the FAR clause 52.246-21 “Warranty of Construction”.

B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows. Submit manufacturer warranty.

1. Bullet resistive plastic material to remain visibly clear without discoloration for 10 years.
2. Insulating glass units to remain sealed for ten (10) years.
3. Laminated glass units to remain laminated for five (5) years.

4. Polycarbonate to remain clear and ultraviolet light stabilized for five (5) years.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Architectural Manufacturers Association (AAMA):

800.....Test Methods for Sealants

810.1-77.....Expanded Cellular Glazing Tape

C. American National Standards Institute (ANSI):

Z97.1-14.....Safety Glazing Material Used in Building - Safety Performance Specifications and Methods of Test

D. American Society of Civil Engineers (ASCE):

7-10.....Wind Load Provisions

E. ASTM International (ASTM):

C542-05(2017).....Lock-Strip Gaskets

C716-06(2020).....Installing Lock-Strip Gaskets and Infill Glazing Materials

C794-18.....Adhesion-in-Peel of Elastomeric Joint Sealants

C864-05(2019).....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers

C920-18.....Elastomeric Joint Sealants

C964-20.....Standard Guide for Lock-Strip Gasket Glazing

C1036-16.....Flat Glass

C1048-18.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.

C1172-19.....Laminated Architectural Flat Glass

C1349-17.....Standard Specification for Architectural Flat Glass Clad Polycarbonate

C1376-15.....Pyrolytic and Vacuum Deposition Coatings on Flat Glass

D635-18.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastic in a Horizontal Position

D4802-16.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

E84-20.....Surface Burning Characteristics of Building Materials

E119-20.....Standard Test Methods for Fire Test of Building Construction and Material

E1300-16.....Load Resistance of Glass in Buildings

E1886-19.....Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials

E1996-17.....Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes

E2141-14.....Test Methods for Assessing the Durability of Absorptive Electrochromic Coatings on Sealed Insulating Glass Units

E2190-19.....Insulating Glass Unit

E2240-06.....Test Method for Assessing the Current-Voltage Cycling Stability at 90 Degree C (194 Degree F) of Absorptive Electrochromic Coatings on Sealed Insulating Glass Units

E2241-06.....Test Method for Assessing the Current-Voltage Cycling Stability at Room Temperature of Absorptive Electrochromic Coatings on Sealed Insulating Glass Units

E2354-10.....Assessing the Durability of Absorptive Electrochromic Coatings within Sealed Insulating Glass Units

E2355-10.....Test Method for Measuring the Visible Light Transmission Uniformity of an Absorptive Electrochromic Coating on a Glazing Surface

F1233-08(2019).....Standard Test Method for Security Glazing Materials and Systems

F1642/F1642M-17.....Test Method for Glazing and Glazing Systems Subject to Airblast Loadings

F. Code of Federal Regulations (CFR):

16 CFR 1201-10.....Safety Standard for Architectural Glazing Materials

G. Glass Association of North America (GANA):

2010 Edition.....GANA Glazing Manual

2008 Edition.....GANA Sealant Manual

2009 Edition.....GANA Laminated Glazing Reference Manual

2010 Edition.....GANA Protective Glazing Reference Manual

H. International Code Council (ICC):

IBC.....International Building Code

I. Insulating Glass Certification Council (IGCC)

J. Insulating Glass Manufacturer Alliance (IGMA):

TB-3001-13.....Guidelines for Sloped Glazing

TM-3000.....North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use

K. Intertek Testing Services - Warnock Hersey (ITS-WHI)

L. National Fire Protection Association (NFPA):

80-16.....Fire Doors and Windows

252-12.....Fire Tests of Door Assemblies

257-12.....Standard on Fire Test for Window and Glass Block Assemblies

M. National Fenestration Rating Council (NFRC)

N. Safety Glazing Certification Council (SGCC) 2012:

Certified Products Directory (Issued Semi-Annually).

O. Underwriters Laboratories, Inc. (UL):

9-08(R2009).....Fire Tests of Window Assemblies

263-14.....Fire Tests of Building Construction and Materials

752-11.....Bullet-Resisting Equipment.

P. Department of Veterans Affairs:

Q. Physical Security Design Manual for VA Mission Critical Protected Facilities January 2015/

R. Architectural Design Manual for VA Facilities (VASDM)

S. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCT

2.1 GLASS

A. Provide minimum thickness stated and as additionally required to meet performance requirements.
   1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.
B. Obtain glass units from single source from single manufacturer for each glass type.
C. Clear Glass:
   1. ASTM C1036, Type I, Class 1, Quality q3

D. Tinted Heat reflective and low emissivity coated glass:
   1. ASTM C1036, Type I, Class 2, Quality q3.

2.2 HEAT-TREATED GLASS

A. Roller Wave Limits for Heat-Treated Glass: Orient all roller wave distortion parallel to bottom surface of glazing, and provide units complying with the following limitations:
   1. Measurement Parallel to Line: Maximum peak to valley 0.203 mm (0.008 inch).
   2. Measurement Perpendicular to Line: Maximum 0.0254 mm (0.001 inch).
   3. Bow/Warp: Maximum 50 percent of bow and warp allowed by ASTM C1048.
B. Clear Heat Strengthened Glass:
   1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
C. Tinted Heat Strengthened Glass:
   1. ASTM C1048, Kind HS, Condition A, Type I, Class 2, Quality q3.
D. Clear Tempered Glass:
   1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
E. Tinted Tempered Glass.
   1. ASTM C1048, Kind FT, Condition A, Type I, Class 2, Quality q3.

2.3 COATED GLASS

A. Reflective-Coated Spandrel Glass:
   1. ASTM C1376, Kind CS and ASTM C1048, Kind HS, Condition B, Type I.
B. Reflective-Coated Low-E Coated Tempered Glass:
   1. ASTM C1376 and ASTM C1048, Kind FT, Condition C, Type I, Class 1, Quality q3 with reflective metallic coating.
   2. Thickness, as indicated in construction documents.

2.4 LAMINATED GLASS

A. Laminated Glass: ASTM C1172. Two or more lites of heat treated glass bonded with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent-resin interlayer complying with interlayer manufacturer's written instructions. Minimum total laminated thickness of 1/4” for blast resistant glazing.

B. Interlayer: Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing unless otherwise scheduled.

C. Interlayer: Use 1.5 mm (0.060 inch) thick interlayer for:

1. Assemblies requiring heat strengthened or fully tempered glass.

D. Interlayer: Use 2.28 mm (0.090 inch) thick interlayer where required to meet performance requirements.

E. Interlayer Color: Clear, unless otherwise scheduled.

2.5 SECURITY GLAZING ASSEMBLY

A. Provide ballistic level as scheduled in accordance with UL 752.

B. Forced Entry Resistance: As scheduled, in accordance with ASTM F1233.

C. Blast Resistance: Provide exterior glazing units that meet the specified blast pressures and impulses and interior security glazing units providing protection based upon hazard rating as scheduled, in accordance with Physical Security and Resilience Design Manual for Mission Critical Protected Facilities) October 2020 as indicated in Specification Section 08 56 53.

D. Laminated Glass Security Glazing Units: Fabricate from multiple lites of scheduled glass with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent resin interlayers between the layers of glazing.

2.6 INSULATING GLASS UNITS

A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190. The exterior glass unit shall be fully tempered and the inner glass unit shall be laminated annealed at a minimum for all blast resistant glazing.

B. Assemble units using glass types specified in Insulating Glass Schedule and Blast Glazing assembly requirements

2.7 FIRE PROTECTION AND FIRE RESISTANCE GLAZING

A. Fire-Protection-Rated Glazing: Glazing units tested for use in fire door assemblies or fire windows, UL, ITS-WHI or equivalent listed and

labeled by testing agency in accordance with IBC, for fire-protection ratings as indicated on construction documents , based upon positive-pressure testing per NFPA 257 or UL 9, and complying with NFPA 80.

1. Hose-Stream Test: Units must comply, except units having fire-protection rating of 20 minutes.
2. Temperature Rise Limitation: Units over 0.065 square meter (100 square inch) must comply with 232 deg. C (450 degress F) limitation.
3. Labeling: Permanently label fire-protection-rated glazing units in accordance with IBC.
4. Safety Glazing: Comply with 16 CFR 1201, Category II.
5. Fire-Protection-Rated Tempered Glass: For 20-minute fire-protection-rated door assemblies, of thickness scheduled.
6. Fire-Protection-Rated Laminated Ceramic Glazing: Units made from two lites of clear, ceramic glass, 8 mm (5/16 inch) total thickness, for rating scheduled.

B. Fire-Resistance-Rated Glazing: Glazing units tested for use in fire wall assemblies, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC for fire-resistance ratings of wall assemblies as indicated on construction documents , based upon testing according to NFPA 252 and ASTM E119 or UL 263.

1. Labeling: Permanently label fire-resistance-rated glazing units in accordance with IBC.
2. Safety Glazing: Comply with 16 CFR 1201, Category II.

2.8 GLAZING ACCESSORIES

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer’s installation instructions.

B. Setting Blocks: ASTM C864:

1. Silicone type.
2. Channel shape; having 6 mm (1/4 inch) internal depth.
3. Shore A hardness of 80 to 90 Durometer.
4. Block lengths: 50 mm (2 inches) except 100 to 150 mm (4 to 6 inches) for insulating glass.

5. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
6. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:
1. Channel shape having a 6 mm (1/4 inch) internal depth.
2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
3. Lengths: 25 to 76 mm (1 to 3 inches).
4. Shore A hardness of 40 to 50 Durometer.

D. Glazing Tapes:
1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
3. Complying with AAMA 800 for the following types:
   a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
   b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.

F. Glazing Clips: Galvanized steel spring wire designed to hold glass in position in rabbeted sash without stops.

G. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
2. Soft, closed cell with locking key for sash key.
3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.

H. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.

I. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
2. Class 25 or 50 as recommended by manufacturer for application.
3. Grade NS.
4. Shore A hardness of 25 to 30 Durometer.

J. Structural Sealant: ASTM C920, silicone acetoxy cure:
   1. Type S.
   2. Class 25.
   3. Grade NS.
   4. Shore a hardness of 25 to 30 Durometer.

K. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.
   1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.
   2. Designed for dry glazing.

L. Color:
   1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames to match color of the finished aluminum and be nonstaining.
   2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted are to be black, gray, or neutral color.

M. Smoke Removal Unit Targets: Adhesive targets affixed to glass to identify glass units intended for removal for smoke control. Comply with requirements of local Fire Department.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:
   1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
   2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.

B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units.

3.2 PREPARATION

A. For sealant glazing, prepare glazing surfaces in accordance with GANA Sealant Manual.

B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.

C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.

D. Verify that components used are compatible.

E. Clean and dry glazing surfaces.

F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.

B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.

C. Set glazing without bending, twisting, or forcing of units.

D. Do not allow glass to rest on or contact any framing member.

E. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.

F. Laminated Glass:

1. Tape edges to seal interlayer and protect from glazing sealants.
2. Do not use putty or glazing compounds.

G. Insulating Glass Units:

1. Glaze in compliance with glass manufacturer's written instructions.
2. When glazing gaskets are used, they are to be of sufficient size and depth to cover glass seal or metal channel frame completely.
3. Do not use putty or glazing compounds.
4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
5. Install with tape or gunnable sealant in wood sash.

H. Fire Protective and Fire Resistance Glass:

1. Wire Glass: Glaze in accordance with NFPA 80.
2. Other fire protective and fire resistant glass: Glaze in accordance with manufacturer’s installation instructions and NFPA 80.

I. Bullet Resisting Material:

1. Glaze as recommended by manufacturer, using glazing material which will permit expansion and contraction of the bullet resistive material in the frame.
2. The polycarbonate surface is not to be cleaned by scraping, razor blade, squeegee, or use of highly alkaline cleaner.

3. At no time is polycarbonate material be exposed to chemical solvents (benzene, gasoline, acetone, paint thinners) or aromatic hydrocarbons (toluene or xylene), nor should any of these solvents or fumes by used or present in confined area such as a security guard booth.
4. Due care is to be exercised (paint formula, ventilation, protection of polycarbonate) when painting becomes necessary to interiors of rooms of hardline glazed units; exposure to chemical solvents could result in irreparable damage to security glazings (delaminations, distortions, cracks, severe stress crazing, air bubbles, etc.).

3.4 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)

A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
C. Place setting blocks at 1/4 points with edge block no more than 152 mm (6 inches) from corners.
D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
F. Fill gap between glazing and stop with sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line. Sealant type is to be compatible with glazing tape.
G. Apply cap bead of sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.5 INSTALLATION - WET METHOD (SEALANT AND SEALANT)

A. Place setting blocks at 1/4 points and install glazing pane or unit.
B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.

C. Fill gaps between glazing and stops with sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.

D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.6 REPLACEMENT AND CLEANING

A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.

B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.

C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.7 PROTECTION

A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.8 MONOLITHIC GLASS SCHEDULE

A. Glass Type MG# 1 : Clear fully tempered float glass.(Interior Standard)

1. Unit Thickness: 6 mm (0.23 inch).
2. Safety glazing label required.

3.9 INSULATING LAMINATED GLASS SCHEDULE (FORCE PROTECTION AND PHYSICAL SAFETY)

A. Glass Type IL# 1: Tinted, low-e coated insulating laminated glass.

1. Overall Unit Thickness: 25 mm (1 inch) .
2. Outdoor Lite: Tinted annealed float glass, except heat-strengthened float glass where required, and fully tempered float glass where indicated.
   a. Minimum Thickness of Outdoor Lite: 6 mm (0.23 inch).
   b. Tint Color: Gray.
3. Interspace Content: Argon.
4. Indoor Lite: Clear laminated glass with two lites of annealed float glass, except heat-strengthened float glass where required, and fully tempered float glass where indicated.
   a. Minimum Thickness of Each Glass Lite: 6 mm (0.23 inch).
   b. Interlayer Thickness: 1.52 mm (0.060 inch) .
5. Low-E Coating: Sputtered on second surface.
6. Solar Heat Gain Coefficient: .38 maximum.
7. Safety glazing label required.

8. Windborne debris-resistant glazing unit required.
9. Blast Resistance: Provide units meeting the following:
   a. GP Value As provided by Owner and coordinated with blast report.

3.10 FIRE-PROTECTIVE AND FIRE-RESISTANCE GLAZING SCHEDULE

A. Glass Type FR# 1 : Fire-protection-rated laminated ceramic glazing.
   1. Thickness: 5/16”.
   2. Rating: 60- minute.
   3. Application: Fire-protection-rated door and window assemblies.

3.11 SECURITY GLAZING SCHEDULE

A. Glass Type SG# 1: Tinted reflective-coated symmetrical glass-clad polycarbonate, ASTM C1349.
   1. Overall Unit Thickness: 13.3 mm (0.52 inch).
   2. Outer Lite: 6 mm (0.23 inch) heat-strengthened tinted float glass.
      a. Glass Tint Color: Gray.
      b. Tinted Glass Location: Outer lite.
      c. Coating Color: Silver.
      d. Coating Location: Second surface.
      e. Visible Light Transmittance of Outer Lite: 11 percent.
   3. Single Core: Polycarbonate, 3 mm (0.12 inch) thick.
   4. Inner Lite: Heat-strengthened float glass, 1.3 mm (0.05 inch).
   5. Interlayer Type and Thickness: Clear, 1.52 mm (0.06 inch).
   6. Application: Security glazing for observation window.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies subsurface preparation requirements for areas to receive the installation of applied and resinous flooring. This section includes testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, floor leveling and repair as required.

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS.

B. Section 09 65 16, RESILIENT SHEET FLOORING,

C. Section 09 65 19, RESILIENT TILE FLOORING,

D. Section 09 67 23 60, RESINOUS (Urethane and Epoxy Mortar) FLOORING,

E. Section 09 68 00, WALKOFF MAT CARPETING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.

B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer

C. Product Data:

1. Moisture remediation system
2. Underlayment Primer
3. Cementitious Self-Leveling Underlayment
4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)

D. Test Data:

1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer’s technical representative.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.

B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International(ASTM):

D638-14(2014).....Standard Test Method for Tensile Properties of Plastics

D4259-18(2019).....Standard Practice for Preparation of Concrete by Abrasion Prior to Coating Application.

C109/C109M-20b(2020)....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or [50-mm] Cube Specimens

7234-19(2020).....Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers

E96/E96M-16(2016).....Standard Test Methods for Water Vapor Transmission of Materials

F710-1e1(2020).....Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring

F1869-16a.....Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

F2170-19a(2020).....Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

C348-20(2020).....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars

C191-19(2020).....Standard Test Method for Time of Setting of Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING (MRC)

A. System Descriptions:

1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products,

VCT, tile and carpet where issues caused by moisture vapor are a concern.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Liquid applied coating:
   a. Resin: epoxy.
   b. Formulation Description: Multiple component high solids.
   c. Application: Per manufacturer's written installation requirements.
   d. Thickness: minimum 10 mils

D. Material Vapor Permeance: Application shall achieve a permeance rating of less than 0.1 perm in accordance with ASTM E96/E96M.

E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113 (Ammended 02/05/2016)	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	$1.9X10^5$psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufacture's Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

A. System Descriptions:
   1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

C. System Characteristics:
   1. Wearing Surface: smooth
   2. Thickness: Per architectural drawings, ranging from feathered edge to 1”, per application. Applications greater than 1” require additional 3/8” aggregate to mix or as recommended by manufacturer.

D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348

G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours, floor coverings in 16 hours, and resinous flooring in 3-7 days.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:
   1. Primer:
      a. Resin: copolymer
      b. Formulation Description: single component ready to use.
      c. Application Method: Squeegee and medium nap roller.
      d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
      e. Number of Coats: (1) one.

2. Grout Resurfacing Base:
   a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.
   b. Application Method: colloidal mix pump, cam rake, spike roll.
      1) Thickness of Coats: Per architectural scope, 1” lifts.
      2) Number of Coats: More than one if needed.
   c. Aggregates: for applications greater than 1inch, require additional 3/8” aggregate to mix.
   J.

Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
B. Compressive Strength: Minimum 4000 psi in 28 days
C. Trowel-applied underlayment shall not contain silica quartz (sand).
D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

A. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.

B. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.

C. Prepare concrete substrates if required per ASTM D4259 as follows:
   1. Dry abrasive blasting.
   2. Wet abrasive blasting.
   3. Vacuum-assisted abrasive blasting.
   4. Centrifugal-shot abrasive blasting.
   5. Comply with manufacturer's written instructions.

D. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.

E. Verify that concrete substrates are dry.

F. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.

G. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture’s formal and project specific written recommendation.

H. Provide a written report showing test placement and results.

I. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer’s instructions.

J. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer’s technical representative.

K. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4” deviation in 10’. As required, install underlayment to achieve required tolerance.

L. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING

A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.

B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM D4259.

C. Mix and apply moisture remediation coating in accordance with manufacturer’s instructions.

3.4 CEMENTITOUS UNDERLAYMENT

A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.

B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 24 00
PORTLAND CEMENT PLASTERING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies lathing and portland cement based plaster stucco.

1.2 RELATED WORK:

1.3 TERMINOLOGY:

A. Definitions and description of terms to be in accordance with ASTM C11, ASTM C926, ASTM C1063 and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead is defined as the underside of the floor or roof construction supported by beams, trusses, and bar joists.

C. Self-furring Lath: Metal plastering bases having dimples or crimps designed to hold the back plane of the lath 6 to 10 mm (1/4 to 3/8 inch) away from the plane of the solid backing.

D. Solid Backing or Solid Bases: Concrete, masonry, sheathing, rigid insulation, and similar materials to which plaster is directly applied.

E. Wet Areas: Areas of a building where cyclic or continuous exposure to very humid or wet conditions, or in which a dew point condition may occur in the plaster.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Accessories for plaster, each type.
2. Metal plastering bases, each type.
3. Fasteners.
4. Bonding compounds, including application instructions.
5. Admixtures, including mixing and application instructions.

C. Samples:

1. Accessories for plaster, each type, not less than 152 mm (6 inches) long.
2. Panel showing finish coat 152 to 305 mm (6 by 12 inches) minimum.

D. Installers qualifications.

1.5 DELIVERY, STORAGE AND PROTECTION:

A. Deliver manufactured materials in the manufacturers' original unbroken packages or containers which are labeled plainly with the manufacturers' names and brands. Keep cementitious materials dry and stored off the ground, under cover, and away from sweating walls and other damp surfaces until ready for use.

1.6 PROJECT CONDITIONS:

A. Do not apply exterior plaster when the ambient temperature is less than 4 degrees C (40 degrees F), or when a drop in temperature below 4 degrees C (40 degrees F) is expected within 24 hours after application.

B. Do not apply plaster to frozen surfaces or surfaces containing frost.

C. Do not use frozen materials in the mix.

D. Protect plaster coats against freezing for a period of not less than 24 hours after application.

1.7 QUALITY ASSURANCE:

A. Installers Qualifications: Work is to be performed by installer having a minimum of three (3) years' experience for work relating to this Section. Submit installer qualifications.

B. Mockup: Build .37 sq. m (4 sq. ft.) mockup for each substrate and finish texture indicated for cement plastering including accessories. Approved mockups may become part of completed work.

1.8 PERFORMANCE REQUIREMENTS:

A. Where indicated on construction documents, provide cement plaster assemblies identical to those of assemblies tested for fire resistance according to ASTM E119 by a qualified testing agency.

B. Where indicated on construction documents provide cement plaster assemblies identical to those of assemblies tested for STC ratings according to ASTM E90 and classified according to ASTM E413 by a qualified testing agency.

1.9 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. ASTM International (ASTM):

A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

A1064/A1064M-18a.....Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete

C11-18b.....Terminology Relating to Gypsum and Related Building Materials and Systems.

C91/C91M-18.....Masonry Cement

C150/C150M-20.....Portland Cement

C206-14.....Finishing Hydrated Lime

C207-18.....Hydrated Lime for Masonry Purposes

C260/C260M-10a (2016)...Air Entraining Admixtures for Concrete.

C847-18.....Metal Lath

C897-15(2020).....Aggregate for Job-Mixed Portland Cement Based Plasters

C926-20.....Application of Portland Cement-Based Plaster

C932-06(2019).....Surface-Applied Bonding Compounds for Exterior Plastering

C933-18.....Welded Wire Lath

C979/C979M-16.....Pigments for Integrally Colored Concrete

C1002-18.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C1063-19a.....Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

E90-09 (2016).....Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

E119-20.....Test Methods for Fire Tests of Building Construction and Materials

E413-16.....Classification for Rating Sound Insulation

C. Commercial Item Description (CID):

A-A-55615-95(R2006).....Shield, Expansion (Wood Screw and Lag Bolt Self-Threading Anchors)

PART 2 - PRODUCTS

2.1 METAL PLASTERING BASES:

A. Expanded Lath:
   1. ASTM C847, galvanized except as modified by ASTM C1063 and this specification. Self-furring where applied over solid backing.
   2. Flat diamond mesh weighing not less than 1.8 kg per square meter (3.4 pounds per square yard).

B. Stucco Mesh: Flat expanded diamond mesh pattern, with openings approximately 38 by 75 mm (1-1/2 by 3 inches), weighing not less than 1.9 kg per square meter (3.6 pounds per square yard), with backing as specified.

C. Wire Lath:
   1. Zinc coated (Galvanized).
   2. Welded Wire Lath: ASTM C933, with backing as specified.
   3. Self-furring where applied over solid backing.

D. Building Paper Backing for Metal Plastering Bases:
   1. Backing attached to lath as specified in ASTM C933.
   2. Vapor Permeable Backing: Fed. Spec. UU-B-790, Type I, Grade D.
   3. Water Resistant Backing: Fed. Spec. UU-B-790, Type I, Grade B.

2.2 ACCESSORIES FOR CEMENT PLASTER (STUCCO):

A. Provide accessories that are roll formed galvanized steel, except that cornerite and strip lath that are formed from steel sheets with manufacturer’s standard galvanized coating.

B. Provide welded wire corner reinforcements of galvanized 1.4 mm (17 gauge) steel wire conforming to ASTM A1064/A1064M.

C. Provide furring, including hangers, bolts, inserts, clips, fastenings, and attachments of number, size, and design to develop the full strength of the members.

D. Control Joints: ASTM C1063, zinc-coated (galvanized) steel; one-piece-type, folded pair of unperforated screeds in M-shaped configuration; with perforated flanged and removable protective tape on plaster face of control joint.

E. Foundation Weep Screed: Fabricated form hot-dip galvanized-steel sheet, ASTM A653/A653M, G60 (Z180) zinc coating.

F. Cornerite: Fabricated from metal lath with ASTM A653/A653M, G60 (Z180), hot-dip galvanized-zinc coating.

G. External- (Outside-) Corner Reinforcement: Fabricated from metal lath with ASTM A653/A653M, G60 (Z180), hot-dip galvanized-zinc coating.

H. Cornerbeads: Fabricated from zinc-coated (galvanized) steel.

1. Smallnose cornerbead with expanded flanges; use unless otherwise indicated on construction documents.
2. Smallnose cornerbead with perforated flanges; use on curved corners.
3. Smallnose cornerbead with expanded flanges reinforced by perforated stiffening rib; use on columns and for finishing unit masonry corners.
4. Bullnose cornerbead, radius 19 mm (3/4 inch) minimum, with expanded flanges; use at locations indicated on construction documents.

I. Casing Beads: Fabricated form zinc-coated (galvanized) steel; square-edged style; with expanded flanges.

2.3 FASTENERS:

A. Tie, wire, screws, staples, clips, nails, and other fasteners ASTM C1063, except as otherwise specified.

B. Provide fasteners for securing metal plastering bases having heads, or inserted through washers large enough to engage two (2) strands (two (2) on each side of screw) of the metal plastering base.

C. For fire rated construction; provide fasteners of type and size as used in fire rated test.

D. Screws: ASTM C1002.

E. Expansion Shields: CID A-A-55615, of the Type and Class applicable.

2.4 CEMENT:

A. Portland: ASTM C150/C150M, Type I.

B. Masonry: ASTM C91/C91M, Type N.

2.5 LIME:

A. ASTM C206, Type S; or ASTM C207, Type S.

2.6 AGGREGATES (SAND):

A. ASTM C897, graded as required to suit texture of finish specified.

2.7 BONDING AGENT:

A. ASTM C932.

2.8 FACTORY PREPARED FINISH COAT FOR CEMENT PLASTER (STUCCO):

A. Factory prepared dry blend of materials, integrally colored, designed for exterior finish coat application.

B. Pigments: ASTM C979/C979M, lime proof mineral oxide.

C. Particle Size: Not more than 35 percent, by weight of all ingredients, including cement, aggregate, hydrated lime, admixture and coloring pigment is to pass a number 100 sieve.

2.9 ADMIXTURES:

A. Air Entrainment: ASTM C260/C260M.

PART 3 - EXECUTION

3.1 METAL PLASTERING BASES (LATH) LOCATIONS:

A. Where plaster is required on solid concrete or masonry bases, metal plastering bases are not required, unless shown on the construction documents. Where shown use wire lath or stucco mesh.

B. On ceiling or soffit framing use flat diamond mesh lath.

C. Over steel columns, provide expanded lath.

D. Where metal plastering bases are used as a base for exterior cement plaster over wall sheathing, provide wire lath or stucco mesh with water resistant backing.

3.2 APPLYING METAL PLASTERING BASES:

A. In accordance with ASTM C1063, except as otherwise specified or indicated on construction documents.

B. Form true surfaces, straight or in curves where shown on construction documents, without sags or buckles and with long dimension of lath at right angles to direction of supports.

C. Terminate lath for ceiling or soffit construction at casing bead (floating angle construction) at perimeter angles between walls and ceilings or soffits.

D. Lath with backing to be applied to produce a paper to paper and metal to metal lap at ends and sides of adjacent sheets, whether full sheets or less than full sheets are provided:

1. Lap backing 50 mm (2 inches) for both horizontal and vertical laps.
2. Install horizontal laps in a ship lap fashion to conduct water to the outside and over flashing or waterproofing.

E. Do not install continuous metal plastering bases through expansion and control joints. Terminate at each side of joint.

F. Attach lath directly to masonry and concrete with hardened nails, power actuated drive pins or other approved fasteners. Install fasteners at dimples or crimps only.

G. Wood plugs are not acceptable.

3.3 INSTALLING PLASTERING ACCESSORIES:

A. Install accessories in accordance with ASTM C1063, except as otherwise specified.
   1. Set plastering accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces.
   2. Install in one (1) piece, within the limits of the longest commercially available lengths.

B. Corner Beads: External-corner reinforcement or corner bead at exterior corners, as required to establish grounds, and where shown on construction documents.

C. Strip Lath:
   1. Install centered over joints between dissimilar materials, such as hollow tile, brick, concrete masonry units, concrete, and joints with expanded lath on framing or furring, where both such surfaces are required to be plastered and are in contact with each other in same plane, except where expansion joints and casing beads are required.
   2. Wire tie or fasten strip lath to base along both edges at not over 152 mm (6 inches) on centers.

D. Casing Beads:
   1. Provide at following locations where plaster terminates to provide finish trim:
      a. Against non-plastered surfaces such as masonry, concrete, and wood.
      b. Against trim of steel frames and trim of other materials and equipment, except where trim overlaps plaster.
      c. Around perimeter of openings except where edge is covered by flanges. Locate to conform to dimensions shown on shop drawings.
      d. Where plaster for new walls or furring (vertical or horizontal) terminates against existing construction.
      e. Both sides of expansion and control joints unless shown otherwise on construction documents.
   2. Provide at perimeter angles between walls and ceilings so as to provide floating angle (unrestrained) construction in accordance with ASTM C1063.

E. Cornerites:
   1. Provide at interior corners of walls, partitions, and other vertical surfaces to be plastered, except where lath is carried around angle.
   2. Fasten only as necessary to retain position during plastering.
   3. Omit cornerites at junction of new plastered walls with existing plastered walls at locations where casing beads are specified.
F. Control Joints:
   1. Where control joints are placed parallel to framing members, install joints within 101 mm (4 inches) of the framing member.
   2. Install control joints only to the edges of abutting sheets of lath so that the lath is not continuous or tied across the joint.
   3. Extend joints the full width and height of the wall or length of soffit/ceiling plaster membrane.

3.4 SURFACE PREPARATION OF SOLID BASES:

A. Surfaces that are to receive plaster are to be prepared and conditioned in accordance with ASTM C926, except as otherwise specified.
B. Existing surfaces of concrete and masonry:
   1. Clean surface of dirt and other foreign matter which will prevent bond.
   2. Apply dash bond coat or bonding agent as specified herein.
   3. Where existing surfaces have a coating such as paint or bituminous waterproofing apply metal plastering base as indicated.

3.5 PORTLAND CEMENT BASED PLASTER:

A. Provide portland cement based plaster where cement plaster (stucco) is shown and specified, and as follows:
   1. Three-Coat work is to be used over all metal plastering bases, with or without solid backing.
   2. Two-Coat work may only be used over solid bases conforming to requirements of Paragraph, SURFACE PREPARATION OF SOLID BASES.
B. Proportion, mix and apply plaster in accordance with ASTM C926, except as otherwise specified.
   1. Provide air entrained plaster for all exterior work.
   2. Provide coloring pigments for finish coat when integral color other than white is specified.
   3. Factory prepared finish coat: Add water, mix, and apply as specified by manufacturer.

4. Color:
   a. Provide natural cement color when painted or other coating is specified.
6. Finish coat is to have a sand float finish.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the installation of luxury vinyl tile and accessories required for a complete installation.

1.2 RELATED WORK:

A. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

B. Removal of Existing Construction Containing Asbestos: Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

C. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: See Finish SCHEDULE on drawing A-301.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Resilient material manufacturer’s recommendations for adhesives, underlayment, primers, and polish.
3. Application, installation and maintenance instructions.

C. Samples:

1. Tile: Each type, color, thickness and finish.
2. Edge Strips: Each type, color, thickness and finish.
3. Feature Strips: Each type, color, thickness and finish.

D. Shop Drawings:

1. Layout of patterns as shown on the construction documents.
2. Edge strip locations showing types and detail cross sections.

E. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.
2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.4 DELIVERY:

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE:

A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they will be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE:

A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.

1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
   a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
   b. Career long training.
   c. Manufacturer endorsed training.
   d. Fundamental journeyman skills certification.

B. Mockup: Build floor tile mockup to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Size: 9.3 sq. m (100 sq. ft.) for each type, color, and pattern. Locations as indicated on construction documents.
2. Contracting Officer Representative (COR) approved mockup may become part of the completed Project if undisturbed at time of Substantial Completion.

C. Furnish product type materials from the same production run.

1.7 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

D2047-11.....Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine

D2240-05(R2010).....Test Method for Rubber Property—Durometer Hardness

D4078-02(R2008).....Water Emulsion Floor Finish

E648-14c.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source

E662-14.....Specific Optical Density of Smoke Generated by Solid Materials

E1155/E1155M-14.....Determining Floor Flatness and Floor Levelness Numbers

F510/F510M-14.....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method

F710-11.....Preparing Concrete Floors to Receive Resilient Flooring

F925-13.....Test Method for Resistance to Chemicals of Resilient Flooring

F1344-12(R2013).....Rubber Floor Tile

F1869-11.....Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

F2170-11.....Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in Situ Probes

C. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

D. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS:

A. Provide adhesives, underlayment, primers, and polish if recommended by resilient floor material manufacturer.

B. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.

C. Smoke Density: Less than 450 per ASTM E662.

D. Slip Resistance - Not less than 0.5 when tested with ASTM D2047.

2.2 LUXURY VINYL TILE:

A. ASTM F1700, Class III, Printed Film Vinyl Tile, Type B, Embossed.

B. Thickness: 12 mil (1/8 inch).

C. Size: See Finish Schedule drawing A-301.

D. Chemical Resistance: ASTM F925; pass.

2.3 ADHESIVES:

A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. VOC content to be less than the 50 grams/L when calculated according to 40 CFR 59 (EPA Method 24). Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

B. CONTRACTOR SHALL VERIFY AND COORDINATE COMPATIBILITY OF ADHESIVE SELECTED WITH LVT MANUFACTURER AND MOISTURE VAPOR BARRIER EMMISSIONS & ALKALINITY CONTROL SEALER MANUFACTURER AT LOCATIONS WHERE CONCRETE ADMIXTURE IS INCLUDED (SEE CONCRETE SPECIFICATIONS.) CONTRACTOR SHALL COORDINATE DIRECT OBSERVATION AND INSPECTION OF FLOOR FINISH INSTALLATION WITH BOTH MANUFACTURER'S REPRESENTATIVES AS REQUIRED TO MAINTAIN ALL WARRANTIES.

2.4 PRIMER FOR CONCRETE SUBFLOORS:

A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.5 LEVELING COMPOUND FOR CONCRETE FLOORS:

A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.6 POLISH AND CLEANERS:

A. Cleaners: As recommended in writing by floor tile manufacturer.

B. Polish: As recommended in writing by floor tile manufacturer and ASTM D4078.

2.7 MOULDING:

A. Provide tapered mouldings of vinyl and types as indicated on the construction documents for both edges and transitions of flooring materials specified. Provide vertical lip on moulding of maximum 6 mm (1/4 inch). Provide bevel change in level between 6 and 13 mm (1/4 and 1/2 inch) with a slope no greater than 1:2.

B. Fasteners for Aluminum Mouldings: Stainless steel of type required for substrate condition.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS:

A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.

B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR TESTING AND PREPARATION:

A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

B. Prepare concrete substrates in accordance with ASTM F710.

3.3 INSTALLATION:

A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.

B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.

C. Tile Layout:

1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary. Match tile installation to approved mockup.

D. Application:

1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
4. Roll tile floor with a minimum 45 kg (100 pound) roller.

E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.

F. Installation of Edge Strips:

1. Locate edge strips under center line of doors unless otherwise shown on construction documents.
2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.

3.4 CLEANING AND PROTECTION:

A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.

B. Keep traffic off resilient material for a minimum 72 hours after installation.

C. Clean flooring as recommended in accordance with manufacturer's printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the recommended number of coats and type of polish and/or finish in accordance with manufacturer's written instructions.

D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.

E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and mouldings, re-clean resilient materials.

3.5 LOCATION:

A. Unless otherwise indicated in construction documents, install tile flooring, under areas where casework, laboratory and pharmacy furniture and other equipment occur.

B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting interior concrete block exposed to view.
7. Painting gypsum drywall exposed to view.
8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously

necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 **RELATED WORK**

A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.

B. Division 05 METALS: Shop prime painting of steel and ferrous metals.

C. Division 08 OPENINGS: Shop prime painting of steel and ferrous metals.

D. Division 12 FURNISHINGS: Shop prime painting of steel and ferrous metals.

1.3 **SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Painter qualifications.

C. Manufacturer's Literature and Data:

1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

D. Sample Panels:

1. After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified.
2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
   a. Federal Specification Number or manufacturers name and product number of paints used.

b. Product type and color.

c. Name of project.

5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

E. Sample of identity markers if used.

F. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
2. High temperature aluminum paint.
3. Epoxy coating.
4. Intumescent clear coating or fire-retardant paint.
5. Plastic floor coating.

1.4 **DELIVERY AND STORAGE**

A. Deliver materials to site in manufacturer's sealed container marked to show following:

1. Name of manufacturer.
2. Product type.
3. Batch number.
4. Instructions for use.
5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:

1. Federal Specification Number, where applicable, and name of material.
2. Surface upon which material is to be applied.
3. Specify Coat Types: Prime; body; finish; etc.

C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 **QUALITY ASSURANCE**

A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and

application of coating on a minimum of three (3) similar projects within the past three (3) years.

B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

C. MOCK-UP PANEL: In addition to the samples specified herein to be submitted for approval, apply in the field, at their final location, each type and color of approved paint materials, applied 3.05 m (10 feet) wide, floor to ceiling of wall surfaces, before proceeding with the remainder of the work, for approval by the COR. Paint mock-ups to include one (1) door and frame assembly.

D. Finish and texture approved by COR will be used as a standard of quality and workmanship for remainder of work.

E. Repaint individual areas which are not approved, as determined by the COR, until approval is received.

1.6 **REGULATORY REQUIREMENTS**

A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.

2. Lead-Base Paint:

a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.

b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.

c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.

3. Asbestos: Provide materials that do not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints.

1.7 **SAFETY AND HEALTH**

A. Apply paint materials using safety methods and equipment in accordance with the following:
   1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.

C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
   1. The applicable manufacturer’s Material Safety Data Sheets (MSDS) or local regulation.
   2. 29 CFR 1910.1000.
   3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.8 **APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):

ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)

ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

C. ASME International (ASME):

A13.1-07(R2013).....Scheme for the Identification of Piping Systems

D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Commercial Item Description (CID):

A-A-1272A.....Plaster Gypsum (Spackling Compound)

F. Federal Specifications (Fed Spec):

TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Master Painters Institute (MPI):

1.....Aluminum Paint

3.....Primer, Alkali Resistant, Water Based

4.....Interior/ Exterior Latex Block Filler

5.....Exterior Alkyd Wood Primer

6.....Exterior, Latex for Exterior Wood Primer

7.....Exterior Oil Wood Primer

8.....Exterior Alkyd, Flat MPI Gloss Level 1

9.....Exterior Alkyd Enamel MPI Gloss Level 6

10.....Exterior Latex, Flat

11.....Exterior Latex, Semi-Gloss

15.....Exterior Latex, Low Sheen (MPI Gloss Level 3-4)

17.....Primer, Bonding, Waterbased

18.....Organic Zinc Rich Primer

22.....Aluminum Paint, High Heat (up to 590% - 1100F)

23.....Primer, Metal, Surface Tolerant

27.....Exterior / Interior Alkyd Floor Enamel, Gloss

31.....Polyurethane, Moisture Cured, Clear Gloss

36.....Knot Sealer

39.....Primer, Latex, for Interior Wood

40.....Exterior, Latex High Build

42.....Textured Coating, Latex, Flat

43.....Interior Satin Latex, MPI Gloss Level 4

44.....Interior Low Sheen Latex, MPI Gloss Level 2

45.....Interior Primer Sealer
46.....Interior Enamel Undercoat
47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
48.....Interior Alkyd, Gloss, MPI Gloss Level 6
50.....Interior Latex Primer Sealer
51.....Interior Alkyd, Eggshell, MPI Gloss Level 3
52.....Interior Latex, MPI Gloss Level 3
53.....Interior Latex, Flat, MPI Gloss Level 1
54.....Interior Latex, Semi-Gloss, MPI Gloss Level 5
59.....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss
60.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
66.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved)
67.....Interior Latex Fire Retardant, Top-Coat (ULC Approved)
68.....Interior/ Exterior Latex Porch & Floor Paint, Gloss
71.....Polyurethane, Moisture Cured, Clear, Flat
77.....Epoxy Cold Cured, Gloss
79.....Marine Alkyd Metal Primer
90.....Interior Wood Stain, Semi-Transparent
91.....Wood Filler Paste
94.....Exterior Alkyd, Semi-Gloss
95.....Fast Drying Metal Primer
98.....High Build Epoxy Coating
99.....Sealer, Water-based, for Concrete Floors
101.....Epoxy Anti-Corrosive Metal Primer
107.....Primer, Rust-Inhibitive, Water-based

108.....High Build Epoxy Coating, Low Gloss
113.....Elastomeric, Pigmented, Exterior, Water-based, Flat
114.....Interior Latex, Gloss

115.....Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)
118.....Dry Fall, Latex Flat
119.....Exterior Latex, High Gloss (acrylic)
134.....Galvanized Water Based Primer
135.....Non-Cementitious Galvanized Primer
138.....Interior High Performance Latex, MPI Gloss Level 2
139.....Interior High Performance Latex, MPI Gloss Level 3
140.....Interior High Performance Latex, MPI Gloss Level 4
141.....Interior High Performance Latex (SG) MPI Gloss Level 5
144.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 2)
145.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 3)
146.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 4)
151.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 3)
153.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 4)
163.....Exterior Water Based Semi-Gloss Light Industrial Coating, MPI Gloss Level 5
164.....Exterior, Water Based, Gloss, Light Industrial Coating, MPI Gloss Level 6

H. Society for Protective Coatings (SSPC):
SSPC SP 1-82(R2004).....Solvent Cleaning
SSPC SP 2-82(R2004).....Hand Tool Cleaning
SSPC SP 3-28(R2004).....Power Tool Cleaning
SSPC SP 10/NACE No.2....Near-White Blast Cleaning
SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. Maple Flooring Manufacturer’s Association (MFMA):

J. U.S. National Archives and Records Administration (NARA):
29 CFR 1910.1000.....Air Contaminants

K. Underwriter’s Laboratory (UL)

PART 2 - PRODUCTS

2.1 **MATERIALS:**

A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

2.2 **PAINT PROPERTIES:**

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.

D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:

1. Flat Paints and Coatings: 50 gram/liter.
2. Non-flat Paints and Coatings: 150 gram/liter.
3. Dry-Fog Coatings: 400 gram/liter.
4. Primers, Sealers, and Undercoaters: 200 gram/liter.
5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 gram/liter.
6. Zinc-Rich Industrial Maintenance Primers: 340 gram/liter.
7. Pretreatment Wash Primers: 420 gram/liter.
8. Shellacs, Clear: 730 gram/liter.
9. Shellacs, Pigmented: 550 gram/liter.

E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 **PLASTIC TAPE:**

A. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.

B. Pressure sensitive adhesive back.

C. Snap on coil plastic markers.

D. Widths as shown on construction documents.

2.4 **BIOBASED CONTENT**

A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer- Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer- Penetrating Liquid	79 percent biobased content

B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION

3.1 **JOB CONDITIONS:**

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day’s work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
   a. Less than 3 degrees C (5 degrees F) above dew point.
   b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the

product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.

c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer’s printed instructions.

2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will warm.
5. Apply only on clean, dry and frost-free surfaces except as follows:
   a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
   b. Concrete and masonry when permitted by manufacturer’s recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
   a. Apply in clean areas and in still air.
   b. Before varnishing vacuum and dust area.
   c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 **INSPECTION**:

A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 **GENERAL WORKMANSHIP REQUIREMENTS:**

A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.

B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.

C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated

materials of whatever nature not caused by others and leave work in a clean condition.

D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.

E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.

F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.

G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.

H. All coats are to be dry to manufacturer’s recommendations before applying succeeding coats.

I. All suction spots or “hot spots” in plaster after the application of the first coat are to be touched up before applying the second coat.

J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

3.4 **SURFACE PREPARATION:**

A. General:

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.

2. See other sections of specifications for specified surface conditions and prime coat.

3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer’s instructions and as herein specified, for each particular substrate condition.
4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
   a. Concrete: 12 percent.
   b. Fiber-Cement Board: 12 percent.
   c. Masonry (Clay and CMU’s): 12 percent.
   d. Wood: 15 percent.
   e. Gypsum Board: 12 percent.
   f. Plaster: 12 percent.

B. Wood:
1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
   a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
   b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
   a. Thin filler in accordance with manufacturer's instructions for application.

b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

C. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
   a. Fill flat head countersunk screws used for permanent anchors.
   b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Zinc-Coated (Galvanized) Metal, Aluminum, Surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

E. Masonry, Concrete:

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.

3. Remove loose mortar in masonry work.
4. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three (3) days and brush thoroughly free of crystals.
5. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in Division 03, CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

F. Gypsum Plaster:
1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 **PAINT PREPARATION:**

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 **APPLICATION:**

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.

C. Apply each coat evenly and cover substrate completely.

D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.

E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.

1. Apply painting materials specifically required by manufacturer to be applied by spraying.
2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in “Building and Structural Work Field Painting”; “Work not Painted”; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.

F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 **PRIME PAINTING:**

A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.

B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.

D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.

E. Metals except boilers, incinerator stacks, and engine exhaust pipes:

1. Steel and iron: MPI 95 (Fast Drying Metal Primer).
2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer).
3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
4. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel).
5. Asphalt coated metal: MPI 1 (Aluminum Paint).
6. Metal over 94 degrees C (201 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating).

F. Gypsum Board:
   1. Surfaces scheduled to have MPI 11 (Exterior Latex, Semi-Gloss) MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5): Use MPI 11 (Exterior Latex, Semi-Gloss) MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5) respectively.
   2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) MPI 46 (Interior Enamel Undercoat) in shower and bathrooms.
   3. Surfaces scheduled to receive vinyl coated fabric wall covering:
      a. Use MPI 45 (Interior Primer Sealer).
      b. Use MPI 101 (Cold Curing Epoxy Primer) for surfaces scheduled to receive MPI 77 (Epoxy Cold Cured, Gloss).
G. Concrete Masonry Units except glazed or integrally colored and decorative units:
   1. MPI 4 (Block Filler) on interior surfaces.
   2. Prime exterior surface as specified for exterior finishes.
H. Concrete Floors: MPI 99 (Water-based Acrylic Curing and Sealing Compound).

3.8 **EXTERIOR FINISHES**:

A. Apply following finish coats where specified on drawings, including but not limited to railings, ladders, pipes, lintels, etc.
B. Steel and Ferrous Metal:
   1. Two (2) coats of MPI 94 (Exterior Alkyd, Semi-Gloss) on exposed surfaces, except on surfaces over 94 degrees C (201 degrees F).
   2. One (1) coat of MPI 22 (High Heat Resistant Coating) on surfaces over 94 degrees K (290 degrees F).
C. Machinery without factory finish except for primer: One (1) coat MPI 94 (Exterior Alkyd, Semi-Gloss).
D. Concrete Masonry Units Concrete:
   1. General:
      a. Where specified or shown.
      b. Mix as specified in manufacturer's printed directions.
      c. Do not mix more paint than can be used within four (4) hours after mixing. Discard paint that has started to set.
      d. Dampen warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.

e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.

2. Use two (2) coats of TT-P-1411 (Paint, Co-polymer-Resin, Cementitious), unless specified otherwise.

3.9 **INTERIOR FINISHES**:

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Finish Schedule (AS-301_and keyed notes.

B. Metal Work:

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
   a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) unless specified otherwise.
   b. Machinery: One (1) coat MPI 9 (Exterior Alkyd Enamel).
   c. Asphalt Coated Metal: One (1) coat MPI 1 (Aluminum Paint).
   d. Ferrous Metal over 94 degrees K (290 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One (1) coat MPI 22 (High Heat Resistant Coating.

C. Gypsum Board:

1. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5).

D. Masonry and Concrete Walls:

1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
2. Two (2) coats of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5).

E. Wood:

1. Sanding:
   a. Use 220-grit sandpaper.
   b. Sand sealers and varnish between coats.
   c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.

2. Sealers:
   a. MPI 31 (gloss) or MPI 71 (flat) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
   b. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
   c. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
   d. Sand as specified.
3. Transparent Finishes on Wood Except Floors.
   a. Stain Finish:
      One (1) coat of MPI 90 (Interior Wood Stain, Semi-Transparent).
      Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
      One (1) coat of sealer MPI 71 (flat) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
      Two (2) coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat).

F. Miscellaneous:
   1. Apply where specified in Finish Scheule and/or Keyed Notes.
   2. Interstitial floor markings: One (1) coat MPI 60 (interior/ Exterior Latex Porch & Floor Paint, Low Gloss).

3.10 **PAINT COLOR:**

A. Color and gloss of finish coats is specified on Finish Schedule.
B. For additional requirements regarding color see Articles, “REFINISHING EXISTING PAINTED SURFACE” and “MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE”.
C. Coat Colors:
   1. Color of priming coat: Lighter than body coat.
   2. Color of body coat: Lighter than finish coat.
   3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
   1. Paint to match color of casework where casework has a paint finish.
   2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.11 **MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE:**

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.

B. In spaces not scheduled to be finish painted on Finish Schedule.

C. Paint various systems specified in Division 02 - EXISTING CONDITIONS.

D. Paint after tests have been completed.

E. Omit prime coat from factory prime-coated items.

F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in "BUILDING AND STRUCTURAL WORK FIELD PAINTING"; "Building and Structural Work not Painted".

H. Color:

1. Paint items having to match surrounding surfaces or to match existing.
2. Paint colors as specified on drawing Finish Schedule except for following:
   a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
   b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
   c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
   d. Federal Safety Red: Exposed fire protection piping, hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.

e. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.

f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.

I. Apply paint systems on properly prepared and primed surface as follows:

1. Exterior Locations:

a. Apply two (2) coats of MPI 94 (Exterior Alkyd, Semi-gloss) to the following ferrous metal items:

Vent and exhaust pipes with temperatures under 94 degrees C(201 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.

b. Apply two (2) coats of MPI 11 (Exterior Latex, Semi-Gloss) to galvanized and zinc-copper alloy metal.

c. Apply one (1) coat of MPI 22 (High Heat Resistant Coating), 650 degrees C (1200 degrees F) to incinerator stacks, boiler stacks, and engine generator exhaust.

2. Interior Locations:

a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) to following items:

Metal under 94 degrees C (201 degrees F) of items such as bare piping, fittings, hangers and supports.

Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.

Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

b. Apply two (2) coats of MPI 22 (High Heat Resistant Coating) to ferrous metal surface over 94 degrees K (290 degrees F) of following items:

Steam line flanges, bare pipe, fittings, valves, hangers and supports over 94 degrees K (290 degrees F).

Engine generator exhaust piping and muffler.

c. Paint electrical conduits containing cables rated 600 volts or more using two (2) coats of MPI 94 (Exterior Alkyd, Semi-gloss) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.

3. Other exposed locations:
   a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two (2) coats of MPI 1 (Aluminum Paint).
   b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One (1) coat of MPI 50 (Interior Latex Primer Sealer) and one (1) coat of Exterior Latex Semi-Gloss.

3.12 **BUILDING AND STRUCTURAL WORK FIELD PAINTING:**

A. Painting and finishing of interior and exterior work except as specified here-in-after.
   1. Painting and finishing of new work including colors and gloss of finish selected is specified in Finish Schedule, drawing AS-301.
   2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
   3. Painting of ferrous metal and galvanized metal.
   4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
   5. Identity painting and safety painting.

B. Building and Structural Work not Painted:
   1. Prefinished items:
      a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
      b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
   2. Finished surfaces:
      a. Hardware except ferrous metal.
      b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
      c. Signs, fixtures, and other similar items integrally finished.
   3. Concealed surfaces:
      a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
      b. Inside walls or other spaces behind access doors or panels.

c. Surfaces concealed behind permanently installed casework and equipment.

4. Moving and operating parts:
   a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
   b. Tracks for overhead or coiling doors, shutters, and grilles.
5. Labels:
   a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
   b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Galvanized metal:
   a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
   b. Gas Storage Racks.
   c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.
8. Gaskets.
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.
15. Wood Shingles.

3.13 **IDENTITY PAINTING SCHEDULE:**

A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.
   1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
   2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories

such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.

3. Locate Legends clearly visible from operating position.
4. Use arrow to indicate direction of flow using black stencil paint.
5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:
   a. High Pressure - 414 kPa (60 psig) and above.
   b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
   c. Low Pressure - 103 kPa (14 psig) and below.
   d. Add Fuel oil grade numbers.
6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off		Green	White	Blow-off
Boiler Feedwater		Green	White	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Green	White	H.P. _____*
High Pressure Condensate Return		Green	White	H.P. Ret ____*
Medium Pressure Steam		Green	White	M. P. Stm ____*
Medium Pressure Condensate Return		Green	White	M.P. Ret _____*
Low Pressure Steam		Green	White	L.P. Stm _____*
Low Pressure Condensate Return		Green	White	L.P. Ret _____*
High Temperature Water Supply		Green	White	H. Temp Wtr Sup
High Temperature Water				

Return		Green	White	H. Temp Wtr Ret
Hot Water Heating Supply		Green	White	H. W. Htg Sup
Hot Water Heating Return		Green	White	H. W. Htg Ret
Gravity Condensate Return		Green	White	Gravity Cond Ret
Pumped Condensate Return		Green	White	Pumped Cond Ret
Vacuum Condensate Return		Green	White	Vac Cond Ret
Boiler Water Sampling		Green	White	Sample
Continuous Blow-Down		Green	White	Cont. B D
Pumped Condensate		Green	White	Pump Cond
Pump Recirculating		Green	White	Pump-Recirc.
Vent Line		Green	White	Vent
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Orange	Black	Acid Waste
Vent		Orange	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Fire Protection Water				
Sprinkler	Red	Red	White	Auto Spr
Standpipe	Red	Red	White	Stand
Sprinkler	Red	Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, as indicated in Electrical drawings.

B. Fire and Smoke Partitions:
   1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
   2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
   3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room on room side of partition.
   4. Use semi-gloss paint of color that contrasts with color of substrate.
C. Identify columns in pipe basements and interstitial space:
   1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
   2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (18 inches) below overhead structural slab.
   3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
   4. Color:
      a. Use black on concrete columns.
      b. Use white or contrasting color on steel columns.

3.14 **PROTECTION CLEAN UP, AND TOUCH-UP:**

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

SECTION 12 22 16
DRAPERY TRACK AND ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes window drapery tracks and drapery traverse rods.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Postconsumer and preconsumer recycled content as specified in PART 2 - PRODUCTS.

C. Manufacturer's Literature and Data: Drapery tracks, traverse rod, hardware.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)

D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal

C. The Aluminum Association Publication (AA):

DAF 45-2003(R2009).....Designation System for Aluminum Finishes

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum, Extruded: ASTM B221M (B221).

2.2 WINDOW DRAPERY TRACKS

A. General: Fabricate drapery tracks of extruded aluminum, with necessary hangers, fittings, fastenings, and curtain carriers. Provide interior finish of track suitable for passage of master carriers and other carriers.

1. Provide traverse type tracks with bi-parting operation as required by field conditions.

2. Where drapery width exceeds 4572 mm (15 feet) in width, provide two (2) separate one-way tracks with cords on opposite ends. Tracks shall fit together evenly, with a right hand master used on first track and a left hand master used on the second track, so that sufficient overlap of draperies will occur.
3. Provide wall tension pulleys on all track installations.

B. Tracks: Form of extruded aluminum 1.27 mm (0.050 inch) thick.
1. Provide channel shape track with a cross section width and depth to carry the drapery without sagging.
2. On bi-parting tracks, provide two-wheel nylon or ball bearing end pulleys with zinc-coated steel housing at each end. On one-way tracks, provide two-wheel nylon or ball bearing end pulleys with zinc-coated steel housing at one end, and nylon insert pulleys at other end of track.

C. Wall Mounting Brackets: Provide brackets of 1.27 mm (0.05 inch) aluminum to fit flush with track faces, and be of length to allow tracks to hang 63 mm (2-1/2 inches) from wall.

D. Carriers: Ball bearing nylon rollers or non-binding two-wheel nylon rollers with eyes for drapery hooks. Provide one (1) carrier for each 101 mm (4 inches) of track. Provide master carriers with four (4) nylon wheels each.

E. Accessories: Provide all component parts, including No. 4 drapery cord with a rayon center, end pulleys, weighted cord pulls, batons track splicers, end shields, wall pulleys, and fastenings.

2.3 DRAPERY TRAVERSE ROD

A. Provide heavy-duty rods, flat top type, formed of 0.96 mm (0.038 inch; 20 gauge) cold-rolled steel, with baked-on white enamel finish.

B. Provide traverse hardware for direction of travel, and location on wall or ceiling, as required.

C. Provide tension pulleys for each rod. Tension pulleys are to have a metal center stem.

D. Provide cotton draw cord with rayon center, No. 4 size.
1. Provide self-lubricating, nylon type carriers, brackets, and intermediate supports, and related components required for a complete working installation.

2.4 HAND TRAVERSE CORDLESS TRACK SYSTEM

A. Provide heavy-duty track assembly with baton on room side of draperies where it is readily visible and easily used. Ceiling mounted extruded aluminum track with baked enamel finish.

2.5 FASTENERS

A. Provide fasteners for installation as follows:

Fasteners	Structural Material
Wood or sheet metal screw	Wood
Self-tapping screw	Metal, sheet metal
Case hardened, self-tapping screw in pre-drilled hole	Solid masonry or concrete
Screw or bolt in expansion shield	Solid masonry or concrete
Toggle or molly bolt	Hollow masonry, gypsum wallboard, plaster

2.6 BITUMINOUS PAINT

A. ASTM D1187/D1187M.

2.7 FINISH

A. Provide exposed surfaces with the following finish:
   1. Steel: Baked-on enamel or epoxy coating finish as standard with the manufacturer.

PART 3 - EXECUTION

3.1 PROTECTION

A. Apply a heavy coat of bituminous paint to aluminum track surfaces that will be in contact with concrete, plaster, or dissimilar metal.

3.2 INSTALLATION

A. Window Drapery Track: Set tracks straight and level, and rigidly anchor to surfaces with fastenings, as required by building construction.
   1. Install wall-mounted tracks with two (2) brackets 305 mm (1 foot) apart on each track end. Space intermediate supports not over 1219 mm (4 feet) apart. Leave sufficient ceiling clearance to allow for drapery heads.

B. Drapery Traverse Rod: Provide for direction of travel, and location on wall or ceiling.
   1. As shown on construction documents.

2. Install tension pulleys for each rod at 457 mm (18 inches) above the floor, and locate them so that they are not visible when drapes are hung.
3. Anchor wall pulleys to window sill or wall as required by track location and length of drapes. Space intermediate supports at maximum of 1270 mm (50 inches).

- - - E N D - - -

SECTION 26 41 00
FACILITY LIGHTNING PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing and installation of a complete UL master labeled lightning protection system.

1.2 RELATED WORK

A. SECTION 07 60 00, FLASHING AND SHEET METAL1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance VA REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit the following:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Show locations of air terminals, connections to required metal surfaces, down conductors, and grounding means.
   c. Show the mounting hardware and materials used to attach air terminals and conductors to the structure.
2. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the lightning protection system conforms to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the lightning protection system has been properly installed and inspected.
   c. Certification that the lightning protection system has been inspected by a UL representative and has been approved by UL without variation.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

780-17.....Standard for the Installation of Lightning Protection Systems

C. Underwriters Laboratories, Inc. (UL):

96-16.....Lightning Protection Components

96A-16.....Installation Requirements for Lightning Protection Systems

467-13.....Standard for Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Lightning protection components shall conform to NFPA 780 and UL 96, for use on Class Istructures. Aluminum materials are not allowed.

1. Class Iconductors: Copper.
2. Class I air terminals: Solid copper, 460 mm (18 inches) long, not less than 9.5 mm (3/8 inch) diameter, with sharp points.
4. Ground rods: Copper-clad steel, Steel or Stainless steel, 0.75 in (19 mm) diameter by 3 m (10 feet) long.
5. Ground plates: Solid copper, not less than 20 gauge.
6. Bonding plates: Bronze, 50 square cm (8 square inches).
7. Through roof connectors: Solid copper riser bar, length and type as required to accommodate roof structure and flashing requirements.
8. Down conductor guards: Stiff copper or brass.
9. Anchors and fasteners: Bronze bolt and clamp type shall be used for all applications except for membrane roof. Adhesive type are allowed only for attachment to membrane roof materials, using adhesive that is compatible with the membrane material.
10. Connectors: Bronze clamp-type connectors shall be used for roof conductor splices, and the connection of the roof conductor to air terminals and bonding plates. Crimp-type connectors are not allowed.
11. Exothermic welds: Exothermic welds shall be used for splicing the roof conductor to the down conductors, splices of the down conductors, and for connection of the down conductors to ground rods, ground plates, and the ground ring.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.

B. Coordinate installation with the roofing manufacturer and roofing installer.

C. Install the conductors as inconspicuously as practical.

D. Install the down conductors within the concealed cavity of exterior walls where practical. Run the down conductors to the exterior at elevations below the finished grade.

E. Where down conductors are subject to damage or are accessible near grade, protect with down conductor guards to 2.4 m (8 feet) above grade. Bond down conductors guards to down conductor at both ends.

F. Make connections of dissimilar metal with bimetallic type fittings to prevent electrolytic action.

G. Install ground rods and ground plates not less than 600 mm (2 feet) deep and a distance not less than 900 mm (3 feet) nor more than 2.5 m (8 feet) from the nearest point of the structure. Exothermically weld the down conductors to ground rods and ground plates in the presence of the COR.

H. Bond down conductors to metal main water piping where applicable.

I. Bond down conductors to building structural steel.

J. Connect roof conductors to all metallic projections and equipment above the roof as indicated on the drawings.

K. Connect exterior metal surfaces, located within 900 mm (3 feet) of the conductors, to the conductors to prevent flashovers.

L. Maintain horizontal or downward coursing of main conductor and insure that all bends have at least an 200 mm (8 inches) radius and do not exceed 90 degrees.

M. Conductors shall be rigidly fastened every 900 mm (3 feet) along the roof and down to the building to ground.

N. Air terminals shall be secured against overturning either by attachment to the object to be protected or by means of a substantial tripod or other braces permanently and rigidly attached to the building or structure.

O. Install air terminal bases, cable holders and other roof-system supporting means without piercing membrane or metal roofs.

P. Use through-roof connectors for penetration of the roof system. Flashing shall be provided by roofing contractor in accordance with Section 07 60 00, FLASHING AND SHEET METAL.

Q. Down conductors coursed on or in reinforced concrete columns or on structural steel columns shall be connected to the reinforcing steel or the structural steel member at its upper and lower extremities. In the case of long vertical members an additional connection shall be made at intervals not exceeding 30 M (100 feet).

R. A counterpoise or ground ring, where shown, shall be of No. 1/0 copper cable having suitable resistance to corrosion and shall be laid around the perimeter of the structure in a trench not less than 600 mm (2 feet) deep at a distance not less than 900 mm (3 feet) nor more than 2.5 M (8 feet) from the nearest point of the structure.

S. On construction utilizing post tensioning systems to secure precast concrete sections, the post tension rods shall not be used as a path for lightning to ground.

T. Where shown, use the structural steel framework or reinforcing steel as the down conductor.

1. Weld or bond the non-electrically-continuous sections together and make them electrically continuous.
2. Verify the electrical continuity by measuring the ground resistances to earth at the ground level, at the top of the building or stack, and at intermediate points with a sensitive ohmmeter. Compare the resistance readings.
3. Connect the air terminals together with an exterior conductor connected to the structural steel framework at not more than 18 M (60 feet) intervals.
4. Install ground connections to earth at not more than 18 M (60 feet) intervals around the perimeter of the building.
5. Weld or braze bonding plates to cleaned sections of the steel and connect the conductors to the plates.
6. Do not pierce the structural steel in any manner. Connections to the structural steel shall conform to UL 96A.

U. For obstruction lights, the following additional requirements shall apply:

1. Extend air terminals 300 mm (1 foot) above the top of the light fixtures and securely clamp to the light fixture supports.
2. Install 600 volt class lightning arresters. Connect the arresters to the lightning circuit conductors at suitable locations, and ground and bond them to the lightning protection system.

V. Where the drawings show the new lightning protection system connected to an existing lightning protection system with or without a UL master label, the new portion of the lightning protection system requires UL inspection and a Letter of Findings.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Test the ground resistance to earth by standard methods, and conform to the ground resistance requirements of LPI-175.

B. A UL representative shall inspect the lightning protection system. Obtain and install a UL numbered master label for each of the lightning protection systems at the location directed by the UL representative and the COR.

---END---

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 37 32 01 S
REPAIRING CRACKS IN CONCRETE BY INJECTING EPOXY RESIN

PART 1 - GENERAL

1.1 SUMMARY:

A. This specification provides guidance on patching cracks in concrete by injecting an epoxy adhesive.

B. Epoxy Injection should be used for dormant cracks, i.e., cracks that remain unchanged. Dormant cracks generally pose little danger. However, if left unrepaired, they will provide channels for moisture penetration.

C. The calculated maximum crack width for concrete should not exceed 0.3 mm. Consult a professional to determine the cause for cracking and its source, as superficial repairs can aggravate the problem.

1.2 RELATED REQUIREMENTS

A. Drawings and general provisions of the Contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 REFERENCES:

American Society for Testing and Materials (ASTM)

PART 2-PRODUCTS

2.1 MATERIALS

A. Epoxy Resin (Abatron, Inc., Sika Corp., Chem Co Systems, Inc. or approved equal).

1. For Fine Cracks:

a. Epoxy shall be a two-part type; low viscosity epoxy adhesive material containing 100% solids and shall meet or exceed the following characteristics when tested in accordance with the standards specified.

b. Characteristics of Components:

- Component A - shall be a blend of modified epoxy resins.
- Component B - shall be a blend of modified amine curing agents.

c. Test Method Requirements:

- Component A - Brookfield RVT, 700 maximum; Viscosity @ 25

+/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit), cps; Spindle No.@ 20 rpm.

- Component B - Brookfield RVT, 240 maximum; Viscosity @ 25 +/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit, cps; Spindle No.2.

d. Properties of Combined Components: When mixed in the ratio of two parts Component A to one-part Component B by volume; or 100 parts Component A to 44 parts Component B by weight, properties shall be:

- Potlife, 60g @ 25 +/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit), minutes; 25 minutes maximum.

e. Properties of the Cured Adhesive: When cured for seven days @ 25 +/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit), unless otherwise specified, properties shall be:

- Ultimate Tensile Strength: ASTM D638; 8000 minimum.
- Compressive Yield Strength, psi: ASTM D695*; 15,000 minimum.
- Heat Deflection Temperature: ASTM D648*; 55 Celsius (130 Fahrenheit) minimum.

  NOTE: Test specimens must be cured in a manner such that the peak exothermic temperature of the adhesive does not exceed 25 degrees Celsius (77 degrees Fahrenheit).

2. For Wide Cracks:

a. Epoxy shall be a two-part gel epoxy adhesive material containing 100% solids and shall meet or exceed the following characteristics when tested in accordance with the standards specified.

b. Properties of Combined Components: When mixed in the ratio of two parts Component A to one-part Component B by volume; or 100 parts Component A to 34 parts Component B by weight, properties shall be:

- Potlife, 200g @ 25 +/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit), minutes.

c. Properties of the Cured Adhesive: When cured for seven days @ 25 +/- 2 degrees Celsius (77 +/- 3 degrees Fahrenheit), unless otherwise specified, properties

shall be:

- Ultimate Tensile Strength: ASTM D638; 10,342 kPA (1,500 psi) minimum.
- 2) Compressive Yield Strength: ASTM D695; 41,369 kPa (6,000 psi) minimum.
- Heat Deflection Temperature: ASTM D648; 41 Celsius (105 Fahrenheit) minimum.

B. Surface Seal: (Epoxy Mortar or Oil-Free Clay)

1. Description: The surface seal material is that material used to confine the injection adhesive in the joints or cracks during injection and cure.
2. Properties: The surface seal material shall have adequate strength to hold injection fittings firmly in place and to resist injection pressures adequately to prevent leakage during injection. The material shall not leave a residue upon removal.
3. NOTE: Provide adhesive crack fillers and other related materials that are compatible with one another and with substrates under conditions of severe weather, demonstrated by sealant manufacturer based on testing and field experience.

2.2 EQUIPMENT FOR INJECTION:

A. Type: The equipment used to meter and mix the two injection adhesive components and inject the mixed adhesive into the crack shall be portable, positive displacement type pumps with interlock to provide positive ratio control of exact proportions of the two components at the nozzle. The pumps shall be electric or air powered and shall provide in-line metering and mixing.

B. Discharge Pressure: The injection equipment shall have automatic pressure control capable of discharging the mixed adhesive at any pre-set pressure up to 1,379 kPa (200 psi + 5 psi) and shall be equipped with a manual pressure control override. For injection of the gel epoxy, the equipment shall be equipped with the above features and be able to pump at up to 34,474 kPa (5,000 psi).

C. Ratio Tolerance: The equipment shall have the capability of maintaining the volume ratio for the injection adhesive prescribed by the manufacturer of the adhesive within a tolerance

of + 5% by volume at any discharge pressure up to 1,379 kPa (200 psi). For gel epoxies, the ratio will be checked by weight at up to 34,474 kPa (5,000 psi).

D. Automatic Shut-Off Control: The injection equipment shall be equipped with sensors on both the Component A and B reservoirs that will automatically stop the machine when only one component is being pumped to the mixing head.

E. The manufacturer of the injection equipment and the manufacturer of the epoxy resin adhesive for injection shall be one and the same.

PART 3-EXECUTION

3.1 EXAMINATION

A. Examine the nature and severity of the crack for method of repair.

1. Note directions and widest point of cracks.

3.2 PREPARATION SURFACE PREPARATION:

A. Do not proceed with installation of joint sealers until contaminants capable of interfering with their adhesion are removed from joint substrates.

B. Surfaces adjacent to joints or other areas of application shall be cleaned of dirt, dust, grease, oil or other foreign matter detrimental to bond of epoxy injection surface seal system.

C. Entry ports shall be provided along the crack at intervals of not less than the thickness of the concrete member at that location.

D. Surface seal material shall be applied to the face of the crack or end. For through cracks, surface seal shall be applied to both faces.

E. Allow enough time for the surface seal material to gain adequate strength before proceeding with the injection.

3.3 ERECTION, INSTALLATION, APPLICATION

A. If the crack is still damp when repairs are going to be made, be sure to use an epoxy appropriate for damp conditions.

B. Seal both sides of cracks with an epoxy mortar or oil-free clay, leaving small holes through which epoxy resin will be injected. 3mm to 6mm (1/8" to 1/4") diameter tubing can be used to form holes. Holes should be 51 mm - 102 mm (2"-4") long and roughly 204 mm (8") apart.

C. Inject two-component epoxy using device as provided by manufacturer.

D. Injection of epoxy adhesive shall begin at lower entry port and continue until there is an appearance of epoxy adhesive at the next entry port adjacent to the entry port being pumped.

E. When epoxy adhesive travel is indicated by appearance at the adjacent port, injection shall be discontinued on the entry port being pumped, and epoxy injection shall be transferred to next adjacent port where epoxy adhesive has appeared.

F. Perform epoxy adhesive injection continuously until cracks are completely filled.

G. If port-to-port travel of epoxy adhesive is not indicated, the work shall be stopped immediately and the engineer notified.

H. When cracks or joints are completely filled, epoxy adhesive shall be cured for sufficient time to allow removal of injection or port sealing devices.

I. The outermost quarter inch of the crack shall be filled with a colored epoxy material of the installers choice subject to prior approval of the COR. The colored epoxy filler shall match the existing material which it is filling and shall not be discernible from a distance of 15 feet.

3.4 ADJUSTING/CLEANING

Upon completion of work, remove all seal material and other residue from site. Remove and clean exposed surfaces of residue or staining resulting from this work.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 37 32 02 S
PATCHING SCALING CONCRETE MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on patching scaling concrete with a mortar patch.

B. Scaling of concrete masonry is the local flaking or peeling away of the near surface portion of concrete or mortar. It is often caused by:

1. Overtroweling: Weakens the bond of the surface concrete to the concrete below by bringing an excess of fines to the surface.
2. Insufficient concrete strength: Often a result of cool temperatures that do not allow the concrete to cure properly and gain sufficient strength to withstand freeze/thaw cycles and the application of de-icing chemicals.
3. The use of concrete with low air contents in areas exposed to severe winter weather.
4. Heavy application of salts and/or de-icing chemicals.
5. The use of high slump concrete.
6. Improper curing methods or lack of curing.
7. Insufficient protection of fresh concrete during cold temperatures.

C. Safety Precautions:

1. Apply Sealer in a well ventilated area.

1.2 RELATED REQUIREMENTS

A. Drawings and general provisions of the Contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 DEFINITIONS

A. Scaling: The local flaking or peeling away of the near surface portion of concrete or mortar.

B. Peeling: Thin flakes of mortar are broken away from the concrete surface.

C. Light scaling: Loss of surface mortar without exposure of coarse aggregate.

D. Medium scaling: Loss of surface mortar without exposure of coarse aggregate.

E. Severe scaling: Loss of surface mortar 5 to 10 mm in depth with some loss of mortar surrounding aggregate particles 10 to 20 mm in depth so that aggregate is clearly exposed and stands out from the concrete.

F. Very severe scaling: Loss of coarse aggregate particles as well as surface mortar surrounding aggregate, generally greater than 20 mm in depth.

G. Spalling: a more extreme form of scaling.

1.4 MAINTENANCE

A. Check to see that all gutters, downspouts and other water run-off systems are in good repair and clear of debris.

B. Correct conditions of "rising damp", splash-back, and foundation wetness.

C. Remove water-entrapping vegetation from on or near the concrete walls.

D. Do not use salt to melt snow anywhere near concrete walls.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Thoro System Products Miami, FL, Quikrete, Sika or approved equal

2.2 MATERIALS

A. Mortar Patching Material such as Commercial Grade FastSet Repair mortar, Concrete Resurfacer (Commercial Grade Quikrete), SikaQuick VOH, SikaRepair SHB (Sika) or approved equal

B. Bonding Agent or Cement paste such as "Acryl" (Thoro System Products), or approved equal.

C. Rebars and/or stainless steel pins as required

D. Epoxy as required

E. Clean, potable water

2.3 EQUIPMENT

A. Hammer and chisel

B. Trowel

C. Mortar board

D. Masonry drill

PART 3 - EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Cut back damaged area to stable material. Roughen the surface with a hammer and chisel.

CAUTION: AVOID GRINDING THE MATERIAL IN THIS PROCESS, BECAUSE IT LEAVES

THE SURFACE TOO SMOOTH TO ACHIEVE A PROPER BOND.

B. Remove all rust from any exposed rebar.

C. Cut out any rebar which is severely corroded and splice Paint freshly cleaned rebar with an anti-corrosion agent to prevent further rusting.

D. If the patch is unusually large, drill holes into sound substrate and insert stainless steel pins anchored with epoxy.

E. Remove all dust and debris with a broom or vacuum.

F. Square off the perimeter of the area to be patched so that a feathered edge will not be required.

G. About 1 hour before making repair, moisten surface of area to be patched.

H. To insure a good bond between patch and substrate, brush substrate surface with either a cement wash or a bonding agent such as Acryl.

I. Apply patching material, with a trowel, in 3/4" layers, compacting thoroughly after each layer.

J. Work the finished surface carefully making sure to match texture and appearance of surrounding surfaces.

NOTE: PATCHING MIX SHOULD MATCH AS CLOSELY AS POSSIBLE, THE TEXTURE AND COLOR OF THE ORIGINAL.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 37 32 04 S
Patching Spalled Concrete

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on patching spalls and holes in concrete with a cementitious patching material.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project guidelines and Division 01 General Requirements, apply to this section.

1.3 QUALITY ASSURANCE

A. Masonry and Concrete Repair: Prepare sample panels of size indicated for each type of masonry material indicated to be patched, rebuilt or replaced.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Sika Corporation usa.sika.com

B. General Polymers, www.generalpolymers.com

C. BASF Master Builders Solutions, www.master-builders-solutions-basf.us

D. Euclid Chemical, www.euclidchemical.com

E. Others, as approved by the COR.

2.2 MATERIALS

A. Concrete Patching Material: One component, early strength, cementitious patching material "Sike Repair 222" (Sika Corporation); "TPM 723" (General Polymers); (Master Builders), or approved equal.

B. Water: Clean, free of oils, acids, alkalis and organic matter.

2.3 EQUIPMENT

A. Trowels

B. Chisels

C. Stiff bristle brushes (non-metallic)

PART 3 - EXECUTION

3.1 PREPARATION

A. Protection:

1. Protect persons, motor vehicles, surrounding surfaces of building whose masonry surfaces are being restored, building

site, and surrounding buildings from injury resulting from masonry restoration work.

2. Erect temporary protection covers over pedestrian walkways and at points of entrance and exit for persons and vehicles which must remain in operation during course of masonry restoration work.
3. Contractor shall test those areaway drains, window well drains, etc., which will be used to assure that drains are functioning properly prior to performing masonry restoration operations in those areas. The Contractor shall report immediately to the COR the location of drains which are found to be stopped up or blocked.
4. Prevent grout or mortar used in repointing and repair work from staining face of surrounding masonry and other surfaces. Remove immediately grout and mortar in contact with exposed masonry and other surfaces.
5. Protect sills, ledges, windows, and projections from patching material droppings.

3.2 ERECTION, INSTALLATION, APPLICATION

A. Remove deteriorated concrete at spalls to sound material. Grind, chisel or saw cut 1" deep undercut around perimeter of patch. Clean with the use of brushes and vacuum. Thoroughly remove any concrete showing traces of oils or grease.

B. Thoroughly wet patched area prior to casting concrete patching material. If cement patching material manufacturer recommends a different procedure, such procedure is to be followed and executed in accordance with published instructions and in accordance with approved test patch.

C. Install cement patching material in strict accordance with manufacturer's published instructions.

D. Finish surface to match surface being patched, by grinding, troweling, sacking, or brushing.

3.3 ADJUSTING/CLEANING

A. After mortar has fully hardened, thoroughly clean exposed masonry surfaces of excess mortar and foreign matter using stiff nylon or bristle brushes and clean water, spray applied at low pressure.

B. Use of metal scrapers or brushes will not be permitted.

C. Use of acid or alkali cleaning agents will not be permitted.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 41 50 01 A
INSTALLING STEEL BAR ANCHORS IN BRICK WALLS WITH CEMENTITIOUS GROUT

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on reinforcing brick masonry walls by installing anchor bars into core drilled holes. Such action may be required due to seismic considerations of a project. This procedure involves the following:

1. Core drill holes into walls for installation of bar anchors.
2. Remove existing brick to form cavities for access to connect the anchors to the structure of the building.
3. Provide and install threaded reinforcing bar anchors in the core drilled holes.
4. Embed the anchors in cementitious grout pumped into the core drilled holes.

1.2 RELATED REQUIRMENTS

A. Drawing and General provision of the contract, including General Project guidelines and Division 01 General Requirements, apply to this section.

1.3 REFERENCES

A. American Society for Testing Materials (ASTM), http://www.astm.org/

1. ASTM C 62-85A, "Standard Specification for Building Brick (Solid Masonry Units made from Clay or Shale)".
2. ASTM C 67-85, "Standard Methods of Sampling and Testing Brick and Structural Clay Tile".

B. Occupational Safety and Health Administration (OSHA). https://www.osha.gov/law-regs.html

1. OSHA General Industry Safety and Health Standards (29 CFR 1910), Publication V2206.
2. "OSHA Construction Industry Standards (29 CFR 1926).
3. Both regulations can be found in OSHA Publication 2207, which includes a combination of both Parts 1910 and 1926 as they relate to construction safety and health. It is for sale by the Superintendent of Documents, U.S. Government Printing Office, Washington DC 20402.

1.4 SUBMITTALS

A. Product data:

1. Certified copies of mill reports indicating chemical and physical

properties of threaded rebar.

2. Certificates of compliance for Portland cement, fly ash, lime and sand from an approved independent testing lab.

B. Quality Control Submittals:

1. Procedures: Submit descriptive data and written procedures for core drilling of holes and cutting out of access cavities in existing brick.
2. Submit schedule and description of procedure for drilling, inserting anchors and injection of grout.
3. Material Quality: Submit reports of tests of the strengths of the threaded parts of reinforcing bar assemblies showing compliance with these procedures. Certified material certificates may be provided in lieu of test reports when permitted by the Contracting Officer on the basis of adequate justification.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Steel Items:

1. Threaded reinforcing bars shall be deformed bar conforming to ASTM A615, Grade 60.
2. Threaded reinforcing bars shall have rolled or forged threads at one end capable of developing the following yield and tensile strengths:

DIAMETER	SIZE	YIELD STRENGTH	TENSILE STRENGTH
3/4	#6	19,800 Pounds	33,000 Pounds
7/8	#7	27,000 Pounds	46,000 Pounds
1-1/8	#9	45,000 Pounds	76,000 Pounds

3. Nuts shall be hex head, heavy type conforming to ASTM A307 or as required by specifications of the manufacturer of the threaded reinforcing bars. Nuts shall be capable of developing in the bar the ultimate strength noted on the drawings.

B. Cementitious Materials:

1. Portland Cement: C150, Type I or Type II low alkali.
2. Lime: ASTM C207, Type S.
3. Fly Ash: ASTM C618, Type F.
4. Silica Sand: #30 and #90 Grit
5. Water: Clean and potable (drinkable).

C. Grout Injection Equipment:

1. Mortar pump with agitation hopper that is capable of producing 201 kPa (30 p.s.i.), with a pressure switch that will stop grout flow at 201 kPa

(30 p.s.i).

2. Cement Mixer.
3. Volume measuring containers.
4. 19mm (3/4 inch) masonry drill bits and rotary drill motor.
5. Power Cord.
6. Water hose.
7. Water hose nozzle that is adjustable to 6.4 mm (1/4 inch) stream.
8. OSHA approved scaffold and/or ladders.
9. A 15.9 mm (5/8 inch) injection nozzle capable of penetrating to the core drilled hole containing the anchor.
   The nozzle shall have a device capable of retaining grout at a pressure of 186 - 201 kPa (27-30 p.s.i.) At 201 kPa (30 p.s.i.) flow of grout to the tube must automatically be stopped.
10. Pressure monitoring system at ground level for use by the testing laboratory inspector.
11. Plastic foam joint filler for plugging injection ports to prevent grout flow: preformed compressible, resilient, foam of diameter appropriate to prevent flow from injection ports.

2.2 MIXES

A. Grout Proportions and Mixing:

1. Parts shall be measured by volume.
2. Proportions:
   3 parts #30 silica sand
   1 part #90 silica sand
   1 part Portland Cement
   1/2 part lime
   1/2 part fly ash

   Enough water to sufficiently achieve a consistency as determined by Section 2.02 A.3. below.

1. Consistency Test:
   a. A grout sample shall be taken from the nozzle.
      Fill a 51 mm (2-inch) diameter by 102 mm (4-inch)-high cylinder.
   b. Pour the sample slowly from 30.5 cm (12 inches) high onto an impervious smooth level surface.
   c. Proper consistency is indicated by a 152 mm (six inch) to 178 mm (seven inch) diameter puddle on the impervious surface. The diameter shall be calculated as the average of 2 widths of the puddle measured at right angles to each other, one being the

maximum width.

2. Grout mixing. Thoroughly mix dry ingredients before adding water. Mix in quantity that can be used in 1-1/2 hours after initially adding water to the dry ingredients. Water may be added to maintain proper consistency during the allowed 1- 1/2 hours.

PART 3-EXECUTION

3.1 PREPARATION

A. Surface Preparation:

1. Equipment: Drilling equipment shall not be anchored into architectural finishes. Finishes removed for access or clearance and damaged finishes shall be replaced to match the adjacent existing finishes.
2. Holes:
   a. Cavities shall be formed by using non-impact tools.
   b. Holes for deep anchors shall be core drilled to the depths required and locations. Before drilling, determine the location of obstructions and the necessary clearances to prevent damage to embedded pipes, windows, and architectural finishes.
   c. Roughen anchor holes by rotary wire brush scouring full length.
   d. Clean holes with vacuum and a nylon brush.
   e. Drill injection ports with non-impact rotary drill.

3.2 ERECTION, INSTALLATION, APPLICATION

A. Drill holes for deep anchors. The size of the holes shall be 9.5mm (3/8") minimum, 15.9 mm (5/8") maximum larger than the nominal bar diameter.

B. Drill injection ports to intersect the deep anchor holes. Holes that miss the deep anchor holes shall be filled with injection grout.

C. Flush the hole and ports with water at full city pressure through a 6.4 mm (1/4") nozzle. Start flushing at the high point of sloping holes, working toward the low; at horizontal holes, start at the end, working toward the aperture; flushing each port in sequence until all ports have been flushed and water flows clean from the hole. Use water adequate to saturate the brickwork. Use vacuum to collect water as it emerges; to protect damage to finishes.

D. Insert bar anchors. Secure bar anchors in proper position for connection to the hardware.

E. Inject grout starting at the low point. Continue injection until grout flows from the next port. Plug the port and continue injection and plugging of ports until flow stops at 207 kPa (30 p.s.i). pump pressure or the hole is filled. If flow stops, immediately begin injecting at the next open injection port to be plugged and continue as above. If the port

will not take injection, immediately begin injection at the nearest open port and continue as above.

F. After hole is filled, remove plugs and fill injection ports with grout.

G. Wash grout spillage from wall immediately. Remove and dispose of all spilled grout.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 41 50 02 S
INSTALLING STEEL BAR ANCHORS INTO BRICK UNIT MASONRY WITH RESINS

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on embedding threaded rods in epoxy or polyester resin in holes drilled into brick masonry walls to provide anchors for attachment to hardware connected to the framing of the building.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Abatron, Inc. http://www.abatron.com/

B. Sika Corporation http://usa.sika.com/

2.2 MATERIALS

A. Resin: The resin shall be a two-component, structural epoxy or polyester resin adhesive. The components shall be pre-measured in separate cartridges.

B. Threaded Rods: Threaded rods shall be sized as indicated.

C. Screen Tube: Screen tubes shall be 22.2 mm (7/8 inch) diameter, approximately 28 wire per 25.4 mm (1 inch) square mesh screen.

D. Mixing Nozzle: The resin components may be automatically mixed by a nozzle that is secured to the component cartridge.

2.3 EQUIPMENT

A. Electric drill with mixing paddle provided by adhesive manufacturer.

B. Pail in which to hand mix adhesive.

PART 3 - EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Holes:

1. The drill holes should be sized according to the rod used. Typically, the hole shall be no greater in diameter than 3.2mm (1/8-inch) or 6.4mm (1/4-inch) (depending on the adhesive used) larger than the pin to be embedded, and ten to fifteen bar diameters deep.

2. Drill shall be non-impact type rotary drill with a masonry bit.
3. Clean holes with vacuum and a stiff nylon brush.

B. Installation:

1. Verify the rod length as appropriate for the depth with at least 38 mm (1-1/2") projection. NOTE: Projection may be more or less depending on use.
2. If using automatic pressure-injection equipment, resin shall be automatically measured and mixed in the mixing nozzle.
3. If mixing by hand, mix each component by volume as directed by manufacturer into clean pail. Components shall be used straight, without any additives. Mix thoroughly for time specified by manufacturer with low-speed drill (400-600 rpm) fitted with appropriate paddle. Blend until uniform color is achieved.
4. Place the resin into the screen tube. Completely fill the screen tube. Begin placement at the end of the screen and withdraw the nozzle as the screen fills.
5. Insert the screen tube and resin into the hole.
6. Slowly insert the threaded rod into the resin to the full depth of the hole.
7. Do not disturb the anchor until the adhesive has cured. Follow manufacturer’s instructions.
8. No gaps shall be visible between the rod and the masonry.
9. Conform with all requirements of the ICBO Research

Report for the product, Manufacturers' Recommendations, and all applicable Building and Safety Guidelines. These referenced documents shall be on the job and referred to when the work of this Section is underway.

3.2 ADJUSTING/CLEANING

A. Remove spills and excess adhesive with absorbent material, flush with water.

B. Uncured material can be removed with solvent as recommended by adhesive manufacturer.

C. Do not allow excess material to cure as cured adhesive can only be removed mechanically.

- - - END - - -

SECTION 42 00 02 S
REMOVING BIOLOGICAL GROWTH FROM EXTERIOR MASONRY AND STUCCO

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on removing biological growth such as lichens, algae, mold and mildew from masonry and stucco.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. ProSoCo, Inc. http://www.prosoco.com/, or approved equal

B. Others, as approved by COR

2.2 MATERIALS

A. For Removing Mold and Mildew:

1. Hydrogen Peroxide (H202):

   a. An unstable compound used especially as an oxidizing and bleaching agent, an antiseptic, and a propellant.

   b. Other chemical or common names include Peroxide of hydrogen*; Solution of hydrogen dioxide*; Superoxol*; (hydrogen peroxide is commonly sold as a 3% solution; Superoxol is a 30% solution; Superoxol causes flesh burns; 3% hydrogen peroxide does not).

   c. Potential Hazards: TOXIC (when concentrated); CORROSIVE TO FLESH; FLAMMABLE (in high concentration).

   d. Available from chemical supply house, drugstore, pharmaceutical supply distributor, or hardware store.

2. Powdered detergent such as "Tide" or approved equal.

3. Proprietary cleaner such as "Limestone Restorer" (ProSoCo, Inc.), D/2 biological Solution, Inc. or approved equal.

4. Clean, potable water

2.3 EQUIPMENT

A. Garden hose and nozzle

B. Rubber or polyethylene bucket (DO NOT USE A METAL BUCKET

AS IT MAY REACT WITH THE CHEMICAL CLEANER AND PRODUCE TOXIC FUMES)

C. Glass or ceramic mixing bowl

D. Knife blade

E. Stiff, natural bristle brushes (non-metallic)

F. Tampico brush, roller or low pressure (50 psi maximum) spray such as pneumatic garden sprayer

G. Rubber gloves

H. Safety glasses

PART 3-EXECUTION

3.1 EXAMINATION

A. Confirm the source of excessive moisture, i.e. leaky downspout, standing water, roof overhang, vegetation, etc., has been repaired before continuing with this task.

B. Determine the type of growth, i.e. algae and lichens, or mold and mildew.

3.2 PREPARATION

A. Protection:

1. Provide adequate wash solutions (i.e. water, soap and towels) before starting the job.
2. Do not spray in the immediate vicinity of unprotected people and animals.

3.3 ERECTION, INSTALLATION, APPLICATION

NOTE: DO NOT TRY MORE THAN ONE TREATMENT ON A GIVEN AREA UNLESS THE CHEMICALS USED FROM PRIOR TREATMENT HAVE BEEN WASHED AWAY.

A. Removing Lichens and Algae (ONLY):

1. Remove as much plant growth as possible using a knife blade and stiff bristle brush.
2. Water rinse the surface to remove most of the plant material.
   a. If the substrate is sound and dense, use low to medium water pressure (100-400 psi).
   b. If the masonry is softer, use standard water pressure from the spigot.
3. Allow water to soak plant growth for approximately 30 minutes.
4. Gently scrub the surface with a stiff, natural bristle brush.
5. Thoroughly rinse the surface again with clean, clear water at low pressure from a garden hose.

NOTE: DO NOT USE ANY CHEMICALS WITHOUT FIRST CONSULTING WITH VA GEMS

Coordinator.

B. Removing Mold and Mildew (ONLY):

Prepare the cleaning agent solution.

1. Apply the solution to the affected area and scrub with a medium-hard natural bristle brush. Keep the surface saturated until the stain is bleached,

   CAUTION: BE SURE TO WEAR RUBBER GLOVES AND SAFETY GLASSES WHEN APPLYING THE SOLUTION.

2. Thoroughly rinse the surface with clean, clear water from a garden hose and allow to dry.
3. Repeat the process as necessary to achieve the desired level of cleanliness.

C. For treating any of the above (lichens, algae, mold or mildew), try using a proprietary cleaner such as Limestone Restorer (ProSoCo, Inc.), D/2 (D/2 Biological Solution, Inc.) or approved equal.

1. Add 1 part Limestone Restorer to 3 parts water and mix in a rubber or polyethylene bucket

   <u>or</u>

   Apply undiluted D/2.

2. Apply a flood coat of this mixture to the masonry using a low pressure spray (approximately 50 psi).

   CAUTION: DO NOT USE A HIGH PRESSURE SPRAY.

   a. Begin spraying at the top of the vertical surface and move across horizontally. Allow 100mm (4”) rundown.
   b. Continue the next horizontal pass across the previous run down.
   c. Allow the solution to remain on the surface approximately 5-30 minutes depending upon the thickness of the growth.
   d. Gently scrub the surface with a stiff, natural bristle brush.
   e. Thoroughly rinse the treated area using pressure-applied water (approximately 200 to 300 psi) with a 25 degree fan spray or garden hose with nozzle adjusted to a tight stream. Rinse from the bottom of the treated area to the top.
   f. Allow the surface to dry a minimum of 24 hours.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 42 11 01 S
SEALING ABRADED BRICK MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on sealing abraded brick masonry to prevent excessive water penetration into the units. It contains guidance on applying a siloxane water repellent coating to the abraded brick surface.

B. The application of a water repellent serves to protect the brick masonry against liquid water penetration while allowing water vapor to escape from within the brick.

C. Safety Precautions:

1. Apply sealer in a well ventilated area.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 PROJECT/SITE CONDITIONS

A. Environmental Requirements:

1. Surface and air temperatures should be no less than 10 degrees C (50 degrees F). when applying sealer.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Water Repellents (Sealers):

1. American Building Restoration 9720 S. 60th Street Franklin, WI 53132 414/761-2440
2. Diedrich Chemicals 7373 South 6th Street Oak Creek, WI 53154 414/764-0058 800/323-3565
3. Hydrochemical Techniques, Inc. 253 Locust Street Hartford, CT 06114 203/527-6350
4. Hydrozo 1001 "Y" Street P.O. Box 80879 Lincoln, NE 68501 402/474 6981.
5. ProSoCo, Inc. P.O. Box 1578 755 Minnesota Ave. Kansas City, KS 66117 913/281-2700
6. Thoro System Products 7800 NW 38th Street Miami, FL 33166 305/592-2081
7. Trocal Dynamit Nobel of America 10 Link Drive Rockleigh, NJ 07647 800/631-1668
8. V.I.P. Enterprises 9690 NW 41st Street, Ste. 1 Miami, FL 33178 800/327-7479

9. Or approved Equivalent

2.2 MATERIALS

NOTE: Use gentlest effective cleaning method.

A. For Cleaning:

1. Hydrogen Peroxide (for mold & mildew)
2. Detergent such as "Tide", "All" or approved equal.

B. For Sealing:

1. Solvent-based sealer with not less than 5% solids, but preferably more than 7%. Try one of the following or approved equal:
   a. "Old 200 Hydro-Seal" (American Building Restoration)
   b. "Diedrich 303-S Siloxseal Siloxane Water Repellent" (Diedrich Chemicals)
   c. "HT-101 Eon-Clad Water Repellent" (Hydroclean - Hydrochemical Techniques, Inc.)
   d. "PP/Hydrozo Clear Double 7" (Hydrozo)
   e. "Tile & Masonry Protector" (ProSoCo, Inc.)
   f. "ThoroClear 777" (Thoro System Products)
   g. "Chem-Trete-Bsm" (Trocal)
   h. "Ombrella Clear No. 9100" (V.I.P. Enterprises)

C. Clean, potable water

2.3 EQUIPMENT

A. Nylon bristle brushes
B. Soft bristle brushes
C. Garden hose
D. Paint rollers
E. Low-pressure spray equipment
F. Plastic bucket

PART 3-EXECUTION

3.1 PREPARATION

A. Remove all loose and crumbling mortar and/or brick to provide a sound surface.
B. Remove any efflorescence from the surface by dry brushing supplemented, if necessary, with clean, clear water.
C. Remove organic growth from the surface. See 420002 S Removing Biological Growth.
D. Remove mildew and surface dirt:

1. Mix approved cleaning solution.
2. Apply solution to the brick surface and scrub with a soft bristle brush.

3. Thoroughly rinse the surface with clean, clear water and allow to dry.
4. See 420002 S Removing Biological Growth.

E. Repoint or recaulk as required before applying sealer.

3.2 ERECTION/INSTALLATION/APPLICATION

NOTE: SEALER MUST BE APPLIED TO A CLEAN SURFACE (SEE SECTION 3.1 PREPARATION ABOVE) TO BE EFFECTIVE.

A. For Sealer Application:
1. Apply sealer to a test area in an inconspicuous location.
2. Allow to cure for several weeks; Evaluate performance including color change, water permeability, etc.
3. When appropriate sealer is selected, apply sealer by brush or low-pressure spray with a rundown of at least 30.5 cm (12 inches). Follow manufacturer's instructions for precautions and special application procedures.
   a. Apply sealer on dry days; Avoid treating noticeably damp surfaces.
   b. The transparent sealer or water repellent should penetrate the brick to a depth of 3mm (1/8") to 12.7mm (1/2").
   c. It works by changing the capillary angles of the pores in the face of the brick wall from positive (suction) to negative (repellency).
4. Allow to air-dry for at least 6 hours (length of drying time may vary depending on product used).
5. Apply a second coat of sealer as in 4. above and allow to dry.

3.3 ADJUSTING/CLEANING

A. Clean brushes and sprayers with white mineral spirits when the work is completed.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 42 11 02 S
REMOVING AND REPLACING DETERIORATED BRICK MASONRY

PART 1- GENERAL

1.1 SUMMARY

A. This procedure includes guidance on removing and replacing deteriorated brick masonry. It should be used in conjunction with the procedure on repointing masonry.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 PROJECT/SITE CONDITIONS

A. Environmental Requirements:

1. Do not proceed with brick replacement under adverse weather conditions, or when temperatures are below or above manufacturer's recommended limitations for installation; Proceed with the work only when forecasted weather conditions are favorable for proper cure.
2. Wet Weather: Do not apply or mix mortar on outside surfaces with standing water or outside during rain.
3. Cold Weather, winter construction is not allowed without consent of COR; Winter construction when surface temperature of masonry is below 4°C (40°F). or air temperature is predicted to be below 4°C (40°F) within 48 hours. See #6 below.
4. Hot Weather: The surface temperature of the work, not the ambient temperature, should not be higher than 38°C (100°F).; Mortar mixing should be done only in the shade; Cover mortar with water-misted burlap in hot weather to reduce evaporation; Pointing work should be done in the shade; Work around the building during the day so that the fresh work will be shielded from direct sunlight to reduce evaporation rate. High temperatures can cause flash setting of cements and rapid evaporation of water in the mix, leading to lack of development of final strength by the cement.
5. All materials must be kept above 4°C (40 degrees F).

6. Special Precautions and Notes: Do not allow masonry to freeze until mortar is thoroughly dry and hardening almost complete (approx. three days time); The setting of lime mortar is very much slower than that of cement mortar because the curing requires the absorption of carbon dioxide to form hard lime carbonates; It is a very lengthy process, so do not expect it to become hard immediately, especially at the core of large masses of masonry.

PART 2- PRODUCTS

2.1 MATERIALS

A. Salvaged Brick: Approved by COR, sound, crack free, clean brick without face chips larger than 12.7mm (1/2 inch), salvaged from removal of removed face brick work of same type.

B. Replacement Brick: Approved by COR.

C. Brick slips: Approved by COR.

D. Mortar to match existing.

2.2 EQUIPMENT

A. Trowel

B. Joint tools

C. Chisel

D. Hawk

E. Hammer

F. Stiff bristle brushes

PART 3- EXECUTION

3.1 EXAMINATION

A. Deterioration of brick due to moisture is evident as spalling, erosion, cracking, peeling paint, and deteriorated mortar joints.

B. Some causes of brick deterioration include:

1. Rising damp,
2. the accumulation of dissolved acids carried by rainwater and condensation,
3. soluble salts crystallizing in the pores of the brick face,
4. alternate freezing and thawing, the accumulation of dirt and air-borne particles on the exterior surface.

3.2 PREPARATION

A. Surface Preparation:

1. Wet brick having absorption rates greater than 7g (0.025 oz.) per 25mm sq. (1 inch) per minute.
   - On the flat side of a brick, deposit water on an area approximately the size of a 25 cent coin.
   - If the water disappears in less than 30 seconds, wet the bricks.
2. Absorptive brick should be thoroughly soaked in the pile each afternoon prior to the day they are to be used.
3. Cover the bricks with tarps or heavy paper to prevent evaporation.
4. Wet brick as necessary during the day; Sprinkle the brick pile with a hose for a period long enough for water to run down the side of the pile; Use wetting methods which ensure that each masonry unit is nearly saturated but surface dry when laid; (DO NOT wet stone masonry units).
5. Repair flashing if necessary.
6. Where fresh masonry joins existing work, clean the exposed surface of the set masonry by removing loose brick and mortar and wet lightly to obtain the best possible bond with the new work.

3.3 ERECTION, INSTALLATION, APPLICATION

A. Replacing Deteriorated Masonry with Brick slips: The use of brick slips should be limited to replacement of individual bricks or to small areas of brickwork.

   NOTE: Brick slips are brick facings about 25.4mm (1 inch) thick. They are used when damage to adjacent sound brickwork is likely to occur if full-size replacement is attempted.

   1. Cut out the deteriorated masonry to a regular shape.
   2. Clean the cavity of loose mortar and other debris by hand using a chisel and stiff bristle brushes.
   3. Solidly set the slip in a bed of mortar.

B. Replacing Deteriorated Units with Full-Size Bricks:

   1. Carefully remove deteriorated brick units by hand using a hammer and chisel.
   2. Rebuild back-up and substrate as required to replace any unsound material that was removed.

3. Clean the cavity of loose mortar and other debris by hand using a chisel and stiff bristle brushes.
4. Lightly wet the exposed brick surfaces.
5. Lay brick units with completely filled bed and head joints; Butter ends with sufficient mortar to fill head joints and shove into place.

   NOTE: Lay masonry plumb and true following the coursing and patterns of the adjacent existing sound construction; Level off work at required heights and form beds to build-in salvaged or moved materials.
6. If adjustments are required, remove units, clean off mortar and reset in fresh mortar.
7. Blend new work into existing work smoothly with no lines of demarcation and no change of pattern or coursing.
8. Rake all joints in replacement work to receive tuck pointing; Joints up to 9.5mm (3/8") in width shall be raked to a depth of 12.7mm (1/2"); Joints 9.5mm (3/8") in width shall be raked to a depth of 25.4mm (1").
9. Brush all excess mortar from the wall surface frequently during the work; Protect all existing surfaces from mortar dripping and splashing.

3.4 ADJUSTING/CLEANING

A. Clean off adjacent surfaces which have been spattered during the course of the work. Rinse immediately with clean, clear water.

B. Wipe all excess mortar as the work progresses. Dry brush at the end of each day's work.

C. After mortar is thoroughly set and cured, remove loose mortar and dirt from new masonry surfaces.

D. Wash down the masonry surface with clean, clear water.

- - - END - - -

SECTION 42 11 03 S
PATCHING CRACKS IN BRICK MASONRY

PART 1-GENERAL

1.1 SUMMARY

A. This procedure includes guidance on repairing cracks or infilling small holes in brick masonry using a cementitious patching material.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

PART 2-PRODUCTS

2.1 MANUFACTURERS

A. Jahn Restoration Techniques and Research (Cathedral Stone Company) http://cathedralstone.com/
B. Edison Chemical Systems, Inc. http://www.edisoncoatings.com/
C. Or approved equalivalent.

2.2 MATERIALS

A. Cementitious patching material such as "M100 Stone Restoration Mortar" (Jahn Restoration), "Custom System 45" Edison Chemical Systems), or approved equal.
B. Clean, soft cloths
C. Clean, potable water
D. Approved equivalent

2.3 EQUIPMENT

A. Stiff natural bristle brushes
B. Trowel
C. Chisel

D. Hammer

E. Putty knife

PART 3-EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Remove all loose materials from cracked brickwork.

B. Widen crack to 3mm (1/8") wide and grout crack and any voids with a cementitious grout that is color matched to clean brick. The grout should be compatible in texture and porosity to the adjacent masonry. Tape joint to provide a clean neat finished appearance.

C. Severely cracked brick associated with displaced masonry should be dismantled. Probe interior conditions and repair following an engineer's evaluation. Rebuild brickwork to match existing bonding patterns and use salvaged brick where possible and new brick to match existing color, texture and porosity.

END OF SECTION

SECTION 42 11 04 S
GENERAL CLEANING OF EXTERIOR BRICK MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on cleaning exterior brick masonry.

B. Safety Precautions:

A. The work specified herein requires knowledge of older materials and methods and a high degree of skill to execute properly. This work should be performed only by an experienced, pre-qualified contractor. It is not recommended that building maintenance personnel perform this work.

B. This outline specification contains recommended materials which may be toxic. The manufacturer s literature on application techniques, appropriate protection for workers and disposal procedures for materials should be complied with in conjunction with all regulatory requirements referenced in this document.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 SUBMITTALS

A. Product Data:

1. Submit manufacturer's product literature instructions for use, and Material Safety Data Sheets (MSDS) to the Contracting Officer or the designated representative for all cleaning materials.
2. Prior to commencing the cleaning operations, the Contractor shall submit to the Contracting Officer or the designated representative a written description of the entire methods and procedures proposed for cleaning the masonry including, but not limited to: Method of application, dilution of application, temperature of application, length of time of surface contact, method of rinsing surface (temperature, pressure, and duration), repetition of procedures, etc.
3. Prior to commencing the cleaning operations, the Contractor shall submit to the Contracting Officer or the designated representative for approval, a written description of

proposed materials and methods of protection for preventing damage to adjacent materials, vehicular and pedestrian traffic, and the building interior during the cleaning of masonry.

B. Samples:

1. The Contractor shall clean a sample panel(s), approximately 1m x 1m (3' x 3') in area, on each type of masonry included in the work of this section for approval by the Contracting Officer. Locations of sample panels to be selected by the Contracting Officer or the designated representative.
2. Adjust the chemical concentrations, working pressures and methodologies during test panel cleaning, as directed by the Contracting Officer or the designated representative.
3. Sample panels shall be cleaned by the Contractor using methods, materials, and working pressures previously submitted and approved. Sample panel cleaning shall be performed in the presence of the Contracting Officer or the designated representative. The working pressures during sample panel cleaning shall be varied up to the previously submitted and approved capacities to determine the best working pressure.
4. Where chemical cleaners and poultices are tested and do not produce the desired results and sample area is not approved by the COR, the manufacturer's representative shall be contacted and be present during subsequent testing.
5. The Contractor shall obtain written approval from the Contracting Officer or the designated representative of cleaning methods, working pressures, materials, equipment used and sample panels before proceeding with building cleaning operations. For this written approval purpose, the Contractor shall allow a minimum of seven calendar days after completion of sample cleaning to permit the Contracting Officer of the designated representative to study the sample panels for negative reaction. Retain approved panels in unaltered condition, suitably designated during construction as a standard for judging completed work.

1.4 QUALITY ASSURANCE

A. Qualifications:

1. Comply with municipal and federal regulations governing all

work included in this section and including, but not limited to waste disposal.

2. General Objective: The objectives of masonry cleaning are to remove dirt, grime and coatings from masonry without damaging underlying material and to give all masonry a clean, uniform appearance without blotches, streaks, runs, or any other kind of spotty appearance. Too aggressive cleaning shall not be acceptable.
3. Cleaning Standard: Prepare sample panels for approval which shall establish a standard for general brick and stone cleaning. General cleaning shall not commence until written approval is obtained from the COR or the designated representative.
4. Contractor: The work of this section shall be performed by a specialist possessing a minimum of five (5) years of specialized experience in the cleaning of masonry similar to that which is required by this project. Contractors shall submit to the Contracting Officer or the designated representative references of previous work justifying their experience. The COR or the designated representative reserves the right to approve or disapprove the use of Contractors contingent upon their experience.
5. In the event that the Contractor wishes to modify any cleaning method specified, he shall submit his proposal in writing for consideration and review. The Contracting Officer of the designated representative will have the right to ask for test samples before final approval. Any such modifications or changes shall be at no additional cost to the Government.

B. Regulatory Requirements: Comply with municipal and Federal regulations governing the cleaning, chemical waste disposal, product safety, scaffolding and protection to workers and adjacent properties.

1.5 PROJECT/SITE CONDITIONS

A. Environmental Requirements:

1. No cleaning shall be executed when air or masonry surface temperature is below 7 degrees C. (45 degrees F.), unless adequate, approved means are provided for maintaining a 7 degrees C. (45 degrees(F.),temperature of the air and materials during, and for 48 hours subsequent to, cleaning.
2. Perform cleaning and washing of the exterior masonry only during

hours of natural daylight

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. ProSoCo, Inc. http://www.prosoco.com/

B. D/2 Biological Solutions, Inc. http://www.d2bio.com/

C. Diedrich Technologies, Inc. http://www.diedrichtechnologies.com/

D. Or approved equal

2.2 MATERIALS

A. Masonry Cleaner: Commercially available very mild blend of inhibited acidic ingredients and wetting agents specifically formulated for restorative cleaning of brick and natural stone surfaces such as "Sure Klean Limestone & Masonry Prewash and After-wash" (ProSoCo, Inc.), D/2 (D/2 Biological Solutions, Inc.), "101 G Granite, Terra Cotta and Brick Restoration Cleaner" (Diedrich Technologies), or approved equal.

   Masonry cleaner should have the following physical characteristics:

   Form: Clear liquid

   ppH: 1.2

   Specific Gravity (Typical): 1.05

B. Water: Potable, non-staining and free of oils, acids, alkalis and organic matter.

C. Liquid Strippable Masking Agent: Manufacturer's standard liquid, film forming, strippable masking material for protecting glass, metal and polished stone surfaces from damaging effect of acidic and alkaline masonry cleaners, such as "Sure Klean Strippable Masking" (ProSoCo, Inc.), or approved equal.

2.3 EQUIPMENT

A. Brushes: Natural fiber bristle only. The use of wire brushes or steel wool is not permitted.

B. Garden hose with fan tip nozzles

PART 3 - EXECUTION

3.1 PREPARATION

A. Protection:

1. Take all necessary precautions and measures to protect surrounding materials on the site, surfaces of the building not being cleaned, adjacent buildings, pedestrians and vehicles from coming in contact with cleaning chemicals, over spray, or runoff. Products used for masonry cleaning may be harmful to

painted, polished, glazed, or metallic surfaces. Any damage to materials caused by the cleaning operations is unacceptable and shall be repaired or replaced by the Contractor to the satisfaction of the Contracting Officer or the designated representative at no cost to the Government.

2. Provide protection from water damage to building, structure, or building contents as required.
3. Protect trees and plants around the building from contamination or damage as directed by the Contracting Officer or the designated representative. The Contractor shall be responsible for replacing with new stock, any trees, shrubbery or grass damaged by the cleaning operations.
4. Test all drains and other water removal systems to assure that drains and systems are functioning properly prior to performing any cleaning operations. Notify Contracting Officer or the designated representative immediately of any and all drains or systems that are found to be stopped or blocked. Contractor shall repair drains if so directed by the Contracting Officer or the designated representative. Do not begin work of this Section until the drains are in working order.
5. Provide a method to prevent solids such as stone or mortar residue from entering the drains or drain lines. Contractor shall be responsible for cleaning out drains and drain lines that become blocked or filled by sand or other solids because of work performed under this Contract.

3.3 ERECTION, INSTALLATION, APPLICATION

A. Dilute masonry cleaner with 16 parts water to 1 part concentrate, or use appropriate dilution based on sample panel cleaning. When diluting, always pour water into empty bucket first, then carefully add concentrate. Handle in rubber or polyethylene buckets only. Acidic liquids and fumes will attack metal.

B. After protecting all non-masonry surfaces, thoroughly wet the area to be cleaned.

C. Apply the cleaning solution liberally using roller or densely filled (tampico) masonry washing brush. Do not apply restoration cleaner with low or high pressure spray. Such application will drive the chemicals deep into the surface, making it difficult to rinse completely. Discoloration to the surface may result.

D. Allow the cleaning solution to remain on the surface for three to five minutes in accordance with approved test procedures. Light scrubbing of the surface will improve cleaning results. Caution: Do not allow cleaning solution to "dry in" to the masonry - bleaching may result.
   1. Begin rinsing with low pressure flood rinse to remove initial acidic residue with minimum risk of wind drift.
   2. Then rinse the treated area thoroughly using pressurized cold water. Rinse water pressure shall not exceed 300 psi, and shall be sprayed through nozzles fitted with 38 cm to 50 cm (15 to 20") wide tips. Nozzles shall be held perpendicular to the surface at a working distance of .4 to .6 m (1.4 to 2.0 feet). All pressure pumps shall be equipped with working pressure gauges.
   3. Rinse from the bottom of the treated area to the top flushing each section of the surface with a concentrated stream of water. To avoid streaking on vertical walls, take care to keep the wall below wet and rinsed free of cleaner and residues.
   4. Application of rinse water is extremely important to assure that all surface staining matters and cleaning residues are thoroughly flushed from the treated surface.

E. Surrounding stone surfaces below the section of brick to be cleaned shall be pre-wetted and rinsed periodically during cleaning operations to prevent etching of stone.

F. The surfaces below the sections of brick to be cleaned shall be protected from run-off.

G. Repeat procedures if necessary to remove heavier build-up of soiling. Use Prosoco Sure-Klean 800 Stain Remover on rust stained areas.

- - - END - - -

SECTION 44 00 04 S
REMOVING AND REPLACING DETERIORATED STONE MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on removing and replacing deteriorated stone masonry.

B. Damage to stone in the form of cracking, splitting and spalling often occurs in areas sheltered from direct rain-washing.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 REFERENCES

A. American Society for Testing and Materials

1.4 PROJECT/SITE CONDITIONS

A. Environmental Requirements:

1. Weather: Do not proceed with patching or replacement under adverse weather conditions, or when temperatures are below or above manufacturer's recommended limitations for installation; Proceed with the work only when forecasted weather conditions are favorable for proper cure.
2. Wet Weather: Do not apply or mix mortar on outside surfaces with standing water or outside during rain.
3. Cold Weather, winter construction is not allowed without consent of COR; Winter construction (midwest region) is defined as any time between December 1 and March 1 and/or when surface temperature of masonry is below 4 degrees
4. 40 degrees F). or air temperature is predicted to be below 4 degrees C. (40 degrees F). within 48 hours; Heat mortar materials to above 4 degrees C (40 degrees F.) if necessary.
5. Hot Weather: The surface temperature of the work, not the ambient temperature, should not be higher than 38 degrees C (100 degrees F.); Mortar mixing should be done only in the shade; Cover mortar in hot weather to reduce evaporation; Pointing work should be done in the shade; Work around the building during the day so that the fresh work will be shielded from direct sunlight to reduce evaporation rate.

6. All work must be suspended during frosty weather unless a heated enclosure is provided. Work should not be done in full sun at temperatures above - degrees 27 degrees C (80 degrees unless shading of the walls is provided and the masonry wall temperature is kept below this point; Burlap sacking and water misting may be necessary to control evaporation; High temperatures can cause flash setting of cements and rapid evaporation of water in the mix, leading to lack of development of final strength by the cement.
7. Special Precautions and Notes: Do not allow masonry to freeze until mortar is thoroughly dry and hardening almost complete (approx. three days time); The setting of lime mortar is very much slower than that of cement mortar because the curing requires the absorption of carbon dioxide to form hard lime carbonates; It is a very lengthy process, so do not expect it to become hard immediately, especially at the core of large masses of masonry.

PART 2-PRODUCTS

2.1 MANUFACTURERS

A. Repointing Tools: Available from good hardware stores, building material suppliers or mail-order catalogues.
   1. Goldblatt Tool Co.
   2. Marshalltown Trowel Co.
   3. Or Approved Equivalent

2.2 MATERIALS

A. Salvaged Stone: Approved, sound, crack free, clean stone without face chips larger than 12.7 mm (1/2 inch), salvaged from removed face stone work.
B. Replacement Stone: Provide natural building stone of type (classification) and with color, and surface texture to match existing stone on building. Match existing stones in size and shape, approved by VA.
C. Lime
D. Naturally colored binder such as (PFA) low sulphate pozzolanic fly ash
E. HTI Powder (white refractory brick powder - "High Temporary Insulation") - may be used as a pozzolanic additive to make a

weak hydraulic mortar.

F. Mortar and Grout Materials:
   1. Portland Cement: ASTM C150, Type I.
      a. For stonework and other masonry indicated, provide non-staining white cement complying with staining requirement of ASTM C91 for not more than 0.03% water soluble alkali.
   2. Hydrated Lime: ASTM C207, Type S.
   3. Aggregate for Mortar: ASTM C144, unless otherwise indicated.
      a. Colored Mortar Aggregate: Natural or manufactured sand selected to produce mortar color indicated.
   4. Colored Mortar Pigment: Natural and synthetic iron oxides and chromium oxides, compounded for use in mortar mixes. Use only pigments with record of satisfactory performance in masonry mortars.
   5. Water: Clean, free of oils, acids, alkalis and organic matter.
   6. Aggregate for Grout: ASTM C404.

G. Manufactured and raw materials accessory to the primary products.
   1. Supports, fasteners, installation accessories, and anchors: Stainless steel only for use with granite. Brass, bronze, or stainless steel for use with limestone and other masonry.
   2. Flashings or barriers: Sheet copper or as detailed.

2.3 EQUIPMENT

A. Trowels: range in length from 25-30 cm (10-12 inches)

B. Chisels: Joint chisels or a standard mason's chisel with a 38mm (1-1/2 in.) blade and a long narrow handle

C. Hammers:
   1. 5# stone dressing hammer
   2. 2# striking hammer
   3. "No-Bounce" hammer
   4. Full size and one half size brick hammers

D. Joint Tools: (see 2.01 MANUFACTURERS above)
   1. 9.5-6 mm (3/8"-1/4") raised beaded tool
   2. 9.5-6 mm (3/8"-1/4") beaded striking tool
   3. 12mm (1/2") raised beaded tool with offset handle
   4. 12mm (1/2") flat joint iron
   5. Pointing tool should be about 1.5mm (1/16") narrower than the joint being filled to achieve good compaction

E. Hawks: Plywood or steel hawk (mortar board)

F. Brushes:

1. Natural bristle brushes
2. Stiff bristle brushes (no wire)

G. Spray bottle

2.4 MIXES

A. Measurement and Mixing: Measure cementitious and aggregate material in a dry condition by volume or equivalent weight. Do not measure by shovel, use known measure. Mix materials in a clean mechanical batch mixer.

B. Consistently and accurately measure materials for each batch.

C. Mix for at least five minutes in a mechanical batch mixer or mortar box.

D. Mix trowel workable consistency for unit masonry setting and resetting.

1. Mixer Pointing Mortar: Thoroughly mix cementitious and aggregate materials together before adding any water. Then mix again adding only enough water to produce a damp, unworkable mix which will retain its form when pressed into a ball. Maintain mortar in this dampened condition for 1-to-2 hours. Add remaining water in small portions until mortar of desired consistency is reached. Use mortar within 30 minutes of final mixing; do not retemper or use partially hardened material.

E. Mix firm dry consistency for repointing.

F. Discard mortar not used within two hours after mixing; do not retemper at mixer.

G. Dispose of waste mortar and cleaning water in approved manner; do not contaminate the site, adjoining property, or waste to sewers.

H. Colored Mortar: Produce mortar of color required by use of selected ingredients. Do not adjust proportions.

1. Color Pigmented Mortar: Where colored mortar pigments are indicated, do not exceed pigment-to-cement ratio of 1-to-10, by weight.
2. Match original color and texture for each kind of mortar and masonry work.
3. Match to inner mortar color which has been protected from

weathering and soiling, not face color.

4. Conform to manufacturers dry mix color matching recommendations.

I. Do not use admixtures of any kind in mortar, unless otherwise indicated.

J. Mortar Proportions:

NOTE: VERIFY PROPORTIONS WITH MORTAR ANALYSIS TO MATCH OR RESEMBLE EXISTING MORTAR.

1. Pointing Mortar for Stone: One part white portland cement, 1 part lime, 6 parts colored mortar aggregate.
2. Rebuilding Mortar: Comply with ASTM C270, proportion Specification, Type N, unless otherwise indicated with cementitious material content limited to portland cement-lime.
3. Grout: ASTM C476.

PART 3 - EXECUTION

3.1 PREPARATION

A. Surface Preparation: Where fresh masonry joins existing work, clean the exposed surface of the set masonry by removing loose stone and mortar and wet lightly to obtain the best possible bond with the new work.

3.2 ERECTION/INSTALLATION/APPLICATION

A. Carefully remove by hand, as indicated, any stone which has deteriorated, shifted, or is damaged beyond repair.

1. Carefully cut out perimeter joints of stone by hand using a hammer and chisel.
2. Break down the rest of the damaged stone with vertical saw cuts and break it up with a hammer and chisel.

B. Carefully clean out the cavity to receive the stone. Remove mortar, loose particles and other debris from the cavity in preparation for resetting.

C. Thoroughly wet the cavity with water; Dampen the new or salvaged stone with water.

D. Spread a 12.7mm (1/2 inch) thick mortar bed into the open cavity; the new mortar should consist of coarse sand and grit to match the original mortar. Butter vertical joints for full width before setting and set unit(s) in full bed of mortar, unless otherwise

indicated.

E. Repair and/or replace removed stone with salvaged stone, where possible, or with new stone to match existing, including size. Set the stone in the cavity.

F. Fill the joints with a grout of lime and low sulphate pozzolanic fly ash (PFA) or lime and HTI powder.

G. Tool joints after setting to match joints of surrounding stone.

H. Repoint new mortar joint to comply with requirements for repointing existing masonry, except rake out joints before mortar sets.

3.3 ADJUSTING/CLEANING

A. Wipe all excess mortar as the work progresses. Dry brush at the end of each day's work. After mortar is thoroughly set and cured, clean new masonry surfaces, walls, sills, overhangs, etc., of all loose mortar, and dirt and point up all nail holes, cracks, etc., after which wash down all masonry walls, leaving them clean and neat.

- - - END - - -

SECTION 44 60 02 S

Surface Repair of Limestone by Consolidation and Use of Lime Mortar

EXECUTION OF THIS PROCEDURE REQUIRES A HIGH DEGREE OF EXPERTISE. CONSIDERABLE SKILL IS REQUIRED IN COLOR MATCHING AND IN MATCHING MORTAR REPAIRS.

PART 1-GENERAL

1.1 SUMMARY

A. This procedure includes guidance on repairing damaged limestone by flooding the surface with lime water for several days followed by surface repair with lime mortar.

B. This procedure describes three stages in what is known as Baker's Lime Method.

1. Developed by Robert Baker in the 1950's, Baker's Lime Method is a 4-stage process of limestone cleaning and repair which includes cleaning with a hot lime poultice, repair, consolidation and preservation.
2. This procedure describes the repair, consolidation and preservation stages. The cleaning stage of the process is described in 04460-01-R.

C. Safety Precautions: Check manufacturer's literature for precautions and effects of products and procedures on adjacent building materials, components, and especially vegetation. Take appropriate protective measures.

D. Contractor shall be familiar with the characteristics, uses and problems associated with limestone, prior to proceeding with any limestone cleaning or repair.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

PART 2---PRODUCTS

2.1 MATERIALS

NOTE: Chemical products are sometimes sold under a common name. This usually means that the substance is not as pure as the same chemical sold under its chemical name. The grade of purity of common name substances, however, is usually adequate for stain removal work, and these products should be purchased when available, as they tend to be less expensive. Common names are indicated below by an asterisk (*).

A. Calcium Hydroxide:

1. Other chemical or common names include Calcium hydrate*; Hydrated lime*; Lime hydrate*; Slaked lime*.
2. Potential Hazards: SKIN IRRITANT, AVOID INHALATION OF THE DRY POWDER.
3. Available from chemical supply house, construction materials yard, construction specialties distributor, garden and lawn supply center, or hardware store.

B. Casein

C. Formalin:

1. Other chemical or common names include Formaldehyde; Formic aldehyde; Methanal; Methyl aldehyde; Oxomethane; Oxymethylene.
2. Potential Hazards: TOXIC AND MODERATELY FLAMMABLE; SKIN IRRITANT; MAY DISCOL= OR THE SKIN, MAKING IT DARKER DUE TO THE TANNING ACTION OF THE CHEMICAL.
3. Available from chemical supply house, dairy supply distributor, drugstore or pharmaceutical supply distributor, photographic supply distributor (not camera shop), or printer's supply distributor.

D. Lime mortar - "High Calcium", Non-hydraulic Type (see mixes in Section 2.03 below)

E. HTI Powder (white refractory brick powder - "High Temporary Insulation") - may be used as a pozzolanic additive to make a weak hydraulic mortar.

F. Aggregate - size, grade and color to be determined by COR (see mixes in Section 2.03 below)

G. Cotton-wool packs

H. Polyethylene sheets

I. Clean potable water

2.2 EQUIPMENT

A. Hand spray bottle

B. Mechanical spray equipment

C. Dental picks

D. Small, soft bristle brushes (short-haired)

E. Trowels and spatulas

F. Hand pump

G. Sponges

H. Rubber gloves

2.3 MIXES

PROPORTIONS MAY VARY BASED ON SIZE, GRADE, COLOR AND FUNCTION OF AGGREGATE

A. Repair mortar: Mix 1 part lime with 2 parts aggregate. Aggregate often includes LESS THAN 10% HTI powder additive.

B. Adhesive mortar (spalls): Mix 1 part lime with 1 part aggregate. Aggregate often includes a 10% HTI powder additive.

C. Grouting mortar (cracks): Mix 1 part lime with 1-1/2 parts aggregate. Aggregate often includes a 10% HTI powder additive.

D. Shelter coating: Mix 1 part lime with 2-3 parts aggregate. Aggregate often includes LESS THAN 10% HTI powder additive.

PART 3-EXECUTION

3.01 ERECTION/INSTALLATION/APPLICATION

A. Preparing the Lime water:

1. Mix 0.14g of calcium hydroxide in 100ml of water at 60°F and let stand until the water is clear.
2. Cover the surface of the lime water in its container with a float of polystyrene sheetrock pierced by a siphon tube with a filter. NOTE: IT IS IMPORTANT TO PROTECT THE LIMEWATER FROM AIR SO THAT IT DOES NOT CARBONATE AND BECOME INEFFECTIVE.
3. Draw off the lime water as needed and hand pump it into spray bottles; Make sure that the water is clear and not cloudy.

B. Consolidation by Lime water:

1. Carefully remove any cementitious filling to spalls and cracks.
2. Cut out cavities to be consolidated where new spalls and splits have developed and where previous spalls and cracks were found.
3. Remove all loose dust and debris by flushing with clean water.
4. Flood the limestone surface with a biocide if necessary to provide a clean, sterile surface for the new mortar filling.
5. Treat the cleaned surfaces and open cavities with clear lime water to attempt to consolidate the more friable areas. If water becomes cloudy, stop work and allow lime to settle to the bottom and water to again become clear. Proceed when water is clear.
6. Flood the limestone surface with the lime water for several days or as long as the surface will absorb (up to 40 applications may be necessary).
7. Remove any excess lime water on the surface with sponges; Squeeze

them out in clean water.

C. Follow Consolidation with Surface Repairs Using Mortar:

NOTE: All mortar repairs are based on lime - NO PORTLAND CEMENT OF AN KIND IS USED.

1. Flush out cavities and cracks again with water from the hand sprays to avoid de-watering the repair; Make sure the surface remains damp.
2. Fill deep cavities with a slurry of repair mortar (see Section 2.03 A. above).
3. Follow this by inserting small pieces of limestone into the cavity to reduce the thickness which needs to be built up in fine repair mortar.
4. Brush a thin slurry of repair mortar containing "HTI" powder into the cavity or fracture to provide an additional key for the repair.
5. After the slurry has dried, wet the slurry again, knead the first repair mortar and push it into place with fingers, dental plugging tools or spatulas; Not more than 5-6 mm should be pressed in at one time.
6. Protect the treated area from direct sunlight or strong drafts to avoid rapid drying out.
7. Apply wet cotton-wool packs over the repair mortar to avoid rapid drying.
8. When the cavity is dry, wet it again and repeat steps 5-7 until the cavity has been filled completely.
9. Using a spatula, trim off excess mortar to the desired profile.
10. To achieve a texture matching the stone, take a dry sponge (hessian pads, stencil brushes or purpose-made plastic scrapers will also work) and press it against the repaired surface (be careful not to press too hard as it may absorb moisture from the repair).

D. To protect the limestone and slow down the weathering process, apply a shelter coating (or sacrificial coating): This is similar in composition to the repair mortar except the proportion of aggregate to lime is slightly higher and the sand and stone dusts of aggregate are more finely crushed.

1. Mix 1 part lime with 2-3 parts aggregate; Add water and mix to achieve a consistency of thin cream; continue to mix for another 20 to 30 minutes.
2. Add Casein and Formalin to the mixture.
3. Thoroughly wet the stone with water using hand spray bottles. Wet the stone until it can no longer absorb any more water.
4. Apply the coating to the stone surface using a short-haired bristle

brush.

5. Using a second short-haired (worn) bristle brush, work the coating into the texture of the stone.
6. Cover the treated area with polyethylene sheets and intermittently spray mist the area with water during the first few hours to avoid rapid drying of the coating. **NOTE: RAPID DRYING MAY RESULT IN A POWDERY APPEARANCE.**
7. During the drying stages, additives of finely ground stone dust may be dusted on to the surface to achieve subtle color variations in the stone appearance.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 44 60 03 S
GENERAL CLEANING OF EXTERIOR LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on the removal of surface dirt and environmental pollution on exterior limestone. NOTE: GENERALLY, THIS WORK SHOULD BE ACCOMPLISHED BY AN EXPERIENCED CONTRACTOR.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

ProSoCo, Inc. Lawrence, KS 66117
1-800-255-4255, or approved equal.

2.2 MATERIALS

A. Limestone (unpolished): Sodium hydroxide, (pH 14), undiluted.
   1. For heavy high pollution stains, an alkaline-based prewash such as "Sure Klean 766 Limestone & Masonry Prewash" or equal, follow manufacturer's instructions including rinse cycle.
   2. Followed up with "Sure Klean Limestone & Masonry Afterwash" or equal, as per manufacturer's instructions.

B. Clean, potable water (heated to a temperature effective and tested for cleaning procedure and approved by COR).

2.3 EQUIPMENT

A. Pressure water rinsing equipment (measuring between 689 and 2068 kPA (100 and 300 psi) for low-pressure).

B. Fan-type spray tips (25 degree fan spray).

C. Stiff fiber-bristle brushes.

D. Plastic spatula.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine site conditions to determine that current drainage is sufficient for adequately and safely removing cleaning waste and run-off from the site.

B. Test-clean a small, inconspicuous area to check for adverse effects and damage to the material.

3.2 PREPARATION

A. Protection:
   1. Protect surrounding materials on the site and adjacent building surfaces from coming in contact with the cleaning materials and run-off.
   2. Provide workers with necessary protection against cleaning chemicals, overspray and run-off.
   3. Prevent cleaning chemicals from coming in contact with any painted, polished or metallic surfaces.
   4. Divert flow of run-off to drains in compliance with municipal codes. Comply with municipal codes regarding containment and disposal of cleaning materials.

B. Surface Preparation:
   1. Before proceeding with cleaning operations, remove all miscellaneous hardware, anchors and bird excrement from the surface to prevent any discoloration.
   2. NOTE: BIRD EXCREMENT THAT COMES IN CONTACT WITH CLEANING SOLUTION WILL LEAVE A PERMANENT DARK- COLORED STAIN ON THE SURFACE.
   3. Check for open holes and joints in surface and repoint mortar joints and caulk gaps around window and door openings, as required to prevent water and cleaning solutions from penetrating deeply into the wall.
   4. Clean the limestone working from bottom to top.

3.3 ERECTION, INSTALLATION, APPLICATION

NOTE: WHEN CLEANING, AVOID OVERCLEANING. AIM FOR ACHIEVING 85% CLEAN. MOST DAMAGE OCCURS WHEN ATTEMPTING TO CLEAN THE LAST 15%.

NOTE: TEST-CLEAN A SMALL AREA TO DETERMINE EFFECTIVENESS OF CLEANING METHODS, MATERIALS, EQUIPMENT AND WORKING PRESSURES SELECTED BEFORE PROCEEDING WITH CLEANING OPERATIONS ON LARGER AREAS. ADJUST METHODS, MATERIALS, EQUIPMENT, PRESSURES, ETC. AS NECESSARY. DO NOT PROCEED UNTIL AN ACCEPTABLE CLEANING OPERATION HAS BEEN APPROVED AND FULLY DOCUMENTED.

NOTE: DO NOT TREAT THE SURFACE WITH ACID CLEANER MORE THAN ONCE.

A. Pre-wet limestone surface using a low pressure wash (between 100

and 300 psi).

B. Apply a heavy coating of limestone pre-wash using a soft, nylon bristle brush. Follow manufacturer's applications instructions.

C. Allow to stand for one hour or as long as determined by testing.

D. Thoroughly rinse the surface using low pressure water (between 689 and 2068 kPA (100 and 300 psi)) until all suds have disappeared.

1. Rinse all corners, moldings, and interstices to remove all traces of chemical without damaging surrounding materials.

2. Rinse water should be heated to temperature necessary, as determined most effective during testing.

E. While surface is still wet from rinsing off pre-wash, apply limestone afterwash with a soft, fiber bristled brush.

1. Dilute limestone afterwash with as much water as determined effective during testing.

2. If surface has begun to dry, re-wet before applying afterwash.

3. Cover all corners, moldings, and interstices of the limestone.

F. Allow to stand for 3-5 minutes or as long as determined by testing.

G. Thoroughly rinse the surface using low pressure water (between 689 and 2068 kPA (100 and 300 psi)), with a water flow of 3.8 liters (6-8 gallons) per minute.

1. Rinse all corners, moldings, and interstices to remove all traces of chemical without damaging surrounding materials.

2. Heat rinse water to a temperature determined most effective during testing.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 44 60 07 S
REATTACHING LOOSE OR SPALLED LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY:

A. This procedure includes guidance on reattaching loose or spalled limestone that is reusable and has not been extensively damaged.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 REFERENCES:

A. American Society for Testing and Materials (ASTM), www.astm.org

PART 2 - PRODUCTS

2.1 MANUFACTURERS:

A. Axson Technologies (formerly Akemi Plastics, Inc.) www.axsontech.us

B. Sika Corporation http://usa.sika.com

C. Or approved equivalent

2.2 MATERIALS:

A. Replacement limestone - reuse any loose or fallen stone fragments that are still sound; re-use such stone in its original position and location; replacement stone should match existing limestone in color, texture and type.

B. Epoxy Adhesive such as "Sikadur 32 Hi Mod" epoxy adhesive, or approved equal (Sika Corporation).

1. High modulus, high strength, moisture insensitive epoxy adhesive with a pot life of 30 minutes at 21 degrees C (70 degrees F).
2. Can be applied at temperatures as low as 4 degrees C (40 degrees F).
3. Colored to match existing limestone.

C. A color-matched polyester-based adhesive such as "Limestone Super", Wood & Stone Company, a Axson Technologies US, Inc. company), or approved equal.

1. 10-12 minute cure depending on ambient temperature; temperatures below 32 degrees F (O degrees C) require heated mixture.
2. Can be applied at temperatures as low as 20 degrees F (-7 degrees C)
3. Colored to match existing limestone.

D. Permanent coloring agent as required, compatible with adhesive, and as recommended by adhesive manufacturer.

E. Stainless steel rods for reinforcement: 6.4 mm (1/4 inch) diameter threaded rods, length as required.

2.3 EQUIPMENT

A. Stiff bristle brushes (natural fiber or nylon)

B. Polyethylene plastic mixing vessel for mixing adhesives and patching mortar

PART 3 - EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Carefully remove all loose fragments of stone. Set aside all pieces in good condition for reuse.

B. Clean exposed metal anchors. Remove corrosion by scraping with a stiff wire bristle brush.

C. Remove unsound metal anchors and replace with new stainless steel anchors of similar size and shape. Bed anchors in epoxy grout.

D. Remove dust and debris from building stone and fragments using a stiff bristle brush.

E. For small fragments (0.028 cubic meters (.5 cubic feet) or less):

1. Coat building stone surface with adhesive such as noted above, or approved equal. Be sure to cover the entire surface, filling all voids.
2. While adhesive is still tacky, set stone fragment in place. Prevent fragment from moving until adhesive is fully cured.
3. Clean any residual adhesive from the stone surface using water and stiff bristle brush. Wet stone and fill any chips with lime-based patching mortar of appropriate color, texture and composition. Tool surface level with surrounding stone.

F. For large fragments (more than 102 mm by 102 mm by 102mm (4 inches by 4 inches by 4 inches)):

1. Follow procedures in E.1. above.
2. After adhesive has cured, anchor fragments with 6.4mm (1/4 inch) smooth stainless steel rods.

   a. Drill 6.4mm (1/4 inch) holes at a 45 degree downward angle through the face of the newly set stone fragment. Drill holes should extend at least 50 mm (2 inches) into the backing stone, 50 mm (2 inches) into the fragment and should allow for the rod to be countersunk at least 19mm (3/4 inches) from the face of the stone.

   b. Space the anchor rods between 76mm and 127 mm (3 and 5 inches) apart and no less than 51 mm (2 inches) from any edge.

3. Clean any residual adhesive from the stone surface using water and a stiff bristle brush. Wet stone and fill holes from countersunk rods with patching mortar. Tool surface level with surrounding stone.

- - - E N D - - -

Section 44 60 09 S
PATCHING SPALLED LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY:

A. This procedure includes guidance on repairing spalls in limestone using a cementitious patching material.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 SUBMITTALS:

A. Sample Stone Repair: Reattach stone fragments and patch stone at locations selected by the Contracting Officer's Representative using methods specified. Provide one sample each for granite, limestone and marble.

PART 2 - PRODUCTS

2.1 MANUFACTURERS:

A. Jahn Restoration Techniques and Research www.jahnmortars.com
B. Bonstone Materials Corporation www.bonstone.com
C. Or approved equivalent.

2.2 MATERIALS

A. Cementitious patching material such as "M70 Stone Restoration Mortar" (Jahn Restoration), “Last Patch™ Limestone” (Bonstone), or approved equal; mixed and applied following manufacturer's guidance.
B. Clean, soft cloths
C. Clean, potable water

2.3 EQUIPMENT:

A. Stiff natural bristle brush
B. Trowel
C. Chisel
D. Hammer
E. Putty knife

PART 3---EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Cut back to sound stone with chisel and hammer. Score surface to receive patch with chisel to provide a mechanical key with patching

material. Undercutting if possible is recommended to hold patch more securely.

B. Thoroughly clean all stone dust and debris from areas that are to be repaired by vacuuming or with a soft brush and water.

C. Pre-moisten stone with clean water and a stiff natural bristle brush to prevent patching mortar from drying out prematurely. Avoid over wetting stone, which inhibits adhesion. Prepare test patches as required for approval by the Contracting Officer's Representative to determine the correct degree of moistening.

D. First mix the cementitious patching material well in a dry state, then add water as per manufacturer's instructions, depending on the porosity of the limestone; between 150-200 cc (5-7 oz) of water to one kg (2 lbs) of dry material. Patching mortar should be shapable without using molds and as it is being applied should hold its shape right away. Do not mix more material than can be used within 30 minutes.

E. Apply with trowel so that patch is slightly higher than adjacent surfaces. Jahn Patching mortar can be put on from 3 mm (1/8 inch) to any required thickness at once. Allow to harden for 7 days, then carefully cut back and tool to match adjacent surfaces.

- - - END - - -

SECTION 44 60 10 S
EPOXY PATCHING CRACKS IN LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on patching cracks in limestone using an epoxy resin. This type of repair is suited for dormant (inactive) cracks no larger than 9.5 mm (3/8") wide.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 QUALITY ASSURANCE

A. Contractor: A skilled firm with not less than five (5) years experience in masonry repointing and restoration. The Contractor shall be required to submit references for five (5) successfully completed projects of similar nature.

B. Source of Material: Obtain materials for stone restoration from a single source for each type of material required, to ensure match of quality, color, pattern, and texture.

1.4 PROJECT/SITE CONDITIONS

A. Environmental Requirements: Perform work only in dry and otherwise favorable weather conditions. Protect repaired masonry against freezing or excessively rapid drying for at least 48 hours after being laid. Do not repoint mortar joints or repair masonry unless air temperatures are between 40 F (4 C) and 80 F (27 C) and will remain so for at least 48 hours after completion of work.

PART 2-PRODUCTS

2.1 MANUFACTURERS

A. Akemina www.akemina.com

B. Euclid Chemical Company www.euclidchemical.com

C. Bonstone Materials Corporation www.bonstone.com

D. Or approved equal

2.2 MATERIALS

A. Epoxy-Based Stone Repair Adhesive: A commercially available, two component, moisture insensitive, high modulus, low viscosity, epoxy resin-formulated for penetrating deep into thin masonry cracks, such as

"Akepox 1005 or 1006" (Akemina), Dural Fast Set LV in conjunction with Dural Fast Set Gel (Euclid Chemical Company), Ultimate (Bonstone Materials Corporation) or approved equal.

B. Single Source Responsibility: Provide epoxy resin, hardener and solvent produced by the same manufacturer.

C. Acetone (C_3H_6O):

1. A volatile fragrant flammable liquid ketone used chiefly as a solvent and in organic synthesis.
2. Other chemical or common names include Dimethyl ketone; Propanone
3. Potential Hazards: VOLATILE AND FLAMMABLE SOLVENT
4. Available from chemical supply house or hardware store.

D. Limestone Dust

E. Clean, potable water

2.3 EQUIPMENT

A. Syringe

B. Stiff bristle brushes (non-metallic)

PART 3-EXECUTION

3.1 PREPARATION

A. Protection:

1. Take whatever precautions are necessary to protect the existing building from damage resulting from work under this section.
2. Prevent mortar and patching compounds used in repointing and repair work from staining face of surrounding masonry and other surfaces. Remove immediately mortar and patching compounds in contact with exposed masonry and other surfaces.
3. Improper use of chemicals may constitute a health hazard. Refer to manufacturer's Material Safety Data Sheets for hazard data, special protection for use and precautions to be taken in handling and storage. Comply with manufacturer's recommendations for proper use of chemicals.

3.2 ERECTION, INSTALLATION, APPLICATION

A. Thoroughly clean dust, dirt and debris from crack.

B. Wipe surfaces to be bonded with acetone and allow to dry thoroughly.

C. Thoroughly and completely mix resin and hardener (2 minutes). Mix at low speeds to minimize entrapped air. Blend the epoxy adhesive to match color matrix of adjacent limestone by adding color limestone dust or

pigment.

D. Mask stone surfaces adjacent to crack to prevent staining of the limestone during repair operation.

E. After mixing, inject epoxy into cracks with a syringe and allow to seep in. Continue to apply material until crack is full. Sprinkle limestone dust on epoxy adhesive to mask crack.

F. Clean tools and any tape residue with acetone or solvent specifically formulated for the particular product used.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 44 60 11 S
DUTCHMAN REPAIR OF LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on the repair of damaged limestone using a dutchman. As used here, the term "Dutchman" refers to any new or salvaged stone fitted into the existing facade stone. New stone shall match existing.

B. Dutchman repair is sometimes recommended for large spalls or spalls that would be visually detracting.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 SUBMITTALS

A. Sample Stone Repair:

1. Reattach stone fragments and patch stone at locations selected by the COR using methods specified. Provide one sample each for materials to be used.
2. If samples are unsatisfactory, Contractor shall make the needed modifications and prepare new samples until they are satisfactory.
3. The samples accepted by the COR shall serve as the standard for the entire job. They shall be marked and left unpointed until all other pointing is completed.
4. The Foreperson responsible for the respective work shall be present at the sample work. Samples shall be executed by the same individuals performing the work.

1.4 QUALITY ASSURANCE

A. Contractor: A skilled firm with not less than five (5) years experience in masonry repointing and restoration. The Contractor shall be required to submit references for five (5) successfully completed projects of similar nature.

B. Work Standards: Repointing basic reference and standard for stone repointing shall be National Park Service Preservation Briefs: 2 Repointing Mortar Joints in Historic Brick Buildings, by Robert C. Mack AIA, de Teel Patterson Tiller, and James S. Askins for any aspect of masonry repointing work not herein specified.

C. Source of Material: Obtain materials for stone restoration from a single source for each type of material required, to ensure match of quality, color, pattern, and texture.

1.5 PROJECT/SITE CONDITIONS

A. Environmental Requirements: Perform work only in dry and otherwise favorable weather conditions. Protect repaired masonry against freezing or excessively rapid drying for at least 48 hours after being laid; no masonry shall be laid when temperature is below 0 C (32 F)on a rising thermometer or below 4 C (40 F) on a falling thermometer.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Laticrete International, Inc. www.laticrete.com

B. Sika Corporation http://usa.sika.com

C. Bonstone Materials Corporation www.bonstone.com

D. Or, approved equal

2.2 MATERIALS

A. Polymer Admixture (for Setting Dutchman) such as "Laticrete 3701 or 4237 Grout and Mortar Admixture" (Laticrete International, Inc.), "Ultimate" (Bonstone Materials Corporation), or approved equal.

B. Metal attachments for setting stone Dutchman:

1. All wire, pins, anchors, and bars shall be stainless steel, Type 302 and 304.
2. Provide anchors as follows:
   a. 3mm (1/8") diameter round stock, stainless steel wire with turned-up ends for small veneers.
   b. 6mm (1/4") or 9.5mm (3/8") diameter round stock, stainless steel rod for direct pinning and drop dowels.
   c. 25.4mm (1") wide, 3mm (1/8") thick, stainless steel, flat strap anchors for larger panels.
3. The quantity of individual attachments shall not be less than two attachments for small dutchman, and one attachment every 61cm squared (two square feet) for larger panels.
4. All attachments shall be fastened by mechanical locking, in addition to appropriate adhesives and mortars.

C. Adhesives for attaching anchors and for direct pinning: Where permitted, anchors may be held in place with high modulus, high

strength, moisture insensitive, epoxy adhesive. Adhesive shall be two-component 100% solids, epoxy resin system with a viscosity similar to petroleum jelly "Sikadur 31 Hi-Mod Gel" (Sika Corporation), or approved equal.

D. Pigments for altering the color of cement: All pigments shall be alkali proof, non-fading, and of synthetic iron oxides.

E. Water: Clean and free of amounts of oils, acids, alkalies, salts, organic materials, or other substances that may be deleterious to mortar or any metal in the wall.

2.3 EQUIPMENT

A. Trowel

B. Hawk

C. Chisel

D. Hammer

E. Joint tools

F. Wood wedges

G. Spray bottle

PART 3 - EXECUTION

3.1 PREPARATION

A. Protection: Contractor shall take whatever precautions are necessary to protect the existing building from damage resulting from work under this section.

B. Surface Preparation: Cut existing spalls to form rectangular losses with square corners, minimum 51mm (2") thickness.

3.2 ERECTION, INSTALLATION, APPLICATION

A. Mortar for setting limestone Dutchman shall be mixed in a ratio of one part by volume white portland cement and three parts by volume sand, tempered to a workable consistency with a polymer admixture.

1. The use of Laticrete 3701 shall produce the equivalent of high strength "thick set" mortar. Limestone must be temporarily held in place with wood wedges or other means until the mortar has sufficiently set.

2. "Thinset" mortars for special conditions shall employ Laticrete 4237, or approved equal. It can be used when the mortar bed is less than 9.5mm (3/8") thick to produce an initially tacky mortar exhibiting high strength properties when set.

B. Dutchman shall be fastened with stainless steel wire, pins, and

anchors, as necessary, designed to facilitate mechanical locking and to prevent possible slippage of the stone. The metal fasteners shall be positioned without weakening the stone in any way. See also 04460- 13-R for guidance on resetting limestone.

C. Cement mortar containing "Laticrete" latex emulsion additives, or approved equal, shall be used for all setting purposes. All insertion shall be fully dressed on all sides, and carefully fitted to the patch opening, with an allowance of not more than 3mm (1/8 inch) buttered joint between front edges. Undercutting shall not weaken the stone in any way. The joints between new and old work shall be finished to match the color and texture of the stone. See 04520-02-R for guidance on repointing.

D. The surface of the new stone shall be dressed to resemble the appearance of the adjoining stone by an approved method. All surface dressing of new work shall be done before the stone is set.

E. Protect the limestone during the process of stone restoration. Any mortar accidentally splashed onto existing limestone shall be wiped and rinsed with water.

- - - E N D - - -

SECTION 44 60 13 S
RESETTING LIMESTONE

PART 1 - GENERAL

1.1 SUMMARY

A. This procedure includes guidance on removing displaced limestone panels, repairing the substrate and re-installing the panels.

1.2 RELATED REQUIREMENTS

A. Drawing and General provision of the contract, including General Project Guidelines and Division 01 General Requirements, apply to this section.

1.3 REFERENCES

A. American Society for Testing and Materials (ASTM) www.astm.org

1.4 QUALITY ASSURANCE

A. Certifications: Prior to delivery, submit certificates attesting compliance with applicable specifications for grades, types and classes.

B. Joint Raking: Prior to raking out all areas, cut back joints at location selected by the Contracting Officer using the methods specified. Raking will continue at no additional cost to the Government, until an acceptable sample is achieved. This area will serve as standard for joint raking for the entire job. It will be marked and left unpointed until all other pointing is completed. Point when directed by the Contracting Officer.

C. Sample Stone Pointing and Repair: Repoint joints, re- attach stone fragments and patch stone using materials and methods specified at a location selected by the Contracting Officer. The samples accepted by the Contracting Officer will serve as standard for the entire job. They will be marked and left undisturbed.

1.4 PROJECT/SITE CONDITIONS

A. Environmental Requirements: No stonework will be performed when the air temperature is 4C (40 F) or below during and for 48 hours subsequent to the work.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stone: To match existing in grade, color and finish.

B. Lime: Should conform to ASTM C207, Type S, high plasticity, Hydrated

Lime for Masonry Purposes.

1. Lime which meets this standard will "work" well, resists drying during curing, and is sufficiently strong for the purpose of repointing.
2. Lime expands as it hydrates, making high lime mortars more resistant to crack formation.

C. Cement: Should conform to ASTM C150, Type I, White. It should not have more than 0.60% alkali nor more than 0.15% water soluble alkali. Use gray portland cement
ONLY if a dark mortar is to be matched.

1. Cement meeting this standard should increase the workability of the mortar, accelerate the setting time and slightly increase the strength of the mortar.
2. The low alkali content will prevent efflorescence.

D. Sand: Free of impurities and conforming to ASTM C144.

1. Sand color, size, and texture should match the original as closely as possible. Provide a sample of the sand for comparison to the original, and have it approved by the COR before beginning repointing work.
2. When possible, use bar sand or beach sand rather than crushed sand for the repointing mortar.
   NOTE: BAR SAND ORBEACH SAND SHOULD BE WASHED TO REMOVE THE SALTS BEFORE USING.
   a. Crushed sand has sharp edges, which makes it more "sticky" and difficult to work into the joints.
   b. Bar sand, on the other hand, has rounded edges and flows easily during the mortar application.
   c. The working characteristics of mortar made with crushed sand may be improved by adding a slight amount of portland cement. The amount of cement should be determined by experimentation, but should not exceed 20% of the total lime/cement binder. 20% OR LESS OF CEMENT HAS MINIMAL EFFECT ON THE HARDNESS OF THE MORTAR. CEMENT CONTENT ABOVE 20% WILL MAKE THE MORTAR TOO HARD.

E. Clean, potable water: If the water must be transported or stored in a container, the container must not impart any chemicals to the water.

F. Stone dust finely ground from the same stone as that to be repointed.

G. Additives: NO antifreeze compounds or other admixture shall be used.

NOTE: DO NOT USE ANTI-FREEZE COMPOUNDS. THESE COMPOUNDS ARE DESIGNED FOR USE WITH CEMENT MORTARS, AND THEIR EFFECTIVENESS WITH HIGH LIME MORTARS IS QUESTIONABLE. FURTHERMORE, THE COMPOUNDS CONTAIN SALTS WHICH CAN LEAD TO SERIOUS PROBLEMS IN THE MASONRY AT A LATER TIME.
NOTE: AIR ENTRAINING AGENTS ARE NOT RECOMMENDED. THESE AGENTS ARE DESIGNED FOR USE WITH CEMENT RATHER THAN LIME, AND THEY RESULT IN DECREASED BONDING OF THE MORTAR AND THE MASONRY. AIR ENTRAINING IS NOT NECESSARY WITH HIGH LIME MORTARS BECAUSE OF THE NATURAL ABILITY OF THESE MORTARS TO FLEX WITH TEMPERATURE CHANGES.

H. Epoxy grout

I. Reinforcement/Anchors: Stainless steel type 302/304 9.5mm (3/8") in diameter threaded rods, length as required.

2.2 EQUIPMENT

A. Natural fiber or nylon bristle brushes

B. Wire bristle brush for cleaning anchors

C. Mixing Vessels

D. Joint tools

E. Chisel

F. Hammer

G. Hawk (plywood or steel mortar board)

H. Trowel

I. Hoe

J. Mesh screen

K. Putty knife

L. Wooden mortar boxes

2.3 MIXES

A. Some factors to consider when mixing lime mortar include durability, color and texture, and workability.

1. Durability: Repointing and resetting mortar should be softer than the masonry units and the original mortar to reduce stresses at the edge of the masonry and, in the case of lime mortar, to reduce shrinkage which can cause cracks in the mortar.

   a. If the new mortar is harder than the masonry or the original mortar, it can cause serious stresses within the wall during thermal expansion and contraction, which can lead to deterioration of the masonry units rather than the mortar.

   b. If the mortar is softer, any deterioration which occurs will take

place in the mortar, which is easier to replace than the units themselves.

2. The repointing and resetting mortar should allow the passage of water, both liquid and vapor. If the mortar does not allow water to pass freely through it, the water can become trapped inside the wall, freeze and cause serious deterioration to the masonry.
3. Color and texture: The repointing mortar should match the original mortar in color, texture and physical characteristics.
   a. Obtaining an accurate color match is best achieved by selecting an appropriate sand.
      1. Use sand which is similar to the original in color and gradation. Sand from more than one source may be required.
      2. For repointing of natural stones, use finely ground stone "dust" in the mortar to match the joints as closely as possible to the stone.
   b. If the original mortar was tinted, or if it is impossible to obtain a color match through the use of sand, it may be necessary to use a special mortar pigment.

CAUTION: PIGMENTS MAY REACT WITH OTHER INGREDIENTS IN THE MORTAR TO FORM EFFLORESCENCE. THEY MAY ALSO WEATHER AT A DIFFERENT RATE THAN NATURAL COLORING AND CAUSE A COLOR VARIATION IN THE MORTAR.

NOTE: IF PIGMENTS MUST BE USED, PURE MINERAL OXIDES SHOULD BE USED BECAUSE THEY DO NOT FADE OR LEACH OUT OF THE MORTAR. AMOUNT OF PIGMENT SHOULD NOT EXCEED 2% OF THE MORTAR MIX BY WEIGHT.

4. Workability: The workability or plasticity of the mortar is a direct result of the selection of materials.

B. Mortar Mix:
1. Have the existing mortar completely analyzed to insure that the repointing mortar will not be less permeable/harder than the masonry units or the original mortar. **IT IS BETTER TO HAVE MORTAR THAT IS MORE PERMEABLE THAN LESS.**
2. Measure all ingredients by cubic volume using a pre-established uniform measure, such as a small bucket, rather than a less uniform measure such as a shovel.
3. Mix a final "job-size" batch once the correct sand color, cement content, etc. have been determined through small tests to ensure the on-site mixing conditions will result in the same final product.

PART 3 - EXECUTION

3.1 ERECTION, INSTALLATION, APPLICATION

A. Carefully remove shifted and loose stone panels. Clean of dirt, mortar, and loose debris. Retain for re-use. Re-build support masonry and lay new bedding material.

B. Clean any exposed metal anchors of all corrosion by scraping and brushing with stiff wire brushes. Replace any unsound anchors as necessary with new stainless steel anchors of same approximate size and shape. Bed new anchors in epoxy grout.

C. Re-set limestone, maximum tolerances from plumb and level of new work not to exceed variation from plumb and level of adjacent existing work.

D. Wet masonry and lay in full bed of mortar. See 04 05 13 for mortar mixing procedures. Construct uniform joints. Shove vertical joints tight. Adjust stone units to final position while mortar is soft and plastic. Set stone with joints tooled back one inch. Point remaining depth as the rest of the stone is pointed.

E. Keep mortar and stone damp (80-90% RH) for 72 hours or until mortar is cured.

3.2 ADJUSTING/CLEANING

A. Immediately after repairing, patching, pointing and re- setting the stone, remove mortar, grout and adhesives from the face of the masonry.

B. Use only tools and equipment which are clean and free of hardened or partially hardened material.

C. After all work is complete, clean stone only with fiber bristle brushes and water. Use no acids, detergents, or other cleaning agents.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK