14. Can the Government provide the height and width of each of the 47 doors, along with the ceiling height(s) for the applicable areas?

    Answer:

    All measurements are approximate and contractor shall confirm exact measurements after award and before ordering the doors.

    - Office Door 1 (quantity 1): 79”x35.5”
    - Office Door 2 (quantity 1): 79”x29.5”
    - Wing Doors (quantity 2): 79”x35.75”
    - Room Doors (quantity 42): 84”x35.5”
    - Laundry Room (quantity 1) 79”x35.5” (w/ 27.5”x22” window)

    Ceiling height 8’

15. Is the contractor responsible for providing the doors? If so, are the required doors paint-grade or finish-grade?

    Answer: Yes, contractor is responsible for providing doors. Doors shall be finished to match existing as close as possible and shall be outfitted with hardware to match existing (kickplates, windows, peeps, hardware, closures etc) Pictures are attached below for reference for those who did not attend site visit.

16. Are the doors to be provided/installed as pre-hung assemblies or slab-only doors?

    Answer: Contractor to provide doors. Project intent is to provide slabs to fit existing frames.

17. What thickness are the door slabs required to be — 1-3/4" or 2"?

    Answer: approximate thickness 1-3/4”. Contractor to verify all dimensions prior to procurement.

18. Will a Government-provided painter/painting contractor be performing painting after the door installation, or is painting/finishing part of the contractor's scope?

    Answer: Doors are not to be painted but shall be finished to match existing as part of contractor’s scope. Government has plans to paint the facility later this year and thus can paint the frames as required. See previous response for more details.

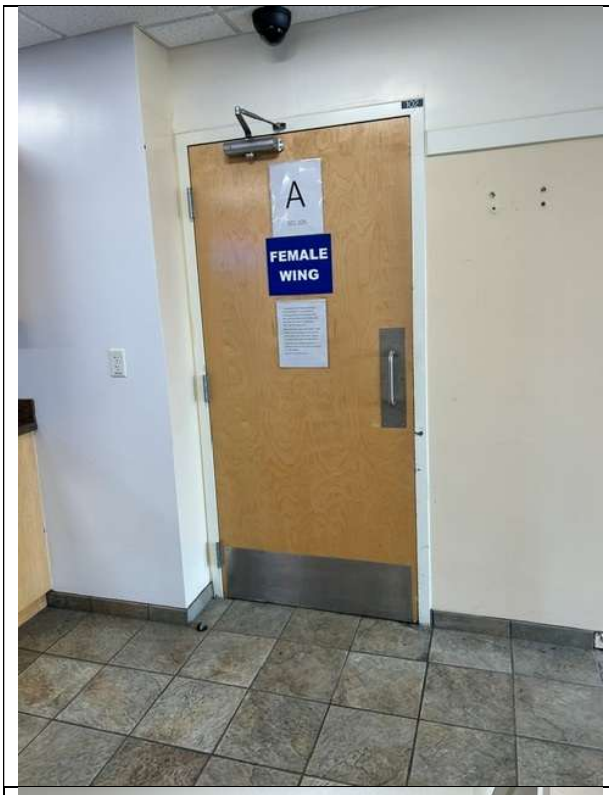	Wing Door: note handle, kick plate, closer
	Office doors: note kick plate and handle and locking mechanism.

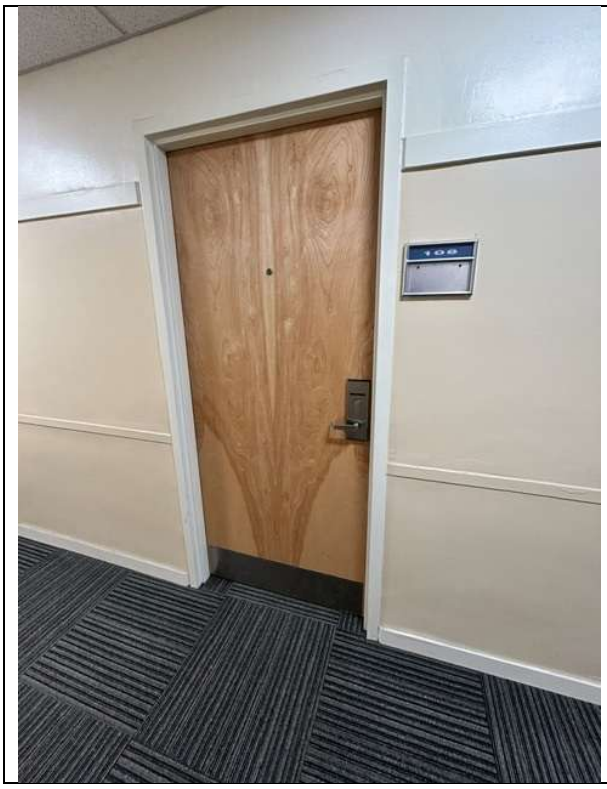	Room door: note peep, kick plate, handle and locking mechanism. Interest to add door closures was noted on RFI responses.

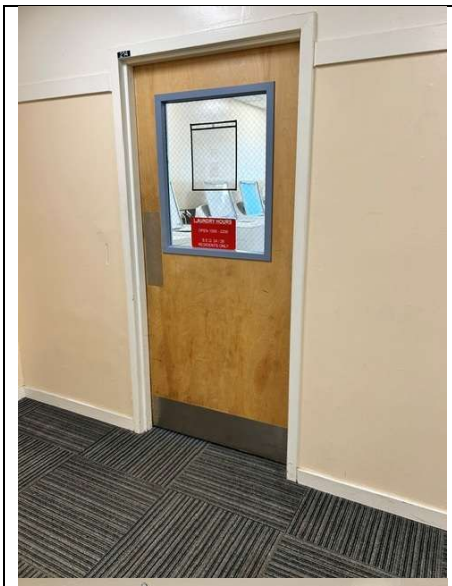 		Laundry room door: Note kickplate, handle, window.