Docusign Envelope ID: 1F1A1E71-2E6F-44 40-966C-7B5FF7D2EEA3



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 DEMOLISH EXISTING FRAME AND DOOR.
2 DEMOLISH EXISTING METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 DEMOLISH FLOOR FINISH AND BASE.
5 DEMOLISH EXISTING DRYWALL BULKHEAD.
6 FINISH FLOOR CUT LINE, PREP AREA TO RECEIVE NEW FLOORING.
7 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
8 REMOVE PORTION OF EXISTING ACT, COORDINATE WITH NEW.
9 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK, FOLLOW ICRA MEASURES ON SHEET G-004.
10 DEMOLISH EXISTING ACCORDION DOOR.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW ROOM SIGNAGE, REF TO A-005 FOR REQUIREMENTS.
3 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
4 PROVIDE 4'-0"X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH R-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
5 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 9'-0" TO 11'-0") WITH WALL TYPE Mas3 , SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
6 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING - SEE A-005.
7 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #L9928 OR EQUAL.
8 INSTALL NEW SURFACE MOUNT FIRE EXTINGUISHER CABINET.
9 EXPOSED CEILING.
10 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
12 EXTEND NEW FINISHES TO THE INSIDE CORNERS.
13 ALIGN WALLS.
14 NEW CEILING TRACK WALL ANGLE. CUT EXISTING TILE TO FIT NEW LENGTH AND REINSTALL.
15 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 8, FIRST FLOOR

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 8

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 008.A-401

Dwg. 34 of 51

C:\Users\mel\Documents\R_20r26_VA Alexandria EHRM_BRg_08_mel4FCF.rvt
3/5/2026 2:07:41 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E87-2B7B-44 40-966C-7B5F75DEEA5



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 CREATE ROUGH OPENING FOR NEW DOOR.
5 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
6 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK. FOLLOW ADA MEASURES ON SHEET G-004.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. SEE TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0") WITH WALL TYPE Ma#3_SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
6 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
7 EXPOSED CEILING.
8 INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET.
9 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
10 PROVIDE NEW BASE AND PAINT TO PATCH ALL INFILLED WALLS TO SURROUNDING EXISTING FINISHES.
11 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING - SEE A-005.
12 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #U9928 OR EQUAL.
13 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER | ACG Project Number 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 9, FIRST FLOOR, TELECOM ROOM

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 9

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 009.A-401

Dwg: 35 of 51

C:\Users\mel\Documents\R_20r26_VA_Alexandria EHRM_BRe_09_mel4CF.rbt.rvt
3/5/2026 2:10:24 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E81-2B6F-444A-966C-7B95F75DEEA5

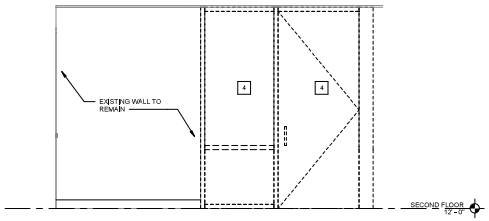

5 SECOND FLOOR DEMOLITION ELEVATION 1
Scale: 1/2" = 1'-0"



SECOND FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"

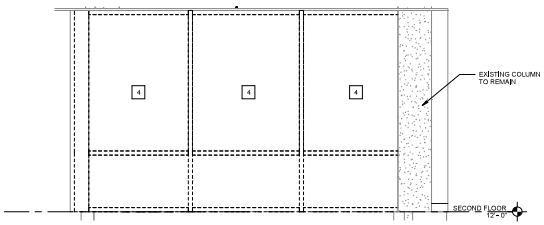

6 SECOND FLOOR DEMOLITION ELEVATION 2
Scale: 1/2" = 1'-0"



SECOND FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 DEMOLISH HM STOREFRONT SYSTEM IN ITS ENTIRETY.
5 FINISH FLOOR CUT LINE. PREP AREA TO RECEIVE NEW FLOORING.
6 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
7 REMOVE PORTION OF EXISTING ACT. COORDINATE WITH NEW.
8 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK. FOLLOW ICRA MEASURES ON SHEET G-004.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. SEE TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0") WITH WALL TYPE Mark 1. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
6 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
7 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING - SEE A-005.
8 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #U9928 OR EQUAL.
9 EXPOSED CEILING.
10 INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
12 ALIGN WALL.
13 INSTALL NEW CORNER GUARD.
14 PATCH NEW WALL WITH FINISHES TO MATCH EXISTING. REFERENCE ROOM FINISH SCHEDULE A-005.
15 NEW CEILING TRACK WALL ANGLE. CUT EXISTING TILE TO FIT NEW LENGTH AND REINSTALL.
16 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



WALL RATING LEGEND

1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER

ACG Project Number: 20-398

APOGEE Engineers | Architects
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 9, SECOND FLOOR, TELECOM ROOM

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 9

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 009.A-402

Dwg. 36 of 51

C:\Users\mel\Documents_2C\09_VA Alexandria EHRM_BRe_09_mel4FCF-R6.rvt
3/5/2026 2:10:55 PM
VA FORM 08-6231

Docusign Envelope ID: 1F A1E6F1-2E6F-44 40-966C-7E6FF75DEEA5

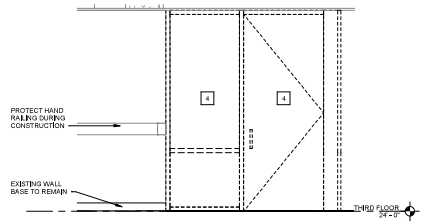

5 THIRD FLOOR DEMOLITION ELEVATION 1
Scale: 1/2" = 1'-0"



THIRD FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



THIRD FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"

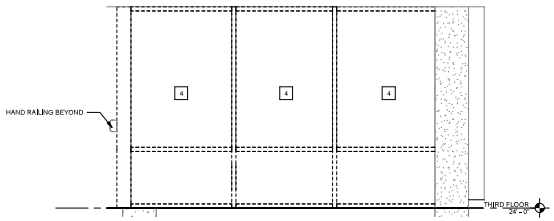

6 THIRD FLOOR DEMOLITION ELEVATION 2
Scale: 1/2" = 1'-0"



THIRD FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



THIRD FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 DEMOLISH HM STOREFRONT SYSTEM IN ITS ENTIRETY.
5 FINISH FLOOR CUT LINE, PREP AREA TO RECEIVE NEW FLOORING.
6 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
7 REMOVE PORTION OF EXISTING ACT, COORDINATE WITH NEW.
8 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK, FOLLOW ICRA MEASURES ON SHEET G-004.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. SEE TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS, PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR, MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0"), WITH WALL TYPE Mark1. SEE SHEET A-002, SEAL ALL PENETRATIONS AND EXISTING VOIDS.
7 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING - SEE A-005.
8 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #J0928 OR EQUAL.
9 EXPOSED CEILING.
10 INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
12 ALIGN WALL.
13 INSTALL NEW CORNER GUARD.
14 EXTEND EXISTING HANDRAIL TO MEET NEW DOOR.
15 NEW CEILING TRACK WALL ANGLE. CUT EXISTING TILE TO FIT NEW LENGTH AND REINSTALL.
16 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



WALL RATING LEGEND

1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER
ACG Project Number 20-398

APOGEE Engineers | Architects
© COPYRIGHT Apogee Consulting Group, P.A.

Headquarters
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 9, THIRD FLOOR, TELECOM ROOM

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222
Building Number: # 9
Approved
Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL
Drawing Number: 009.A-403
Dwg. 37 of 51

C:\Users\mel\Documents\R_20-398_VA Alexandria EHRM_Bldg_09_mel4FC.RVT
3/5/2026 4:45:56 PM
VA FORM 08-6231

Docusign Envelope ID: 1F41697F-2B7F-44 40-966C-7B5FF75DEEA5



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS, SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER, SEE TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (2 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH PJ COLOR, MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING - SEE A-005.
7 CLEAN WINDOW, INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #U9628 OR EQUAL.
8 EXPOSED CEILING.
9 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER.
10 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
11 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 13, FIRST FLOOR

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 13

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 013.A-401

Dwg: 38 of 51

C:\Submitting\Documents_2C\36_VA_Alexandria EHRM_Bldg_013_pMEP-58.rvt
3/5/2026 2:15:30 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E71-2E6F-44 40-966C-7B5FF75DEEA5



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 ROOM RECENTLY BUILT IN ANOTHER PROJECT - REMOVE ALL EXISTING TECHNOLOGY WORK DONE FOR THAT PROJECT.
2 DEMOLISH EXISTING MECHANICAL UNIT - SEE MECHANICAL DRAWINGS.
3 REMOVE EXISTING SIGNAGE AND TURN OVER TO THE VA.

KEY NOTES:

1 EXPOSED CEILING.
2 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A=SIDE OUT AND PAINTED WITH 3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH PC2 COLOR, MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
3 ROOM TO RECEIVE NEW FINISHES. WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
4 AT DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOOR.
5 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



WALL RATING LEGEND

1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 14, FIRST FLOOR

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 14

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 014.A-401

Dwg. 39 of 51

C:\Submittals\Documents_2026_VA_Alexandria EHRM_BRG_014_ph4CP-SR.rvt
3/5/2026 2:23:10 PM
VA FORM 08-6231

Docusign Envelope ID: 7F41697F-2597-44 40-966C-7695F7502EA5

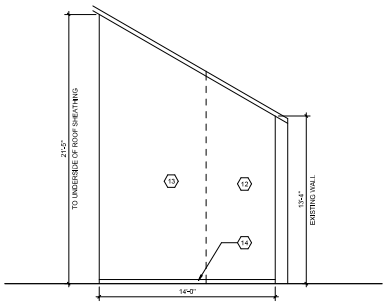

SCHEMATIC SECTION
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND SYP BD WALL.
3 DEMOLISH EXISTING WALL.
4 EXISTING EXPOSED CEILING.
5 FINISH FLOOR CUT LINE. PREP AREA TO RECEIVE NEW FLOORING.
6 EXISTING FLOOR FINISH AND BASE TO REMAIN.
7 DEMOLISH EXISTING MECHANICAL UNIT - SEE MECHANICAL DRAWINGS.
8 REMOVE EXISTING SIGNAGE AND TURN OVER TO THE VA.
9 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK, FOLLOW ICRA MEASURES ON SHEET G-004.

ⓐ KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS, SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
3 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
4 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARD IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0") WITH WALL TYPE Mwa1. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
7 EXPOSED CEILING AT UNDERSIDE OF ROOF.
8 INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET.
9 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
10 AT NEW/EXISTING WALLS, PROVIDE PAINT AND BASE TO MATCH EXISTING.
11 PROVIDE CORNER GUARD TO MATCH EXISTING HEIGHT AND COLOR.
12 EXISTING WALL TO REMAIN.
13 NEW WALLS.
14 INSTALL NEW R8-1 ALL 3 SIDES TO EXTERIOR OF TR ROOM.
15 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER
ACG Project Number 20-398

APOGEE Engineers | Architects
Headquarters
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420
© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 15, FIRST FLOOR, TELECOM ROOM

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 15

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 015.A-401
Dwg. 40 of 51

C:\Users\mel\Documents_20-398_VA Alexandria EHRM_BIM_015_mlaDC-68.rvt
3/5/2026 2:28:21 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E71-2B7F-44 40-966C-7B5FF7D2EEA3



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 EXISTING EXPOSED CEILING.
2 REMOVE EXISTING FLOOR FINISH AND BASE.
3 ROOM RECENTLY BUILT BY ANOTHER PROJECT- REMOVE ALL EXISTING TECHNOLOGY WORK DONE FOR THAT PROJECT.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

⌀ KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES (WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE A-005.
2 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
3 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
4 AT EXISTING DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (2 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH PVC COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT R-1 TO MATCH PLYWOOD COLOR.
6 EXPOSED CEILING.
7 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
8 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
9 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 4'-0") WITH WALL TYPE Max3_ SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
10 INSTALL NEW FIRE EXTINGUISHER.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



FULLY SPRINKLERED
100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER
ACG Project Number: 20-398

APOGEE
Engineers | Architects
© COPYRIGHT Apogee Consulting Group, P.A.

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 16, FIRST FLOOR, TELECOM ROOM 110B

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222
Building Number: # 16

Approved
Date: MARCH 24, 2026
Checked: WVS
Drawn: MEL

Drawing Number: 016.A-401
Dwg. 41 of 51

C:\Submitting\Documents\A_2026_VA_Alexandria EHRM_BMg_016_pMADF-558.rvt
3/5/2026 2:29:27 PM
VA FORM 08-6231

Docusign Envelope ID: 1F A1697 1-2697-44 40-966C-7695F7502EA3



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
5 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK. FOLLOW DEMOLITION MEASURES ON SHEET G-004.

⬡ KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
3 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
4 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0"), WITH WALL TYPE Mak3. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
7 INSTALL WINDOW FILM TO INTERIOR FACE OF 30" X 60" WINDOW GLAZING– SEE A-005.
8 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #U9928 OR EQUAL.
9 EXPOSED CEILING.
10 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET, REF TO A-005 FOR REQUIREMENTS.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



WALL RATING LEGEND

1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER
ACG Project Number 20-398

APOGEE
Engineers | Architects
© COPYRIGHT Apogee Consulting Group, P.A.

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 45, FIRST FLOOR, TELECOM ROOM 173

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222
Building Number: # 45

Approved:
Date: MARCH 24, 2026
Checked: WVS
Drawn: MEL

Drawing Number: 045.A-401
Dwg: 42 of 51

C:\Users\mel\Documents\A_20-398_VA_Alexandria EHRM_BRG_045_pMADF-68.rvt
3/5/2026 2:33:48 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E81-2E6F-644A-986C-7B5FF75DEEA5



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

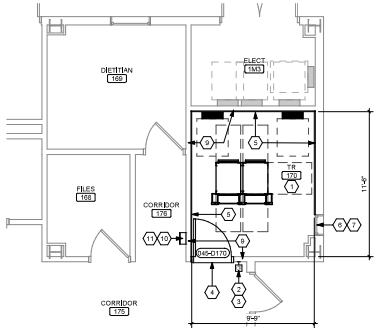

FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

X KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 INSTALL WINDOW FILM TO INTERIOR FACE OF 20" X 62" WINDOW GLAZING - SEE A-005.
7 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #U9605 OR EQUAL.
8 EXPOSED CEILING.
9 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 9'-2" TO 11'-0") WITH WALL TYPE Maa3_ SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
10 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET, REF TO A-005 FOR REQUIREMENTS.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number: 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 45, FIRST FLOOR, TELECOM ROOM 170

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 45

Approved:

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 045.A-402

Dwg. 43 of 51

C:\Submitting\Documents\A_2D\45_VA Alexandria EHRM_BRG_045_pMADF-68.rvt
3/5/2026 2:33:48 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E81-2B6F-444A-966C-7B5FF75DEEA5



SECOND FLOOR
REFLECTED CEILING
DEMOLITION PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 DEMOLISH EXISTING METAL STUD AND GYP BD WALL.
5 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
6 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK. FOLLOW ICRA MEASURES ON SHEET G-004.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8-0" TO 11-0") WITH WALL TYPE Mod1. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
6 PROVIDE 4'-X0'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
7 INSTALL WINDOW FILM TO INTERIOR FACE OF 30" X 60" WINDOW GLAZING - SEE A-005.
8 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIMELINE WINDOW LOCK #U9928 OR EQUAL.
9 EXPOSED CEILING.
10 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
11 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
12 INFILL EXISTING DOOR OPENING. PROVIDE NEW METAL STUD TO MATCH THE PROPER STUD THICKNESS WITH THE REMAINING WALL SO THAT THE ADJOINING WALL SURFACES ARE FLUSH ON BOTH SIDES. GYPSUM BOARD EACH SIDE. METAL STUD TO MATCH THE PROPER STUD THICKNESS WITH THE REMAINING WALL SO THAT ADJOINING WALL SURFACES ARE FLUSH ON BOTH SIDES. GYPSUM BOARD EACH SIDE. PAINT AND WALL BASE TO MATCH ADJACENT EXISTING FINISHES TO REMAIN.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



WALL RATING LEGEND

1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number: 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 45, SECOND FLOOR, TELECOM ROOM 272

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 45

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 045.A-403

Dwg. 44 of 51

C:\Submitting\Documents\A_20-398_VA_Alexandria EHRM_BRG_045_045_pMADF-SM.rvt
3/5/2026 2:33:49 PM
VA FORM 08-6231

Docusign Envelope ID: 7F41697F-2B7F-44 40-966C-7B5FF7D2EEA5



SECOND FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



SECOND FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

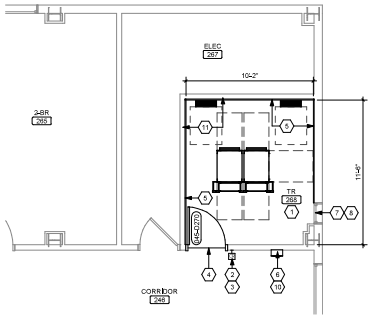

SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM. SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
5 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK. FOLLOW DRA MEASURES ON SHEET G-004.

⟨#⟩ KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS, SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
3 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'-0"X3'-0" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING. AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REF TO A-005 FOR REQUIREMENTS.
7 INSTALL WINDOW FILM TO INTERIOR FACE OF 20" X 62" WINDOW GLAZING - SEE A-005.
8 CLEAN WINDOW. INSTALL NEW WINDOW LOCK. BASIS OF DESIGN: PRIME-LINE WINDOW LOCK #L0628 OR EQUAL.
9 EXPOSED CEILING.
10 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
11 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 9'-7" TO 11'-0") WITH WALL TYPE Mwall_ SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.

KEY PLAN

SCALE: NO SCALE



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 45, SECOND FLOOR, TELECOM ROOM 268

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 45

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 045.A-404

Dwg. 45 of 51

C:\Users\mel\Documents\R_20r26_VA_Alexandria EHRM_BRq_045_pMel_mel.rvt
3/5/2026 2:33:49 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E71-2E6F-44 40-966C-7B5FF7D2EEA3

REFERENCE PHOTOS

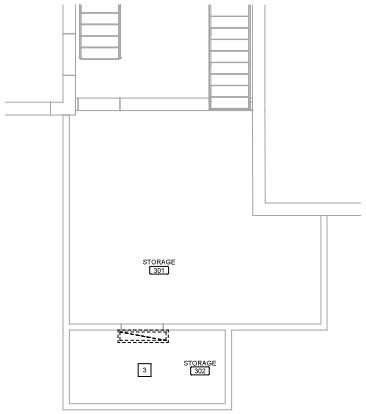

THIRD FLOOR CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"

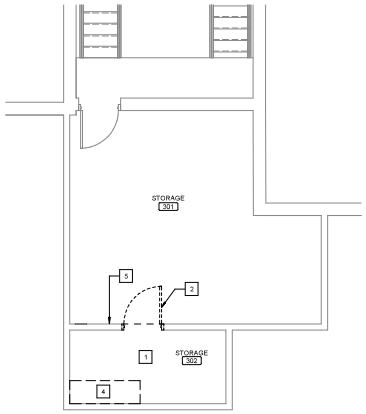

THIRD FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"

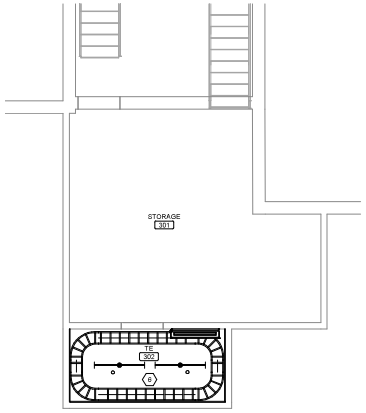

THIRD FLOOR CEILING PLAN
Scale: 1/4" = 1'-0"

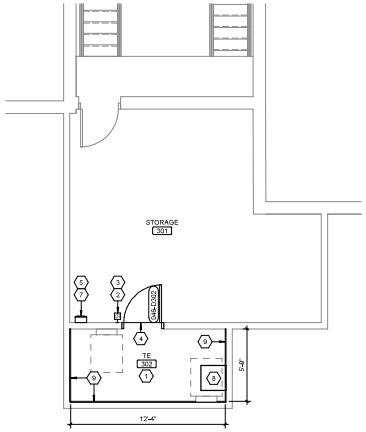

THIRD FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 EXISTING CONCRETE FLOOR TO REMAIN.
2 DEMOLISH EXISTING DOOR AND FRAME IN MASONRY WALL.
3 EXISTING SLOPED HARD CEILING TO REMAIN.
4 DEMOLISH 4" CONCRETE HOUSEKEEPING PAD FOR REMOVED COMPRESSOR.
5 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE A-005.
2 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REFER TO A-005 FOR REQUIREMENTS.
6 EXISTING CEILING.
7 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
8 PROPOSED NEW CABINET LOCATION.
9 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH PJ COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT PJ TO MATCH PLYWOOD COLOR.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 46, THIRD FLOOR, TELECOM ROOM 302

Location: ALEXANDRIA VA HEALTH CARE SYSTEM
2495 SHREVEPORT HWY, 71N
PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 46

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 046.A-401

Dwg. 46 of 51

C:\Submitting\Documents\A_2D\46_VA Alexandria EHRM_BRG_SHT_pMADF-558.rvt
3/5/2026 2:38:24 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E71-2E6F-44 40-966C-7B5FF7D2EEA3



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONSHOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR IN METAL STUD AND GYP BD WALL.
3 DEMOLISH EXISTING WALL.
4 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
5 REMOVE HANDRAIL AND BUMPER RAIL.
6 REMOVE EXISTING GYPSUM BOARD CEILING.
7 EXISTING CORNER GUARD TO REMAIN.
8 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
9 SEE MECHANICAL DRAWINGS FOR ABOVE CEILING WORK, FOLLOW ERA MEASURES ON SHEET G-004.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS, SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
3 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
4 NEW HANDRAIL AND BUMPER RAIL TO MATCH EXISTING.
5 FILL IN OPENING WITH METAL STUD AND GYP. BD. BOTH SIDES, MATCH EXISTING WALL WIDTH.
6 PROVIDE 4'8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
7 PATCH HOLES AND REPAIR WALL AFTER REMOVING EXISTING HANDRAIL.
8 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
9 NEW FINISHES TO MATCH EXISTING - PAINT AND RUBBER BASE. MODIFY FLOORING AS NECESSARY.
10 EXPOSED CEILING.
11 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-0" TO 11'-0") WITH WALL TYPE Mod1. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
12 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
13 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REFER TO A-005 FOR REQUIREMENTS.

KEY PLAN

SCALE: NO SCALE
AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER
ACG Project Number: 20-398

APOGEE
Engineers | Architects
© COPYRIGHT Apogee Consulting Group, P.A.

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title	ENLARGED PLANS, BUILDING 49, FIRST FLOOR, TELECOM ROOM 166
Location	ALEXANDRIA VA HEALTH CARE SYSTEM 2495 SHREVEPORT HWY, 71N PINEVILLE, LA 71360
Project Title	ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)
VA PROJECT NUMBER	502-21-222
Building Number	# 49
Approved	
Date	MARCH 24, 2026
Checked	WVS
Drawn	MEL
Drawing Number	049.A-401
	Dwg. 47 of 51

C:\Submitting\Documents_2C\49_VA Alexandria EHRM_BRG_049_pMEP.rvt
3/5/2026 2:44:32 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E87-2B7E-44 40-966C-7B5FF75DEEA3



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN MASONRY WALL.
3 DEMOLISH EXISTING WALL.
4 EXISTING EXPOSED STRUCTURE CEILING.
5 DEMOLISH STEEL ANGLES AT THROUGH WALL AIR CONDITIONING UNIT.
6 DEMOLISH METAL FLASHING AT EXTERIOR.
7 FLOOR FINISH CUT LINE.
8 EXISTING FLOOR FINISH AND BASE TO REMAIN.
9 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
10 REMOVE GYPSUM BOARD TR SIDE IN PREPARATION FOR WATERSHIELD MEMBRANE.

KEY NOTES:

1 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 NEW ROOM SIGN. REFER TO A-005 FOR REQUIREMENTS.
3 NEW CARD READER. REFER TO TECHNOLOGY DRAWINGS.
4 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 ALIGN WALLS.
7 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 8'-2" TO 11'-2") WITH WALL TYPE Mark1. SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
8 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET. REFER TO A-005 FOR REQUIREMENTS.
9 EXPOSED CEILING.
10 INSTALL NEW SURFACE MOUNT FIRE EXTINGUISHER CABINET.
11 FILL IN VOID, APPROX. 36" X 24", WITH 8" CMU. CEMENT PLASTER FINISH TO EXTERIOR TO MATCH SURROUNDING SURFACE. PAINT TO MATCH.
12 PROVIDE GRACE, ICE AND WATERSHIELD, SELF ADHERING BIT. MEMBRANE 40 MIL THICK OR EQUAL, 12" ABOVE FLOOR FINISH. BOTTOM OF MEMBRANE TO SEAL 1/4" TO FLOOR AND TURN UP, ADHERE TO METAL TRACK RUNNER AND METAL STUDS INSIDE FACE TR ROOM SIDE. REPLACE REMOVED GYPSUM BOARD OVER MEMBRANE.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects
Headquarters
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 136, FIRST FLOOR, TELECOM ROOM 3

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 136

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 136.A-401

Dwg. 48 of 51

C:\Submitting\Documents\A_2D.rvt A_Alexandria EHRM_BRG_D15_Jul.rvt 3/5/2026 4:14:28 PM

Docusign Envelope ID: 1F1A1E71-2E6F-444A-966C-7B5FF75DEEA5

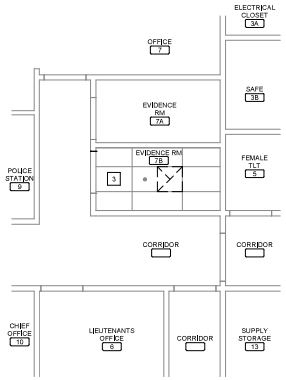

FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"

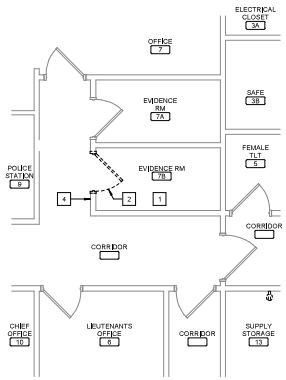

FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"

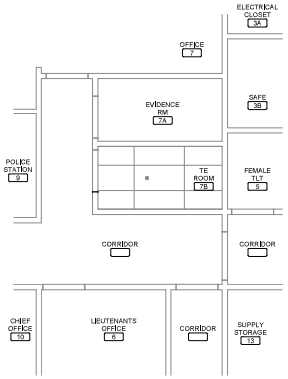

FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

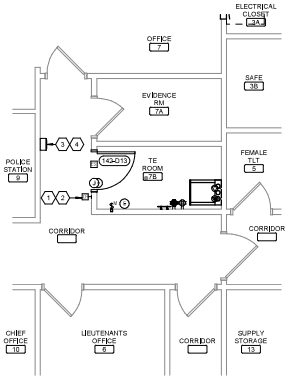

FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 EXISTING FLOOR FINISH AND BASE TO REMAIN.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 EXISTING CEILING TO REMAIN.
4 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

#2 KEY NOTES:

1 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
2 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
3 INSTALL NEW SEMI RECESSED FIRE EXTINGUISHER CABINET.
4 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET, REFER TO A-005 FOR REQUIREMENTS.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER | ACG Project Number 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 142, FIRST FLOOR, TELECOM ROOM 7B

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 142

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 142.A-401

Dwg. 49 of 51

C:\Submitting\Documents_2026_VA Alexandria EHRM_BRG_01-C_rbaMCF26.rvt
3/5/2026 4:15:57 PM
VA FORM 08-6231

Docusign Envelope ID: 1F1A1E71-2B7E-44 40-966C-7B5FF75DEEA3

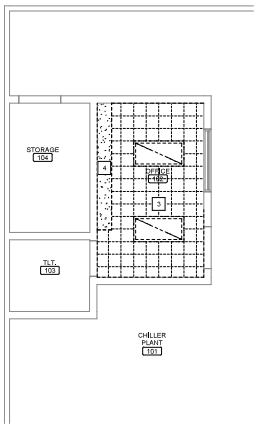

FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"

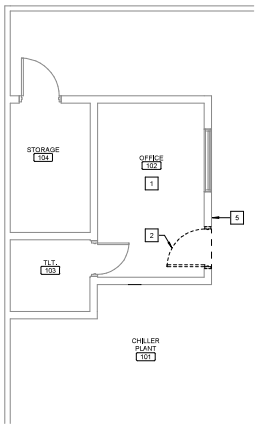

FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"

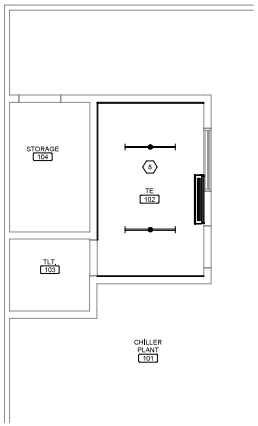

FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

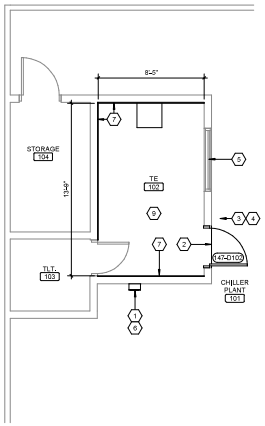

FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN MASONRY WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 REMOVE EXISTING GYPSUM BOARD AND METAL STUD SOFFIT.
5 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.

KEY NOTES:

1 INSTALL NEW SURFACE MOUNTED FIRE EXTINGUISHER CABINET.
2 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
3 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
4 NEW ROOM SIGN, REFER TO A-005 FOR REQUIREMENTS.
5 INSTALL WINDOW FILM TO INTERIOR FACE OF WINDOW GLAZING- SEE A-005.
6 NEW FIRE EXTINGUISHER SIGN, REFER TO A-005 FOR REQUIREMENTS.
7 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS, PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH P-2 COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
8 EXPOSED CEILING.
9 ROOM TO RECEIVE NEW FINISHES WALLS AND FLOORS. SEE ROOM FINISH SCEHDULE ON SHEET A-005.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK



100% CONSTRUCTION DOCUMENTS

#	Revisions	Date

CONSULTANTS:

5/23/2026

PROJECT MANAGER

ACG Project Number: 20-398

APOGEE Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 147, FIRST FLOOR, TELECOM ROOM 102

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 147

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 147.A-401

Dwg. 50 of 51

C:\Submitting\Documents\A_20-398_VA Alexandria EHRM_Bldg_0147_detail\C-585.rvt
3/5/2026 2:48:35 PM
VA FORM 08-6231

Docusign Envelope ID: 1F41697F-2597-44 40-966C-7B5FF75DEEA5



FIRST FLOOR REFLECTED CEILING DEMOLITION PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR DEMOLITION FLOOR PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"



FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

A. ALL EXISTING CONDITIONS ARE BASED ON BEST AVAILABLE INFORMATION AT THE TIME OF SURVEY AND VISUAL INSPECTION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.

B. ELEMENTS SHOWN WITH LIGHT, GRAY LINES ARE EXISTING TO REMAIN. ELEMENTS SHOWN WITH DARK DASHED LINES ARE EXISTING TO BE DEMOLISHED. DEMOLITION SHALL INCLUDE, BUT NOT BE LIMITED TO, THOSE ELEMENTS SHOWN.

C. ALL WORK SHALL BE COORDINATED BETWEEN TRADES.

D. ALL WORK SHALL BE COORDINATED WITH THE COR TO MINIMIZE DISRUPTION OF AREAS OUTSIDE OF THE PROJECT LIMITS OF WORK.

E. ALL CEILING DEMOLITION WORK TO BE COORDINATED WITH CHANGE OF EXISTING PENDANT SPRINKLER HEADS WITH NEW UPRIGHT SPRINKLERS SUCH THAT THERE IS NO EXTENDED LOSS OF SPRINKLER PROTECTION IN THE CONSTRUCTION AREA.

F. FOR FINISHES IN ALL NEW TR ROOMS - SEE ROOM FINISH SCHEDULE SHEET A-005.

G. ALL NEW TR ROOMS TO HAVE CARBON DIOXIDE EXTINGUISHER WITHIN 75' OF ROOM, SEE OVERALL OR ENLARGED PLANS FOR LOCATIONS

H. PATCH AND FILL ALL PENETRATIONS/HOLES IN WALLS OF TR ROOMS TO MAINTAIN WALL RATINGS.

KEY NOTES:

1 REMOVE EXISTING FLOOR FINISH AND BASE.
2 DEMOLISH EXISTING DOOR AND FRAME IN METAL STUD AND GYP BD WALL.
3 REMOVE EXISTING ACT CEILING, INCLUDING ELEC AND MECH FIXTURES.
4 EXISTING SEMI RECESSED FIRE EXTINGUISHER CABINET TO REMAIN.
5 EXISTING FLOOR FINISH TO REMAIN.
6 FINISH FLOOR CUT LINE.
7 REMOVE EXISTING SIGNAGE AND TURN OVER TO VA.
8 REMOVE PORTION OF EXISTING ACT TILE. COORDINATE WITH NEW.
9 RELOCATE EXISTING LIGHT.

KEY NOTES:

1 ROOM TO RECEIVE NEW FLOOR FINISHES. SEE ROOM FINISH SCHEDULE ON SHEET A-005.
2 AT NEW DOOR, EXTEND STATIC DISSIPATIVE TILE FROM ROOM INTO CORRIDOR TO EXISTING FLOORING.
3 NEW ROOM SIGNAGE, REF TO A-005 FOR REQUIREMENTS.
4 NEW CARD READER, REFER TO TECHNOLOGY DRAWINGS.
5 PROVIDE 4'X8'X3/4" FIRE RETARDANT TREATED AC GRADE PLYWOOD BACK BOARDS IN TELECOM ROOMS. PLYWOOD SHALL BE MOUNTED WITH A-SIDE OUT AND PAINTED WITH (3 COATS TOTAL) OF FIRE RESISTANT PAINT ON ALL SIDES PRIOR TO MOUNTING, AND SHALL MATCH PLY COLOR. MASK OVER FIRE RETARDANT SEAL ON PLYWOOD BEFORE PAINTING TO ALLOW INSPECTION OF FIRE RATING SEAL. ALL DRYWALL SURROUNDING WALLS TO BE PAINTED WITH STANDARD PAINT P-1 TO MATCH PLYWOOD COLOR.
6 EXPOSED CEILING.
7 REPLACE FIRE EXTINGUISHER WITH NEW.
8 NEW FIRE EXTINGUISHER SIGNAGE ABOVE FIRE EXTINGUISHER CABINET , REF TO A-005 FOR REQUIREMENTS.
9 EXTEND EXISTING WALL TO UNDERSIDE OF DECK ABOVE (APPROX. 9'-4" TO 10'-7") WITH WALL TYPE Max1_ SEE SHEET A-002. SEAL ALL PENETRATIONS AND EXISTING VOIDS.
10 NEW CEILING TRACK WALL ANGLE. CUT EXISTING TILE TO FIT NEW LENGTH AND REINSTALL.
11 PROVIDE NEW FULL HT. CORNER GUARD.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK

FULLY SPRINKLERED

100% CONSTRUCTION DOCUMENTS

#	Revisions:	Date

CONSULTANTS:

3/23/2026

PROJECT MANAGER

ACG Project Number 20-398

APOGEE Engineers | Architects
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title: ENLARGED PLANS, BUILDING 171, FIRST FLOOR, TELECOM ROOM 108

Location: ALEXANDRIA VA HEALTH CARE SYSTEM, 2495 SHREVEPORT HWY, 71N, PINEVILLE, LA 71360

Project Title: ELECTRONIC HEALTH RECORD MODERNIZATION (EHRM)

VA PROJECT NUMBER: 502-21-222

Building Number: # 171

Approved

Date: MARCH 24, 2026 | Checked: WVS | Drawn: MEL

Drawing Number: 171.A-401

Dwg. 51 of 51

C:\Submitting\Documents_2C\36_VA Alexandria EHRM_BRG_DT1_Unit#C36.rvt
3/5/2026 4:11:25 PM
VA FORM 08-6231