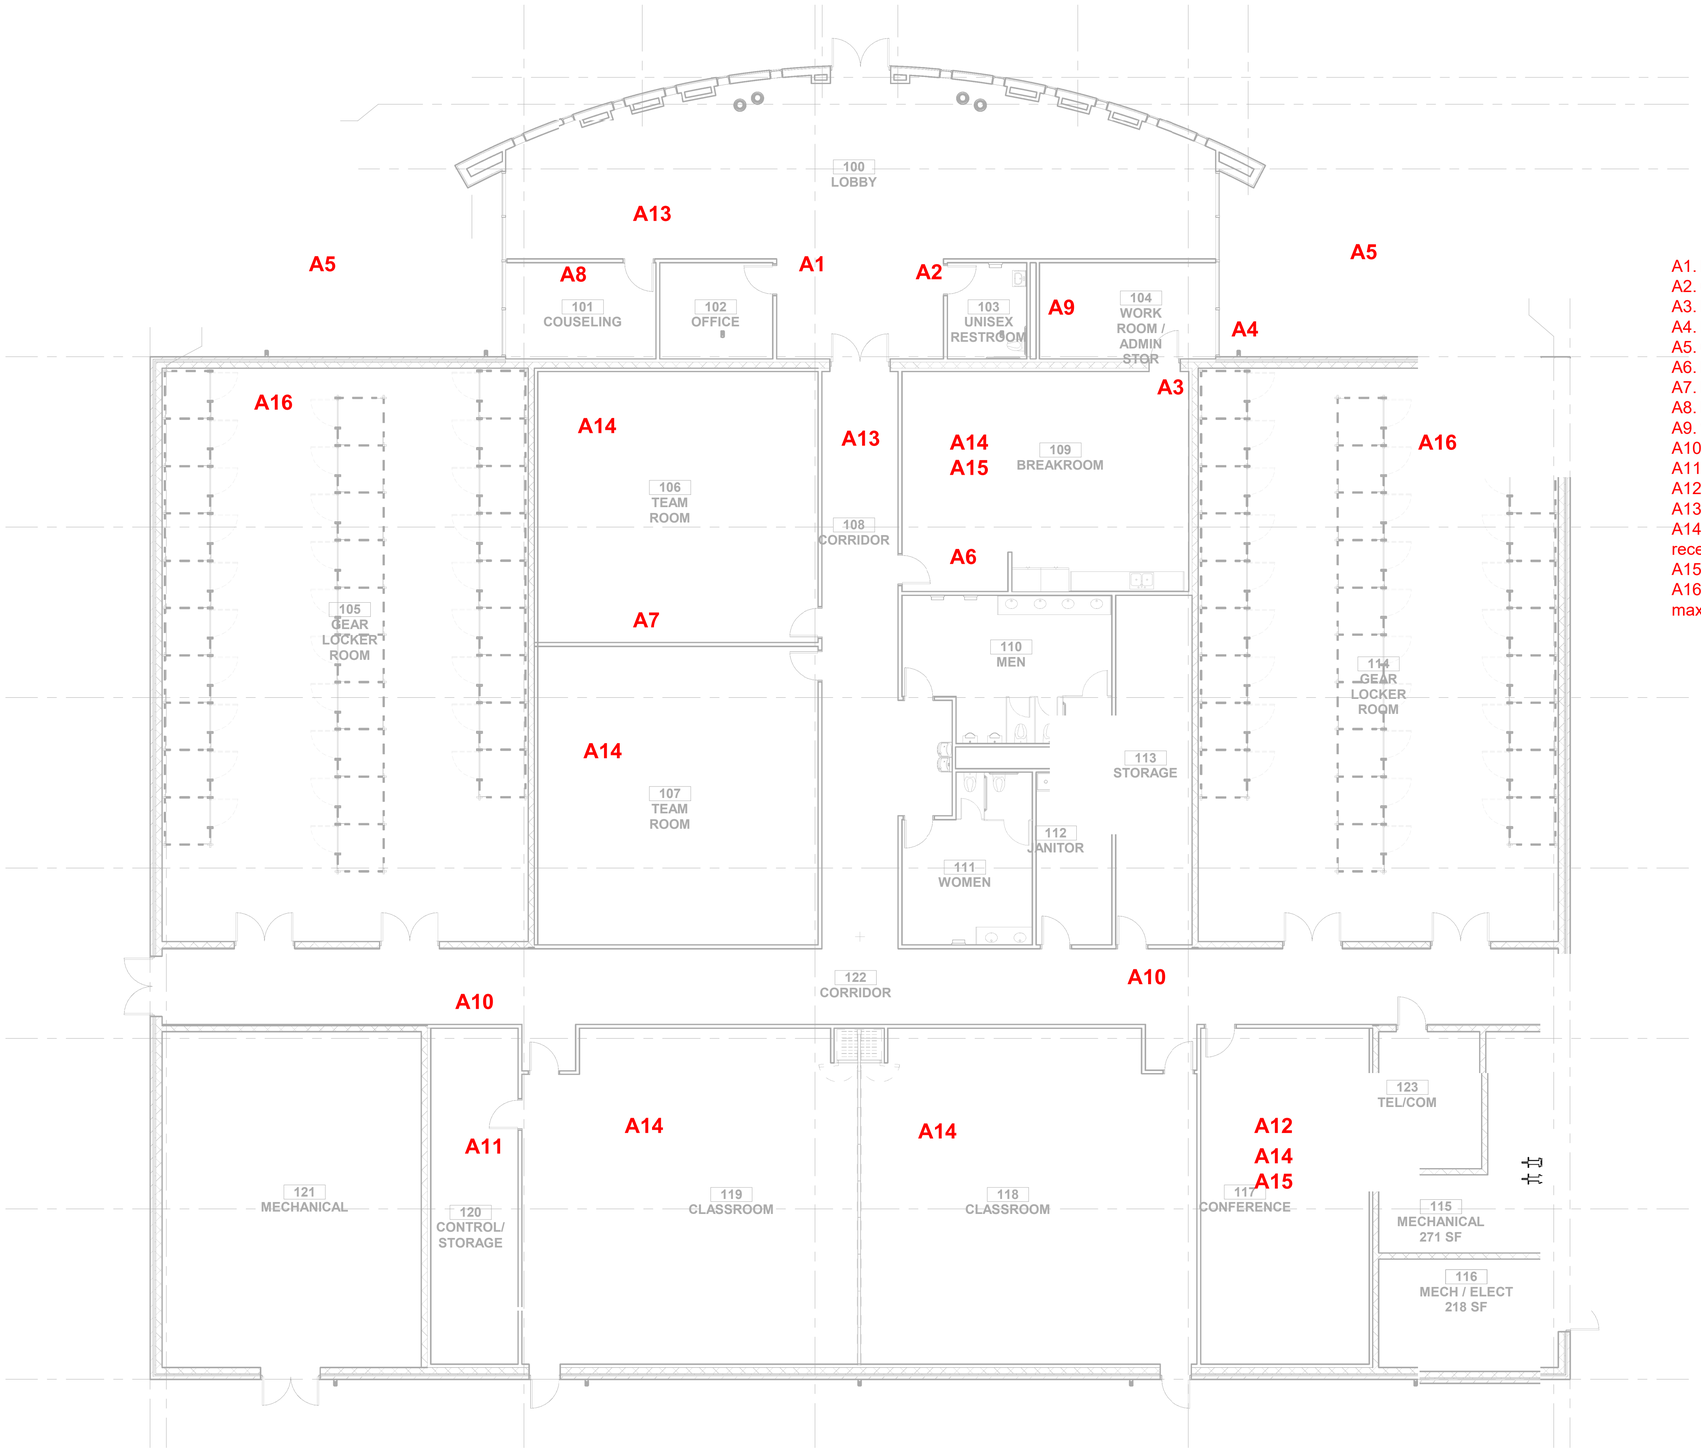

A1. Push out wall to column to expand offices and reduce the foyer
A2. Create two unisex restrooms, one is ADA compliant
A3. Remove door and expand archway
A4. Install double glass doors leading outside
A5. Create two concrete patios
A6. Remove wall
A7. Remove permanent wall and make folding wall (recessed into locker room)
A8. Room 101 is an office
A9. Work Room/Admin Storage is now a continuation of the breakroom
A10. Storage closets should have double doors
A11. Doorway to storage is in the hallway and not the classroom
A12. Conference room is now an instructor lounge
A13. All flooring is epoxy except for foyer/ Foyer is VCT
A14. All team rooms, classrooms, instructor lounge, and breakrooms will have multiple recessed floor electrical outlets.
A15. Breakroom and instructor lounge will have casework for kitchenette
A16. Gear locker rooms will have custom casework benches and lockers and must maximize the number of lockers, with no less than 30 lockers per room (see appendix F)