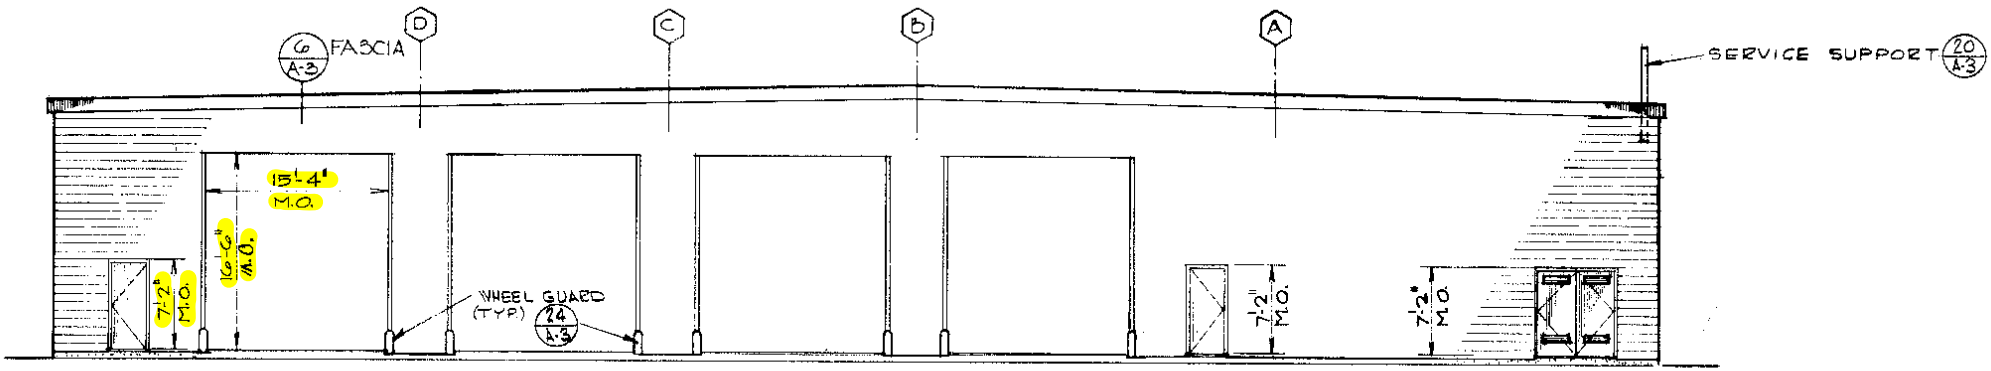

C / A-1 EAST ELEVATION (WEST ELEV. SIM. - OPP. HAND)

1/8" = 1'-0"

DOOR SCHEDULE

MARK	PAIR	WIDTH	HEIGHT	THICKNESS	TYPE	LOUVER	HDWE SET	DETAILS HEAD	DETAILS JAMB	DETAILS SILL	U.L. LABEL	REMARKS
101		2'-8"	7'-0"	1¾"	A		HW2	12/A3	12/A3	—		UNDERCUT 1"
102		3'-0"			A		HW6			—		
103		3'-0"			A		HW5			—		
104	○	6'-0"			B		HW4	12/A3	12/A3	—		
105		3'-0"			A		HW1	1/A3	10/A3	11/A3		
106							HW1					
107							HW1					
108							HW1					
109		3'-0"			A		HW1					
110	○	6'-4"	7'-0"	1¾"	B		HW3	1/A3	10/A3	11/A3		4-LOUVERS
111		15'-4"	16'-6"	2"	C		HW7	19/A3	23/A3	24/A3		
112							HW7					
113							HW7					
114							HW7					
115							HW7					
116							HW7					
117							HW7					
118		15'-4"	16'-6"	2"	C		HW7	19/A3	23/A3	24/A3		

ROOM FINISH SCHEDULE

MARK	DESCRIPTION	FLOOR CONC.	FLOOR CER. TILE	BASE CONC	BASE T. RUBBER	BASE CONC. BLK.	WALLS CONC. BLK.	WALLS GYP. BD.	CEILING INSULATION	CEILING EXP. STRUC.	CEILING GYP. BD.	CEILING HEIGHT	WAINSCOT CER. TILE (4'-0")	WAINSCOT GYP. BD. (8'-0")	WAINSCOT MIR. GEM. (6'-0")	REMARKS
101	TOILET	○	6		5			0			0	9'-6"	1			1 FIXTURE WALL ONLY 2 EXTERIOR WALLS ONLY 3 DELETE 4 ALL WALLS 5 THREE WALLS
102	OFFICE	○			4			0	2		0	9'-6"				CLG. DET. = 21/A-3
103	A.G.E STOR.	○		○		2		0	2	○		—			4	CLG. DET. = 21/A-3
104	MECH. RM.	○		○		2		0	2	○		—		2		
105	MAINT. AREA	○		○		2	○	○		○		—			4	

DOOR TYPES

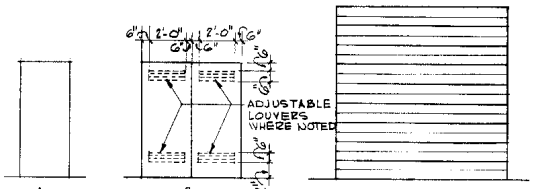

G UNDER VRIDAL ONLY

BLDG 1448

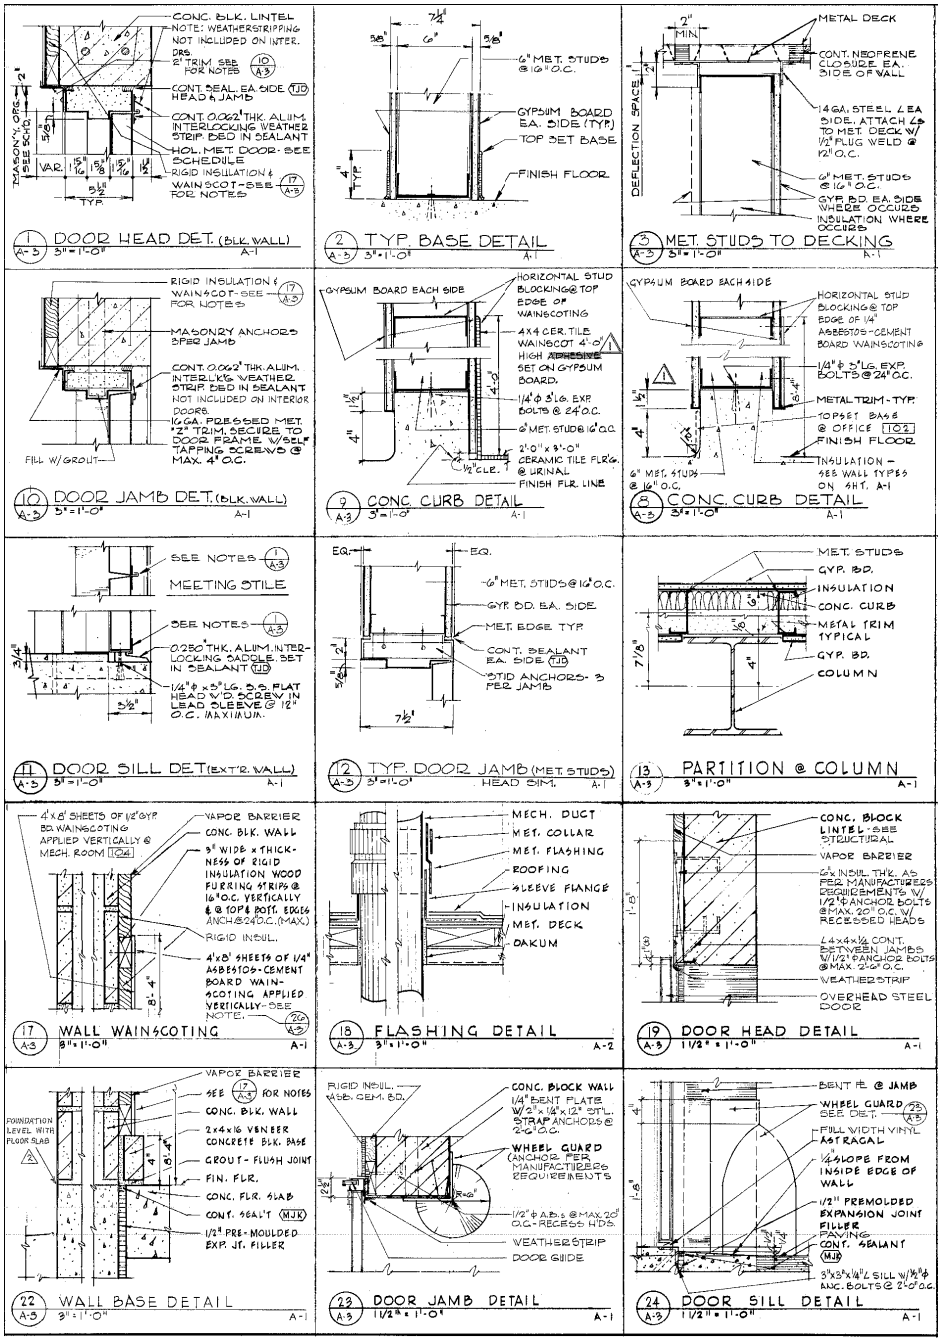
CONC. BLK. LINTEL
NOTE: WEATHERSTRIPPING NOT INCLUDED ON INTER. DRS.
2" TRIM, SEE FOR NOTES 10 A-3
CONT. SEAL, EA SIDE HEAD & JAMB TJD
CONT. 0.062" THK. ALUM. INTERLOCKING WEATHER STRIP, BED IN SEALANT
HOL. MET. DOOR - SEE SCHEDULE
RIGID INSULATION & WAINSCOT - SEE FOR NOTES 17 A-3
MASONRY OPG. SEE SCHED.
VAR.
TYP.
1 A-3 DOOR HEAD DET. (BLK. WALL) 3"=1'-0" A-1
6" MET. STUDS @ 16" O.C.
GYPSUM BOARD EA. SIDE (TYP.)
TOP SET BASE
FINISH FLOOR
2 A-3 TYP. BASE DETAIL 3"=1'-0" A-1
METAL DECK
CONT. NEOPRENE CLOSURE, EA. SIDE OF WALL
14 GA. STEEL ∠ EA SIDE, ATTACH ∠'S TO MET. DECK W/ 1/2" PLUG WELD @ 12" O.C.
6" MET. STUDS @ 16" O.C.
GYP. BD. EA. SIDE WHERE OCCURS
INSULATION WHERE OCCURS
DEFLECTION SPACE
3 A-3 MET. STUDS TO DECKING 3"=1'-0" A-1
RIGID INSULATION & WAINSCOT - SEE FOR NOTES 17 A-3
MASONRY ANCHORS PER JAMB
CONT. 0.062" THK. ALUM. INTERLK'G. WEATHER STRIP, BED IN SEALANT NOT INCLUDED ON INTERIOR DOORS
16 GA. PRESSED MET. "Z" TRIM, SECURE TO DOOR FRAME W/ SELF TAPPING SCREWS @ MAX. 4'-0" O.C.
FILL W/ GROUT
10 A-3 DOOR JAMB DET. (BLK. WALL) 3"=1'-0" A-1
GYPSUM BOARD EACH SIDE
HORIZONTAL STUD BLOCKING @ TOP EDGE OF WAINSCOTING
4X4 CER. TILE WAINSCOT 4'-0" HIGH ADHESIVE SET ON GYPSUM BOARD.
1/4" ϕ 3" LG. EXP. BOLTS @ 24" O.C.
6" MET. STUDS @ 16" O.C.
2'-0" x 3'-0" CERAMIC TILE FLR'G. @ URINAL
1/2" CLR.
FINISH FLR. LINE
9 A-3 CONC. CURB DETAIL 3"=1'-0" A-1
GYPSUM BOARD EACH SIDE
HORIZONTAL STUD BLOCKING @ TOP EDGE OF 1/4" ASBESTOS-CEMENT BOARD WAINSCOTING
1/4" ϕ 3" LG. EXP. BOLTS @ 24" O.C.
METAL TRIM - TYP.
TOPSET BASE @ OFFICE 102
FINISH FLOOR
6" MET. STUDS @ 16" O.C.
INSULATION - SEE WALL TYPES ON SHT. A-1
8 A-3 CONC. CURB DETAIL 3"=1'-0" A-1
SEE NOTES 1 A-3
MEETING STILE
SEE NOTES 1 A-3
0.250" THK. ALUM. INTERLOCKING SADDLE, SET IN SEALANT TJD
1/4" ϕ x 3" LG. S.S. FLAT HEAD W.D. SCREW IN LEAD SLEEVE @ 12" O.C. MAXIMUM.
3/4"
11 A-3 DOOR SILL DET. (EXT'R. WALL) 3"=1'-0" A-1
EQ.
6" MET. STUDS @ 16" O.C.
GYP. BD. EA. SIDE
MET. EDGE TYP.
CONT. SEALANT EA. SIDE TJD
STID ANCHORS - 3 PER JAMB
12 A-3 TYP. DOOR JAMB (MET. STUDS) 3"=1'-0" HEAD SIM. A-1
MET. STUDS
GYP. BD.
INSULATION
CONC. CURB
METAL TRIM TYPICAL
GYP. BD.
COLUMN
7 1/8"
13 A-3 PARTITION @ COLUMN 3"=1'-0" A-1
4'x8' SHEETS OF 1/2" GYP. BD. WAINSCOTING APPLIED VERTICALLY @ MECH. ROOM 104
VAPOR BARRIER
CONC. BLK. WALL
3" WIDE x THICKNESS OF RIGID INSULATION WOOD FURRING STRIPS @ 16" O.C. VERTICALLY & @ TOP & BOTT. EDGES ANCH'S @ 24" O.C. (MAX.)
RIGID INSUL.
4'x8' SHEETS OF 1/4" ASBESTOS-CEMENT BOARD WAINSCOTING APPLIED VERTICALLY - SEE NOTE 5 20 A-3
8'-4"
17 A-3 WALL WAINSCOTING 3"=1'-0" A-1
MECH. DUCT
MET. COLLAR
MET. FLASHING
ROOFING
SLEEVE FLANGE
INSULATION
MET. DECK
CAULKUM
18 A-3 FLASHING DETAIL 3"=1'-0" A-2
CONC. BLOCK LINTEL - SEE STRUCTURAL
VAPOR BARRIER
2" INSUL. THK. AS PER MANUFACTURERS REQUIREMENTS W/ 1/2" ϕ ANCHOR BOLTS @ MAX. 20" O.C. W/ RECESSED HEADS
L 4x4x1/4 CONT. BETWEEN JAMBS W/ 1/2" ϕ ANCHOR BOLTS @ MAX. 2'-0" O.C.
WEATHERSTRIP
OVERHEAD STEEL DOOR
1'-0"
19 A-3 DOOR HEAD DETAIL 1 1/2" = 1'-0" A-1
VAPOR BARRIER
SEE 17 A-3 FOR NOTES
CONC. BLK. WALL
2x4x16 VENEER CONCRETE BLK. BASE
GROUT - FLUSH JOINT
FIN. FLR.
CONC. FLR. SLAB
CONT. SEAL'T MJK
1/2" PRE-MOULDED EXP. JT. FILLER
FOUNDATION LEVEL WITH FLOOR SLAB
18"
22 A-3 WALL BASE DETAIL 3"=1'-0" A-1
RIGID INSUL. 1/2" ASB. CEM. BD.
CONC. BLOCK WALL
1/4" BENT PLATE W/ 3" x 1/4" x 12" STL. STRAP ANCHORS @ 2'-0" O.C.
WHEEL GUARD (ANCHOR PER MANUFACTURERS REQUIREMENTS
1/2" ϕ A.B.'s @ MAX. 20" O.C. - RECESS H'DS.
WEATHERSTRIP
DOOR GUIDE
23 A-3 DOOR JAMB DETAIL 1 1/2" = 1'-0" A-1
BENT PL. @ JAMB
WHEEL GUARD SEE DET. 23 A-3
FULL WIDTH VINYL ASTRAGAL
1/4" SLOPE FROM INSIDE EDGE OF WALL
1/2" PREMOLDED EXPANSION JOINT FILLER
PAVING
CONT. SEALANT MJK
3" x 3" x 1/4" ∠ SILL W/ 1/2" ϕ ANC. BOLTS @ 2'-0" O.C.
4"
1'-8"
24 A-3 DOOR SILL DETAIL 1 1/2" = 1'-0" A-1

BLDG 1448

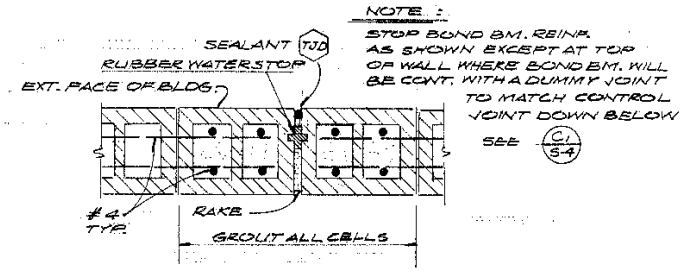

CONTROL JOINT

C/S-4 DETAIL
S-1, S-4 1"=1'-0"

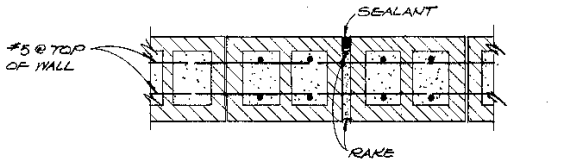

C1/S-4 DUMMY JOINT DETAIL
1"=1'-0"

BLDG 400