U.S. Department of the Interior Specifications

Issued for Construction

May 2026

Project Name:	NIFC 300-JWH SUITES 222/227 RENOVATION
Location:	Boise, ID
Project Number:	070117.029
Contract Number:	140L0622D0002

LBYD Federal, LLC

THIS PAGE HAS BEEN LEFT INTENTIONALLY BLANK.

Division	Section Title	Pages

SPECIFICATIONS GROUP

General Requirements Subgroup

DIVISION 01 - GENERAL REQUIREMENTS

011000	SUMMARY	3
012000	UNIT PRICES AND SCHEDULE OF VALUES	4
013200	CONSTRUCTION PROGRESS DOCUMENTATION	4
013300	SUBMITTAL PROCEDURES	7
014000	QUALITY REQUIREMENTS	8
015000	TEMPORARY FACILITIES AND CONTROLS	15
016000	PRODUCT REQUIREMENTS	5
017300	EXECUTION	8
017419	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL	9
017700	CLOSEOUT PROCEDURES	4
017839	PROJECT RECORD DOCUMENTS	2
019113	GENERAL COMMISSIONING REQUIREMENTS	16

Facility Construction Subgroup

DIVISION 02 - EXISTING CONDITIONS

024116	STRUCTURE DEMOLITION	5

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

061000	ROUGH CARPENTRY	6
064116	PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS	6

DIVISION 08 - OPENINGS

081113	HOLLOW METAL DOORS AND FRAMES	8
081416	FLUSH WOOD DOORS	6
083113	ACCESS DOORS AND FRAMES	4
086200	UNIT SKYLIGHTS	6
087111	DOOR HARDWARE (DESCRIPTIVE SPECIFICATION)	13
088000	GLAZING	8

DIVISION 09 - FINISHES

092216	NON-STRUCTURAL METAL FRAMING	9
092900	GYPSUM BOARD	8
093013	CERAMIC TILING	10
095113	ACOUSTICAL PANEL CEILINGS	8

096513	RESILIENT BASE AND ACCESSORIES	5
096519	RESILIENT TILE FLOORING	6
096813	TILE CARPETING	7
099123	INTERIOR PAINTING	6

DIVISION 10 - SPECIALTIES

101423.16	ROOM-IDENTIFICATION PANEL SIGNAGE	5
102113.19	PLASTIC TOILET COMPARTMENTS	6
102800	TOILET, BATH, AND LAUNDRY ACCESSORIES	6
104413	FIRE PROTECTION CABINETS	5
104416	FIRE EXTINGUISHERS	3

DIVISION 12 - FURNISHINGS

123661.16	SOLID SURFACING COUNTERTOPS	4

Facility Services Subgroup

DIVISION 21 – FIRE SUPPRESSION

211313	FIRE SPRINKLER	16

DIVISION 22 - PLUMBING

220719	PLUMBING PIPING INSULATION	4
221116	DOMESTIC WATER PIPING	8
221316	SANITARY WASTE AND VENT PIPING	6
224100	PLUMBING FIXTURES	5
224216.13	COMMERCIAL LAVATORIES	5

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

230130.52	EXISTING HVAC AIR DISTRIBUTION SYSTEM CLEANING	6
230523	GENERAL-DUTY VALVES FOR HVAC PIPING	6
230529	HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT	4
230548	VIBRATION AND SEISMIC CONTROLS FOR HVAC	7
230593	TESTING, ADJUSTING, AND BALANCING FOR HVAC	11
230713	DUCT INSULATION	9
230719	HVAC PIPING INSULATION	11
230800	COMMISSIONING OF HVAC	10
230923	DIRECT DIGITAL CONTROL (DDC) SYSTEM FOR HVAC	18
230923.11	CONTROL VALVES	6
232113	HYDRONIC PIPING	7
232116	HYDRONIC PIPING SPECIALTIES	3
233113	METAL DUCTS	13
233300	AIR DUCT ACCESSORIES	5
233346	FLEXIBLE DUCTS	3

233400	HVAC FANS	6
233600	AIR TERMINAL UNITS	6
233713.13	AIR DIFFUSERS	2
233713.23	REGISTERS AND GRILLES	2

DIVISION 26 - ELECTRICAL

260519	LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES	5
260523	CONTROL-VOLTAGE ELECTRICAL POWER CABLES	7
260526	GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS	5
260529	HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS	4
260533.13	RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS	5
260544	SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING	3
260553	IDENTIFICATION FOR ELECTRICAL SYSTEMS	3
260923	LIGHTING CONTROL DEVICES	9
262726	WIRING DEVICES	6
262816	ENCLOSED SWITCHES AND CIRCUIT BREAKERS	7
265119	LED INTERIOR LIGHTING	14
265213	EMERGENCY AND EXIT LIGHTING	4

DIVISION 27 - COMMUNICATIONS

270528	PATHWAYS FOR COMMUNICATIONS SYSTEMS	9
271000	STRUCTURED CABLING	15

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

283100	ADDRESSABLE FIRE-ALARM SYSTEMS	9

END OF TABLE OF CONTENTS

CIVIL DESIGNER OF RECORD:

Saige Ballock-Dixon

LBYD Federal

1425 Higham St
Idaho Falls, ID

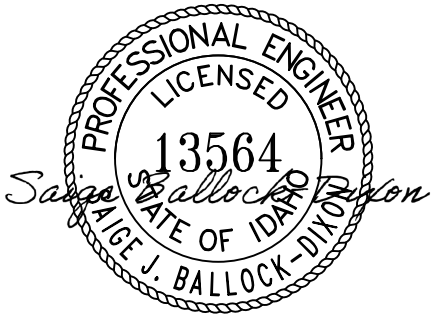

Responsibility limited to the following sections in the project specifications:

011000	SUMMARY
012200	UNIT PRICES AND SCHEDULE OF VALUES
013200	CONSTRUCTION PROGRESS DOCUMENTATION
013300	SUBMITTAL PROCEDURES
014000	QUALITY REQUIREMENTS
015000	TEMPORARY FACILITIES AND CONTROLS
016000	PRODUCT REQUIREMENTS
017300	EXECUTION
017419	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
017700	CLOSEOUT PROCEDURES
017839	PROJECT RECORD DOCUMENTS
019113	GENERAL COMMISSIONING REQUIREMENTS
024116	STRUCTURE DEMOLITION

ARCHITECURAL DESIGNER OF RECORD:

Scott Roberts

Cushing Terrell
800 W Main St., Suite 800
Boise, ID



Responsibility limited to the following sections in the project specifications:

061000	ROUGH CARPENTRY
064116	PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS
081113	HOLLOW METAL DOORS AND FRAMES
081416	FLUSH WOOD DOORS
083113	ACCESS DOORS AND FRAMES
086200	UNIT SKYLIGHTS
087111	DOOR HARDWARE (DESCRIPTIVE SPECIFICATION)
088000	GLAZING
092216	NON-STRUCTURAL METAL FRAMING
092900	GYPSUM BOARD
093013	CERAMIC TILING
095113	ACOUSTICAL PANEL CEILINGS
096513	RESILIENT BASE AND ACCESSORIES
096519	RESILIENT TILE FLOORING
096813	TILE CARPETING
099123	INTERIOR PAINTING
101423.16	ROOM-IDENTIFICATION PANEL SIGNAGE

Responsibility limited to the following sections in the project specifications:

102113.19	PLASTIC TOILEY COMPARTMENTS
102800	TOILET, BATH, AND LAUNDRY ACCESSORIES
104413	FIRE PROTECTION CABINETS
104416	FIRE EXTINGUISHERS
123661.16	SOLID SURFACING COUNTERTOPS

FIRE PROTECTION DESIGNER OF RECORD:

Steve Bingham

Cushing Terrell
800 W Main St., Suite 800
Boise, ID

Responsibility limited to the following sections in the project specification:

211313 FIRE SPRINKLER

283100 ADDRESSABLE FIRE ALARM SYSTEM

PLUMBING DESIGNER OF RECORD:

Nathan Frongner, PE

LBYD Federal

1425 Higham St
Idaho Falls, Idaho, 83402

PROFESSIONAL ENGINEER
LICENSED
18674
STATE OF IDAHO
NATHAN J. FRONGNER

Nathan Frongner
2026.05.05 12:27:14-06'00'
nfrongner@northwindgrp.com

Responsibility limited to the following sections in the project specifications:

220719	PLUMBING PIPING INSULATION
221116	DOMESTIC WATER PIPING
221316	SANITARY WASTE AND VENT PIPING
224100	PLUMING FIXTURES
224216.13	COMMERCIAL LAVATORIES

MECHANICAL DESIGNER OF RECORD:

Nathan Frongner

LBYD Federal

1425 Higham St
Idaho Falls, ID

PROFESSIONAL ENGINEER
LICENSED
18674
STATE OF IDAHO
NATHAN J. FRONGNER

Nathan Frongner
2026.05.05 12:27:25-06'00'
nfrongner@northwindgrp.com

Responsibility limited to the following sections in the project specifications:

230130.52	EXISTING HVAC AIR DISTRIBUTION SYSTEM CLEANING
230523	GENERAL-DUTY VALVES FOR HVAC PIPING
230529	HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT
230548	VIBRATION AND SEISMIC CONTROLS FOR HVAC
230593	TESTING, ADJUSTING, AND BALANCING FOR HVAC
230713	DUCT INSULATION
230719	HVAC PIPING INSULATION
230800	COMMISSIONING OF HVAC
230923	DIRECT DIGITAL CONTROL (DDC) SYSTEM FOR HVAC
230923.11	CONTROL VALVES
232113	HYDRONIC PIPING
232116	HYDRONIC PIPING SPECIALTIES
233113	METAL DUCTS
233300	AIR DUCT ACCESSORIES
233346	FLEXIBLE DUCTS
233400	HVAC FANS
233600	AIR TERMINAL UNITS

Responsibility limited to the following sections in the project specifications:

233713.13 AIR DIFFUSERS

233713.23 REGISTERS AND GRILLES

ELECTRICAL DESIGNER OF RECORD:

Mario Haddad

LBYD Federal

1425 Higham St
Idaho Falls, ID

Responsibility limited to the following sections in the project specifications:

260519	LOW-VOLTAGE ELECTRICAL POWER CONDUTORS AND CABLES
260523	CONTROL-VOLTAGE ELECTRICAL POWER CABLES
260526	GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
260529	HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS
260533.13	RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS
260544	SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING
260553	IDENTIFICATION FOR ELECTRICAL SYSTEMS
260923	LIGHTING CONTROL DEVICES
262726	WIRING DEVICES
262816	ENCLOSED SWITCHES AND CIRCUIT BREAKERS
265119	LED INTERIOR LIGHTING
265213	EMERGENCY AND EXIT LIGHTING
270528	PATHWAYS FOR COMMUNICATIONS SYSTEMS
271000	STRUCTURED CABLING

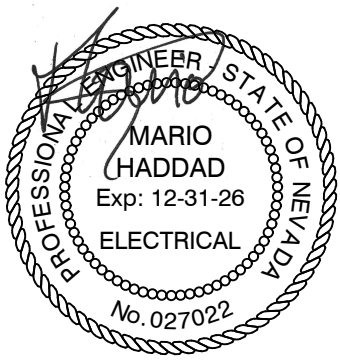

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Project information.
2. Work covered by Contract Documents.
3. Access to site.
4. Coordination with Government.
5. Work restrictions.
6. Specification and Drawing conventions.

B. Related Requirements:

1. Section 015000 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Government's facilities.

1.2 PROJECT INFORMATION

A. Project Identification: NIFC 300-JWH Suite 222/227 Renovation

1. Project Location: National Interagency Fire Center (NIFC) Campus, located at 3833 S Development Ave., Boise, ID 83705. 300- Jack Wilson Building (JWH) Suite 222 and 227.

1.3 WORK COVERED BY CONTRACT DOCUMENTS

A. The Work for the Project is defined by the Contract Documents and consists of the following:

1. Renovation of Suite 222 which includes Offices 220, 221, 222C, 223, Rooms 202A, 202B, Conference Room 224, and the open area and both second floor bathroom finish replacement/update. Work includes demolition and construction of new walls, ceiling grids, installation of new doors and wall infill, and the replacement of carpet, ceiling tiles, paint, baseboards, and finishes.

2. Renovation of Suite 227 which includes Offices 226 and 228, Conference Rooms 225 and the open area and Breakroom 205. Work includes demolition and construction of new walls, ceiling grids, installation of new doors casework, and a sink. And updates to finishes and furniture.

B. Type of Contract:

1. Project will be constructed under a single prime contract.

1.4 ACCESS TO SITE

A. General: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.

B. Use of Site: Limit use of Project site to Work in areas indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
   1. Driveways, Walkways, and Entrances: Keep driveways and entrances serving premises clear and available to Government and emergency vehicles at all times. Do not use these areas for parking or for storage of materials.

1.5 COORDINATION WITH GOVERNMENT

A. Full Government Occupancy: Government will occupy site and existing, adjacent building(s) during entire construction period. Cooperate with Government during construction operations to minimize conflicts and facilitate Government usage. Perform the Work so as not to interfere with Government's day-to-day operations. Maintain existing exits unless otherwise indicated.

1.6 WORK RESTRICTIONS

A. Work Restrictions, General: Comply with restrictions on construction operations.

B. On-Site Work Hours: Limit work to normal business working hours as indicated in the contract documents., Monday through Friday, unless otherwise indicated.

C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Government unless permitted under the following conditions:

   1. Notify Government not less than two days in advance of proposed utility interruptions.
   2. Obtain Government's written permission before proceeding with utility interruptions.

D. Nonsmoking Building: Smoking is not permitted within the building or within 25 feet of entrances, operable windows, or outdoor-air intakes anytime during construction.

1.7 SPECIFICATION AND DRAWING CONVENTIONS

A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:

   1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
   2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.

B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 012000 - UNIT PRICES AND SCHEDULE OF VALUES

PART 1 - GENERAL

1.1 SUMMARY

A. This Section includes administrative and procedural requirements for unit prices.

1.2 PROCEDURES

A. Unit prices include all necessary material, plus cost for delivery, installation, insurance, applicable taxes, overhead, and profit.

1.3 SCHEDULE OF VALUES

A. Coordination: Coordinate preparation of the Schedule of Values with preparation of Contractor's Construction Schedule.

1. Correlate line items in the Schedule of Values with other required administrative forms and schedules, including Application for Payment, Submittals Schedule, and Contractor's Construction Schedule.
2. Submit the Schedule of Values to Government at earliest possible date but no later than ten calendar days after the Notice to Proceed.

B. Format and Content: Use the Project Manual table of contents as a guide to establish line items for the Schedule of Values. Provide at least one line item for each Specification Section.

1. Identification: Include the following Project identification on the Schedule of Values:

a. Project name and location.
b. Name of Government.
c. Contractor's name and address.
d. Date of submittal.

2. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with the Project Manual table of contents. Provide several line items for principal subcontract amounts, where appropriate. Include separate line items under required principal subcontracts for operation and maintenance manuals, punch list activities, Project Record Documents, and demonstration and training in the amount of 5 percent of the Contract Sum.
3. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
4. Provide a separate line item in the Schedule of Values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.
5. Provide separate line items in the Schedule of Values for initial cost of materials, for each subsequent stage of completion, and for total installed value of that part of the Work.

6. Each item in the Schedule of Values and Applications for Payment shall be complete. Include total cost and proportionate share of general overhead and profit for each item.

    a. Temporary facilities and other major cost items that are not direct cost of actual work-in-place may be shown either as separate line items in the Schedule of Values or distributed as general overhead expense, at Contractor's option.

7. Schedule Updating: Update and resubmit the Schedule of Values before the next Applications for Payment when Modifications result in a change in the Contract Sum.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 LUMP SUM PAYMENT ITEMS

A. Payment items for the work of this Contract for which contract lump sum payments will be made are listed in the BIDDING SCHEDULE and described below.

B. All costs for items of work, which are not specifically mentioned to be included in a particular lump sum or unit price payment item, shall be included in the listed lump sum item most closely associated with the work involved.

C. The lump sum price and payment made for each item listed shall constitute full compensation for furnishing all plant, labor, materials, and equipment, and performing any associated Contractor quality control, environmental protection, meeting safety requirements, tests and reports, and for performing all work required for which separate payment is not otherwise provided.

D. Mobilization and Demobilization: Preparatory work and operations, including movement of personnel, equipment, supplies and incidentals to the project site; and for other work and operations that must be performed or costs incurred prior to beginning work on the various items on the project site. Does not include moves between project sites.

    1. Payment: Payment will be made for costs associated with mobilization and demobilization, as defined in Special Clause PAYMENT FOR MOBILIZATION AND DEMOBILIZATION. No direct payment for moves between project sites will be made. Include consideration for moves between project sites. Prices and payment will be full compensation for the work described in this section. Progress payments will be made as follows:

        a. When 5 percent of the original Contract amount is earned from other bid items, 50 percent of the amount bid for mobilization or 5 percent of the original Contract amount, whichever is lesser, will be paid.
        b. When 10 percent of the original Contract amount is earned from other bid items, 100 percent of the amount bid for mobilization or 10 percent of the original Contract amount, whichever is lesser, will be paid.

c. Upon completion of work for the project, payment of the amount bid for mobilization in excess of 10 percent of the original Contract amount, will be paid.
d. The total sum of all payments shall not exceed the original Contract amount bid for mobilization, regardless of whether Contractor may have shut down the work on the project or moved equipment away from the project and then back again.

2. Unit of Measure: Lump sum.

E. Demolition:

1. Payment: Payment will be made for costs associated with operations necessary for demolition.
2. Unit of Measure: Lump sum.

F. Construction:

1. Payment: Payment will be made for costs associated with operations necessary for the construction.
2. Unit of Measure: Lump sum.

3.2 SUMMARY OF BID ITEMS

A. The intent of the following paragraphs is to explain, in general, what is and what is not included in a bid item, and the limits or cut-off points where one bid item ends and another begins. If no bid item exists for a portion of the work, include the costs in a related bid item.

B. BID ITEM 1 - GENERAL REQUIREMENTS (MOBILIZATION AND CONSTRUCTION MANAGEMENT): This item includes all preparatory work and operations, including those necessary to the movement of personnel, equipment, supplies and incidentals to the project site; bonds, work layout; other work and operations which must be performed or costs incurred prior to beginning work on the various items on the project site. Construction management includes ongoing tasks such as environmental controls and field office operations. It will be paid for as a lump sum.

C. BID ITEM 8 – OPENINGS: This item includes all work required to openings. It will be paid for as a lump sum.

D. BID ITEM 9- FINSIHES: This item includes all work related to finishes. It will be paid for as a lump sum.

E. BID ITEM 10 – SPECIALITIES: This item includes all work related to specialties. It will be paid for as a lump sum.

F. BID ITEM 12 – FURNISHINGS: This item includes all work related to furnishings. It will be paid for as a lump sum.

G. BID ITEM 21- FIRE SUPPRESSION: This item includes all work related to fire suppression. It will be paid for as a lump sum.

H. BID ITEM 22 - PLUMBING: This item includes all work related to plumbing. It will be paid for as a lump sum.

I. BID ITEM 23 – HEATING, VENTILLATION, AND AIR CONDITIONING: This item includes all work related to HVAC. It will be paid for as a lump sum.

J. BID ITEM 26 – ELECTRICAL: This item includes all work related to electrical. It will be paid for as a lump sum.

K. BID ITEM 27 – COMMUNICATIONS: This item includes all work related to communications. It will be paid for as a lump sum.

L. BID ITEM 28 – ELECTRONIC SAFETY AND SECURITY: This item includes all work related to electronic safety and security. It will be paid for as a lump sum.

END OF SECTION 012000

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:

1. Contractor's Construction Schedule.
2. Daily construction reports.
3. Field condition reports.

1.2 SUBMITTALS

A. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.

B. Daily Construction Reports: Submit at weekly intervals.

C. Field Condition Reports: Submit one electronic copy at time of discovery of differing conditions.

1.3 COORDINATION

A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.

B. Coordinate Contractor's Construction Schedule with the schedule of values, submittal schedule, progress reports, payment requests, and other required schedules and reports.

1. Secure time commitments for performing critical elements of the Work from entities involved.
2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

1.4 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

A. Computer Scheduling Software: Prepare schedules using the current version of a program that has been developed specifically to manage construction schedules.

1. Use Microsoft Project, Primavera, or similar type software.

B. Time Frame: Extend schedule from date established for the Notice to Proceed to date of final completion.

1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.

C. Activities: Treat each floor or separate area as a separate numbered activity for each main element of the Work. Comply with the following:

1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Government. Conform to Critical Path Method for scheduling, showing direct correlation of critical activity durations to the start of the next critical activity.
2. Procurement Activities: Include procurement process activities for the following long lead items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
3. Submittal Review Time: Include review and resubmittal times indicated in Section 013300 "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with submittal schedule.
4. Startup and Testing Time: Include no fewer than 15 days for startup and testing.
5. Commissioning Time: Include no fewer than 15 days for commissioning.
6. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Government's administrative procedures necessary for certification of Substantial Completion.
7. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and final completion.

D. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.

1. Work Restrictions: Show the effect of the following items on the schedule:

   a. Uninterruptible services.
   b. Use-of-premises restrictions.
   c. Seasonal variations.
   d. Environmental control.

E. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and final completion.

F. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:

1. Unresolved issues.
2. Unanswered Requests for Information.
3. Rejected or unreturned submittals.
4. Notations on returned submittals.
5. Pending modifications affecting the Work and the Contract Time.

G. Contractor's Construction Schedule Updating: At intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.

1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
3. As the Work progresses, indicate final completion percentage for each activity.

H. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, equipment required to achieve compliance, and date by which recovery will be accomplished.

I. Distribution: Distribute copies of approved schedule to Government, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.

1. Post copies in Project meeting rooms and temporary field offices.
2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

1.5 GANTT-CHART SCHEDULE REQUIREMENTS

A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal, Gantt-chart-type, Contractor's Construction Schedule within 30 days of date established for the Notice of Award.

B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.

1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

1.6 REPORTS

A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:

1. List of subcontractors at Project site.
2. Approximate count of personnel at Project site.
3. Equipment at Project site.
4. Material deliveries.
5. High and low temperatures and general weather conditions, including presence of rain or snow.
6. Testing and inspection.
7. Accidents.
8. Meetings and significant decisions.
9. Stoppages, delays, shortages, and losses.
10. Meter readings and similar recordings.

11. Emergency procedures.
12. Orders and requests of authorities having jurisdiction.
13. Change Orders received and implemented.
14. Services connected and disconnected.
15. Equipment or system tests and startups.
16. Partial completions and occupancies.
17. Substantial Completions authorized.

B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013200

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Submittal schedule requirements.
2. Administrative and procedural requirements for submittals.

1.2 DEFINITIONS

A. Action Submittals: Written and graphic information and physical samples that require Government's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."

B. Informational Submittals: Written and graphic information and physical samples that do not require Government's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

1.3 SUBMITTAL FORMATS

A. Submittal Information: Include the following information in each submittal:

1. Project name.
2. Date.
3. Name of Government.
4. Name of Contractor.
5. Name of firm or entity that prepared submittal.
6. Names of subcontractor, manufacturer, and supplier.
7. Unique submittal number, including revision identifier. Include Specification Section number with sequential alphanumeric identifier; and alphanumeric suffix for resubmittals.
8. Category and type of submittal.
9. Submittal purpose and description.
10. Number and title of Specification Section, with paragraph number and generic name for each of multiple items.
11. Drawing number and detail references, as appropriate.
12. Indication of full or partial submittal.
13. Location(s) where product is to be installed, as appropriate.
14. Other necessary identification.
15. Remarks.
16. Signature of transmitter.

B. Options: Identify options requiring selection by Government.

C. Deviations and Additional Information: On each submittal, clearly indicate deviations from requirements in the Contract Documents, including minor variations and limitations; include relevant additional information and revisions, other than those requested by Government on previous submittals. Indicate by highlighting on each submittal or noting on attached separate sheet.

D. PDF Submittals: Prepare submittals as PDF package, incorporating complete information into each PDF file. Name PDF file with submittal number.

1.4 SUBMITTAL PROCEDURES

A. Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.

1. Email: Prepare submittals as PDF package, and transmit to Government by sending via email. Include PDF transmittal form. Include information in email subject line as requested by Government.

B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.

C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Government's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.

1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Government will advise Contractor when a submittal being processed must be delayed for coordination.
2. Resubmittal Review: Allow 15 days for review of each resubmittal.

D. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.

E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.

F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Government's action stamp.

1.5 SUBMITTAL REQUIREMENTS

A. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.

1. If information must be specially prepared for submittal because standard published data are unsuitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:

a. Manufacturer's catalog cuts.
b. Manufacturer's product specifications.
c. Standard color charts.
d. Statement of compliance with specified referenced standards.
e. Testing by recognized testing agency.
f. Application of testing agency labels and seals.
g. Notation of coordination requirements.
h. Availability and delivery time information.

4. For equipment, include the following in addition to the above, as applicable:

a. Wiring diagrams that show factory-installed wiring.
b. Printed performance curves.
c. Operational range diagrams.
d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.

5. Submit Product Data before Shop Drawings, and before or concurrent with Samples.

B. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.

1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:

a. Identification of products.
b. Schedules.
c. Compliance with specified standards.
d. Notation of coordination requirements.
e. Notation of dimensions established by field measurement.
f. Relationship and attachment to adjoining construction clearly indicated.
g. Seal and signature of professional engineer if specified.

2. Paper Sheet Size: Except for templates, patterns, and similar full-size Drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches, but no larger than 30 by 42 inches.

C. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other materials.

1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.

2. Identification: Permanently attach label on unexposed side of Samples that includes the following:

    a. Project name and submittal number.
    b. Generic description of Sample.
    c. Product name and name of manufacturer.
    d. Sample source.
    e. Number and title of applicable Specification Section.
    f. Specification paragraph number and generic name of each item.

3. Email Transmittal: Provide PDF transmittal. Include digital image file illustrating Sample characteristics, and identification information for record.
4. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.

    a. Samples not incorporated into the Work, or otherwise designated as Government's property, are the property of Contractor.

5. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.

    a. Number of Samples: Submit one full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Government will return submittal with options selected.

6. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

    a. Number of Samples: Submit two sets of Samples. Government will retain one Sample set; remainder will be returned.

        1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
        2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least two sets of paired units that show approximate limits of variations.

D. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:

E. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of Government and Government, and other information specified.

F. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.

G. Certificates:

1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
2. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
4. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
5. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.

H. Test and Research Reports:

1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
4. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.

1.6 DELEGATED-DESIGN SERVICES

A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are insufficient to perform services or certification required, submit a written request for additional information to Government.

B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF file and one paper copy of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.

1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

1.7 CONTRACTOR'S REVIEW

A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Government.

B. Contractor's Approval: Indicate Contractor's approval for each submittal with a uniform approval stamp. Include name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

1. Government will not review submittals received from Contractor that do not have Contractor's review and approval.

1.8 GOVERNMENT'S REVIEW

A. Action Submittals: Government will review each submittal, indicate corrections or revisions required, and return it.

1. PDF Submittals: Government will indicate, via markup on each submittal, the appropriate action, as follows:

a. REVIEWED: Where submittals are marked “Reviewed”, that part of the Work covered by the submittal may proceed provided it complies with requirements of the Contract Documents; final acceptance will depend upon that compliance.
b. REVIEWED, SUBJECT TO COMPLIANCE WITH ATTACHED COMMENTS: Where submittals are marked “Reviewed, Subject to Compliance with Attached Comments”, that part of the Work covered by the submittal may proceed provided it complies with notations or corrections on the submittal and requirements of the Contract Document; final acceptance will depend upon that compliance.

c. REVISE AND RESUBMIT: Where submittals are marked “Revies and Resubmit”, do not proceed with that part of the Work covered by the submittal, including purchasing, fabrication, delivery, or other activity. Revise or prepare a new submittal in accordance with the notations; resubmit without delay. Repeat if necessary to obtain a different action mark.

B. Informational Submittals: Government will review each submittal and will not return it, or will return it if it does not comply with requirements. Government will forward each submittal to appropriate party.

C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Government.

D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.

E. Government will return without review submittals received from sources other than Contractor.

F. Submittals not required by the Contract Documents will be returned by Government without action.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013300

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for quality assurance and quality control.

B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.

1. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
2. Requirements for Contractor to provide quality-assurance and quality-control services required by Government, or authorities having jurisdiction are not limited by provisions of this Section.

1.2 DEFINITIONS

A. Experienced: When used with an entity or individual, "experienced" unless otherwise further described means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

B. Field Quality-Control Tests and Inspections: Tests and inspections that are performed on-site for installation of the Work and for completed Work.

C. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.

1. Use of trade-specific terminology in referring to a Work result does not require that certain construction activities specified apply exclusively to specific trade(s).

D. Mockups: Physical assemblies of portions of the Work constructed to establish the standard by which the Work will be judged. Mockups are not Samples.

1. Mockups are used for one or more of the following:

a. Verify selections made under Sample submittals.
b. Demonstrate aesthetic effects.
c. Demonstrate the qualities of products and workmanship.
d. Demonstrate successful installation of interfaces between components and systems.
e. Perform preconstruction testing to determine system performance.

2. Product Mockups: Mockups that may include multiple products, materials, or systems specified in a single Section.
3. In-Place Mockups: Mockups constructed on-site in their actual final location as part of permanent construction.

E. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria. Unless otherwise indicated, copies of reports of tests or inspections performed for other than the Project do not meet this definition.

F. Product Tests: Tests and inspections that are performed by a nationally recognized testing laboratory (NRTL) in accordance with 29 CFR 1910.7, by a testing agency accredited in accordance with NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.

G. Source Quality-Control Tests and Inspections: Tests and inspections that are performed at the source; for example, plant, mill, factory, or shop.

H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. The term "testing laboratory" has the same meaning as the term "testing agency."

I. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.

J. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Government.

1.3 DELEGATED DESIGN SERVICES

A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Government.

B. Delegated Design Services Statement: Submit a statement, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional, indicating that the products and systems are in compliance with performance and design criteria indicated. Include list of codes, loads, and other factors used in performing these services.

1.4 CONFLICTING REQUIREMENTS

A. Conflicting Standards and Other Requirements: If compliance with two or more standards or requirements is specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, inform the Government regarding the conflict and obtain clarification prior to proceeding with the Work. Refer conflicting requirements that are different, but apparently equal, to Government for clarification before proceeding.

B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified is the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Government for a decision before proceeding.

1.5 ACTION SUBMITTALS

A. Mockup Shop Drawings:

1. Include plans, sections, elevations, and details, indicating materials and size of mockup construction.
2. Indicate manufacturer and model number of individual components.
3. Provide axonometric drawings for conditions difficult to illustrate in two dimensions.

1.6 INFORMATIONAL SUBMITTALS

A. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility submitted to authorities having jurisdiction before starting work on the following systems:

1. Seismic-force-resisting system, designated seismic system, or component listed in the Statement of Special Inspections.
2. Main wind-force-resisting system or a wind-resisting component listed in the Statement of Special Inspections.

B. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.

C. Permits, Licenses, and Certificates: For Government’s record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.7 REPORTS AND DOCUMENTS

A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:

1. Date of issue.
2. Project title and number.
3. Name, address, telephone number, and email address of testing agency.
4. Dates and locations of samples and tests or inspections.
5. Names of individuals making tests and inspections.
6. Description of the Work and test and inspection method.
7. Identification of product and Specification Section.
8. Complete test or inspection data.
9. Test and inspection results and an interpretation of test results.
10. Record of temperature and weather conditions at time of sample taking and testing and inspection.
11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
12. Name and signature of laboratory inspector.
13. Recommendations on retesting and reinspecting.

B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:

1. Statement on condition of substrates and their acceptability for installation of product.
2. Statement that products at Project site comply with requirements.
3. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
4. Results of operational and other tests and a statement of whether observed performance complies with requirements.
5. Other required items indicated in individual Specification Sections.

C. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:

1. Statement that equipment complies with requirements.
2. Results of operational and other tests and a statement of whether observed performance complies with requirements.
3. Other required items indicated in individual Specification Sections.

1.8 QUALITY ASSURANCE

A. Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.

C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.

D. Installer Qualifications: A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.

E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that are similar in material, design, and extent to those indicated for this Project.

F. Testing and Inspecting Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented in accordance with ASTM E329; and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.

G. Manufacturer's Technical Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

H. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect, demonstrate, repair, and perform service on installations of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

I. Preconstruction Testing: Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:

1. Contractor Responsibilities:

   a. Provide test specimens representative of proposed products and construction.
   b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
   c. When testing is complete, remove test specimens and test assemblies, and mockups; do not reuse products on Project.

2. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.

J. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:

1. Build mockups of size indicated.
2. Build mockups in location indicated or, if not indicated, as directed by Government.
3. Notify Government seven days in advance of dates and times when mockups will be constructed.
4. Employ supervisory personnel who will oversee mockup construction. Employ workers that will be employed to perform same tasks during the construction at Project.
5. Demonstrate the proposed range of aesthetic effects and workmanship.
6. Obtain Government approval of mockups before starting corresponding work, fabrication, or construction.

    a. Allow seven days for initial review and each re-review of each mockup.

7. Promptly correct unsatisfactory conditions noted by Government's preliminary review, to the satisfaction of the Government, before completion of final mockup.
8. Approval of mockups by the Government does not constitute approval of deviations from the Contract Documents contained in mockups unless Government specifically approves such deviations in writing.
9. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.

10. Demolish and remove mockups when directed unless otherwise indicated.

1.9 QUALITY CONTROL

A. Contractor Responsibilities: Tests and inspections not explicitly assigned to Government are Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.

1. Engage a qualified testing agency to perform quality-control services.

2. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
3. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
4. Testing and inspection requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
5. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.

B. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.

C. Testing Agency Responsibilities: Cooperate with Government and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.

1. Notify Government, Engineer of Record, and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.

3. Conduct and interpret tests and inspections and state in each report whether tested and inspected Work complies with or deviates from requirements.
4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
6. Do not perform duties of Contractor.

D. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."

E. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.

F. Contractor's Associated Requirements and Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:

1. Access to the Work.
2. Incidental labor and facilities necessary to facilitate tests and inspections.
3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
4. Facilities for storage and field curing of test samples.
5. Preliminary design mix proposed for use for material mixes that require control by testing agency.
6. Security and protection for samples and for testing and inspection equipment at Project site.

G. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.

1. Schedule times for tests, inspections, obtaining samples, and similar activities.

1.10 SPECIAL TESTS AND INSPECTIONS

A. Special Tests and Inspections: Contractor will engage a qualified testing agency special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Government, and as follows:

1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviewing the completeness and adequacy of those procedures to perform the Work.
2. Notifying Government and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.

3. Submitting a certified written report of each test, inspection, and similar quality-control service to Government with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:

1. Date test or inspection was conducted.
2. Description of the Work tested or inspected.
3. Date test or inspection results were transmitted to Government.
4. Identification of testing agency or special inspector conducting test or inspection.

B. Maintain log at Project site. Post changes and revisions as they occur.

1. Submit log at Project closeout as part of Project Record Documents.

3.2 REPAIR AND PROTECTION

A. General: On completion of testing, inspection, sample taking, and similar services, repair damaged construction and restore substrates and finishes.

1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."

B. Protect construction exposed by or for quality-control service activities.

C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.

B. Related Requirements:

1. Section 011000 "Summary" for work restrictions and limitations on utility interruptions.

1.2 DEFINITIONS

A. Landscape Preservation: The term “injury” as such relates to landscape preservation includes, without limitation, bruising, scarring, tearing, and breaking of roots, trunks, or branches. Injury also includes damage to root systems from contractor equipment leaking oil, hydraulic fluid, or other toxic chemicals.

B. Permanent Enclosure: As determined by Government, permanent or temporary roofing is complete, insulated, and weathertight; exterior walls are insulated and weathertight; and all openings are closed with permanent construction or substantial temporary closures.

C. Pesticides: Includes herbicides, insecticides, fungicides, rodenticides, piscicides, avicides, surface disinfectants, animal repellents, and insect repellents.

D. Restricted Area: An area where entry will not be allowed unless authorized by Government.

E. Security Measures: Measures contained in regulations or as may be established by Government and carried out by Federal guard system to provide continuous and effective security of restricted areas.

1.3 USE CHARGES

A. Installation, removal, and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities engaged in the Project to use temporary services and facilities without cost, including, but not limited to, Government's construction forces, Government, occupants of Project, testing agencies, and authorities having jurisdiction.

B. Water and Sewer Service from Existing System: Water from Government's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

C. Electric Power Service from Existing System: Electric power from Government's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

1.4 INFORMATIONAL SUBMITTALS

A. Site Utilization Plan: Show temporary facilities, temporary utility lines and connections, staging areas, construction site entrances, vehicle circulation, and parking areas for construction personnel.

B. Project Identification and Temporary Signs: Show fabrication and installation details, including plans, elevations, details, layouts, typestyles, graphic elements, and message content.

C. Temporary Utilities: Submit implementation and termination schedule for each utility; and tests, inspections, meter readings, and similar procedures performed on temporary utilities.

D. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.

E. Water Pollution Prevention Plan: Submit Water Pollution Prevention Plan to Government not less than 30 days prior to start of onsite construction work. Prepare Pollution Prevention Plan as required by storm water permit for discharges from construction sites.

F. Spill Prevention Control and Countermeasure Plan (SPCC): Submit SPCC Plan where location of construction site is such that oil from accidental spillage could reasonably be expected to enter into or upon navigable waters of United States or adjoining shorelines, and aggregate storage of oil at site is over 1,320 gallons or single container has capacity in excess of 660 gallons. Submit SPCC Plan to Government at least 30 days prior to delivery or storage of oil at site. Plan shall have been reviewed and certified by registered professional engineer in accordance with 40 CFR, part 112, as required by section 311 of the Clean Water Act (Public Law 92-500 as amended).

G. Traffic Control Plan:

1. Requirements for specific signs, signals, channelizing and lighting devices, barricades, and flag persons in accordance with AASHTO Manual on Uniform Traffic Control Devices.
2. Provide unobstructed passageway for one lines of traffic at all times on smooth and dustless lanes through construction operations.
3. Provide guards to ensure against accidents and avoid damage or injury to passing traffic in areas where nature of construction operations in progress and equipment and machinery in use pose a hazard.

H. Recordkeeping: Submit records kept as required of EPA Clean Water Act, Section 402 permittee, as stated in Section 402 permit, which may include sampling, site inspections, or laboratory tests and results.

I. Monitoring Tests Results: Submit monitoring results reports of effluents to Government two weeks prior to submittal deadline to appropriate State and Environmental Protection Agency (EPA) Regional Administrator.

J. First Aid Plans: Submit plans and facilities for providing medical attention for injured or disabled employees, including onsite emergency facilities and ambulance service, before start of operations. Submit physician's written report of inspection of first-aid station facilities.

1.5 QUALITY ASSURANCE

A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.

B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

C. Standards: Comply with NFPA 241 "Standard for Safeguarding Construction, Alterations, and Demolition Operations," ANSI A10 Series standards for "Safety Requirements for Construction and Demolition," and NECA Electrical Design Library "Temporary Electrical Facilities."

D. Comply with AASHTO Manual on Uniform Traffic Control Devices (MUTCD), Part VI.

E. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

F. Horticulturist or Tree Surgeon: Employ services of experienced horticulturist or licensed tree surgeon to direct repair, treatment, and replacement of vegetation.

G. Accessible Temporary Egress: Comply with applicable provisions in the United States Access Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

1.6 REGULATORY REQUIREMENTS

A. Comply with applicable local regulations for haul routes over public highways, roads, or bridges. Comply with industry standards and applicable laws and regulations of authorities having jurisdiction including following:

1. Building code requirements.
2. Health and safety regulations.
3. Utility company regulations.
4. Police, fire department, and rescue squad rules.
5. Environmental protection regulations.
6. Prevention and control of air pollution.
7. Prevention and control of water pollution.
8. Pesticides. Use pesticides registered with Environmental Protection Agency (EPA) in compliance with EPA FIFRA, or with State or local agencies. Conform to most stringent requirement in cases of conflict between specifications, and regulatory requirements. Contractor shall be responsible for damages resulting from use of pesticides.

1.7 PROJECT CONDITIONS

A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Government's acceptance, regardless of previously assigned responsibilities.

B. Explosives: Use will not be permitted, unless otherwise specified when using explosives to prevent scattering rocks, stumps, or other debris outside the work area.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Temporary materials may be new or used, but must be adequate in capacity for the required usage, must not create unsafe conditions, and must not violate requirements of applicable codes and standards.

B. Pavement: Comply with Division 32 pavement Sections.

C. Chain-Link Fencing: Comply with Division 32 fence Sections.

D. Portable Chain-Link Fencing: Minimum 2-inch, 9-gage, galvanized steel, chain-link fabric fencing; minimum 6 feet high with galvanized steel pipe posts; minimum 2-3/8-inch OD line posts and 2-7/8-inch OD corner and pull posts, with 1-5/8-inch OD top and bottom rails. Provide concrete bases for supporting posts.

E. Safety Barrier Fence: Orange plastic fence, minimum height, 4 feet.

F. Barrier Tape: Yellow tape Imprinted with "CAUTION: CONSTRUCTION AREA", manufactured by Reef Industries, Inc., Houston, Texas, or approved equal.

2.2 TEMPORARY FACILITIES

A. Field Offices: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.

B. Tarpaulins: Waterproof, fire-resistant, UL-labeled tarpaulins with flame-spread rating of 15 or less. Provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins for temporary enclosures.

C. Water: Provide potable water approved by local health authorities.

2.3 EQUIPMENT

A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

B. HVAC Equipment: Unless Government authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.

1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.

2. Heating, Cooling, and Dehumidifying Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.
3. Permanent HVAC System: If Government authorizes use of permanent HVAC system for temporary use during construction, provide filter with MERV of 8 at each return-air grille in system and remove at end of construction.

C. Air-Filtration Units: Primary and secondary HEPA-filter-equipped portable units with four-stage filtration. Provide single switch for emergency shutoff. Configure to run continuously.

PART 3 - EXECUTION

3.1 TEMPORARY FACILITIES, GENERAL

A. Conservation: Coordinate construction and use of temporary facilities with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.

1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Government's property.

3.2 INSTALLATION, GENERAL

A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.

B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

C. Isolation of Work Areas in Occupied Facilities: Prevent dust, fumes, and odors from entering occupied areas.

3.3 TEMPORARY UTILITY INSTALLATION

A. General: Electrical power, water are available on the site and will be provided by the Government to the Contractor. Install temporary service or connect to existing service.

1. Arrange with utility company, Government, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.

B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.

1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.

C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.

D. Existing Water Service: Use of Government existing water service facilities will be permitted, as long as facilities are cleaned and maintained in a condition acceptable to Government. At Substantial Completion, restore these facilities to condition existing before initial use.

1. Where installations below an outlet might be damaged by spillage or leakage, provide a drip pan of suitable size to minimize water damage. Drain accumulated water promptly from pans.

E. Sanitary Facilities: Provide temporary toilets, wash facilities, safety shower and eyewash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.

1. Toilets: Use of Government existing toilet facilities will not be permitted.
2. Install self-contained toilet units, shield toilets to ensure privacy. Use of pit-type privies will not be permitted.
3. Provide separate facilities for male and female personnel.
4. Provide toilet tissue, paper towels, paper cups, and similar disposable materials for each facility. Provide covered waste containers for used material.

F. Temporary Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.

G. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.

H. Isolation of Work Areas in Occupied Facilities: Prevent dust, fumes, and odors from entering occupied areas.

I. Electric Power Service: Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.

1. Install electric power service underground unless otherwise indicated.
2. No electrical materials which are part of the permanent electrical system may be used for temporary electrical installations unless approved in writing by Government.
3. Provide weatherproof, grounded electric power service and distribution system of sufficient size, capacity, and power characteristics during construction period.
4. Include meters, transformers, overload-protected disconnects, automatic ground-fault interrupters, and main distribution switch gear.
5. When temporary connections are removed, restore existing utility services to original condition.
6. Connect temporary service to Government existing power source, as directed by Government.

7. Power Distribution System: Install wiring overhead and rise vertically where least exposed to damage. Where permitted, wiring circuits not exceeding 125 volts AC 20 ampere rating, and lighting circuits may be nonmetallic sheathed cable where overhead and exposed for surveillance.

J. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.

1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.

K. Telephone Service: Provide temporary telephone service in common-use facilities for use by all construction personnel. Install WiFi cell phone access equipment and one land-based telephone line(s) for each field office.

1. Post a list of important telephone numbers including police and fire departments, Contractor's home office, Government's office, and Principal subcontractors' field and home offices.
2. Provide superintendent with cellular telephone or portable two-way radio for use when away from field office.

L. Electronic Communication Service: Provide secure WiFi wireless connection to internet with provisions for access by Government and Government.

3.4 SUPPORT FACILITIES INSTALLATION

A. Comply with the following:

1. Provide construction for temporary field offices, shops, and sheds located within construction area or within 30 feet of building lines that is noncombustible according to ASTM E136. Comply with NFPA 241.
2. Utilize designated area within existing building for temporary field offices.
3. Maintain support facilities until Government schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Government.

B. Temporary Roads and Paved Areas: Construct and maintain temporary roads and paved areas adequate for construction operations.

C. Temporary Roads and Paved Areas: Rights-of-way for access to work from existing roads will be established by Government. Construct and maintain temporary roads and paved areas adequate for construction operations. Locate temporary roads and paved areas in same location as permanent roads and paved areas. Extend temporary roads and paved areas, within construction limits indicated, as necessary for construction operations. Use only established roadways, areas, and haul routes, or temporary roadways, areas, or haul routes constructed by Contractor when and as authorized by Government.

D. Traffic Controls: Provide, erect, and maintain traffic control devices, including traffic cones, delineators, concrete safety barriers, barricades, suitable and sufficient flasher lights, flag

persons, danger signals, and signs, as required by State and local authorities having jurisdiction. Take precautions for protection of work and safety of public on roads affected by work during contract period as construction work proceeds. Do not start construction work along public or private roads until proper traffic control devices for warning, channeling, and providing safety for motorists are in place at construction site. Comply with requirements of authorities having jurisdiction.

1. Protect existing site improvements to remain including curbs, pavement, and utilities.
2. Maintain access for fire-fighting equipment and access to fire hydrants.
3. Maintain flow of public traffic and conduct operations for construction of roadways so as to offer least possible obstruction and inconvenience to public traffic.
4. Protect roads closed to traffic with effective barricades having acceptable warning and detour signs.
5. Conduct operation in manner that will not close any thoroughfare or interfere with traffic except with written permission of Government.
6. Illuminate barricades and obstructions at night, and keep lights burning from sunset until sunrise.
7. Erect additional warning and directional signs in connection with work as may be required by Government. Requiring additional signs by Government does not relieve Contractor from responsibility for protection of work and for public safety.
8. Maintain condition, operation, and effectiveness of traffic control devices throughout period of use. Remove temporary traffic control devices when no longer needed.

E. Parking: Provide temporary offsite parking areas for construction personnel.

F. Storage and Staging: Use designated areas of Project site for storage and staging needs.

G. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.

1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
2. Remove snow and ice as required to minimize accumulations.

H. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.

1. Identification Signs: Provide Project identification signs as indicated on Drawings.
2. Temporary Signs: Provide other signs as required to inform public and individuals seeking entrance to Project.

    a. Provide temporary, directional signs for construction personnel and visitors.

3. Maintain and touch up signs so they are legible at all times.

I. Waste Disposal Facilities: Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

J. Safety Facilities: Provide safety showers, eyewash fountains, and similar facilities for safety and sanitation of personnel.

K. First-Aid Facilities: Make first-aid facilities and services obvious and available for providing emergency aid to personnel on the site.

3.5 HAUL ROUTES, ROADWAYS, AND STORAGE/STAGING AREAS

A. Investigate condition of available public or private roads for clearances, restrictions, bridge-load limits, bond requirements, and other limitations that affect or may affect access and transportation operations to and from jobsite.

B. Established Roadways As Haul Routes: Use existing available Public highways, roads, or bridges as haul routes subject to applicable local regulations and approval of Government. Tracked or heavy vehicles will not be allowed. Repair damage caused by construction traffic.

1. Provide and use means of removing mud from vehicle tires before entering existing paved roads. Repair and cleanup roadways.
2. Provide barricades, flag persons, lighting, signs, and other necessary precautions for safety of public where haul routes cross public highways or roads.

C. Temporary Roadways and Haul Routes: Construct and maintain temporary roadways, bridges, culverts, and drainage structures required for access from public thoroughfares to serve construction area, of width and load-bearing capacity to provide unimpeded traffic for construction purposes and to allow unimpeded surface drainage.

1. Temporary roadways and detours may be constructed, as approved by Government.

D. Storage/Staging Areas: Construct temporary area for trailers, equipment, and materials, located as approved by Government. Fencing of materials or equipment shall not be required at this site. Trailers, materials, or equipment shall not be placed or stored outside fenced area unless trailers, materials, or equipment are assigned separate and distinct storage area by Government away from vicinity of construction site but within Government property boundaries.

E. Maintenance: Maintain haul routes, roadways, parking and storage areas, in sound, smooth condition. Maintain roadbed, side slopes, structures, and surfacing of roads and areas until completion and acceptance of Work. Maintain surfacing of gravel-surfaced roads and areas in a smooth condition until completion and acceptance of Work. Snow removal for convenience of Contractor or to facilitate work operations shall be considered normal required maintenance.

F. Repair: Promptly repair ruts, broken pavement, potholes, low areas with standing water, and other deficiencies to maintain road and parking area surfaces and drainage in original or specified condition.

G. Removal: Remove materials used to construct temporary roadways, areas, and haul routes prior to Contract completion. Recycle salvageable materials. Remove temporary underground work and compacted materials to depth of 2 feet, fill and re-grade site as necessary.

3.6 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.

1. Where access to adjacent properties is required in order to affect protection of existing facilities, obtain written permission from adjacent property government to access property for that purpose.

B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.

C. Temporary Erosion and Sedimentation Control: Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to undisturbed areas and to adjacent properties and walkways, according to requirements of EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.

1. Verify that flows of water redirected from construction areas or generated by construction activity do not enter or cross tree- or plant-protection zones.
2. Inspect, repair, and maintain erosion- and sedimentation-control measures during construction until permanent vegetation has been established.
3. Clean, repair, and restore adjoining properties and roads affected by erosion and sedimentation from Project site during the course of Project.
4. Remove erosion and sedimentation controls and restore and stabilize areas disturbed during removal.

D. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.

E. Vegetation Control: Provide vegetation control, including need and methods of control, as directed by Government.

F. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using materials approved by authorities having jurisdiction.

G. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people from easily entering site except by entrance gates.

1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.
2. Maintain security by limiting number of keys and restricting distribution to authorized personnel.

H. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each workday.

1. Install substantial temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security.
2. Protect site, materials, and operations from theft, vandalism, and unauthorized entry. Initiate program in coordination with Government's existing program at project site. Maintain program throughout construction period until Government acceptance.
3. Entry Control: Restrict entrance of persons and vehicles into project site and existing facilities Restricted areas are designated and may be modified or changed by Government. Allow entrance only to authorized persons with proper identification.

    a. Maintain log of workers and visitors, make available on request.
    b. Construction personnel will not be permitted to enter established or designated restricted areas unless so authorized by Government. Ensure by appropriate and effective means that Contractor personnel shall not enter designated areas unless authorized.

I. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.

1. Construct fence, barricade, or otherwise block off immediate work area to prevent unauthorized entry.
2. Illuminate barricades and obstructions at night; keep safety lights burning from sunset to sunrise.
3. Adequately barricade and post open cuts in or adjacent to thoroughfares.
4. Protect pedestrian traffic with guardrails or fences.
5. When pedestrian traffic is detoured onto a roadway, provide temporary walkways. Provide ramps at changes in elevation of walkways.
6. Cover pipes, hoses, and power lines crossing sidewalks and walkways with troughs using beveled edge boards.

J. Temporary Egress: Provide temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction. Provide signage directing occupants to temporary egress.

K. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.

1. Where heating or cooling is needed and permanent enclosure is incomplete, insulate temporary enclosures.

L. Temporary Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Government from fumes and noise.

1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant-treated plywood on construction operations side.

2. Where fire-resistance-rated temporary partitions are indicated or are required by authorities having jurisdiction, construct partitions according to the rated assemblies.
3. Construct dustproof partitions with 2 layers of 3-milpolyethylene sheet on each side. Cover floor with 2 layers of 3-milpolyethylene sheet, extending sheets 18 inches up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant plywood.

    a. Construct vestibule and airlock at each entrance through temporary partition with not less than 48 inches between doors. Maintain water-dampened foot mats in vestibule.

4. Insulate partitions to provide noise protection to occupied areas.
5. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
6. Protect air-handling equipment.
7. Weather strip openings.
8. Provide walk-off mats at each entrance through temporary partition.

M. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Prohibit smoking in construction areas. Comply with additional limits on smoking specified in other Sections.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.

3.7 WATER POLLUTION CONTROL

A. Contractor Water Pollution Violations: If noncompliance should occur, report noncompliance to Government immediately (orally), with specific information submitted in writing within two calendar days. Consistent violations of applicable Federal, State, or local laws, orders, regulations, or Water Quality Standards may result in Government stopping site activity until compliance is ensured. Contractor shall not be entitled to extensions of time, claims for damage, or additional compensation by reason of such work stoppages. Corrective measures required to bring activities into compliance shall be at Contractor's expense.

B. Stormwater Discharge Permit Associated with Construction Site:

1. Notice of Intent: Government and Contractor shall sign Notice of Intent (NOI) to obtain coverage under stormwater general permit to control stormwater discharges from construction site as required under Section 402 of Clean Water Act (Public Law 92-500, as amended).
2. Pollution Prevention Plan: Contractor shall prepare Pollution Prevention Plan as required by permit. Contractor shall comply with terms and conditions to obtain and maintain stormwater discharge permit.

3. Monitoring and Water Treatment: Provide monitoring and water treatment to achieve compliance with applicable Water Quality Standards, and provide recordkeeping required by stormwater discharge permit associated with construction activity.

C. Pollution Controls: Control pollutants by use of sediment and erosion controls, wastewater and stormwater management controls, construction site management practices, and other controls including State and local control requirements.

1. Sediment and Erosion Controls: Establish methods for controlling sediment and erosion which address vegetative practices, structural control, silt fences, straw dikes, sediment controls, and operator controls as appropriate. Institute stormwater management measures as required, including velocity dissipators, and solid waste controls which address controls for building materials and offsite tracking of sediment.
2. Wastewater and Stormwater Management Controls: Use methods of dewatering, unwatering, excavating, or stockpiling earth and rock materials which include prevention measures to control silting and erosion, and which will intercept and settle runoff of sediment-ladened waters. Prevent wastewater from general construction activities such as drainwater collection, aggregate processing concrete batching, drilling grouting, or other construction operations, from entering flowing or dry watercourses without use of approved turbidity control methods. Divert stormwater runoff from upslope areas away from disturbed areas.

    a. Turbidity prevention measures: Use methods for prevention of excess turbidity which include, but are not restricted to, intercepting ditches, settling ponds, gravel filter entrapment dikes, flocculating processes, recirculation, combinations thereof, or other approved methods that are not harmful to aquatic life. Wastewaters discharged into surface waters shall contain least concentration of settleable material possible and shall meet conditions of Section 402, the National Pollutant Discharge Elimination System (NPDES) permit. Do not operate mechanized equipment in waterbodies without having first obtained Section 404 permit, and then only as necessary to construct crossings or perform required construction.

3. Construction Site Management: Perform construction activities by methods that will prevent entrance, or accidental spillage, of solid matter, contaminants, debris, or other pollutants or wastes into streams, flowing or dry watercourses, lakes, wetlands, reservoirs, or underground water sources. Such pollutants and wastes include: refuse, garbage, cement, sanitary waste, industrial waste, hazardous materials, radioactive substances, oil and other petroleum products, aggregate processing tailings, mineral salts, and thermal pollution.

    a. Do not stockpile or deposit excavated materials or other construction materials, near or on, stream banks, lake shorelines, or other watercourse perimeters where they can be washed away by high water or storm runoff, or can in any way encroach upon watercourse.
    b. Place oil or other petroleum product (hereinafter referred to collectively as oil) storage tanks at least 20 feet from streams, flowing or dry watercourses, lakes, wetlands, reservoirs, and any other water source.
    c. Diked storage areas shall be at least 12 inches high or graded and sloped to permit safe containment of leaks and spills equal to capacity of tanks and/or containers located in each area plus sufficient amount of freeboard to contain 25-year rainstorm.

d. Provide diked areas with impermeable barrier at least 10 mils thick. Provide areas used for refueling operations with impermeable liner at least 10 mils thick buried under 2 to 4 inches of soil.
e. Do not use underground storage tanks.

3.8 NOISE CONTROL

A. Requirements: Do not exceed noise levels of 85 decibels (nighttime) and 120 decibels (daytime), as measured from noise-sensitive areas such as residences and schools.

B. Restricted Activities: Only construction activities approved by Government will be allowed during hours of 6:00 p.m. to 7:00 a.m. It is anticipated that noise barriers and equipment mufflers will be required. Blasting, drilling, jackhammering, pile driving, or other operations producing high-intensity impact noise may be performed at nighttime only with prior approval of Government.

3.9 LIGHT CONTROL

A. Provide light control during construction. Direct stationary floodlights to shine downward at an angle less than horizontal.

1. Shield floodlights so that floodlights will not be nuisance to surrounding areas.
2. Direct lighting so that residences are not in direct beam of light.
3. Correct lighting control problems when they occur as approved by Government.

3.10 OPERATION, TERMINATION, AND REMOVAL

A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.

B. Maintenance: Maintain facilities in good operating condition until removal.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.

D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are property of Contractor. Government reserves right to take possession of Project identification signs.

2. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.2 ACTION SUBMITTALS

A. Comparable Product Request Submittal: Submit request for consideration of each comparable product. Identify basis-of-design product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.

1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
2. Government's Action: If necessary, Government will request additional information or documentation for evaluation within seven days of receipt of a comparable product request. Government will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.

a. Form of Government's Approval of Submittal: As specified in Section 013300 "Submittal Procedures."
b. Use product specified if Government does not issue a decision on use of a comparable product request within time allocated.

B. Basis-of-Design Product Specification Submittal: Comply with requirements in Section 013300 "Submittal Procedures." Show compliance with requirements.

1.3 DEFINITIONS

A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.

1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
3. Comparable Product: Product that is demonstrated and approved by Government through submittal process to have the indicated qualities related to type, function, dimension, in-

service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.

B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. In addition to the basis-of-design product description, product attributes and characteristics may be listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification.

1.4 QUALITY ASSURANCE

A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

C. Storage:

1. Store products to allow for inspection and measurement of quantity or counting of units.
2. Store materials in a manner that will not endanger Project structure.
3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
6. Protect stored products from damage and liquids from freezing.

1.6 PRODUCT WARRANTIES

A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.

1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Government.
2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Government.

B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.

1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
3. See other Sections for specific content requirements and particular requirements for submitting special warranties.

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.

1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
3. Government reserves the right to limit selection to products with warranties meeting requirements of the Contract Documents.
4. Where products are accompanied by the term "as selected," Government will make selection.
5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.

B. Product Selection Procedures:

1. Non-Limited List of Products: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed product, which complies with requirements.

a. Non-limited list of products is indicated by the phrase: "Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to, the following: …"

2. Non-Limited List of Manufacturers: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, which complies with requirements.

a. Non-limited list of manufacturers is indicated by the phrase: "Subject to compliance with requirements, available manufacturers whose products may be incorporated in the Work include, but are not limited to, the following: …"

3. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.

C. Visual Matching Specification: Where Specifications require "match Government's sample," provide a product that complies with requirements and matches Government's sample. Government's decision will be final on whether a proposed product matches.

D. Visual Selection Specification: Where Specifications include the phrase "as selected by Government from manufacturer's full range" or similar phrase, select a product that complies with requirements. Government will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

A. Conditions for Consideration of Comparable Products: Government will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Government may return requests without action, except to record noncompliance with these requirements:

1. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant product qualities include attributes such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
2. Evidence that proposed product provides specified warranty.
3. List of similar installations for completed projects with project names and addresses and names and addresses of Government, if requested.
4. Samples, if requested.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 – EXECUTION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes general administrative and procedural requirements governing execution of the Work, including, but not limited to, the following:

1. Construction layout.
2. Field engineering and surveying.
3. Installation of the Work.
4. Cutting and patching.
5. Coordination of Government's portion of the Work.
6. Coordination of Government-installed products.
7. Progress cleaning.
8. Starting and adjusting.
9. Protection of installed construction.

B. Related Requirements:

1. Section 011000 "Summary" for coordination of Government-furnished products, and limits on use of Project site.
2. Section 017700 "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Government-accepted deviations from indicated lines and levels, replacing defective work, and final cleaning.
3. Section 024116 "Structure Demolition" for demolition and removal of selected portions of the building.

1.2 DEFINITIONS

A. Cutting: Removal of in-place construction necessary to permit installation or performance of subsequent work.

B. Patching: Fitting and repair work required to restore construction to original conditions after installation of subsequent work.

1.3 QUALITY ASSURANCE

A. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.

1. Structural Elements: When cutting and patching structural elements, or when encountering the need for cutting and patching of elements whose structural function is not known, notify Government of locations and details of cutting and await directions from Government before proceeding. Shore, brace, and support structural elements

during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection.

2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.
3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety.
4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Government's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

B. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of specified products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Comply with requirements specified in other Sections.

1. For projects requiring compliance with sustainable design and construction practices and procedures, use products for patching that comply with sustainable design requirements.

B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.

1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Government for the visual and functional performance of in-place materials. Use materials that are not considered hazardous.

C. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.

1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, gas service piping, and water-service piping; underground electrical services; and other utilities.
2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.

B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.

1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.

C. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:

1. Description of the Work, including Specification Section number and paragraph, and Drawing sheet number and detail, where applicable.
2. List of detrimental conditions, including substrates.
3. List of unacceptable installation tolerances.
4. Recommended corrections.

D. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Existing Utility Information: Furnish information to local utility that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.

B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Government in accordance with requirements in Section 013100 "Project Management and Coordination."

3.3 INSTALLATION

A. Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.

1. Make vertical work plumb, and make horizontal work level.
2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
4. Maintain minimum headroom clearance of 96 inches in occupied spaces and 90 inches in unoccupied spaces, unless otherwise indicated on Drawings.

B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.

C. Install products at the time and under conditions that will ensure satisfactory results as judged by Government. Maintain conditions required for product performance until Substantial Completion.

D. Conduct construction operations, so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy of type expected for Project.

E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on-site and placement in permanent locations.

F. Tools and Equipment: Select tools or equipment that minimize production of excessive noise levels.

G. Templates: Obtain and distribute to the parties involved templates for Work specified to be factory prepared and field installed. Check Shop Drawings of other portions of the Work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.

H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions with manufacturer.

1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Government.
2. Allow for building movement, including thermal expansion and contraction.
3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

I. Joints: Make joints of uniform width. Where joint locations in exposed Work are not indicated, arrange joints for the best visual effect, as judged by Government. Fit exposed connections together to form hairline joints.

J. Repair or remove and replace damaged, defective, or nonconforming Work.

1. Comply with Section 017700 "Closeout Procedures" for repairing or removing and replacing defective Work.

3.4 CUTTING AND PATCHING

A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.

1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.

B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.

C. Temporary Support: Provide temporary support of Work to be cut.

D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.

E. Adjacent Occupied Areas: Where interference with use of adjoining areas or interruption of free passage to adjoining areas is unavoidable, coordinate cutting and patching in accordance with requirements in Section 011000 "Summary."

F. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to minimize interruption to occupied areas.

G. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.

1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
6. Proceed with patching after construction operations requiring cutting are complete.

H. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as practicable, as judged by Government. Provide materials and comply with installation requirements specified in other Sections, where applicable.

1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.

    a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
    b. Restore damaged pipe covering to its original condition.

3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.

    a. Where patching occurs in a painted surface, prepare substrate and apply primer and intermediate paint coats appropriate for substrate over the patch, and apply final paint coat over entire unbroken surface containing the patch, corner to corner of wall and edge to edge of ceiling. Provide additional coats until patch blends with adjacent surfaces.

4. Ceilings: Patch, repair, or rehang in-place ceilings as necessary to provide an even-plane surface of uniform appearance.
5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.

I. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.5 COORDINATION OF GOVERNMENT'S PORTION OF THE WORK

A. Site Access: Provide access to Project site for Government's construction personnel and Government's separate contractors.

1. Provide temporary facilities required for Government-furnished, Contractor-installed products.
2. Refer to Section 011000 "Summary" for other requirements for Government-furnished, Contractor-installed products

B. Coordination: Coordinate construction and operations of the Work with work performed by Government's construction personnel and Government's separate contractors.

1. Construction Schedule: Inform Government of Contractor's preferred construction schedule for Government's portion of the Work. Adjust construction schedule based on a

mutually agreeable timetable. Notify Government if changes to schedule are required due to differences in actual construction progress.

3.6 PROGRESS CLEANING

A. Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.

1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.

    a. Use containers intended for holding waste materials of type to be stored.

4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.

B. Site: Maintain Project site free of waste materials and debris.

C. Work Areas: Clean areas where Work is in progress to the level of cleanliness necessary for proper execution of the Work.

1. Remove liquid spills promptly.
2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.

D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.

E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.

F. Exposed Surfaces: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.

G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Section 017419 "Construction Waste Management and Disposal."

H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.

I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.

J. Limiting Exposures: Supervise construction operations to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.7 STARTING AND ADJUSTING

A. Coordinate startup and adjusting of equipment and operating components with requirements in Section 019113 "General Commissioning Requirements."

B. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.

C. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.

D. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

E. Manufacturer's Field Service: Comply with qualification requirements in Section 014000 "Quality Requirements."

3.8 PROTECTION AND REPAIR OF INSTALLED CONSTRUCTION

A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.

B. Repair Work previously completed and subsequently damaged during construction period. Repair to like-new condition.

C. Protection of Existing Items: Provide protection and ensure that existing items to remain undisturbed by construction are maintained in condition that existed at commencement of the Work.

D. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION 017300

SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for the following:

1. Salvaging nonhazardous demolition and construction waste.
2. Recycling nonhazardous demolition and construction waste.
3. Disposing of nonhazardous demolition and construction waste.

1.2 DEFINITIONS

A. Construction Waste: Building, structure, and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.

B. Debris: Non-hazardous solid waste generated during construction, demolition, or renovation of a structure which exceeds 2.5 inch particle size that is: a manufactured object; plant or animal matter; or natural geologic material (e.g. cobbles and boulders). A mixture of debris and other material such as soil or sludge is also subject to regulation as debris if the mixture is comprised primarily of debris by volume, based on visual inspection.

C. Demolition Waste: Building, structure, and site improvement materials resulting from demolition operations.

D. Disposal: Removal of demolition or construction waste and subsequent salvage, sale, recycling, or deposit in landfill, incinerator acceptable to authorities having jurisdiction, or designated spoil areas on Government's property.

E. Environmental Pollution and Damage: Presence of chemical, physical, or biological elements or agents which adversely affect human health or welfare; unfavorably alter ecological balances; or degrade the utility of the environment for aesthetic, cultural, or historical purposes.

F. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

G. Hazardous Materials: Material that is regulated as a hazardous material in accordance with 49 CFR 173, requires a Material Safety Data Sheet (MSDS) in accordance with 29 CFR 1910.1200, or which during end use, treatment, handling, storage, transportation or disposal meets or has components which meet or have the potential to meet the definition of a Hazardous Waste in accordance with 40 CFR 261.

H. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.

I. Salvage: Recovery of demolition or construction waste and subsequent sale or reuse in another facility.

J. Salvage and Reuse: Recovery of demolition or construction waste and subsequent incorporation into the Work.

K. Solid Waste: Garbage, debris, sludge, or other discharged material (except hazardous waste) including solid, liquid, semisolid, or contained gaseous materials resulting from domestic, industrial, commercial, mining, or agricultural operations.

1.3 PERFORMANCE GOALS

A. Develop waste management plan that results in end-of-Project rates for salvage/recycling of 50 percent by weight of total waste generated by the Work.

B. Salvage/Recycle Goals: Government goal is to salvage and recycle as much nonhazardous demolition and construction waste as possible including the following materials:

1.4 ACTION SUBMITTALS

A. Waste Management Plan: Submit plan within 7 days of date established for commencement of the Work.

1.5 INFORMATIONAL SUBMITTALS

A. Waste Management Plan: After award of contract and prior to scheduled Pre-Construction Conference, submit draft Waste Management Plan to Government for approval. Submit 3 copies of plan within 7 days of date established for commencement of the Work.

B. Waste Reduction Progress Reports: Concurrent with each Application for Payment, submit report. Include the following information:

1. Material category.
2. Generation point of waste.
3. Total quantity of waste in tons.
4. Quantity of waste salvaged, both estimated and actual in tons.
5. Quantity of waste recycled, both estimated and actual in tons.
6. Total quantity of waste recovered (salvaged plus recycled) in tons.
7. Total quantity of waste recovered (salvaged plus recycled) as a percentage of total waste.

C. Waste Reduction Calculations: Before request for Substantial Completion, submit calculated end-of-Project rates for salvage, recycling, and disposal as a percentage of total waste generated by the Work.

D. Records of Donations: Indicate receipt and acceptance of salvageable waste donated to individuals and organizations. Indicate whether organization is tax exempt.

E. Records of Sales: Indicate receipt and acceptance of salvageable waste sold to individuals and organizations. Indicate whether organization is tax exempt.

F. Recycling and Processing Facility Records: Indicate receipt and acceptance of recyclable waste by recycling and processing facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.

G. Landfill and Incinerator Disposal Records: Indicate receipt and acceptance of waste by landfills and incinerator facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.

H. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.6 QUALITY ASSURANCE

A. Waste Management Coordinator Qualifications: Experienced firm, or individual employed and assigned by General Contractor, with a record of successful waste management coordination of projects with similar requirements.

B. Refrigerant Recovery Technician Qualifications: Comply with requirements in Section 024116 "Structure Demolition."

C. Waste Management Conference(s): Conduct conference(s) at Project site to comply with requirements in Section 013100 "Project Management and Coordination."

D. Waste Management Conference: Conduct conference at Project site. " Review methods and procedures related to waste management including, but not limited to:

1. Discuss waste management plan including responsibilities of Waste Management Coordinator.
2. Requirements for documenting quantities of each type of waste and its disposition.
3. Finalize procedures for materials separation and verify availability of containers and bins needed to avoid delays.
4. Procedures for periodic waste collection and transportation to recycling and disposal facilities.
5. Waste management requirements for each trade.

1.7 WASTE MANAGEMENT PLAN

A. General: Develop a waste management plan according to requirements in this Section. Plan shall consist of waste identification, waste reduction work plan, and cost/revenue analysis. Distinguish between demolition and construction waste. Indicate quantities by weight or volume, but use same units of measure throughout waste management plan.

B. Waste Identification: Indicate anticipated types and quantities of demolition, site-clearing, and construction waste generated by the Work. Include estimated quantities and assumptions for estimates.

C. Waste Reduction Work Plan: List each type of waste and whether it will be salvaged, recycled, or disposed of in landfill or incinerator. Include points of waste generation, total quantity of each type of waste, quantity for each means of recovery, and handling and transportation procedures.

1. Salvaged Materials for Reuse: For materials that will be salvaged and reused in this Project, describe methods for preparing salvaged materials before incorporation into the Work.
2. Salvaged Materials for Sale: For materials that will be sold to individuals and organizations, include list of their names, addresses, and telephone numbers.
3. Salvaged Materials for Donation: For materials that will be donated to individuals and organizations, include list of their names, addresses, and telephone numbers.
4. Recycled Materials: Include list of local receivers and processors and type of recycled materials each will accept. Include names, addresses, and telephone numbers.
5. Disposed Materials: Indicate how and where materials will be disposed of. Include name, address, and telephone number of each landfill and incinerator facility.
6. Handling and Transportation Procedures: Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location where materials separation will be performed.

D. Forms: Prepare waste management plan on forms included at end of Part 3. Cost/Revenue Analysis: Indicate total cost of waste disposal as if there was no waste management plan and net additional cost or net savings resulting from implementing waste management plan; include:

1. Landfill tip fees/ton.
2. If diverted, tip fee savings from landfill diversion.
3. Costs of recycling, salvage, or reuse.
4. Revenue from recycling, salvage, or reuse.
5. Total cost or savings from diversion (calculate by using tip fee savings and subtracting costs of recycling or adding revenue from recycling).

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General: Achieve end-of-Project rates for salvage/recycling of 50 percent by weight of total nonhazardous solid waste generated by the Work. Facilitate recycling and salvage of materials.

PART 3 - EXECUTION

3.1 PLAN IMPLEMENTATION

A. General: Implement approved waste management plan. Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.

1. Establish contacts with local recycling and reuse companies to set up lines of responsibility.
2. Be responsible for coordination in terms of identifying materials, pickup schedules, and standard quality for recycled materials.

B. Waste Management Coordinator: Engage a waste management coordinator to be responsible for implementing, monitoring, and reporting status of waste management work plan.

C. Training: Train workers, subcontractors, and suppliers on proper waste management procedures, as appropriate for the Work.

1. Distribute waste management plan to everyone concerned within three days of submittal return.
2. Distribute waste management plan to entities when they first begin work on-site. Review plan procedures and locations established for salvage, recycling, and disposal.

D. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged and recycled.
2. Comply with Section 015000 "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

E. Separation Facilities:

1. Designate specific area or areas to facilitate separation of materials for potential reuse, salvage, recycling, and return; subject to Government's approval.
2. Place waste and recycling bins near each other and close to point of waste generation but out of the traffic pattern.
3. Keep recycling and waste bin areas neat and clean and clearly marked in order to avoid co-mingling of materials.
4. Protect bins during non-working hours from off-site contamination.
5. Check garbage dumpsters periodically to monitor recyclables being thrown away or if there are undocumented materials that could be recycled.

F. Materials Handling Procedures: Protect materials to be recycled from contamination. Handle, store, and transport in a manner that meets requirements set by the designated facilities for acceptance. Establish defined area for operations of each trade, especially woodcutting so that off-cuts will be kept in one area and can be sorted by dimension for future reuse.

G. Waste Management in Historic Zones or Areas: Transportation equipment and other materials shall be of sizes that clear surfaces within historic spaces, areas, rooms, and openings, by 12 inches or more.

3.2 SALVAGING DEMOLITION WASTE

A. Comply with requirements in Section 024116 "Structure Demolition" for salvaging demolition waste.

B. Salvaged Items for Reuse in the Work:

1. Clean salvaged items.
2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until installation.
4. Protect items from damage during transport and storage.
5. Install salvaged items to comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make items functional for use indicated.

C. Salvaged Items for Sale and Donation: Not permitted on Project site.

D. Salvaged Items for Government's Use:

1. Clean salvaged items.
2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until delivery to Government.
4. Transport items to Government's storage area designated by Government.
5. Protect items from damage during transport and storage.

3.3 RECYCLING DEMOLITION AND CONSTRUCTION WASTE, GENERAL

A. General: Recycle paper and beverage containers used by on-site workers.

B. Recycling Incentives: Revenues, savings, rebates, tax credits, and other incentives received for recycling waste materials shall accrue to Government.

C. Preparation of Waste: Prepare and maintain recyclable waste materials according to recycling or reuse facility requirements. Maintain materials free of dirt, adhesives, solvents, petroleum contamination, and other substances deleterious to the recycling process.

D. Procedures: Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical according to approved construction waste management plan.

1. Provide appropriately marked containers or bins for controlling recyclable waste until removed from Project site. Include list of acceptable and unacceptable materials at each container and bin.

    a. Inspect containers and bins for contamination and remove contaminated materials if found.

2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
3. Stockpile materials away from construction area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from the weather.

5. Remove recyclable waste from Government's property and transport to recycling receiver or processor as often as required to prevent overfilling bins.

3.4 RECYCLING DEMOLITION WASTE

A. Asphalt Paving: Grind asphalt to maximum 4-inch size.

B. Asphalt Paving: Break up and transport paving to asphalt-recycling facility.

C. Concrete: Remove reinforcement and other metals from concrete and sort with other metals.

1. Pulverize concrete to maximum 4-inch size.

D. Masonry: Remove metal reinforcement, anchors, and ties from masonry and sort with other metals.

1. Pulverize masonry to maximum 4-inch size.
2. Clean and stack undamaged, whole masonry units on wood pallets.

E. Wood Materials: Sort and stack members according to size, type, and length. Separate lumber, engineered wood products, panel products, and treated wood materials.

F. Metals: Separate metals by type.

1. Structural Steel: Stack members according to size, type of member, and length.
2. Remove and dispose of bolts, nuts, washers, and other rough hardware.

G. Asphalt Shingle Roofing: Separate organic and glass-fiber asphalt shingles and felts. Remove and dispose of nails, staples, and accessories.

H. Gypsum Board: Stack large clean pieces on wood pallets or in container and store in a dry location. Remove edge trim and sort with other metals. Remove and dispose of fasteners.

I. Acoustical Ceiling Panels and Tile: Stack large clean pieces on wood pallets and store in a dry location.

J. Metal Suspension System: Separate metal members, including trim and other metals from acoustical panels and tile, and sort with other metals.

K. Carpet: Roll large pieces tightly after removing debris, trash, adhesive, and tack strips.

1. Store clean, dry carpet in a closed container or trailer provided by carpet reclamation agency or carpet recycler.

L. Carpet Tile: Remove debris, trash, and adhesive.

1. Stack tile on pallet and store clean, dry carpet in a closed container or trailer provided by carpet reclamation agency or carpet recycler.

M. Equipment: Drain tanks, piping, and fixtures. Seal openings with caps or plugs. Protect equipment from exposure to weather.

N. Plumbing Fixtures: Separate by type and size.

O. Piping: Reduce piping to straight lengths and store by material and size. Separate supports, hangers, valves, sprinklers, and other components by material and size.

P. Lighting Fixtures: Separate lamps by type and protect from breakage.

Q. Electrical Devices: Separate switches, receptacles, switchgear, transformers, meters, panelboards, circuit breakers, and other devices by type.

R. Conduit: Reduce conduit to straight lengths and store by material and size.

S. Lamps: Separate lamps by type and store according to requirements in 40 CFR 273.

T. Electronic Products: Ensure non-usable electronic products are reused, donated, sold, or recycled using environmentally sound management practices at end of life.

3.5 RECYCLING CONSTRUCTION WASTE

A. Packaging:

1. Cardboard and Boxes: Break down packaging into flat sheets. Bundle and store in a dry location.
2. Polystyrene Packaging: Separate and bag materials.
3. Pallets: As much as possible, require deliveries using pallets to remove pallets from Project site. For pallets that remain on-site, break down pallets into component wood pieces and comply with requirements for recycling wood.
4. Crates: Break down crates into component wood pieces and comply with requirements for recycling wood.

B. Site-Clearing Wastes: Chip brush, branches, and trees at landfill facility.

C. Wood Materials:

1. Clean Cut-Offs of Lumber: Grind or chip into small pieces.
2. Clean Sawdust: Bag sawdust that does not contain painted or treated wood.

D. Gypsum Board: Stack large clean pieces on wood pallets or in container and store in a dry location.

1. Clean Gypsum Board: Grind scraps of clean gypsum board using small mobile chipper or hammer mill. Screen out paper after grinding.

E. Paint: Seal containers and store by type.

3.6 DISPOSAL OF WASTE

A. General: Except for items or materials to be salvaged or recycled, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.

1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

B. Burning: Do not burn waste materials.

C. Disposal: Transport waste materials off Government property and legally dispose of them.

END OF SECTION 017419

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:

1. Substantial Completion procedures.
2. Final completion procedures.
3. Warranties.
4. Final cleaning.
5. Repair of the Work.

B. Related Requirements:
1. Section 017839 "Project Record Documents" for submitting Record Drawings.

1.2 ACTION SUBMITTALS

A. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.

B. Certified List of Incomplete Items: Final submittal at final completion.

1.3 CLOSEOUT SUBMITTALS

A. Field Report: For pest control inspection.

1.4 SUBSTANTIAL COMPLETION PROCEDURES

A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's punch list), indicating the value of each item on the list and reasons why the Work is incomplete.

B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Submit closeout submittals specified in other Division 01 Sections, including project record documents, operation and maintenance manuals, and similar final record information.
2. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.

3. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Government. Label with manufacturer's name and model number.
4. Submit testing, adjusting, and balancing records.

C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Make final changeover of permanent locks and deliver keys to Government. Advise Government's personnel of changeover in security provisions.
2. Complete startup and testing of systems and equipment.
3. Perform preventive maintenance on equipment used prior to Substantial Completion.
4. Instruct Government's personnel in operation, adjustment, and maintenance of products, equipment, and systems.
5. Advise Government of changeover in utility services.
6. Terminate and remove temporary facilities from Project site, along with construction tools and similar elements.
7. Complete final cleaning requirements.
8. Touch up paint and otherwise repair and restore marred exposed finishes to eliminate visual defects.

D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Government will either proceed with inspection or notify Contractor of unfulfilled requirements. Government will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Government, that must be completed or corrected before certificate will be issued.

1.5 FINAL COMPLETION PROCEDURES

A. Submittals Prior to Final Completion: Before requesting final inspection for determining final completion, complete the following:

1. Certified List of Incomplete Items: Submit certified copy of Government's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Government. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
2. Submit pest-control final inspection report.

B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the work will be completed and ready for final inspection and tests. On receipt of request, Government will either proceed with inspection or notify Contractor of unfulfilled requirements. Government will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1.6 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.

1. Organize list of spaces in sequential order.
2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
3. Submit list of incomplete items in the following format:

a. MS Excel electronic file. Government will return annotated file.

1.7 SUBMITTAL OF PROJECT WARRANTIES

A. Time of Submittal: Submit written warranties on request of Government for designated portions of the Work where warranties are indicated to commence on dates other than date of Substantial Completion, or when delay in submittal of warranties might limit Government's rights under warranty.

B. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.

C. Warranties in Paper Form:

1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.

D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.

1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:

a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
b. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
c. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
d. Sweep concrete floors broom clean in unoccupied spaces.
e. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
f. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
g. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
h. Leave Project clean and ready for occupancy.

3.2 REPAIR OF THE WORK

A. Complete repair and restoration operations, before requesting inspection for determination of Substantial Completion.

B. Repair, or remove and replace, defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.

END OF SECTION 017700

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for project record documents, including the following:

1. Record Drawings.

1.2 CLOSEOUT SUBMITTALS

A. Record Drawings: Comply with the following:

1. Number of Copies: Submit one set(s) of marked-up record prints.

1.3 RECORD DRAWINGS

A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.

1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.

a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
b. Accurately record information in an acceptable drawing technique.
c. Record data as soon as possible after obtaining it.
d. Record and check the markup before enclosing concealed installations.
e. Cross-reference record prints to corresponding photographic documentation.

2. Content: Types of items requiring marking include, but are not limited to, the following:

a. Dimensional changes to Drawings.
b. Revisions to details shown on Drawings.
c. Depths of foundations.
d. Locations and depths of underground utilities.
e. Revisions to routing of piping and conduits.
f. Revisions to electrical circuitry.
g. Actual equipment locations.
h. Duct size and routing.
i. Locations of concealed internal utilities.
j. Changes made by Change Order.
k. Details not on the original Contract Drawings.

l. Field records for variable and concealed conditions.
m. Record information on the Work that is shown only schematically.

3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
5. Mark important additional information that was either shown schematically or omitted from original Drawings.
6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.

B. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.

1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
2. Format: Annotated PDF electronic file with comment function enabled.
3. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.
4. Identification: As follows:

a. Project name.
b. Date.
c. Designation "PROJECT RECORD DRAWINGS."
d. Name of Government.
e. Name of Contractor.

1.4 MAINTENANCE OF RECORD DOCUMENTS

A. Maintenance of Record Documents: Store record documents in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Government's reference during normal working hours.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017839

SECTION 019113 – GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. General requirements for coordinating and scheduling commissioning activities.
2. Commissioning meetings.
3. Commissioning reports.
4. Use of commissioning process test equipment, instrumentation, and tools.
5. Construction checklists, including, but not limited to, installation checks, startup, performance tests, and performance test demonstration.
6. Commissioning tests and commissioning test demonstration.
7. Adjusting, verifying, and documenting identified systems and assemblies.

B. Related Requirements:

1. Section 230800 "Commissioning of HVAC" for technical commissioning requirements for HVAC.

1.2 DEFINITIONS

A. Acceptance Criteria: Threshold of acceptable work quality or performance specified for a commissioning activity, including, but not limited to, construction checklists, performance tests, performance test demonstrations, commissioning tests, and commissioning test demonstrations.

B. Basis-of-Design Document: A document prepared by Government that records concepts, calculations, decisions, and product selections used to comply with Government's Project Requirements and to suit applicable regulatory requirements, standards, and guidelines.

C. Commissioning Plan: A document that outlines the organization, schedule, allocation of resources, and documentation of commissioning requirements.

D. Commissioning: A quality-focused process for verifying and documenting that the facility and all of its systems and assemblies are planned, designed, installed, and tested to comply with Government's Project Requirements. The requirements specified here are limited to the construction phase commissioning activities.

E. Construction-Phase Commissioning-Process Completion: The stage of completion and acceptance of commissioning process when resolution of deficient conditions and issues discovered during commissioning process and retesting until acceptable results are obtained has been accomplished. Government will establish in writing the date construction-phase commissioning-process completion is achieved.

1. Commissioning process is complete when the Work specified of this Section and related Sections has been completed and accepted, including, but not limited to, the following:

    a. Completion of tests and acceptance of test results.
    b. Resolution of issues, as verified by retests performed and documented with acceptance of retest results.
    c. Completion and acceptance of submittals and reports.

F. Project Requirements: A document that details the functional requirements of a project and the expectations of how it will be used and operated, including Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information. This document is prepared either by the Government or for the Government by the Project Manager.

G. "Systems," "Assemblies," "Subsystems," "Equipment," and "Components": Where these terms are used together or separately, they shall mean "as-built" systems, assemblies, subsystems, equipment, and components.

H. Test: Performance tests, performance test demonstrations, commissioning tests, and commissioning test demonstrations.

1.3 INFORMATIONAL SUBMITTALS

A. Comply with requirements for submittal procedure general requirements for commissioning process.

B. Commissioning Plan Information:

1. List of Contractor-appointed commissioning team members to include specific personnel and subcontractors performing the various commissioning requirements.
2. Schedule of commissioning activities integrated with the Construction Schedule. Comply with requirements for the Construction Schedule general requirements for commissioning process.
3. Contractor personnel and subcontractors participating in each test.
4. List of instrumentation required for each test to include identification of parties that will provide instrumentation for each test.

C. Commissioning schedule.

D. List test instrumentation, equipment, and monitoring devices. Include the following information:

1. Make, model, serial number, and application for each instrument, equipment, and monitoring device.
2. Brief description of intended use.
3. Calibration record showing the following:

    a. Calibration agency, including name and contact information.
    b. Last date of calibration.
    c. Range of values for which calibration is valid.

d. Certification of accuracy.
e. Certification for calibration equipment traceable to NIST.
f. Due date of the next calibration.

E. Test Reports:

1. Pre-Startup Report: Prior to startup of equipment or a system, submit signed, completed construction checklists.
2. Test Data Reports: At the end of each day in which tests are conducted, submit test data for tests performed.
3. Commissioning Issue Reports: Daily, at the end of each day in which tests are conducted, submit commissioning issue reports for tests for which acceptable results were not achieved.
4. Weekly Progress Report: Weekly, at the end of each week in which tests are conducted, submit a progress report.
5. Data Trend Logs: Submit data trend logs at the end of the trend log period.
6. System Alarm Logs: Daily, at the start of days following a day in which tests were performed, submit printout of log of alarms that occurred since the last log was printed.

F. Construction Checklists:

1. Material checks.
2. Installation checks.
3. Startup procedures, where required.

1.4 CLOSEOUT SUBMITTALS

A. Commissioning Report:

1. At Construction-Phase Commissioning Completion, include the following:

a. Pre-startup reports.
b. Approved test procedures
c. Test data forms, completed and signed.
d. Progress reports.
e. Commissioning issue report log.
f. Commissioning issue reports showing resolution of issues.
g. Correspondence or other documents related to resolution of issues.
h. Other reports required by commissioning process.
i. List unresolved issues and reasons they remain unresolved and should be exempted from the requirements for Construction-Phase Commissioning Completion.
j. Report shall include commissioning work of Contractor.

B. Request for Certificate of Construction-Phase Commissioning Process Completion.

C. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT, INSTRUMENTATION, AND TOOLS

A. Test equipment and instrumentation required to perform the commissioning process shall remain the property of Contractor unless otherwise indicated.

B. Test equipment and instrumentation required to perform commissioning process shall comply with the following criteria:

1. Be manufactured for the purpose of testing and measuring tests for which they are being used and have an accuracy to test and measure system performance within the tolerances required to determine acceptable performance.
2. Calibrated and certified.

a. Calibration performed and documented by a qualified calibration agency according to national standards applicable to the tools and instrumentation being calibrated. Calibration shall be current according to national standards or within test equipment and instrumentation manufacturer's recommended intervals, whichever is more frequent, but not less than within six months of initial use on Project. Calibration tags shall be permanently affixed.
b. Repair and recalibrate test equipment and instrumentation if dismantled, dropped, or damaged since last calibrated.

3. Maintain test equipment and instrumentation.
4. Use test equipment and instrumentation only for testing or monitoring Work for which they are designed.

2.2 PROPRIETARY TEST EQUIPMENT, INSTRUMENTATION, AND TOOLS

A. Proprietary test equipment, instrumentation, and tools are those manufactured or prescribed by tested equipment manufacturer and required for work on its equipment as a condition of equipment warranty, or as otherwise required to service, repair, adjust, calibrate, or perform work on its equipment.

1. Identify proprietary test equipment, instrumentation, and tools required in the test equipment identification list submittal.
2. Proprietary test equipment, instrumentation, and tools shall become the property of Government at Substantial Completion.

2.3 REPORT FORMAT AND ORGANIZATION

A. General Format and Organization:

1. Bind report in three-ring binders.
2. Label the front cover and spine of each binder with the report title, volume number, project name, Contractor's name, and date of report.
3. Record report on compact disk.

4. Electronic Data: Portable document format (PDF); a single file with outline-organized bookmarks for major and minor tabs and tab contents itemized for specific reports.

B. Commissioning Report:

1. Include a table of contents and an index to each test.
2. Include major tabs for each Specification Section.
3. Include minor tabs for each test.
4. Within each minor tab, include the following:

a. Test specification.
b. Pre-startup reports.
c. Approved test procedures.
d. Test data forms, completed and signed.
e. Commissioning issue reports, showing resolution of issues, and documentation related to resolution of issues pertaining to a single test. Group data forms, commissioning issue reports showing resolution of issues, and documentation related to resolution of issues for each test repetition together within the minor tab, in reverse chronological order (most recent on top).

PART 3 - EXECUTION

3.1 PREPARATION

A. Review preliminary construction checklists and preliminary test procedures and data forms.

3.2 CONSTRUCTION CHECKLISTS

A. Construction checklists cannot modify or conflict with the Contract Documents.

B. Create construction checklists based on actual systems and equipment to be included in Project.

C. Material Checks: Compare specified characteristics and approved submittals with materials as received. Include factory tests and other evaluations, adjustments, and tests performed prior to shipment if applicable.

1. Service connection requirements, including configuration, size, location, and other pertinent characteristics.
2. Included optional features.
3. Delivery Receipt Check: Inspect and record physical condition of materials and equipment on delivery to Project site, including agreement with approved submittals, cleanliness, and lack of damage.
4. Installation Checks:

a. Location according to Drawings and approved Shop Drawings.
b. Configuration.
c. Compliance with manufacturers' written installation instructions.
d. Attachment to structure.

e. Access clearance to allow for maintenance, service, repair, removal, and replacement without the need to disassemble or remove other equipment or building elements. Access coordinated with other building elements and equipment, including, but not limited to, ceiling and wall access panels, in a manner consistent with OSHA fall-protection regulations and safe work practices.
f. Utility connections are of the correct characteristics, as applicable.
g. Correct labeling and identification.
h. Startup Checks: Verify readiness of equipment to be energized. Include manufacturer's standard startup procedures and forms.

D. Startup: Perform and document initial operation of equipment to prove that it is installed properly and operates as intended according to manufacturer's standard startup procedures, at minimum.

E. Performance Tests:

1. Static Tests: As specified elsewhere, including, but not limited to, duct and pipe leakage tests, insulation-resistance tests, and water-penetration tests.
2. Component Performance Tests: Tests evaluate the performance of an input or output of components under a full range of operating conditions.
3. Equipment and Assembly Performance Tests: Test and evaluate performance of equipment and assemblies under a full range of operating conditions and loads.
4. System Performance Tests: Test and evaluate performance of systems under a full range of operating conditions and loads.
5. Intersystem Performance Tests: Test and evaluate the interface of different systems under a full range of operating conditions and loads.

F. Deferred Construction Checklists: Obtain Government approval of proposed deferral of construction checklists, including proposed schedule of completion of each deferred construction checklist, before submitting request for Certificate of Construction-Phase Commissioning Process Completion. When approved, deferred construction checklists may be completed after date of Construction-Phase Commissioning Completion. Include the following in a request for Certificate of Construction-Phase Commissioning Process Completion:

1. Identify deferred construction checklists by number and title.
2. Provide a target schedule for completion of deferred construction checklists.
3. Written approval of proposed deferred construction checklists, including approved schedule of completion of each deferred construction checklist.

G. Delayed Construction Checklists: Obtain Government approval of proposed delayed construction checklists, including proposed schedule of completion of each delayed construction checklist, before submitting request for Certificate of Construction-Phase Commissioning Process Completion. When approved, delayed construction checklists may be completed after date of Construction-Phase Commissioning Completion. Include the following in a request for Certificate of Construction-Phase Commissioning Process Completion:

1. Identify delayed construction checklist by construction checklist number and title.
2. Provide a target schedule for completion of delayed construction checklists.
3. Written approval of proposed delayed construction checklists, including approved schedule of completion of each delayed construction checklist.

3.3 GENERAL EXECUTION REQUIREMENTS

A. Schedule and coordinate commissioning process with the Construction Schedule.

B. Perform activities identified in construction checklists, including tests, and document results of actions as construction proceeds.

C. Perform test demonstrations for Project Manager. Unless otherwise indicated, demonstrate tests for 100 percent of work to which the test applies. Report test data and commissioning issue resolutions.

D. Schedule personnel to participate in and perform Commissioning-Process Work.

E. Installing contractors' commissioning responsibilities include, but are not limited to, the following:

1. Operating the equipment and systems they install during tests.
2. In addition, installing contractors may be required to assist in tests of equipment and systems with which their work interfaces.

3.4 CONTRACTOR'S RESPONSIBILITIES

A. Management and Coordination: Manage, schedule, and coordinate commissioning process, including, but not limited to, the following:

1. Coordinate with subcontractors on their commissioning responsibilities and activities.
2. Obtain, assemble, and submit commissioning documentation.
3. Conduct periodic on-site commissioning meetings.
4. Develop and maintain the commissioning schedule. Integrate commissioning schedule into the Construction Schedule. Update Construction Schedule at specified intervals.
5. Review and comment on preliminary test procedures and data forms.
6. Report inconsistencies and issues in system operations.
7. Verify that tests have been completed and results comply with acceptance criteria, and that equipment and systems are ready before scheduling test demonstrations.
8. Direct and coordinate test demonstrations.
9. Coordinate witnessing of test demonstrations by Project Manager.
10. Coordinate and manage training. Be present during training sessions to direct video recording, present training, and direct the training presentations of others.
11. Prepare and submit specified commissioning reports.
12. Track commissioning issues until resolution and retesting is successfully completed.
13. Retain original records of Commissioning-Process Work, organized as required for the commissioning report. Provide Government's representative access to these records on request.
14. Assemble and submit commissioning report.

3.5 COMMISSIONING TESTING

A. Quality Control: Construction checklists, including tests, are quality-control tools designed to improve the functional quality of Project. Test demonstrations evaluate the effectiveness of Contractor's quality-control process.

B. Construction Checklists:

1. Complete construction checklists as Work is completed.
2. Distribute construction checklists to installing contractors before they start work.
3. Installers:

    a. Verify installation using approved construction checklists as Work proceeds.
    b. Complete and sign construction checklists weekly for work performed during the preceding week.

4. Provide Government access to construction checklists.

C. Installation Compliance Issues: Record as an installation compliance issue Work found to be incomplete, inaccessible, at variance with the Contract Documents, nonfunctional, or that does not comply with construction checklists. Record installation compliance issues on the construction checklist at the time they are identified. Record corrective action and how future Work should be modified before signing off the construction checklist.

D. Pre-Startup Audit: Prior to executing startup procedures, review completed installation checks to determine readiness for startup and operation. Report conditions, which, if left uncorrected, adversely impact the ability of systems or equipment to operate satisfactorily or to comply with acceptance criteria. Prepare pre-startup report for each system.

E. Test Procedures and Test Data Forms:

1. Test procedures shall define the step-by-step procedures to be used to execute tests and test demonstrations.
2. Test procedures shall be specific to the make, model, and application of the equipment and systems being tested.
3. Completed test data forms are the official records of the test results.
4. Government will provide to Contractor preliminary test procedures and test data forms for performance tests and commissioning tests after approval of Product Data, Shop Drawings, and preliminary operation and maintenance manual.
5. Review preliminary test procedures and test data forms, and provide comments within 14 days of receipt from Government. Review shall address the following:

    a. Equipment protection and warranty issues, including, but not limited to, manufacturers' installation and startup recommendations, and operation and maintenance instructions.
    b. Applicability of the procedure to the specific software, equipment, and systems approved for installation.

6. After Contractor has reviewed and commented on the preliminary test procedures and test data forms, Government will revise and reissue the approved revised test procedures and test data forms marked "Approved for Testing."

7. Use only approved test procedures and test data forms marked "Approved for Testing" to perform and document tests and test demonstrations.

F. Performance of Tests:

1. The sampling rate for tests is 100 percent. The sampling rate for test demonstrations is 100 percent unless otherwise indicated.
2. Perform and complete each step of the approved test procedures in the order listed.
3. Record data observed during performance of tests on approved data forms at the time of test performance and when the results are observed.
4. Record test results that are not within the range of acceptable results on commissioning issue report forms in addition to recording the results on approved test procedures and data forms according to the "Commissioning Compliance Issues" Paragraph in this Article.
5. On completion of a test, sign the completed test procedure and data form. Tests for which test procedures and data forms are incomplete, not signed, or which indicate performance that does not comply with acceptance criteria will be rejected. Tests for which test procedures and data forms are rejected shall be repeated and results resubmitted.

G. Performance of Test Demonstration:

1. Perform test demonstrations on a sample of tests after test data submittals are approved. The sampling rate for test demonstrations shall be 100 percent unless otherwise indicated in the individual test specification.
2. Notify Project Manager at least three days in advance of each test demonstration.
3. Perform and complete each step of the approved test procedures in the order listed.
4. Record data observed during performance of test demonstrations on approved data forms at the time of demonstration and when the results are observed.
5. Provide full access to Project Manager to directly observe the performance of all aspects of system response during the test demonstration. On completion of a test demonstration, sign the completed data form and obtain signature of Project Manager at the time of the test to authenticate the reported results.
6. Test demonstration data forms not signed by Contractor and Project Manager at the time of the completion of the procedure will be rejected. Test demonstrations for which data forms are rejected shall be repeated and results shall be resubmitted.

    a. Exception for Failure of Project Manager to Attend: Failure of Project Manager to be present for agreed-on schedule of test demonstration shall not delay Contractor. If Project Manager fails to attend a scheduled test, Contractor shall proceed with the scheduled test. On completion, Contractor shall sign the data form for Contractor and for Project Manager, and shall note the absence of Project Manager at the scheduled time and place.

7. False load test requirements are specified in related sections.

    a. Where false load testing is specified, provide temporary equipment, power, controls, wiring, piping, valves, and other necessary equipment and connections required to apply the specified load to the system. False load system shall be capable of steady-state operation and modulation at the level of load specified. Equipment and systems permanently installed in this work shall not be used to create the false load without Project Manager's written approval.

H. Deferred Tests:

1. Deferred Test List: Identify, in the request for Certificate of Construction-Phase Commissioning Process Completion, proposed deferred tests or other tests approved for deferral until specified seasonal or other conditions are available. When approved, deferred tests may be completed after the date of Construction-Phase Commissioning Completion. Identify proposed deferred tests in the request for Certificate of Construction-Phase Commissioning Process Completion as follows:

    a. Identify deferred tests by number and title.
    b. Provide a target schedule for completion of deferred tests.

2. Schedule and coordinate deferred tests. Schedule deferred tests when specified conditions are available. Notify Government at least three working days (minimum) in advance of tests.
3. Where deferred tests are specified, coordinate participation of necessary personnel and of Project Manager and Government. Schedule deferred tests to minimize occupant and facility impact. Obtain Project Manager's approval of the proposed schedule.

I. Delayed Tests:

1. Delayed Test List: Identify, in the request for Certificate of Construction-Phase Commissioning Process Completion, proposed delayed tests. Obtain Government approval of proposed delayed tests, including proposed schedule of completion of each delayed test, before submitting request for Certificate of Construction-Phase Commissioning Process Completion. Include the following in the request for Certificate of Construction-Phase Commissioning Process Completion:

    a. Identify delayed tests by test number and title.
    b. Written approval of proposed delayed tests, including approved schedule of completion of delayed tests.

2. Schedule and coordinate delayed tests. Schedule delayed tests when conditions that caused the delay have been rectified. Notify Project Manager and Government at least three working days (minimum) in advance of tests.
3. Where delayed tests are approved, coordinate participation of necessary personnel and of Project Manager and Government. Schedule delayed tests to minimize occupant and facility impact. Obtain Project Manager's approval of the proposed schedule.

J. Commissioning Compliance Issues:

1. Test results that are not within the range of acceptable results are commissioning compliance issues.
2. Track and report commissioning compliance issues until resolution and retesting are successfully completed.
3. If a test demonstration fails, determine the cause of failure. Direct timely resolution of issue and then repeat the demonstration. If a test demonstration must be repeated due to failure caused by Contractor work or materials, reimburse Government for billed costs for the participation in the repeated demonstration.
4. Test Results: If a test demonstration fails to meet the acceptance criteria, perform the following:

a. Complete a commissioning compliance issue report form promptly on discovery of test results that do not comply with acceptance criteria.
b. Submit commissioning compliance issue report form within 24 hours of the test.
c. Determine the root cause of the failure.
d. Establish responsibility for corrective action if the failure is due to conditions found to be Contractor's responsibility.

5. Commissioning Compliance Issue Report: Provide a commissioning compliance issue report for each issue. Do not report multiple issues on the same commissioning compliance issue report.

   a. Exception: If an entire class of devices is determined to exhibit the identical issue, they may be reported on a single commissioning compliance issue report. (For example, if all return-air damper actuators that are specified to fail to the open position are found to fail to the closed position, they may be reported on a single commissioning issue report. If a single commissioning issue report is used for multiple commissioning compliance issues, each device shall be identified in the report, and the total number of devices at issue shall be identified.
   b. Complete and submit Part 1 of the commissioning compliance issue report immediately when the condition is observed.
   c. Record the commissioning compliance issue report number and describe the deficient condition on the data form.
   d. Resolve commissioning compliance issues promptly. Complete and submit Part 2 of the commissioning compliance issue report when issues are resolved.

6. Diagnose and correct failed test demonstrations as follows:

   a. Perform diagnostic tests and activities required to determine the fundamental cause of issues observed.
   b. Record each step of the diagnostic procedure prior to performing the procedure. Update written procedure as changes become necessary.
   c. Record the results of each step of the diagnostic procedure.
   d. Record the conclusion of the diagnostic procedure on the fundamental cause of the issue.
   e. Determine and record corrective measures.
   f. Include diagnosis of fundamental cause of issues in commissioning compliance issue report.

7. Retest:

   a. Schedule and repeat the complete test procedure for each test demonstration for which acceptable results are not achieved. Obtain signature of Project Manager on retest data forms. Repeat test demonstration until acceptable results are achieved. Except for issues that are determined to result from design errors or omissions, or other conditions beyond Contractor's responsibility, compensate Government for direct costs incurred as the result of repeated test demonstrations to achieve acceptable results.
   b. For each repeated test demonstration, submit a new test data form, marked "Retest."

8. Do not correct commissioning compliance issues during test demonstrations.

a. Exceptions will be allowed if the cause of the issue is obvious and resolution can be completed in less than five minutes. If corrections are made under this exception, note the deficient conditions on the test data form and issue a commissioning compliance issue report. A new test data form, marked "Retest," shall be initiated after the resolution has been completed.

3.6 SEQUENCING

A. Sequencing of Commissioning Verification Activities: For a particular material, item of equipment, assembly, or system, perform the following in the order listed unless otherwise indicated:

1. Construction Checklists:

   a. Material checks.
   b. Installation checks.
   c. Startup, as appropriate. Some startup may depend on component performance. Such startup may follow component performance tests on which the startup depends.
   d. Performance Tests:

      1) Static tests, as appropriate.
      2) Component performance tests. Some component performance tests may depend on completion of startup. Such component performance tests may follow startup.
      3) Equipment and assembly performance tests.
      4) System performance tests.
      5) Intersystem performance tests.

2. Commissioning tests.

B. Before performing commissioning tests, verify that materials, equipment, assemblies, and systems are delivered, installed, started, and adjusted to perform according to construction checklists.

C. Verify readiness of materials, equipment, assemblies, and systems by performing tests prior to performing test demonstrations. Notify Project Manager if acceptable results cannot be achieved due to conditions beyond Contractor's control or responsibility.

D. Commence tests as soon as installation checks for materials, equipment, assemblies, or systems are satisfactorily completed. Tests of a particular system may proceed prior to completion of other systems, provided the incomplete work does not interfere with successful execution of test.

3.7 SCHEDULING

A. Commence commissioning process as early in the construction period as possible.

B. Commissioning Schedule: Integrate commissioning activities into Construction Schedule.

1. Include detailed commissioning activities in monthly updated Construction Schedule and short-interval schedule submittals.
2. Schedule the start date and duration for the following commissioning activities:

    a. Submittals.
    b. Preliminary operation and maintenance manual submittals.
    c. Installation checks.
    d. Startup, where required.
    e. Performance tests.
    f. Performance test demonstrations.
    g. Commissioning tests.
    h. Commissioning test demonstrations.

3. Schedule shall include a line item for each installation check, startup, and test activity specific to the equipment or systems involved.
4. Determine milestones and prerequisites for commissioning process. Show commissioning milestones, prerequisites, and dependencies in monthly updated critical-path-method construction schedule and short-interval schedule submittals.

C. Project Manager Coordination:

1. Notify Project Manager of commissioning schedule changes at least two work days in advance for activities requiring the participation.

3.8 COMMISSIONING REPORTS

A. Test Reports:

1. Pre-startup reports include observations of the conditions of installation, organized into the following sections:

    a. Equipment Model Verification: Compare contract requirements, approved submittals, and provided equipment. Note inconsistencies.
    b. Preinstallation Physical Condition Checks: Observe physical condition of equipment prior to installation. Note conditions including, but not limited to, physical damage, corrosion, water damage, or other contamination or dirt.
    c. Preinstallation Component Verification Checks: Verify components supplied with the equipment, preinstalled or field installed, are correctly installed and functional. Verify external components required for proper operation of equipment correctly installed and functional. Note missing, improperly configured, improperly installed, or nonfunctional components.
    d. Summary of Installation Compliance Issues and Corrective Actions: Identify installation compliance issues and the corrective actions for each. Verify that issues noted have been corrected.
    e. Evaluation of System Readiness for Startup: For each item of equipment for each system for which startup is anticipated, document in summary form acceptable to Government completion of equipment model verification, preinstallation physical condition checks, preinstallation component verification checks, and completion of corrective actions for installation compliance issues.

2. Test data reports include the following:

    a. "As-tested" system configuration. Complete record of conditions under which the test was performed, including, but not limited to, the status of equipment, systems, and assemblies; temporary adjustments and settings; and ambient conditions.
    b. Data and observations, including, but not limited to, data trend logs, recorded during the tests.
    c. Signatures of individuals performing and witnessing tests.
    d. Data trend logs accumulated overnight from the previous day of testing.

3. Commissioning Compliance Issue Reports: Report as commissioning compliance issues results of tests and test demonstrations that do not comply with acceptance criteria. Report only one issue per commissioning compliance issue report. Use sequentially numbered facsimiles of commissioning compliance issue report form included in this Section, or other form approved by Government. Distribute commissioning compliance issue reports to parties responsible for taking corrective action. Identify the following:

    a. Commissioning compliance issue report number. Assign unique, sequential numbers to individual commissioning compliance issue reports when they are created, to be used for tracking.
    b. Action distribution list.
    c. Report date.
    d. Test number and description.
    e. Equipment identification and location.
    f. Briefly describe observations about the performance associated with failure to achieve acceptable results. Identify the cause of failure if apparent.
    g. Diagnostic procedure or plan to determine the cause (include in initial submittal)
    h. Diagnosis of fundamental cause of issues as specified below (include in resubmittal).
    i. Fundamental cause of unacceptable performance as determined by diagnostic tests and activities.
    j. When issues have been resolved, update and resubmit the commissioning issue report forms by completing Part 2. Identify resolution taken and the dates and initials of the persons making the entries.
    k. Schedule for retesting.

4. Weekly progress reports include information for tests conducted since the preceding report and the following:

    a. Completed data forms.
    b. Equipment or system tested, including test number, system or equipment tag number and location, and notation about the apparent acceptability of results.
    c. Activities scheduled but not conducted per schedule.
    d. Commissioning compliance issue report log.
    e. Schedule changes for remaining Commissioning-Process Work, if any.

5. Data trend logs shall be initiated and running prior to the time scheduled for the test demonstration.

    a. Trend log data format shall be multiple data series graphs. Where multiple data series are trend logged concurrently, present the data on a common horizontal time

axis. Individual data series may be presented on a segmented vertical axis to avoid interference of one data series with another, and to accommodate different axis scale values. Graphs shall be sufficiently clear to interpret data within the accuracy required by the acceptance criteria.

b. Attach to the data form printed trend log data collected during the test or test demonstration.

c. Record, print out, and attach to the data form operator activity during the time the trend log is running. During the time the trend log is running, operator intervention not directed by the test procedure invalidates the test results.

6. System Alarm Logs: Record and print out a log of alarms that occurred since the last log was printed. Evaluate alarms to determine if the previous day's work resulted in any conditions that are not considered "normal operation."

a. Conditions that are not considered "normal operation" shall be reported on a commissioning issue report attached to the alarm log. Resolve as necessary. The intent of this requirement is to discover control system points or sequences left in manual or disabled conditions, equipment left disconnected, set points left with abnormal values, or similar conditions that may have resulted from failure to fully restore systems to normal, automatic control after test completion.

3.9 CERTIFICATE OF CONSTRUCTION-PHASE COMMISSIONING PROCESS COMPLETION

A. When Contractor considers that construction-phase commissioning process, or a portion thereof which Government agrees to accept separately, is complete, Contractor shall prepare and submit to Government through Project Manager a comprehensive list of items to be completed or corrected. Failure to include an item on such list does not alter Contractor's responsibility to compete commissioning process.

B. On receipt of Contractor's list, Government will make an inspection to determine whether the construction-phase commissioning process or designated portion thereof is complete. If Government’s inspection discloses items, whether included on Contractor's list, which is not sufficiently complete as defined in "Construction-Phase Commissioning Process Completion" Paragraph in the "Definitions" Article, Contractor shall, before issuance of the Certificate of Construction-Phase Commissioning Process Completion, complete or correct such items on notification by Government. In such case, Contractor shall then submit a request for another inspection by Government to determine construction-phase commissioning process completion.

C. Contractor shall promptly correct deficient conditions and issues discovered during commissioning process. Costs of correcting such deficient conditions and issues, including additional testing and inspections, the cost of uncovering and replacement, and compensation for Government’s services and expenses made necessary thereby, shall be at Contractor's expense.

D. When construction-phase commissioning process or designated portion is complete, Government will prepare a Certificate of Construction-Phase Commissioning Process Completion that shall establish the date of completion of construction-phase commissioning process. Certificate of Construction-Phase Commissioning Process Completion shall be submitted prior to requesting inspection for determining date of Substantial Completion.

END OF SECTION 019113

SECTION 024116 - STRUCTURE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Demolition and removal of buildings and site improvements.
2. Removing below-grade construction.
3. Disconnecting, capping or sealing, and relocating site utilities.
4. Salvaging items for reuse by Government.

1.3 MATERIALS OWNERSHIP

A. Unless otherwise indicated, demolition waste becomes property of Contractor.

B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Government that may be uncovered during demolition remain the property of Government.

1. Carefully salvage in a manner to prevent damage and promptly return to Government.

1.4 PREINSTALLATION MEETINGS

A. Predemolition Conference: Conduct conference at Project site.

1.5 INFORMATIONAL SUBMITTALS

A. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property for dust control. Indicate proposed locations and construction of barriers.

1. Adjacent Buildings: Detail special measures proposed to protect adjacent buildings to remain including means of egress from those buildings.

B. Schedule of building demolition activities with starting and ending dates for each activity.

C. Predemolition photographs or video.

D. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician.

1.6 CLOSEOUT SUBMITTALS

A. Inventory of items that have been removed, salvaged and recycled.

1.7 QUALITY ASSURANCE

A. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.

1.8 FIELD CONDITIONS

A. Building areas to be demolished will be vacated and their use discontinued before start of the Work.

B. Building areas immediately adjacent to demolition area will be occupied. Conduct building demolition so operations of occupied spaces will not be disrupted.

1. Provide not less than 48 hours' notice of activities that will affect operations of adjacent occupied buildings.
2. Maintain access to existing walkways, exits, and other facilities used by occupants of adjacent buildings.

a. Do not close or obstruct walkways, exits, or other facilities used by occupants of adjacent buildings without written permission from authorities having jurisdiction.

C. Conditions existing at time of inspection for bidding purpose will be maintained by Government as far as practical.

1. Before building demolition, Government will remove all items from building.

D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.

1. Hazardous materials will be removed by Government before start of the Work.

2. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Government and Government. Hazardous materials will be removed by Government under a separate contract.

E. On-site storage or sale of removed items or materials is not permitted.

F. Arrange demolition schedule so as not to interfere with operations of adjacent occupied buildings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.

B. Standards: Comply with ANSI/ASSE A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that utilities have been disconnected and capped before starting demolition operations.

B. Perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during building demolition operations.

C. Inventory and record the condition of items to be removed and salvaged.

3.2 PREPARATION

A. Refrigerant: Before starting demolition, remove refrigerant from mechanical equipment according to 40 CFR 82 and regulations of authorities having jurisdiction.

B. Salvaged Items: Comply with the following:

1. Clean salvaged items of dirt and demolition debris.
2. Pack or crate items after cleaning. Identify contents of containers.
3. Store items in a secure area until delivery to Government.
4. Transport items to storage area designated by Government.
5. Protect items from damage during transport and storage.

3.3 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

A. Existing Utilities to be disconnected: Locate, identify, disconnect, and seal or cap off utilities serving buildings and structures to be demolished.

1. Government will arrange to shut off utilities when requested by Contractor.

2. Arrange to shut off utilities with utility companies.
3. If removal, relocation, or abandonment of utility services will affect adjacent occupied buildings, then provide temporary utilities that bypass buildings and structures to be demolished and that maintain continuity of service to other buildings and structures.

4. Cut off pipe or conduit a minimum of 24 inches below grade. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing according to requirements of authorities having jurisdiction.
5. Do not start demolition work until utility disconnecting and sealing have been completed and verified in writing.

3.4 PROTECTION

A. Existing Facilities: Protect adjacent walkways, loading docks, building entries, and other building facilities during demolition operations. Maintain exits from existing buildings.

B. Temporary Shoring: Provide and maintain interior and exterior shoring, bracing, or structural support to preserve stability and prevent unexpected movement or collapse of construction being demolished.

C. Existing Utilities to Remain: Maintain utility services to remain and protect from damage during demolition operations. Do not interrupt existing utilities serving adjacent occupied or operating facilities unless authorized in writing by Government and authorities having jurisdiction.

D. Temporary Protection: Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction and as indicated. Comply with requirements in Section 015000 "Temporary Facilities and Controls."

1. Protect adjacent buildings and facilities from damage due to demolition activities.
2. Protect existing site improvements, appurtenances, and landscaping to remain.
3. Erect a plainly visible fence around drip line of individual trees or around perimeter drip line of groups of trees to remain.
4. Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
5. Provide protection to ensure safe passage of people around building demolition area and to and from occupied portions of adjacent buildings and structures.
6. Protect walls, windows, roofs, and other adjacent exterior construction that are to remain and that are exposed to building demolition operations.
7. Erect and maintain dustproof partitions and temporary enclosures to limit dust, noise, and dirt migration to occupied portions of adjacent buildings.

E. Remove temporary barriers and protections where hazards no longer exist. Where open excavations or other hazardous conditions remain, leave temporary barriers and protections in place.

3.5 DEMOLITION

A. General: Demolish indicated building areas completely. Use methods required to complete the Work within limitations of governing regulations and as follows:

1. Do not use cutting torches until work area is cleared of flammable materials. Maintain portable fire-suppression devices during flame-cutting operations.
2. Maintain fire watch during and for at least 0.5 hours after flame-cutting operations.

3. Maintain adequate ventilation when using cutting torches.
4. Locate building demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.

B. Site Access and Temporary Controls: Conduct building demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Government and authorities having jurisdiction. Provide alternate routes around closed or obstructed trafficways if required by authorities having jurisdiction.
2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations.

C. Explosives: Use of explosives is not permitted.

D. Proceed with demolition of structural framing members systematically, from higher to lower level. Complete building demolition operations above each floor or tier before disturbing supporting members on the next lower level.

E. Remove debris from elevated portions of the building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

F. Salvage: Items to be removed and salvaged are indicated on Drawings.

G. Promptly repair damage to adjacent building areas caused by demolition operations.

3.6 CLEANING

A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.

B. Do not burn demolished materials.

C. Clean adjacent structures and improvements of dust, dirt, and debris caused by building demolition operations. Return adjacent areas to condition existing before building demolition operations began.

END OF SECTION 024116

SECTION 061000 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wood products.
2. Fire-retardant-treated lumber.
3. Dimension lumber framing.
4. Miscellaneous lumber.
5. Plywood backing panels.

1.2 DEFINITIONS

A. Boards or Strips: Lumber of less than 2 inches nominal (38 mm actual) size in least dimension.

B. Dimension Lumber: Lumber of 2 inches nominal (38 mm actual) size or greater but less than 5 inches nominal (114 mm actual) size in least dimension.

C. Exposed Framing: Framing not concealed by other construction.

D. Lumber grading agencies, and abbreviations used to reference them, include the following:

1. NeLMA: Northeastern Lumber Manufacturers' Association.
2. NLGA: National Lumber Grades Authority.
3. SPIB: The Southern Pine Inspection Bureau.
4. WCLIB: West Coast Lumber Inspection Bureau.
5. WWPA: Western Wood Products Association.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
2. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency in accordance with ASTM D5664.

1.4 INFORMATIONAL SUBMITTALS

A. Material Certificates:

1. For dimension lumber specified to comply with minimum allowable unit stresses. Indicate species and grade selected for each use and design values approved by the ALSC Board of Review.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS

A. Lumber: Comply with DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.

1. Factory mark each piece of lumber with grade stamp of grading agency.

2. For exposed lumber indicated to receive a stained or natural finish, mark grade stamp on end or back of each piece.

3. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry wood products.

4. Dress lumber, S4S, unless otherwise indicated.

B. Maximum Moisture Content:

1. Boards: 15 percent.

2. Dimension Lumber: 15 percent unless otherwise indicated.

2.2 FIRE-RETARDANT-TREATED LUMBER

A. General: Where fire-retardant-treated materials are indicated, materials are to comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested in accordance with ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet (3.2 m) beyond the centerline of the burners at any time during the test.

1. Treatment is not to promote corrosion of metal fasteners.

2. Exterior Type: Treated materials are to comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering in accordance with ASTM D2898. Use for exterior locations and where indicated.
3. Interior Type A: Treated materials are to have a moisture content of 28 percent or less when tested in accordance with ASTM D3201/D3201M at 92 percent relative humidity. Use where exterior type is not indicated.

4. Design Value Adjustment Factors: Treated lumber is to be tested according to ASTM D5664 and design value adjustment factors are to be calculated according to ASTM D6841.

C. Kiln-dry lumber after treatment to maximum moisture content of 19 percent. Kiln-dry plywood after treatment to maximum moisture content of 15 percent.

D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency and other information required by authorities having jurisdiction.

E. Application: Treat all rough carpentry unless otherwise indicated.

2.3 MISCELLANEOUS LUMBER

A. Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:

1. Blocking.
2. Nailers.
3. Rooftop equipment bases and support curbs.
4. Cants.

B. Roofing Nailers: Structural- or No. 2-grade lumber or better; kiln-dried Douglas fir, southern pine, or wood having similar decay-resistant properties.

C. For blocking not used for attachment of other construction, Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.

D. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.

2.4 PLYWOOD BACKING PANELS

A. Equipment Backing Panels: Plywood, DOC PS 1, Exterior, C-C Plugged, fire-retardant treated, in thickness indicated or, if not indicated, not less than 3/4-inch (19-mm) nominal thickness.

2.5 FASTENERS

A. General: Fasteners are to be of size and type indicated and comply with requirements specified in this article for material and manufacture. Provide nails or screws, in sufficient length, to penetrate not less than 1-1/2 inches (38 mm) into wood substrate.

1. Where rough carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A153/A153M or ASTM F2329.

B. Nails, Brads, and Staples: ASTM F1667.

C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

D. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01 ICC-ES AC58 ICC-ES AC193 ICC-ES AC308 as appropriate for the substrate.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.

B. Set work to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry accurately to other construction. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.

C. Install plywood backing panels by fastening to studs; coordinate locations with utilities requiring backing panels.

D. Install sill sealer gasket/termite barrier in accordance with manufacturer's written instructions at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

E. Do not splice structural members between supports unless otherwise indicated.

F. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.

1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches (406 mm) o.c.

G. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.

H. Comply with AWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.

1. Use inorganic boron for items that are continuously protected from liquid water.
2. Use copper naphthenate for items not continuously protected from liquid water.

I. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.

J. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:

1. Table 2304.10.1, "Fastening Schedule," in ICC's International Building Code (IBC).
2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in ICC's International Residential Code for One- and Two-Family Dwellings.

3. ICC-ES evaluation report for fastener.

K. Securely attach roofing nailers to substrates by anchoring and fastening to withstand bending, shear, or other stresses imparted by Project wind loads and fastener-resistance loads as designed in accordance with ASCE/SEI 7.

L. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILERS

A. Install where indicated and where required for screeding or attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.

B. Attach wood blocking to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

C. Attach wood roofing nailers securely to substrate to resist the designed outward and upward wind loads indicated on Drawings and in accordance with ANSI/SPRI ED-1, Tables A6 and A7.

D. Provide permanent grounds of dressed, pressure-preservative-treated, key-beveled lumber not less than 1-1/2 inches (38 mm) wide and of thickness required to bring face of ground to exact thickness of finish material. Remove temporary grounds when no longer required.

3.3 PROTECTION

A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061000

SECTION 064116 - PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic-laminate-clad architectural cabinets.
2. Cabinet hardware and accessories.
3. Miscellaneous materials.

1.2 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to support loads imposed by installed and fully loaded cabinets.

B. Hardware Coordination: Distribute copies of approved hardware schedule specified in to manufacturer of architectural cabinets; coordinate Shop Drawings and fabrication with hardware requirements.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Plastic-laminate-clad architectural cabinets.
2. Cabinet hardware and accessories.
3. Miscellaneous materials.

B. Product Data Submittals: For each product.

C. Sustainable Design Submittals:

1. Chain-of-Custody Certificates: For certified wood products. Include statement of costs.

D. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.

2. Show large-scale details.
3. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
4. Show locations and sizes of cutouts and holes for items installed in plastic-laminate architectural cabinets.

5. Apply AWI Quality Certification Program label to Shop Drawings.

E. Samples: For each exposed product and for each color and texture specified, in manufacturer's or manufacturer's standard size.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.5 QUALITY ASSURANCE

A. Manufacturer's Qualifications: Employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1. Manufacturer's Certification: Licensed participant in AWI's Quality Certification Program.

B. Installer Qualifications: Manufacturer of products.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Do not deliver cabinets until painting and similar finish operations that might damage architectural cabinets have been completed in installation areas. Store cabinets in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.7 FIELD CONDITIONS

A. Environmental Limitations without Humidity Control: Do not deliver or install cabinets until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature and relative humidity at levels planned for building occupants during the remainder of the construction period.

B. Environmental Limitations with Humidity Control: Do not deliver or install cabinets until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F (16 and 32 deg C) and relative humidity between 25 and 55 percent during the remainder of the construction period.

C. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed/concealed by construction, and indicate measurements on Shop Drawings.

D. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

PART 2 - PRODUCTS

2.1 PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of cabinets indicated for construction, finishes, installation, and other requirements.

1. Provide labels from AWI certification program indicating that woodwork and installation complies with requirements of grades specified.

2. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with requirements of Contract Documents in addition to those of the referenced quality standard.

B. Architectural Woodwork Standards Grade: Custom.

C. Type of Construction: Frameless.

D. Door and Drawer-Front Style: Flush overlay.

E. High-Pressure Decorative Laminate: ISO 4586-3, grades as indicated or if not indicated, as required by quality standard.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. ABET Inc.
b. Formica Corporation.
c. Pionite; a Panolam Industries International, Inc. brand.
d. Wilsonart LLC.

F. Exposed Surfaces:

1. Plastic-Laminate Grade: HGS.

2. Edges: PVC tape, 0.018-inch (0.460-mm) minimum thickness, matching laminate in color, pattern, and finish.
3. Pattern Direction: Vertically for drawer fronts, doors, and fixed panels.

G. Concealed Backs of Panels with Exposed Plastic-Laminate Surfaces: High-pressure decorative laminate, ISO 4583-3, grade to match exposed surface.

H. Drawer Construction: Fabricate with exposed fronts fastened to subfront with mounting screws from interior of body.

1. Join subfronts, backs, and sides with glued rabbeted joints supplemented by mechanical fasteners.

I. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:

1. As selected by Government. Basis of Design: 'Formica 'Earthen Twill 8828-58"

2.2 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.

B. Composite Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.

2.3 CABINET HARDWARE AND ACCESSORIES

A. Frameless Concealed Hinges (European Type): ANSI/BHMA A156.9, B01602, degrees of opening.

B. Wire Pulls: Back mounted, solid , 4 inches (100 mm) long, 5/16 inch (8 mm) in diameter.

C. Adjustable Shelf Standards and Supports: ANSI/BHMA A156.9, B04102; with shelf brackets, B04112.

D. Shelf Rests: ANSI/BHMA A156.9, B04013; metal two-pin plastic with shelf hold-down clip.

E. Drawer Slides: ANSI/BHMA A156.9.

1. Standard Duty (Grade 1 and Grade 2): Side mount and extending under bottom edge of drawer.
2. Heavy-Duty (Grade 1HD-100 and Grade 1HD-200): Side mount.

a. Type: Full extension.

b. Material: Zinc-plated ball bearing slides.

F. Door and Drawer Silencers: ANSI/BHMA A156.16, L03011.

G. Grommets for Cable Passage: 2-inch (51-mm) OD, molded-plastic grommets and matching plastic caps with slot for wire passage.

1. Color: Black.

H. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with ANSI/BHMA A156.18 for ANSI/BHMA finish number indicated.

1. Satin Stainless Steel: ANSI/BHMA 630.

I. For concealed hardware, provide manufacturer's standard finish that complies with product class requirements in ANSI/BHMA A156.9.

2.4 MISCELLANEOUS MATERIALS

A. Furring, Blocking, Shims, and Hanging Strips: , kiln-dried to less than 15 percent moisture content.

B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

C. Adhesive for Bonding Plastic Laminate: as selected by fabricator to comply with requirements.

2.5 FABRICATION

A. Fabricate architectural cabinets to dimensions, profiles, and details indicated.

B. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Government seven days in advance of the dates and times architectural cabinet fabrication will be complete.

2. Trial fit assemblies at manufacturer's shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.

C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

D. Install glass to comply with applicable requirements in Section 088000 "Glazing" and in GANA's "Glazing Manual."

1. For glass in frames, secure glass with removable stops.
2. For exposed glass edges, polish and grind smooth.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition cabinets to humidity conditions in installation areas for not less than 72 hours.

3.2 INSTALLATION

A. Architectural Woodwork Standards Grade: Install cabinets to comply with quality standard grade of item to be installed.

B. Assemble cabinets and complete fabrication at Project site to extent that it was not completed in the shop.

C. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with wafer-head cabinet installation screws.

D. Install cabinets level, plumb, and true in line to a tolerance of 1/8 inch in 96 inches (3 mm in 2400 mm) using concealed shims.

1. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
2. Install cabinets without distortion so doors and drawers fit openings and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.

3. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches (400 mm) o.c. with No. 10 wafer-head sheet metal screws through metal backing or metal framing behind wall finish.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects. Where not possible to repair, replace architectural cabinets. Adjust joinery for uniform appearance.

B. Clean, lubricate, and adjust hardware.

C. Clean cabinets on exposed and semiexposed surfaces.

END OF SECTION 064116

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior standard steel doors and frames.
2. Exterior standard steel doors and frames.

1.2 DEFINITIONS

A. Minimum Thickness: Minimum thickness of base metal without coatings in accordance with NAAMM-HMMA 803 or ANSI/SDI A250.8.

1.3 COORDINATION

A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.4 ACTION SUBMITTALS

A. Product Data:

1. Interior standard steel doors and frames.
2. Exterior standard steel doors and frames.

B. Product Data Submittals: For each product.

1. Include construction details, material descriptions, core descriptions, fire-resistance ratings, and finishes.

C. Shop Drawings: Include the following:

1. Elevations of each door type.
2. Details of doors, including vertical- and horizontal-edge details and metal thicknesses.
3. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
4. Locations of reinforcement and preparations for hardware.
5. Details of each different wall opening condition.
6. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.

7. Details of anchorages, joints, field splices, and connections.
8. Details of accessories.
9. Details of moldings, removable stops, and glazing.

D. Samples for Initial Selection: For hollow-metal doors and frames with factory-applied color finishes.

E. Product Schedule: For hollow-metal doors and frames, prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final door hardware schedule.

1.5 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each type of fire-rated hollow-metal door and frame assembly fire-rated borrowed-lite assembly and thermally rated door assemblies for tests performed by a qualified testing agency indicating compliance with performance requirements.

1.6 CLOSEOUT SUBMITTALS

A. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Deliver hollow-metal doors and frames palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.

1. Provide additional protection to prevent damage to factory-finished units.

B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.

C. Store hollow-metal doors and frames vertically under cover at Project site with head up. Place on minimum 4-inch- (102-mm-) high wood blocking. Provide minimum 1/4-inch (6-mm) space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Rated Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure in accordance with NFPA 252 or UL 10C.

1. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing in accordance with UL 1784 and installed in compliance with NFPA 105.

2. Oversize Fire-Rated Door Assemblies: For units exceeding sizes of tested assemblies, provide certification by a qualified testing agency that doors comply with standard construction requirements for tested and labeled fire-rated door assemblies except for size.

B. Fire-Rated, Borrowed-Lite Assemblies: Assemblies complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction, for fire-protection ratings indicated, based on testing in accordance with NFPA 257 or UL 9.

C. Thermally Rated Door Assemblies: Provide door assemblies with U-factor of not more than 0.40 deg Btu/F x h x sq. ft. (2.27 W/K x sq. m) when tested in accordance with ASTM C1363 or ASTM E1423.

2.2 INTERIOR STANDARD STEEL DOORS AND FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 2; ANSI/SDI A250.4, Level B. .

1. Doors:

a. Type: As indicated in the Door and Frame Schedule on Drawings.
b. Thickness: 1-3/4 inches (44.5 mm).

c. Face: Uncoated steel sheet, minimum thickness of 0.042 inch (1.0 mm).
d. Edge Construction: Model 1, Full Flush.

e. Edge Bevel: Provide manufacturer's standard beveled or square edges.

f. Core: Manufacturer's standard.
g. Fire-Rated Core: Manufacturer's standard laminated mineral board core for fire-rated doors.

2. Frames:

a. Materials: Uncoated steel sheet, minimum thickness of 0.053 inch (1.3 mm).
b. Construction: Knocked down.

3. Exposed Finish: Prime.

2.3 EXTERIOR STANDARD STEEL DOORS AND FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Extra-Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 3; ANSI/SDI A250.4, Level A. .

1. Doors:

a. Type: As indicated in the Door and Frame Schedule on Drawings.
b. Thickness: 1-3/4 inches (44.5 mm).

c. Face: Metallic-coated steel sheet, minimum thickness of 0.053 inch (1.3 mm), with minimum A40 (ZF120) coating.
d. Edge Construction: Model 1, Full Flush.

e. Edge Bevel: Provide manufacturer's standard beveled or square edges.
f. Top Edge Closures: Close top edges of doors with flush closures of same material as face sheets. Seal joints against water penetration.
g. Bottom Edges: Close bottom edges of doors where required for attachment of weather stripping with end closures or channels of same material as face sheets. Provide weep-hole openings in bottoms of exterior doors to permit moisture to escape.

h. Core: Polyisocyanurate.

2. Frames:

a. Materials: Metallic-coated steel sheet, minimum thickness of 0.053 inch (1.3 mm), with minimum A40 (ZF120) coating.

b. Construction: Knocked down.

3. Exposed Finish: Prime.

2.4 BORROWED LITES

A. Fabricate of uncoated steel sheet, minimum thickness of 0.053 inch (1.3 mm).

B. Construction: Knocked down.

C. Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as metal as frames.

D. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.

2.5 FRAME ANCHORS

A. Jamb Anchors:

1. Type: Anchors of minimum size and type required by applicable door and frame standard, and suitable for performance level indicated.

2. Quantity: Minimum of three anchors per jamb, with one additional anchor for frames with no floor anchor. Provide one additional anchor for each 24 inches (610 mm) of frame height above 7 feet (2.1 m).
3. Postinstalled Expansion Anchor: Minimum 3/8-inch- (9.5-mm-) diameter bolts with expansion shields or inserts, with manufacturer's standard pipe spacer.

B. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor.

C. Floor Anchors for Concrete Slabs with Underlayment: Adjustable-type anchors with extension clips, allowing not less than 2-inch (51-mm) height adjustment. Terminate bottom of frames at top of underlayment.

D. Material: ASTM A879/A879M, Commercial Steel (CS), 04Z (12G) coating designation; mill phosphatized.

1. For anchors built into exterior walls, steel sheet complying with ASTM A1008/A1008M or ASTM A1011/A1011M; hot-dip galvanized in accordance with ASTM A153/A153M, Class B.

2.6 MATERIALS

A. Recycled Content of Steel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.

B. Cold-Rolled Steel Sheet: ASTM A1008/A1008M, Commercial Steel (CS), Type B; suitable for exposed applications.

C. Hot-Rolled Steel Sheet: ASTM A1011/A1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.

D. Metallic-Coated Steel Sheet: ASTM A653/A653M, Commercial Steel (CS), Type B.

E. Inserts, Bolts, and Fasteners: Hot-dip galvanized in accordance with ASTM A153/A153M.

F. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.

G. Mineral-Fiber Insulation: ASTM C665, Type I (blankets without membrane facing); consisting of fibers manufactured from slag or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively; passing ASTM E136 for combustion characteristics.

H. Glazing: Comply with requirements in Section 088000 "Glazing."

2.7 FABRICATION

A. Door Astragals: Provide overlapping astragal on one leaf of pairs of doors where required by NFPA 80 for fire-performance rating or where indicated. Extend minimum 3/4 inch (19 mm) beyond edge of door on which astragal is mounted or as required to comply with published listing of qualified testing agency.

B. Hollow-Metal Frames: Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames.

1. Sidelite and Transom Bar Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by welding, or by rigid mechanical anchors.
2. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
3. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.

    a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
    b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.

C. Hardware Preparation: Factory prepare hollow-metal doors and frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping in accordance with ANSI/SDI A250.6, the Door Hardware Schedule on Drawings, and templates.

1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
2. Comply with BHMA A156.115 for preparing hollow-metal doors and frames for hardware.

D. Glazed Lites: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with mitered hairline joints.

1. Provide stops and moldings flush with face of door, and with beveled stops unless otherwise indicated.
2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
3. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames. Provide loose stops and moldings on inside of hollow-metal doors and frames.
4. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.
5. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches (230 mm) o.c. and not more than 2 inches (51 mm) o.c. from each corner.

2.8 STEEL FINISHES

A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.

1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with ANSI/SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

PART 3 - EXECUTION

3.1 PREPARATION

A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces. Touch up factory-applied finishes where spreaders are removed.

B. Drill and tap doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.

3.2 INSTALLATION

A. Install hollow-metal doors and frames plumb, rigid, properly aligned, and securely fastened in place. Comply with approved Shop Drawings and with manufacturer's written instructions.

B. Hollow-Metal Frames: Comply with ANSI/SDI A250.11.

1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces without damage to completed Work.

    a. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces. Touch-up finishes.
    b. Install frames with removable stops located on secure side of opening.

2. Fire-Rated Openings: Install frames in accordance with NFPA 80.
3. Floor Anchors: Secure with postinstalled expansion anchors.

    a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.

4. Solidly pack mineral-fiber insulation inside frames.

5. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout or mortar.

6. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
7. Installation Tolerances: Adjust hollow-metal frames to the following tolerances:

    a. Squareness: Plus or minus 1/16 inch (1.6 mm), measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
    b. Alignment: Plus or minus 1/16 inch (1.6 mm), measured at jambs on a horizontal line parallel to plane of wall.
    c. Twist: Plus or minus 1/16 inch (1.6 mm), measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
    d. Plumbness: Plus or minus 1/16 inch (1.6 mm), measured at jambs at floor.

C. Hollow-Metal Doors: Fit and adjust hollow-metal doors accurately in frames, within clearances specified below.

1. Non-Fire-Rated Steel Doors: Comply with ANSI/SDI A250.8.

2. Fire-Rated Doors: Install doors with clearances in accordance with NFPA 80.
3. Smoke-Control Doors: Install doors in accordance with NFPA 105.

D. Glazing: Comply with installation requirements in Section 088000 "Glazing" and with hollow-metal manufacturer's written instructions.

3.3 REPAIR

A. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.

B. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint in accordance with manufacturer's written instructions.

C. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-core five-ply flush wood veneer-faced doors and transom panels for transparent finish.
2. Light frames and louvers.

B. Related Requirements:

1. Section 088000 "Glazing" for glass view panels in flush wood doors.
2. Section 099300 "Staining and Transparent Finishing" for field finishing doors.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Solid-core five-ply flush wood veneer-faced doors and transom panels for transparent finish.
2. Solid-core seven-ply flush wood veneer-faced doors and transom panels for transparent finish.
3. Light frames and louvers.

B. Product Data Submittals: For each product, including the following:

1. Door edge construction
2. Door louvers.
3. Door frame construction.
4. Factory-machining criteria.
5. Factory-finishing specifications.

C. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:

1. Door schedule indicating door and frame location, type, size, fire protection rating, and swing.
2. Door elevations, dimension and locations of hardware, lite and louver cutouts, and glazing thicknesses.
3. Details of frame for each frame type, including dimensions and profile.
4. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.

5. Dimensions and locations of blocking for hardware attachment.
6. Dimensions and locations of mortises and holes for hardware.
7. Clearances and undercuts.
8. Requirements for veneer matching.
9. Doors to be factory finished and application requirements.

D. Samples for Initial Selection: For plastic-laminate door faces.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

A. Special warranties.

B. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Comply with requirements of referenced standard and manufacturer's written instructions.

B. Package doors individually in cardboard cartons, and wrap bundles of doors in plastic sheeting.

C. Mark each door on top and bottom rail with opening number used on Shop Drawings.

1.7 FIELD CONDITIONS

A. Environmental Limitations:

1. Do not deliver or install doors until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and HVAC system is operating and maintaining temperature and relative humidity at levels designed for building occupants for the remainder of construction period.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Delamination of veneer.
b. Warping (bow, cup, or twist) more than 1/4 inch (6.4 mm) in a 42-by-84-inch (1067-by-2134-mm) section.
c. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch (0.25 mm in a 76.2-mm) span.

2. Warranty also includes installation and finishing that may be required due to repair or replacement of defective doors.

3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 FLUSH WOOD DOORS AND FRAMES, GENERAL

A. Quality Standard: In addition to requirements specified, comply with ANSI/WDMA I.S. 1A.

1. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with the Contract Documents in addition to those of the referenced quality standard.

B. Adhesives: Do not use adhesives that contain urea formaldehyde.

C. Composite Wood Products: Products shall be made without urea formaldehyde.

2.2 SOLID-CORE FIVE-PLY FLUSH WOOD VENEER-FACED DOORS AND TRANSOM PANELS FOR TRANSPARENT FINISH

A. Interior Doors, Solid-Core Five-Ply Veneer-Faced :

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Lynden Door, Inc.
b. Masonite Architectural.
c. VT Industries, Inc.
d. Wilsonart LLC.

2. Performance Grade: ANSI/WDMA I.S. 1A Heavy Duty.

3. ANSI/WDMA I.S. 1A Quality Grade: Custom.
4. Faces: Single-ply wood veneer not less than 1/50 inch (0.508 mm) thick.

a. Species: Select white maple.

b. Cut: Plain sliced (flat sliced).

5. Core for Non-Fire-Rated Doors:

a. ANSI A208.1, Grade LD-1 particleboard.

1) Provide doors with glued-wood-stave or WDMA I.S. 10 structural-composite-lumber cores instead of particleboard cores for doors scheduled to receive exit devices in Section 087111 "Door Hardware (Descriptive Specification."

6. Construction: Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before veneering.

2.3 LIGHT FRAMES AND LOUVERS

A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.

1. Wood Species: Same species as door faces.

2. Profile: Flush rectangular beads.

2.4 FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated.

1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.
2. Comply with NFPA 80 requirements for fire-rated doors.

B. Factory machine doors for hardware that is not surface applied.

1. Locate hardware to comply with DHI-WDHS-3.
2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.

3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.
4. For doors scheduled to receive electrified locksets, provide factory-installed raceway and wiring to accommodate specified hardware.

5. Metal Astragals: Factory machine astragals and formed-steel edges for hardware for pairs of fire-rated doors.

C. Transom and Side Panels:

1. Fabricate matching panels with same construction, exposed surfaces, and finish as specified for associated doors.
2. Finish bottom edges of transoms and top edges of rabbeted doors same as door stiles.

3. Fabricate door and transom panels with full-width, solid-lumber, rabbeted, meeting rails.
4. Provide factory-installed spring bolts for concealed attachment into jambs of metal door frames.

D. Openings: Factory cut and trim openings through doors.

1. Light Openings: Trim openings with moldings of material and profile indicated.

2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."

3. Louvers: Factory install louvers in prepared openings.

2.5 FACTORY FINISHING

A. Comply with referenced quality standard for factory finishing.

1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
2. Finish faces, all four edges, edges of cutouts, and mortises.
3. Stains and fillers may be omitted on top and bottom edges, edges of cutouts, and mortises.

B. Factory finish doors.

C. Transparent Finish:

1. ANSI/WDMA I.S. 1A Grade: Custom.

2. Staining: As selected by Contracting Officer from manufacturer's full range.

3. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and installed door frames, with Installer present, before hanging doors.

1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
2. Reject doors with defects.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Hardware: For installation, see Section 087111 "Door Hardware (Descriptive Specification)."

B. Install doors and frames to comply with manufacturer's written instructions and referenced quality standard, and as indicated.

C. Install frames level, plumb, true, and straight.

1. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches (3.2 mm in 2400 mm).
2. Anchor frames to anchors or blocking built in or directly attached to substrates.

a. Secure with countersunk, concealed fasteners and blind nailing.

b. Use fine finishing nails for exposed fastening, countersunk and filled flush with woodwork.

1) For factory-finished items, use filler matching finish of items being installed.

3. Install smoke- and draft-control doors in accordance with NFPA 105.

D. Job-Fitted Doors:

1. Align and fit doors in frames with uniform clearances and bevels as indicated below.
2. Machine doors for hardware.
3. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
4. Clearances:

a. Provide 1/8 inch (3.2 mm) at heads, jambs, and between pairs of doors.
b. Provide 1/8 inch (3.2 mm) from bottom of door to top of decorative floor finish or covering unless otherwise indicated on Drawings.
c. Where threshold is shown or scheduled, provide 1/4 inch (6.4 mm) from bottom of door to top of threshold unless otherwise indicated.

5. Bevel non-fire-rated doors 1/8 inch in 2 inches (3-1/2 degrees) at lock and hinge edges.

E. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.

F. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

A. Operation: Rehang or replace doors that do not swing or operate freely.

B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

SECTION 083113 - ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Access doors and frames.

B. Related Requirements:

1. Section 077200 "Roof Accessories" for roof hatches.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details material descriptions, dimensions of individual components and profiles, and finishes.

B. Samples: For each type of access door and frame and for each finish specified, complete assembly minimum 6 by 6 inches (150 by 150 mm) in size.

C. Product Schedule: For access doors and frames.

1.3 CLOSEOUT SUBMITTALS

A. Record Documents: For fire-rated doors, list of applicable room name and number in which access door is located.

PART 2 - PRODUCTS

2.1 ACCESS DOORS AND FRAMES

A. Flush Access Doors with Concealed Flanges:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. ACUDOR Products, Inc.
b. Babcock-Davis.
c. Cendrex Inc.
d. Lane-Aire Manufacturing Corp.
e. Metropolitan Door Industries Corp.
f. Milcor; a division of Hart & Cooley, Inc.
g. Nystrom.

2. Description: Face of door flush with frame; with concealed flange for gypsum board installation and concealed hinge.

3. Optional Features: GasketingPiano hinges.
4. Locations: Wall and ceiling.
5. Door Size: As Indicated on Drawings.

6. Uncoated Steel Sheet for Door: Nominal 0.060 inch (1.52 mm), 16 gage, factory primed.

7. Frame Material: Same material and thickness as door.

8. Latch and Lock: Cam latch, key operated.

2.2 MATERIALS

A. Steel Plates, Shapes, and Bars: ASTM A36/A36M.

B. Steel Sheet: Uncoated or electrolytic zinc coated, ASTM A879/A879M, with cold-rolled steel sheet substrate complying with ASTM A1008/A1008M, Commercial Steel (CS), exposed.

C. Frame Anchors: Same material as door face.

D. Inserts, Bolts, and Anchor Fasteners: Hot-dip galvanized steel according to ASTM A153/A153M or ASTM F2329.

2.3 FABRICATION

A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.

B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.

C. Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish mounting holes, attachment devices and fasteners of type required to secure access doors to types of supports indicated.

1. For concealed flanges with drywall bead, provide edge trim for gypsum panels securely attached to perimeter of frames.
2. For concealed flanges with plaster bead for full-bed plaster applications, provide zinc-coated expanded-metal lath and exposed casing bead welded to perimeter of frames.

D. Recessed Access Doors: Form face of panel to provide recess for application of applied finish. Reinforce panel as required to prevent buckling. Provide access sleeves for each latch operator and install in holes cut through finish.

1. For recessed doors with plaster infill, provide self-furring expanded-metal lath attached to door panel.

E. Latch and Lock Hardware:

1. Quantity: Furnish number of latches and locks required to hold doors tightly closed.
2. Keys: Furnish two keys per lock and key all locks alike.

3. Mortise Cylinder Preparation: Where indicated, prepare door panel to accept cylinder specified in Section 087111 "Door Hardware (Descriptive Specification)."

F. Aluminum: After fabrication, apply manufacturer's standard protective coating on aluminum that will come in contact with concrete.

2.4 FINISHES

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

D. Painted Finishes: Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

1. Factory Primed: Apply manufacturer's standard, lead- and chromate-free, universal primer immediately after surface preparation and pretreatment.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Comply with manufacturer's written instructions for installing access doors and frames.

3.3 ADJUSTING

A. Adjust doors and hardware, after installation, for proper operation.

END OF SECTION 083113

SECTION 086200 - UNIT SKYLIGHTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Tubular daylighting devices.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include product dimensions, construction details, material descriptions, dimensions and profiles of components, and finishes.

2. Include power requirements, ratings, characteristics, and mounting requirements for electrical components.

B. Shop Drawings:

1. Include plans, elevations, sections, mounting, and attachment details and methods of structural support.

2. Include diagrams for power, signal, and control wiring.

C. Samples: For each exposed product and for each color and finish specified.

1.5 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For special warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For products and accessories to include in maintenance manuals.

1.7 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of products that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Failure to meet performance requirements.
b. Water leakage not controlled by drainage features.
c. Deterioration of materials and finishes beyond normal weathering.

d. Yellowing of acrylic glazing.
e. Breakage of polycarbonate glazing.
f. Deterioration of insulating-glass units including failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating-glass units contrary to manufacturer's written instructions. Evidence of failure is the obstruction of vision by dust, moisture, or film on interior surfaces of glass.

2. Warranty Period:

a. Products and Accessories: 10 years from date of Substantial Completion.

B. Special Aluminum Finish Warranty: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of finish deterioration within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
c. Cracking, peeling, checking, or chipping.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Performance Standard: Comply with AAMA/WDMA/CSA 101/1.S.2/A440 for definitions and minimum standards of performance, materials, components, accessories, and fabrication unless more stringent requirements are indicated.

1. Label Requirements: Label each product with names of manufacturer and labeling agency and AAMA/WDMA/CSA 101/1.S.2/A440 product designation, performance grade, and test specimen size equal to or greater than the size of the product.

2. Certification Requirements: Provide AAMA or WDMA certified products, with label attached to each.

B. Thermal Transmittance: NFRC 100 maximum U-factor of 0.50 Btu/sq. ft. x h x deg F (2.84 W/sq. m x K).

C. Solar Heat-Gain Coefficient (SHGC): NFRC 200 maximum SHGC of 0.40 .

D. Plastic Glazing:

1. Self-Ignition Temperature: 650 deg F (343 deg C) or more for plastic sheets in thickness indicated when tested in accordance with ASTM D1929.
2. Smoke-Production Characteristics: Smoke-developed index of 450 or less when tested in accordance with ASTM E84, and smoke density of 75 or less when tested in accordance with ASTM D2843.

3. Combustibility Characteristics: Tested in accordance with ASTM D635 and classified for burning rate of nominal thickness of 0.060 inch (1.5 mm) or thickness of plastic glazing indicated for use as follows:

a. Class CC1: Burning rate of 1 inch (25 mm) per minute or less.
b. Class CC2: Burning rate of 2-1/2 inches (64 mm) per minute or less.

E. Fall-Protection Performance: Installed assemblies are capable of safely supporting the greater of 400 lbs (181.4 kg) or twice the weight of employees, equipment, and materials that may be imposed on any 1 sq. foot (0.09 sq. m) of the assembly at any time.

2.2 TUBULAR DAYLIGHTING DEVICES

A. Tubular Daylighting Device: Complete with exterior glazed opening, glazing retainers and gaskets, exterior flashing assembly, reflective tube, interior diffuser assembly, and components and accessories required to provide a complete installation.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Solarise, Inc.
b. Solatube International, Inc.
c. Sunoptics Skylights and Daylighting Systems; Acuity Brands International, Inc.
d. Sun-Tek Manufacturing, Inc.
e. Tubular Skylight Inc.
f. Velux America, LLC.

B. Product Type: AAMA/WDMA/CSA 101/1.S.2/A440 TDDCC, tubular daylighting device - closed ceiling.

C. Nominal Reflective Tube Diameter: 22 inches (559 mm).

D. Exterior Glazing: Manufacturer's standard double dome.

1. Size: As required to coordinate with reflective tube.
2. Material:

   a. Acrylic: ASTM D4802, thermoformable, monolithic sheet, category as standard with manufacturer, Finish 1 (smooth or polished), Type UVF (formulated with UV absorber); and Class CC2 based on testing in accordance with ASTM D635.
   b. Minimum Thickness: As required to meet specified requirements.

3. Seal: Manufacturer's standard.
4. Exterior Glazing Accessories:

   a. Secondary Diffuser: Manufacturer's standard ASTM D4802 acrylic, Class CC2 based on testing in accordance with ASTM D635.

E. Exterior Flashing: Manufacturer's standard one-piece, curb-cap type.

1. Size: As required to coordinate with exterior glazing and reflective tube.

2. Base Pitch: 22.5-degree slope from horizontal.
3. Base Height: 8 inches (203 mm).

4. Material: Manufacturer's standard corrosion-resistant metal and finish.
5. Tube Attachment: Manufacturer's standard receiver attached to top of roof flashing and serving as mounting base for dome assembly; provides thermal break between flashing and reflective tube; configured to channel condensed moisture to the exterior.

   a. Seal: Manufacturer's standard that provides weathertight seal with roof flashing.

6. Flashing Accessories:

   a. Flashing Insulation: Manufacturer's standard thermal isolation material.

   b. Roof-Membrane Counterflashing: Manufacturer's standard corrosion-resistant aluminum.

F. Reflective Tube:

1. Rigid Tube: Light shaft formed from aluminum sheet, ASTM B209 (ASTM B209M), with [manufacturer's standard specular interior finish] <Insert requirements>.

   a. Thickness: Manufacturer's standard.
   b. Configuration: As indicated on Drawings.

      1) Tube Extensions: Provide manufacturer's standard components as required to accommodate installation areas indicated.

2) Tube Elbows: Provide angle adaptors adjustable to 45 degrees as required to accommodate installation areas indicated.
3) Rotating Couplers: Rotating adaptors allowing coupling of two elbows to create 90-degree transition of tube.

2. Tube Accessories:

a. Suspension Wire: Manufacturer's standard to provide bracing of tube to structure as required for a fully supported installation.
b. Extension Tube with Thermal Insulation Panel: Manufacturer's standard extension-tube assembly containing two light-transmitting, acrylic discs with an airspace between them and secured together by a plastic band to prevent conductive and convective heat transfer. Plastics are Class CC2 based on testing in accordance with ASTM D635.

c. Ceiling Trim: Manufacturer's standard trim for ceiling opening.

G. Interior Diffuser: Assembly attached to bottom of reflective tube, with high-visible-light-transmittance lens separated by airtight seals providing insulating airspace.

1. Size: As required to coordinate with reflective tube.

2. Lens Type: Square, prismatic lens, polycarbonate Class CC1 based on testing in accordance with ASTM D635 and compatible with acoustic panel ceiling.

a. Metal Trim Finish: White.

2.3 ACCESSORY MATERIALS

A. Fasteners: Same metal as metal being fastened, nonmagnetic stainless steel, or other noncorrosive metal that is compatible with the materials being fastened and as recommended in writing by manufacturer. Finish exposed fasteners to match material being fastened.

1. Where removal of exterior exposed fasteners might allow access to building, provide nonremovable fastener heads.

B. Bituminous Coating: Cold-applied asphalt mastic, compounded for 15-mil (0.4-mm) dry film thickness per coat.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine openings, substrates, structural support, anchorage, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Coordinate installation of products and accessories with installation of substrates, vapor retarders, roof insulation, roofing membrane, and flashing as required to ensure that each element of the Work performs properly and that combined elements are waterproof and weathertight.

B. Install products and accessories to comply with recommendations in AAMA 1607 and with manufacturer's written installation instructions.

C. Install products true to line and without distortion.

D. Anchor products securely to supporting substrates.

E. Where metal surfaces of products will contact other metal or corrosive substrates, such as preservative-treated wood, apply bituminous coating on concealed metal surfaces or provide other approved permanent separation recommended in writing by manufacturer.

3.3 CLEANING AND ADJUSTING

A. Clean exposed product surfaces in accordance with manufacturer's written instructions. Touch up damaged metal coatings and finishes.

B. Remove excess sealants, glazing materials, dirt, and other substances.

C. Remove and replace glazing that has been broken, chipped, cracked, abraded, or damaged during construction period.

D. Protect product surfaces from contact with contaminating substances resulting from construction operations.

END OF SECTION 086200

SECTION 087111 - DOOR HARDWARE (DESCRIPTIVE SPECIFICATION)

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hinges.
2. Self-closing hinges and pivots.
3. Continuous, gear-type hinges.
4. Concealed hinges.
5. Mortise locks.
6. Electromechanical locks.
7. Lock cylinders.
8. Operating trim.
9. Closer holder release devices.
10. Wall- and floor-mounted stops.
11. Door gasketing.
12. Thresholds.
13. Metal protective trim units.
14. Auxiliary door hardware.
15. Auxiliary electrified door hardware.

B. Related Requirements:

1. Section 081113 "Hollow Metal Doors and Frames" for door silencers provided as part of hollow-metal frames.
2. Section 083113 "Access Doors and Frames" for access door hardware, except cylinders.

1.2 COORDINATION

A. Floor-Recessed Door Hardware: Coordinate layout and installation with floor construction.

1. Cast anchoring inserts into concrete.

B. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

C. Security: Coordinate installation of door hardware, keying, and access control with Government's security consultant.

D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

E. Existing Openings: Where hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, field-verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide proper door operation.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Conference participants must include Installer's Architectural Hardware Consultant and Government's security consultant.

1.4 ACTION SUBMITTALS

A. Product Data:

1. Hinges.
2. Mortise locks.
3. Electromechanical locks.
4. Lock cylinders.
5. Operating trim.
6. Closer holder release devices.
7. Wall- and floor-mounted stops.
8. Door gasketing.
9. Thresholds.
10. Metal protective trim units.
11. Auxiliary door hardware.
12. Auxiliary electrified door hardware.
13. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For electrified door hardware.

1. Include diagrams for power, signal, and control wiring.
2. Include details of interface of electrified door hardware and building safety and security systems.

C. Samples: For each exposed product in each finish specified, in manufacturer's standard size.

1. Tag Samples with full product description to coordinate Samples with door hardware schedule.

D. Door Hardware Schedule: Prepared by or under the supervision of Installer's Architectural Hardware Consultant. Coordinate door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.

1. Submittal Sequence: Submit door hardware schedule concurrent with submissions of product data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate the fabrication of other work that is critical in Project construction schedule.
2. Format: Use same scheduling sequence and format and use same door numbers as in door hardware schedule in the Contract Documents.
3. Content: Include the following information:

    a. Identification number, location, hand, fire rating, size, and material of each door and frame.
    b. Locations of each door hardware set, cross-referenced to Drawings on floor plans and to door and frame schedule.
    c. Complete designations, including name and manufacturer, type, style, function, size, quantity, function, and finish of each door hardware product.

    d. Description of electrified door hardware sequences of operation and interfaces with other building control systems.
    e. Fastenings and other installation information.
    f. Explanation of abbreviations, symbols, and designations contained in door hardware schedule.
    g. Mounting locations for door hardware.
    h. List of related door devices specified in other Sections for each door and frame.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of electrified door hardware.

1. Certify that door hardware for use on each type and size of labeled fire-rated doors complies with listed fire-rated door assemblies.

C. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of door hardware to include in maintenance manuals.

B. Schedules: Final door hardware schedule.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Supplier of products and an employer of workers trained and approved by product manufacturers and of an Architectural Hardware Consultant who is available during the course of the Work to consult Contractor, Contracting Officer, and Government about door hardware and keying.

1. Warehousing Facilities: In Project's vicinity.
2. Scheduling Responsibility: Preparation of door hardware and keying schedule.

3. Engineering Responsibility: Preparation of data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Inventory door hardware on receipt and provide secure lockup for door hardware delivered to Project site.

B. Tag each item or package separately with identification coordinated with the final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures, including excessive deflection, cracking, or breakage.
b. Faulty operation of doors and door hardware.
c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.

2. Warranty Period: Three years from date of Substantial Completion unless otherwise indicated below:

a. Electromagnetic and Delayed-Egress Locks: Five years from date of Substantial Completion.
b. Exit Devices: Two years from date of Substantial Completion.
c. Manual Closers: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of door hardware from single manufacturer.

1. Provide electrified door hardware from same manufacturer as mechanical door hardware unless otherwise indicated. Manufacturers that perform electrical modifications and that are listed by a testing and inspecting agency acceptable to authorities having jurisdiction are acceptable.

2.2 PERFORMANCE REQUIREMENTS

A. Smoke- and Draft-Control Door Assemblies: Where smoke- and draft-control door assemblies are required, provide door hardware that complies with requirements of assemblies tested in accordance with UL 1784 and installed in compliance with NFPA 105.

1. Air-Leakage Rate: Maximum air leakage of 0.3 cfm per sq. ft. (3 cu. m per minute/sq. m) at the tested pressure differential of 0.3 inch wg (75 Pa) of water.

B. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Means of Egress Doors: Latches do not require more than 15 lbf (67 N) to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.

D. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the ABA standards of the Federal agency having jurisdiction and ICC A117.1.

1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf (22.2 N).
2. Comply with the following maximum opening-force requirements:

   a. Interior, Non-Fire-Rated Hinged Doors: 5 lbf (22.2 N) applied perpendicular to door.
   b. Sliding or Folding Doors: 5 lbf (22.2 N) applied parallel to door at latch.
   c. Fire Doors: Minimum opening force allowable by authorities having jurisdiction.

3. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch (13 mm) high.
4. Adjust door closer sweep periods so that, from an open position of 90 degrees, the door will take at least 5 seconds to move to a position of 12 degrees from the latch.
5. Adjust spring hinges so that, from an open position of 70 degrees, the door will take at least 1.5 seconds to move to the closed position.

2.3 HINGES

A. Hinges: ANSI/BHMA A156.1.

B. Antifriction-Bearing Hinges:

1. Mounting: Full mortise (butts).

2. Bearing Material: Manufacturer's standard antifriction bearing.
3. Base and Pin Metal:

   a. Exterior Hinges: Stainless steel with stainless steel pin.
   b. Interior Hinges: Stainless steel with stainless steel pin.

c. Hinges for Fire-Rated Assemblies: Stainless steel with stainless steel pin.

4. Pins: Nonrising loose unless otherwise indicated.

a. Outswinging Exterior Doors: Nonremovable.
b. Outswinging Corridor Doors with Locks: Nonremovable.

5. Tips: Flat button.

6. Corners: Square.

C. Electrified Antifriction-Bearing Hinges: Full-mortise mounting.

1. Bearing Material: Manufacturer's standard antifriction bearing.
2. Grade 1 (heavy weight).
3. Base and Pin Metal:

a. Exterior Hinges: Stainless steel with stainless steel pin.
b. Interior Hinges: Stainless steel with stainless steel pin.
c. Hinges for Fire-Rated Assemblies: Stainless steel with stainless steel pin.

4. Pins: Nonrising loose unless otherwise indicated.

a. Outswinging Exterior Doors: Nonremovable.
b. Outswinging Corridor Doors with Locks: Nonremovable.

5. Tips: Flat button.

6. Corners: Square.
7. Electric Feature: Concealed electric through wires.

2.4 MECHANICAL LOCKS AND LATCHES

A. Lock Functions: As indicated in door hardware schedule.

B. Lock Throw: Comply with testing requirements for length of bolts required for labeled fire doors, and as follows:

1. Mortise Locks: Minimum 3/4-inch (19-mm) latchbolt throw.

C. Lock Backset: 2-3/4 inches (70 mm) unless otherwise indicated.

D. Lock Trim:

1. Description: As indicated on Drawings.

2. Levers: Cast.
3. Escutcheons (Roses): Cast.
4. Dummy Trim: Match lever lock trim and escutcheons.

E. Strikes: Provide manufacturer's standard strike for each lock bolt or latchbolt complying with requirements indicated for applicable lock or latch and with strike box and curved lip extended to protect frame; finished to match lock or latch.

1. Flat-Lip Strikes: For locks with three-piece antifriction latchbolts, as recommended by manufacturer.

F. Mortise Locks: ANSI/BHMA A156.13, Operational Grade 2; stamped steel case with steel or brass parts; Series 1000.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Accurate Lock & Hardware Co.
b. BEST Access Solutions, Inc.; dormakaba USA Inc.
c. dormakaba USA Inc.
d. Lawrence Hardware Inc.
e. Marks USA; Napco Security Technologies, Inc.
f. RR Brink Locking Systems, Inc.
g. STANLEY; dormakaba USA, Inc.

2.5 ELECTROMECHANICAL LOCKS

A. Electromechanical Locks: ANSI/BHMA A156.25, Grade 2; motor or solenoid driven; with strike that suits frame.

1. Provide Best Access Systems, 45HW-7-DEU-15-H-626-XXX-RQE with Temperature Control Module, or equal.

2. Type: Mortise deadlocking latchbolt.

2.6 LOCK CYLINDERS

A. Lock Cylinders: Tumbler type, constructed from brass or bronze, stainless steel, or nickel silver.

1. Provide Stanley-Best Access System; 1C Core, 7 Pin.

B. Standard Lock Cylinders: ANSI/BHMA A156.5, Grade 1 permanent cores; face finished to match lockset.

1. Core Type: Interchangeable.

2. Number of Pins: Seven.

C. Construction Master Keys: Provide cylinders with feature that permits voiding of construction keys without cylinder removal. Provide 10 construction master keys.

D. Construction Cores: Provide construction cores that are replaceable by permanent cores. Provide 10 construction master keys.

2.7 KEYING

A. Keying System: Factory registered, complying with guidelines in ANSI/BHMA A156.28, appendix. Provide one extra key blank for each lock.

1. Existing System:

a. Key locks to Government's existing system.

2.8 OPERATING TRIM

A. Operating Trim: ANSI/BHMA A156.6; stainless steel unless otherwise indicated.

B. Flat Push Plates: With square corners and beveled edges; secured with exposed screws.

1. Thickness: 0.050 inch (1.3 mm).
2. Size: 4 inches wide by 16 inches high (102 mm wide by 406 mm high).

C. Straight Door Pulls:

1. Type: 3/4-inch (19-mm) constant-diameter pull.
2. Mounting: Surface applied with concealed fasteners.
3. Minimum Clearance: 1-1/2 inches (38 mm) from face of door.
4. Overall Length: 9 inches (229 mm).

2.9 CLOSER HOLDER RELEASE DEVICES

A. Closer Holder Release Devices: ANSI/BHMA A156.15, Grade 1; closer connected with separate or integral releasing and fire- or smoke-detecting devices. Door must become self-closing on interruption of signal to release device. Automatic release is activated by smoke detection system.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Allegion plc.
b. dormakaba USA Inc.
c. Norton Door Controls; ASSA ABLOY.
d. SARGENT Manufacturing Company; ASSA ABLOY.
e. STANLEY; dormakaba USA, Inc.

2. Type: Single-point hold-open.
3. Mounting: Surface mounted on face of door.
4. Features:

a. Adjustable backcheck.
b. Integral smoke detector.
c. Adjustable spring power.
d. Adjustable hold-open manual release force.

2.10 MECHANICAL STOPS AND HOLDERS

A. Wall- and Floor-Mounted Stops: ANSI/BHMA A156.16; base metal.

B. Dome-Type Floor Stop: Grade 1; with minimum 1-inch- (25-mm-) high bumper for doors without threshold and 1-3/8-inch- (35-mm-) high bumper for doors with threshold.

1. Provide with extruded-aluminum riser for carpet installations.

C. Combination Floor Stop and Holder: Grade 1 Grade 2.

1. Installation: Surface-screw Expansion-shield installation.
2. Hold Open: Semiautomatic Automatic with release by pushing door.

D. Wall Bumpers: Grade 1; with rubber bumper; 2-1/2-inch (64-mm) diameter, minimum 3/4-inch (19-mm) projection from wall; with backplate for concealed fastener installation.

1. Bumper Configuration: Concave.

2.11 DOOR GASKETING

A. Adhesive-Backed Perimeter Gasketing: gasket material applied to frame rabbet with self-adhesive.

B. Door Sweeps: gasket material held in place by flat housing or flange; surface mounted to face of door with screws.

1. Housing or Flange Material: .

2.12 THRESHOLDS

A. Compressing-Top Thresholds: Metal member with compressible vinyl seal on top of threshold that seals against bottom of door; and base metal of .

B. Saddle Thresholds:

1. Type: .
2. Base Metal: .

2.13 METAL PROTECTIVE TRIM UNITS

A. Kick Plates: 12 inches (305 mm) high by door width with allowance for frame stops.

2.14 AUXILIARY DOOR HARDWARE

A. Silencers for Metal Door Frames: Grade 1; neoprene or rubber; minimum diameter 1/2 inch (13 mm); fabricated for drilled-in application to frame.

2.15 AUXILIARY ELECTRIFIED DOOR HARDWARE

A. Auxiliary Electrified Door Hardware: ANSI/BHMA A156.35.

B. Boxed Power Supplies: Modular unit in NEMA ICS 6, Type 4 enclosure; filtered and regulated; voltage rating and type matching requirements of door hardware served; listed and labeled for use with fire-alarm systems.

C. Monitor Strikes: Cast strike with toggle.

D. Door Position Switches: Magnetically operated reed switch designed for concealed mounting.

E. Door and Frame Transfer Devices: Steel housing for mortise in hinge stile of door, with flexible tube for wiring bundle; accommodating doors that swing open to 120 degrees.

2.16 FABRICATION

A. Manufacturer's Nameplate: Do not provide products that have manufacturer's name or trade name displayed in a visible location except in conjunction with required fire-rating labels and as otherwise approved by Contracting Officer.

1. Manufacturer's identification is permitted on rim of lock cylinders only.

B. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and ANSI/BHMA A156.18.

C. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended; however, aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware unless otherwise indicated.

1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.

2. Fire-Rated Applications:

a. Wood or Machine Screws: For the following:

1) Hinges mortised to doors or frames; use threaded-to-the-head wood screws for wood doors and frames.
2) Strike plates to frames.
3) Closers to doors and frames.

b. Steel Through Bolts: For the following unless door blocking is provided:

1) Surface hinges to doors.
2) Closers to doors and frames.
3) Surface-mounted exit devices.

3. Spacers or Sex Bolts: For through bolting of hollow-metal doors.
4. Gasketing Fasteners: Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.

2.17 FINISHES

A. Provide finishes complying with ANSI/BHMA A156.18 as indicated in door hardware schedule.

B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance of the Work.

B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Steel Doors and Frames: For surface-applied door hardware, drill and tap doors and frames in accordance with ANSI/SDI A250.6.

B. Wood Doors: Comply with door and hardware manufacturers' written instructions.

3.3 INSTALLATION

A. Mounting Heights: Mount door hardware units at heights to comply with the following unless otherwise indicated or required to comply with governing regulations.

1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
2. Wood Doors: DHI's "Recommended Locations for Architectural Hardware for Wood Flush Doors."

B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work. Do not install surface-mounted items until finishes have been completed on substrates involved.

1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors in accordance with industry standards.

C. Hinges: Install types and in quantities indicated in door hardware schedule, but not fewer than the number recommended by manufacturer for application indicated or one hinge for every 30 inches (760 mm) of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.

D. Lock Cylinders: Install construction cores to secure building and areas during construction period.

1. Government to provide and install permanent cores.

2. Replace construction cores with permanent cores as directed by Government.
3. Furnish permanent cores to Government for installation.

E. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings. Verify location with Government.

F. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."

G. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they will impede traffic.

H. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.

1. Do not notch perimeter gasketing to install other surface-applied hardware.

I. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.

J. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

3.4 ADJUSTING

A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

3.5 CLEANING AND PROTECTION

A. Clean adjacent surfaces soiled by door hardware installation.

B. Clean operating items as necessary to restore proper function and finish.

C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.6 MAINTENANCE SERVICE

A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions for Government's continued adjustment, maintenance, and removal and replacement of door hardware.

3.7 DOOR HARDWARE SCHEDULE

END OF SECTION 087111

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Glass products.
2. Glazing sealants.
3. Miscellaneous glazing materials.

1.2 DEFINITIONS

A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.

B. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.

C. IBC: International Building Code.

D. Interspace: Space between lites of an insulating-glass unit.

1.3 COORDINATION

A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review temporary protection requirements for glazing during and after installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Glass Samples: For each type of the following products; 12 inches (300 mm) square.

1. Tinted glass.

C. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer manufacturers of fabricated glass units.

B. Product Certificates: For glass.

C. Product Test Reports: For fabricated glass and glazing sealants, for tests performed by a qualified testing agency.

1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.

D. Sample Warranties: For special warranties.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.

B. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.

1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F (4.4 deg C).

1.9 WARRANTY

A. Manufacturer's Special Warranty for Heat-Soaked Tempered Glass: Manufacturer agrees to replace heat-soaked tempered glass units that spontaneously break due to nickel sulfide (NiS) inclusions at a rate exceeding 0.3 percent (3/1000) within specified warranty period. Coverage for any other cause is excluded.

1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

B. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.

C. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:

1. For monolithic-glass lites, properties are based on units with lites of thickness indicated.
2. Visible Reflectance: Center-of-glazing values, in accordance with NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.

1. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."

B. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than thickness indicated.

1. Minimum Glass Thickness for Exterior Lites: 6 mm.

C. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

A. Clear Annealed Float Glass: ASTM C1036, Type I, Class 1 (clear), Quality-Q3.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. AGC Glass Company North America, Inc.

b. Guardian Glass; SunGuard.
c. Pilkington North America.
d. Vitro Architectural Glass.

B. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

2.5 GLAZING SEALANTS

A. General:

1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.

2.6 MISCELLANEOUS GLAZING MATERIALS

A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.

B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.

C. Setting Blocks:

1. Type recommended in writing by sealant or glass manufacturer.

D. Spacers:

1. Type recommended in writing by sealant or glass manufacturer.

E. Edge Blocks:

1. Type recommended in writing by sealant or glass manufacturer.

2.7 FABRICATION OF GLAZING UNITS

A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.

1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.

a. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:

1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
2. Presence and functioning of weep systems.
3. Minimum required face and edge clearances.
4. Effective sealing between joints of glass-framing members.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.

B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.

C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.

D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Provide spacers for glass lites where length plus width is larger than 50 inches (1270 mm).

1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
2. Provide 1/8-inch- (3-mm-) minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.

G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and in accordance with requirements in referenced glazing publications.

H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.

I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.

J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.

K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended in writing by gasket manufacturer.

3.4 GASKET GLAZING (DRY)

A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.

B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.

C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

E. Install gaskets so they protrude past face of glazing stops.

3.5 SEALANT GLAZING (WET)

A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.

B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.

C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.6 CLEANING AND PROTECTION

A. Immediately after installation, remove nonpermanent labels and clean surfaces.

B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.

1. If, despite such protection, contaminating substances do contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.

C. Remove and replace glass that is damaged during construction period.

D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

3.7 MONOLITHIC GLASS SCHEDULE

A. Clear Glass Type : Annealed Fully tempered float glass.

1. Minimum Thickness: 6 mm.

2. Safety glazing required.

END OF SECTION 088000

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Framing systems.
2. Suspension systems.
3. Grid suspension systems.

B. Related Requirements:

1. Section 054000 "Cold-Formed Metal Framing" for exterior and interior load-bearing and exterior non-load-bearing wall studs; floor joists; and roof rafters and ceiling joists.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Framing systems.
2. Suspension systems.
3. Grid suspension systems.

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of code-compliance certification for studs and tracks.

B. Evaluation Reports: For post-installed anchors and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Notify manufacturer of damaged materials received prior to installation.

B. Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.

C. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling as required by AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, in accordance with ASTM E119 by an independent testing agency.

B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated on Drawings, in accordance with ASTM E90 and classified in accordance with ASTM E413 by an independent testing agency.

C. Horizontal Deflection: For wall assemblies, limited to 1/360 of the wall height based on horizontal loading of 5 lbf/sq. ft. (239 Pa).

D. Design framing systems in accordance with AISI S220, "North American Specification for the Design of Cold-Formed Steel Framing - Nonstructural Members," unless otherwise indicated.

E. Design Loads: As indicated on architectural Drawings or 5 lbf/sq. ft. (239 Pa) minimum as required by the IBC.

2.2 FRAMING SYSTEMS

A. Recycled Content of Steel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.

B. Framing Members, General: Comply with AISI S220 for conditions indicated.

1. Steel Sheet Components: Comply with AISI S220 requirements for metal unless otherwise indicated

2. Protective Coating: Comply with AISI S220; ASTM A653/A653M, G40 (Z120); or coating with equivalent corrosion resistance. Galvannealed products are unacceptable.

a. Coating demonstrates equivalent corrosion resistance with an evaluation report acceptable to authorities having jurisdiction.

C. Studs and Track: AISI S220.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. CEMCO; California Expanded Metal Products Co.
b. ClarkDietrich.
c. Jaimes Industries.
d. MRI Steel Framing, LLC.
e. SCAFCO Steel Stud Company.

f. Steel Construction Systems.

2. Minimum Base-Steel Thickness: As required by performance requirements for horizontal deflection.
3. Depth: As indicated on Drawings.

D. Slip-Type Head Joints: Provide the following:

1. Deflection Track: Steel sheet top track manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.

a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1) CEMCO; California Expanded Metal Products Co.
2) ClarkDietrich.
3) SCAFCO Steel Stud Company.
4) Steel Construction Systems.

E. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.

1. Minimum Base-Steel Thickness: 0.0329 inch (0.836 mm).

F. Hat-Shaped, Rigid Furring Channels:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. ClarkDietrich.
b. Jaimes Industries.
c. MRI Steel Framing, LLC.
d. SCAFCO Steel Stud Company.
e. Steel Construction Systems.
2. Depth: As indicated on Drawings.

G. Resilient Furring Channels: 1/2-inch- (13-mm-) deep, steel sheet members designed to reduce sound transmission.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. ClarkDietrich.
b. MRI Steel Framing, LLC.
c. SCAFCO Steel Stud Company.
d. Steel Construction Systems.

2. Configuration: Asymmetrical.

H. Z-Shaped Furring: With slotted, thermally improved web, face flange of 1-1/4 inches (32 mm), wall attachment flange of 3/4 inch (19 mm), and depth required to fit insulation thickness indicated.

2.3 SUSPENSION SYSTEMS

A. Tie Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.062-inch- (1.59-mm-) diameter wire, or double strand of 0.048-inch- (1.21-mm-) diameter wire.

B. Hanger Attachments to Concrete:

1. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01 AC193 AC58 orAC308 as appropriate for the substrate.

a. Uses: Securing hangers to structure.

b. Type: Torque-controlled, expansion anchor, torque-controlled, adhesive anchor, or adhesive anchor.

c. Material for Interior Locations: Carbon-steel components zinc-plated to comply with ASTM B633 or ASTM F1941 (ASTM F1941M), Class Fe/Zn 5, unless otherwise indicated.

2. Power-Actuated Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

C. Wire Hangers: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.16 inch (4.12 mm) in diameter.

D. Carrying Channels (Main Runners): Cold-rolled, commercial-steel sheet with a base-steel thickness of 0.0538 inch (1.367 mm) and minimum 1/2-inch- (13-mm-) wide flanges.

1. Depth: 2-1/2 inches (64 mm).

E. Furring Channels (Furring Members):

1. Cold-Rolled Channels: 0.0538-inch (1.367-mm) uncoated-steel thickness, with minimum 1/2-inch- (13-mm-) wide flanges, 3/4 inch (19 mm) deep.
2. Steel Studs and Tracks:

a. Minimum Base-Steel Thickness: 0.0329 inch (0.836 mm).
b. Depth: As indicated on Drawings.

3. Hat-Shaped, Rigid Furring Channels: 7/8 inch (22 mm) deep.

a. Minimum Base-Steel Thickness: 0.0329 inch (0.836 mm).

2.4 GRID SUSPENSION SYSTEMS

A. Grid Suspension Systems for Gypsum Board Ceilings: ASTM C645, direct-hung system composed of main beams and cross-furring members that interlock.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Armstrong Ceiling & Wall Solutions.
b. Certainteed; SAINT-GOBAIN.
c. Rockfon; ROCKWOOL International.
d. USG Corporation.

2.5 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards.

1. Fasteners for Steel Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.

B. Isolation Strip at Exterior Walls: Provide the following:

1. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch (3.2 mm) thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Suspended Assemblies: Coordinate installation of suspension systems with installation of overhead structure to ensure that inserts and other provisions for anchorages to building structure have been installed to receive hangers at spacing required to support the Work and that hangers will develop their full strength.

1. Furnish concrete inserts and other devices indicated to other trades for installation in advance of time needed for coordination and construction.

3.3 INSTALLATION, GENERAL

A. Installation Standard: ASTM C754.

1. Gypsum Plaster Assemblies: Also comply with requirements in ASTM C841 that apply to framing installation.
2. Portland Cement Plaster Assemblies: Also comply with requirements in ASTM C1063 that apply to framing installation.
3. Gypsum Veneer Plaster Assemblies: Also comply with requirements in ASTM C844 that apply to framing installation.
4. Gypsum Board Assemblies: Also comply with requirements in ASTM C840 that apply to framing installation.

B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.

C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.

D. Install bracing at terminations in assemblies.

E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.4 INSTALLATION OF FRAMING SYSTEMS

A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Single-Layer Application: 16 inches (406 mm) o.c. unless otherwise indicated.
2. Multilayer Application: 16 inches (406 mm) o.c. unless otherwise indicated.
3. Tile Backing Panels: 16 inches (406 mm) o.c. unless otherwise indicated.

B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.

C. Install studs so flanges within framing system point in same direction.

D. Install tracks at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.

1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install track section (for cripple studs) at head and secure to jamb studs.

    a. Install two studs at each jamb unless otherwise indicated.

b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch (13-mm) clearance from jamb stud to allow for installation of control joint in finished assembly.

c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.

3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.

   a. Firestop Track: Where indicated, install to maintain continuity of fire-resistance-rated assembly indicated.

5. Sound-Rated Partitions: Install framing to comply with sound-rated assembly indicated.
6. Curved Partitions:

   a. Bend track to uniform curve and locate straight lengths so they are tangent to arcs.
   b. Begin and end each arc with a stud, and space intermediate studs equally along arcs. On straight lengths of no fewer than two studs at ends of arcs, place studs 6 inches (150 mm) o.c.

E. Direct Furring:

1. Screw to wood framing.
2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches (610 mm) o.c.

F. Z-Shaped Furring Members:

1. Erect insulation, specified in Section 072100 "Thermal Insulation," vertically and hold in place with Z-shaped furring members spaced [24 inches (610 mm)] <Insert dimension> o.c.
2. Except at exterior corners, securely attach narrow flanges of furring members to wall with concrete stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches (610 mm) o.c.
3. At exterior corners, attach wide flange of furring members to wall with short flange extending beyond corner; on adjacent wall surface, screw-attach short flange of furring channel to web of attached channel. At interior corners, space second member no more than 12 inches (305 mm) from corner and cut insulation to fit.

G. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch (3 mm) from the plane formed by faces of adjacent framing.

3.5 INSTALLATION OF SUSPENSION SYSTEMS

A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Hangers: 48 inches (1219 mm) o.c.

2. Carrying Channels (Main Runners): 48 inches (1219 mm) o.c.
3. Furring Channels (Furring Members): 24 inches (610 mm) o.c.

B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.

C. Suspend hangers from building structure as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.

   a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.

   a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.

3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.

4. Do not attach hangers to steel roof deck.
5. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
6. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
7. Do not connect or suspend steel framing from ducts, pipes, or conduit.

D. Fire-Resistance-Rated Assemblies: Wire tie furring channels to supports.

E. Seismic Bracing: Sway-brace suspension systems with hangers used for support.

3.6 INSTALLATION OF GRID SUSPENSION SYSTEMS

A. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.

END OF SECTION 092216

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior gypsum board.

2. Tile backing panels.

B. Related Requirements:

1. Section 092116.23 "Gypsum Board Shaft Wall Assemblies" for metal shaft-wall framing, gypsum shaft liners, and other components of shaft-wall assemblies.
2. Section 092216 "Non-Structural Metal Framing" for non-structural steel framing and suspension systems that support gypsum board panels.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Gypsum board, Type X.
2. Mold-resistant gypsum board.
3. Glass-mat, water-resistant backing board.
4. Interior trim.
5. Joint treatment materials.
6. Laminating adhesive.
7. Sound-attenuation blankets.

B. Samples: For the following products:

1. Trim Accessories: Full-size Sample in 12-inch- (300-mm-) long length for each trim accessory indicated.

1.3 DELIVERY, STORAGE AND HANDLING

A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.4 FIELD CONDITIONS

A. Environmental Limitations: Comply with ASTM C840 requirements or gypsum board manufacturer's written instructions, whichever are more stringent.

B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.

C. Do not install panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of gypsum panel and joint finishing material from single source with resources to provide products of consistent quality in appearance and physical properties.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated in accordance with ASTM E119 by an independent testing agency.

B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated in accordance with ASTM E90 and classified in accordance with ASTM E413 by an independent testing agency.

2.3 GYPSUM BOARD, GENERAL

A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.4 INTERIOR GYPSUM BOARD

A. Gypsum Board, Type X: ASTM C1396/C1396M.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. American Gypsum.
b. Certainteed; SAINT-GOBAIN.
c. Georgia-Pacific Gypsum LLC.

d. USG Corporation.

2. Thickness: 5/8 inch (15.9 mm).
3. Long Edges: Tapered.

B. Mold-Resistant Gypsum Board: ASTM C1396/C1396M. With moisture- and mold-resistant core and paper surfaces.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. American Gypsum.
    b. Certainteed; SAINT-GOBAIN.
    c. Georgia-Pacific Gypsum LLC.

    d. USG Corporation.

2. Core: 5/8 inch (15.9 mm), Type X.
3. Long Edges: Tapered.
4. Mold Resistance: ASTM D3273, score of 10 as rated in accordance with ASTM D3274.

2.5 TILE BACKING PANELS

A. Glass-Mat, Water-Resistant Backing Board: ASTM C1178/C1178M, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. Certainteed; SAINT-GOBAIN.
    b. Georgia-Pacific Gypsum LLC.
    c. USG Corporation.

2. Core: 5/8 inch (15.9 mm), Type X.
3. Mold Resistance: ASTM D3273, score of 10 as rated in accordance with ASTM D3274.

2.6 TRIM ACCESSORIES

A. Interior Trim: ASTM C1047.

1. Material: Galvanized or aluminum-coated steel sheet, rolled zinc, plastic, or paper-faced galvanized-steel sheet.
2. Shapes:

    a. Cornerbead.
    b. L-Bead: L-shaped; exposed long flange receives joint compound.
    c. Expansion (control) joint.

2.7 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C475/C475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.
2. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints, rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.

   a. Use setting-type compound for installing paper-faced metal trim accessories.

3. Fill Coat: For second coat, use drying-type, all-purpose compound.
4. Finish Coat: For third coat, use drying-type, all-purpose compound.
5. Skim Coat: For final coat of Level 5 finish, use drying-type, all-purpose compound.

D. Joint Compound for Tile Backing Panels:

1. Glass-Mat, Water-Resistant Backing Panel: As recommended by backing panel manufacturer.

2.8 AUXILIARY MATERIALS

A. Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.

B. Steel Drill Screws: ASTM C1002 unless otherwise indicated.

1. Use screws complying with ASTM C954 for fastening panels to steel members from 0.033 to 0.112 inch (0.84 to 2.84 mm) thick.

2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.

C. Sound-Attenuation Blankets: ASTM C665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.

1. Fire-Resistance-Rated Assemblies: Comply with mineral-fiber requirements of assembly.

D. Thermal Insulation: As specified in Section 072100 "Thermal Insulation."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates including welded hollow-metal frames and support framing, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION AND FINISHING OF PANELS, GENERAL

A. Comply with ASTM C840.

B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.

C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch (1.5 mm) of open space between panels. Do not force into place.

D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.

E. Form control and expansion joints with space between edges of adjoining gypsum panels.

F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.

1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. (0.7 sq. m) in area.
2. Fit gypsum panels around ducts, pipes, and conduits.
3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- (6.4- to 9.5-mm-) wide joints to install sealant.

G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide 1/4- to 1/2-inch- (6.4- to 12.7-mm-) wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.

I. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C919 and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.

J. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 INSTALLATION OF INTERIOR GYPSUM BOARD

A. Install interior gypsum board in the following locations:

1. Type X: Vertical surfaces unless otherwise indicated.
2. Mold-Resistant Type: As indicated on Drawings.

B. Single-Layer Application:

1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
2. On partitions/walls, apply gypsum panels horizontally (perpendicular to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.

    a. Stagger abutting end joints not less than one framing member in alternate courses of panels.

    b. At stairwells and other high walls, install panels horizontally unless otherwise indicated or required by fire-resistance-rated assembly.

3. On Z-shaped furring members, apply gypsum panels vertically (parallel to framing) with no end joints. Locate edge joints over furring members.
4. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

C. Multilayer Application:

1. On ceilings, apply gypsum board indicated for base layers before applying base layers on walls/partitions; apply face layers in same sequence. Apply base layers at right angles to framing members and offset face-layer joints one framing member, 16 inches (400 mm) minimum, from parallel base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly.

2. On partitions/walls, apply gypsum board indicated for base layers and face layers vertically (parallel to framing) with joints of base layers located over stud or furring member and face-layer joints offset at least one stud or furring member with base-layer joints unless otherwise indicated or required by fire-resistance-rated assembly. Stagger joints on opposite sides of partitions.

3. On Z-shaped furring members, apply base layer vertically (parallel to framing) and face layer either vertically (parallel to framing) or horizontally (perpendicular to framing) with vertical joints offset at least one furring member. Locate edge joints of base layer over furring members.

4. Fastening Methods: Fasten base layers and face layers separately to supports with screws.

D. Laminating to Substrate: Where gypsum panels are indicated as directly adhered to a substrate (other than studs, joists, furring members, or base layer of gypsum board), comply with gypsum board manufacturer's written instructions and temporarily brace or fasten gypsum panels until fastening adhesive has set.

E. Curved Surfaces:

1. Install panels horizontally (perpendicular to supports) and unbroken, to extent possible, across curved surface plus 12-inch- (300-mm-) long straight sections at ends of curves and tangent to them.
2. For double-layer construction, fasten base layer to studs with screws 16 inches (400 mm) o.c. Center gypsum board face layer over joints in base layer, and fasten to studs with screws spaced 12 inches (300 mm) o.c.

3.4 INSTALLATION OF TILE BACKING PANELS

A. Glass-Mat, Water-Resistant Backing Panels: Comply with manufacturer's written installation instructions and install at locations indicated to receive tile. Install with 1/4-inch (6.4-mm) gap where panels abut other construction or penetrations.

B. Where tile backing panels abut other types of panels in same plane, shim surfaces to produce a uniform plane across panel surfaces.

3.5 INSTALLATION OF TRIM ACCESSORIES

A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.

B. Control Joints: Install control joints in accordance with ASTM C840 and in specific locations approved by Government for visual effect.

C. Interior Trim: Install in the following locations:

1. Cornerbead: Use at outside corners unless otherwise indicated.
2. L-Bead: Use where indicated on Drawings.

3.6 FINISHING OF GYPSUM BOARD

A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.

B. Prefill open joints, rounded or beveled edges, and damaged surface areas.

C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.

D. Gypsum Board Finish Levels: Finish panels to levels indicated below and in accordance with ASTM C840:

1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
2. Level 2: Panels that are substrate for tile.
3. Level 3: Where indicated on Drawings.
4. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.

E. Glass-Mat Gypsum Sheathing Board: Finish according to manufacturer's written instructions for use as exposed soffit board.

3.7 PROTECTION

A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.

B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.

C. Remove and replace panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ceramic tile.
2. Crack isolation membranes.
3. Metal edge strips.

1.2 DEFINITIONS

A. General: Definitions in the ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.

B. Face Size: Actual tile size, excluding spacer lugs.

C. Module Size: Actual tile size plus joint width indicated.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples for Initial Selection: For tile, grout, and accessories involving color selection.

C. Samples for Verification:

1. Full-size units of each type and composition of tile and for each color and finish required.

1.4 Assembled samples mounted on a rigid panel, with grouted joints, for each type and composition of tile and for each color and finish required. INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of product.

C. Product Test Reports: For tile-setting and -grouting products.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.

    a. .

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Installer is a Five-Star member of the National Tile Contractors Associationor a Trowel of Excellence member of the Tile Contractors' Association of America.
2. Installer's supervisor for Project holds the International Masonry Institute's Foreman Certification.
3. Installer employs only Ceramic Tile Education Foundation Certified Installers for Project.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.

B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.

C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.

D. Store liquid materials in unopened containers and protected from freezing.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

2.2 PRODUCTS, GENERAL

A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.

1. Provide tile complying with Standard grade requirements unless otherwise indicated.

B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.

C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.

2.3 TILE PRODUCTS

A. Ceramic Tile Type WT1: Glazed.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. American Marazzi Tile, Inc.
   b. Crossville, Inc. (Basis of Design: Shades 2.0 SPO)
   c. Daltile.
   d. Iris US.

2. Composition: Porcelain.

3. Face Size: 4 inchby 24inch.
4. Thickness: 0.313 inch.

5. Dynamic Coefficient of Friction: Not less than 0.42.

6. Finish: Mat, opaque glaze.
7. Tile Color and Pattern: Basis of Design: Annapolis Sail Matte AP10.
8. Grout Color: As indicated on Drawings.

9. Trim Units: Schluter Dilex-AHK cove base (or equal) in anodized aluminum (AE) to transition between the floor and wall tile edges. At all exposed tile edges, use Schluter Jolly trim or equal in anodized aluminum (AE).

B. Porcelain Tile Type , TF1: Glazed.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. American Marazzi Tile, Inc.
   b. American Olean; a division of Dal-Tile Corporation.
   c. Crossville, Inc.
   d. Daltile. Basis of Design - Core Fundamentals - Prime Dynamic Beige
   e. Florida Tile, Inc.
   f. Iris US.

2. Certification: Tile certified by the Porcelain Tile Certification Agency.

3. Face Size: . 12 by 24 inches

4. Face: Plain with square or cushion edges.

5. Dynamic Coefficient of Friction: Not less than 0.42.
6. Grout Color: Custom Building Products - Mushroom #135 or equal.r.

2.4 THRESHOLDS

A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.

1. Bevel edges at 1:2 slope, with lower edge of bevel aligned with or up to 1/16 inch (1.5 mm) above adjacent floor surface. Finish bevel to match top surface of threshold. Limit height of threshold to 1/2 inch (12.7 mm) or less above adjacent floor surface.

2.5 WATERPROOF MEMBRANES

A. Waterproof Membrane, Polyethylene Sheet: Polyethylene faced on both sides with fleece webbing; 0.008-inch (0.2-mm) nominal thickness.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Schluter Systems L.P.
b. Schönox; HPS North America, Inc.

2.6 CRACK ISOLATION MEMBRANES

A. General: Manufacturer's standard product, selected from the following, that complies with ANSI A118.12 for high performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

B. Crack Isolation Membrane, Polyethylene Sheet: Polyethylene faced on both sides with fleece webbing; 0.008-inch (0.2-mm) nominal thickness.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Schluter Systems L.P. (Basis of Design: DitraMat Crack Isolation Membrane.)
b. Or approved equal, as approved by Contracting Officer.

2.7 SETTING MATERIALS

A. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.02.

B. Improved Modified Dry-Set Mortar (Thinset): ANSI A118.15.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. ARDEX Americas.
    b. C-Cure.
    c. Custom Building Products.
    d. H.B. Fuller Construction Products Inc. / TEC.
    e. Laticrete International, Inc.
    f. MAPEI Corporation.
    g. Merkrete; a Parex USA, Inc. brand.
    h. Siena Products; Omega.
    i. Bonsal America, an Oldcastle company.

2. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
3. Provide prepackaged, dry-mortar mix combined with acrylic resin liquid-latex additive at Project site.

4. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.15.

2.8 GROUT MATERIALS

A. High-Performance Tile Grout: ANSI A118.7.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. ARDEX Americas.
    b. Boiardi Products Corporation; a QEP company.
    c. Bostik, Inc.
    d. C-Cure.
    e. Custom Building Products.
    f. H.B. Fuller Construction Products Inc. / TEC.
    g. Jamo Inc.
    h. Laticrete International, Inc.
    i. MAPEI Corporation.
    j. Southern Grouts & Mortars, Inc.
    k. Summitville Tiles, Inc.
    l. Bonsal American, an Oldcastle company.

2. Polymer Type:

    a. Liquid-latex form for addition to prepackaged dry-grout mix.

B. Water-Cleanable Epoxy Grout: ANSI A118.3, with a VOC content of 65 g/L or less.

2.9 MISCELLANEOUS MATERIALS

A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.

B. Metal Edge Strips: Angle or L-shaped, height to match tile and setting-bed thickness, metallic or combination of metal and PVC or neoprene base, designed specifically for flooring applications; stainless steel, ASTM A276/A276M or ASTM A666, 300 Series exposed-edge material.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Blanke Corporation.
b. Ceramic Tool Company, Inc.
c. Schluter Systems L.P.

2.10 MIXING MORTARS AND GROUT

A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.

B. Add materials, water, and additives in accurate proportions.

C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
2. Verify that concrete substrates for tile floors installed with thinset mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.

B. Where indicated, prepare substrates to receive waterproof membrane by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot (1:50) toward drains.

C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 INSTALLATION OF CERAMIC TILE

A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.

1. For the following installations, follow procedures in the ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:

    a. Exterior tile floors.
    b. Tile floors in wet areas.
    c. Tile swimming pool decks.
    d. Tile floors in laundries.
    e. Tile floors consisting of tiles 8 by 8 inches (200 by 200 mm) or larger.
    f. Tile floors consisting of rib-backed tiles.

B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.

C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.

D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.

E. Where accent tile differs in thickness from field tile, vary setting-bed thickness so that tiles are flush.

F. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.

1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
2. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
3. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.

G. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:

1. Glazed Wall Tile: 1/16 inch (1.6 mm).

H. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.

I. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.

1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them.

J. Metal Edge Strips: Install at locations indicated.

3.4 ADJUSTING AND CLEANING

A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.

B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.

1. Remove grout residue from tile as soon as possible.
2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.5 PROTECTION

A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.

B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.

C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.6 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

A. Interior Floor Installations, Concrete Subfloor:

1. TCNA F125-Full : Thinset mortar on crack isolation membrane.

a. Ceramic Tile Type: TF1.
b. Thinset Mortar: Improved modified dry-setmortar.
c. Grout: High-performance unsanded grout.

B. Interior Floor Installations, Wood Subfloor:

1.

C. Interior Wall Installations, Wood or Metal Studs or Furring:

1. TCNA W244C or TCNA W244F : Thinset mortar on cementitious backer units or fiber-cement backer board over vapor-retarder membrane.

a. Ceramic Tile Type: TW1.
b. Thinset Mortar: Improved modified dry-set mortar.
c. Grout: High-performance unsanded grout.

END OF SECTION 093013

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical panels.
2. Metal suspension system.
3. Metal edge moldings and trim.

B. Products furnished, but not installed under this Section, include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Acoustical panels.
2. Metal suspension system.
3. Metal edge moldings and trim.

B. Sustainable Design Submittals:

1. Recycled Content: Provide manufacturer documentation for recycled content, indicating postconsumer and preconsumer recycled content.

C. Samples: For each exposed product and for each color and texture specified, 6 inches (150 mm) in size.

D. Samples for Initial Selection: For components with factory-applied finishes.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For testing agency.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Acoustical Ceiling Units: Full-size panels equal to 2 percent of quantity installed.
2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.

3. Hold-Down Clips: Equal to 2 percent of quantity installed.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Deliver acoustical panels, suspension-system components, and accessories to Project site and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1. Pressurized Plenums: Operate ventilation system for not less than 48 hours before beginning acoustical panel ceiling installation.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Source Limitations for Ceiling System: Obtain each type of acoustical ceiling panel and its supporting suspension system from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design seismic restraints for ceiling systems.

B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: Class C in accordance with ASTM E1264.

2. Smoke-Developed Index: 50 or less.

C. Fire-Resistance Ratings: Comply with ASTM E119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Indicate design designations from UL or from the listings of another qualified testing agency.

2.3 ACOUSTICAL PANELS "ACT"

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Armstrong Ceiling & Wall Solutions.
2. Certainteed; SAINT-GOBAIN.
3. Rockfon; ROCKWOOL International.

B. Acoustical Panel Standard: Provide manufacturer's standard panels in accordance with ASTM E1264 and designated by type, form, pattern, acoustical rating, and light reflectance unless otherwise indicated.

C. Classification: Provide panels as follows:

1. Type and Form, Type III: Mineral base with painted finish; Form 2, water felted.

D. Color: White.

E. Light Reflectance (LR): Not less than 0.85.

F. Ceiling Attenuation Class (CAC): Not less than 35.

G. Noise Reduction Coefficient (NRC): Not less than 0.90.

H. Edge/Joint Detail: Reveal sized to fit flange of exposed suspension-system members.

I. Thickness:

1. 3/4 inch (19 mm).

J. Modular Size: 24 by 48 inches (610 by 1220 mm).

2.4 METAL SUSPENSION SYSTEM

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Armstrong Ceiling & Wall Solutions.
2. Certainteed; SAINT-GOBAIN.
3. Rockfon; ROCKWOOL International.
4. USG Corporation.

B. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, metal suspension system and accessories in accordance with ASTM C635/C635M and designated by type, structural classification, and finish indicated.

C. Recycled Content: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.

D. Narrow-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized, G30 (Z90) coating designation; with prefinished 9/16-inch- (15-mm-) wide metal caps on flanges.

1. Structural Classification: Intermediate-duty system.
2. End Condition of Cross Runners: Override (stepped) type.
3. Face Design: Flat, flush.

4. Cap Finish: Painted white.

2.5 ACCESSORIES

A. Attachment Devices: Size for five times the design load indicated in ASTM C635/C635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.

1. Anchors in Concrete: Anchors of type and material indicated below, with holes or loops for attaching hangers of type indicated and with capability to sustain, without failure, a load equal to five times that imposed by ceiling construction, as determined by testing in accordance with ASTM E488/E488M or ASTM E1512 as applicable, conducted by a qualified testing and inspecting agency.

a. Type: Postinstalled bonded anchors.

b. Corrosion Protection, Carbon Steel: Components zinc plated in accordance with ASTM B633, Class SC 1 (mild) service condition.
c. Corrosion Protection, Stainless Steel: Components complying with ASTM F593 and ASTM F594, Group 1 Alloy 304 or 316.
d. Corrosion Protection, Nickel-Copper Alloy: Components fabricated from nickel-copper-alloy rods complying with ASTM B164 for UNS No. N04400 alloy.

B. Wire Hangers, Braces, and Ties: Provide wires as follows:

1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.
2. Stainless Steel Wire: ASTM A580/A580M, Type 304, nonmagnetic.
3. Nickel-Copper-Alloy Wire: ASTM B164, nickel-copper-alloy UNS No. N04400.

4. Size: Wire diameter sufficient for its stress at three times hanger design load (ASTM C635/C635M, Table 1, "Direct Hung") will be less than yield stress of wire, but not less than 0.106-inch- (2.69-mm-) diameter wire.

C. Flat Hangers: Mild steel, zinc coated or protected with rust-inhibitive paint.

D. Angle Hangers: Angles with legs not less than 7/8 inch (22 mm) wide; formed with 0.04-inch- (1-mm-) thick, galvanized-steel sheet complying with ASTM A653/A653M, G90 (Z275) coating designation; with bolted connections and 5/16-inch- (8-mm-) diameter bolts.

E. Hold-Down Clips: Manufacturer's standard hold-down.

2.6 METAL EDGE MOLDINGS AND TRIM

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Armstrong Ceiling & Wall Solutions.
2. Certainteed; SAINT-GOBAIN.
3. Flannery, Inc.
4. Fry Reglet Corporation.
5. Gordon Inc.
6. Rockfon; ROCKWOOL International.
7. USG Corporation.

B. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

1. Edge moldings to fit acoustical panel edge details and suspension systems indicated and match width and configuration of exposed runners unless otherwise indicated.
2. For lay-in panels with reveal edge details, provide stepped edge molding that forms reveal of same depth and width as that formed between edge of panel and flange at exposed suspension member.

3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.

B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders unless otherwise indicated, and comply with layout shown on reflected ceiling plans.

B. Layout openings for penetrations centered on the penetrating items.

3.3 INSTALLATION OF ACOUSTICAL PANEL CEILINGS

A. Install acoustical panel ceilings in accordance with ASTM C636/C636M and manufacturer's written instructions.

B. Suspend ceiling hangers from building's structural members and as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.

2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.

4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly to structure or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.

5. Secure flat, angle, channel, and rod hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for both the structure to which hangers are attached and the type of hanger involved. Install hangers in a manner that will not cause them to deteriorate or fail due to age, corrosion, or elevated temperatures.

6. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
7. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
8. Do not attach hangers to steel deck tabs.

9. Do not attach hangers to steel roof deck. Attach hangers to structural members.

10. Space hangers not more than 48 inches (1200 mm) o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches (200 mm) from ends of each member.

C. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns. Suspend bracing from building's structural members as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or postinstalled anchors.

D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.

1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
2. Screw attach moldings to substrate at intervals not more than 16 inches (400 mm) o.c. and not more than 3 inches (75 mm) from ends. Miter corners accurately and connect securely.

3. Do not use exposed fasteners, including pop rivets, on moldings and trim.

E. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.

F. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide precise fit.

1. Arrange directionally patterned acoustical panels as follows:

a. As indicated on reflected ceiling plans.
b. Install panels with pattern running in one direction parallel to long axis of space.
c. Install panels in a basket-weave pattern.

2. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
3. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
4. For reveal-edged panels on suspension-system members with box-shaped flanges, install panels with reveal surfaces in firm contact with suspension-system surfaces and panel faces flush with bottom face of runners.

5. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.

6. Install clips in areas indicated; space in accordance with panel manufacturer's written instructions unless otherwise indicated.

7. Install clean-room gasket system in areas indicated, sealing each panel and fixture as recommended by panel manufacturer's written instructions.

8. Protect lighting fixtures and air ducts in accordance with requirements indicated for fire-resistance-rated assembly.

3.4 ERECTION TOLERANCES

A. Suspended Ceilings: Install main and cross runners level to a tolerance of 1/8 inch in 12 feet (3 mm in 3.6 m), non-cumulative.

B. Moldings and Trim: Install moldings and trim to substrate and level with ceiling suspension system to a tolerance of 1/8 inch in 12 feet (3 mm in 3.6 m), non-cumulative.

3.5 CLEANING

A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.

B. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Thermoplastic-rubber base.
2. Rubber molding accessories.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials[, from the same product run,] that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Furnish not less than 10 linear feet (3 linear m) for every 500 linear feet (150 linear m) or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F (10 deg C) or more than 90 deg F (32 deg C).

1.6 FIELD CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F (21 deg C) or more than 95 deg F (35 deg C), in spaces to receive resilient products during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F (13 deg C) or more than 95 deg F (35 deg C).

C. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 THERMOPLASTIC-RUBBER BASE

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Johnsonite; A Tarkett Company.
2. Roppe Corporation, USA.
3. Or approved equal, to be approved by contracting office.

B. Product Standard: ASTM F 1861, Type TP (rubber, thermoplastic).

1. Group: I (solid, homogeneous).
2. Style and Location:

a. Style B, Cove: .

C. Thickness: 0.125 inch (3.2 mm).

D. Height: 4 inches (102 mm).

E. Lengths: Coils in manufacturer's standard length.

F. Outside Corners: Job formed.

G. Inside Corners: Job formed.

H. Colors: NIFC Standard Johnsonite 167 Fudge.

2.2 RUBBER MOLDING ACCESSORY

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Roppe Corporation, USA.
2. Johnsonite: A Tarkett Company.
3. Or equal, to be approved by Contracting Officer.

B. Description: Rubber transition strips.

C. Colors and Patterns: As indicated on Drawings.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

C. Metal Edge Strips: Extruded aluminum with mill finish, nominal 2 inches (50.8 mm) wide, of height required to protect exposed edges of flooring, and in maximum available lengths to minimize running joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Installation of resilient products indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.

B. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

C. Do not install resilient products until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.

D. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.3 RESILIENT BASE INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient base.

B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.

C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.

D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.

E. Do not stretch resilient base during installation.

F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.

G. Preformed Corners: Install preformed corners before installing straight pieces.

H. Job-Formed Corners:

1. Outside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches (76 mm) in length.
2. Inside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches (76 mm) in length.

   a. Miter corners to minimize open joints.

3.4 RESILIENT ACCESSORY INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient accessories.

B. Resilient Stair Accessories:

1. Use stair-tread-nose filler to fill nosing substrates that do not conform to tread contours.
2. Tightly adhere to substrates throughout length of each piece.

3. For treads installed as separate, equal-length units, install to produce a flush joint between units.

C. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.

B. Perform the following operations immediately after completing resilient-product installation:

1. Remove adhesive and other blemishes from surfaces.

2. Sweep and vacuum horizontal surfaces thoroughly.
3. Damp-mop horizontal surfaces to remove marks and soil.

C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

SECTION 096519 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Quartz floor tile
2. Rubber floor tile.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Sustainable Design Submittals:

1. Environmental Product Declaration: For each product.

2. Environmental Product Declaration: For each product.

3. Environmental Product Declaration: For each product.
4. Third-Party Certifications: For each product.
5. Third-Party Certified Life Cycle Assessment: For each product.

C. Samples: Full-size units of each color, texture, and pattern of floor tile required.

D. Product Schedule: For floor tile. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of floor tile to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Floor Tile: Furnish one box for every 50 boxes or fraction thereof, of each type, color, and pattern of floor tile installed.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store floor tile and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F (10 deg C) or more than 90 deg F (32 deg C). Store floor tiles on flat surfaces.

1.8 FIELD CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F (21 deg C) or more than 95 deg F (35 deg C), in spaces to receive floor tile during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F (13 deg C) or more than 95 deg F (35 deg C).

C. Close spaces to traffic during floor tile installation.

D. Close spaces to traffic for 48 hours after floor tile installation.

E. Install floor tile after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics: For resilient floor tile, as determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.

1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

2.2 QUARTZ FLOOR TILE RF2

A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

1. Altro Group
2. Johnsonite; A Tarkett Company; .
3. .Rikett America
4. Kahrs UpoFloor; Basis of Design
5. Or approved USA made alternate, as approved by Contracting Officer.

B. Tile Standard: ASTM F 1066.

1. Class: Class II, Through-Pattern.
2. ISO 10595 Type: II .

C. Thickness: 8MM.

D. Size: 12 by 24 inches .

E. Colors and Patterns: Basis of Design: Subject to compliance with requirements, provide Kahrs UpoFloor Lines Quartz Tile

2.3 RUBBER FLOOR TILE RF1

A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

1. Johnsonite; A Tarkett Company; .
2. Nora Systems, Inc.; .
3. Basis of Design: Subject to compliance with requirements, provide Ecore Interlocking Rubber Tile

B. Tile Standard: ASTM F 1344, Class I-A, Homogeneous Rubber Tile, solid color.

C. Wearing Surface: Smooth.

D. Size: 24 by 24 inches (610 by 610 mm).

E. Colors and Patterns: Match Government's standard.

2.4 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by floor tile manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by floor tile and adhesive manufacturers to suit floor tile and substrate conditions indicated.

C. Floor Polish: Provide protective, liquid floor-polish products recommended by floor tile manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor tile.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare substrates according to floor tile manufacturer's written instructions to ensure adhesion of resilient products.

B. Concrete Substrates: Prepare according to ASTM F 710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by floor tile manufacturer. Do not use solvents.

3. Moisture Testing: Perform tests so that each test area does not exceed 1000 sq. ft. (304.8 sq. m), and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.

C. Access Flooring Panels: Remove protective film of oil or other coating using method recommended by access flooring manufacturer.

D. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

E. Do not install floor tiles until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient floor tile and installation materials into spaces where they will be installed.

F. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient floor tile.

3.3 FLOOR TILE INSTALLATION

A. Comply with manufacturer's written instructions for installing floor tile.

B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.

1. Lay tiles square with room axis.

C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.

D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.

E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.

F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent marking device.

G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in installation areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.

H. Adhere floor tiles to substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.4 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting floor tile.

B. Perform the following operations immediately after completing floor tile installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum surfaces thoroughly.
3. Damp-mop surfaces to remove marks and soil.

C. Protect floor tile from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Floor Polish: Remove soil, adhesive, and blemishes from floor tile surfaces before applying liquid floor polish.

E. Cover floor tile until Substantial Completion.

END OF SECTION 096519

SECTION 096813 - TILE CARPETING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Modular carpet tile.

B. Related Requirements:

1. Section 096519 "Resilient Tile Flooring" for resilient wall base and accessories installed with carpet tile.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's written data on physical characteristics, durability, and fade resistance.
2. Include manufacturer's written installation recommendations for each type of substrate.

B. Samples: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.

1. Carpet Tile: Full-size Sample.
2. Exposed Edge, Transition, and Other Accessory Stripping: 12-inch- (300-mm-) long Samples.

C. Product Schedule: For carpet tile. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For carpet tile, for tests performed by a qualified testing agency.

C. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:

1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq. yd. (8.3 sq. m).

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An experienced installer who is certified by the International Certified Floorcovering Installers Association at the Commercial II certification level.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Comply with the Carpet and Rug Institute's CRI 104.

1.9 FIELD CONDITIONS

A. Comply with the Carpet and Rug Institute's CRI 104 for temperature, humidity, and ventilation limitations.

B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at levels planned for building occupants during the remainder of the construction period.

C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.

1.10 WARRANTY

A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.

1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
2. Failures include, but are not limited to, the following:

    a. More than 10 percent edge raveling, snags, and runs.
    b. Dimensional instability.
    c. Excess static discharge.
    d. Loss of tuft-bind strength.
    e. Loss of face fiber.
    f. Delamination.
    g. .

3. Warranty Period: 15 years from date of Substantial Completion.

B. All warranties must be issued by the manufacturer as standard published warranties on all types of flooring modules within this document. Second source warranties that involve parties other than the textile composite flooring manufacturer are unacceptable. If the product fails to perform as warranted when installed according to manufacturer installation instructions and maintained according to manufacturer's maintenance instructions, the affected area will be repaired or replaced at the expense of the manufacturer.

1. Lifetime product performance. Will not delaminate along seams or lose more than five (5%) percent by weight of fiber during its useful life.
2. Lifetime static propensity, meaning built-in protection below 3.0 kv as tested under AATCC-134.
3. Lifetime Stain Removal
4. Lifetime Colorfastness (Light and Crocking)

C. Provide flooring material to meet the following test performance criteria as tested by recognized independent testing laboratory. Certified test reports shall be submitted by the manufacturer for each test method. Requirements listed below must be met by all products being submitted for approval.

1. Pill Test / DOC-ff-1-70 (ASTM D-2859) - Requirement: Pass
2. Flooring Radiant Panel / ASTM E-648 - Requirement: Class I (Above .45 w/cm)
3. CRI VOC CHamber Test/INdoor Air Quality test (CRI-IAQ) Green Label Plus TM Test.
4. Lightfastness: Rating of not less than 5 on International Grey Scale after 40 SFU's when tested in accordance with AATCC Test Method 16E.
5. Crockfastness: Minimum stain rating on International Grey Scale of not less than 5 wet or dry when tested in accordance with AATCC Test Method 165.
6. Atmospheric Fading: Burned Gas shall not be less than 5 on INternational Grey Scale after two cycles on each test as per AATCC Test Method 129 Ozone and AATCC Test Method 23.
7. Nose Reduction Coefficient (ASTM C 423-02): NRC Rating of 0.30
8. Impact Insulation Classification (ASTM E 492-09): IIC Rating of 64
9. Slip Resistance (ASTM 1028-96): Complies with ADA Guidelines for level surface
10. Thermal Insulation (ASTM C 518): R-4
11.

PART 2 - PRODUCTS

2.1 CARPET TILE CP1

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. J&J Invision; J&J Industries, Inc. Basis of Design: Kintex Put a Cork in It
2. Patcraft; a division of Shaw Industries, Inc.
3. Shaw Contract Group; a Berkshire Hathaway company.

B. Color: Drum.

C. Pattern: Put a Cork In It.

D. Fiber Content: . Textile Composite

E. Wear Layer: Polyester Applied Pattern

F. Total Thickness: .205 inches

G. Total Weight: 4.5 oz. - 5.2 oz/ sq. ft. for finished carpet tile.

H. Primary Backing/Backcoating: Polyester Felt Cushion .

I. Size: 24 by 24 inches (610 by 610 mm).

J. Sustainable Design Requirements:

1. Sustainable Product Certification: Platinum level certification according to ANSI/NSF 140.

K. Performance Characteristics:

1. Appearance Retention Rating: Heavy traffic, 3.0 minimum according to ASTM D7330.

2. Dimensional Tolerance: Within 1/32 inch (0.8 mm) of specified size dimensions, as determined by physical measurement.
3. Dimensional Stability: 0.2 percent or less according to ISO 2551 (Aachen Test).

4. Colorfastness to Crocking: Not less than 4, wet and dry, according to AATCC 165.

5. Electrostatic Propensity: Less than 3 kV according to AATCC 134.

2.2 INSTALLATION ACCESSORIES

A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.

B. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive type to suit products and subfloor conditions indicated, that comply with flammability requirements for installed carpet tile, and are recommended by carpet tile manufacturer for releasable installation.

1. Adhesives shall have a VOC content of 50 g/L or less.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance.

B. Examine carpet tile for type, color, pattern, and potential defects.

C. Concrete Slabs: Verify that finishes comply with requirements specified in Section 033000 "Cast-in-Place Concrete" and that surfaces are free of cracks, ridges, depressions, scale, and foreign deposits.

1. Moisture Testing: Perform tests so that each test area does not exceed 200 sq. ft. (18.6 sq. m), and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.

a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.

b. Relative Humidity Test: Using in situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.

c. Perform additional moisture tests recommended in writing by adhesive and carpet tile manufacturers. Proceed with installation only after substrates pass testing.

D. Painted Subfloors: Perform bond test recommended in writing by adhesive manufacturer.

1. Access floor substrate is compatible with carpet tile and adhesive if any.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. General: Comply with the Carpet and Rug Institute's CRI 104 and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile.

B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch (3 mm) wide or wider, and protrusions more than 1/32 inch (0.8 mm) unless more stringent requirements are required by manufacturer's written instructions.

C. Concrete Substrates: Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturers.

D. Metal Substrates: Clean grease, oil, soil and rust, and prime if recommended in writing by adhesive manufacturer. Rough sand painted metal surfaces and remove loose paint. Sand aluminum surfaces, to remove metal oxides, immediately before applying adhesive.

E. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

A. General: Comply with the Carpet and Rug Institute's CRI 104, Section 10, "Carpet Tile," and with carpet tile manufacturer's written installation instructions.

B. Installation Method: As recommended in writing by carpet tile manufacturer.

C. Maintain dye-lot integrity. Do not mix dye lots in same area.

D. Maintain pile-direction patterns recommended in writing by carpet tile manufacturer.

E. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.

F. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.

G. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on carpet tile as marked on subfloor. Use nonpermanent, nonstaining marking device.

H. Install pattern parallel to walls and borders.

I. Access Flooring: Stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.

3.4 CLEANING AND PROTECTION

A. Perform the following operations immediately after installing carpet tile:

1. Remove excess adhesive and other surface blemishes using cleaner recommended by carpet tile manufacturer.
2. Remove yarns that protrude from carpet tile surface.
3. Vacuum carpet tile using commercial machine with face-beater element.

B. Protect installed carpet tile to comply with the Carpet and Rug Institute's CRI 104, Section 13.7.

C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 096813

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Floor sealers and paints.

B. Related Requirements:

1. for shop priming structural steel.
2. for shop priming metal gratings.
3. Section 099600 "High-Performance Coatings" for tile-like coatings.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product. Include preparation requirements and application instructions.

1. Include preparation requirements and application instructions.
2. Indicate VOC content.

B. Samples: For each type of topcoat product.

C. Product Schedule: Use same designations indicated on Drawings and in the Interior Painting Schedule to cross-reference paint systems specified in this Section. Include color designations.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F (7 deg C).

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.5 FIELD CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F (10 and 35 deg C).

B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures of less than 5 deg F (3 deg C) above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Sherwin-Williams Company (The).

2.2 PAINT PRODUCTS, GENERAL

A. Material Compatibility:

1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.

B. Low-Emitting Materials: For field applications that are inside the weatherproofing system, 90 percent of paints and coatings shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

C. VOC Emissions: For field applications inside the building, wall paints shall contain no more than half of the chronic REL of VOCs when tested according to the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers." The building concentration of formaldehyde shall not exceed half of the indoor recommended exposure limit or 33 mcg/cu. m and that of acetaldehyde shall not exceed 9 mcg/cu. m.

D. Colors: Match Government's selections:

1. Base Color (P1): Pacer White SW 6098
2. Trim Color (P2): Dark Clove SW 9183
3. Accent Paint (P3): Amazing Gray SW 7044
4. Accent Paint (P4): Stardew SW 9138

2.3 PRIMERS

A. Interior/Exterior Latex Block Filler: Water-based, high-solids, emulsion coating formulated to bridge and fill porous surfaces of exterior concrete masonry units in preparation for specified subsequent coatings.

B. Interior, Institutional Low-Odor/VOC Primer Sealer: Water-based primer sealer with low-odor characteristics and a VOC of less than 10 grams per liter for use on new interior plaster, concrete, and gypsum wallboard surfaces that are subsequently to be painted with latex finish coats.

C. Water-Based Rust-Inhibitive Primer: Corrosion-resistant, water-based-emulsion primer formulated for resistance to flash rusting when applied to cleaned, interior ferrous metals subject to mildly corrosive environments.

2.4 WATER-BASED FINISH COATS

A. Interior, Latex, Institutional Low Odor/VOC, Eggshell: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

B. Interior, Latex, Institutional Low Odor/VOC, Semigloss: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:

1. Concrete: 12 percent.
2. Fiber-Cement Board: 12 percent.
3. Masonry (Clay and CMUs): 12 percent.
4. Gypsum Board: 12 percent.

C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.

D. Verify suitability of substrates, including surface conditions and compatibility, with existing finishes and primers.

E. Proceed with coating application only after unsatisfactory conditions have been corrected.

1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Comply with manufacturer's written instructions and recommendations applicable to substrates and paint systems indicated.

B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.

   1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.

C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.

   1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

3.3 INSTALLATION

A. Apply paints according to manufacturer's written instructions.

   1. Use applicators and techniques suited for paint and substrate indicated.
   2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
   3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
   4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
   5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.

B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Tint undercoats to match color of topcoat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

E. Painting Fire-Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:

   1. Paint the following work where exposed in occupied spaces:

      a. Equipment, including panelboards.

b. Uninsulated metal piping.
c. Uninsulated plastic piping.
d. Pipe hangers and supports.
e. Metal conduit.
f. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
g. Other items as directed by Government.

2. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 CLEANING AND PROTECTION

A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.

1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
3. Allow empty paint cans to dry before disposal.

4. Collect waste paint by type and deliver to recycling or collection facility.

B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Government, and leave in an undamaged condition.

D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 INTERIOR PAINTING SCHEDULE

A. Concrete Substrates, Traffic Surfaces SC1

1. Water-Based Concrete Floor Sealer System IMPI INT 3.2G:

a. First Coat: water based, for concrete floors, matching topcoat t.
b. Topcoat: Water-based concrete floor sealer for concrete floors, MPI #99

B. Steel Substrates:

1. Latex System, Alkyd Primer MPI INT 5.1Q:

a. Prime Coat: Alkyd quick-dry primer for metal .

b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, semigloss.

C. Aluminum (Metal Door Frames)::

1. Latex over Latex Sealer System MPI INT 9.2A:

a. Prime Coat: Latex, interior, matching topcoat.
b. Intermediate Coat: Latex, interior, Matching topcoat.
c. Topcoat: Interior, latex, semigloss.

D. Gypsum Board Substrates:

1. Latex System, Alkyd Primer MPI INT 9.2A:

a. Prime Coat: Interior latex primer sealer.
b. Intermediate Coat: Latex, interior, matching topcoat.
c. Topcoat: Interior, latex, eggshell.

END OF SECTION 099123

SECTION 101423.16 - ROOM-IDENTIFICATION PANEL SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes room-identification signs that are directly attached to the building.

1.3 DEFINITIONS

A. Accessible: In accordance with the accessibility standard.

1.4 COORDINATION

A. Furnish templates for placement of sign-anchorage devices embedded in permanent construction by other installers.

B. Furnish templates for placement of electrical service embedded in permanent construction by other installers.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For room-identification signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
3. Show message list, typestyles, graphic elements, including raised characters and Braille, and layout for each sign at least half size.

C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.

1. Include representative Samples of available typestyles and graphic symbols.

D. Product Schedule: For room-identification signs. Use same designations indicated on Drawings or specified.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For manufacturer.

B. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For signs to include in maintenance manuals.

1.8 FIELD CONDITIONS

A. Field Measurements: Verify locations of anchorage devices embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Deterioration of finishes beyond normal weathering.
b. Deterioration of embedded graphic image.
c. Separation or delamination of sheet materials and components.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Accessibility Standard: Comply with applicable provisions in the ABA standards of the Federal agency having jurisdiction and ICC A117.1.

2.2 ROOM-IDENTIFICATION SIGNS

A. Room-Identification Sign : Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; and as follows:

1. Laminated-Sheet Sign: Photopolymer face sheet with raised graphics laminated to phenolic backing sheet to produce composite sheet.

a. Composite-Sheet Thickness: Manufacturer's standard for size of sign.

b. Surface-Applied Graphics: Applied vinyl film.

c. Color(s): As selected by Government from manufacturer's full range.

2. Mounting: Manufacturer's standard method for substrates indicated with .

3. Text and Typeface: Accessible raised characters and Braille. Finish raised characters to contrast with background color, and finish Braille to match background color.

2.3 SIGN MATERIALS

A. Acrylic Sheet: ASTM D 4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).

B. Vinyl Film: UV-resistant vinyl film with pressure-sensitive, permanent adhesive; die cut to form characters or images as indicated on Drawings.

C. Paints and Coatings for Sheet Materials: Inks, dyes, and paints that are recommended by manufacturer for optimum adherence to surface and are UV and water resistant for colors and exposure indicated.

2.4 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following:

1. Use concealed fasteners and anchors unless indicated to be exposed.
2. For exterior exposure, furnish stainless-steel devices unless otherwise indicated.

B. Adhesive: As recommended by sign manufacturer.

C. Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch (1.14 mm) thick, with adhesive on both sides.

D. Hook-and-Loop Tape: Manufacturer's standard two-part tape consisting of hooked part on sign back and looped side on mounting surface.

E. Magnetic Tape: Manufacturer's standard magnetic tape with adhesive on one side.

2.5 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.

1. Preassemble signs and assemblies in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.

2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
3. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
4. Provide rabbets, lugs, and tabs necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.

B. Subsurface-Applied Graphics: Apply graphics to back face of clear face-sheet material to produce precisely formed image. Image shall be free of rough edges.

2.6 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.

1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
2. Install signs so they do not protrude or obstruct according to the accessibility standard.
3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.

B. Accessibility: Install signs in locations on walls as indicated on Drawings andaccording to the accessibility standard.

C. Mounting Methods:

1. Concealed Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.
2. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.

3. Two-Face Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position, and push to engage tape adhesive.

4. Hook-and-Loop Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply sign component of two-part tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage; push to engage tape adhesive. Keep tape strips 0.250 inch (6.35 mm) away from edges to prevent visibility at sign edges when sign is initially installed or reinstalled. Apply substrate component of tape to substrate in locations aligning with tape on back of sign; push and rub well to fully engage tape adhesive to substrate.
5. Magnetic Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position.

3.2 ADJUSTING AND CLEANING

A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.

B. Remove temporary protective coverings and strippable films as signs are installed.

C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Government.

END OF SECTION 101423.16

SECTION 102113.19 - PLASTIC TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-plastic toilet compartments.

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for blocking.
2. Section 092216 "Non-Structural Metal Framing" for blocking.
3. Section 102800 "Toilet, Bath, and Laundry Accessories" for accessories mounted on toilet compartments.

1.2 COORDINATION

A. Coordinate requirements for overhead supports, blocking, reinforcing, and other supports concealed within wall and ceiling to ensure that toilet compartments can be supported and installed as indicated.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Solid-plastic toilet compartments:

a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.

B. Shop Drawings:

1. Include plans, elevations, sections, details, and attachment details.

2. Show locations of cutouts for compartment-mounted toilet accessories.
3. Show locations of centerlines of toilet fixtures.
4. Show locations of floor drains.
5. Show ceiling grid, ceiling-mounted items, and overhead support or bracing locations.

C. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of toilet compartment.

1. Include Samples of hardware and accessories involving material and color selection.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For toilet compartments.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Extra Stock Materials: Furnish extra materials to Government that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Door Hinges: One hinge(s) with associated fasteners.
2. Latch and Keeper: One latch(es) and keeper(s) with associated fasteners.
3. Door Bumper: One bumper(s) with associated fasteners.
4. Door Pull: One door pull(s) with associated fasteners.
5. Fasteners: 10 fasteners of each size and type.

1.6 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of toilet fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements, and coordinate before fabrication.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain plastic toilet compartments from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Fire Performance: Tested in accordance with, and pass the acceptance criteria of, NFPA 286.

B. Structural Performance: Where grab bars are mounted on toilet compartments, design panels to comply with the following requirements:

1. Panels are able to withstand a concentrated load on grab bar of at least 250 lbf (1112 N) applied at any direction and at any point, without deformation of panel.

C. Regulatory Requirements: Comply with applicable provisions in the Architectural Barriers Act Accessibility Standards for toilet compartments designated as accessible.

2.3 SOLID-PLASTIC TOILET COMPARTMENTS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. ASI Global Partitions.
2. Hadrian Inc.; Zurn Industries, LLC.

3. Scranton Products.

B. Toilet-Enclosure Style: Floor-and-ceiling anchored.

C. Urinal-Screen Style: Wall hung.

D. Door, Panel, and Pilaster Construction: Solid, high-density polyethylene (HDPE) material, not less than 1 inch (25 mm) thick, seamless, with eased edges, and with homogenous color throughout thickness of material. Provide with no-sightline system consisting of door and pilaster lapped edges on strike side of door and door and pilaster lapped edges on hinge side of door (unless continuous hinge is used).

1. Color: One color in each room as selected by Government from manufacturer's full range.

E. Urinal-Screen Construction: Matching panel construction.

F. Pilaster Shoes: Manufacturer's standard design; stainless steel.

G. Pilaster Sleeves (Caps): Manufacturer's standard design; stainless steel.

H. Brackets (Fittings):

1. Full-Height (Continuous) Type: Manufacturer's standard design; solid plastic or extruded aluminum.

a. Plastic Color: Matching panel.

I. Overhead Cross Bracing for Ceiling-Hung Units: As recommended by manufacturer and fabricated from solid plastic.

2.4 HARDWARE AND ACCESSORIES

A. Door Hardware and Accessories: Manufacturer's operating hardware and accessories.

1. Hinges:

a. Manufacturer's paired, wraparound, self-closing type that can be adjusted to hold doors open at any angle up to 90 degrees, allowing emergency access by lifting door.

1) Material, Paired Hinge: Aluminum.

2. Latch and Keeper: Manufacturer's surface-mounted latch unit, designed for emergency access, and with combination rubber-faced door strike and keeper. Provide units that comply with regulatory requirements for accessibility at toilet enclosures designated as accessible.

3. Coat Hook: Manufacturer's combination hook and rubber-tipped bumper, sized to prevent inswinging door from hitting compartment-mounted accessories.

4. Door Bumper: Manufacturer's rubber-tipped bumper at outswinging doors.

5. Door Pull: Manufacturer's unit at outswinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at toilet enclosures designated as accessible.

B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.

C. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless steel, hot-dip galvanized steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.5 MATERIALS

A. Aluminum Castings: ASTM B26/B26M.

B. Aluminum Extrusions: ASTM B221 (ASTM B221M).

C. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304, stretcher-leveled standard of flatness.

D. Stainless Steel Castings: ASTM A743/A743M.

E. Zamac: ASTM B86, commercial zinc-alloy die castings.

2.6 FABRICATION

A. Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.

B. Overhead-Braced Units: Manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters and walls to suit floor and wall conditions. Provide shoes at pilasters to conceal supports and leveling mechanism.

C. Floor-Anchored Units: Manufacturer's standard corrosion-resistant anchoring assemblies at pilasters and walls, with leveling adjustment nuts at pilasters for structural connection to floor. Provide shoes at pilasters to conceal anchorage.

D. Ceiling-Hung Units: Manufacturer's standard corrosion-resistant anchoring assemblies at pilasters and walls, with leveling adjustment nuts at pilasters for connection to structural support above finished ceiling. Provide assemblies that support pilasters from structure without transmitting load to finished ceiling. Provide sleeves (caps) at tops of pilasters to conceal anchorage.

E. Floor-and-Ceiling-Anchored Units: Manufacturer's standard corrosion-resistant anchoring assemblies at pilasters and walls, with leveling adjustment nuts at tops and bottoms of pilasters. Provide shoes and sleeves (caps) at pilasters to conceal anchorage.

F. Urinal-Screen Posts: Manufacturer's standard corrosion-resistant anchoring assemblies at posts and walls, with leveling adjustment nuts at tops and bottoms of posts. Provide shoes and sleeves (caps) at posts to conceal anchorage.

G. Door Size and Swings: Unless otherwise indicated, provide 24-inch- (610-mm-) wide, inswinging doors for standard toilet enclosures and 36-inch- (914-mm-) wide, outswinging doors with a minimum 32-inch- (813-mm-) wide, clear opening for toilet enclosures designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.

1. Confirm location and adequacy of blocking and supports required for installation.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.

1. Maximum Clearances:

a. Pilasters and Panels or Screens: 1/2 inch (13 mm).
b. Panels or Screens and Walls: 1 inch (25 mm).

2. Full-Height (Continuous) Brackets: Secure panels or screens to walls and to pilasters with full-height brackets.

a. Locate bracket fasteners, so holes for wall anchors occur in masonry or tile joints.
b. Align brackets at pilasters with brackets at walls.

B. Floor-and-Ceiling-Anchored Units: Secure pilasters to supporting construction and level, plumb, and tighten. Hang doors and adjust, so doors are level and aligned with panels, when doors are in closed position.

C. Urinal Screens: Attach with anchoring devices to suit supporting structure. Set units level and plumb, rigid, and secured to resist lateral impact.

3.3 ADJUSTING

A. Hardware Adjustment: Adjust and lubricate hardware in accordance with hardware manufacturer's written instructions for proper operation. Set hinges on inswinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on outswinging doors to return doors to fully closed position.

END OF SECTION 102113.19

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Public-use washroom accessories.
2. Public-use shower room accessories.
3. Custodial accessories.

B. Related Requirements:

1. Section 093013 "Ceramic Tiling" for ceramic toilet and bath accessories.

1.2 COORDINATION

A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.

B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Public-use washroom accessories.
2. Public-use shower room accessories.
3. Custodial accessories.

B. Samples: For each exposed product and for each finish specified, full size.

1. Approved full-size Samples will be returned and may be used in the Work.

C. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.

2. Identify accessories using designations indicated.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For accessories to include in maintenance manuals.

1.6 WARRANTY

A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, visible silver spoilage defects.

2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Structural Performance: Design accessories and fasteners to comply with the following requirements:

1. Grab Bars: Installed units are able to resist 250 lbf (1112 N) concentrated load applied in any direction and at any point.
2. Shower Seats: Installed units are able to resist 250 lbf (1112 N) concentrated load applied in any direction and at any point.

2.2 PUBLIC-USE WASHROOM ACCESSORIES

A. Source Limitations: Obtain each type of public-use washroom accessory from single source from single manufacturer.

B. Toilet Tissue (Roll) Dispenser "TA5":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
   a. ASI-American Specialties, Inc.
   b. Bobrick Washroom Equipment, Inc.
   c. Bradley Corporation.

2. Description: Single-roll dispenser.
3. Mounting: Surface mounted.

4. Operation: Noncontrol delivery with standard spindle .
5. Capacity: Designed for jumbo tissue rolls.
6. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

C. Automatic Paper Towel (Roll) Dispenser "TA4":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
   a. ASI-American Specialties, Inc.
   b. Bobrick Washroom Equipment, Inc.
   c. Bradley Corporation.

2. Description: Automatic motion-sensing mechanism with user-adjustable delay and paper towel length; battery powered.
3. Mounting: Surface mounted.
4. Minimum Capacity: Tork H71 roll.
5. Material and Finish: ABS plastic, black.
6. Lockset: Tumbler type.

D. Automatic Soap Dispenser "TA2":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. ASI-American Specialties, Inc.
   b. Bradley Corporation.
   c. Gamco Commercial Restroom Accessories; Bobrick Washroom Equipment, Inc.

2. Description: Automatic dispenser with infrared sensor to detect presence of hands; battery powered; designed for dispensing soap in liquid or lotion form.

3. Mounting: Surface mounted.
4. Capacity: Compatible with ES8 soap refills.

5. Refill Indicator: LED indicator.
6. Low-Battery Indicator: LED indicator.

E. Grab Bar "TA3":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. Aluids; Krome USA Inc.
   b. ASI-American Specialties, Inc.
   c. Bobrick Washroom Equipment, Inc.
   d. Bradley Corporation.
   e. Brey-Krause Manufacturing Co.
   f. Gamco Commercial Restroom Accessories; Bobrick Washroom Equipment, Inc.
   g. Oatey Co.
   h. Tubular Specialties Manufacturing, Inc.

2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel, 0.05 inch (1.3 mm) thick.

    a. Finish: Smooth, ASTM A480/A480M No. 4 finish (satin).

4. OD: 1-1/4 inches (32 mm) .
5. Configuration and Length: As indicated on Drawings.

F. Sanitary-Napkin Disposal Unit "TA6":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. ASI-American Specialties, Inc.
    b. Bobrick Washroom Equipment, Inc.
    c. Bradley Corporation.
    d. Brey-Krause Manufacturing Co.
    e. Gamco Commercial Restroom Accessories; Bobrick Washroom Equipment, Inc.
    f. Tubular Specialties Manufacturing, Inc.

2. Mounting: Surface mounted.
3. Door or Cover: Self-closing, disposal-opening cover and hinged face panel with tumbler lockset.
4. Receptacle: Removable.
5. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

G. Mirror Unit "TA1":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. ASI-American Specialties, Inc.
    b. Bobrick Washroom Equipment, Inc.
    c. Bradley Corporation.
    d. Brey-Krause Manufacturing Co.
    e. Gamco Commercial Restroom Accessories; Bobrick Washroom Equipment, Inc.
    f. Tubular Specialties Manufacturing, Inc.

2. Frame: Stainless steel channel.

    a. Corners: Welded and ground smooth.

3. Size: As indicated on Drawings.

4. Hangers: Manufacturer's standard rigid, tamper and theft resistant.

H. Hook "TA7":

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

    a. ASI-American Specialties, Inc.
    b. Bobrick Washroom Equipment, Inc.
    c. Bradley Corporation.
    d. Brey-Krause Manufacturing Co.
    e. Gamco Commercial Restroom Accessories; Bobrick Washroom Equipment, Inc.
    f. Tubular Specialties Manufacturing, Inc.

2. Description: Single-prong unit.
3. Mounting: Concealed.
4. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

2.3 MATERIALS

A. Stainless Steel: ASTM A240/A240M or ASTM A666, Type 304, 0.031-inch- (0.8-mm-) minimum nominal thickness unless otherwise indicated.

B. Steel Sheet: ASTM A1008/A1008M, Designation CS (cold rolled, commercial steel), 0.036-inch- (0.9-mm-) minimum nominal thickness.

C. Galvanized-Steel Sheet: ASTM A653/A653M, with G60 (Z180) hot-dip zinc coating.

D. Galvanized-Steel Mounting Devices: ASTM A153/A153M, hot-dip galvanized after fabrication.

E. Fasteners: Screws, bolts, and other devices of same material as accessory unit, unless otherwise recommended by manufacturer or specified in this Section, and tamper and theft resistant where exposed, and of stainless or galvanized steel where concealed.

F. Mirrors: ASTM C1503, Mirror Glazing Quality, clear-glass mirrors, nominal 6.0 mm thick.

2.4 FABRICATION

A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install accessories in accordance with manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.

1. Remove temporary labels and protective coatings.

B. Grab Bars: Install to comply with specified structural-performance requirements.

C. Shower Seats: Install to comply with specified structural-performance requirements.

3.2 ADJUSTING AND CLEANING

A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.

B. Clean and polish exposed surfaces in accordance with manufacturer's written instructions.

END OF SECTION 102800

SECTION 104413 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fire-protection cabinets for the following:

a. Portable fire extinguisher.

B. Related Requirements:

1. Section 104416 "Fire Extinguishers" for portable, hand-carried fire extinguishers accommodated by fire-protection cabinets

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Show door hardware, cabinet type, trim style, and panel style. Include roughing-in dimensions and details showing recessed-, semirecessed-, or surface-mounting method and relationships of box and trim to surrounding construction.

B. Shop Drawings: For fire-protection cabinets.

1. Include plans, elevations, sections, details, and attachments to other work.

C. Samples: For each type of exposed finish required.

D. Product Schedule: For fire-protection cabinets. Indicate whether recessed, semirecessed, or surface mounted. Coordinate final fire-protection cabinet schedule with fire-extinguisher schedule to ensure proper fit and function.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For fire-protection cabinets to include in maintenance manuals.

1.4 COORDINATION

A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.

B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain fire-protection cabinets, accessories, and fire extinguishers from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Rated Fire-Protection Cabinets: Listed and labeled to comply with requirements in ASTM E814 for fire-resistance rating of walls where they are installed.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 FIRE-PROTECTION CABINET "FEC"

A. Cabinet Type: Suitable for fire extinguisherextinguisher and hose valve.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Activar Construction Products Group, Inc. - JL Industries.
b. Babcock-Davis.
c. Guardian Fire Equipment, Inc.
d. Nystrom.

B. Cabinet Construction: Nonrated.

C. Cabinet Material: Cold-rolled steel sheet.

D. Semirecessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).

1. Rolled-Edge Trim: 2-1/2-inch (64-mm) backbend depth.

E. Cabinet Trim Material: Steel sheet.

F. Door Material: Steel sheet.

G. Door Style: Fully glazed panel with frame.

H. Door Glazing: Tempered float glass (clear).

I. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.

1. Provide manufacturer's standard.

2. Provide manufacturer's standard hinge, permitting door to open 180 degrees.

J. Accessories:

1. Mounting Bracket: Manufacturer's standard steel, designed to secure fire extinguisher to fire-protection cabinet, of sizes required for types and capacities of fire extinguishers indicated, with plated or baked-enamel finish.

2. Lettered Door Handle: One-piece, cast-iron door handle with the word "FIRE" embossed into face.

3. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated.

a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER."

1) Location: Applied to cabinet door.
2) Application Process: Pressure-sensitive vinyl letters.
3) Lettering Color: Black.
4) Orientation: Vertical.

K. Materials:

1. Cold-Rolled Steel: ASTM A1008/A1008M, Commercial Steel (CS), Type B.

a. Finish: Baked enamel, TGIC polyester powder coat, HAA polyester powder coat, epoxy powder coat, or polyester/epoxy hybrid powder coat, complying with AAMA 2603.
b. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
c. Color: As selected by Government from manufacturer's full range.

2.4 FABRICATION

A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.

1. Weld joints and grind smooth.
2. Miter corners and grind smooth.
3. Provide factory-drilled mounting holes.
4. Prepare doors and frames to receive locks.

5. Install door locks at factory.

B. Cabinet Doors: Fabricate doors according to manufacturer's standards, from materials indicated and coordinated with cabinet types and trim styles.

1. Fabricate door frames with tubular stiles and rails and hollow-metal design, minimum 1/2 inch (13 mm) thick.

2. Fabricate door frames of one-piece construction with edges flanged.
3. Miter and weld perimeter door frames and grind smooth.

C. Cabinet Trim: Fabricate cabinet trim in one piece with corners mitered, welded, and ground smooth.

2.5 GENERAL FINISH REQUIREMENTS

A. Comply with NAAMM's AMP 500, "Metal Finishes Manual for Architectural and Metal Products," for recommendations for applying and designating finishes.

B. Protect mechanical finishes on exposed surfaces of fire-protection cabinets from damage by applying a strippable, temporary protective covering before shipping.

C. Finish fire-protection cabinets after assembly.

D. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine walls and partitions for suitable framing depth and blocking where semirecessed cabinets will be installed.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare recesses for semirecessed fire-protection cabinets as required by type and size of cabinet and trim style.

3.3 INSTALLATION

A. General: Install fire-protection cabinets in locations and at mounting heights indicated or, if not indicated, at height indicated below:

1. Fire-Protection Cabinet Mounting Height: 42 inches (1067 mm) above finished floor to top of fire extinguisher.

B. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.

1. Unless otherwise indicated, provide recessed fire-protection cabinets. If wall thickness is inadequate for recessed cabinets, provide semirecessed fire-protection cabinets.

2. Provide inside latch and lock for break-glass panels.
3. Fasten mounting brackets to inside surface of fire-protection cabinets, square and plumb.

C. Identification:

1. Apply vinyl lettering at locations indicated.
2. Apply vinyl lettering on field-painted fire-protection cabinets after painting is complete.

3.4 ADJUSTING AND CLEANING

A. Remove temporary protective coverings and strippable films, if any, as fire-protection cabinets are installed unless otherwise indicated in manufacturer's written installation instructions.

B. Adjust fire-protection cabinet doors to operate easily without binding. Verify that integral locking devices operate properly.

C. On completion of fire-protection cabinet installation, clean interior and exterior surfaces as recommended by manufacturer.

D. Touch up marred finishes, or replace fire-protection cabinets that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by fire-protection cabinet and mounting bracket manufacturers.

E. Replace fire-protection cabinets that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 104413

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes portable, hand-carried fire extinguishers and mounting brackets for fire extinguishers.

B. Related Requirements:

1. Section 104413 "Fire Protection Cabinets."

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher and mounting brackets.

B. Product Schedule: For fire extinguishers. Coordinate final fire-extinguisher schedule with fire-protection cabinet schedule to ensure proper fit and function.

1.3 INFORMATIONAL SUBMITTALS

A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.

1.5 COORDINATION

A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

1.6 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace fire extinguishers that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Failure of hydrostatic test according to NFPA 10 when testing interval required by NFPA 10 is within the warranty period.

b. Faulty operation of valves or release levers.

2. Warranty Period: Six years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."

B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

1. Provide fire extinguishers approved, listed, and labeled by FM Global.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

A. Fire Extinguishers: Type, size, and capacity for each fire-protection cabinet mounting bracket indicated.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Activar Construction Products Group, Inc. - JL Industries.
b. Babcock-Davis.
c. Guardian Fire Equipment, Inc.
d. Nystrom.
e. Pyro-Chem; brand of Johnson Controls International plc, Building Solutions North America.

2. Source Limitations: Obtain fire extinguishers, fire-protection cabinets, and accessories, from single source from single manufacturer.

3. Valves: Manufacturer's standard.
4. Handles and Levers: Manufacturer's standard.

B. Multipurpose Dry-Chemical Type in Steel Container : UL-rated 3-A:40-B:C, 5-lb (2.3-kg) nominal capacity, with monoammonium phosphate-based dry chemical in enameled-steel container.

2.3 MOUNTING BRACKETS "FE"

A. Mounting Brackets: Manufacturer's standard galvanized steel, designed to secure fire extinguisher to wall or structure, of sizes required for types and capacities of fire extinguishers indicated, with plated or red baked-enamel finish.

1. Source Limitations: Obtain mounting brackets and fire extinguishers from single source from single manufacturer.

B. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated by Government.

1. Identify bracket-mounted fire extinguishers with the words "FIRE EXTINGUISHER" in red letter decals applied to mounting surface.

a. Orientation: Vertical.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine fire extinguishers for proper charging and tagging.

1. Remove and replace damaged, defective, or undercharged fire extinguishers.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Install fire extinguishers and mounting brackets in locations indicated and in compliance with requirements of authorities having jurisdiction.

B. Mounting Brackets: Fasten mounting brackets to surfaces, square and plumb, at locations indicated.

1. Mounting Height: Top of fire extinguisher to be at 42 inches (1067 mm) above finished floor.

END OF SECTION 104416

SECTION 123661.16 - SOLID SURFACING COUNTERTOPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid surface material countertops.
2. Solid surface material backsplashes.

1.2 ACTION SUBMITTALS

A. Product Data: For countertop materials.

B. Shop Drawings: For countertops. Show materials, finishes, edge and backsplash profiles, methods of joining, and cutouts for plumbing fixtures.

C. Samples for Initial Selection: For each type of material exposed to view.

D. Samples for Verification: For the following products:

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For solid surface material countertops to include in maintenance manuals. Include Product Data for care products used or recommended by Installer and names, addresses, and telephone numbers of local sources for products.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate countertops similar to that required for this Project, and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of countertops.

1.6 FIELD CONDITIONS

A. Field Measurements: Verify dimensions of countertops by field measurements after base cabinets are installed but before countertop fabrication is complete.

1.7 COORDINATION

A. Coordinate locations of utilities that will penetrate countertops or backsplashes.

PART 2 - PRODUCTS

2.1 SOLID SURFACE COUNTERTOP MATERIALS

A. Solid Surface Material: Homogeneous-filled plastic resin complying with ISFA 2-01.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. Affinity Surfaces; a brand of Domain Industries, Inc.
b. Avonite Surfaces.
c. Durasein Solid Surface; a brand of Relang International, LLC.
d. E. I. du Pont de Nemours and Company. (Corian - Basis of Design)
e. Formica Corporation.
f. Wilsonart LLC.

2. Type: Provide Standard type unless Special Purpose type is indicated.
3. Colors and Patterns: Corian - Clam Shell or approved USA made equal.

B. Particleboard: ANSI A208.1, Grade M-2.

C. Plywood: Exterior softwood plywood complying with DOC PS 1, Grade C-C Plugged, touch sanded.

2.2 FABRICATION

A. Fabricate countertops according to solid surface material manufacturer's written instructions and to the AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. Grade: Custom.

B. Configuration:

1. Front: Straight, slightly eased at top .
2. Backsplash: Straight, slightly eased at corner.

C. Countertops:

1. 1/2-inch- (12.7-mm-) thick, solid surface material with front edge built up with same material.

D. Backsplashes: [1/2-inch- (12.7-mm-)] [3/4-inch- (19-mm-)] thick, solid surface material.

E. Fabricate tops with shop-applied edges and backsplashes unless otherwise indicated. Comply with solid surface material manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

1. Fabricate with loose backsplashes for field assembly.

F. Joints:

1. Fabricate countertops in sections for joining in field.

G. Cutouts and Holes:

1. Undercounter Plumbing Fixtures: Make cutouts for fixtures using template or pattern furnished by fixture manufacturer. Form cutouts to smooth, even curves.

2.3 INSTALLATION MATERIALS

A. Adhesive: Product recommended by solid surface material manufacturer.

B. Sealant for Countertops: Comply with applicable requirements in Section 079200 "Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates to receive solid surface material countertops and conditions under which countertops will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of countertops.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install countertops level to a tolerance of 1/8 inch in 8 feet (3 mm in 2.4 m), 1/4 inch (6 mm) maximum. Do not exceed 1/64-inch (0.4-mm) difference between planes of adjacent units.

B. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Predrill holes for screws as recommended by manufacturer. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

C. Fasten subtops to cabinets by screwing through subtops into cornerblocks of base cabinets. Shim as needed to align subtops in a level plane.

D. Secure countertops to subtops with adhesive according to solid surface material manufacturer's written instructions. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

E. Bond joints with adhesive and draw tight as countertops are set. Mask areas of countertops adjacent to joints to prevent adhesive smears.

F. Install backsplashes and end splashes by adhering to wall and countertops with adhesive. Mask areas of countertops and splashes adjacent to joints to prevent adhesive smears.

G. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts to prevent damage while cutting. Make cutouts to accurately fit items to be installed, and at right angles to finished surfaces unless beveling is required for clearance. Ease edges slightly to prevent snipping.

1. Seal edges of cutouts in particleboard subtops by saturating with varnish.

H. Apply sealant to gaps at walls; comply with Section 079200 "Joint Sealants."

END OF SECTION 123661.16

SECTION 211313 - FIRE SPRINKLER SYSTEM

PART 1 - GENERAL

1.1 SCOPE

A. Furnish and install an automatic sprinkler system to protect the Bureau of Land Management's Renovation of NIFC 300-JWH Suite 222/227 located in Boise, Idaho as indicated herein and as shown on the preliminary working Plans. Connect system to a water supply of sufficient pressure to ensure full and sustained water discharge immediately from sprinklers when opened by fire at rated heat temperatures. Water supply shall conform to NFPA water supply requirements with considerations given to the reliability of the public or private water supply, taking into account probable minimum pressure conditions. The Contractor shall verify site water pressure before submitting Working Plans.

B. All portions of the systems shall be installed in accordance with the preliminary working plans, Details, and Specifications and as required by jurisdictional authorities and codes. The position is taken that the Government is entitled to a project which meets or exceeds the minimum requirements of nationally recognized fire protection standards. All efforts and installations shall be directed toward this end. Where there is conflict between the preliminary working plans and/or Specifications, and the requirements of the jurisdictional authorities or codes, the conflict shall be brought to the attention of the Government at least ten (10) days prior to Bidding or be resolved at no cost to the Government. If the Contractor has not identified conflicts to the Government, he shall be responsible for complying with the most stringent code or preliminary working drawing methods.

C. Substitution requests shall be submitted to the Government at least ten (10) days prior to Bidding and shall conform to the instructions set forth in the Substitution Procedures Section of Division 01.

D. The intent of these Specifications is to describe the complete systems to be installed, including minor details of work or materials not specifically mentioned or shown, but necessary for the successful operation and completion of the installation.

E. Work to be performed under this Section shall include, but not be limited to the following:

1. Automatic fire sprinkler systems:

a. Wet pipe flow switch system.

1) Pipe and fittings.
2) Hangers and supports.
3) Earthquake bracing.
4) Valves.
5) Alarms.
6) Flow and Tamper Switches.
7) Specialties.

F. The following areas shall be furnished with an automatic fire protection system of type or types indicated or as required:

1. Revise existing fire sprinkler system at basement and level one for renovations.

1.2 RELATED WORK

A. All work performed under this Section of the specifications shall be subject to the requirements of both the General and Special Conditions.

B. Related work specified elsewhere:

1. Digital, Addressable Fire Alarm Section 283100

C. Examine the complete bid document drawing set and the above referenced Specification parts thoroughly before submitting a Proposal for accomplishment of work in this Section.

1.3 REGULATORY AGENCIES

A. The term jurisdictional authority used in this Section of the Specification shall include, as applicable, but not be limited to the following:

1. Boise Building Department.
2. Boise Fire Marshal
3. Insurance Services Office or Insuring Authority Having Jurisdiction.
4. Government.
5. Engineer of Record.

B. The design and installation of all systems of fire protection shall conform to all requirements of applicable codes and publications herein defined:

1. International Building Code (2024).
2. International Fire Code (2024)
3. NFPA 13 (2025).
4. NFPA 25 (2024).
5. NFPA 72 (2025).
6. All State and local ordinances.
7. Underwriters' Laboratories.
8. American Society of Testing Materials.
9. American National Standards Institute.

1.4 SUBMITTALS

A. The successful Contractor shall provide submittal data as required under other portions of this Specification. Submittals shall conform to the instructions set forth in the General and Special Conditions of these Specifications entitled Shop Drawings and Submittals.

1. The "Working plans" shall be submitted to the Government for approval of intent of "Preliminary Plans" per state of Idaho requirements.

B. Installer Reliability: The Installer shall possess a valid State of Idaho Fire Sprinkler Contractor's license. The Installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past three years.

C. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL, FM, or other nationally recognized testing laboratory for the specific purpose for which it is used.

D. Submit Working Plans (Floor Plans - detailed Working Plans), showing dimensions, ducts, lights, or other items affecting the fire protection systems to jurisdictional agencies for review and approval. All items identified in NFPA 13 for proper Working Plans shall be complied with. The Government will reject all Submittals not in compliance. Submit all necessary Working Plans to authorities having jurisdiction. Concurrently an electronic submittal of scaled Working Plans shall be sent to the Government for review. After approvals from jurisdictional agencies have been returned to the Contractor, they shall be submitted to the Government for final acceptance. These final acceptance sets shall have all agencies' stamps of review and acceptance.

E. Working Plans shall be prepared in AutoCAD, Revit, or compatible software.

F. The Government's review will be for general location only. It will be the Contractor's responsibility to check all drawings for interferences and to do shop fabrication from measurements taken at the job site.

G. Work on the Project shall not begin until Plans have been reviewed by Government.

H. One (1) electronic submittal set of full catalog information and to-scale Working Plans shall be submitted for approval for all materials intended for use on this Project. Catalog information indicating more than one item shall be highlighted to clearly indicate the proposed equipment.

I. Record Drawings required per paragraph 1.6 and Operation and Maintenance Manuals required per paragraph 1.7 shall be submitted for approval.

J. Prepare detailed Working Plans that are signed by a NICET Level III, Level IV Sprinkler Technician or a Registered Professional Engineer practicing in the field of Fire Protection Engineering. As the Working Drawing and Calculation review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial Submittals will not be accepted. Material Submittals shall be approved prior to purchase or delivery to the job site. Suitably bind Submittals in notebooks or binders and provide index referencing the appropriate Specification Section. Submittals shall include, but not be limited to, the following:

1. Qualifications:

a. Provide a copy of the installing Contractor's fire sprinkler state Contractor's license.

b. Provide a copy of the NICET certification for the NICET Level III, Level IV Sprinkler Technician who prepared and signed the detailed Working Plans or the Idaho License number of the Registered Professional Engineer practicing in the field of Fire Protection Engineering.

2. Hydraulic calculations in accordance with NFPA 13 and with design information given on the preliminary working plans and in the specifications.

K. Manufacturer's Data Sheets: Provide for materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheet describes items in addition to that item being submitted, clearly identify proposed item on the sheet.

L. Re-submittals: A summary of submittal changes will be required for each re-submittal. This summary should briefly reiterate the original comment and give specific direction on how the issue was resolved. Changes made that are not a result of submittal review comments shall be clearly identified in this summary as well.

1.5 JOB CONDITIONS

A. The Contractor shall investigate the structural, mechanical, electrical, and finished conditions affecting the piping, and shall arrange the equipment accordingly; furnish required fittings, offsets and accessories. Route fire protection piping to avoid interference with duct work and drain piping. In the event it becomes necessary to make field changes in pipe locations due to building construction, the Contractor shall consult with the Government before making any changes. Any such changes required shall be made without added cost to Government.

B. The Contractor shall determine, and be responsible for, the proper locations and type of inserts for hangers, chases, sleeves, and other openings in the construction required for fire protection work, and shall obtain this information well in advance of the construction progress to avoid delay of the work.

C. All fees and permits specifically required for fire protection work, not obtained by others as specified elsewhere shall be applied for and paid for by this Contractor.

D. All systems of fire protection shall be installed by a licensed (for the location of installation) Fire Protection Contractor, fully experienced in fire protection installation as specified herein. Fire Protection Contractors may be required to provide in writing, specific information as to successfully completed projects and references to show cause as to why they should be considered acceptable to the Government.

E. Fire protection system shutdowns shall be coordinated and implemented by the Contractor as preplanned impairments per NFPA 25 Chapter 15 and its related Annexes. Where any fire protection system will be placed out of service for more than 10 hours in a 24-hour period, an approved fire watch shall be provided until the system is restored to normal working order. Impairments shall be coordinated with the Government and other trades to minimize conflict and inconvenience.

1.6 RECORD DRAWINGS

A. One approved set of preliminary working plans and one set of Working Plans shall be maintained on the job at all times.

B. One set of "As-Built" Drawings shall be kept on the job at all times. "As-Built" Drawings shall be kept current daily. "As-Built" Drawings shall be available at all times to Government for review and use.

C. One reproducible set of "As-Built" Drawings shall be provided to the Government upon completion of the work.

1.7 OPERATION AND MAINTENANCE MANUALS

A. One (1) set electronic submittal of operating and maintenance instructions shall be provided to the Government upon completion. Manuals shall include, as a minimum, the following:

1. "As-Built" Drawings.
2. Revised hydraulic calculations based on "As-Built" Drawings.
3. Catalog cut sheets of all materials installed.
4. Equipment maintenance manuals.
5. Contractor's Material and Test Certificates.
6. Certification of Government Training.
7. Contractor Guarantee and Warranty.
8. "As-Built" AutoCAD drawing (.dwg) file or equal on CD disk.

B. One (1) factory-bound edition of NFPA 25 shall be provided to the Government.

1.8 TRAINING

A. The Fire Protection Contractor shall instruct the Government in the operation of the systems. Instruction shall continue until the Government is fully satisfied and understands the operation of the system.

B. Contractor shall obtain Government's dated signature that all training has been accomplished and is acceptable to the Government.

1.9 GUARANTEES AND WARRANTIES

A. The Fire Protection Contractor shall guarantee to the Government in writing, all equipment and workmanship for a period of one (1) year after the fire protection system has been placed in continuous service and has been accepted by all authorities having jurisdiction.

B. The Fire Protection Contractor shall not be held responsible for improper or negligent maintenance by the Government after operating and maintenance indoctrination has been given to the Government.

PART 2 - PRODUCTS

2.1 SPRINKLERS

A. Acceptable Manufacturers:

1. Tyco.
2. Victaulic.
3. Viking.
4. Reliable.

B. Install sprinklers from reviewed Working Plans.

C. All sprinklers shall be of similar design and from a single manufacturer.

D. The operating temperature of sprinklers shall be as required by the specific location of installation.

E. Extended coverage sprinklers shall not be used unless specified in the preliminary working plans.

F. Sprinklers shall conform to the requirements of NFPA 13, as indicated in the preliminary working plans, and as follows:

1. Brass upright or pendent may be used in all attic, mechanical, storage or other non-public spaces.
2. Recessed shall be used in all finished areas, offices, patient rooms, etc. unless otherwise noted.
3. Where surface mounted obstructions will not allow for recessed installation, two-piece escutcheons may be used to extend sprinklers to a maximum deflector distance as allowed by NFPA or U.L. listing with prior approval of the Government.
4. Sidewall sprinklers may be used in accordance with listing and jurisdictional requirements.
5. All sprinklers shall be quick-response glass bulb type when applicable.
6. Dry pendent sprinklers shall be used in all areas subject to freezing when the sprinklers are supplied from a heated area wet system.
7. Sprinklers with deflectors less than 7-feet-6-inches above the finished floor shall have sprinkler guards.
8. Pendent sprinklers in mechanical rooms, electrical rooms, and janitor closets shall have sprinkler guards.

G. Escutcheons for seismic areas shall be oversized expansion plate type to allow 1 inch clearance

2.2 FLEXIBLE SPRINKLER HOSE FITTINGS

A. Acceptable Manufacturers:

1. FlexHead Industries, Inc.

2. VicFlex Victaulic.

B. Flexible sprinkler hose fittings for use in commercial suspended and gypsum board ceilings may be used as a contractors' option to hard pipe armover and drops per NFPA and installed per the manufacturers' listing.

C. All flexible sprinkler hose fittings shall be UL listed and FM approved.

D. Provide flexible hose assemblies and end fittings with 100 percent Type 304 Stainless steel, with a 175 psi maximum rated pressure. Flexible hose assemblies shall be fully welded non mechanical fittings, braided, leak tested with minimum 1inch true bore internal corrugated hose diameter.

E. Flexible hose assemblies shall have G90 galvanized steel ceiling bracket, direct attachment type, having integrated snap on clip ends positively attached to the ceiling using tamper resistant screws. Provide flexible hose attachment with removable hub type with set screw.

2.3 PIPE AND FITTINGS-INTERIOR

A. Interior piping for automatic sprinkler system shall conform to NFPA 13 and as follows:

1. Pipe and fittings shall be products manufactured in the United States of America.
2. Wet system sprinkler piping above ground with threaded fittings shall be Schedule 40 black steel pipe with a corrosion resistance rating equal to or greater than 1.0. Threaded thinwall pipe with a CRR less than 1.0 shall not be used.
3. Fittings for threaded and coupled pipe shall consist of cast iron, ductile iron, or malleable threaded fittings joined with Teflon tape thread sealing compound or pipe joint compound per manufacture installation requirements. Pressure rating of fittings shall be as required for application.
4. Wet system sprinkler piping above ground with grooved fittings for sizes 2-1/2-inch and larger shall be roll grooved Schedule 10 black steel pipe with a corrosion resistance rating equal to or greater than 1.0
5. Fittings for grooved end pipe shall consist of Tyco Grinnell Series ductile iron or equal ductile iron couplings and fittings in accordance with NFPA 13. Gaskets shall be as recommended by the manufacturer for the application.

B. Fittings for plain end pipe shall not be used.

C. Mechanical Outlet or Strap Outlet type fittings shall not be used in new system installations. Mechanical Outlet acceptable to tie to existing piping. U-bolt style not acceptable

D. CPVC piping shall not be used.

E. Alternate piping systems approved by NFPA 13 may be allowed with prior approval of the Government.

F. All piping shall be identified with pre-manufactured piping identification labels.

G. All drain piping and fittings shall be galvanized.

2.4 HANGERS AND SUPPORTS

A. Space pipe hangers in accordance with the requirements of NFPA 13. Construct hangers, hanger rods, inserts and clamps as approved by the same.

2.5 EARTHQUAKE BRACING

A. Furnish and install all earthquake bracing as required by NFPA 13, Authority Having Jurisdiction, Government's insurer, and as follows:

1. Seismic Coefficient (Cp) force factor requirements are provided and shown on the preliminary working plans.
2. In structures of seismic design categories D the requirements for the hangers and piping shall follow the requirements of ASCE standard 7-10.
3. Install seismic restraints on piping. Comply with NFPA 13 requirements for seismic-restraint device materials and installation.

2.6 VALVES

A. Acceptable Manufacturers:

1. Mueller.
2. Kennedy.
3. Nibco.
4. Tyco.
5. AGF.
6. United Brass.
7. Victaulic.
8. Watts.

B. Gate valves shall be approved indicating type as required by NFPA 13. Check valves shall be as required by NFPA 13. Test and drain valves shall be approved brass globe, angle, or ball valves. Locate sprinkler system isolation valves as shown on the drawings and as required per NFPA 13 complete with a tamper alarm switch.

C. Interior:

1. Ball Valve:

a.	Make:	Watts
b.	Sizes:	1/4-inch to 2 inches.
c.	Ends:	Threaded.
d.	Model:	WBV

2. Drain Valves Interior:

a. Make: United Brass
b. Sizes: 1/2-inch through 2 inches.
c. Ends: Threaded.
d. Model: 125 SUL

2.7 SPECIALTIES

A. Fire Seals:

1. Where piping passes through walls, floors or other building construction which by code requires a fire rating, approved fire rated assemblies shall be used. Proposed protection shall be submitted for approval. Plans shall clearly indicate details and locations of required protection.

B. Escutcheon Plates:

1. Where exposed piping passes through finish work, chrome plated wall plates or other wall plate finishes acceptable to the Government, shall be installed. All wall plates shall be metal.
2. Split wall plates or escutcheons shall only be used in remodel projects. Split wall plates or escutcheons shall be installed to fit snugly around piping. All wall plates shall be metal.
3. Solid galvanized wall plates shall be used at both sides of all exterior walls.

C. Valve Identification:

1. All valves within the building shall have permanently marked identification signs provided in accordance with NFPA 13 standards. Signs shall be manufactured and not hand written. Signs shall be hung with galvanized or chrome chain.

D. Piping Identification:

1. All piping shall be identified at 40' maximum spacing and a minimum of one identification label per room. Labels shall be Seton wrap around style or equal.

2.8

PART 3 - EXECUTION

3.1 DESIGN CRITERIA

A. Working Plan Information: Provide working plans, calculations, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13 and the following:

1. Recommendations in annexes shall be treated as requirements.

2. Sprinkler Protection: To determine spacing and sizing, apply the following coverage classifications:

   a. See occupancy design table and notes on the preliminary working plans.
   b. Request clarification from Government for any hazard classification not identified.

3. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Provide a hydraulic placard for each zone, occupancy hazard, and each floor of the building minimum.
4. The room design method is not allowed unless indicated in the preliminary working plans.
5. Quick response sprinkler reductions are not allowed unless indicated on the preliminary working plans.
6. Minimum design areas shall be 1500 sf, unless otherwise indicated on the preliminary working plans.
7. Flexible sprinkler assemblies shall be included in hydraulic calculations using the UL listing equivalent length of Schedule 40, nominal 1 inch diameter pipe, with a minimum of three (3) bends.
8. Hydraulic calculated demand including hose stream requirements shall fall no less than 10 psi below the available water supply curve.
9. Velocities shall not exceed 20 feet per second in any pipe.
10. Water Supply: Base water supply on a flow test as indicated on the preliminary working plans.

B. The preliminary working plans indicate approximate locations of sprinklers and conceptual routing of piping. Final spacing and layout is the responsibility of this contractor and final approval of the layout and routing is to be by the Government.

C. The fire protection system supplier shall design the piping to supply the system. Piping shall be laid out so as not to interfere with the installation of other piping, ductwork, light fixtures, or equipment.

D. The entire sprinkler system is not shown on Plans. The intent is to provide complete sprinkler systems as required. This Contractor shall be responsible for surveying the site, existing construction, new construction, and the complete contract document set and prepare Working Plans for the total system.

E. All piping shall be run concealed wherever possible. Where piping is run exposed, special notation on Contractor's Working Plans to that effect shall be evident and conspicuous on the Working Plans. Any piping determined to be a problem shall be relocated at no cost to the Government.

F. System piping to be hydraulically calculated in accordance with Chapter 28.

3.2 INSTALLATION

A. Furnish sprinkler system with the following components:

1. Systems shall be equipped with a supervised isolation valve and an approved flow alarm connected to the building fire alarm system.
2. A main drain shall be installed on each riser or sectional zone control valve and shall drain to the exterior or to an adequate drain connection.
3. Auxiliary drains shall be provided when a change in piping direction prevents drainage of sections of branch lines or mains through the main drain valve.
4. A test pipe of not less than 1 inch diameter terminating in an orifice equivalent to one sprinkler shall be provided for each system or sectional zone.
5. Exterior alarm shall be installed as near as practical to Fire Department Connection with identification sign. Exterior horn/strobe shall be wired to alarm system.

B. Installation shall be accomplished by the licensed Contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.

C. Delivery, storage, and handling of materials to and on the construction site shall be consistent with good practices, manufacturers' requirements, and the following procedures. Components shall be protected from moisture, dirt, and debris. Storage shall be elevated above grade and protected from damage. Provide adequate ventilation to prevent condensation. Deliver piping and valves with protective caps installed; if removal of protection is required for inspection, reinstall for storage. Store piping in a manner to prevent sagging or bending. Any deficiencies discovered in the delivery, storage, or handling of materials shall be recorded and remedied immediately in such a way as to minimize damage and preserve the integrity of the system and components.

D. Installation of Piping:

1. Ensure the ends of all sprinkler system pipes are smooth and free of any burrs or fins. To help reduce the potential for accelerated internal pipe corrosion of longitudinally welded black steel pipe, install such pipe with the weld line rotated at least 45 degree in relationship to the floor (for reference, the weld line points at the floor at 0 degree).
2. Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In any situations where bending of the pipe is required, use a standard pipe-bending template.
3. Steel-Piping, Cut-Grooved Joints: Cut square-edge groove in end of pipe according to AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings according to AWWA C606 for steel-pipe joints.
4. Install concealed piping in spaces that have finished ceilings. Pipe installed near equipment shall not block or encroach on equipment access or impede maintenance. Where ceiling mounted equipment exists, install sprinklers so as not to obstruct the movement or operation of the equipment or block access. Sidewall sprinklers may need to be utilized.
5. Locate piping in stairways as near to the ceiling as possible to prevent tampering by unauthorized personnel, and to provide a minimum headroom clearance of seven feet six inches. To prevent an obstruction to egress, provide piping clearances in accordance with NFPA 101.
6. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 inches and larger end connections.

7. Flanged Joints: Select appropriate gasket material in size, type, and thickness suitable for water service. Join flanges with gasket and bolts according to ASME B31.9.
8. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

    a. Apply appropriate tape or thread compound to external pipe threads.
    b. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.

9. Dissimilar-Material Piping Joints: Make joints using adapters compatible with materials of both piping systems.

E. Installation of Valves:

1. Install unions adjacent to each valve in pipes NPS 2 inches and smaller.
2. Install valves having threaded connections with unions at each piece of equipment arranged to allow easy access, service, maintenance, and equipment removal without system shutdown. Provide separate support where necessary.
3. Install valves in horizontal piping with stem at or above the pipe center.
4. Install valves in position to allow full stem movement.

F. Welding: Conform to the requirements and recommendations of NFPA 13.

G. Drains: Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drum drips and drains where necessary and required by NFPA 13. Locations of drains shall be indicated on shop and as-built drawings. A map of all drain locations shall be permanently affixed to a visible location near the fire riser to aid in their identification.

H. Affix cutout disks, which are created by cutting holes in the walls of pipe for flow switches and non-threaded pipe connections to the respective waterflow switch or pipe connection near to the pipe from where they were cut.

I. Sleeves: Provide for pipes passing through masonry or concrete Schedule 10 pipe. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material per UL assembly listings.

J. Seals: Seal all interior fire rated wall penetrations with fire caulk. Seal all exterior wall penetrations with fire calk or foam insulation and silicone sealing to maintain the fire rating and thermal/moisture integrity of the wall system.

K. Securely attach identification signs and tags to control valves, drain valves, and test valves. Locate hydraulic placard information signs at each sectional control valve where there is a zone water flow switch. A map of any isolation valves installed in the building at locations other than on the fire riser in the riser room shall be permanently affixed to a visible location near the fire riser to aid in their identification.

L. Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.

M. Where details of installation are not given, the installation shall be made using manufacturer's recommended practices or at the direction of the Government.

N. This Contractor shall complete the fire protection systems ready for operation, in all respects, as soon as possible. When system is complete and ready for continuous operation, activate the system for its intended use. After system has been activated for continuous use, water charges will be paid by the Government.

O. This Contractor shall remove from the building all rubbish and unused materials due to or connected with this installation. This contractor is responsible for proper removal and disposal of all demolition items, as indicated on the plans or no longer required for a complete operational system, in conformance with the Division 01 - General Requirements.

P. All piping and components shall be cleaned and left ready for painting in good condition and free of damage, leakage, and corrosion.

3.3 TESTING

A. This Contractor shall call for inspection and complete Contractor's Material and Test Certificates per NFPA 13 "Systems Acceptance". The Forms shall be signed by the Authority Having Jurisdiction.

B. The new piping of the sprinkler system shall be hydrostatically tested at not less than 200 psig pressure for a period of not less than two (2) hours with no pressure drop in the system. Test blanks shall be used per NFPA 13. The existing system shall be tested at the working pressure per NFPA 13.

C. All testing shall be witnessed by the Government.

D. Where jurisdictional authority's or NFPA 13 standards are more stringent than the above test, they shall prevail.

END OF SECTION 211313

Cushing Terrell

OWNER'S INFORMATION CERTIFICATE

Name / Address of property to be protected with sprinkler protection:
BLM NIFC 300 Building - Suite 222/227
Boise, Idaho

Name of Owner: Bureau of Land Management

Existing or planned construction is:

- ☒ Fire resistive or noncombustible
- ☐ Wood frame or ordinary (masonry walls with wood beams)
- ☐ Unknown

Is the system installation intended for one of the following special occupancies:

Aircraft hangar	☐Yes	☒No
Fixed guideway transit system	☐Yes	☒No
Race track stable	☐Yes	☒No
Marine terminal, pier, or wharf	☐Yes	☒No
Airport terminal	☐Yes	☒No
Aircraft engine test facility	☐Yes	☒No
Power plant	☐Yes	☒No
Water-cooling tower	☐Yes	☒No

If the answer to any of the above is "yes" the appropriate NFPA standard should be referenced for sprinkler density / area criteria.

Indicate whether any of the following special materials are intended to be present:

Flammable or combustible liquid	☐Yes	☒No
Aerosol products	☐Yes	☒No
Nitrate film	☐Yes	☒No
Pyroxylin plastic	☐Yes	☒No
Compressed or liquefied gas cylinders	☐Yes	☒No
Liquid or solid oxidizers	☐Yes	☒No
Organic peroxide formulations	☐Yes	☒No
Idle pallets	☐Yes	☒No

If the answer to any of the above is "yes" describe type, location, arrangement, and intended maximum quantities.

Indicate whether the protection is intended for one of the following specialized occupancies or areas:

Spray area or mixing room	☐Yes	☒No
Solvent extraction	☐Yes	☒No
Laboratory using chemicals	☐Yes	☒No
Oxygen-fuel gas system for welding or cutting	☐Yes	☒No
Acetylene cylinder charging	☐Yes	☒No
Production or use of compressed or liquefied gasses	☐Yes	☒No
Commercial cooking operation	☐Yes	☒No
Class A hyperbaric chamber	☐Yes	☒No
Cleanroom	☐Yes	☒No
Incinerator or waste handling system	☐Yes	☒No
Linen handling system	☐Yes	☒No
Water-cooling tower	☐Yes	☒No

If the answer to any of the above is "yes" describe the type, location, arrangement, and intended maximum quantities.

Will there be any storage of products over 12 ft. (3.6 m.) in height? ☐Yes ☒No

If the answer is "yes" describe product, intended storage arrangement, and height.

Will there be any storage of plastic rubber or similar products over 5 ft. (1.5 m.) high except as described above?

☐Yes ☒No

If the answer is "yes" describe product, intended storage arrangement, and height.

Assumptions:

I certify that I have knowledge of the intended use of the property and that the above information is correct.

Signature of Owner's Representative or Agent: Cushing Terrell Inc. - See stamped Preliminary Working Plans

Date: 3/25/2026

Relationship and firm of Agent (please print): Fire Protection Engineer

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulating the following plumbing piping services:

1. Domestic cold-water piping.
2. Domestic hot-water piping.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Products shall not contain asbestos, lead, mercury, or mercury compounds.

B. Flexible Elastomeric: Closed-cell or expanded-rubber materials; suitable for maximum use temperature between minus 70 deg F and 220 deg F. Comply with ASTM C534/C534M, Type I for tubular materials.

2.3 ADHESIVES

A. Flexible Elastomeric and Polyolefin Adhesive: Solvent-based adhesive.

1. Flame-spread index shall be 25 or less and smoke-developed index shall be 50 or less as tested in accordance with ASTM E84.
2. Wet Flash Point: Below 0 deg F.
3. Service Temperature Range: 40 to 200 deg F.
4. Color: Black.

2.4 SEALANTS

A. Materials shall be as recommended by the insulation manufacturer and shall be compatible with insulation materials, jackets, and substrates.

B. Joint Sealants:
   1. Permanently flexible, elastomeric sealant.

   2. Service Temperature Range: Minus 58 to plus 176 deg F.
   3. Color: White or gray.

2.5 TAPES

A. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.

   1. Width: 2 inches.
   2. Thickness: 6 mils.
   3. Adhesion: 64 ounces force/inch in width.
   4. Elongation: 500 percent.
   5. Tensile Strength: 18 lbf/inch in width.

2.6 SECUREMENTS

A. Bands:

   1. Stainless Steel: ASTM A240/A240M, Type 304; 0.015 inch thick, 1/2 inch wide with wing seal or closed seal.

B. Staples: Outward-clinching insulation staples, nominal 3/4-inch-wide, stainless steel or Monel.

C. Wire: 0.080-inch nickel-copper alloy or 0.062-inch soft-annealed, galvanized steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.2 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping, including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and of thicknesses required for each item of pipe system, as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

D. Install insulation with longitudinal seams at top and bottom (12 o'clock and 6 o'clock positions) of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.

G. Keep insulation materials dry during storage, application, and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with the contract documents.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Cut insulation in a manner to avoid compressing insulation.

K. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

L. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches in similar fashion to butt joints.

3.3 INSTALLATION OF CELLULAR-GLASS INSULATION

A. Insulation Installation on Pipe Fittings and Elbows:

1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available. Secure according to manufacturer's written instructions.
2. When preformed sections of insulation are not available, install mitered or routed sections of cellular-glass insulation. Secure insulation materials with wire or bands.

3.4 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

B. Insulation Installation on Pipe Flanges:

1. Install pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as that of pipe insulation.
4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install sections of pipe insulation and miter if required in accordance with manufacturer's written instructions.
2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install prefabricated valve covers manufactured of same material as that of pipe insulation when available.
2. When prefabricated valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties, and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.5 INDOOR PIPING INSULATION SCHEDULE

A. Domestic Cold Water:

1. NPS 1 and Smaller: Insulation shall be the following:

a. Flexible Elastomeric: 1 inch thick.

2. NPS 1-1/4 and Larger: Insulation shall be the following:

a. Flexible Elastomeric: 1 inch thick.

B. Domestic Hot and Recirculated Hot Water:

1. NPS 1-1/4 and Smaller: Insulation shall be the following:

a. Flexible Elastomeric: 1 inch thick.

2. NPS 1-1/2 and Larger: Insulation shall be the following:

a. Flexible Elastomeric: 1 inch thick.

END OF SECTION 220719

SECTION 221116 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper tube and fittings - domestic water.
2. Transition fittings - domestic water.
3. Dielectric fittings - domestic water.

1.2 QUALITY ASSURANCE

A. Installer Qualifications: Installers of pressure-sealed joints are to be certified by pressure-seal joint manufacturer as having been trained and qualified to join piping with pressure-seal pipe couplings and fittings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Domestic water piping, tubing, fittings, joints, and appurtenances intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act, with requirements of authorities having jurisdiction, and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 PIPING MATERIALS

A. Potable-water piping and components are to comply with NSF 14, NSF 61, and NSF 372.

2.3 COPPER TUBE AND FITTINGS - DOMESTIC WATER

A. Drawn-Temper Copper Tube: ASTM B88, Type L.

B. Annealed-Temper Copper Tube: ASTM B88, Type L.

C. Cast-Copper, Solder-Joint Fittings: ASME B16.18, pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.

D. Wrought-Copper, Solder-Joint Fittings: ASME B16.22, pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.

E. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends. Do not use solder joints on pipe sizes greater than NPS 4.

F. Cast Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces and solder-joint or threaded ends. Do not use solder joints on pipe sizes greater than NPS 4.

G. Wrought Copper Unions: ASME B16.22. Do not use solder joints on pipe sizes greater than NPS 4.

H. Pressure-Seal-Joint Fittings, Copper or Bronze - Domestic Water:

1. Source Limitations: Obtain pressure-seal-joint fittings, copper or bronze, from single manufacturer.
2. Housing: Copper.
3. O-Rings and Pipe Stops: EPDM.
4. Tools: Manufacturer's special tools.
5. Minimum 200 psig working-pressure rating at 250 deg F.

I. Copper-Tube, Push-on-Joint Fittings - Domestic Water:

1. Source Limitations: Obtain copper-tube, push-on-joint fittings from single manufacturer.
2. Description:

a. Cast-copper fitting complying with ASME B16.18 or wrought-copper fitting complying with ASME B 16.22.
b. Stainless steel teeth and EPDM-rubber, O-ring seal in each end instead of solder-joint ends.

2.4 TRANSITION FITTINGS - DOMESTIC WATER

A. General Requirements:

1. Same size as pipes to be joined.
2. Pressure rating at least equal to pipes to be joined.
3. End connections compatible with pipes to be joined.

B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.

C. Sleeve-Type Transition Couplings - Domestic Water: AWWA C219.

1. Source Limitations: Obtain sleeve-type transition couplings from single manufacturer.

D. Plastic-to-Metal Transition Fittings - Domestic Water:

1. Source Limitations: Obtain plastic-to-metal transition fittings from single source.
2. Description:

a. CPVC or PVC one-piece fitting with manufacturer's Schedule 80 equivalent dimensions.
b. One end with threaded brass insert and one solvent-cement-socket end.

E. Plastic-to-Metal Transition Unions - Domestic Water:

1. Source Limitations: Obtain plastic-to-metal transition unions from single manufacturer.
2. Description:

a. CPVC or PVC four-part union.
b. Brass threaded end.
c. Solvent-cement-joint plastic end.
d. Rubber O-ring.
e. Union nut.

2.5 DIELECTRIC FITTINGS - DOMESTIC WATER

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Unions - Domestic Water:

1. Source Limitations: Obtain dielectric unions from single manufacturer.
2. Standard: ASSE 1079.

3. Pressure Rating: 125 psig minimum at 180 deg F.
4. End Connections: Solder-joint copper alloy and threaded ferrous.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.

B. Flanges and unions may be used for aboveground piping joints unless otherwise indicated.

C. Fitting Option: Extruded-tee connections and brazed joints may be used on aboveground copper tubing.

D. Aboveground domestic water piping, NPS 2 (DN 50) and smaller is to be the following:
1. Drawn-temper copper tube, ASTM B88, Type M; copper pressure-seal-joint fittings; and pressure-sealed joints.
2. Drawn-temper copper tube, ASTM B88, Type L; copper push-on joint fittings; and push-on joints.

3.2 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.

B. Install domestic water piping level without pitch and plumb.

C. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.

D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.

F. Install piping to permit valve servicing.

G. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.

H. Install piping free of sags and bends.

I. Install fittings for changes in direction and branch connections.

3.3 JOINT CONSTRUCTION

A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.

C. Threaded Joints: Thread pipe with tapered pipe threads in accordance with ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

   1. Apply appropriate tape or thread compound to external pipe threads.
   2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.

D. Brazed Joints for Copper Tubing: Comply with CDA's "Copper Tube Handbook," "Brazed Joints" chapter.

E. Soldered Joints for Copper Tubing: Apply ASTM B813, water-flushable flux to end of tube. Join copper tube and fittings in accordance with ASTM B828 or CDA's "Copper Tube Handbook."

F. Pressure-Sealed Joints for Copper Tubing: Join copper tube and pressure-seal fittings with tools and procedure recommended by pressure-seal-fitting manufacturer. Leave insertion marks on pipe after assembly.

G. Push-on Joints for Copper Tubing: Clean end of tube. Measure insertion depth with manufacturer's depth gage. Join copper tube and push-on joint fittings by inserting tube to measured depth.

H. Extruded-Tee Connections: Form tee in copper tube in accordance with ASTM F2014. Use tool designed for copper tube; drill pilot hole, form collar for outlet, dimple tube to form seating stop, and braze branch tube into collar.

3.4 INSTALLATION OF TRANSITION FITTINGS

A. Install transition couplings at joints of dissimilar piping.

B. Transition Fittings in Underground Domestic Water Piping:

1. Fittings for NPS 1-1/2 (DN 40) and Smaller: Fitting-type coupling.
2. Fittings for NPS 2 (DN 50) and Larger: Sleeve-type coupling.

C. Transition Fittings in Aboveground Domestic Water Piping NPS 2 (DN 50) and Smaller: Plastic-to-metal transition fittings or unions.

3.5 INSTALLATION OF DIELECTRIC FITTINGS

A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.

B. Dielectric Fittings for NPS 2 (DN 50) and Smaller: Use dielectric couplings or nipples.

3.6 INSTALLATION OF HANGERS AND SUPPORTS

A. Install hangers for copper, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

B. Install vinyl-coated hangers for PVC pipe, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

C. Support horizontal piping within 12 inches of each fitting.

D. Support vertical runs of copper to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

E. Support vertical runs of PVC pipe to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.7 PIPING CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.

C. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:

1. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by plumbing code.

3.8 CLEANING

A. Clean and disinfect potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:

a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
b. Fill and isolate system in accordance with either of the following:

1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.

c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
d. Repeat procedures if biological examination shows contamination.
e. Submit water samples in sterile bottles to authorities having jurisdiction.

B. Clean non-potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging procedures prescribed by authorities having jurisdiction or; if methods are not prescribed, follow procedures described below:

a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
b. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.

C. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from authorities having jurisdiction.

D. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

3.9 ADJUSTING

A. Perform the following adjustments before operation:

1. Close drain valves, hydrants, and hose bibbs.
2. Open shutoff valves to fully open position.
3. Open throttling valves to proper setting.
4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.

    a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.
    b. Adjust calibrated balancing valves to flows indicated.

5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.
8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.10 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Piping Inspections:

    a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
    b. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:

        1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after installation and before setting fixtures.
        2) Final Inspection: Arrange for authorities having jurisdiction to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.

    c. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
    d. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

2. Piping Tests:

a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
d. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.

e. Hydrostatic testing and documentation of test results for polypropylene (PP-R and PP-RCT) pipe to be in accordance with manufacturer's written instructions and submitted to manufacturer upon successful completion per warranty requirements.
f. Repair leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.
g. Prepare reports for tests and for corrective action required.

B. Domestic water piping will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

END OF SECTION 221116

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. PVC pipe and fittings.
2. Specialty pipe fittings.

1.2 ACTION SUBMITTALS

A. Product data.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans and elevations or Building Information Model (BIM) drawn to scale, showing items described in this Section and coordinated with all building trades.

B. Seismic Qualification Certificates: For waste and vent piping, accessories, and components, from manufacturer.

C. Field quality-control reports.

1.4 WARRANTY

A. Listed manufacturers to provide labeling and warranty of their respective products.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

A. Piping materials to bear label, stamp, or other markings of specified testing agency.

B. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.2 PVC PIPE AND FITTINGS

A. Comply with NSF 14 for plastic piping components. Include "NSF-dwv" marking for plastic drain, waste, and vent piping and "NSF-sewer" marking for plastic sewer piping. All pipe located in the plenum space is required to meet ASTM E84 with a flame spread index of 25 and smoke develop index of 50.

B. Solid-Wall PVC Pipe: ASTM D2665 drain, waste, and vent.

C. Cellular-Core PVC Pipe: ASTM F891, Schedule 40.

D. PVC Socket Fittings: ASTM D2665, made in accordance with ASTM D3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.

E. Adhesive Primer: ASTM F656.

F. Solvent Cement: ASTM D2564.

2.3 SPECIALTY PIPE FITTINGS

A. Transition Couplings:

1. General Requirements: Fitting or device for joining piping with small differences in ODs or of different materials. Include end connections of same size as and compatible with pipes to be joined.

2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.

3. Unshielded, Nonpressure Transition Couplings:

   a. Standard: ASTM C1173.
   b. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
   c. End Connections: Same size as and compatible with pipes to be joined.
   d. Sleeve Materials:
      1) For Plastic Pipes: ASTM F477, elastomeric seal or ASTM D5926 PVC.
      2) For Dissimilar Pipes: ASTM D5926 PVC or other material compatible with pipe materials being joined.

4. Shielded, Nonpressure Transition Couplings:

   a. Standard: ASTM C1460.
   b. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.
   c. End Connections: Same size as and compatible with pipes to be joined.

PART 3 - EXECUTION

3.1 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.

1. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations.

2. Install piping as indicated unless deviations to layout are approved on coordination drawings.

B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.

C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

E. Install piping to permit valve servicing.

F. Install piping at indicated slopes.

G. Install piping free of sags and bends.

H. Install fittings for changes in direction and branch connections.

I. Install piping to allow application of insulation.

J. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends.

1. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical.
2. Use long-turn, double Y-branch, and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe.

    a. Straight tees, elbows, and crosses may be used on vent lines.

3. Do not change direction of flow more than 90 degrees.
4. Use proper size of standard increasers and reducers if pipes of different sizes are connected.

    a. Reducing size of waste piping in direction of flow is prohibited.

K. Install soil and waste and vent piping at the following minimum slopes unless otherwise indicated:

1. Building Sanitary Waste: Two percent downward in direction of flow for piping smaller NPS 3; 1 percent downward in direction of flow for piping NPS 3 and larger.
2. Horizontal Sanitary Waste Piping: Two percent downward in direction of flow.
3. Vent Piping: One percent down toward vertical fixture vent or toward vent stack.

L. Install aboveground PVC piping in accordance with ASTM D2665.

M. Install underground PVC piping in accordance with ASTM D2321.

N. Plumbing Specialties:

1. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary waste gravity-flow piping.

    a. Install cleanout fitting with closure plug inside the building in sanitary drainage force-main piping.

O. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

3.2 JOINT CONSTRUCTION

A. Plastic, Nonpressure-Piping, Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings in accordance with the following:

1. Comply with ASTM F402 for safe-handling practice of cleaners, primers, and solvent cements.
2. ABS Piping: Join in accordance with ASTM D2235 and ASTM D2661 appendixes.
3. PVC Piping: Join in accordance with ASTM D2855 and ASTM D2665 appendixes.

B. Joint Restraints and Sway Bracing:

1. Provide joint restraints and sway bracing for storm drainage piping joints to comply with the following conditions:

    a. Provide axial restraint for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction, branches, and changes in diameter greater than two pipe sizes.
    b. Provide rigid sway bracing for pipe and fittings 4 inches and larger, upstream and downstream of all changes in direction 45 degrees and greater.
    c. Provide rigid sway bracing for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction and branch openings.

3.3 INSTALLATION OF HANGERS AND SUPPORTS

A. Install hangers for PVC piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

B. Support horizontal piping and tubing within 12 inches of each fitting and coupling.

C. Support vertical runs of PVC piping to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.4 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.

C. Connect waste and vent piping to the following:

1. Plumbing Fixtures: Connect waste piping in sizes indicated, but not smaller than required by plumbing code.
2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.

D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

E. Make connections in accordance with the following unless otherwise indicated:

1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.

3.5 FIELD QUALITY CONTROL

A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.

B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.

C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

D. Test sanitary waste and vent piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.

    a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.

2. Leave uncovered and unconcealed new, altered, extended, or replaced waste and vent piping until it has been tested and approved.

    a. Expose work that was covered or concealed before it was tested.

3. Roughing-in Plumbing Test Procedure: Test waste and vent piping except outside leaders on completion of roughing-in.

    a. Close openings in piping system and fill with water to point of overflow, but not less than 10 ft. head of water.

b. From 15 minutes before inspection starts to completion of inspection, water level must not drop.
c. Inspect joints for leaks.

4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight.

a. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1 inch wg.
b. Use U-tube or manometer inserted in trap of water closet to measure this pressure.
c. Air pressure must remain constant without introducing additional air throughout period of inspection.
d. Inspect plumbing fixture connections for gas and water leaks.

5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
6. Prepare reports for tests and required corrective action.

3.6 CLEANING AND PROTECTION

A. Clean interior of piping. Remove dirt and debris as work progresses.

B. Protect sanitary waste and vent piping during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.

C. Place plugs in ends of uncompleted piping at end of day and when work stops.

D. Exposed PVC Piping: Protect plumbing vents exposed to sunlight with two coats of water-based latex paint.

E. Repair damage to adjacent materials caused by waste and vent piping installation.

3.7 PIPING SCHEDULE

A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.

B. Soil and waste piping to be the following:

1. Solid-wall or Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.

END OF SECTION 221316

SECTION 224100 - PLUMBING FIXTURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Kitchen sinks.
2. Sink faucets.
3. Supply fittings.
4. Waste fittings.
5. Grout.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Include diagrams for power, signal, and control wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted plumbing fixtures.

B. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Domestic water faucets intended to convey or dispense water for human consumption are to comply with the SDWA, requirements of authorities having jurisdiction, and NSF 61 and NSF 372, or to be certified in compliance with NSF 61 and NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 KITCHEN SINKS

A. Stainless Steel Kitchen Sink, Counter Mounted:

B. Fixture:

1. ASME A112.19.3/CSA B45.4 for stainless steel kitchen sinks.
2. Overall Dimensions: 15 3/4” X 30”.

3. Metal Thickness: 0.050 inch.

4. Bowl:

   a. Dimensions: 11 ¼” X 9 ½”.
   b. Drain: 3-1/2-inch crumb cup.

      1) Location: Centered in bowl.

C. Supply Fittings: Comply with requirements in "Supply Fittings" Article.

D. Waste Fittings: Comply with requirements in "Waste Fittings" Article, except include continuous waste for multibowl sinks.

1. Disposer: Not required.
2. Hot-Water Dispenser: Not required.

2.3 SINK FAUCETS

A. NSF Standard: Comply with NSF 61 and NSF 372 for faucet materials that will be in contact with potable water.

B. General-Duty, Solid-Brass Faucets:

2.4 SUPPLY FITTINGS

A. NSF Standard: Comply with NSF 61 and NSF 372 for faucet materials that will be in contact with potable water.

B. Standard: ASME A112.18.1/CSA B125.1.

C. Bidet Lavatory Bar Sink Kitchen Sink and Laundry Tray Supply Fittings:

1. Supply Piping: Chrome-plated-brass pipe or chrome-plated-copper tube matching water-supply piping size. Include chrome-plated wall flange.
2. Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression stop with inlet connection matching water-supply piping type and size.

   a. Operation: Wheel handle.

3. Risers:

   a. Size:
      1) NPS 1/2 for kitchen sinks.

2.5 WASTE FITTINGS

A. Standard: ASME A112.18.2/CSA B125.2.

B. Drain:

1. Grid type with NPS 1-1/2 straight tailpiece for standard kitchen sinks.

C. Trap:

1. Size:

a. NPS 1-1/2 for kitchen sinks.

2. Material:

a. ASTM F409 ABS or PVC two-piece trap and waste to wall and wall flange.

PART 3 - EXECUTION

3.1 INSTALLATION OF RESIDENTIAL PLUMBING FIXTURES

A. Install plumbing fixtures level and plumb in accordance with roughing-in drawings.

B. Install counter-mounting fixtures in and attached to casework.

C. Install water-supply piping with stop on each supply to each fixture to be connected to water distribution piping. Attach supplies to supports or substrate within pipe spaces behind fixtures. Install stops in locations where they can be easily reached for operation.

1. Use ball or gate valves if supply stops are not specified with fixture.

D. Install faucet flow-control fittings with specified flow rates and patterns in faucet spouts if faucets are not available with required rates and patterns. Include adapters if required.

E. Install traps on fixture outlets.

1. Omit trap on fixtures with integral traps.
2. Omit trap on indirect wastes unless otherwise indicated.

F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations.

G. Seal joints between plumbing fixtures, counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color.

3.2 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with sanitary and vent piping requirements specified in Section 221316 “Sanitary Waste and Vent Piping.”

3.3 ADJUSTING

A. Operate and adjust plumbing fixtures and controls. Replace damaged and malfunctioning fixtures, fittings, and controls.

B. Adjust water pressure at faucets to produce proper flow.

3.4 CLEANING AND PROTECTION

A. After completing installation of plumbing fixtures, inspect and repair damaged finishes.

B. Clean plumbing fixtures, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.

C. Provide protective covering for installed plumbing fixtures and fittings.

D. Do not allow use of plumbing fixtures for temporary facilities unless approved in writing by Government.

END OF SECTION 224100

SECTION 224216.13 - COMMERCIAL LAVATORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vitreous-china, wall-mounted lavatories.
2. Automatically operated lavatory faucets.
3. Supply fittings.
4. Waste fittings.
5. Lavatory supports.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Include diagrams for power, signal, and control wiring of automatic faucets.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 VITREOUS-CHINA, WALL-MOUNTED LAVATORIES

A. Lavatory - Rectangular, Vitreous China, Wall Mounted, with Back:

1. Fixture:

a. Standard: ASME A112.19.2/CSA B45.1.
b. Type: For wall hanging.
c. Nominal Size: Rectangular, 20 by 18 inches.
d. Faucet-Hole Punching: One hole.
e. Faucet-Hole Location: Top.
f. Color: White.
g. Mounting Material: Chair carrier.

2. Faucet: Lavatory Faucets – Automatic Type.

3. Support: Type II, concealed-arm lavatory carrier with escutcheons.
4. Lavatory Mounting Height: Handicapped/elderly in accordance with ICC A117.1.

2.2 AUTOMATICALLY OPERATED LAVATORY FAUCETS

A. Lavatory faucets intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), with requirements of the Authority Having Jurisdiction (AHJ), and with NSF 61/NSF 372, or be certified in compliance with NSF 61/NSF 372 by an American National Standards Institute (ANSI) accredited third-party certification body, that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. Lavatory Faucets - Automatic Type: Hardwired Electronic Sensor Operated, Mixing,:

1. Standards: ASME A112.18.1/CSA B125.1 and UL 1951.
2. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
3. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and fixture receptor.

4. Body Type: Single hole.
5. Body Material: Commercial, solid-brass, or die-cast housing with brazed copper and brass waterway.
6. Finish: Polished chrome plate.
7. Maximum Flow Rate: 0.5 gpm.
8. Mounting Type: Deck, concealed.
9. Spout: Rigid type.

10. Spout Outlet: Aerator.
11. Drain: Not part of faucet.

2.3 SUPPLY FITTINGS

A. NSF Standard: Comply with NSF 61 and NSF 372 for supply-fitting materials that will be in contact with potable water.

B. Standard: ASME A112.18.1/CSA B125.1.

C. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless steel wall flange.

D. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.

E. Operation: Wheel handle.

F. Risers:

1. NPS 1/2.

2. ASME A112.18.6/CSA B125.6, braided- or corrugated-stainless steel, flexible hose riser.

2.4 WASTE FITTINGS

A. Standard: ASME A112.18.2/CSA B125.2.

B. Drain: Grid type with NPS 1-1/4 offset and straight tailpiece.

C. Trap:

1. Size: NPS 1-1/4.
2. Material:

a. Chrome-plated, two-piece, cast-brass trap and swivel elbow with 0.032-inch-thick brass tube to wall; and chrome-plated, brass or steel wall flange.

2.5 LAVATORY SUPPORTS

A. Lavatory Carrier:

1. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install lavatories level and plumb in accordance with roughing-in drawings.

B. Install supports, affixed to building substrate, for wall-mounted lavatories.

C. Install accessible wall-mounted lavatories at handicapped/elderly mounting height for people with disabilities or the elderly, in accordance with ICC A117.1.

D. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."

E. Seal joints between lavatories, counters, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

F. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.2 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturers, but not factory mounted in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.4 ADJUSTING

A. Operate and adjust lavatories and controls. Replace damaged and malfunctioning lavatories, fittings, and controls.

B. Install new batteries in battery-powered, electronic-sensor mechanisms.

3.5 CLEANING AND PROTECTION

A. After completing installation of lavatories, inspect and repair damaged finishes.

B. Clean lavatories, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.

C. Provide protective covering for installed lavatories and fittings.

D. Do not allow use of lavatories for temporary facilities unless approved in writing by Government.

END OF SECTION 224216.13

SECTION 230130.52 - EXISTING HVAC AIR DISTRIBUTION SYSTEM CLEANING

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes cleaning existing HVAC air-distribution equipment, ducts, plenums, and system components.

1.2 DEFINITIONS

A. ACAC: American Council for Accredited Certification.

B. AIHA-LAP: American Industrial Hygiene Association Lab Accreditation Program

C. ASCS: Air systems cleaning specialist.

D. CESB: Council of Engineering and Scientific Specialty Boards.

E. CMI: Certified Microbial Investigator.

F. CMC: Certified Microbial Consultant.

G. CMR: Certified Microbial Remediator.

H. CMRS: Certified Microbial Remediation Supervisor.

I. EMLAP: Environmental Microbiology Laboratory Accreditation Program.

J. IEP: Indoor Environmental Professional.

K. IICRC: Institute of Inspection, Cleaning, and Restoration Certification.

L. NADCA: National Air Duct Cleaners Association.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.5 QUALITY ASSURANCE

A. ASCS Qualifications: A certified member of NADCA.

1. Certification: Employ an ASCS certified by NADCA on a full-time basis.
2. Supervisor Qualifications: Certified as an ASCS by NADCA.

B. IEP Qualifications: CMI who is certified by ACAC and accredited by CESB.

C. IEP Qualifications: CMC who is certified by ACAC and accredited by CESB.

D. CMR Qualifications: Certified by ACAC and accredited by CESB.

E. CMRS Qualifications: Certified by ACAC and accredited by CESB.

PART 2 - PRODUCTS

2.1 HVAC CLEANING AGENTS

A. Description:

1. Formulated for each specific soiled coil condition that needs remedy.

2.2 ANTIMICROBIAL SURFACE TREATMENT

A. Description: Specific product selected shall be as recommended by the IEP based on the specific antimicrobial needs of the specific Project conditions.

1. Formulated to kill and inhibit growth of microorganisms.
2. EPA-registered for use in HVAC systems and for the specific application in which it will be used.
3. Have no residual action after drying, with zero VOC off-gassing.
4. OSHA compliant.
5. Treatment shall dry clear to allow continued visual observation of the treated surface.

PART 3 - EXECUTION

3.1 PREPARATION

A. Preparation work shall apply to existing duct, duct accessories, and air system equipment within 3 feet of work being performed on the existing duct system.

B. Inspect HVAC air-distribution equipment, ducts, plenums, and system components to determine appropriate methods, tools, and equipment required for performance of the Work.

C. Cleaning Plan: Prepare a written plan for air-distribution system cleaning that includes strategies and step-by-step procedures.

D. Proceed with work only after conditions detrimental to performance of the Work have been corrected and cleaning plan has been approved.

E. Use the existing service openings, as required for proper cleaning, at various points of the HVAC system for physical and mechanical entry and for inspection.

F. Mark the position of manual volume dampers and air-directional mechanical devices inside the system prior to cleaning.

3.2 CLEANING

A. Cleaning shall apply to existing duct, duct accessories, and air system equipment within 3 feet of work being performed on the existing duct system.

B. Comply with NADCA ACR.

C. Perform electrical lockout and tagout according to Government's standards or authorities having jurisdiction.

D. Remove non-adhered substances and deposits from within the HVAC system.

E. Systems and Components to Be Cleaned: All air-moving and -distribution equipment.

F. Collect debris removed during cleaning. Ensure that debris is not dispersed outside the HVAC system during the cleaning process.

1. Particulate Collection: For particulate collection equipment, include adequate filtration to contain debris removed. Locate equipment downwind and away from all air intakes and other points of entry into the building.
2. HEPA filtration with 99.97 percent collection efficiency for particles sized 0.3 micrometer or larger shall be used where the particulate collection equipment is exhausting inside the building,

G. Control odors and mist vapors during the cleaning and restoration process.

H. Mark the position of manual volume dampers and air-directional mechanical devices inside the system prior to cleaning. Restore them to their marked position on completion of cleaning.

I. System components shall be cleaned so that all HVAC system components are visibly clean. On completion, all components must be returned to those settings recorded just prior to cleaning operations.

J. Clean all air-distribution devices, registers, grilles, and diffusers.

K. Clean non-adhered substance deposits according to NADCA ACR and the following:

1. Clean air-handling units, airstream surfaces, components, condensate collectors, and drains.
2. Ensure that a suitable operative drainage system is in place prior to beginning wash-down procedures.

3. Clean evaporator coils, reheat coils, and other airstream components.

L. Air-Distribution Systems:

1. Create service openings in the HVAC system as necessary to accommodate cleaning.
2. Mechanically clean air-distribution systems specified to remove all visible contaminants, so that the systems are capable of passing the HVAC System Cleanliness Tests (see NADCA ACR).

M. Debris removed from the HVAC system shall be disposed of according to applicable Federal, state, and local requirements.

N. Mechanical Cleaning Methodology:

1. Source-Removal Cleaning Methods: The HVAC system shall be cleaned using source-removal mechanical cleaning methods designed to extract contaminants from within the HVAC system and to safely remove these contaminants from the facility. No cleaning method, or combination of methods, shall be used that could potentially damage components of the HVAC system or negatively alter the integrity of the system.

   a. Use continuously operating vacuum-collection devices to keep each section being cleaned under negative pressure.
   b. Cleaning methods that require mechanical agitation devices to dislodge debris that is adhered to interior surfaces of HVAC system components shall be equipped to safely remove these devices. Cleaning methods shall not damage the integrity of HVAC system components or damage porous surface materials, such as duct and plenum liners.

2. Cleaning Mineral-Fiber Insulation Components:

   a. Fibrous-glass thermal or acoustical insulation elements present in equipment or ductwork shall be thoroughly cleaned with HEPA vacuuming equipment while the HVAC system is under constant negative pressure and shall not be permitted to get wet according to NADCA ACR.
   b. Cleaning methods used shall not cause damage to fibrous-glass components and will render the system capable of passing the HVAC System Cleanliness Tests (see NADCA ACR).
   c. Fibrous materials that become wet shall be discarded and replaced.

O. Coil Cleaning:

1. See NADCA ACR, "Coil Surface Cleaning" Section. Type 1, or Type 1 and Type 2, cleaning methods shall be used to render the coil visibly clean and capable of passing coil cleaning verification.
2. Coil drain pans shall be subject to NADCA ACR, "Non-Porous Surfaces Cleaning Verification." Ensure that condensate drain pans are operational.
3. Electric-resistance coils shall be de-energized, locked out, and tagged before cleaning.
4. Cleaning methods shall not cause any appreciable damage to, cause displacement of, inhibit heat transfer, or cause erosion of the coil surface or fins, and shall comply with coil manufacturer's written recommendations.
5. Rinse thoroughly with clean water to remove any latent residues.

P. Application of Antimicrobial Treatment:

1. Apply antimicrobial agents and coatings if active fungal growth is determined by the IEP to be at Condition 2 or Condition 3 status according to IICRC S520, as analyzed by a laboratory accredited by AIHA-LAP with an EMLAP certificate, and with results interpreted by an IEP. Apply antimicrobial agents and coatings according to manufacturer's written recommendations and EPA registration listing after the removal of surface deposits and debris.
2. Apply antimicrobial treatments and coatings after the system is rendered clean.
3. Apply antimicrobial agents and coatings directly onto surfaces of interior ductwork.
4. Microbial remediation shall be performed by a qualified CMR and CMRS.

3.3 CLEANLINESS VERIFICATION

A. Cleaning verification shall apply to existing duct, duct accessories, and air system equipment within 3 feet of work being performed on the existing duct system.

B. Verify cleanliness according to NADCA ACR, "Verification of HVAC System Cleanliness" Section.

C. Surface-Cleaning Verification: Perform visual inspection for cleanliness. If no contaminants are evident through visual inspection, the HVAC system shall be considered clean. If visible contaminants are evident through visual inspection, those portions of the system where contaminants are visible shall be re-cleaned and subjected to re-inspection for cleanliness.

D. Verification of Coil Cleaning: Coil will be considered clean if the coil is free of foreign matter and chemical residue, based on a thorough visual inspection.

E. Prepare a written cleanliness verification report. Include areas of concern in the cleanliness report of issues that may be present outside of the renovation areas.

3.4 RESTORATION

A. Restoration shall apply to existing duct, duct accessories, and air system equipment within 3 feet of work being performed on the existing duct system.

B. Restoration shall also apply to repairs required to correct damages made to existing equipment during renovation operations.

C. Restore and repair HVAC air-distribution equipment, ducts, plenums, and components according to NADCA ACR, "Restoration and Repair of Mechanical Systems" Section.

D. Restore service openings capable of future reopening. Comply with requirements in Section 233113 "Metal Ducts."

E. Replace damaged insulation according to Section 230713 "Duct Insulation."

F. Ensure that closures do not hinder or alter airflow.

G. New closure materials, including insulation, shall match opened materials and shall have removable closure panels fitted with gaskets and fasteners.

H. Restore manual volume dampers and air-directional mechanical devices inside the system to their marked position on completion of cleaning.

END OF SECTION 230130.52

SECTION 230523 - GENERAL-DUTY VALVES FOR HVAC PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Globe valves.
2. Gate valves.

1.2 DEFINITIONS

A. CWP: Cold working pressure.

B. EPDM: Ethylene-propylene-diene monomer.

C. FKM: Fluoroelastomer.

D. NBR: Nitrile butadiene rubber (also known as "Buna-N").

E. NRS: Nonrising stem.

F. OS&Y: Outside screw and yoke.

G. PTFE: Polytetrafluoroethylene.

H. RPTFE: Reinforced polytetrafluoroethylene.

I. RS: Rising stem.

J. SWP: Steam working pressure.

1.3 ACTION SUBMITTALS

A. Product data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. ASME Compliance:

1. ASME B1.20.1 for threads for threaded-end valves.
2. ASME B16.1 for flanges on iron valves.
3. ASME B16.5 for flanges on steel valves.
4. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.

5. ASME B16.18 for cast-copper solder-joint connections.
6. ASME B16.22 for wrought copper and copper-alloy solder-joint connections.
7. ASME B16.34 for flanged- and threaded-end connections.
8. ASME B16.51 for press joint connections.
9. ASME B31.1 for power piping valves.
10. ASME B31.9 for building services piping valves.

B. Provide bronze valves made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are unacceptable.

C. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.

D. Valve Sizes: Same as upstream piping unless otherwise indicated.

E. Valve Bypass and Drain Connections: MSS SP-45.

F. Wrench: Furnish the Government with one wrench for every five plug valves, for each size square plug-valve head.

G. Valve Actuator Type:

1. Gear Actuator: For quarter-turn ball valves NPS 4 and larger.
2. Hand Lever: For quarter-turn ball valves smaller than NPS 4.

H. Valves in Insulated Piping:

1. Provide 2-inch extended neck stems.
2. Provide extended operating handles with nonthermal-conductive covering material and protective sleeves that allow operation of valves without breaking vapor seals or disturbing insulation.
3. Provide memory stops that are fully adjustable after insulation is applied.

2.2 GLOBE VALVES

A. Globe Valves, Threaded or Soldered Ends - Bronze, Class 125:

1. Standard: MSS SP-80, Type 1.
2. CWP Rating: 200 psig.
3. Body Material: ASTM B62, bronze with integral seat and screw-in bonnet.
4. Ends: Threaded or soldered. See Part 3 globe valve schedule articles.
5. Stem: Bronze.
6. Disc: PTFE.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

B. Globe Valves, Threaded Ends - Bronze, Class 150:

1. Standard: MSS SP-80, Type 2.

2. CWP Rating: 300 psig.
3. Body Material: ASTM B62, bronze with integral seat and union-ring bonnet.
4. Ends: Threaded.
5. Stem: Bronze.
6. Disc: PTFE or stainless steel. See Part 3 globe valve schedule articles.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

2.3 GATE VALVES

A. Gate Valves, Threaded or Soldered Ends - Bronze, NRS, Class 125:

1. Standard: MSS SP-80, Type 1.
2. CWP Rating: 200 psig.
3. Body Material: ASTM B62, bronze with integral seat and screw-in bonnet.
4. Ends: Threaded or soldered. See Part 3 gate valve schedule articles.
5. Stem: Bronze.
6. Disc: Solid wedge; bronze.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

B. Gate Valves, Threaded or Soldered Ends - Bronze, RS, Class 125:

1. Standard: MSS SP-80, Type 2.
2. CWP Rating: 200 psig.
3. Body Material: ASTM B62, bronze with integral seat and screw-in bonnet.
4. Ends: Threaded or soldered. See Part 3 gate valve schedule articles.
5. Stem: Bronze.
6. Disc: Solid wedge; bronze.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

C. Gate Valves, Threaded Ends - Bronze, NRS, Class 150:

1. Standard: MSS SP-80, Type 1.
2. CWP Rating: 300 psig.
3. Body Material: ASTM B62, bronze with integral seat and union-ring bonnet.
4. Ends: Threaded.
5. Stem: Bronze.
6. Disc: Solid wedge, bronze.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

D. Gate Valves, Threaded Ends - Bronze, RS, Class 150:

1. Standard: MSS SP-80, Type 2.
2. CWP Rating: 300 psig.
3. Body Material: ASTM B62, bronze with integral seat and union-ring bonnet.
4. Ends: Threaded.
5. Stem: Bronze.

6. Disc: Solid wedge, bronze.
7. Packing: Asbestos free.
8. Handwheel: Malleable iron, bronze, or aluminum.

E. Gate Valves, Press Ends - Bronze:

1. Standard: MSS SP-80.
2. CWP Rating: Minimum 200 psig.
3. Body Material: Bronze with integral seat and union-ring bonnet.
4. Ends: Press.
5. Press Ends Connection Rating: Minimum 200 psig.
6. Stem: Brass or bronze RS or NRS. See Part 3 gate valve schedule articles.
7. Disc: Solid wedge, bronze.
8. Packing: Graphite.
9. Port: Full.
10. Handwheel: Malleable iron, bronze, or aluminum.

PART 3 - EXECUTION

3.1 INSTALLATION OF VALVES

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Provide support of piping adjacent to valves such that no force is imposed upon valves.

C. Locate valves for easy access and where not blocked by equipment, other piping, or building components.

D. For valves in horizontal piping, install valves with stem at or above center of pipe.

E. Install valves in position that does not project into aisles or block access to other equipment.

F. Install valves in position to allow full stem and actuator or manual operator movement.

G. Verify that joints of each valve have been properly installed and sealed to ensure that there is no leakage or damage.

H. Install check valves for proper direction of flow and as follows:

1. Check Valves, Swing Type: In horizontal position with hinge pin level.

I. Valve Tags: Comply with requirements for valve tags and schedules in Section 230553 "Identification for HVAC Piping and Equipment."

J. Adhere to manufacturer's written installation instructions. When soldering or brazing valves, do not heat valves above maximum permitted temperature. Do not use solder with melting point temperature above valve of manufacturer's written recommended maximum.

3.2 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

A. If valves with specified SWP classes or CWP ratings are unavailable, the same types of valves with higher SWP classes or CWP ratings may be substituted.

B. Select valves with the following end connections:

1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules.
2. For Copper Tubing, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules.
3. For Copper Tubing, NPS 5 (DN 125) and Larger: Flanged ends.
4. For Steel Piping, NPS 2 (DN 50) and Smaller: Threaded ends.
5. For Steel Piping, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules.
6. For Steel Piping, NPS 5 (DN 125) and Larger: Flanged ends.
7. Wafer-Type Valves: Flanged connections.

3.3 HEATING-WATER GLOBE VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Globe valves, threaded or soldered ends - bronze, Class 125; threaded or soldered ends.
2. Globe valves, threaded ends - bronze, Class 150; PTFE or stainless steel disc.

B. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Globe valves, flanged ends - iron, Class 125.
2. Globe valves, flanged ends - iron, Class 250.

3.4 HEATING-WATER GATE VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Gate valves, threaded or soldered ends - bronze, NRS, Class 125; threaded or soldered ends.
2. Gate valves, threaded or soldered ends - bronze, RS, Class 125; threaded or soldered ends.
3. Gate valves, threaded ends - bronze, NRS, Class 150.
4. Gate valves, threaded ends - bronze, RS, Class 150.
5. Gate valves, press ends - bronze; RS or NRS.

B. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Gate valves, flanged ends - iron, NRS, Class 125.
2. Gate valves, flanged ends - iron, OS&Y, Class 125.
3. Gate valves, flanged ends - iron, NRS, Class 250.
4. Gate valves, flanged ends - iron, OS&Y, Class 250.

END OF SECTION 230523

SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Trapeze pipe hangers.
2. Fastener systems.
3. Equipment supports.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for equipment supports.
2. Section 230500 "Common Work Results for HVAC" for guides and anchors.
3. Section 230548 "Vibration and Seismic Controls for HVAC" for vibration isolation devices.
4. Section 233113 "Metal Ducts" for duct hangers and supports.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show fabrication and installation details and include calculations for the following; include Product Data for components:

1. Equipment supports.

1.3 INFORMATIONAL SUBMITTALS

A. Welding certificates.

1.4 QUALITY ASSURANCE

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design trapeze pipe hangers and equipment supports.

B. Structural Performance: Hangers and supports for HVAC piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.

1. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.
2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
3. Design seismic-restraint hangers and supports for piping and equipment and obtain approval from authorities having jurisdiction.

2.2 FASTENER SYSTEMS

A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

B. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

2.3 EQUIPMENT SUPPORTS

A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon-steel shapes.

2.4 MATERIALS

A. Aluminum: ASTM B221.

B. Carbon Steel: ASTM A1011/A1011M.

C. Structural Steel: ASTM A36/A36M, carbon-steel plates, shapes, and bars; black and galvanized.

D. Stainless Steel: ASTM A240/A240M.

E. Grout: ASTM C1107/C1107M, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.

1. Properties: Nonstaining, noncorrosive, and nongaseous.
2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 APPLICATION

A. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.

3.2 INSTALLATION OF HANGERS AND SUPPORTS

A. Fastener System Installation:

1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.

B. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

C. Equipment Support Installation: Fabricate from welded-structural-steel shapes.

D. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

E. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.

F. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

3.3 INSTALLATION OF EQUIPMENT SUPPORTS

A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.

B. Grouting: Place grout under supports for equipment and make bearing surface smooth.

C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.4 METAL FABRICATIONS

A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.

C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.5 ADJUSTING

A. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.6 HANGER AND SUPPORT SCHEDULE

A. Specific hanger and support requirements are in Sections specifying equipment.

B. Use hangers and supports with galvanized metallic coatings for equipment that will not have field-applied finish.

C. Use powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 230529

SECTION 230548 - VIBRATION AND SEISMIC CONTROLS FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Restraints - cable type.
2. Restraint accessories.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Detail fabrication and assembly of equipment bases.
2. Vibration Isolation Base Details: Detail fabrication including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

C. Delegated Design Submittals:

1. For each seismic-restraint device, including seismic-restrained mounting, that is required by this Section or is indicated on Drawings, submit the following:

a. Seismic Restraint, and Vibration Isolation Base Selection: Select vibration isolators, seismic restraints, and vibration isolation bases complying with performance requirements, design criteria, and analysis data.
b. Concrete Anchors and Inserts: Include calculations showing anticipated seismic and wind loads. Include certification that device is approved by an NRTL for seismic reinforcement use.

c. Seismic Design Calculations: Submit all input data and loading calculations prepared under "Seismic Design Calculations" Paragraph in "Performance Requirements" Article.

d. Qualified Professional Engineer: All designated-design submittals for seismic- and wind-restraint calculations are to be signed and sealed by qualified professional engineer responsible for their preparation.

2. Seismic-Restraint Detail Drawing:

a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads.
b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to restrained items and to the structure. Show attachment locations, methods, and

spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events. Indicate association with vibration isolation devices.

c. Coordinate seismic-restraint and vibration isolation details with wind-restraint details required for equipment mounted outdoors. Comply also with requirements in other Sections for equipment mounted outdoors.

3. All delegated design submittals for seismic- and wind-restraint detail Drawings are to be signed and sealed by qualified professional engineer responsible for their preparation.
4. Product Listing, Preapproval, and Evaluation Documentation: By an agency acceptable to authorities having jurisdiction, showing maximum ratings of restraint items and basis for approval (tests or calculations).
5. Design Calculations for Vibration Isolation Devices: Calculate static and dynamic loading due to equipment weight and operating forces required to select proper vibration isolators, and to design vibration isolation bases.
6. Riser Supports: Include riser diagrams and calculations showing anticipated expansion and contraction at each support point, initial and final loads on building structure, and spring deflection changes. Include certification that riser system was examined for excessive stress and that none exists.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Show coordination of vibration isolation device installation and seismic bracing for HVAC piping and equipment with other systems and equipment in the vicinity, including other supports and restraints, if any.

B. Welding certificates.

C. Field quality-control reports.

D. Seismic Qualification Data: Provide special certification for designated seismic systems as indicated in ASCE/SEI 7-05, Paragraph 13.2.2, "Special Certification Requirements for Designated Seismic Systems" for all Designated Seismic Systems identified as such on Drawings or in the Specifications.

1. Provide equipment manufacturer's written certification for each designated active mechanical seismic device and system, stating that it will remain operable following the design earthquake. Certification must be based on requirements of ASCE/SEI 7 and AHRI 1270, including shake table testing per ICC-ES AC156 or a similar nationally recognized testing standard procedure acceptable to authorities having jurisdiction ASCE/SEI 7-05.
2. Provide equipment manufacturer's written certification that components with hazardous contents maintain containment following the design earthquake by methods required in ASCE/SEI 7-05.
3. Submit evidence demonstrating compliance with these requirements for approval to authorities having jurisdiction after review and acceptance by a licensed professional engineer.

1.4 QUALITY ASSURANCE

A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct testing indicated, be an NRTL as defined by OSHA in 29 CFR 1910.7, and be acceptable to authorities having jurisdiction.

B. Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M, "Structural Welding Code - Steel."

C. Seismic-Restraint Device Load Ratings: Devices to be tested and rated in accordance with applicable code requirements and authorities having jurisdiction. Devices to be listed by a nationally recognized third party that requires periodic follow-up inspections and has a listing directory available to the public. Provide third-party listing by one or more of the following: an agency acceptable to authorities having jurisdiction.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design seismic load control system.

1. Seismic Performance: Equipment to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7-05.

B. Seismic Design Calculations:

1. Perform calculations to obtain force information necessary to properly select seismic-restraint devices, fasteners, and anchorage. Perform calculations using methods acceptable to applicable code authorities and as presented in ASCE/SEI 7-05. Where "ASCE/SEI 7" is used throughout this Section, it is to be understood that the edition referred to in this subparagraph is the edition intended as reference throughout the Section Text.

a. Data indicated below to be determined by Delegated Design Contractor must be obtained by Contractor and must be included in individual component submittal packages.

b. Coordinate seismic design calculations for equipment mounted outdoors. Comply with requirements in other Sections in addition to those in this Section for equipment mounted outdoors.

c. Building Occupancy Category: II.

d. Building Risk Category: II.

e. Building Site Classification: D.

2. Calculation Factors, ASCE/SEI 7-05, Ch. 3 - Seismic Design Requirements for Nonstructural Components: All section, paragraph, equation, and table numbers refer to ASCE/SEI 7-05 unless otherwise noted.

   a. Horizontal Seismic Design Force F_p: Calculated by Delegated Design Contractor by ASCE/SEI 7-05, Equation 13.3-1. Factors below must be obtained for this calculation:

      1) S_{DS} = Spectral Acceleration: 0.313. Value applies to all components on Project.

      2) a_p = Component Amplification Factor: See Drawing Schedule for each component.

      3) I_p = Component Importance Factor: See Drawing Schedule for each component.
      4) W_p = Component Operating Weight: Obtain by Delegated Design Contractor for each component from component submittal.

      5) R_p = Component Response Modification Factor: See Drawing Schedule for each component.
      6) z = Height in Structure of Point of Attachment of Component for Base: Determine by Delegated Design Contractor for each component from Project Drawings. For items at or below the base, "z" to be taken as zero.
      7) h = Average Roof Height of Structure for Base: Determine by Delegated Design Contractor from Project Drawings.

   b. Vertical Seismic Design Force: Calculated by Delegated Design Contractor using method explained in ASCE/SEI 7-05, Paragraph 13.3.1.
   c. Seismic Relative Displacement D_p: Calculated by Delegated Design Contractor using methods explained in ASCE/SEI 7-05, Paragraph 13.3.2. Factors below must be obtained for this calculation:

      1) δ_{xA} = Deflection at Building Level x of Structure A: See Drawing Schedule for each component.

      2) δ_{yA} = Deflection at Building Level y of Structure A: See Drawing Schedule for each component.

      3) δ_{yB} = Deflection at Building Level y of Structure B: See Drawing Schedule for each component.
      4) h_x = Height of Level x to which Upper Connection Point Is Attached: Determine for each component by Delegated Design Contractor from Project Drawings and manufacturer's data.
      5) h_y = Height of Level y to which Upper Connection Point Is Attached: Determine for each component by Delegated Design Contractor from Project Drawings and manufacturer's data.

6) Δ_{aA} = Allowable Story Drift for Structure A: See Drawing Schedule for each component.

7) Δ_{aB} = Allowable Story Drift for Structure B: See Drawing Schedule for each component.

8) h_{sx} = Story Height Used in the Definition of Allowable Drift Δ_a: See Drawing Schedule for each component.

C. Consequential Damage: Provide additional seismic restraints for suspended HVAC components or anchorage of floor-, roof-, or wall-mounted HVAC components as indicated in ASCE/SEI 7-05 so that failure of a non-essential or essential HVAC component will not cause failure of any other essential architectural, mechanical, or electrical building component.

D. Fire/Smoke Resistance: Seismic-restraint devices that are not constructed of ferrous metals must have a maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested by an NRTL in accordance with ASTM E84 or UL 723, and be so labeled.

E. Component Supports:

1. Load ratings, features, and applications of all reinforcement components must be based on testing standards of a nationally recognized testing agency.
2. All component support attachments must comply with force and displacement resistance requirements of ASCE 7-05 Section 13.6.

2.2 RESTRAINTS - CABLE TYPE

A. Seismic-Restraint Cables: ASTM A1023/A1023M galvanized or ASTM A603 galvanized-steel cables. End connections made of steel assemblies with thimbles, brackets, swivel, and bolts designed for seismic-restraining cable service; with fittings attached by means of poured socket, swaged socket or mechanical (Flemish eye) loop.

B. Restraint cable assembly with cable fittings must comply with ASCE/SEI 19. All cable fittings and complete cable assembly must maintain the minimum cable breaking force. U-shaped cable clips and wedge-type end fittings do not comply and are unacceptable.

2.3 RESTRAINT ACCESSORIES

A. Hanger-Rod Stiffener: Steel tube or steel slotted-support-system sleeve with internally bolted connections to hanger rod. Non-metallic stiffeners are unacceptable.

B. Hinged and Swivel Brace Attachments: Multifunctional steel connectors for attaching hangers to rigid channel bracings and restraint cables.

C. Bushings for Floor-Mounted Equipment Anchor Bolts: Neoprene bushings designed for rigid equipment mountings, and matched to type and size of anchor bolts and studs.

D. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings, and matched to type and size of attachment devices used.

E. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.

PART 3 - EXECUTION

3.1 APPLICATIONS

A. Hanger-Rod Stiffeners: Install where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.

B. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength is adequate to carry present and future static and seismic loads within specified loading limits.

3.2 INSTALLATION OF VIBRATION-CONTROL AND SEISMIC-RESTRAINT DEVICES

A. Provide vibration-control devices for systems and equipment where indicated in Equipment Schedules or Vibration-Control Devices Schedules, where indicated on Drawings, or where Specifications indicate they are to be installed on specific equipment and systems.

B. Provide seismic-restraint devices for systems and equipment where indicated in Equipment Schedules or Seismic-Restraint Devices Schedules, where indicated on Drawings, where Specifications indicate they are to be installed on specific equipment and systems, and where required by applicable codes.

C. Installation of vibration isolators must not cause any change of position of equipment, piping, or ductwork resulting in stresses or misalignment.

D. Ductwork Restraints:

1. Install ducts with hangers and braces designed to support the duct and to restrain against seismic forces required by applicable building codes. Comply with SMACNA's "Seismic Restraint Manual: Guidelines for Mechanical Systems." ASCE/SEI 7.

2. Space lateral supports a maximum of 40 feet o.c., and longitudinal supports a maximum of 80 feet o.c.
3. Brace a change of direction longer than 12 feet.
4. Select seismic-restraint devices with capacities adequate to carry static and seismic loads.
5. Install cable restraints on ducts that are suspended with vibration isolators.

E. Install seismic-restraint cables so they do not bend across edges of adjacent equipment or building structure.

F. Install seismic-restraint devices using methods approved by an agency acceptable to authorities having jurisdiction that provides required submittals for component.

G. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.

H. Mechanical Anchor Bolts:

1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
3. Wedge-Type Anchor Bolts: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors to be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
4. Set anchors to manufacturer's recommended torque, using a torque wrench.
5. Install zinc-coated steel anchors for interior and stainless steel anchors for exterior applications.

3.3 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

A. Provide flexible connections in piping systems where they cross structural seismic joints and other point where differential movement may occur. Provide adequate flexibility to accommodate differential movement as determined in accordance with ASCE/SEI 7.

3.4 ADJUSTING

A. Adjust isolators after system is at operating weight.

B. Adjust limit stops on restrained-spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Tests and Inspections:

1. Perform tests and inspections.
2. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.

3. Schedule test with Government, before connecting anchorage device to restrained component (unless postconnection testing has been approved), and with at least seven days' advance notice.
4. Obtain Government's approval before transmitting test loads to structure. Provide temporary load-spreading members.
5. Test no fewer than four of each type and size of installed anchors and fasteners selected by Government.
6. Test to 90 percent of rated proof load of device.
7. Measure isolator restraint clearance.
8. Measure isolator deflection.
9. Verify snubber minimum clearances.

10. Test and adjust restrained-air-spring isolator controls and safeties.

C. Remove and replace malfunctioning units and retest as specified above.

D. Units will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports.

END OF SECTION 230548

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Testing, Adjusting, and Balancing of Air Systems:

a. Constant-volume air systems.
b. Variable-air-volume systems.

2. Testing, adjusting, and balancing of equipment.

3. Testing, adjusting, and balancing of existing HVAC systems and equipment.
4. Duct leakage tests verification.
5. HVAC-control system verification.

1.2 DEFINITIONS

A. AABC: Associated Air Balance Council.

B. NEBB: National Environmental Balancing Bureau.

C. TAB: Testing, adjusting, and balancing.

D. TABB: Testing, Adjusting, and Balancing Bureau.

E. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

F. TDH: Total dynamic head.

G. UFAD: Underfloor air distribution.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: Within 30 days of Contractor's Notice to Proceed, submit documentation that the TAB specialist and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.

B. Contract Documents Examination Report: Within 30 days of Contractor's Notice to Proceed, submit the Contract Documents Review report, as specified in Part 3.

C. Strategies and Procedures Plan: Within 30 days of Contractor's Notice to Proceed, submit TAB strategies and step-by-step procedures, as specified in "Preparation" Article.

D. System Readiness Checklists: Within 30 days of Contractor's Notice to Proceed, submit system readiness checklists, as specified in "Preparation" Article.

E. Examination Report: Submit a summary report of the examination review required in "Examination" Article.

F. Certified TAB reports.

G. Sample report forms.

H. Instrument calibration reports, to include the following:

1. Instrument type and make.
2. Serial number.
3. Application.
4. Dates of use.
5. Dates of calibration.

1.4 QUALITY ASSURANCE

A. TAB Specialists Qualifications, Certified by AABC:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by AABC.
2. TAB Technician: Employee of the TAB specialist and certified by AABC.

B. TAB Specialists Qualifications, Certified by NEBB or TABB:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by NEBB or TABB.
2. TAB Technician: Employee of the TAB specialist and certified by NEBB or TABB.

C. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."

D. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.7.2.3 - "System Balancing."

E. Code and AHJ Compliance: TAB is required to comply with governing codes and requirements of authorities having jurisdiction.

1.5 FIELD CONDITIONS

A. Full Occupancy: Government will occupy the site and existing building during entire TAB period. Cooperate with Government during TAB operations to minimize conflicts with Government's operations.

B. Partial Occupancy: Government may occupy completed areas of building before Substantial Completion. Cooperate with Government during TAB operations to minimize conflicts with Government's operations.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems designs that may preclude proper TAB of systems and equipment.

B. Examine installed systems for balancing devices, such as test ports, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are applicable for intended purpose and are accessible.

C. Examine the approved submittals for HVAC systems and equipment.

D. Examine design data, including HVAC system descriptions, statements of design assumptions for environmental conditions and systems output, and statements of philosophies and assumptions about HVAC system and equipment controls.

E. Examine ceiling plenums used for HVAC to verify that they are properly separated from adjacent areas and sealed.

F. Examine equipment performance data, including fan curves.

1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems - Duct Design." Compare results with the design data and installed conditions.

G. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.

H. Examine test reports specified in individual system and equipment Sections.

I. Examine HVAC equipment and verify that bearings are greased, belts are aligned and tight, filters are clean, and equipment with functioning controls is ready for operation.

J. Examine terminal units, such as variable-air-volume boxes, and verify that they are accessible and their controls are connected and functioning.

K. Examine operating safety interlocks and controls on HVAC equipment.

L. Examine control dampers for proper installation for their intended function of isolating, throttling, diverting, or mixing air flows.

M. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.2 PREPARATION

A. Prepare a TAB plan that includes the following:

1. Equipment and systems within the area of renovation to be tested.
2. Strategies and step-by-step procedures for balancing the systems.
3. Instrumentation to be used.
4. Sample forms with specific identification for all equipment.

B. Perform system-readiness checks of HVAC systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:

1. Airside:

a. Verify that leakage and pressure tests on air distribution systems have been satisfactorily completed.
b. Duct systems are complete with terminals installed.
c. Volume, smoke, and fire dampers are open and functional.
d. Clean filters are installed.
e. Fans are operating, free of vibration, and rotating in correct direction.
f. Variable-frequency controllers' startup is complete and safeties are verified.
g. Automatic temperature-control systems are operational.
h. Ceilings are installed.
i. Windows and doors are installed.
j. Suitable access to balancing devices and equipment is provided.

3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

A. Perform testing and balancing procedures on each system in accordance with the procedures contained in AABC's "National Standards for Total System Balance" or ASHRAE 111 or NEBB's "Procedural Standards for Testing, Adjusting, and Balancing of Environmental Systems" and in this Section.

B. If systems do not have existing test ports, cut insulation, ducts, and equipment casings for installation of test probes to the minimum extent necessary for TAB procedures.

1. After testing and balancing, install test ports and duct access doors that comply with requirements in Section 233300 "Air Duct Accessories."
2. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish in accordance with Section 230713 "Duct Insulation."

C. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with paint or other suitable, permanent identification material to show final settings.

D. Take and report testing and balancing measurements in inch-pound (IP) units.

3.4 TESTING, ADJUSTING, AND BALANCING OF HVAC EQUIPMENT

A. Test, adjust, and balance HVAC equipment within the areas of renovation as indicated on Drawings, including, but not limited to, the following:

1. Fans and ventilators.
2. Air terminal units.
3. Coils.
4. Diffusers, grilles, and registers.

3.5 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.

B. Prepare schematic diagrams of systems' Record drawings duct layouts.

C. For variable-air-volume systems, develop a plan to simulate diversity.

D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.

E. Check airflow patterns from the outdoor-air louvers and dampers and the return- and exhaust-air dampers through the supply-fan discharge and mixing dampers.

F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.

G. Verify that motor starters are equipped with properly sized thermal protection.

H. Check dampers for proper position to achieve desired airflow path.

I. Check for airflow blockages.

J. Check condensate drains for proper connections and functioning.

K. Check for proper sealing of air-handling-unit components.

3.6 PROCEDURES FOR TESTING, ADJUSTING, AND BALANCING EXISTING SYSTEMS

A. Perform a preconstruction inspection of existing equipment that is to remain and be reused.

1. Measure and record the operating speed, airflow, and static pressure of each fan and equipment with fan(s).
2. Measure motor voltage and amperage. Compare the values to motor nameplate information.
3. Check the condition of filters.
4. Check the condition of coils.

5. Check the operation of the drain pan and condensate-drain trap.
6. Check bearings and other lubricated parts for proper lubrication.
7. Report on the operating condition of the equipment and the results of the measurements taken. Report deficiencies.

B. TAB After Construction: Before performing testing and balancing of renovated existing systems, inspect existing equipment that is to remain and be reused to verify that existing equipment has been cleaned and refurbished in accordance with renovation scope indicated by Contract Documents. Verify the following:

1. New filters are installed.
2. Coils are clean and fins combed.
3. Drain pans are clean.
4. Fans are clean.
5. Bearings and other parts are properly lubricated.
6. Deficiencies noted in the preconstruction report are corrected.

C. Perform testing and balancing of existing systems to the extent that existing systems are affected by the renovation work.

1. Compare the indicated airflow of the renovated work to the measured fan airflows, and determine the new fan speed and the face velocity of filters and coils.
2. Verify that the indicated airflows of the renovated work result in filter and coil face velocities and fan speeds that are within the acceptable limits defined by equipment manufacturer.
3. If calculations increase or decrease the airflow rates by more than 5 percent, make equipment adjustments to achieve the calculated rates. If increase or decrease is 5 percent or less, equipment adjustments are not required.
4. Balance each air outlet.

3.7 TOLERANCES

A. Set HVAC system's airflow rates and water flow rates within the following tolerances:

1. Supply, Return, and Exhaust Fans and Equipment with Fans: Plus or minus 10 percent. If design value is less than 100 cfm, within 10 cfm.
2. Air Outlets and Inlets: Plus or minus 10 percent. If design value is less than 100 cfm, within 10 cfm.

B. Maintaining pressure relationships as designed shall have priority over the tolerances specified above.

3.8 PROGRESS REPORTING

A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for system-balancing devices. Recommend changes and additions to system-balancing devices, to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC

systems and general construction to allow access for performance-measuring and -balancing devices.

B. Status Reports: Prepare biweekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

3.9 FINAL REPORT

A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.

1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
2. Include a list of instruments used for procedures, along with proof of calibration.
3. Certify validity and accuracy of field data.

B. Final Report Contents: In addition to certified field-report data, include the following:

1. Manufacturers' test data.
2. Field test reports prepared by system and equipment installers.
3. Other information relative to equipment performance; do not include Shop Drawings and Product Data.

C. General Report Data: In addition to form titles and entries, include the following data:

1. Title page.
2. Name and address of the TAB specialist.
3. Project name.
4. Project location.
5. Government's name and address.
6. Engineer's name and address.
7. Contractor's name and address.
8. Report date.
9. Signature of TAB supervisor who certifies the report.
10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
11. Summary of contents, including the following:

    a. Indicated versus final performance.
    b. Notable characteristics of systems.
    c. Description of system operation sequence if it varies from the Contract Documents.

12. Nomenclature sheets for each item of equipment.
13. Data for terminal units, including manufacturer's name, type, size, and fittings.
14. Notes to explain why certain final data in the body of reports vary from indicated values.
15. Test conditions for fans performance forms, including the following:

a. Settings for outdoor-, return-, and exhaust-air dampers.
b. Conditions of filters.
c. Cooling coil, wet- and dry-bulb conditions.
d. Heating coil, dry-bulb conditions.
e. Face and bypass damper settings at coils.
f. Fan drive settings, including settings and percentage of maximum pitch diameter.
g. Variable-frequency controller or Inlet vane settings for variable-air-volume systems.
h. Settings for pressure controller(s).
i. Other system operating conditions that affect performance.

D. System Diagrams: Include schematic layouts of air distribution systems. Present each system with single-line diagram and include the following:

1. Quantities of outdoor, supply, return, and exhaust airflows.
2. Duct, outlet, and inlet sizes.
3. Pipe and valve sizes and locations.
4. Terminal units.
5. Balancing stations.
6. Position of balancing devices.

E. Apparatus-Coil Test Reports:

1. Coil Data:

a. System identification.
b. Location.
c. Coil type.
d. Number of rows.
e. Fin spacing in fins per inch o.c.
f. Make and model number.
g. Face area in sq. ft..
h. Tube size in NPS.
i. Tube and fin materials.
j. Circuiting arrangement.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Average face velocity in fpm.
c. Air pressure drop in inches wg.
d. Outdoor-air, wet- and dry-bulb temperatures in deg F.
e. Return-air, wet- and dry-bulb temperatures in deg F.
f. Entering-air, wet- and dry-bulb temperatures in deg F.
g. Leaving-air, wet- and dry-bulb temperatures in deg F.

F. Fan Test Reports: For supply, return, and exhaust fans, include the following:

1. Fan Data:

a. System identification.

b. Location.
c. Make and type.
d. Model number and size.
e. Manufacturer's serial number.
f. Arrangement and class.
g. Sheave make, size in inches, and bore.
h. Center-to-center dimensions of sheave and amount of adjustments in inches.

2. Motor Data:

a. Motor make, and frame type and size.
b. Horsepower and speed.
c. Volts, phase, and hertz.
d. Full-load amperage and service factor.
e. Sheave make, size in inches, and bore.
f. Center-to-center dimensions of sheave and amount of adjustments in inches.
g. Number, make, and size of belts.

3. Test Data (Indicated and Actual Values):

a. Total airflow rate in cfm.
b. Total system static pressure in inches wg.
c. Fan speed.
d. Discharge static pressure in inches wg.
e. Suction static pressure in inches wg.

G. Round, Flat-Oval, and Rectangular Duct Traverse Reports: Include a diagram with a grid representing the duct cross-section and record the following:

1. Report Data:

a. System fan and air-handling-unit number.
b. Location and zone.
c. Traverse air temperature in deg F.
d. Duct static pressure in inches wg.
e. Duct size in inches.
f. Duct area in sq. ft..
g. Indicated airflow rate in cfm.
h. Indicated velocity in fpm.
i. Actual airflow rate in cfm.
j. Actual average velocity in fpm.
k. Barometric pressure in psig.

H. Air-Terminal-Device Reports:

1. Unit Data:

a. System and air-handling unit identification.
b. Location and zone.
c. Apparatus used for test.
d. Area served.

e. Make.
f. Number from system diagram.
g. Type and model number.
h. Size.
i. Effective area in sq. ft..

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Air velocity in fpm.
c. Preliminary airflow rate as needed in cfm.
d. Preliminary velocity as needed in fpm.
e. Final airflow rate in cfm.
f. Final velocity in fpm.
g. Space temperature in deg F.

I. System-Coil Reports: For reheat coils and water coils of terminal units, include the following:

1. Unit Data:

a. System and air-handling-unit identification.
b. Location and zone.
c. Room or riser served.
d. Coil make and size.
e. Flowmeter type.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Entering-air temperature in deg F.
c. Leaving-air temperature in deg F.

J. Instrument Calibration Reports:

1. Report Data:

a. Instrument type and make.
b. Serial number.
c. Application.
d. Dates of use.
e. Dates of calibration.

3.10 VERIFICATION OF TAB REPORT

A. The TAB specialist's test and balance engineer shall conduct the inspection in the presence of Commissioning Authority.

B. Commissioning Authority shall randomly select measurements, documented in the final report, to be rechecked. Rechecking shall be limited to the lesser of either 10 percent of the total

measurements recorded or the extent of measurements that can be accomplished in a normal 8-hour business day.

C. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."

D. If the number of "FAILED" measurements is greater than 5 percent of the total measurements checked during the final inspection, the TAB shall be considered incomplete and shall be rejected.

E. If recheck measurements find the number of failed measurements noncompliant with requirements indicated, proceed as follows:

1. TAB specialists shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection. All changes shall be tracked to show changes made to previous report.
2. If the second final inspection also fails, Government may pursue others Contract options to complete TAB work.

F. Prepare test and inspection reports.

3.11 ADDITIONAL TESTS

A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.

B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional TAB during near-peak summer and winter conditions.

END OF SECTION 230593

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulating the following duct services:

1. Indoor, concealed supply and outdoor air.
2. Indoor, concealed return located in unconditioned space.
3. Indoor, concealed exhaust between isolation damper and penetration of building exterior.

B. Related Requirements:

1. Section 233113 "Metal Ducts" for duct external wraps.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
2. Detail insulation application at elbows, fittings, dampers, specialties and flanges for each type of insulation.
3. Detail application of field-applied jackets.
4. Detail application at linkages of control devices.

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Comply with requirements in "Duct Insulation Schedule, General," "Indoor Duct and Plenum Insulation Schedule," and "Aboveground, Outdoor Duct and Plenum Insulation Schedule" articles for where insulating materials are applied.

B. Products do not contain asbestos, lead, mercury, or mercury compounds.

C. Products that come in contact with stainless steel have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.

D. Insulation materials for use on austenitic stainless steel are qualified as acceptable in accordance with ASTM C795.

E. Foam insulation materials do not use CFC or HCFC blowing agents in the manufacturing process.

F. Mineral Wool Blanket: Basalt volcanic rock-derived fibers bonded with a thermosetting resin, unfaced; suitable for maximum use temperature up to 1200 deg F in accordance with ASTM C447. Comply with ASTM C553.

2.3 ADHESIVES

A. Materials are compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.

B. Glass-Fiber and Mineral Wool Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

C. ASJ Adhesive, and FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.

2.4 MASTICS AND COATINGS

A. Materials shall be compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic, Water Based, Interior Use: Suitable for indoor use on below ambient services.

1. Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.
2. Service Temperature Range: Minus 20 to plus 180 deg F.
3. Comply with MIL-PRF-19565C, Type II, for permeance requirements.

C. Breather Mastic: Water based; suitable for indoor and outdoor use on above ambient services.

1. Water-Vapor Permeance: ASTM E96/E96M, greater than 1.0 perm at manufacturer's recommended dry film thickness.
2. Service Temperature Range: Minus 20 to plus 180 deg F.

2.5 SEALANTS

A. FSK and Metal Jacket Flashing Sealants:

1. Materials are compatible with insulation materials, jackets, and substrates.
2. Fire- and water-resistant, flexible, elastomeric sealant.
3. Service Temperature Range: Minus 40 to plus 250 deg F.
4. Color: Aluminum.

B. ASJ Flashing Sealants, and Vinyl and PVC Jacket Flashing Sealants:

1. Materials are compatible with insulation materials, jackets, and substrates.
2. Fire- and water-resistant, flexible, elastomeric sealant.
3. Service Temperature Range: Minus 40 to plus 250 deg F.
4. Color: White.

2.6 FACTORY-APPLIED JACKETS

A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C1136, Type I.
2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C1136, Type I.
3. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C1136, Type II.
4. FSP Jacket: Aluminum-foil, fiberglass-reinforced scrim with polyethylene backing; complying with ASTM C1136, Type II.
5. Vinyl Jacket: White vinyl with a permeance of 1.3 perms when tested in accordance with ASTM E96/E96M, Procedure A, and complying with NFPA 90A and NFPA 90B.
6. ASJ+: All-service jacket composed of aluminum foil reinforced with glass scrim bonded to a kraft paper interleaving with an outer film leaving no paper exposed; complying with ASTM C1136, Types I, II, III, IV, and VII
7. PSK Jacket: Aluminum foil, fiberglass-reinforced scrim with polyethylene backing; complying with ASTM C 1136, Type II.

2.7 TAPES

A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C1136.

1. Width: 3 inches.
2. Thickness: 11.5 mils.
3. Adhesion: 90 ounces force/inch in width.
4. Elongation: 2 percent.
5. Tensile Strength: 40 lbf/inch in width.
6. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

B. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C1136.

1. Width: 3 inches.
2. Thickness: 6.5 mils.
3. Adhesion: 90 ounces force/inch in width.
4. Elongation: 2 percent.
5. Tensile Strength: 40 lbf/inch in width.
6. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.

C. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.

1. Width: 2 inches.
2. Thickness: 6 mils.
3. Adhesion: 64 ounces force/inch in width.
4. Elongation: 500 percent.
5. Tensile Strength: 18 lbf/inch in width.

D. Aluminum-Foil Tape: Vapor-retarder tape with acrylic adhesive.

1. Width: 2 inches.
2. Thickness: 3.7 mils.
3. Adhesion: 100 ounces force/inch in width.
4. Elongation: 5 percent.
5. Tensile Strength: 34 lbf/inch in width.

PART 3 - EXECUTION

3.1 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.2 GENERAL INSTALLATION REQUIREMENTS

A. Install all insulation materials on the duckwork exterior walls unless otherwise indicated on the mechanical drawing set.

B. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.

C. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.

D. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

E. Install insulation with longitudinal seams at top and bottom of horizontal runs.

F. Install multiple layers of insulation with longitudinal and end seams staggered.

G. Keep insulation materials dry during application and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with the Contract Documents.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.

K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

L. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.

   a. For below ambient services, apply vapor-barrier mastic over staples.

4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.

M. Cut insulation in a manner to avoid compressing insulation.

N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

3.3 INSTALLATION OF GLASS-FIBER AND MINERAL-WOOL INSULATION

A. Blanket Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

B. Comply with manufacturer's written installation instructions.

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.

2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

    a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
    b. On duct sides with dimensions larger than 18 inches, place pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
    c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
    d. Do not overcompress insulation during installation.
    e. Impale insulation over pins and attach speed washers.
    f. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.

4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.

    a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
    b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.

5. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
6. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
7. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

C. Board Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.

2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

    a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
    b. On duct sides with dimensions larger than 18 inches, space pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
    c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
    d. Do not overcompress insulation during installation.
    e. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.

4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.

    a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
    b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.

5. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
6. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.4 FIELD-APPLIED JACKET INSTALLATION

A. Where FSK jackets are indicated, install as follows:

1. Draw jacket material smooth and tight.
2. Install lap or joint strips with same material as jacket.
3. Secure jacket to insulation with manufacturer's recommended adhesive.
4. Install jacket with 1-1/2-inch laps at longitudinal seams and 3-inch-wide joint strips at end joints.
5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.

B. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications, install with longitudinal seams along top and bottom of tanks and vessels. Seal with manufacturer's recommended adhesive.

1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

C. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless steel bands 12 inches o.c. and at end joints.

3.5 FINISHES

A. Insulation with ASJ or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Color: Final color as selected by Government. Vary first and second coats to allow visual inspection of the completed Work.

C. Do not field paint aluminum or stainless-steel jackets.

3.6 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Inspect ductwork, randomly selected by Government, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection is limited to one location(s) for each duct system defined in the "Duct Insulation Schedule, General" Article.

C. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.7 DUCT INSULATION SCHEDULE, GENERAL

A. Plenums and Ducts Requiring Insulation:

1. Indoor, concealed supply and outdoor air.
2. Indoor, concealed return located in unconditioned space.
3. Indoor, concealed exhaust between isolation damper and penetration of building exterior.

B. Items Not Insulated:

1. Fibrous-glass ducts.
2. Metal ducts with duct external wrap of sufficient thickness to comply with energy code and ASHRAE/IESNA 90.1.
3. Factory-insulated flexible ducts.
4. Factory-insulated plenums and casings.
5. Flexible connectors.
6. Vibration-control devices.
7. Factory-insulated access panels and doors.

3.8 INDOOR DUCT AND PLENUM INSULATION SCHEDULE

A. Concealed, Supply-Air Duct and Plenum Insulation: Glass-fiber, Mineral wool, blanket, 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.

B. Concealed, Return-Air Duct and Plenum Insulation: Glass-fiber, Mineral wool, blanket, 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.

C. Concealed, Exhaust-Air Duct and Plenum Insulation: Glass-fiber Mineral wool blanket, 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.

END OF SECTION 230713

SECTION 230719 - HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulation for HVAC piping systems.

B. Related Requirements:

1. Section 230713 "Duct Insulation" for duct insulation.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
2. Detail attachment and covering of heat tracing inside insulation.
3. Detail insulation application at pipe expansion joints for each type of insulation.
4. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
5. Detail removable insulation at piping specialties.
6. Detail application of field-applied jackets.
7. Detail application at linkages of control devices.

C. Samples: For each type of insulation and jacket indicated. Identify each Sample, describing product and intended use.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified Installer.

B. Material test reports.

C. Field quality-control reports.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or craft training program.

1.5 COORDINATION

A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."

B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

C. Coordinate installation and testing of heat tracing.

1.6 SCHEDULING

A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials shall be applied.

B. Products shall not contain asbestos, lead, mercury, or mercury compounds.

C. Products that come into contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.

D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable in accordance with ASTM C795.

E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.

F. Flexible Elastomeric: Closed-cell, or expanded-rubber materials; suitable for maximum use temperature between minus 70 deg F and 220 deg F. Comply with ASTM C534/C534M, Type I for tubular materials, Type II, for sheet materials.

2.3 ADHESIVES

A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.

B. Cellular-Glass Adhesive: Two-component, thermosetting urethane adhesive containing no flammable solvents, with a service temperature range of minus 100 to plus 200 deg F.

C. Glass-Fiber and Mineral Wool Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

2.4 MASTICS AND COATINGS

A. Materials shall be compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic, Water Based: Suitable for indoor use on below-ambient services.

1. Water-Vapor Permeance: Comply with ASTM E96/E96M or ASTM F1249.

2. Service Temperature Range: 0 to plus 180 deg F.

3. Comply with MIL-PRF-19565C, Type II, for permeance requirements.

2.5 SEALANTS

A. Materials shall be as recommended by the insulation manufacturer and shall be compatible with insulation materials, jackets, and substrates.

1. Permanently flexible, elastomeric sealant.

B. FSK and Metal Jacket Flashing Sealants:

1. Fire- and water-resistant, flexible, elastomeric sealant.
2. Service Temperature Range: Minus 40 to plus 250 deg F.
3. Color: Aluminum.

2.6 FACTORY-APPLIED JACKETS

A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C1136, Type I.
2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C1136, Type I.

3. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C1136, Type II.
4. ASJ+: Aluminum foil reinforced with glass scrim bonded to a kraft paper interleaving with an outer film leaving no paper exposed; complying with ASTM C1136, Types I, II, III, IV, and VII.
5. PSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with polyethylene backing; complying with ASTM C1136, Type II.

2.7 TAPES

A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C1136.

1. Width: 3 inches.
2. Thickness: 11.5 mils.
3. Adhesion: 90 ounces force/inch in width.
4. Elongation: 2 percent.
5. Tensile Strength: 40 lbf/inch in width.
6. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

B. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C1136.

1. Width: 3 inches.
2. Thickness: 6.5 mils.
3. Adhesion: 90 ounces force/inch in width.
4. Elongation: 2 percent.
5. Tensile Strength: 40 lbf/inch in width.
6. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.

C. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.

1. Width: 2 inches.
2. Thickness: 6 mils.
3. Adhesion: 64 ounces force/inch in width.
4. Elongation: 500 percent.
5. Tensile Strength: 18 lbf/inch in width.

D. Aluminum-Foil Tape: Vapor-retarder tape with acrylic adhesive.

1. Width: 2 inches.
2. Thickness: 3.7 mils.
3. Adhesion: 100 ounces force/inch in width.
4. Elongation: 5 percent.
5. Tensile Strength: 34 lbf/inch in width.

E. PVDC Tape for Indoor Applications: White vapor-retarder PVDC tape with acrylic adhesive.

1. Width: 3 inches.

2. Film Thickness: 2 mils.
3. Adhesive Thickness: 1.5 mils.
4. Elongation at Break: 120 percent.
5. Tensile Strength: 20 psi in width.

F. PVDC Tape for Outdoor Applications: White vapor-retarder PVDC tape with acrylic adhesive.

1. Width: 3 inches.
2. Film Thickness: 6 mils.
3. Adhesive Thickness: 1.5 mils.
4. Elongation at Break: 145 percent.
5. Tensile Strength: 55 psi in width.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

B. Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:

1. Stainless Steel: Coat 300 series stainless steel with an epoxy primer 5 mils thick and an epoxy finish 5 mils thick if operating in a temperature range between 140 and 300 deg F. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
2. Carbon Steel: Coat carbon steel operating at a service temperature of between 32 and 300 deg F with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.

C. Coordinate insulation installation with the tradesman installing heat tracing. Comply with requirements for heat tracing that apply to insulation.

D. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless steel surfaces, use demineralized water.

3.2 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping, including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and of thicknesses required for each item of pipe system, as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

D. Install insulation with longitudinal seams at top and bottom (12 o'clock and 6 o'clock positions) of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.

G. Keep insulation materials dry during storage, application, and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with the Contract Documents.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends attached to structure with vapor-barrier mastic.
3. Install insert materials and insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.

K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

L. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward-clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward-clinching staples along edge at 4 inches o.c.
4. For below-ambient services, apply vapor-barrier mastic over staples.
5. Cover joints and seams with tape, in accordance with insulation material manufacturer's written instructions, to maintain vapor seal.
6. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.

M. Cut insulation in a manner to avoid compressing insulation.

N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches in similar fashion to butt joints.

P. For above-ambient services, do not install insulation to the following:

1. Vibration-control devices.
2. Testing agency labels and stamps.
3. Nameplates and data plates.

3.3 PENETRATIONS

A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.

1. Seal penetrations with flashing sealant.
2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
4. Seal jacket to roof flashing with flashing sealant.

B. Insulation Installation at Underground Exterior Wall Penetrations: Terminate insulation flush with sleeve seal. Seal terminations with flashing sealant.

C. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.

1. Seal penetrations with flashing sealant.
2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
4. Seal jacket to wall flashing with flashing sealant.

D. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.

E. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.

1. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping and fire-resistive joint sealers.

F. Insulation Installation at Floor Penetrations:

1. Pipe: Install insulation continuously through floor penetrations.
2. Seal penetrations through fire-rated assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

3.4 GENERAL PIPE INSULATION INSTALLATION

A. Requirements in this article generally apply to all insulation materials, except where more specific requirements are specified in various pipe insulation material installation articles below.

B. Insulation Installation on Fittings, Valves, Strainers, Flanges, Mechanical Couplings, and Unions:

1. Install insulation over fittings, valves, strainers, flanges, mechanical couplings, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
2. Insulate pipe elbows using prefabricated fitting insulation or mitered or routed fittings made from same material and density as that of adjacent pipe insulation. Each piece shall be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
3. Insulate tee fittings with prefabricated fitting insulation or sectional pipe insulation of same material and thickness as that used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
4. Insulate valves using prefabricated fitting insulation or sectional pipe insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
5. Insulate strainers using prefabricated fitting insulation or sectional pipe insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers, so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges, mechanical couplings, and unions using a section of oversized preformed pipe insulation to fit. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Stencil or label the outside insulation jacket of each union with the word "union" matching size and color of pipe labels.
7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.

8. For services not specified to receive a field-applied jacket, except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing, using PVC tape.

C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.

D. Install removable insulation covers. Installation shall conform to the following:

1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as that of adjoining pipe insulation.
2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union at least 2 times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless steel or aluminum bands. Select band material compatible with insulation and jacket.
3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.5 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

B. Insulation Installation on Pipe Flanges:

1. Install pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as that of pipe insulation.
4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install sections of pipe insulation and miter if required in accordance with manufacturer's written instructions.

2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install prefabricated valve covers manufactured of same material as that of pipe insulation when available.
2. When prefabricated valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties, and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.6 FINISHES

A. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.

B. Color: Final color as selected by Government. Vary first and second coats to allow visual inspection of the completed Work.

C. Do not field paint aluminum or stainless steel jackets.

3.7 FIELD QUALITY CONTROL

A. Government will engage a qualified testing agency to perform tests and inspections.

B. Engage a qualified testing agency to perform tests and inspections.

C. Perform tests and inspections.

D. Tests and Inspections: Inspect pipe, fittings, strainers, and valves, randomly selected by Government, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.

E. All insulation applications will be considered defective if they do not pass tests and inspections.

F. Prepare test and inspection reports.

3.8 PIPING INSULATION SCHEDULE, GENERAL

A. Insulation conductivity and thickness per pipe size shall comply with schedules in this Section or with requirements of authorities having jurisdiction, whichever is more stringent.

B. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.

C. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:

1. Underground piping.
2. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.9 INDOOR PIPING INSULATION SCHEDULE

A. Heating-Hot-Water Supply and Return:

1. Insulation shall be one of the following:

a. Cellular Glass: 2 inches thick.
b. Glass-Fiber, Preformed Pipe, Type I: 2 inches thick.
c. Mineral Wool, Preformed Pipe, Type II: 2 inches thick.

END OF SECTION 230719

SECTION 230800 - COMMISSIONING OF HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes Cx process requirements for the following HVAC systems, assemblies, and equipment:

1. Air and hydronic distribution systems.
2. Heating terminal equipment.
3. HVAC controls.
4. TAB verification.

B. Related Requirements:

1. Section 019113 "General Commissioning Requirements" for general Cx process requirements and responsibilities.
2. For construction checklists, comply with requirements in various Division 23 Sections specifying HVAC systems, system components, equipment, and products.

1.2 DEFINITIONS

A. BAS: Building automation system.

B. Cx: Commissioning, as defined in Section 019113 "General Commissioning Requirements."

C. IgCC: International Green Construction Code.

D. "Systems," "Assemblies," "Subsystems," "Equipment," and "Components": Where these terms are used together or separately, they mean "as-built" systems, assemblies, subsystems, equipment, and components.

E. TAB: Testing, adjusting, and balancing.

1.3 INFORMATIONAL SUBMITTALS

A. Construction Checklists:

1. Div. 23 Subcontractor is to review Construction Checklist in accordance with requirements in Section 019113 "General Commissioning Requirements" and ASHRAE 202 and to resolve any issues with the Government.

B. Test Equipment and Instruments: For all test equipment and instruments to be used in conducting Cx tests by Div. 23 Subcontractor, provide the following:

1. Equipment/instrument identification number.
2. Planned Cx application or use.

3. Manufacturer, make, model, and serial number.
4. Calibration history, including certificates from agencies that calibrate the equipment and instrumentation.
5. Equipment manufacturers' proprietary instrumentation and tools. For each instrument or tool, identify the following:

    a. Instrument or tool identification number.
    b. Equipment schedule designation of equipment for which the instrument or tool is required.
    c. Manufacturer, make, model, and serial number.
    d. Calibration history, including certificates from agencies that calibrate the instrument or tool, where appropriate.

1.4 QUALITY ASSURANCE

A. Testing Equipment and Instrumentation Quality and Calibration:

1. Capable of testing and measuring performance within the specified acceptance criteria.
2. Be calibrated at manufacturer's recommended intervals with current calibration tags permanently affixed to the instrument being used.
3. Be maintained in good repair and operating condition throughout duration of use on Project.
4. Be recalibrated/repaired if dropped or damaged in any way since last calibrated.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 Cx PROCESS:

A. Perform Cx process in accordance with Section 019113 "General Commissioning Requirements" for BAS and HVAC and in accordance with the following:

1. Commissioning standards acceptable to the authority having jurisdiction.

3.2 CONSTRUCTION CHECKLISTS

A. Preliminary detailed construction checklists are to be prepared under Section 019113 "General Commissioning Requirements" for each BAS and HVAC system, assembly, subsystem, equipment, and component required to be commissioned, as detailed in ASHRAE 202. Contractor performs the following:

1. Review BAS and HVAC preliminary construction checklists and provide written comments on checklist items where appropriate.
2. Return preliminary Construction Checklist with review comments within 10 days of receipt.

3. When review comments have been resolved, the Government will provide final construction checklists marked "Approved for Use, (date)."
4. Use only construction checklists marked "Approved for Use, (date)" When performing tests. Mark construction checklists in the appropriate place as indicated Project events are completed, and provide pertinent details and other information.

B. Prepare preliminary detailed construction checklists for each BAS and HVAC system, assembly, subsystem, equipment, and component required to be commissioned, as detailed in ASHRAE 202.

1. Submit preliminary construction checklists to Government for review.
2. When review comments have been resolved, the Government will provide final construction checklists marked "Approved for Use, (date)."
3. Use only construction checklists, marked "Approved for Use, (date)" when performing tests. Mark construction checklists in the appropriate place, as indicated Project events are completed and provide pertinent details and other information.

4. Air duct systems, including the following:

    a. Duct systems.
    b. Air-duct accessories, including volume dampers, turning vanes, and flexible connectors.
    c. Duct-mounted access doors and panels.
    d. Hangers and supports.

5. Hydronic distribution systems, including the following:

    a. Hydronic piping systems and all accessories.
    b. Meters and gauges.
    c. General-duty and specialty valves.
    d. Hangers and supports

6. Heating and cooling terminal and unitary equipment, including the following:

    a. Fan-coil units.

7. Vibration isolation systems.
8. Controls and instrumentation, including the following:

    a. Controllers and sensors.
    b. Automatic control valves, dampers, and actuators.

9. TAB Verification:

    a. Airflow.
    b. Water flow.
    c. Space pressurization.

10. Documentation:

    a. Mechanical systems manuals.

b. Documentation of required commissioning.

11. Mechanical insulation, including the following:

a. Duct and plenum insulation.
b. HVAC piping insulation.

3.3 Cx TESTING PREPARATION

A. Certify that HVAC systems, subsystems, and equipment have been installed, calibrated, and started and that they are operating in accordance with the Contract Documents and approved submittals.

B. Certify that HVAC instrumentation and control systems have been completed and calibrated, point-to-point checkout has been successfully completed, and systems are operating in accordance with their design sequence of operation, Contract Documents, and approved submittals. Certify that all sensors are operating within specified accuracy and all systems are set to and maintaining set points as required by the design documents.

C. Certify that TAB procedures have been completed and that TAB reports have been submitted, discrepancies corrected, and corrective work approved.

D. Set systems, subsystems, and equipment into operating mode to be tested in accordance with approved test procedures (e.g., normal shutdown, normal auto position, normal manual position, unoccupied cycle, emergency power, and alarm conditions).

3.4 Cx TEST CONDITIONS

A. Perform tests using design conditions, whenever possible.

1. Simulated conditions may, with approval of Government, be imposed using an artificial load when it is impractical to test under design conditions. Before simulating conditions, calibrate testing instruments. Provide equipment to simulate loads. Set simulated conditions as directed by Government, and document simulated conditions and methods of simulation. After tests, return configurations and settings to normal operating conditions.
2. Cx test procedures may direct that set points be altered when simulating conditions is impractical.
3. Cx test procedures may direct that sensor values be altered with a signal generator when design or simulating conditions and altering set points are impractical.

B. If tests cannot be completed because of a deficiency outside the scope of the HVAC system, document the deficiency and report it to Government. After deficiencies are resolved, reschedule tests.

C. If seasonal testing is specified, complete appropriate initial performance tests and documentation, and schedule seasonal tests.

3.5 Cx TESTS COMMON TO HVAC SYSTEMS

A. Measure capacities and effectiveness of systems, assemblies, subsystems, equipment, and components, including operational and control functions, to verify compliance with acceptance criteria.

B. Test systems, assemblies, subsystems, equipment, and components for operating modes, interlocks, control responses, responses to abnormal or emergency conditions, and response in accordance with acceptance criteria.

C. Coordinate schedule with, and perform Cx activities at the direction of, Government.

D. Comply with Construction Checklist requirements, including material verification, installation checks, startup, and performance test requirements specified in Division 23 Sections specifying HVAC systems and equipment.

E. Provide technicians, instrumentation, tools, and equipment to perform and document the following:

1. Cx Construction Checklist verification tests.
2. Cx Construction Checklist verification test demonstrations.

3.6 CONSTRUCTION CHECKLIST EXAMPLES

A. Vibration Isolation in HVAC Systems:

1. Prerequisites: Acceptance of results of construction checklists for vibration and seismic control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC Piping and Equipment".
2. Components to Be Tested:

   a. Vibration isolation control devices in HVAC systems.
   b. Support systems.

3. Test Purpose: Evaluate effectiveness of vibration isolation control devices.

4. Test Conditions, Variable Speed Equipment: Measure vibration of the facility structure at three locations designated by Government's witness at the following operating conditions:

   a. Maximum speed.
   b. Minimum speed.
   c. Critical speed.

5. Acceptance Criteria: Structure-borne vibration not to exceed specified performance.

3.7 TAB VERIFICATION

A. Prerequisites: Completion of "Examination" Article requirements and correction of deficiencies, as specified in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

B. Completion of "Preparation" Article requirements for preparation of a TAB plan that includes strategies and step-by-step procedures, and system-readiness checks and reports, as specified in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

C. Scope: HVAC air systems and hydronic piping systems.

D. Purpose: Differential flow relationships intended to maintain air and water pressurization differentials between the various areas of Project.

E. Conditions of the Test:

1. Cx Test Demonstration Sampling Rate: As specified in "Inspections" Article in Section 230593 "Testing, Adjusting, and Balancing for HVAC."
2. Systems operating in full heating mode.
3. Systems operating in full cooling mode.

F. Acceptance Criteria:

1. Under all conditions, rechecked measurements comply with "Inspections" Article in Section 230593 "Testing, Adjusting, and Balancing for HVAC."
2. Additionally, no rechecked measurement shall differ from measurements documented in the final report by more than the tolerances allowed.
3. Under all conditions, where the Contract Documents indicate a differential in airflow between supply and exhaust and/or return in a space, the differential relationship shall be maintained.

3.8 HEATING CONTROL SYSTEM Cx TESTS

A. Heating-Water Supply Temperature Control:

1. Prerequisites: Installation verification of the following:

a. TAB of heating-water flow and pressure.
b. Input Device: Heating-water supply temperature; thermostat.
c. Output Device: Control valve.
d. Display the following at the operator's workstation:

1) Use existing settings.

2. Scope: Heating-water system.
3. Purpose: Control of heating-water supply temperature at input device.
4. Conditions of the Test:

a. Minimum heating-water flow.
b. Midrange Heating-Water Flow: 50 to 60 percent of maximum.
c. Maximum heating-water flow.

5. Acceptance Criteria: Under all conditions, heating-water supply temperature is within plus or minus 2.0 deg F of set point.

B. Heating-Water Supply Temperature Reset:

1. Prerequisites: Installation verification of the following:

    a. TAB of heating-water flow and pressure.
    b. Input Device: Heating-water supply temperature; thermostat.
    c. Output Device: Control valve.
    d. Display the following at the operator's workstation:

        1) Use existing settings.

3.9 TERMINAL UNIT EQUIPMENT Cx TESTS

A. VAV Terminal Air Units with Coils:

1. Prerequisites: Installation verification of the following:

    a. Occupancy Output Device: DDC system binary output.
    b. Room Temperature Input Device: Room thermostat.
    c. Room Temperature Output Device: Electronic damper actuators and control-valve operators.
    d. Display the following at the operator's workstation:

        1) Room/area served.
        2) Room occupied/unoccupied.
        3) Room temperature indication.
        4) Room temperature set point.
        5) Room temperature set point, occupied.
        6) Room temperature set point, unoccupied.
        7) Air-damper position as percentage open.
        8) Control-valve position as percentage open.

2. Scope: VAV terminal air units with hydronic coils in supply-air systems, and associated controls.
3. Purpose:

    a. Occupancy-dependent room temperature set-point reset.
    b. Room temperature control.

4. Conditions of the Test:

    a. Cx Test Demonstration Sampling Rate: 10 percent of each model/size unit.
    b. Temperature Control - Occupied: Start with the room unoccupied. Occupy the room and observe the change to occupied status. Observe temperature control until room temperature is stable at occupied set point, plus or minus 1.0 deg F.
    c. Temperature Control - Unoccupied: Start with the room occupied. Vacate the room and observe the change to unoccupied status. Observe temperature control until room temperature is stable at unoccupied set point, plus or minus 1.0 deg F.

5. Acceptance Criteria:

    a. Temperature Control - Occupied:

1) Control system status changes from "occupied" to "unoccupied" after the specified time.
2) Room temperature is stable at occupied set point, plus or minus 1.0 deg F within 10 minutes of occupancy. Room temperature does not overshoot or undershoot set point by more than 2.0 deg F during transition.

b. Temperature Control - Unoccupied:

1) Room temperature is stable at unoccupied set point, plus or minus 1.0 deg F within minutes of occupancy.

3.10 AIR-HANDLING SYSTEM Cx TESTS

A. Supply Fan(s) Variable-Volume Control:

1. Prerequisites: Installation verification of the following:

a. Volume-Control Input Device: Static-pressure transmitter or Differential-pressure switch sensing supply-duct static pressure referenced to conditioned-space static pressure.
b. Volume-Control Output Device: Existing controller to motor speed controller. Set variable-speed drive to minimum speed when fan is stopped.
c. High-Pressure Input Device: Static-pressure transmitter sensing supply-duct static pressure referenced to static pressure outside the duct.
d. Display the following at the operator's workstation:

1) Supply-fan-discharge static-pressure indication.
2) Supply-fan-discharge static-pressure set point.
3) Supply-fan airflow rate.
4) Supply-fan speed.

2. Scope: VAV supply fan units and associated controls.
3. Purpose:

a. Supply-air discharge static pressure control.
b. Response to excess supply-air discharge static pressure condition.

4. Conditions of the Test:

a. Minimum supply-air flow.
b. Midrange Supply-Air Flow: 50 to 60 percent of maximum.
c. Maximum supply-air flow.
d. Excess supply-air discharge static pressure.

5. Acceptance Criteria:

a. At all supply-air flow rates, and during changes in supply-air flow, discharge air static pressure is at set point plus or minus 2 percent.
b. Fan stops and an alarm is initiated at the operator's workstation when supply-air discharge static pressure is at the excess static pressure, plus or minus 2 percent.

B. Air-Handler Mixed-Air Control:

1. Prerequisites: Installation verification of the following:

   a. Minimum Position Input Device: Existing controller.
   b. Output Device: Existing controller to modulating damper actuator(s).
   c. Heating Reset Input Device: Room thermostat.
   d. Supply-Air Temperature Input Device: Duct-mounted thermostat or Electronic temperature sensor.
   e. Cooling Reset Input Device: Outdoor- and return-air, duct-mounted thermostats.
   f. Display the following at the operator's workstation:

      1) Mixed-air-temperature indication.
      2) Mixed-air-temperature set point.
      3) Mixed-air damper position.

2. Scope: Air handler with mixed-air control and associated controls.
3. Purpose:

   a. Occupied time control.
   b. Minimum damper position control.
   c. Heating reset control.
   d. Supply-air temperature control.
   e. Cooling reset control.
   f. Unoccupied time control.

4. Conditions of the Test:

   a. Occupied Time Control: Start in unoccupied schedule. Advance to occupied schedule time.
   b. Minimum Damper Position Control: Command system to mode in which minimum damper position is required.
   c. Heating Reset Control: Create a call for heating.
   d. Supply-Air Temperature Control: Override supply-air temperature set point to a value 2.0 deg F above current supply-air temperature.
   e. Cooling Reset Control: Override outdoor-air temperature to a value that exceeds return-air temperature.
   f. Unoccupied Time Control: Advance to unoccupied schedule time.
   g. Control Data Trend Log: Set up a data trend log of the following input device values and output device commands. Record data at hourly intervals. Submit trend data for 24-hour periods in which natural conditions require heating reset control, supply-air temperature control, and cooling reset control.

      1) Minimum position input device.
      2) Heating reset input device.
      3) Supply-air temperature input device.
      4) Cooling reset input device.

5. Acceptance Criteria:

   a. Occupied Time Control: Mixed-air control is active in occupied mode.

b. Minimum Damper Position Control: Controller positions outdoor-air dampers to minimum position.
c. Heating Reset Control: Controller sets outdoor-air dampers to minimum position.
d. Supply-Air Temperature Control: Controller modulates outdoor-, return-, and relief-air dampers to maintain temporary supply-air temperature set point, plus or minus 1.0 deg F.
e. Cooling Reset Control: Controller sets outdoor-air dampers to minimum position when outdoor-air temperature exceeds return-air temperature.
f. Unoccupied Time Control: Controller positions outdoor- and relief-air dampers closed and return-air dampers open.
g. Control Data Trend Log: Data verify control in accordance with sequence of control.

END OF SECTION 230800

SECTION 230923 - DIRECT DIGITAL CONTROL (DDC) SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Direct digital control (DDC) system equipment and components for monitoring and controlling of HVAC, exclusive of instrumentation and control devices.

B. Related Requirements:

1. Section 260553 "Identification for Electrical Systems" for identification requirements for electrical power and communications components

1.2 DEFINITIONS

A. Algorithm: A logical procedure for solving a recurrent mathematical problem. A prescribed set of well-defined rules or processes for solving a problem in a finite number of steps.

B. Analog: A continuously varying signal value, such as current, flow, pressure, or temperature.

C. BACnet Specific Definitions:

1. BACnet: Building Automation Control Network Protocol, ASHRAE 135. A communications protocol allowing devices to communicate data and services over a network.
2. BACnet Interoperability Building Blocks (BIBBs): BIBB defines a small portion of BACnet functionality that is needed to perform a particular task. BIBBs are combined to build the BACnet functional requirements for a device.
3. BACnet/IP: Defines and allows using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP subnetworks that share the same BACnet network number.
4. BACnet Testing Laboratories (BTL): Organization responsible for testing products for compliance with ASHRAE 135, operated under direction of BACnet International.

D. Binary: Two-state signal where a high signal level represents "ON" or "OPEN" condition and a low signal level represents "OFF" or "CLOSED" condition. "Digital" is sometimes used interchangeably with "Binary" to indicate a two-state signal.

E. Controller: Generic term for any standalone, microprocessor-based, digital controller residing on a network, used for local or global control. Three types of controllers are indicated: network controllers, programmable application controllers, and application-specific controllers.

F. Control System Integrator: An entity that assists in expansion of existing enterprise system and support of additional operator interfaces to I/O being added to existing enterprise system.

G. COV: Changes of value.

H. DDC System Provider: Authorized representative of, and trained by, DDC system manufacturer and responsible for execution of DDC system Work indicated.

I. Distributed Control: Processing of system data is decentralized and control decisions are made at subsystem level. System operational programs and information are provided to remote subsystems and status is reported back. On loss of communication, subsystems to be capable of operating in a standalone mode using the last best available data.

J. E/P: Voltage to pneumatic.

K. Gateway: Bidirectional protocol translator that connects control systems that use different communication protocols.

L. HLC: Heavy load conditions.

M. I/O: System through which information is received and transmitted. I/O refers to analog input (AI), binary input (BI), analog output (AO) and binary output (BO). Analog signals are continuous and represent control influences such as flow, level, moisture, pressure, and temperature. Binary signals convert electronic signals to digital pulses (values) and generally represent two-position operating and alarm status. "Digital," (DI) and (DO), is sometimes used interchangeably with "Binary," (BI) and (BO), respectively.

N. I/P: Current to pneumatic.

O. LAN: Local area network.

P. LNS: LonWorks Network Services.

Q. LON Specific Definitions:

1. FTT-10: Echelon Transmitter-Free Topology Transceiver.
2. LonMark International: Association comprising suppliers and installers of LonTalk products. Association provides guidelines for implementing LonTalk protocol to ensure interoperability through a standard or consistent implementation.
3. LonTalk: An open standard protocol developed by Echelon Corporation that uses a "Neuron Chip" for communication. LonTalk is a register trademark of Echelon.
4. LonWorks: Network technology developed by Echelon.
5. Node: Device that communicates using CTA-709.1-D protocol and that is connected to a CTA-709.1-D network.
6. Node Address: The logical address of a node on the network, consisting of a Domain number, Subnet number, and Node number. "Node number" portion of an address is a number assigned to device during installation, is unique within a subnet, and is not a factory-set unique Node ID.
7. Node ID: A unique 48-bit identifier assigned at factory to each CTA-709.1-D device. Sometimes called a "Neuron ID."
8. Program ID: An identifier (number) stored in a device (usually, EEPROM) that identifies node manufacturer, functionality of device (application and sequence), transceiver used, and intended device usage.

9. Standard Configuration Property Type (SCPT): Pronounced "skip-it." A standard format type maintained by LonMark for configuration properties.
10. Standard Network Variable Type (SNVT): Pronounced "snivet." A standard format type maintained by LonMark used to define data information transmitted and received by individual nodes. "SNVT" is used in two ways. It is an acronym for "Standard Network Variable Type" and is often used to indicate a network variable itself (i.e., it can mean "a network variable of a standard network variable type").
11. Subnet: Consists of a logical grouping of up to 127 nodes, where logical grouping is defined by node addressing. Each subnet is assigned a number, which is unique within a Domain. See "Node Address."
12. TP/FT-10: Free Topology Twisted Pair network defined by CTA-709.3 and is most common media type for a CTA-709.1-D control network.
13. TP/XF-1250: High-speed, 1.25 Mbps, twisted-pair, doubly terminated bus network defined by "LonMark Interoperability Guidelines" and typically used only to connect multiple TP/FT-10 networks.
14. User-Defined Configuration Property Type (UCPT): Pronounced "u-keep-it." A Configuration Property format type that is defined by device manufacturer.
15. User-Defined Network Variable Type (UNVT): Network variable format defined by device manufacturer. UNVTs create non-standard communications that other vendors' devices may not correctly interpret and may negatively impact system operation. UNVTs are not allowed.

R. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control, signaling power-limited circuits.

S. Mobile Device: A data-enabled phone or tablet computer capable of connecting to a cellular data network and running a native control application or accessing a web interface.

T. Modbus TCP/IP: An open protocol for exchange of process data.

U. MS/TP: Master-slave/token-passing, ISO/IEC/IEEE 8802-3. Datalink protocol LAN option that uses twisted-pair wire for low-speed communication.

V. MTBF: Mean time between failures.

W. Network Controller: Digital controller, which supports a family of programmable application controllers and application-specific controllers, that communicates on peer-to-peer network for transmission of global data.

X. Network Repeater: Device that receives data packet from one network and rebroadcasts it to another network. No routing information is added to protocol.

Y. Peer to Peer: Networking architecture that treats all network stations as equal partners.

Z. POT: Portable operator's terminal.

AA. RAM: Random access memory.

BB. RF: Radio frequency.

CC. Router: Device connecting two or more networks at network layer.

DD. Server: Computer used to maintain system configuration, historical and programming database.

EE. TCP/IP: Transport control protocol/Internet protocol.

FF. UPS: Uninterruptible power supply.

GG. USB: Universal Serial Bus.

HH. User Datagram Protocol (UDP): This protocol assumes that the IP is used as the underlying protocol.

II. VAV: Variable air volume.

JJ. WLED: White light emitting diode.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Multiple Submissions:

1. If multiple submissions are required to execute work within schedule, first submit a coordinated schedule clearly defining intent of multiple submissions. Include a proposed date of each submission with a detailed description of submittal content to be included in each submission.
2. Clearly identify each submittal requirement indicated and in which submission the information will be provided.
3. Include an updated schedule in each subsequent submission with changes highlighted to easily track the changes made to previous submitted schedule.

B. Product Data:

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics, electrical characteristics, and furnished accessories indicating process operating range, accuracy over range, control signal over range, default control signal with loss of power, calibration data specific to each unique application, electrical power requirements, and limitations of ambient operating environment, including temperature and humidity.
3. Product description with complete technical data, performance curves, and product specification sheets.
4. Installation, operation, and maintenance instructions including factors effecting performance.
5. Bill of materials of indicating quantity, manufacturer, and extended model number for each unique product.

    a. Control dampers and actuators.

b. Control valves and actuators.

6. When manufacturer's product datasheets apply to a product series rather than a specific product model, clearly indicate and highlight only applicable information.
7. Each submitted piece of product literature to clearly cross reference specification and drawings that submittal is to cover.

8. Schedule and design calculations for control valves and actuators.

   a. Flow at Project design and minimum flow conditions.
   b. Pressure-differential drop across valve at Project design flow condition.
   c. Maximum system pressure-differential drop (pump close-off pressure) across valve at Project minimum flow condition.
   d. Design and minimum control valve coefficient with corresponding valve position.
   e. Maximum close-off pressure.
   f. Leakage flow at maximum system pressure differential.
   g. Torque required at worst case condition for sizing actuator.
   h. Actuator selection indicating torque provided.
   i. Actuator signal to control damper (on, close or modulate).
   j. Actuator position on loss of power.
   k. Actuator position on loss of control signal.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Statements:

1. Systems Provider's Qualification Data:

   a. Resume of project manager assigned to Project.
   b. Resumes of application engineering staff assigned to Project.
   c. Resumes of installation and programming technicians assigned to Project.
   d. Resumes of service technicians assigned to Project.
   e. Brief description of past project including physical address, floor area, number of floors, building system cooling and heating capacity, and building's primary function.
   f. Description of past project DDC system, noting similarities to Project scope and complexity indicated.
   g. Names of staff assigned to past project that will also be assigned to execute work of this Project.
   h. Government contact information for past project including name, phone number, and email address.
   i. Contractor contact information for past project including name, phone number, and email address.
   j. Government contact information for past project including name, phone number, and email address.

2. Manufacturer's qualification data.
3. Testing agency's qualification data.

B. Product Certificates:

1. Data Communications Protocol Certificates:

    a. Certifying that each proposed DDC system component complies with ASHRAE 135.
    b. Certifying that each proposed DDC system component complies with LonWorks.

2. VAV units.

C. Test and Evaluation Reports:

1. Product Test Reports: For each product, for tests performed by a qualified testing agency.
2. Preconstruction Test Reports: For each separate test performed.

D. Source Quality-Control Submittals:

1. Source quality-control reports.

E. Field Quality-Control Submittals:

1. Field quality-control reports.

1.6 QUALITY ASSURANCE

A. Testing Agency Qualifications: Member company of NETA.

1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Contractor shall use controls equipment salvaged from demolished units or replace controls within kind equipment.

2.2 CONTROL WIRE AND CABLE

A. Wire: Single conductor control wiring above 24 V.

1. Wire Size: Minimum AWG equal to or greater than existing.
2. Conductors: 7/24 soft annealed copper strand with 2- to 2.5-inch lay.
3. Conductor Insulation: 600 V, Type THWN or Type THHN, and 90 deg C in accordance with UL 83.
4. Conductor Insulation Colors: Black (hot), white (neutral), and green (ground).
5. Furnish on spools.

B. Single, Twisted-Shielded, Instrumentation Cable above 24 V:

1. Wire Size: Minimum AWG equal to or greater than existing.
2. Conductors: Twisted, 7/24 soft annealed copper strand with a 2- to 2.5-inch lay.
3. Conductor Insulation: Type THHN/THWN or Type TFN rating.

4. Conductor Insulation Colors:

   a. Twisted Pair: Black and white.
   b. Twisted Triad: Black, red, and white.

5. Shielding: 100 percent type, 0.35/0.5-mil aluminum/Mylar tape, helically applied with 25 percent overlap, and aluminum side in with tinned copper drain wire.
6. Outer Jacket Insulation: 600 V, 90 deg C rating, and Type TC cable.
7. Furnish on spools.

C. Single, Twisted-Shielded, Instrumentation Cable 24 V and Less:

1. Wire Size: Minimum AWG equal to or greater than existing.
2. Conductors: Twisted, 7/24 soft annealed copper stranding with a 2- to 2.5-inch lay.
3. Conductor Insulation: Nominal 15-mil thickness, constructed from flame-retardant PVC.
4. Conductor Insulation Colors:

   a. Twisted Pair: Black and white.
   b. Twisted Triad: Black, red, and white.

5. Shielding: 100 percent type, 1.35-mil aluminum/polymer tape, helically applied with 25 percent overlap, and aluminum side in with tinned copper drain wire.
6. Outer Jacket Insulation: 300 V, 105 deg C rating, and Type PLTC cable.
7. Furnish on spools.

D. LAN and Communication Cable: Comply with DDC system manufacturer requirements for network being installed.

1. Comply with following requirements for balanced twisted pair cable described in Section 260523 "Control-Voltage Electrical Power Cables."

   a. Plenum rated.
   b. Unique color that is different from other cables used on Project.

2.3 RACEWAYS

A. Comply with requirements in Section 260533.13 "Conduits for Electrical Systems" and Section 260533.16 "Boxes and Covers for Electrical Systems" for electrical power raceways and boxes.

B. Comply with requirements in Section 270528 "Pathways for Communications Systems" for raceways for balanced twisted pair cables and optical fiber cables.

2.4 ACCESSORIES

A. Contractor shall use equipment salvaged from demolished units, or replace controls equipment within kind equipment.

PART 3 - EXECUTION

3.1 DDC SYSTEM INTERFACE WITH OTHER SYSTEMS AND EQUIPMENT

A. Communication Interface to Equipment with Integral Controls:

1. DDC system has communication interface with equipment having integral controls and having communication interface for remote monitoring or control.

2. Equipment to Be Connected:

a. Air-handling units specified in Section 233600 "Air Terminal Units."
b. Building's existing DDC system and controllers.

3.2 PREINSTALLATION INTEGRATION TESTING

A. Perform the following pretesting of other systems and equipment integration with DDC system before field installation:

1. Test all communications in a controlled environment to ensure connectivity.
2. Load software and demonstrate functional compliance with each control sequence of operation indicated.
3. Using simulation, demonstrate compliance with sequences of operation and other requirements indicated including, but not limited to, the following:

a. HVAC equipment controlled through DDC system, such as boilers, chillers, pumps, and air-handling units.
b. Equipment faults and system recovery with fault annunciation.
c. Analog and Boolean value alarming and annunciation.

4. Develop a method for testing interfaces before deployment.
5. Submit documentation supporting compliance upon request.

3.3 CONTROL DEVICES FOR INSTALLATION BY INSTALLERS

A. Deliver selected control devices, specified in indicated HVAC instrumentation and control device Sections, to identified equipment and systems manufacturers for factory installation and to identified installers for field installation.

B. Deliver the following to plumbing and HVAC piping installers for installation in piping. Include installation instructions to Installer and supervise installation for compliance with requirements.

1. Control valves, which are specified in Section 230923.11 "Control Valves."

3.4 CONTROL DEVICES FOR EQUIPMENT MANUFACTURER FACTORY INSTALLATION

A. Deliver the following to air-handling unit manufacturer for factory installation. Include installation instructions to air-handling unit manufacturer.

1. Install with existing controls equipment. Replace with similar in-kind devices if damaged or malfunctioning.

B. Deliver the following to terminal unit manufacturer for factory installation. Include installation instructions to terminal unit manufacturer.

1. Install with existing controls equipment. Replace with similar in-kind devices if damaged or malfunctioning.

C. Deliver the following to fan-coil unit manufacturer for factory installation. Include installation instructions to fan-coil unit manufacturer.

1. Install with existing controls equipment. Replace with similar in-kind devices if damaged or malfunctioning.

3.5 GENERAL INSTALLATION REQUIREMENTS

A. Install products to satisfy more stringent of all requirements indicated.

B. Install products level, plumb, parallel, and perpendicular with building construction.

C. Support products, tubing, piping wiring, and raceways. Brace products to prevent lateral movement and sway or a break in attachment.

D. If codes and referenced standards are more stringent than requirements indicated, comply with requirements in codes and referenced standards.

E. Fabricate openings and install sleeves in ceilings, floors, roof, and walls required by installation of products. Before proceeding with drilling, punching, and cutting, check for concealed work to avoid damage. Patch, flash, grout, seal, and refinish openings to match adjacent condition.

F. Firestop Penetrations Made in Fire-Rated Assemblies: Comply with requirements in Section 078413 "Penetration Firestopping."

G. Seal penetrations made in acoustically rated assemblies. Comply with requirements in Section 079200 "Joint Sealants."

H. Fastening Hardware:

1. Wrenches, pliers, and other tools that damage surfaces of rods, nuts, and other parts are prohibited for work of assembling and tightening fasteners.
2. Tighten bolts and nuts firmly and uniformly. Do not overstress threads by excessive force or by oversized wrenches.
3. Lubricate threads of bolts, nuts, and screws with graphite and oil before assembly.

I. If product locations are not indicated, install products in locations that are accessible and that will permit service and maintenance from floor, equipment platforms, or catwalks without removal of permanently installed furniture and equipment.

3.6 INSTALLATION OF CONTROLLERS

A. Install controllers in enclosures to comply with indicated requirements.

B. Connect controllers to field power supply.

C. Install controllers with latest version of applicable software and configure to execute requirements indicated.

D. Test and adjust controllers to verify operation of connected I/O to achieve performance indicated requirements while executing sequences of operation.

3.7 ELECTRIC POWER CONNECTIONS

A. Connect electrical power to DDC system products requiring electrical power connections.

B. Design of electrical power to products not indicated with electric power is delegated to DDC system provider and installing trade to provide a fully functioning DDC system. Work is to comply with NFPA 70 and other requirements indicated.

C. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers" for electrical power circuit breakers.

D. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for electrical power conductors and cables.

E. Comply with requirements in Section 260533.13 "Conduits for Electrical Systems" and Section 260533.16 "Boxes and Covers for Electrical Systems" for electrical power raceways and boxes.

3.8 NETWORK NAMING AND NUMBERING

A. Coordinate with Government and provide unique naming and addressing for networks and devices.

B. ASHRAE 135 Networks:

1. MAC Address: To match existing system.

2. Network Numbering: To match existing system.

3. Device Object Identifier Property Number: To match existing system.

4. Device Object Name Property Text: To match existing system.

5. Object Name Property Text for Other Than Device Objects: To match existing system.

6. Object Identifier Property Number for Other Than Device Objects: To match existing system.

3.9 INSTALLATION OF CONTROL WIRE, CABLE, AND RACEWAY

A. Comply with NECA 1.

B. Wire and Cable Installation:

1. Comply with installation requirements in Section 260523 "Control-Voltage Electrical Power Cables."
2. Comply with installation requirements in Section 271313 "Communications Copper Backbone Cabling."
3. Comply with installation requirements in Section 271513 "Communications Copper Horizontal Cabling."

4. Install cables with protective sheathing that is waterproof and capable of withstanding continuous temperatures of 90 deg C with no measurable effect on physical and electrical properties of cable.

    a. Provide shielding to prevent interference and distortion from adjacent cables and equipment.

5. Terminate wiring in a junction box.

    a. Clamp cable over jacket in a junction box.
    b. Individual conductors in the stripped section of cable is to be slack between the clamping point and terminal block.

6. Terminate field wiring and cable not directly connected to instruments and control devices having integral wiring terminals using terminal blocks.
7. Install signal transmission components in accordance with IEEE C2, REA Form 511a, NFPA 70, and as indicated.
8. Use shielded cable to transmitters.
9. Use shielded cable to temperature sensors.
10. Perform continuity and meager testing on wire and cable after installation.

C. Conduit Installation:

1. Comply with Section 260533.13 "Conduits for Electrical Systems" for control-voltage conductors.
2. Comply with Section 270528 "Pathways for Communications Systems" for balanced twisted pair cabling and optical fiber installation.

3.10 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and installations, including connections.

C. Perform the following tests and inspections:

1. Perform each visual and mechanical inspection and electrical test stated in NETA ATS. Certify compliance with test parameters.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

D. Optical Fiber Cable Testing:

1. Perform preinstallation, in-progress, and final tests, supplemented by additional tests, as necessary.
2. Preinstallation Cable Verification: Verify integrity and serviceability for new cable lengths before installation. This assurance may be provided by using vendor verification documents, testing, or other methods. At a minimum, furnish evidence of verification for cable attenuation and bandwidth parameters.
3. In-Progress Testing: Perform standard tests for correct pair identification and termination during installation to ensure proper installation and cable placement. Perform tests in addition to those specified if there is any reason to question condition of material furnished and installed. Testing accomplished is to be documented by agency conducting tests. Submit test results for Project record.
4. Final Testing: Perform final test of installed system to demonstrate acceptability as installed. Perform testing according to test plan supplied by DDC system manufacturer. Correct defective Work or material and retest. At a minimum, final testing for cable system, including spare cable, to verify compliance of attenuation, length, and bandwidth parameters with performance indicated.
5. Test Equipment: Use optical fiber time-domain reflectometer for testing of length and optical connectivity.
6. Test Results: Record test results and submit copy of test results for Project record.

3.11 DDC SYSTEM I/O CHECKOUT PROCEDURES

A. Check installed products before continuity tests, leak tests, and calibration.

B. Check instruments for proper location and accessibility.

C. Check instruments for proper installation on direction of flow, elevation, orientation, insertion depth, or other applicable considerations that will impact performance.

D. Check instrument tubing for proper isolation, fittings, slope, dirt legs, drains, material, and support.

E. For pneumatic products, verify that air supply for each product is properly installed.

F. Control Damper Checkout:

1. For pneumatic control dampers, verify that pressure gauges are provided in each air line connected to the damper actuator and positioner.
2. Verify that control dampers are installed correctly for flow direction.
3. Verify that proper blade alignment, either parallel or opposed, has been provided.
4. Verify that damper frame attachment is properly secured and sealed.
5. Verify that damper actuator and linkage attachment are secure.
6. Verify that actuator wiring is complete, enclosed, and connected to correct power source.

7. Verify that damper blade travel is unobstructed.

G. Control Valve Checkout:

1. For pneumatic control valves, verify that pressure gauges are provided in each air line connected to the valve actuator and positioner.
2. Verify that control valves are installed correctly for flow direction.
3. Verify that valve body attachment is properly secured and sealed.
4. Verify that valve actuator and linkage attachment are secure.
5. Verify that actuator wiring is complete, enclosed, and connected to correct power source.
6. Verify that valve ball, disc, or plug travel is unobstructed.
7. After piping systems have been tested and put into service, but before insulating and balancing, inspect each valve for leaks. Adjust or replace packing to stop leaks. Replace valve if leaks persist.

H. Instrument Checkout:

1. Verify that instrument is correctly installed for location, orientation, direction, and operating clearances.
2. Verify that attachment is properly secured and sealed.
3. Verify that conduit connections are properly secured and sealed.
4. Verify that wiring is properly labeled with unique identification, correct type, and size and is securely attached to proper terminals.
5. Inspect instrument tag against approved submittal.
6. For instruments with tubing connections, verify that tubing attachment is secure and isolation valves have been provided.
7. For flow instruments, verify that recommended upstream and downstream distances have been maintained.
8. For temperature instruments, verify the following:

   a. Sensing element type and proper material.
   b. Length and insertion.

3.12 DDC SYSTEM I/O ADJUSTMENT, CALIBRATION, AND TESTING

A. Calibrate each instrument installed that is not factory calibrated and provided with calibration documentation.

B. Provide written description of proposed field procedures and equipment for calibrating each type of instrument. Submit procedures before calibration and adjustment.

C. For each analog instrument, make three-point test of calibration for both linearity and accuracy.

D. Equipment and procedures used for calibration to comply with instrument manufacturer's written instructions.

E. Provide diagnostic and test equipment for calibration and adjustment.

1. Use field testing and diagnostic instruments and equipment with an accuracy at least twice the instrument accuracy of instrument to be calibrated. For example, test and

calibrate an installed instrument with accuracy of 1 percent using field testing and diagnostic instrument with accuracy of 0.5 percent or better.

F. Calibrate each instrument in accordance with instruction manual supplied by instrument manufacturer.

G. If after calibration the indicated performance cannot be achieved, replace out-of-tolerance instruments.

H. Comply with field testing requirements and procedures indicated by ASHRAE's Guideline 11, "Field Testing of HVAC Controls Components," in the absence of specific requirements, and to supplement requirements indicated.

I. Analog Signals:

1. Check analog voltage signals using a precision voltage meter at zero, 50, and 100 percent.
2. Check analog current signals using a precision current meter at zero, 50, and 100 percent.
3. Check resistance signals for temperature sensors at zero, 50, and 100 percent of operating span using a precision-resistant source.

J. Digital Signals:

1. Check digital signals using a jumper wire.
2. Check digital signals using an ohmmeter to test for contact making or breaking.

K. Control Dampers:

1. Stroke and adjust control dampers following manufacturer's recommended procedure, from 100 percent open to 100 percent closed and back to 100 percent open.

2. Stroke pneumatic control dampers with pilot positioners. Adjust damper and positioner following manufacturer's recommended procedure, so damper is 100 percent closed, 50 percent closed, and 100 percent open at proper air pressures.
3. Check and document open and close cycle times for applications with cycle time less than 30 seconds.
4. For control dampers equipped with positive position indication, check feedback signal at multiple positions to confirm proper position indication.

L. Control Valves:

1. Stroke and adjust control valves following manufacturer's recommended procedure, from 100 percent open to 100 percent closed and back to 100 percent open.

2. Stroke pneumatic control valves with pilot positioners. Adjust valve and positioner following manufacturer's recommended procedure, so valve is 100 percent closed, 50 percent closed, and 100 percent open at proper air pressures.
3. Check and document open and close cycle times for applications with cycle time less than 30 seconds.
4. For control valves equipped with positive position indication, check feedback signal at multiple positions to confirm proper position indication.

M. Meters: Check meters at zero, 50, and 100 percent of Project design values.

N. Sensors: Check sensors at zero, 50, and 100 percent of Project design values.

O. Switches: Calibrate switches to make or break contact at set points indicated.

P. Transmitters:

1. Check and calibrate transmitters at zero, 50, and 100 percent of Project design values.
2. Calibrate resistance temperature transmitters at zero, 50, and 100 percent of span using a precision-resistant source.

3.13 DDC SYSTEM CONTROLLER CHECKOUT

A. Verify power supply.

1. Verify voltage, phase, and hertz.
2. Verify that protection from power surges is installed and functioning.
3. Verify that ground fault protection is installed.
4. If applicable, verify if connected to UPS unit.
5. If applicable, verify if connected to backup power source.
6. If applicable, verify that power conditioning units are installed.

B. Verify that wire and cabling are properly secured to terminals and labeled with unique identification.

C. Verify that spare I/O capacity is provided.

3.14 DDC CONTROLLER I/O CONTROL LOOP TESTS

A. Testing:

1. Test every I/O point connected to DDC controller to verify that safety and operating control set points are as indicated and as required to operate controlled system safely and at optimum performance.
2. Test every I/O point throughout its full operating range.
3. Test every control loop to verify that operation is stable and accurate.
4. Adjust control loop proportional, integral, and derivative settings to achieve optimum performance while complying with performance requirements indicated. Document testing of each control loop's precision and stability via trend logs.
5. Test and adjust every control loop for proper operation according to sequence of operation.
6. Test software and hardware interlocks for proper operation. Correct deficiencies.
7. Operate each analog point at the following:

a. Upper quarter of range.
b. Lower quarter of range.
c. At midpoint of range.

8. Exercise each binary point.
9. For every I/O point in DDC system, read and record each value at operator workstation, at DDC controller, and at field instrument simultaneously. Value displayed at operator workstation, at DDC controller, and at field instrument must match.
10. Prepare and submit report documenting results for each I/O point in DDC system and include in each I/O point a description of corrective measures and adjustments made to achieve desire results.

3.15 DDC SYSTEM VALIDATION TESTS

A. Perform validation tests before requesting final review of system. Before beginning testing, first submit Pretest Checklist and Test Plan.

B. After review of Pretest Checklist and Test Plan, execute all tests and procedures indicated in plan.

C. After testing is complete, submit completed Pretest Checklist.

D. Pretest Checklist: Submit the following list with items checked off once verified:

1. Detailed explanation for any items that are not completed or verified.
2. Required mechanical installation work is successfully completed and HVAC equipment is working correctly.
3. HVAC equipment motors operate below full-load amperage ratings.
4. Required DDC system components, wiring, and accessories are installed.
5. Installed DDC system architecture matches approved Drawings.
6. Control electric power circuits operate at proper voltage and are free from faults.
7. Required surge protection is installed.
8. DDC system network communications function properly, including uploading and downloading programming changes.

9. Using BACnet protocol analyzer, verify that communications are error free.
10. Each controller's programming is backed up.
11. Equipment, products, tubing, wiring cable, and conduits are properly labeled.
12. All I/O points are programmed into controllers.
13. Testing, adjusting, and balancing work affecting controls is complete.
14. Dampers and actuators zero and span adjustments are set properly.
15. Each control damper and actuator goes to failed position on loss of power.
16. Valves and actuators zero and span adjustments are set properly.
17. Each control valve and actuator goes to failed position on loss of power.
18. Meter, sensor, and transmitter readings are accurate and calibrated.
19. Control loops are tuned for smooth and stable operation.
20. View trend data where applicable.
21. Each controller works properly in standalone mode.
22. Safety controls and devices function properly.
23. Interfaces with fire-alarm system function properly.
24. Electrical interlocks function properly.
25. Operator workstations and other interfaces are delivered, all system and database software is installed, and graphics are created.
26. Record Drawings are completed.

E. Test Plan:

1. Prepare and submit validation Test Plan including test procedures for performance validation tests.
2. Address all specified functions of DDC system and sequences of operation in Test Plan.
3. Explain detailed actions and expected results to demonstrate compliance with requirements indicated.
4. Explain method for simulating necessary conditions of operation used to demonstrate performance.
5. Include Test Checklist to be used to check and initial that each test has been successfully completed.
6. Submit Test Plan documentation 10 business days before start of tests.

F. Validation Test:

1. Verify operating performance of each I/O point in DDC system.

    a. Verify analog I/O points at operating value.
    b. Make adjustments to out-of-tolerance I/O points.

        1) Identify I/O points for future reference.
        2) Simulate abnormal conditions to demonstrate proper function of safety devices.
        3) Replace instruments and controllers that cannot maintain performance indicated after adjustments.

2. Simulate conditions to demonstrate proper sequence of control.
3. Readjust settings to design values and observe ability of DDC system to establish desired conditions.
4. 24 hours after initial validation test, do as follows:

    a. Re-check I/O points that required corrections during initial test.
    b. Identify I/O points that still require additional correction and make corrections necessary to achieve desired results.

5. 24 Hours after second validation test, do as follows:

    a. Re-check I/O points that required corrections during second test.
    b. Continue validation testing until I/O point is normal on two consecutive tests.

6. Completely check out, calibrate, and test all connected hardware and software to ensure that DDC system performs according to requirements indicated.
7. After validation testing is complete, prepare and submit report indicating results of testing. For all I/O points that required correction, indicate how many validation re-tests it took to pass. Identify adjustments made for each test and indicate instruments that were replaced.

3.16 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

END OF SECTION 230923

SECTION 230923.11 - CONTROL VALVES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Control valves.

B. Related Requirements:

1. Section 230923 "Direct Digital Control (DDC) System for HVAC" control equipment and software, relays, electrical power devices, uninterruptible power supply units, wire, and cable.

1.2 DEFINITIONS

A. Cv: Valve coefficient.

B. DDC: Direct digital control.

C. EPT: Ethylene-propylene terpolymer rubber.

D. HNBR: Hydrogenated nitrile butadiene rubber.

E. NBR: Nitrile butadiene rubber.

F. PTFE: Polytetrafluoroethylene.

G. RMS: Root-mean-square value of alternating voltage, which is the square root of the mean value of the square of the voltage values during a complete cycle.

H. RTFE: Glass-fiber-reinforced PTFE.

I. TFM: A chemically modified PTFE.

1.3 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

C. ASME Compliance: Fabricate and label products to comply with ASME Boiler and Pressure Vessel Code where required by authorities having jurisdiction.

D. Code Compliance: Comply with governing energy code.

E. Ground Fault: Properly ground products to prevent failing due to ground fault conditions.

F. Backup Power Source: Serve control valve actuators from a backup power source where associated with systems and equipment served by a backup power source.

G. Environmental Conditions: For actuators not available with integral enclosures complying with requirements indicated, house in protective secondary enclosures complying with requirements.

H. Selection Criteria:

1. Suitable for operation throughout full range of system operating conditions encountered.

a. Heating Hot Water: 180° F at 125 psi.

2. Control Valve Leakage: FCI 70-2, Class IV or less leakage, unless otherwise indicated.
3. Control Valve Pattern: match existing valve being replaced.
4. Control Valve Flow Characteristics, Unless Otherwise Indicated:

a. Match existing valve being replaced.

5. Fail-Safe Positions, Unless Otherwise Indicated:

a. Match existing valve being replaced.

6. Stable Operation: Select control valves and actuators for stable operation throughout full range of operation, from design Cv at design flow to minimum Cv.

PART 3 - EXECUTION

3.1 CONTROL VALVE APPLICATIONS

A. Control Valves:

1. Select from valves specified in "Control Valves" Article to achieve performance requirements and characteristics indicated while subjected to full range of system operation encountered.

3.2 INSTALLATION, GENERAL

A. Furnish and install products required to satisfy most stringent requirements indicated.

B. Install products level, plumb, parallel, and perpendicular with building construction.

C. Properly support control valves and actuators, tubing, piping, wiring, and conduits to comply with requirements indicated. Brace all products to prevent lateral movement and sway or a break in attachment when subjected to a seismic event, wind, or other forces common to the application.

D. Provide ceiling, floor, roof, and wall openings and sleeves required by installation. Before proceeding with drilling, punching, or cutting, check location first for concealed products that could potentially be damaged. Patch, flash, grout, seal, and refinish openings to match adjacent condition.

E. Seal penetrations made in fire-rated and acoustically rated assemblies.

F. Fastening Hardware:

1. Wrenches, pliers, and other tools that will cause injury to or mar surfaces of rods, nuts, and other parts are prohibited for assembling and tightening nuts.
2. Tighten bolts and nuts firmly and uniformly. Do not overstress threads by excessive force or by oversized wrenches.
3. Lubricate threads of bolts, nuts, and screws with graphite and oil before assembly.

G. Install products in locations that are accessible and that will permit calibration and maintenance from floor, equipment platforms, or catwalks. Where ladders are required for Government's access, confirm unrestricted ladder placement is possible under occupied condition.

H. Corrosive Environments:

1. Use products that are suitable for environment to which they will be subjected.
2. Use Type 316 stainless steel tubing and fittings when in contact with a corrosive environment.
3. When conduit is in contact with a corrosive environment, use Type 316 stainless steel conduit and fittings or conduit and fittings that are coated with a corrosive-resistant coating that is suitable for environment.
4. Where control devices are located in a corrosive environment and are not corrosive resistant from manufacturer, field install products in a NEMA 250, Type 4X enclosure constructed of Type 316L stainless steel.

3.3 CONTROL VALVES

A. Install pipe reducers for control valves smaller than line size. Position reducers as close to control valve as possible but at distance to avoid interference and impact to performance. Install with manufacturer-recommended clearance.

B. Install flanges or unions to allow drop-in and -out valve installation.

C. Valve Orientation:

1. Where possible, install valves that are installed in horizontal piping, with stems upright and not more than 15 degrees off of vertical, not inverted.
2. Install valves in a position to allow full stem movement.

3. Where possible, install butterfly valves that are installed in horizontal piping, with stems in horizontal position and with low point of disc opening with direction of flow.

D. Clearance:

1. Locate valves for easy access, and provide separate support of valves that cannot be handled by service personnel without hoisting mechanism.
2. Install valves with at least 12 inches of clear space around valve and between valves and adjacent surfaces.

E. Threaded Valves:

1. Note internal length of threads in valve ends, and proximity of valve internal seat or wall, to determine how far pipe should be threaded into valve.
2. Align threads at point of assembly.
3. Apply thread compound to external pipe threads, except where dry seal threading is specified.
4. Assemble joint, wrench tight. Apply wrench on valve end as pipe is being threaded.

F. Flanged Valves:

1. Align flange surfaces parallel.
2. Assemble joints by sequencing bolt-tightening to make initial contact of flanges and gaskets as flat and parallel as possible. Use suitable lubricants on bolt threads. Tighten bolts gradually and uniformly with a torque wrench.

3.4 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Use same designation at each end for each piece of wire, cable, and tubing for operators to determine continuity at points of connection. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

B. Install engraved phenolic nameplate with valve identification on valve. Comply with requirements in Section 230923 "Direct Digital Control (DDC) System for HVAC."

3.5 ELECTRICAL CONNECTIONS

A. Install electrical power to field-mounted control devices requiring electrical power.

B. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables" and Section 260523 "Control-Voltage Electrical Power Cables."

C. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

D. Furnish and install raceways. Comply with requirements in Section 260533.13 "Conduits for Electrical Systems."

E. Furnish and install circuit breakers. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers."

F. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

G. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.6 CONTROL CONNECTIONS

A. Install control signal wiring to field-mounted control devices.

B. Connect control signal wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

C. Furnish and install raceways. Comply with requirements in Section 260533.13 "Conduits for Electrical Systems."

3.7 CLEANING

A. Remove grease, mastic, adhesives, dust, dirt, stains, fingerprints, labels, and other foreign materials from exposed surfaces.

3.8 STARTUP

A. Control Valve Checkout:

1. Check installed products before continuity tests, leak tests, and calibration.
2. Check valves for proper location and accessibility.
3. Check valves for proper installation for direction of flow, elevation, orientation, insertion depth, or other applicable considerations that will impact performance.
4. Verify that control valves are installed correctly for flow direction.
5. Verify that valve body attachment is properly secured and sealed.
6. Verify that valve actuator and linkage attachment are secure.
7. Verify that actuator wiring is complete, enclosed, and connected to correct power source.
8. Verify that valve ball, disc, and plug travel are unobstructed.
9. After piping systems have been tested and put into service, but before insulating and balancing, inspect each valve for leaks. Adjust or replace packing to stop leaks. Replace the valve if leaks persist.

3.9 ADJUSTMENT, CALIBRATION, AND TESTING

A. Stroke and adjust control valves following manufacturer's recommended procedure, from 100 percent open to 100 percent closed back to 100 percent open.

B. Check and document open and close cycle times for applications with a cycle time of less than 15 seconds.

C. For control valves equipped with positive position indication, check feedback signal at multiple positions to confirm proper position indication.

END OF SECTION 230923.11

SECTION 232113 - HYDRONIC PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper tube and fittings.
2. Piping joining materials.
3. Transition fittings.
4. Dielectric fittings.

1.2 ACTION SUBMITTALS

A. Product data.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Piping layout, or BIM model, drawn to scale, indicating the items described in this Section, and coordinated with all building trades.

B. Qualification Data: For Installer.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Hydronic piping components and installation are to be capable of withstanding the following minimum working pressures and temperatures unless otherwise indicated:

1. Hot-Water Heating Piping: 100 psig at 180 deg F.

2.2 COPPER TUBE AND FITTINGS

A. Drawn-Temper Copper Tube: ASTM B88, Type K and ASTM B88, Type L.

B. Annealed-Temper Copper Tube: ASTM B88, Type K and ASTM B88, Type L.

C. DWV Copper Tube: ASTM B306, Type DWV.

D. Cast-Copper, Solder-Joint Fittings: ASME B16.18 pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.

E. Wrought-Copper, Solder-Joint Fittings: ASME B16.22 pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.

F. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends. Do not use solder joints on pipe sizes greater than NPS 4.

G. Cast-Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces and solder-joint or threaded ends. Do not use solder joints on pipe sizes greater than NPS 4.

H. Wrought-Copper Unions: ASME B16.22. Do not use solder joints on pipe sizes greater than NPS 4.

2.3 PIPING JOINING MATERIALS

A. Solder Filler Metals: ASTM B32, lead-free alloys.

B. Flux: ASTM B813, water flushable.

C. Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for joining copper with copper; or BAg-1, silver alloy for joining copper with bronze or steel.

2.4 TRANSITION FITTINGS

A. General Requirements:

1. Same size as pipes to be joined.
2. Pressure rating at least equal to pipes to be joined.
3. End connections compatible with pipes to be joined.

B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.

2.5 DIELECTRIC FITTINGS

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Unions:

1. Description:

a. Standard: ASSE 1079.

b. Pressure Rating: 125 psig minimum at 180 deg F.
c. End Connections: Solder-joint copper alloy and threaded ferrous. Solder joints are not to be used on pipe sizes greater than NPS 4.

C. Dielectric Nipples:

1. Description:

a. Standard: IAPMO PS 66.

b. Electroplated steel nipple, complying with ASTM F1545.

c. Pressure Rating: Minimum 300 psig at 225 deg F.
d. End Connections: Male threaded or grooved.
e. Lining: Inert and noncorrosive, propylene.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Hot-Water Heating Piping, Aboveground, NPS 2 (DN 50) and Smaller, to Be Any of the Following:

1. Type K Type L, drawn-temper copper tubing, wrought-copper fittings, and soldered brazed joints.

B. Hot-Water Heating Piping, Aboveground, NPS 2-1/2 (DN 65) and Larger, to Be Any of the Following:

1. Type K Type L, drawn-temper copper tubing, wrought-copper fittings, and soldered brazed joints.

C. Air-Vent Piping:

1. Inlet: Same as service where installed with metal-to-plastic transition fittings for plastic piping systems, according to piping manufacturer's written instructions.
2. Outlet: Type K, annealed-temper copper tubing with soldered or flared joints.

D. Pressure-Relief-Valve-Inlet and -Outlet Piping for Hot-Water Piping: Same materials and joining methods as for piping specified for the service in which safety valve is installed with metal-to-plastic transition fittings for plastic piping systems, according to piping manufacturer's written instructions.

3.2 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.

B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.

C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

E. Install piping to permit valve servicing.

F. Install piping at indicated slopes.

G. Install piping free of sags and bends.

H. Install fittings for changes in direction and branch connections.

I. Install piping to allow application of insulation.

J. Select system components with pressure rating equal to or greater than system operating pressure.

K. Install groups of pipes parallel to each other, spaced to permit applying insulation and servicing of valves.

L. Install drains, consisting of a tee fitting, NPS 3/4 ball valve, and short NPS 3/4 threaded nipple with cap, at low points in piping system mains and elsewhere as required for system drainage.

M. Install piping at a uniform grade of 0.2 percent upward in direction of flow.

N. Reduce pipe sizes using eccentric reducer fitting installed with level side up.

O. Install branch connections to mains using tee fittings in main pipe, with the branch connected to the bottom of the main pipe. For up-feed risers, connect the branch to the top of the main pipe.

P. Install valves according to Section 230523 "General-Duty Valves for HVAC Piping."

Q. Install air vents and pressure-relief valves in accordance with Section 232116 "Hydronic Piping Specialties."

R. Install unions in piping, NPS 2 and smaller, adjacent to valves, at final connections of equipment, and elsewhere as indicated.

S. Install shutoff valve immediately upstream of each dielectric fitting.

T. Comply with requirements in Section 230553 "Identification for HVAC Piping and Equipment" for identifying piping.

U. Install sleeves for piping penetrations of walls, ceilings, and floors.

V. Install sleeve seals for piping penetrations of concrete walls and slabs.

W. Install escutcheons for piping penetrations of walls, ceilings, and floors.

3.3 JOINT CONSTRUCTION

A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.

C. Soldered Joints: Apply ASTM B813, water-flushable flux, unless otherwise indicated, to tube end. Construct joints in accordance with ASTM B828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B32.

D. Brazed Joints: Construct joints in accordance with AWS's "Brazing Handbook," "Pipe and Tube" chapter, using copper-phosphorus brazing filler metal complying with AWS A5.8/A5.8M.

E. Threaded Joints: Thread pipe with tapered pipe threads in accordance with ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.

F. Plastic Piping Solvent-Cemented Joints: Clean and dry joining surfaces. Join pipe and fittings in accordance with the following:

1. Comply with ASTM F402 for safe-handling practice of cleaners, primers, and solvent cements.
2. CPVC Piping: Join in accordance with ASTM D2846/D2846M Appendix.
3. PVC Pressure Piping: Join ASTM D1785 schedule number, PVC pipe, and PVC socket fittings in accordance with ASTM D2672. Join other-than-schedule-number PVC pipe and socket fittings in accordance with ASTM D2855.
4. PVC Nonpressure Piping: Join in accordance with ASTM D2855.

G. Grooved Joints: Assemble joints with coupling and gasket, lubricant, and bolts. Cut or roll grooves in ends of pipe based on pipe and coupling manufacturer's written instructions for pipe wall thickness. Use grooved-end fittings and rigid, grooved-end-pipe couplings.

H. Plain-End Mechanical-Coupled Joints: Prepare, assemble, and test joints in accordance with manufacturer's written installation instructions.

3.4 INSTALLATION OF DIELECTRIC FITTINGS

A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.

B. Dielectric Fittings for NPS 2 (DN 50) and Smaller: Use dielectric nipples unions.

3.5 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for seismic-restraint devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

B. Comply with requirements in Section 230529 "Hangers and Supports for HVAC Piping and Equipment" for hangers, supports, and anchor devices.

C. Install hangers for copper tubing, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

D. Install hangers for plastic piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

E. Support horizontal piping within 12 inches of each fitting and coupling.

F. Support vertical runs of copper tubing to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

G. Support vertical runs of fiberglass piping to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.6 TERMINAL EQUIPMENT CONNECTIONS

A. Sizes for supply and return piping connections are to be the same as or larger than equipment connections.

B. Install control valves in accessible locations close to connected equipment.

C. Install bypass piping with globe valve around control valve. If parallel control valves are installed, only one bypass is required.

D. Install ports for pressure gauges and thermometers at coil inlet and outlet connections.

3.7 IDENTIFICATION

A. Identify system components. Comply with requirements for identification materials and installation in Section 230553 "Identification for HVAC Piping and Equipment."

3.8 SYSTEM STARTUP

A. Perform the following before operating the system:

1. Open manual valves fully.
2. Inspect pumps for proper rotation.
3. Set makeup pressure-reducing valves for required system pressure.
4. Inspect air vents at high points of system and determine if all are installed and operating freely (automatic type), or bleed air completely (manual type).
5. Set temperature controls so all coils are calling for full flow.
6. Inspect and set operating temperatures of hydronic equipment, such as boilers, chillers, cooling towers, to specified values.
7. Verify lubrication of motors and bearings.

3.9 FIELD QUALITY CONTROL

A. Prepare hydronic piping in accordance with ASME B31.9 and as follows:

1. Leave joints, including welds, uninsulated and exposed for examination during test.
2. Provide temporary restraints for expansion joints that cannot sustain reactions due to test pressure. If temporary restraints are impractical, isolate expansion joints from testing.
3. Flush hydronic piping systems with clean water; then remove and clean or replace strainer screens.
4. Isolate equipment from piping. If a valve is used to isolate equipment, its closure is to be capable of sealing against test pressure without damage to valve.
5. Install pressure-relief valve, set at a pressure no more than one-third higher than test pressure, to protect against damage by expanding liquid or other source of overpressure during test.

B. Perform the following tests on hydronic piping:

1. Use ambient-temperature water as a testing medium unless there is risk of damage due to freezing. Another liquid that is safe for workers and compatible with piping may be used.
2. While filling system, use vents installed at high points of system to release air. Use drains installed at low points for complete draining of test liquid.
3. Isolate expansion tanks and determine that hydronic system is full of water.
4. Subject piping system to hydrostatic test pressure that is not less than 1.5 times the system's working pressure. Test pressure is not to exceed maximum pressure for any vessel, pump, valve, or other component in system under test. Verify that stress due to pressure at bottom of vertical runs does not exceed 90 percent of specified minimum yield strength or 1.7 times the "SE" value in Appendix A in ASME B31.9.
5. After hydrostatic test pressure has been applied for at least 10 minutes, examine piping, joints, and connections for leakage. Eliminate leaks by tightening, repairing, or replacing components, and repeat hydrostatic test until there are no leaks.
6. Prepare written report of testing.

END OF SECTION 232113

SECTION 232116 - HYDRONIC PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hydronic specialty valves.
2. Strainers.
3. Flexible connectors.

B. Related Requirements:

1. Section 230523 "General-Duty Valves for HVAC Piping" for specification and installation requirements for general-duty valves common to most piping systems.
2. Section 230923.11 "Control Valves" for automatic control valve and sensor specifications, installation requirements, and locations.

1.2 ACTION SUBMITTALS

A. Product Data.

1.3 CLOSEOUT SUBMITTALS

A. Operation and maintenance data manuals.

PART 2 - PRODUCTS

2.1 HYDRONIC SPECIALTY VALVES

A. Bronze, Calibrated-Orifice, Balancing Valves:

1. Body: Bronze, ball or plug type with calibrated orifice or venturi.
2. Ball: Brass or stainless steel.
3. Plug: Resin.
4. Seat: PTFE.
5. End Connections: Threaded or socket.
6. Pressure Gauge Connections: Integral seals for portable differential pressure meter.
7. Handle Style: Lever, with memory stop to retain set position.
8. CWP Rating: Minimum 125 psig.
9. Maximum Operating Temperature: 250 deg F.

2.2 STRAINERS

A. Y-Pattern Strainers:

1. Body: ASTM A126, Class B, cast iron with bolted cover and bottom drain connection.
2. End Connections: Threaded ends for NPS 2 and smaller; flanged ends for NPS 2-1/2 and larger.

3. Strainer Screen: Stainless steel, 60-mesh strainer, or perforated stainless steel basket.
4. CWP Rating: 125 psig.

2.3 FLEXIBLE CONNECTORS

A. Stainless Steel Bellows, Flexible Connectors:

1. Body: Stainless steel bellows with woven, flexible, bronze, wire-reinforcing protective jacket.
2. End Connections: Threaded or flanged to match equipment connected.
3. Performance: Capable of 3/4-inch misalignment.
4. CWP Rating: 150 psig.
5. Maximum Operating Temperature: 250 deg F.

PART 3 - EXECUTION

3.1 INSTALLATION OF VALVES

A. Install calibrated-orifice balancing valve at each branch connection to return main.

B. Install calibrated-orifice, balancing valve in the return pipe of each heating or cooling terminal.

C. Install pressure-reducing valves at makeup-water connection to regulate system fill pressure.

D. Install pressure-relief and safety-relief valves at hot-water generators and elsewhere as required by ASME BPVC. Pipe drain to nearest floor drain or as indicated on Drawings. Comply with ASME BPVC, Section VIII, Division 1, for installation requirements.

END OF SECTION 232116

SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Single-wall rectangular ducts and fittings.
2. Single-wall round ducts and fittings.
3. Sheet metal materials.
4. Duct external wrap.
5. Sealants and gaskets.
6. Hangers and supports.

B. Related Requirements:

1. Section 230548 "Vibration and Seismic Controls for HVAC" for seismic restraint devices and installation.
2. Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing requirements for metal ducts.
3. Section 233300 "Air Duct Accessories" for dampers, sound-control devices, duct-mounting access doors and panels, turning vanes, and flexible ducts.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of the following products:

1. External wraps and adhesives.
2. Sealants and gaskets.
3. Seismic-restraint devices.

B. Shop Drawings:

1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
2. Factory- and shop-fabricated ducts and fittings.
3. Duct layout indicating sizes, configuration, external wrap material, and static-pressure classes.
4. Elevation of top of ducts.
5. Dimensions of main duct runs from building grid lines.
6. Fittings.
7. Reinforcement and spacing.
8. Seam and joint construction.
9. Penetrations through fire-rated and other partitions.
10. Equipment installation based on equipment being used on Project.
11. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.

12. Hangers and supports, including methods for duct and building attachment, seismic restraints, and vibration isolation.

C. Delegated Design Submittals:

1. Sheet metal thicknesses.
2. Joint and seam construction and sealing.
3. Reinforcement details and spacing.
4. Materials, fabrication, assembly, and spacing of hangers and supports.

5. Design Calculations: Calculations, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation for selecting hangers and supports and seismic restraints.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: A single set of plans or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

B. Welding certificates.

C. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Duct Design: Duct construction, including sheet metal thicknesses, seam and joint construction, reinforcements, and hangers and supports, comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and with performance requirements and design criteria indicated in "Duct Schedule" Article.

B. Structural Performance: Duct hangers and supports and seismic restraints are to withstand the effects of gravity and seismic loads and stresses within limits and under conditions described in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and ASCE/SEI 7. Seismically brace duct hangers and supports in accordance with SMACNA's "Seismic Restraint Manual: Guidelines for Mechanical Systems."

1. Seismic Hazard Level (SHL): D.

2. Connection Level: 2.

C. Seismic Performance: Ductwork to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7. See Section 230548 "Vibration and Seismic Controls for HVAC."

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified."

2. Component Importance Factor: 1.5.

D. Wind Performance: Ducts are to withstand the effects of wind determined in accordance with to ASCE/SEI 7. See Section 230548 "Vibration and Seismic Controls for HVAC."

E. Airstream Surfaces: Surfaces in contact with airstream comply with requirements in ASHRAE 62.1.

F. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment," and Section 7 - "Construction and System Startup."

G. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."

H. Duct Dimensions: Unless otherwise indicated, all duct dimensions indicated on Drawings are inside clear dimensions and do not include insulation or duct wall thickness.

2.2 SINGLE-WALL RECTANGULAR DUCTS AND FITTINGS

A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on indicated static-pressure class unless otherwise indicated.

1. Construct ducts of galvanized sheet steel unless otherwise indicated.
2. For ducts exposed to weather, construct of Type 304 or Type 316 stainless steel indicated by manufacturer to be suitable for outdoor installation.

B. Transverse Joints: Fabricate joints in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-1, "Rectangular Duct/Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. For ducts with longest side less than 36 inches, select joint types in accordance with Figure 2-1.
2. For ducts with longest side 36 inches or greater, use flange joint connector Type T-22, T-24, T-24A, T-25a, or T-25b. Factory-fabricated flanged duct connection system may be used if submitted and approved by engineer of record.

C. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Duct/Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 SINGLE-WALL ROUND DUCTS AND FITTINGS

A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on indicated static-pressure class unless otherwise indicated.

1. Construct ducts of galvanized sheet steel unless otherwise indicated.
2. For ducts exposed to weather, construct of Type 304 or Type 316 stainless steel indicated by manufacturer to be suitable for outdoor installation.

B. Flat-Oval Ducts: Indicated dimensions are the duct width (major dimension) and diameter of the round sides connecting the flat portions of the duct (minor dimension).

C. Transverse Joints: Select joint types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

D. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

E. Tees and Laterals: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.4 SHEET METAL MATERIALS

A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials are to be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

B. Galvanized Sheet Steel: Comply with ASTM A653/A653M.

1. Galvanized Coating Designation: G60.
2. Finishes for Surfaces Exposed to View: Mill phosphatized.

C. Carbon-Steel Sheets: Comply with ASTM A1008/A1008M, with oiled, matte finish for exposed ducts.

D. Stainless Steel Sheets: Comply with ASTM A480/A480M, Type 304 or 316, as indicated in "Duct Schedule" Article; cold rolled, annealed, sheet. Exposed surface finish is to be No. 2B, No. 2D, No. 3, or No. 4 as indicated in "Duct Schedule" Article.

E. Aluminum Sheets: Comply with ASTM B209 Alloy 3003, H14 temper; with mill finish for concealed ducts, and standard, one-side bright finish for duct surfaces exposed to view.

F. Reinforcement Shapes and Plates: ASTM A36/A36M, steel plates, shapes, and bars; black and galvanized.

1. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.

G. Tie Rods: Galvanized steel, 1/4-inch-minimum diameter for lengths 36 inches or less; 3/8-inch-minimum diameter for lengths longer than 36 inches.

2.5 SEALANT AND GASKETS

A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets are to be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested in accordance with UL 723; certified by an NRTL.

B. Two-Part Tape Sealing System:

1. Tape: Woven cotton fiber impregnated with mineral gypsum and modified acrylic/silicone activator to react exothermically with tape to form hard, durable, airtight seal.
2. Tape Width: 4 inches.
3. Sealant: Modified styrene acrylic.
4. Water resistant.
5. Mold and mildew resistant.
6. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
7. Service: Indoor and outdoor.
8. Service Temperature: Minus 40 to plus 200 deg F.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum.

C. Water-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Solids Content: Minimum 65 percent.
3. Shore A Hardness: Minimum 20.
4. Water resistant.
5. Mold and mildew resistant.
6. VOC: Maximum 75 g/L (less water).
7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
8. Service: Indoor or outdoor.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.
10. Maximum Static-Pressure Class: 10-inch wg, positive or negative.
11. Service: Indoor or outdoor.
12. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

2.6 HANGERS AND SUPPORTS

A. Hanger Rods for Noncorrosive Environments: Galvanized-steel rods and nuts.

B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods with threads painted with zinc-chromate primer after installation.

C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."

D. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A603.

E. Steel Cables for Stainless Steel Ducts: Stainless steel complying with ASTM A492.

F. Steel Cable End Connections: Galvanized-steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.

G. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.

H. Trapeze and Riser Supports:

1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
2. Supports for Stainless Steel Ducts: Stainless steel shapes and plates.
3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.

PART 3 - EXECUTION

3.1 DUCT INSTALLATION

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and coordination drawings.

B. Install ducts in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" unless otherwise indicated.

C. Install ducts in maximum practical lengths with fewest possible joints.

D. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.

E. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.

F. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.

G. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.

H. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.

I. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.

J. Install heating coils, cooling coils, air filters, dampers, and all other duct-mounted accessories in air ducts where indicated on Drawings.

K. Protect duct interiors from moisture, construction debris and dust, and other foreign materials both before and after installation. Comply with SMACNA's "IAQ Guidelines for Occupied Buildings Under Construction," Appendix G, "Duct Cleanliness for New Construction Guidelines."

L. Elbows: Use long-radius elbows wherever they fit.

1. Fabricate 90-degree rectangular mitered elbows to include turning vanes.
2. Fabricate 90-degree round elbows with a minimum of three segments for 12 inches and smaller and a minimum of five segments for 14 inches and larger.

M. Branch Connections: Use lateral or conical branch connections.

3.2 DUCT SEALING

A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

B. Seal ducts at a minimum to the following seal classes in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible":

1. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
2. Outdoor, Supply-Air Ducts: Seal Class A.
3. Outdoor, Exhaust Ducts: Seal Class C.
4. Outdoor, Return-Air Ducts: Seal Class C.
5. Unconditioned Space, Supply-Air Ducts in Pressure Classes 2-Inch wg and Lower: Seal Class B.
6. Unconditioned Space, Supply-Air Ducts in Pressure Classes Higher Than 2-Inch wg: Seal Class A.
7. Unconditioned Space, Exhaust Ducts: Seal Class C.
8. Unconditioned Space, Return-Air Ducts: Seal Class B.
9. Conditioned Space, Supply-Air Ducts in Pressure Classes 2-Inch wg and Lower: Seal Class C.
10. Conditioned Space, Supply-Air Ducts in Pressure Classes Higher Than 2-Inch wg: Seal Class B.
11. Conditioned Space, Exhaust Ducts: Seal Class B.

12. Conditioned Space, Return-Air Ducts: Seal Class C.

3.3 HANGER AND SUPPORT INSTALLATION

A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 5, "Hangers and Supports."

B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.

1. Where practical, install concrete inserts before placing concrete.
2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes or for slabs more than 4 inches thick.
4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes or for slabs less than 4 inches thick.

5. Do not use powder-actuated concrete fasteners for seismic restraints. Coordinate with Section 230548 "Vibration and Seismic Controls for HVAC."

C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.

D. Hangers Exposed to View: Threaded rod and angle or channel supports.

E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 feet.

F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.4 SEISMIC-RESTRAINT-DEVICE INSTALLATION

A. See Section 230548 "Vibration and Seismic Controls for HVAC" for seismic restraint installation requirements.

3.5 DUCTWORK CONNECTIONS

A. Make connections to equipment with flexible connectors complying with Section 233300 "Air Duct Accessories."

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.6 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Leakage Tests:

1. Comply with SMACNA's "HVAC Air Duct Leakage Test Manual." Submit a test report for each test.
2. Test the following systems:

    a. Ducts with a Pressure Class Higher Than 3-Inch wg: Test new duct sections totaling no less than 25 percent of total installed duct area for each designated pressure class.
    b. Supply Ducts with a Pressure Class of 3- Inch wg or Higher: Test new duct sections totaling no less than 25 percent of total installed duct area for each designated pressure class.
    c. Return Ducts with a Pressure Class of 2- Inch wg or Higher: Test new duct sections totaling no less than 25 percent of total installed duct area for each designated pressure class.
    d. Exhaust Ducts with a Pressure Class of 3- Inch wg or Higher: Test new duct sections totaling no less than 25 percent of total installed duct area for each designated pressure class.

3. Disassemble, reassemble, and seal segments of systems to accommodate leakage testing and for compliance with test requirements.
4. Testing of each duct section is to be performed with access doors, coils, filters, dampers, and other duct-mounted devices in place as designed. No devices are to be removed or blanked off so as to reduce or prevent additional leakage.
5. Test for leaks before applying external insulation.
6. Conduct tests at static pressures equal to maximum design pressure of system or section being tested. If static-pressure classes are not indicated, test system at maximum system design pressure. Do not pressurize systems above maximum design operating pressure.
7. Give seven days' advance notice for testing.

C. Duct System Cleanliness Tests:

1. Visually inspect duct system to ensure that no visible contaminants are present.
2. Test sections of metal duct system, chosen randomly by Government, for cleanliness in accordance with "Description of Method 3 - NADCA Vacuum Test" in NADCA ACR, "Assessment, Cleaning and Restoration of HVAC Systems."

    a. Acceptable Cleanliness Level: Net weight of debris collected on the filter media is to not exceed 0.75 mg/100 sq. cm.

D. Duct system will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

3.7 DUCT CLEANING

A. Clean new duct system(s) before testing, adjusting, and balancing.

B. For cleaning of existing ductwork, see Section 230130.52 "Existing HVAC Air Distribution System Cleaning."

C. Use duct cleaning methodology as indicated in NADCA ACR.

D. Use service openings for entry and inspection.

1. Provide openings with access panels appropriate for duct static-pressure and leakage class at dampers, coils, and any other locations where required for inspection and cleaning access. Provide insulated panels for insulated or lined duct. Patch insulation and external wrap as recommended by duct external wrap manufacturer. Comply with Section 233300 "Air Duct Accessories" for access panels and doors.
2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
3. Remove and reinstall ceiling to gain access during the cleaning process.

E. Particulate Collection and Odor Control:

1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.

F. Clean the following components by removing surface contaminants and deposits:

1. Air outlets and inlets (registers, grilles, and diffusers).
2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.
3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
4. Coils and related components.
5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
6. Supply-air ducts, dampers, actuators, and turning vanes.
7. Dedicated exhaust and ventilation components and makeup air systems.

G. Mechanical Cleaning Methodology:

1. Clean metal duct systems using mechanical cleaning methods that extract contaminants from within duct systems and remove contaminants from building.
2. Use vacuum-collection devices that are operated continuously during cleaning. Connect vacuum device to downstream end of duct sections so areas being cleaned are under negative pressure.
3. Use mechanical agitation to dislodge debris adhered to interior duct surfaces without damaging integrity of metal ducts, duct external wrap, or duct accessories.

4. Clean fibrous-glass duct external wrap with HEPA vacuuming equipment; do not permit duct external wrap to get wet. Replace fibrous-glass duct external wrap that is damaged, deteriorated, or delaminated or that has friable material, mold, or fungus growth.
5. Clean coils and coil drain pans in accordance with NADCA ACR. Keep drain pan operational. Rinse coils with clean water to remove latent residues and cleaning materials; comb and straighten fins.
6. Provide drainage and cleanup for wash-down procedures.
7. Antimicrobial Agents and Coatings: Apply EPA-registered antimicrobial agents if fungus is present. Apply antimicrobial agents in accordance with manufacturer's written instructions after removal of surface deposits and debris.

3.8 STARTUP

A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.9 DUCT SCHEDULE

A. Fabricate ducts with galvanized sheet steel except as otherwise indicated and as follows:

1. Fabricate all ducts to achieve SMACNA pressure class, seal class, and leakage class as indicated below.

B. Supply Ducts:

1. Ducts Connected to Fan Coil Units, Furnaces, Heat Pumps, and Terminal Units:

a. Pressure Class: Positive 3-inch wg. For fan coil until inlet duct and 2-inch wg. At fan coil outlet duct.
b. Minimum SMACNA Seal Class: B.
c. SMACNA Leakage Class for Rectangular: 8.
d. SMACNA Leakage Class for Round and Flat Oval: 4.

C. Return Ducts:

1. Ducts Connected to Fan Coil Units, Furnaces, Heat Pumps, and Terminal Units:

a. Pressure Class: Positive or negative 2-inch wg.
b. Minimum SMACNA Seal Class: C.
c. SMACNA Leakage Class for Rectangular: 16.
d. SMACNA Leakage Class for Round and Flat Oval: 8.

D. Exhaust Ducts:

1. Ducts Connected to Fans Exhausting (ASHRAE 62.1, Class 1 and 2) Air:

a. Pressure Class: Negative 3-inch wg.
b. Minimum SMACNA Seal Class: B if negative pressure, and A if positive pressure.
c. SMACNA Leakage Class for Rectangular: 8.

d. SMACNA Leakage Class for Round and Flat Oval: 4.

E. Intermediate Reinforcement:

1. Galvanized-Steel Ducts: Galvanized steel or carbon steel coated with zinc-chromate primer.

F. Elbow Configuration:

1. Rectangular Duct - Requirements for Different Velocities: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."

a. Velocity 1000 fpm or Lower:

1) Radius Type RE 1 with minimum 0.5 radius-to-diameter ratio.
2) Mitered Type RE 4 without vanes.

b. Velocity 1000 to 1500 fpm:

1) Radius Type RE 1 with minimum 1.0 radius-to-diameter ratio.
2) Radius Type RE 3 with minimum 0.5 radius-to-diameter ratio and two vanes.
3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

c. Velocity 1500 fpm or Higher:

1) Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
2) Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

2. Rectangular Duct Requirements for All Velocities: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."

a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

3. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "Round Duct Elbows."

a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-

1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.

1) Velocity 1000 fpm or Lower: 0.5 radius-to-diameter ratio and three segments for 90-degree elbow.
2) Velocity 1000 to 1500 fpm: 1.0 radius-to-diameter ratio and four segments for 90-degree elbow.
3) Velocity 1500 fpm or Higher: 1.5 radius-to-diameter ratio and five segments for 90-degree elbow.
4) Radius-to Diameter Ratio: 1.5.

b. Round Elbows, 12 Inches and Smaller in Diameter: Stamped or pleated.
c. Round Elbows, 14 Inches and Larger in Diameter: Standing seam.

G. Branch Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-6, "Branch Connection."

a. Rectangular Main to Rectangular Branch: 45-degree entry.
b. Rectangular Main to Round Branch: Conical spin in.

2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees." Saddle taps are permitted in existing duct.

a. Velocity 1000 fpm or Lower: 90-degree tap.
b. Velocity 1000 to 1500 fpm: Conical tap.
c. Velocity 1500 fpm or Higher: 45-degree lateral.

END OF SECTION 233113

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manual volume dampers.
2. Flexible connectors.

B. Related Requirements:

1. Section 233346 "Flexible Ducts" for insulated and non-insulated flexible ducts.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. For duct silencers, include pressure drop, dynamic insertion loss, and self-generated noise data. Include breakout noise calculations for high-transmission-loss casings.

B. Shop Drawings: For duct accessories. Include plans, elevations, sections, details, and attachments to other work.

1. Detail duct accessories' fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:

a. Special fittings.
b. Manual volume damper installations.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, or BIM model, drawn to scale, and coordinated with each other, using input from installers of the items involved.

B. Source quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Comply with NFPA 90A and NFPA 90B.

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

2.2 MANUAL VOLUME DAMPERS

A. Standard, Steel, Manual Volume Dampers:

1. Performance:

a. Leakage Rating Class III: Leakage not exceeding 40 cfm/sq. ft. against 1-inch wg differential static pressure.

2. Construction:

a. Linkage out of airstream.
b. Suitable for horizontal or vertical airflow applications.

3. Frames:

a. Hat-shaped, 16-gauge-thick, galvanized sheet steel.
b. Mitered and welded corners.
c. Flanges for attaching to walls and flangeless frames for installing in ducts.

4. Blades:

a. Multiple or single blade.
b. Parallel- or opposed-blade design.
c. Stiffen damper blades for stability.
d. 16 gauge thick.

5. Blade Axles: Galvanized steel.
6. Bearings:

a. Dampers mounted with vertical blades to have thrust bearing at each end of every blade.

7. Tie Bars and Brackets: Galvanized steel.
8. Locking device to hold damper blades in a fixed position without vibration.

B. Jackshaft:

1. Size: Minimum 0.5-inch diameter.

2. Material: Galvanized-steel pipe rotating within pipe-bearing assembly mounted on supports at each mullion and at each end of multiple-damper assemblies.
3. Length and Number of Mountings: As required to connect linkage of each damper in multiple-damper assembly.

C. Damper Hardware:

1. Zinc-plated, die-cast core with dial and handle, made of 3/32-inch-thick zinc-plated steel, and a 3/4-inch hexagon locking nut.
2. Include center hole to suit damper operating-rod size.
3. Include elevated platform for insulated duct mounting.

2.3 FLEXIBLE CONNECTORS

A. Fire-Performance Characteristics: Adhesives, sealants, fabric materials, and accessory materials shall have flame-spread index not exceeding 25 and smoke-developed index not exceeding 50 when tested in accordance with ASTM E84.

B. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

C. Materials: Flame-retardant or noncombustible fabrics.

D. Coatings and Adhesives: Comply with UL 181, Class 1.

E. Metal-Edged Connectors: Factory fabricated with a fabric strip 3-1/2 inches wide attached to two strips of 2-3/4-inch-wide, 0.028-inch- thick, galvanized sheet steel or 0.032-inch-thick aluminum sheets. Provide metal compatible with connected ducts.

F. Indoor System, Flexible Connector Fabric: Glass fabric double coated with neoprene.

1. Minimum Weight: 26 oz./sq. yd.
2. Tensile Strength: 480 lbf/inch in the warp and 360 lbf/inch in the filling.
3. Service Temperature: Minus 40 to plus 200 deg F.

G. Thrust Limits: Combination coil spring and elastomeric insert with spring and insert in compression, and with a load stop. Include rod and angle-iron brackets for attaching to fan discharge and duct.

1. Frame: Steel, fabricated for connection to threaded rods and to allow for a maximum of 30 degrees of angular rod misalignment without binding or reducing isolation efficiency.
2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
7. Coil Spring: Factory set and field adjustable for a maximum of 1/4-inch movement at start and stop.

2.4 MATERIALS

A. Galvanized Sheet Steel: Comply with ASTM A653/A653M.

1. Galvanized Coating Designation: G60.
2. Exposed-Surface Finish: Mill phosphatized.

B. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless steel ducts.

C. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install duct accessories in accordance with applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116 for fibrous-glass ducts.

B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless steel accessories in stainless steel ducts, and aluminum accessories in aluminum ducts.

C. Where multiple damper sections are necessary to achieve required dimensions, provide reinforcement to fully support damper assembly when fully closed at full system design static pressure.

D. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Where dampers are installed in ducts having duct external wrap, install dampers with hat channels of same depth as external wrap, and terminate external wrap with nosing at hat channel.

1. Install steel volume dampers in steel ducts.
2. Install aluminum volume dampers in aluminum ducts.

E. Set dampers to fully open position before testing, adjusting, and balancing.

F. Install test holes at fan inlets and outlets and elsewhere as indicated and as needed for testing and balancing.

G. Install flexible connectors to connect ducts to equipment.

H. For fans developing static pressures of 5 inches wg and more, cover flexible connectors with loaded vinyl sheet held in place with metal straps.

I. Install duct test holes where required for testing and balancing purposes.

J. Install thrust limits at centerline of thrust, symmetrical on both sides of equipment. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4-inch movement during start and stop of fans.

3.2 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operate dampers to verify full range of movement.

END OF SECTION 233300

SECTION 233346 - FLEXIBLE DUCTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Flexible ducts, noninsulated.
2. Flexible ducts, insulated.
3. Flexible duct connectors.

1.2 ACTION SUBMITTALS

A. Product data.

B. Product Data Submittals: For each type of product.

C. Shop Drawings: For flexible ducts.

1. Include plans showing locations, mounting details, and attachment details.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which ceiling-mounted access panels and access doors required for access to duct accessories are shown and coordinated with each other, using input from installers of the items involved.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

A. Comply with NFPA 90A and NFPA 90B.

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials must be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

C. Comply with the Air Duct Council's (formerly, Air Diffusion Council) "ADC Flexible Air Duct Test Code - FD 72-R1" and "Flexible Duct Performance & Installation Standards."

D. Comply with ASTM E96/E96M.

2.2 FLEXIBLE DUCTS, INSULATED

A. Standard: Product is to be UL 181 listed and bearing the UL label.

B. Flexible Ducts, Insulated - Class 1, Two-Ply Vinyl Film Supported by Helically Wound, Spring-Steel Wire; Fibrous-Glass Insulation:

1. Pressure Rating: 10 inch wg positive and 1.0 inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 10 to plus 160 deg F.
4. Insulation R-Value: Comply with ASHRAE/IES 90.1.
5. Vapor-Barrier Film: Aluminized.

C. Flexible Ducts, Insulated - Class 1, Multiple Layers of Aluminum Laminate Supported by Helically Wound, Spring-Steel Wire; Fibrous-Glass Insulation:

1. Pressure Rating: 10 inch wg positive and 1.0 inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 20 to plus 210 deg F.
4. Insulation R-Value: Comply with ASHRAE/IES 90.1.
5. Vapor-Barrier Film: Aluminized.

2.3 FLEXIBLE DUCT CONNECTORS

A. Clamps: Stainless steel band with stainless steel or zinc-plated hex screw to tighten band with a worm-gear action in sizes 3 through 18 inches, to suit duct size.

B. Non-Clamp Connectors: Liquid adhesive plus tape or Adhesive plus sheet metal screws.

PART 3 - EXECUTION

3.1 INSTALLATION OF FLEXIBLE DUCTS

A. Install flexible ducts in accordance with applicable details in the following publications:

1. ADC's "Flexible Duct Performance & Installation Standards" for flexible ducts.
2. NAIMA AH116.
3. SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts.
4. SMACNA's "Fibrous Glass Duct Construction Standards" for fibrous-glass ducts.

B. Install in indoor applications only. Do not install flexible duct in locations where it will be exposed to UV lighting.

C. Connect terminal units to supply ducts directly or with maximum 12-inch lengths of flexible duct. Do not use flexible ducts to change directions.

D. Connect diffusers and light troffer boots to ducts directly or with maximum 60-inch lengths of flexible duct clamped or strapped in place.

E. Connect flexible ducts to metal ducts with liquid adhesive plus tape or draw bands or adhesive plus sheet metal screws.

F. Installation:

1. Install ducts fully extended.
2. Do not bend ducts across sharp corners.
3. Bends of flexible ducting must not exceed a minimum of one-duct diameter.
4. Avoid contact with metal fixtures, water lines, pipes, or conduits.
5. Install flexible ducts in a direct line, without sags, twists, or turns.
6. Install in accordance with ADC instructions.

G. Supporting Flexible Ducts:

1. Support flexible duct at manufacturer's recommended intervals, but at no greater distance than 4 ft.. Provide sufficient support so that maximum centerline sag is 1/2 in. per ft. between supports. A connection to rigid duct or equipment may be considered a support joint.
2. Install extra supports at bends placed approximately one-duct diameter from center line of the bend.
3. Ducts may rest on ceiling joists or truss supports. Spacing between supports must not exceed the maximum spacing in accordance with manufacturer's written installation instructions.
4. Vertically installed ducts must be stabilized by support straps at a maximum of 72 inches o.c.

END OF SECTION 233346

SECTION 233400 - HVAC FANS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ventilators, centrifugal - ceiling mounted.

1.2 ACTION SUBMITTALS

A. Product data.

B. Shop Drawings:

1. Plans, elevations, sections, and attachment details.
2. Details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Diagrams for power, signal, and control wiring.
4. Design Calculations: Calculate requirements for selecting vibration isolators and for designing vibration isolation bases.
5. Vibration Isolation Base Details: Detail fabrication, including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

C. Delegated Design Submittal: For vibration isolation, supports, indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Design Calculations: Calculate requirements for selecting vibration isolators, supports,.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans showing fan rooms and fan system layouts, reflected ceiling plans, and other drawings required to illustrate relationships between components and adjacent structural and mechanical elements. Show support locations, type of support, and weight on each support. Indicate and certify field measurements.

B. Seismic Qualification Data: Certificates, for fans, accessories, and components, from manufacturer.

C. Startup service reports.

D. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1. Operation in normal and emergency modes.
2. Operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of unit components.

C. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

D. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

E. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design vibration isolation, supports,, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.

F. Capacities and Characteristics:

a. See mechanical drawing schedule.

2.2 VENTILATORS, CENTRIFUGAL - CEILING MOUNTED

A. Standards: Comply with UL 705.

B. Housing: Steel, lined with acoustical insulation.

C. Fan Wheel: Centrifugal wheels directly mounted on motor shaft. Fan shrouds, motor, and fan wheel are removable for service.

D. Back-draft damper: Integral.

E. Grille: Louvered grille with flange on intake and thumbscrew or spring retainer attachment to fan housing.

F. Electrical Requirements: Junction box for electrical connection on housing and receptacle for motor plug-in.

G. Accessories:

1. Variable-Frequency Motor Controller: Solid-state control to reduce speed from 100 to less than 50 percent.
2. Manual Starter Switch: Single-pole rocker switch assembly with cover and pilot light.
3. Time-Delay Switch: Assembly with single-pole rocker switch, timer, and cover plate.
4. Motion Sensor: Motion detector with adjustable shutoff timer.
5. Ceiling Radiation Damper: Fire-rated assembly with ceramic blanket, stainless steel springs, and fusible link.
6. Filter: Washable aluminum to fit between fan and grille.
7. Isolation: Rubber-in-shear vibration isolators.
8. Manufacturer's standard roof jack or wall cap, and transition fittings.

2.3 MOTORS

A. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230500 "Common Work Results for HVAC."

B. Where variable-frequency drives are indicated or scheduled, provide fan motor compatible with variable-frequency drive.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Install fans level and plumb.

B. Disassemble and reassemble units, as required for moving to the final location, in accordance with manufacturer's written instructions.

C. Lift and support units with manufacturer's designated lifting or supporting points.

D. Equipment Mounting:

1. Install roof-mounted fans on roof curbs or support steel. See Drawings for specific requirements.
2. Unit Support: Install fans level on structural curbs. Coordinate with duct connections.
3. Support duct-mounted and other hanging fans directly from the building structure, using suitable hanging systems as specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."

4. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

E. Install units with adequate clearances for service and maintenance.

F. Label fans.

3.2 DUCTWORK CONNECTIONS

A. Drawings indicate general arrangement of ducts and duct accessories. Make final duct connections with flexible connectors. Flexible connectors are specified in Section 233300 "Air Duct Accessories."

B. Where installing ducts adjacent to fans, allow space for service and maintenance.

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate is to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate is to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.4 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.5 STARTUP SERVICE:

A. Perform startup service.

1. Complete installation and startup checks in accordance with manufacturer's written instructions.
2. Verify that shipping, blocking, and bracing are removed.
3. Verify that unit is secure on mountings and supporting devices and that connections to ducts and electrical components are complete. Verify that proper thermal-overload protection is installed in motors, starters, and disconnect switches.
4. Verify that cleaning and adjusting are complete.
5. For direct-drive fans, verify proper motor rotation direction and verify fan wheel free rotation and smooth bearing operation.

6. For belt-drive fans, disconnect fan drive from motor, verify proper motor rotation direction, and verify fan wheel free rotation and smooth bearing operation. Reconnect fan drive system, align and adjust belts, and install belt guards.
7. Adjust belt tension.
8. Adjust damper linkages for proper damper operation.
9. Verify lubrication for bearings and other moving parts.
10. Verify that manual and automatic volume control and fire and smoke dampers in connected ductwork systems are in fully open position.
11. Disable automatic temperature-control operators, energize motor and confirm proper motor rotation and unit operation, adjust fan to indicated rpm, and measure and record motor voltage and amperage.
12. Shut unit down and reconnect automatic temperature-control operators.
13. Remove and replace malfunctioning units and retest as specified above.

3.6 ADJUSTING

A. Adjust damper linkages for proper damper operation.

B. Adjust belt tension.

C. Lubricate bearings.

D. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.7 CLEANING

A. After completing system installation and testing, adjusting, and balancing and after completing startup service, clean fans internally to remove foreign material and construction dirt and dust.

3.8 FIELD QUALITY CONTROL

A. Testing Agency: The contractor will engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform tests and inspections.

1. Fan Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
2. Test and adjust controls and safeties.

3. Fans and components will be considered defective if they do not pass tests and inspections.
4. Prepare test and inspection reports.

3.9 DEMONSTRATION

A. Train Government's maintenance personnel to adjust, operate, and maintain HVAC fans.

END OF SECTION 233400

SECTION 233600 - AIR TERMINAL UNITS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Parallel fan-powered air terminal units.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of air terminal unit.

B. Shop Drawings: For air terminal units.

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.

3. Include diagrams for power, signal, and control wiring.
4. Hangers and supports, including methods for duct and building attachment, seismic restraints, and vibration isolation.

C. Delegated Design Submittal: For vibration isolation and supports, and seismic restraints indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Materials, fabrication, assembly, and spacing of hangers and supports.
2. Design Calculations: Calculate requirements for selecting vibration isolators, supports, and seismic restraints.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans and other details, or BIM model, drawn to scale, indicating the items described in this Section, and coordinated with all building trades.

B. Seismic Qualification Data: For air terminal units, accessories, and components, from manufacturer.

C. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a Qualified Electrical Testing Laboratory, and marked for intended location and application.

B. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment," and Section 7 - "Construction and System Start-up."

C. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, "Section 6 - Heating, Ventilating, and Air Conditioning."

D. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design vibration isolation, supports, and seismic restraints, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.

E. Seismic Performance: Air terminal units shall withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7. See Section 230548 "Vibration and Seismic Controls for HVAC."

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified."

2. Component Importance Factor: 1.5.

2.2 PARALLEL FAN-POWERED AIR TERMINAL UNITS

A. Description: Volume-damper assembly and centrifugal fan in parallel arrangement inside unit casing with control components inside a protective metal shroud.

B. Casing: Minimum 22-gauge- thick galvanized steel.

1. Air Inlets: Round stub connections or S-slip and drive connections for duct attachment.
2. Air Outlet: S-slip and drive connections.
3. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket and quarter-turn latches.
4. Fan: Forward-curved centrifugal, located at plenum air inlet.

C. Volume Damper: Galvanized steel with flow-sensing ring and peripheral gasket and self-lubricating bearings.

1. Maximum Damper Leakage: AHRI 880 rated, 2 percent of nominal airflow at 3-inch wg inlet static pressure.

D. Velocity Sensors: Multipoint array with velocity inlet sensors.

E. Fan Motor:

1. Comply with NEMA MG 1: temperature rating, service factor, and efficiency .
2. Type: Electronically commutated motor.

3. Fan-Motor Assembly Isolation: Rubber isolators.

4. Efficiency: Premium efficient as defined in NEMA MG-1.
5. Motor Speed: Variable speed.

a. Speed Control: Infinitely adjustable with pneumatic-electric and electronic controls.

F. Filters:

1. Pleated Glass Fiber: Factory-fabricated, self-supported disposable air filter with holding frames. Provide MERV 8 filter with minimum efficiency reporting value is to be in accordance with ASHRAE 52.2.

G. Attenuator Section: Casing material and thickness matching associated air terminal unit casing. Provide absorptive attenuator integral with the plenum inlet of the air terminal unit, of noise transmission loss performance as required in schedules on Drawings.

H. Hydronic Heating Coils: Copper tube, with mechanically bonded aluminum fins spaced no closer than 0.08 inch. Include manual air vent and drain valve. Locate coil in discharge-air outlet airstream. Provide hydronic heating coils for air terminal units scheduled on Drawings.

I. Contractor shall use salvaged controls equipment from demolished units or replace controls equipment within kind equipment.

J. Control Panel Enclosure: NEMA 250, Type 1, with access panel sealed from airflow and mounted on side of unit.

2.3 SOURCE QUALITY CONTROL

A. AHRI 880: Test and rate assembled air terminal units in accordance with AHRI 880.

B. Water Coils: Factory pressure test to 300 psig in accordance with AHRI 410 and ASHRAE 33.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Comply with Section 230529 "Hangers and Supports for HVAC Piping and Equipment" and Section 233113 "Metal Ducts" for hangers and supports.

B. Install air terminal units according to NFPA 90A.

C. Install air terminal units level and plumb. Maintain sufficient clearance for normal service and maintenance.

D. Connect to existing wall mounted thermostats.

3.2 PIPING CONNECTIONS

A. Where installing piping adjacent to air terminal unit, allow space for service and maintenance.

B. Hot-Water Piping: Comply with requirements in Section 232113 "Hydronic Piping" and Section 232116 "Hydronic Piping Specialties" and connect heating coils to supply piping with shutoff valve, strainer, control valve, and union or flange; and to return piping with balancing valve and union or flange.

3.3 DUCTWORK CONNECTIONS

A. Comply with requirements in Section 233113 "Metal Ducts" for connecting ducts to air terminal units.

B. Make connections to air terminal units with flexible connectors complying with requirements in Section 233300 "Air Duct Accessories."

3.4 ELECTRICAL CONNECTIONS

A. Install field power to each air terminal unit electrical power connection. Coordinate with air terminal unit manufacturer and installers.

B. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

C. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

D. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

E. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate shall be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate shall be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.5 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

3.6 IDENTIFICATION

A. Label each air terminal unit with drawing designation, nominal airflow, maximum and minimum factory-set airflows, and coil type. Comply with requirements in Section 230553 "Identification for HVAC Piping and Equipment" for equipment labels and warning signs and labels.

3.7 STARTUP SERVICE

A. Engage a factory-authorized service representative to perform startup service.

1. Complete installation and startup checks in accordance with manufacturer's written instructions.
2. Verify that inlet duct connections are as recommended by air terminal unit manufacturer to achieve proper performance.
3. Verify that controls and control enclosure are accessible.
4. Verify that control connections are complete.
5. Verify that nameplate and identification tag are visible.
6. Verify that controls respond to inputs as specified.

3.8 ADJUSTING

A. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for air terminal unit testing, adjusting, and balancing.

3.9 FIELD QUALITY CONTROL

A. Testing Agency: Government will engage a qualified testing agency to perform tests and inspections.

B. Perform the following tests and inspections with the assistance of a factory-authorized service representative:

1. After installing air terminal units and after electrical circuitry has been energized, test for compliance with requirements.

2. Leak Test: After installation, fill water coils and test for leaks. Repair leaks and retest until no leaks exist.
3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

C. Air terminal unit will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

3.10 DEMONSTRATION

A. Train Government's maintenance personnel to adjust, operate, and maintain air terminal units.

END OF SECTION 233600

SECTION 233713.13 - AIR DIFFUSERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Rectangular and square ceiling diffusers.

B. Related Requirements:

1. Section 233300 "Air Duct Accessories" for volume-control dampers not integral to diffusers.
2. Section 233713.23 "Air Registers and Grilles" for adjustable-bar register and grilles, fixed-face registers and grilles, and linear bar grilles.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 RECTANGULAR AND SQUARE CEILING DIFFUSERS

A. Devices shall be specifically designed for variable-air-volume flows.

B. Material: Steel.

C. Finish: Baked enamel, white.

D. Accessories:

1. Equalizing grid.
2. Plaster ring.
3. Safety chain.
4. Wire guard.
5. Sectorizing baffles.
6. Operating rod extension.
7. 1 to 4-way diffuser cores.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install salvaged equipment except where indicated on the drawings

B. Install diffusers level and plumb.

C. Ceiling-Mounted Outlets and Inlets: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated, as much as practical. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Government for a determination of final location.

D. Install diffusers with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.

3.2 ADJUSTING

A. After installation, adjust diffusers to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713.13

SECTION 233713.23 - REGISTERS AND GRILLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fixed face grilles.

B. Related Requirements:

1. Section 233300 "Air Duct Accessories" for fire and smoke dampers and volume-control dampers not integral to registers and grilles.
2. Section 233713.13 "Air Diffusers" for various types of air diffusers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 GRILLES

A. Fixed Face Grille:

1. Material: Steel.
2. Finish: Baked enamel, white.

3. Frame: 1 inch wide.

4. Mounting: Lay in.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install salvaged equipment except where indicated on the drawings.

B. Install registers and grilles level and plumb.

C. Outlets and Inlets Locations: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated, as much as practical. For units installed in lay-in ceiling panels, locate units in

the center of panel. Where architectural features or other items conflict with installation, notify Government for a determination of final location.

D. Install registers and grilles with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.

3.2 ADJUSTING

A. After installation, adjust registers and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713.23

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper building wire rated 600 V or less.
2. Fire-alarm wire and cable.
3. Connectors, splices, and terminations rated 600 V and less.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Product Schedule: Indicate type, use, location, and termination locations.

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 COPPER BUILDING WIRE

A. Description: Flexible, insulated and uninsulated, drawn copper current-carrying conductor with an overall insulation layer or jacket, or both, rated 600 V or less.

B. Standards:

1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
2. RoHS compliant.
3. Conductor and Cable Marking: Comply with wire and cable marking according to UL's "Wire and Cable Marking and Application Guide."

C. Conductors: Copper, complying with ASTM B3 for bare annealed copper and with ASTM B8 for stranded conductors.

D. Conductor Insulation:

1. Type NM: Comply with UL 83 and UL 719.
2. Type THHN and Type THWN-2: Comply with UL 83.
3. Type USE-2: Comply with UL 854.

2.2 FIRE-ALARM WIRE AND CABLE

A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

B. Signaling Line Circuits: Twisted, shielded pair, size as recommended by system manufacturer.

1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire-alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a two-hour rating.

C. Non-Power-Limited Circuits: Solid-copper conductors with 600 V rated, 75 deg C, color-coded insulation, and complying with requirements in UL 2196 for a two-hour rating.

1. Low-Voltage Circuits: No. 16 AWG, minimum, in pathway.
2. Line-Voltage Circuits: No. 12 AWG, minimum, in pathway.
3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor with red identifier stripe, NTRL listed for fire-alarm and cable tray installation, plenum rated.

2.3 CONNECTORS AND SPLICES

A. Description: Factory-fabricated connectors, splices, and lugs of size, ampacity rating, material, type, and class for application and service indicated; listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.

B. Jacketed Cable Connectors: For steel and aluminum jacketed cables, zinc die-cast with set screws, designed to connect conductors specified in this Section.

C. Lugs: One piece, seamless, designed to terminate conductors specified in this Section.

1. Material: Copper.
2. Type: One hole with standard barrels.
3. Termination: Compression.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

A. Branch Circuits:

1. Copper:
   a. Solid for No. 12 AWG and smaller; stranded for No. 10 AWG and larger.

B. ASD Output Circuits Cable: Extra-flexible stranded for all sizes.

C. Power-Limited Fire Alarm and Control: Solid for No. 12 AWG and smaller.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

A. Exposed Branch Circuits, Including in Crawlspaces: Type THHN/THWN-2, single conductors in raceway.

B. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN/THWN-2, single conductors in raceway.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.

B. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.

C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.

E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members and follow surface contours where possible.

F. Support cables according to Section 260529 "Hangers and Supports for Electrical Systems."

3.4 INSTALLATION OF FIRE-ALARM WIRE AND CABLE

A. Comply with NFPA 72.

B. Wiring Method: Install wiring in metal pathway according to Section 270528.29 "Hangers and Supports for Communications Systems."

1. Install plenum cable in environmental airspaces, including plenum ceilings.
2. Fire-alarm circuits and equipment control wiring associated with fire-alarm system must be installed in a dedicated pathway system.

   a. Cables and pathways used for fire-alarm circuits, and equipment control wiring associated with fire-alarm system, may not contain any other wire or cable.

3. Fire-Rated Cables: Use of two-hour, fire-rated fire-alarm cables, NFPA 70, Types MI and CI, is permitted.
4. Signaling Line Circuits: Power-limited fire-alarm cables may be installed in the same cable or pathway as signaling line circuits.

C. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and

back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with fire-alarm system to terminal blocks. Mark each terminal according to system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

D. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes; cabinets; or equipment enclosures where circuit connections are made.

E. Color-Coding: Color-code fire-alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use different colors for visible alarm-indicating devices. Paint fire-alarm system junction boxes and covers red.

F. Risers: Install at least two vertical cable risers to serve the fire-alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent receipt or transmission of signals from other floors or zones.

G. Wiring to Remote Alarm Transmitting Device: 1 inch (25 mm) conduit between the fire-alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.5 CONNECTIONS

A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.

B. Make splices, terminations, and taps that are compatible with conductor material.

C. Wiring at Outlets: Install conductor at each outlet, with at least 6 inches of slack.

D. Comply with requirements in Section 284621.11 "Addressable Fire-Alarm Systems" for connecting, terminating, and identifying wires and cables.

3.6 IDENTIFICATION

A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."

B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

3.7 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

3.8 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors and conductors feeding the following critical equipment and services for compliance with requirements:

   a. Transformers

   b. Panelboards

   c. Safety Switches

   d. Intrusion Detection System

   e. Video Monitoring System

2. Perform each of the following visual and electrical tests:

   a. Inspect exposed sections of conductor and cable for physical damage and correct connection according to the single-line diagram.
   b. Test bolted connections for high resistance using one of the following:

      1) A low-resistance ohmmeter.
      2) Calibrated torque wrench.
      3) Thermographic survey.

   c. Inspect compression-applied connectors for correct cable match and indentation.
   d. Inspect for correct identification.
   e. Inspect cable jacket and condition.
   f. Insulation-resistance test on each conductor for ground and adjacent conductors. Apply a potential of 500 V(dc) for 300 V rated cable and 1000 V(dc) for 600 V rated cable for a one-minute duration.
   g. Continuity test on each conductor and cable.
   h. Uniform resistance of parallel conductors.

B. Cables will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports to record the following:

1. Procedures used.
2. Results that comply with requirements.
3. Results that do not comply with requirements, and corrective action taken to achieve compliance with requirements.

END OF SECTION 260519

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Category 6a balanced twisted pair cable.
   2. Control cable.
   3. Control-circuit conductors.

1.2 ACTION SUBMITTALS

A. Product Data:
   1. Category 6a balanced twisted pair cable.
   2. Control cable.
   3. Control-circuit conductors.

1.3 INFORMATIONAL SUBMITTALS

A. Source quality-control reports.

B. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 CATEGORY 6a BALANCED TWISTED PAIR CABLE

A. Description: Four-pair, balanced-twisted pair cable, with internal spline, certified to meet transmission characteristics of Category 6a cable at frequencies up to 500 MHz.

B. Standard: Comply with TIA-568-C.2 for Category 6a cables.

C. Conductors: 100 ohm, No. 23 AWG solid copper.

D. Shielding/Screening: Unshielded twisted pairs (UTP)

E. Cable Rating: Plenum.

F. Jacket: Match NIFC color requirements.

2.3 CONTROL CABLE

A. Paired Cable: NFPA 70, Type CMG.

1. One or Multi-pair, twisted, No. 16 AWG, stranded (19x29) or No. 18 AWG, stranded (19x30) tinned-copper conductors fitting the application.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1685.

B. Plenum-Rated, Paired Cable: NFPA 70, Type CMP.

1. One or Multi-pair, twisted, No. 16 AWG, stranded (19x29) or No. 18 AWG, stranded (19x30) tinned-copper conductors fitting the application.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with NFPA 262.

2.4 CONTROL-CIRCUIT CONDUCTORS

A. Class 1 Control Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway.

B. Class 2 Control Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway, power-limited cable, concealed in building finishes, or power-limited tray cable, in cable tray.

C. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway, power-limited cable, concealed in building finishes, or power-limited tray cable, in cable tray.

D. Class 2 Control Circuits and Class 3 Remote-Control and Signal Circuits That Supply Critical Circuits: Circuit Integrity (CI) cable.

1. Smoke control signaling and control circuits.

2.5 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to evaluate cables.

B. Factory test twisted pair cables according to TIA-568-C.2.

C. Cable will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Test cables on receipt at Project site.

1. Test each pair of twisted pair cable for open and short circuits.

3.2 INSTALLATION OF RACEWAYS AND BOXES

A. Comply with requirements in Section 260533.13 "Raceways and Boxes for Electrical Systems" for raceway selection and installation requirements for conduits as supplemented or modified in this Section.

B. Comply with requirements in Section 260533.13 "Raceways and Boxes for Electrical Systems " for raceway selection and installation requirements for wireways as supplemented or modified in this Section.

C. Comply with requirements in Section 260533.13 "Raceways and Boxes for Electrical Systems " for raceway selection and installation requirements for boxes as supplemented or modified in this Section.

1. Outlet boxes must be no smaller than 2 inch (50 mm) wide, 3 inch (75 mm) high, and 2-1/2 inch (64 mm) deep.
2. Flexible metal conduit must not be used.

D. Comply with TIA-569-D for pull-box sizing and length of conduit and number of bends between pull points.

E. Install manufactured conduit sweeps and long-radius elbows if possible.

F. Raceway Installation in Equipment Rooms:

1. Position conduit ends adjacent to a corner on backboard if a single piece of plywood is installed, or in the corner of the room if multiple sheets of plywood are installed around perimeter walls of the room.
2. Install cable trays to route cables if conduits cannot be located in these positions.
3. Secure conduits to backboard if entering the room from overhead.
4. Extend conduits 3 inch (75 mm) above finished floor.
5. Install metal conduits with grounding bushings and connect with grounding conductor to grounding system.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

A. Comply with NECA 1.

B. General Requirements for Cabling:

1. Comply with TIA-568-C Series of standards.

2. Comply with BICSI ITSIMM, Ch. 5, "Copper Structured Cabling Systems."
3. Terminate all conductors; cable must not contain unterminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
4. Cables may not be spliced and must be continuous from terminal to terminal. Do not splice cable between termination, tap, or junction points.
5. Cables serving a common system may be grouped in a common raceway. Install network cabling and control wiring and cable in separate raceway from power wiring. Do not group conductors from different systems or different voltages.
6. Secure and support cables at intervals not exceeding 30 inch (760 mm) and not more than 6 inch (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
7. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIMM, Ch. 5, "Copper Structured Cabling Systems." Install lacing bars and distribution spools.
8. Do not install bruised, kinked, scored, deformed, or abraded cable. Remove and discard cable if damaged during installation and replace it with new cable.
9. Cold-Weather Installation: Bring cable to room temperature before dereeling. Do not use heat lamps for heating.
10. Pulling Cable: Comply with BICSI ITSIMM, Ch. 5, "Copper Structured Cabling Systems." Monitor cable pull tensions.
11. Support: Do not allow cables to lie on removable ceiling tiles.
12. Secure: Fasten securely in place with hardware specifically designed and installed so as to not damage cables.
13. Provide strain relief.
14. Keep runs short. Allow extra length for connecting to terminals. Do not bend cables in a radius less than 10 times the cable OD. Use sleeves or grommets to protect cables from vibration at points where they pass around sharp corners and through penetrations.
15. Ground wire must be copper, and grounding methods must comply with IEEE C2. Demonstrate ground resistance.

C. Balanced Twisted Pair Cable Installation:

1. Comply with TIA-568-C.2.
2. Install termination hardware as specified in Section 271513 "Communications Copper Horizontal Cabling" unless otherwise indicated.
3. Do not untwist balanced twisted pair cables more than 1/2 inch (12 mm) at the point of termination to maintain cable geometry.

D. Installation of Control-Circuit Conductors:

1. Install wiring in raceways.
2. Use insulated spade lugs for wire and cable connection to screw terminals.

E. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend copper cable not in a wireway or pathway a minimum of 8 inch (200 mm) above ceilings by cable supports not more than 30 inch (760 mm) apart.
3. Cable must not be run through or on structural members or in contact with pipes, ducts, or other potentially damaging items. Do not run cables between structural members and corrugated panels.

F. Separation from EMI Sources:

1. Comply with BICSI TDMM and TIA-569-D recommendations for separating unshielded copper voice and data communications cable from potential EMI sources including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment must be as follows:

    a. Electrical Equipment or Circuit Rating Less Than 2 kVA: A minimum of 5 inch (127 mm).
    b. Electrical Equipment or Circuit Rating between 2 and 5 kVA: A minimum of 12 inch (305 mm).
    c. Electrical Equipment or Circuit Rating More Than 5 kVA: A minimum of 24 inch (600 mm).

3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment must be as follows:

    a. Electrical Equipment or Circuit Rating Less Than 2 kVA: A minimum of 2-1/2 inch (64 mm).
    b. Electrical Equipment or Circuit Rating between 2 and 5 kVA: A minimum of 6 inch (150 mm).
    c. Electrical Equipment or Circuit Rating More Than 5 kVA: A minimum of 12 inch (305 mm).

4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures must be as follows:

    a. Electrical Equipment or Circuit Rating Less Than 2 kVA: No requirement.
    b. Electrical Equipment or Circuit Rating between 2 and 5 kVA: A minimum of 3 inch (75 mm).
    c. Electrical Equipment or Circuit Rating More Than 5 kVA: A minimum of 6 inch (150 mm).

5. Separation between Communications Cables and Electrical Motors and Transformers, 5 kVA or 5 HP and Larger: A minimum of 48 inch (1200 mm).
6. Separation between Communications Cables and Fluorescent Fixtures: A minimum of 5 inch (127 mm).

3.4 REMOVAL OF CONDUCTORS AND CABLES

A. Remove abandoned conductors and cables. Abandoned conductors and cables are those installed that are not terminated at equipment and are not identified with a tag for future use.

3.5 CONTROL-CIRCUIT CONDUCTORS

A. Minimum Conductor Sizes:

1. Class 1 remote-control and signal circuits; No 14 AWG.
2. Class 2 low-energy, remote-control, and signal circuits; No. 16 AWG.
3. Class 3 low-energy, remote-control, alarm, and signal circuits; No 12 AWG.

3.6 FIRESTOPPING

A. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Comply with TIA-569-D, Annex A, "Firestopping."

C. Comply with BICSI TDMM, "Firestopping" Chapter.

3.7 GROUNDING

A. For data communication wiring, comply with TIA-607-B and with BICSI TDMM, "Bonding and Grounding (Earthing)" Chapter.

B. For control-voltage wiring and cabling, comply with requirements in Section 260526 "Grounding and Bonding for Electrical Systems."

3.8 IDENTIFICATION

A. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

B. Identify data and communications system components, wiring, and cabling according to TIA-606-B; label printers must use label stocks, laminating adhesives, and inks complying with UL 969.

C. Identify each wire on each end and at each terminal with a number-coded identification tag. Each wire must have a unique tag.

3.9 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Visually inspect cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA-568-C.1.
2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Test cabling for direct-current loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination, but not after cross-connection.

    a. Test instruments must meet or exceed applicable requirements in TIA-568-C.2. Perform tests with a tester that complies with performance requirements in its "Test Instruments (Normative)" Annex, complying with measurement accuracy

specified in its "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

B. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.

C. End-to-end cabling will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

END OF SECTION 260523

SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes grounding and bonding systems and equipment.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1. Plans showing as-built, dimensioned locations of system described in "Field Quality Control" Article, including the following:

    a. Test wells.
    b. Ground rods.
    c. Ground rings.

2. Instructions for periodic testing and inspection of grounding features at test wells based on NFPA 70B.

    a. Tests shall determine if ground-resistance or impedance values remain within specified maximums, and instructions shall recommend corrective action if values do not.
    b. Include recommended testing intervals.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with UL 467 for grounding and bonding materials and equipment.

2.2 CONDUCTORS

A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.

B. Bare Copper Conductors:

1. Stranded Conductors: ASTM B8.
2. Tinned Conductors: ASTM B33.
3. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch in diameter.
4. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
5. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.
6. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.

2.3 CONNECTORS

A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

B. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

C. Bus-Bar Connectors: Compression type, copper or copper alloy, with two wire terminals.

D. Cable-to-Cable Connectors: Compression type, copper or copper alloy.

E. Cable Tray Ground Clamp: Mechanical type, zinc-plated malleable iron.

F. Ground Rod Clamps: Mechanical type, copper or copper alloy, terminal with hex head bolt.

G. Signal Reference Grid Clamp: Mechanical type, stamped-steel terminal with hex head screw.

H. Water Pipe Clamps:

1. Mechanical type, two pieces with zinc-plated bolts.

   a. Material: Tin-plated aluminum.
   b. Listed for direct burial.

2. U-bolt type with malleable-iron clamp and copper ground connector.

2.4 GROUNDING ELECTRODES

A. Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application

B. Ground Rods: Copper-clad steel; 5/8 by 96 inches.

PART 3 - EXECUTION

3.1 APPLICATIONS

A. Conductors: Install solid conductor for No. 8 AWG and smaller, and stranded conductors for No. 6 AWG and larger unless otherwise indicated.

B. Grounding Bus: Install in electrical equipment rooms, in rooms housing service equipment, and elsewhere as indicated.

1. Install bus horizontally, on insulated spacers 2 inches minimum from wall, 6 inches above finished floor unless otherwise indicated.

C. Conductor Terminations and Connections:

1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
2. Connections to Ground Rods at Test Wells: Bolted connectors.
3. Connections to Structural Steel: Welded connectors.

3.2 GROUNDING AT THE SERVICE

A. Equipment grounding conductors and grounding electrode conductors shall be connected to the ground bus. Install a main bonding jumper between the neutral and ground buses at the main distribution panel ‘HP1’.

3.3 EQUIPMENT GROUNDING

A. Install insulated equipment grounding conductors with all feeders and branch circuits.

B. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:

1. Feeders and branch circuits.
2. Lighting circuits.
3. Receptacle circuits.
4. Single-phase motor and appliance branch circuits.
5. Three-phase motor and appliance branch circuits.
6. Flexible raceway runs.

C. Water Heater: Install a separate insulated equipment grounding conductor to each electric water heater. Bond conductor to heater units, piping, connected equipment, and components.

3.4 INSTALLATION

A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.

B. Ground Rods: Drive rods until tops are 2 inches below final grade unless otherwise indicated.

1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.

C. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.

1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.

D. Grounding and Bonding for Piping:

1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
2. Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.

3.5 FIELD QUALITY CONTROL

A. All tests the contractor cannot perform themselves shall be performed by a qualified testing agency. Contractor is responsible for hiring of testing agency not the Government.

B. Perform tests and inspections with the assistance of a factory-authorized service representative.

C. Tests and Inspections:

1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, and at individual ground rods. Make tests at ground rods before any conductors are connected.

a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
b. Perform tests by fall-of-potential method according to IEEE 81.
c. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Government promptly and include recommendations to reduce ground resistance.

D. Grounding system will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

F. Report measured ground resistances that exceed the following values:

1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
2. Power Distribution Units or Panelboards Serving Electronic Equipment: 3 ohm(s).

G. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Government promptly and include recommendations to reduce ground resistance.

3.6 PROTECTION

A. After installation, protect grounding and bonding cables and equipment from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 260526

SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Steel slotted support systems.
2. Conduit and cable support devices.
3. Structural steel for fabricated supports and restraints.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Hangers. Include product data for components.
2. Slotted support systems.
3. Equipment supports.
4. Vibration Isolation Base Details: Detail fabrication including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plan(s) and other details, drawn to scale, and coordinated with each other, using input from installers of the items involved.

B. Welding certificates.

PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

A. Steel Slotted Support Systems: Preformed steel channels and angles with minimum 13/32-inch-diameter holes at a maximum of 8 inches o.c. in at least one surface.

1. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
2. Material for Channel, Fittings, and Accessories: Galvanized steel.
3. Channel Width: 1-5/8 inches.
4. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
5. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Conduit and Cable Support Devices: Steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.

C. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for nonarmored electrical conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be made of malleable iron.

D. Structural Steel for Fabricated Supports and Restraints: ASTM A36/A36M steel plates, shapes, and bars; black and galvanized.

E. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:

1. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel, for use in hardened portland cement concrete, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
2. Concrete Inserts: Steel or malleable-iron, slotted support system units are similar to MSS Type 18 units and comply with MFMA-4 or MSS SP-58.
3. Clamps for Attachment to Steel Structural Elements: MSS SP-58 units are suitable for attached structural element.
4. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM F3125/F3125M, Grade A325.
5. Toggle Bolts: All-steel springhead type.
6. Hanger Rods: Threaded steel.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with the following standards for application and installation requirements of hangers and supports, except where requirements on Drawings or in this Section are stricter:

1. NECA 1.
2. NECA 105.
3. NECA 111.
4. NECA NEIS 101.
5. NECA NEIS 105.
6. NECA NEIS 111.

B. Comply with requirements for raceways and boxes specified in Section 260533.13 "Raceways and Boxes for Electrical Systems."

C. Maximum Support Spacing and Minimum Hanger Rod Size for Raceways: Space supports for EMT, IMC, and RMC as required by NFPA 70. Minimum rod size shall be 1/4 inch in diameter.

D. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.

1. Secure raceways and cables to these supports with single-bolt conduit clamps.

3.2 SUPPORT INSTALLATION

A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this article.

B. Raceway Support Methods: In addition to methods described in NECA 1, EMT may be supported by openings through structure members, according to NFPA 70.

C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.

D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:

1. To Wood: Fasten with lag screws or through bolts.
2. To New Concrete: Bolt to concrete inserts.
3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
4. To Existing Concrete: Expansion anchor fasteners.
5. To Steel: Welded threaded studs complying with AWS D1.1/D1.1M, with lock washers and nuts.
6. To Light Steel: Sheet metal screws.
7. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate.

E. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.

B. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 CONCRETE BASES

A. Construct concrete bases of dimensions indicated, but not less than 4 inch (100 mm) larger in both directions than supported unit, and so anchors will be a minimum of 10 bolt diameters from edge of the base.

B. Use 3000 psi (20.7 MPa), 28-day compressive-strength concrete. Concrete materials, reinforcement, and placement requirements are specified in Section 033000 "Cast-in-Place Concrete."

C. Anchor equipment to concrete base as follows:

1. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
2. Install anchor bolts to elevations required for proper attachment to supported equipment.
3. Install anchor bolts according to anchor-bolt manufacturer's written instructions.

3.5 PAINTING

A. Touchup:

1. Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

   a. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils (0.05 mm).

B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A780.

END OF SECTION 260529

SECTION 260533.13 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal conduits and fittings.
2. Nonmetallic conduits and fittings.
3. Metal wireways and auxiliary gutters.
4. Boxes, enclosures, and cabinets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

A. Metal Conduit:

1. Listing and Labeling: Metal conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
2. GRC: Comply with ANSI C80.1 and UL 6.
3. EMT: Comply with ANSI C80.3 and UL 797.
4. FMC: Comply with UL 1; zinc-coated steel.

B. Metal Fittings: Comply with NEMA FB 1 and UL 514B.

1. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
2. Fittings, General: Listed and labeled for type of conduit, location, and use.
3. Fittings for EMT:

a. Material: Steel.
b. Type: Setscrew or compression.

4. Expansion Fittings: PVC or steel to match conduit type, complying with UL 651, rated for environmental conditions where installed, and including flexible external bonding jumper.

2.2 NONMETALLIC CONDUITS AND FITTINGS

A. Nonmetallic Conduit:

B. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

1. ENT: Comply with NEMA TC 13 and UL 1653.
2. RNC: Type EPC-40-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.
3. LFNC: Comply with UL 1660.

C. Nonmetallic Fittings:

1. Fittings, General: Listed and labeled for type of conduit, location, and use.
2. Fittings for ENT and RNC: Comply with NEMA TC 3; match to conduit or tubing type and material.
3. Solvents and Adhesives: As recommended by conduit manufacturer.

2.3 METAL WIREWAYS AND AUXILIARY GUTTERS

A. Description: Sheet metal, complying with UL 870 and NEMA 250, Type 1 unless otherwise indicated, and sized according to NFPA 70.

B. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.

2.4 BOXES, ENCLOSURES, AND CABINETS

A. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.

B. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.

C. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, aluminum, Type FD, with gasketed cover.

D. Nonmetallic Outlet and Device Boxes: Comply with NEMA OS 2 and UL 514C.

E. Luminaire Outlet Boxes: Nonadjustable, designed for attachment of luminaire weighing 50 lb. Outlet boxes designed for attachment of luminaires weighing more than 50 lb shall be listed and marked for the maximum allowable weight.

F. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.

G. Cast-Metal Access, Pull, and Junction Boxes: Comply with NEMA FB 1 and UL 1773, cast aluminum with gasketed cover.

H. Box extensions used to accommodate new building finishes shall be of same material as recessed box.

I. Device Box Dimensions: 4 inches by 2-1/8 inches by 2-1/8 inches deep.

J. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, Type 3R with continuous-hinge cover with flush latch unless otherwise indicated.

1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
2. Nonmetallic Enclosures: Plastic.
3. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

A. Indoors: Apply raceway products as specified below unless otherwise indicated.

1. Exposed, Not Subject to Physical Damage: EMT.
2. Exposed, Not Subject to Severe Physical Damage: EMT.
3. Concealed in Ceilings and Interior Walls and Partitions: ENT or RNC, Type EPC-40-PVC.
4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
5. Damp or Wet Locations: Type EPC-40-PVC.
6. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 nonmetallic in institutional and commercial kitchens and damp or wet locations.

B. Minimum Raceway Size: 1/2-inch trade size.

C. Raceway Fittings: Compatible with raceways and suitable for use and location.

1. Rigid Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
3. EMT: Use compression, fittings. Comply with NEMA FB 2.10.
4. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.

D. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.

E. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F.

3.2 INSTALLATION

A. Comply with NECA 1 and NECA 101 for installation requirements or within this article if it is more strict. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.

B. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.

C. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches of changes in direction.

D. Make bends in raceway using large-radius preformed ells. Field bending shall be according to NFPA 70 minimum radii requirements. Use only equipment specifically designed for material and size involved.

E. Conceal conduit and EMT within finished walls, and ceilings unless otherwise indicated. Install conduits parallel or perpendicular to building lines.

F. Support conduit within 12 inches of enclosures to which attached.

G. Stub-ups to Above Recessed Ceilings:

1. Use EMT, or RMC for raceways.
2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.

H. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.

I. Coat field-cut threads on PVC-coated raceway with a corrosion-preventing conductive compound prior to assembly.

J. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.

K. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inchtrade size and insulated throat metal bushings on 1-1/2-inchtrade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.

L. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire.

M. Install raceway sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces.

N. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to top of box unless otherwise indicated.

O. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between the box and cover plate or the supported equipment and box.

P. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.

Q. Locate boxes so that cover or plate will not span different building finishes.

R. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.

S. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.

T. Set metal floor boxes level and flush with finished floor surface.

U. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

3.3 PROTECTION

A. Protect coatings, finishes, and cabinets from damage and deterioration.

1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 260533

SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Round sleeves.
2. Sleeve seal systems.
3. Sleeve seal fittings.
4. Grout.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ROUND SLEEVES

A. Pipe Sleeves, PVC:

1. Description: ASTM D1785, Schedule 40.

2.2 SLEEVE SEAL SYSTEMS

1. General Characteristics: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable or between raceway and cable.
2. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
3. Pressure Plates: Fiber-reinforced plastic.
4. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements.

2.3 SLEEVE SEAL FITTINGS

A. General Characteristics: Manufactured plastic, sleeve-type, waterstop assembly made for embedding in concrete slab or wall. Unit must have plastic or rubber waterstop collar with center opening to match piping OD.

2.4 GROUT

A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.

1. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
2. Design Mix: 5000-psi, 28-day compressive strength.
3. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

A. Comply with NECA 1.

B. Sleeves for Conduits Penetrating Above-Grade, Non-Fire-Rated, Concrete and Masonry-Unit Floors and Walls:

1. Interior Penetrations of Non-Fire-Rated Walls and Floors:

a. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall or floor so no voids remain. Tool exposed surfaces smooth; protect material while curing.
b. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint.

2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
3. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and raceway or cable, unless sleeve seal system is to be installed.
4. Install sleeves for floor penetrations. Extend sleeves installed in floors 2 inches above finished floor level. Install sleeves during erection of floors.

C. Sleeves for Conduits Penetrating Non-Fire-Rated Wall Assemblies:

1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
2. Seal space outside of sleeves with approved joint compound for wall assemblies.

D. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work.

E. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seal systems. Size sleeves to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

3.2 INSTALLATION OF SLEEVE SEAL SYSTEMS

A. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

END OF SECTION 260544

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes Identification for electrical systems.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each type of label and sign to illustrate composition, size, colors, lettering style, mounting provisions, and graphic features of identification products.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Comply with NFPA 70.

B. Comply with ANSI Z535.4 for safety signs and labels.

C. Comply with NFPA 70E requirements for arc-flash warning labels.

D. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

E. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 ELECTRICAL IDENTIFICATION

A. Identification Devices: A single type of identification product for each application category. Use colors prescribed by ANSI A13.1, NFPA 70, and these Specifications.

1. As a minimum, identification means shall be installed on the following:

a. Panelboards, switchboards, switchgear, etc.
b. Transformers

c. Raceways and cables
d. Junction boxes
e. Disconnects
f. Receptacles
g. Large or major electrical components (generators, transfer switches, fire alarm control panel, etc.)

B. Raceway and Cable Labels: Comply with ANSI A13.1, Table 3, for minimum size of letters for legend and minimum length of color field for each raceway and cable size.

1. Type: Pretensioned, wraparound plastic sleeves. Flexible, preprinted, color-coded, acrylic band sized to suit the diameter of the item it identifies.
2. Color: Black letters on orange background.
3. Legend: Indicates voltage.

C. Colored Adhesive Marking Tape for Raceways, Wires, and Cables: Self-adhesive vinyl tape, not less than 1 inch wide x 3 mils thick.

D. Color-Coding Cable Ties: Type 6/6 nylon, self-locking type. Colors to suit coding scheme.

E. Engraved-Plastic Labels, Signs, and Instruction Plates: Engraving stock, melamine plastic laminate punched or drilled for mechanical fasteners 1/16-inch minimum thickness for signs up to 20 sq. in. and 1/8-inch minimum thickness for larger sizes. Engraved legend in black letters on white background.

F. Interior Warning and Caution Signs: Comply with 29 CFR, Chapter XVII, Part 1910.145. Preprinted, aluminum, baked-enamel-finish signs, punched or drilled for mechanical fasteners, with colors, legend, and size appropriate to the application.

G. Fasteners for Nameplates and Signs: Self-tapping, stainless-steel screws or No. 10/32 stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 IDENTIFICATION MATERIALS AND DEVICES

A. All components of electrical system shall be neatly and accurately labeled to facilitate ready identification and service. Temporary type of markings, which are visible on equipment, will not be permitted. Repaint trims, housing, etc. where such markings cannot be readily removed. Defaced finish must be refinished. Provide labels as follows or as indicated elsewhere:

1. Provide engraved composition nameplates on each branch circuit panelboard, etc. Lettering shall be 1/2-inch minimum height for panelboards. Apply labeling for panelboards on outside of each panelboard door and include voltage and phase.
2. Provide neatly-typed directory cards for all branch circuit panelboard directories.
3. Provide engraved composition nameplates having 3/8-inch minimum height, white letters engraved in a black face for each switch or circuit breaker in switchboards and subdistribution boards. Provide labeling of matching style designating all units as

designated on drawings. Secure all lamnoid nameplates with rivets or screws. Adhesives will not be allowed.

4. Use of Dymo labels for panels and circuit number identification on all receptacle covers and disconnect switches in mechanical and equipment rooms is forbidden.
5. Provide engraved composition nameplates on all time clocks, starters, etc. Lettering shall be 3/8 inches minimum height for equipment. Labeling for equipment shall be in accordance with designations given on the associated drawings.

B. Coordinate names, abbreviations, colors, and other designations used for electrical identification with corresponding designations indicated in the Contract Documents or required by codes and standards. Install at locations for most convenient viewing without interference with operation and maintenance of equipment. Use consistent designations throughout Project.

1. Bands: Pretensioned, snap-around, colored plastic sleeves or colored adhesive marking tape. Make each color band 2 inches wide, completely encircling conduit, and place adjacent bands of two-color markings in contact, side by side.
2. Band Locations: At changes in direction, at penetrations of walls and floors, at 50-footmaximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
3. Colors:

   a. Fire Alarm System: Red
   b. Security System: Blue and yellow
   c. Telecommunication System: Green and yellow

C. Tag and label each feeder conductor (with an operating voltage of 600 volts or less) in pullboxes with an engraved, non-metallic tag, having 3/16-inch minimum height letters. Tag shall be a minimum of one inch diameter or square. State circuit number and phase (A, B, C).

D. Install warning, caution, and instruction signs where required to comply with 29 CFR, Chapter XVII, Part 1910.145, and where needed to ensure safe operation and maintenance of electrical systems and of items to which they connect. Install engraved plastic-laminated instruction signs with approved legend where instructions are needed for system or equipment operation.

E. Install engraved-laminated emergency-operating signs with white letters on red background with minimum 3/8-inch-high lettering for emergency instructions on power transfer, load shedding, and other emergency operations.

END OF SECTION 260553

SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
1. Daylight-harvesting switching controls.
2. Daylight-harvesting dimming controls.
3. Indoor occupancy and vacancy sensors.
4. Switchbox-mounted occupancy sensors.
5. Lighting contactors.
6. Conductors and cables.

B. Related Requirements:

1. Section 262726 "Wiring Devices"

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

B. Shop Drawings:

1. Show installation details for the following:

a. Occupancy sensors.
b. Vacancy sensors.

2. Interconnection diagrams showing field-installed wiring.
3. Include diagrams for power, signal, and control wiring.

C. Field quality-control reports.

1.3 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's warranties.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data

B. Software and firmware operational documentation.

1.5 WARRANTY

A. Manufacturer's Warranty: Manufacturer and Installer warrant that installed lighting control devices perform in accordance with specified requirements and agree to repair or replace, including labor, materials, and equipment, devices that fail to perform as specified within extended warranty period.

1. Failures include, but are not limited to, the following:

a. Faulty operation of lighting control software.
b. Faulty operation of lighting control devices.

2. Warranty Period: Five year(s) from date of Substantial Completion.

1.6 SYSTEM DESCRIPTON & OPERATION

A. The Lighting Control and Automation system covers the following equipment:

1. Digital Room Controllers: Self-configuring, digitally addressable one, two or three relays controllers with integral current thyristor, 0-10 volt control for ballasts.
2. Digital Occupancy Sensors: Self-configuring, digitally addressable and calibrated occupancy sensors with LCD display and two-way active infrared (IR) communications.
3. Digital Switches – Self-configuring, digitally addressable pushbutton switches, dimmers, and scene switches with two-way active infrared (IR) communications.
4. Digital Photosensors: Single-zone closed loop and multi-zone open loop daylighting sensors with two-way active infrared (IR) communications can provide switching or dimming control for daylight harvesting.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following;
1. Acuity Brand Controls, nLight.
2. Lutron.
3. Greengate.

2.2 DAYLIGHT-HARVESTING SWITCHING CONTROLS

A. Description: System operates indoor lighting.

B. Sequence of Operation: As daylight increases, the lights are turned off at a predetermined level. As daylight decreases, the lights are turned on at a predetermined level.

1. Lighting control set point is based on two lighting conditions:

a. When no daylight is present.
b. When significant daylight is present (target level).

c. System programming is done with two hand-held, remote-control tools.

C. Ceiling-Mounted Switching Controls:

1. Solid-state, light-level sensor unit, with separate power pack, that detects changes in indoor lighting levels that are perceived by the eye.

D. Electrical Components, Devices, and Accessories:

1. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
2. Operating Ambient Conditions: Dry interior conditions, 32 to 120 deg F.
3. Sensor Output:

   a. Contacts rated to operate the associated power pack, complying with UL 773A. Sensor must be powered by the power pack, or
   b. Digital signal compatible with power pack.

4. Sensor type: Closed loop.
5. Zone: Single.
6. Power Pack:

   a. Dry contacts rated for 20 A LED load at 120- and 277 V(ac), Sensor has 24 V(dc), 150 mA, Class 2 power source.

      1) LED status lights to indicate load status.
      2) Plenum rated.

   b. Digital controller capable of accepting two RJ45 inputs with one or two outputs rated for 20 A incandescent LED load at 120 and 277 V(ac), Sensor has 24 V(dc) Class 2 power source.

      1) With integral current monitoring
      2) Compatible with digital addressable lighting interface.
      3) Plenum rated.

7. General Space Sensors Light-Level Monitoring Range: 10 to 200 fc, with an adjustment for turn-on and turn-off levels within that range.
8. Atrium Space Sensors Light-Level Monitoring Range: 100 to 1000 fc, with an adjustment for turn-on and turn-off levels within that range.
9. Skylight Sensors Light-Level Monitoring Range: 1000 to 10 000 fc, with an adjustment for turn-on and turn-off levels within that range.
10. Time Delay: Adjustable from 5 to 300 seconds to prevent cycling.
11. Set-Point Adjustment: Equip with deadband adjustment of 25, 50, and 75 percent above the "on" set point, or provide with separate adjustable "on" and "off" set points.
12. Test Mode: User selectable, overriding programmed time delay to allow settings check.
13. Control Load Status: User selectable to confirm that load wiring is correct.
14. Indicator: Two digital displays to indicate the beginning of on-off cycles.

2.3 DAYLIGHT-HARVESTING DIMMING CONTROLS

A. Description: Sensing daylight and electrical lighting levels, the system adjusts the indoor electrical lighting levels. As daylight increases, lights are dimmed.

1. Lighting control set point is based on the following two lighting conditions:

   a. When no daylight is present (target level).
   b. When significant daylight is present.

2. System programming is done with two hand-held, remote-control tools.

   a. Initial setup tool.
   b. Tool for occupants to adjust the target levels by increasing the set point up to 25 percent, or by minimizing the electric lighting level.

B. Ceiling-Mounted Dimming Controls: Solid-state, light-level sensor unit, with separate power pack, to detect changes in indoor lighting levels that are perceived by the eye.

C. Electrical Components, Devices, and Accessories:

1. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
2. Sensor Output: zero to 10 V(dc) to operate luminaires. Sensor is powered by controller unit.
3. Light-Level Sensor Set-Point Adjustment Range: 20 to 60 fc.

D. Power Pack: Digital controller capable of accepting two RJ45 inputs with one or two output(s) rated for 20 A incandescent LED load at 120 and 277 V(ac), for Sensor has 24 V(dc) Class 2 power source.

1. With integral current monitoring.
2. Compatible with digital addressable lighting interface.
3. Plenum rated.

2.4 INDOOR OCCUPANCY AND VACANCY SENSORS

A. General Requirements for Sensors:

1. Wall or Ceiling-mounted, solid-state indoor occupancy and vacancy sensors.
2. Passive infrared, Ultrasonic, or Dual technology.
3. Separate power pack.
4. Hardwired or Wireless connection to switch.

5. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
6. Operation:

a. Occupancy Sensor: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn them off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes, or
b. Vacancy Sensor: Unless otherwise indicated, lights are manually turned on and sensor turns lights off when the room is unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes, or
c. Combination Sensor: Unless otherwise indicated, sensor must be programmed to turn lights on when coverage area is occupied and turn them off when unoccupied, or to turn off lights that have been manually turned on; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.

7. Sensor Output: Sensor is powered from the power pack.

8. Power Pack: Dry contacts rated for 20 A LED load at 120 and 277 V(ac). Sensor has 24 V(dc), 150 mA, Class 2 power source.
9. Mounting:

a. Sensor: Suitable for mounting in any position in a standard device box or outlet box.
b. Relay: Externally mounted through a 1/2 inch knockout in a standard electrical enclosure.
c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

10. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor.
11. Bypass Switch: Override the "on" function in case of sensor failure.
12. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; turn lights off when selected lighting level is present.

B. PIR Type: Wall or Ceiling mounted; detect occupants in coverage area by their heat and movement.

1. Detector Sensitivity: Detect occurrences of 6 inch minimum movement of any portion of a human body that presents a target of not less than 36 sq. inch.

2. Detection Coverage (Room, Ceiling Mounted): Detect occupancy anywhere in a circular area of 1000 sq. ft. when mounted on a 96 inch high ceiling.
3. Detection Coverage (Corridor, Ceiling Mounted): Detect occupancy within 90 ft. when mounted on a 10 ft. high ceiling.
4. Detection Coverage (Room, Wall Mounted): Detect occupancy anywhere within a 180-degree pattern centered on the sensor over an area of 1000 sq. ft. when mounted 48 inch above finished floor.

C. Ultrasonic Type: Wall or Ceiling mounted; detect occupants in coverage area through pattern changes of reflected ultrasonic energy.

1. Detector Sensitivity: Detect a person of average size and weight moving not less than 12 inch in either a horizontal or a vertical manner at an approximate speed of 12 inch/s.

2. Detection Coverage (Small Room): Detect occupancy anywhere within a circular area of 600 sq. ft. when mounted on a 96 inch high ceiling.
3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96 inch high ceiling.
4. Detection Coverage (Large Room): Detect occupancy anywhere within a circular area of 2000 sq. ft. when mounted on a 96 inch high ceiling.
5. Detection Coverage (Corridor): Detect occupancy anywhere within 90 ft. when mounted on a 10 ft. high ceiling in a corridor not wider than 14 ft..
6. Detection Coverage (Room, Wall Mounted): Detect occupancy anywhere within a 180-degree pattern centered on the sensor over an area of 1000 sq. ft. when mounted 84 inch above finished floor.

D. Dual-Technology Type: Wall or Ceiling mounted; detect occupants in coverage area using PIR and ultrasonic detection methods. The particular technology or combination of technologies that control on-off functions is selectable in the field by operating controls on unit.

1. Sensitivity Adjustment: Separate for each sensing technology.
2. Detector Sensitivity: Detect occurrences of 6 inch minimum movement of any portion of a human body that presents a target of not less than 36 sq. inch, and detect a person of average size and weight moving not less than 12 inch in either a horizontal or a vertical manner at an approximate speed of 12 inch/s.
3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96 inch high ceiling.
4. Detection Coverage (Room, Wall Mounted): Detect occupancy anywhere within a 180-degree pattern centered on the sensor over an area of 1000 sq. ft. when mounted 48 inch above finished floor.

2.5 SWITCHBOX-MOUNTED OCCUPANCY SENSORS

A. General Requirements for Sensors: Automatic-wall-switch occupancy sensor with manual on-off switch, suitable for mounting in a single gang switchbox using hardwired connection or using wireless connection.

1. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
2. Occupancy Sensor Operation: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn lights off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
3. Operating Ambient Conditions: Dry interior conditions, 32 to 120 deg F.
4. Switch Rating: Not less than 800 VA LED load at 120 V, 1200 VA LED load at 277 V, and 800 W incandescent.

2.6 LIGHTING CONTACTORS

A. Description: Electrically operated and mechanically or electrically held, combination-type lighting contactors with nonfused disconnect, complying with NEMA ICS 2 and UL 508.

1. Current Rating for Switching: Listing or rating consistent with type of load served, including tungsten filament, inductive, and high-inrush ballast (ballast with 15 percent or less THD of normal load current).
2. Fault Current Withstand Rating: Equal to or exceeding the available fault current at the point of installation.
3. Enclosure: Comply with NEMA 250.
4. Provide with control and pilot devices as indicated on Drawings, matching the NEMA type specified for the enclosure.

2.7 CONDUCTORS AND CABLES

A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 22 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 14 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine lighting control devices before installation. Reject lighting control devices that are wet, moisture damaged, or mold damaged.

B. Examine walls and ceilings for suitable conditions where lighting control devices will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF SENSORS

A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.

B. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's instructions.

3.3 INSTALLATION OF CONTACTORS

A. Mount electrically held lighting contactors with elastomeric isolator pads to eliminate structure-borne vibration unless contactors are installed in an enclosure with factory-installed vibration isolators.

3.4 INSTALLATION OF WIRING

A. Wiring Method: Comply with Section 260519 "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size is 1/2 inch.

B. Wiring within Enclosures: Separate power-limited and nonpower-limited conductors in accordance with conductor manufacturer's instructions.

C. Size conductors in accordance with lighting control device manufacturer's instructions unless otherwise indicated.

D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, device, and outlet boxes; terminal cabinets; and equipment enclosures.

3.5 IDENTIFICATION

A. Identify components and power and control wiring in accordance with Section 260553 "Identification for Electrical Systems.

1. Identify controlled circuits in lighting contactors.
2. Identify circuits or luminaires controlled by photoelectric and occupancy sensors at each sensor.

B. Label time switches and contactors with a unique designation.

3.6 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operational Test: After installing time switches and sensors, and after electrical circuitry has been energized, start units to confirm proper unit operation.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

B. Nonconforming Work:

1. Lighting control devices will be considered defective if they do not pass tests and inspections.
2. Remove and replace defective units and retest.

C. Prepare test and inspection reports.

D. Manufacturer Services:

1. Engage factory-authorized service representative to support field tests and inspections.

3.7 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting lighting control devices to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit Government's operations.
2. For daylighting controls, adjust set points and deadband controls to suit Government's operations.
3. Align high-bay occupancy sensors using manufacturer's laser aiming tool.

3.8 MAINTENANCE

A. Software and Firmware Service Agreement:

1. Technical Support: Beginning at Substantial Completion, verify that software and firmware service agreement includes software support for two years.
2. Upgrade Service: At Substantial Completion, update software and firmware to latest version. Install and program software upgrades that become available within two years from date of Substantial Completion. Verify upgrading software includes operating system and new or revised licenses for using software.

    a. Upgrade Notice: No fewer than 30 days to allow Government to schedule and access the system and to upgrade computer equipment if necessary.

3. Upgrade Reports: Prepare written report after each update, documenting upgrades installed.

END OF SECTION 260923

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Standard-grade receptacles, 125 V, 20 A.
2. GFCI receptacles, 125 V, 20 A.
3. Toggle switches, 120V, 15 A.
4. Indoor occupancy and vacancy sensors.
5. Wall-box dimmers.
6. Wall plates.
7. Photoelectric switches.
8. Connectors, cords, and plugs.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: List of legends and description of materials and process used for premarking wall plates.

C. Samples: One for each type of device and wall plate specified, in each color specified.

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 GENERAL WIRING-DEVICE REQUIREMENTS

A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.

B. Comply with NFPA 70.

C. RoHS compliant.

D. Comply with NEMA WD 1.

E. Device Color:

1. Wiring Devices Connected to Normal Power System: White unless otherwise indicated or required by NFPA 70 or device listing.
2. SPD Devices: Blue.

F. Wall Plate Color: All wall plates covers shall be metal, stainless.

G. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.

2.2 STANDARD-GRADE RECEPTACLES, 125 V, 20 A

A. Duplex Receptacles, 125 V, 20 A, E102:

1. Description: Two pole, three wire, and self-grounding.
2. Configuration: NEMA WD 6, Configuration 5-20R.
3. Standards: Comply with UL 498 and FS W-C-596.

B. Wired Half-Controlled Tamper-Resistant Duplex Straight-Blade Receptacle:

1. Description: half-controlled (one outlet switched, one always on). Two poles, three wire, and self-grounding.
2. Configuration: NEMA WD 6, Configuration 5-250R.
3. Standards: Comply with UL 969 and FS W-C-596.
4. Marking: Listed and labeled as complying with NFPA 70, “Tamper-Resistant Receptacle” and factory marked with a power symbol and the word “CONTROLLED”.

2.3 GFCI RECEPTACLES, 125 V, 20 A

A. Duplex GFCI Receptacles, 125 V, 20 A:

1. Description: Integral GFCI with "Test" and "Reset" buttons and LED indicator light. Two pole, three wire, and self-grounding.
2. Configuration: NEMA WD 6, Configuration 5-20R.
3. Type: Feed through.
4. Standards: Comply with UL 498, UL 943 Class A, and FS W-C-596.

B. Tamper- and Weather-Resistant, GFCI Duplex Receptacles, 125 V, 20 A E102:

1. Description: Integral GFCI with "Test" and "Reset" buttons and LED indicator light. Two pole, three wire, and self-grounding. Integral shutters that operate only when a plug is inserted in the receptacle. Square face.
2. Configuration: NEMA WD 6, Configuration 5-15R.
3. Type: Feed through.
4. Standards: Comply with UL 498 and UL 943 Class A.
5. Marking: Listed and labeled as complying with NFPA 70, "Tamper-Resistant Receptacles" and "Receptacles in Damp or Wet Locations" articles.

2.4 TOGGLE SWITCHES, 120/277 V, 15 A

A. Single-Pole Switches, 120/277 V, 15 A, E103:

1. Standards: Comply with UL 20 and FS W-S-896.

B. Three-Way Switches, 120/277 V, 15 A, E103

1. Comply with UL 20 and FS W-S-896.

C. Four-Way Switches, 120/277 V, 15 A E103:

1. Standards: Comply with UL 20 and FS W-S-896.

2.5 INDOOR VACANCY SENSORS

A. General Requirements for Sensors:

1. Ceiling-mounted, solid-state indoor vacancy sensors.
2. Passive infrared technology.
3. Integrated power pack.
4. Hardwired connection to switch.
5. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
6. Operation:

   a. Vacancy Sensor: Unless otherwise indicated, lights are manually turned on and sensor turns lights off when the room is unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
   b. Combination Sensor: Unless otherwise indicated, sensor shall be programmed to turn lights on when coverage area is occupied and turn them off when unoccupied, or to turn off lights that have been manually turned on; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.

7. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A.
8. Power: Line voltage.
9. Power Pack: Dry contacts rated for 20-A LED load at 120-V ac, and for 1 hp at 120-V ac. Sensor has 24-V dc, 150-mA, Class 2 power source, as defined by NFPA 70.
10. Mounting:

    a. Sensor: Suitable for mounting in any position on a standard outlet box.
    b. Relay: Externally mounted through a 1/2-inch knockout in a standard electrical enclosure.
    c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

11. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor.
12. Bypass Switch: Override the "on" function in case of sensor failure.

13. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; turn lights off when selected lighting level is present.

B. PIR Type: Wall or Ceiling mounted; detect occupants in coverage area by their heat and movement.

1. Detector Sensitivity: Detect occurrences of 6-inch-minimum movement of any portion of a human body that presents a target of not less than 36 sq. in..
2. Detection Coverage (Room, Ceiling Mounted): Detect occupancy anywhere in a circular area of 1000 sq. ft. when mounted on a 96-inch-high ceiling.
3. Detection Coverage (Corridor, Ceiling Mounted): Detect occupancy within 90 feet when mounted on a 10-foot-high ceiling.
4. Detection Coverage (Room, Wall Mounted): Detect occupancy anywhere within a 180-degree pattern centered on the sensor over an area of 1000 square feet when mounted 48 inches above finished floor.

2.6 DIMMERS

A. Wall-Box Dimmers:

1. Description: Modular, full-wave, solid-state dimmer switch with integral, quiet on-off switches, with audible frequency and EMI/RFI suppression filters.
2. Control: Continuously adjustable toggle switch; with single-pole or three-way switching.
3. Standards: Comply with UL 1472.

   a. 600 W; dimmers shall require no derating when ganged with other devices.

4. LED Lamp Dimmer Switches: Modular; compatible with LED lamps; trim potentiometer to adjust low-end dimming; capable of consistent dimming with low end not greater than 20 percent of full brightness.

2.7 WALL PLATES

A. Single Source: Obtain wall plates from same manufacturer of wiring devices.

B. Single and combination types shall all be metal, stainless.

C. Wet and Damp Location, Weatherproof Cover Plates: NEMA 250, complying with Type 3R, weather-resistant metal with lockable cover.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.

B. Coordination with Other Trades:

1. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
2. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
3. Install wiring devices after all wall preparation, including painting, is complete.

C. Device Installation:

1. Connect devices to branch circuits using pigtails that are not less than 6 inches in length.
2. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.

D. Receptacle Orientation:

1. Install ground pin of vertically mounted receptacles down, and on horizontally mounted receptacles to the left.

E. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.

F. Dimmers:

1. Install dimmers within terms of their listing.
2. Verify that dimmers used for fan-speed control are listed for that application.
3. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' device, listing conditions in the written instructions.

G. Connectors, Cords, and Plugs:

1. Comply with manufacturer’s instructions.
2. Coordinate installation with conditions and other trades.

H. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.

I. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

3.2 FIELD QUALITY CONTROL

A. Any and all tests the contractor cannot perform themselves shall be performed by a qualified testing agency. Contractor is responsible for hiring of testing agency, not the Government.

B. Perform the following tests and inspections:

1. Test Instruments: Use instruments that comply with UL 1436.
2. Test Instrument for Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.

C. Tests for Receptacles:

1. Line Voltage: Acceptable range is 105 to 132 V.
2. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is unacceptable.
3. Ground Impedance: Values of up to 2 ohms are acceptable.
4. GFCI Trip: Test for tripping values specified in UL 1436 and UL 943.
5. Using the test plug, verify that the device and its outlet box are securely mounted.

D. Test straight-blade for the retention force of the grounding blade according to NFPA 99. Retention force shall be not less than 4 oz.

E. Cord reels, fittings, connectors, cords, and plugs tests and inspections must be performed according to manufacturer's instructions. Assemble and submit test and inspection reports.

F. Wiring device will be considered defective if it does not pass tests and inspections.

G. Prepare test and inspection reports.

END OF SECTION 262726

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Molded-case circuit breakers (MCCBs).

B. Related Requirements:

1.2 DEFINITIONS

A. GFEP: Ground-fault circuit-interrupter for equipment protection.

B. GFLS: Ground-fault circuit-interrupter for life safety.

C. SPDT: Single pole, double throw.

1.3 ACTION SUBMITTALS

A. Product Data:

   1. For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include nameplate ratings, dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.
   2. Enclosure types and details for types other than UL 50E, Type 1.
   3. Current and voltage ratings.
   4. Short-circuit current ratings (interrupting and withstand, as appropriate).
   5. Include evidence of qualified electrical testing laboratory listing for series rating of installed devices.
   6. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.

B. Shop Drawings: For enclosed switches and circuit breakers.

   1. Include plans, elevations, sections, details, and attachments to other work.
   2. Include wiring diagrams for power, signal, and control wiring.

C. Field Quality-Control Submittals:

   1. Field quality-control reports.

1.4 INFORMATIONAL SUBMITTALS

A. Sample warranties.

1.5 CLOSEOUT SUBMITTALS

A. Warranty documentation.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Spare Parts: Furnish to Owner spare parts, for repairing enclosed switches and circuit breakers, that are packaged with protective covering for storage on-site and identified with labels describing contents.

1.7 WARRANTY

A. Special Installer Extended Warranty: Installer warrants that fabricated and installed enclosed switches and circuit breakers perform in accordance with specified requirements and agrees to repair or replace components or products that fail to perform as specified within extended-warranty period.

1. Extended-Warranty Period: Two years from date of Substantial Completion; full coverage for labor, materials, and equipment.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Source Limitations: Obtain products from single manufacturer.

B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.

C. Electrical Components, Devices, and Accessories: Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 MOLDED-CASE CIRCUIT BREAKERS

A. Circuit breakers must be constructed using glass-reinforced insulating material. Current carrying components must be completely isolated from handle and accessory mounting area.

B. Circuit breakers must have toggle operating mechanism with common tripping of all poles, which provides quick-make, quick-break contact action. Circuit-breaker handle must be over center, be trip free, and reside in tripped position between on and off to provide local trip indication. Circuit-breaker escutcheon must be clearly marked on and off in addition to providing international I/O markings. Equip circuit breaker with push-to-trip button, located on face of circuit breaker to mechanically operate circuit-breaker tripping mechanism for maintenance and testing purposes.

C. MCCBs must be equipped with device for locking in isolated position.

D. Lugs must be suitable for 75 deg C rated wire.

E. Standard: Comply with UL 489 with required interrupting capacity for available fault currents.

F. Thermal-Magnetic Circuit Breakers: Inverse time-current thermal element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.

G. Adjustable, Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.

H. Electronic Trip Circuit Breakers: Field-replaceable rating plug, RMS sensing, with the following field-adjustable settings:

1. Instantaneous trip.
2. Long- and short-time pickup levels.
3. Long- and short-time time adjustments.
4. Ground-fault pickup level, time delay, and I-squared t response.

I. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller, and let-through ratings less than NEMA FU 1, RK-5.

J. GFLS Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6 mA trip).

K. GFEP Circuit Breakers: With Class B ground-fault protection (30 mA trip).

L. Features and Accessories:

1. Standard frame sizes, trip ratings, and number of poles.
2. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge lighting circuits.
3. Lugs: Mechanical or Compression type, suitable for number, size, trip ratings, and conductor material.
4. Ground-Fault Protection: Comply with UL 1053; integrally mounted, self-powered type with mechanical ground-fault indicator; relay with adjustable pickup and time-delay settings, push-to-test feature, internal memory, and shunt trip unit; and three-phase, zero-sequence current transformer/sensor.
5. Communication Capability: Circuit-breaker-mounted, Universal-mounted, Integral, or Din-rail-mounted communication module with functions and features compatible with power monitoring and control system.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Commencement of work will indicate Installer's acceptance of areas and conditions as satisfactory.

3.2 INSTALLATION

A. Comply with manufacturer's published instructions.

B. Special Techniques:

1. Coordinate layout and installation of switches, circuit breakers, and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.
2. Temporary Lifting Provisions: Remove temporary lifting of eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.

3.3 IDENTIFICATION

A. Comply with requirements in Section 260553 "Identification for Electrical Systems."

1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
2. Label each enclosure with engraved metal or laminated-plastic nameplate.

3.4 FIELD QUALITY CONTROL

A. Field tests and inspections must be witnessed by authorities having jurisdiction.

B. Tests and Inspections for Molded-Case Circuit Breakers:

1. Visual and Mechanical Inspection:

a. Verify that equipment nameplate data are as described in the Specifications and shown on Drawings.
b. Inspect physical and mechanical condition.
c. Inspect anchorage, alignment, grounding, and clearances.
d. Verify that unit is clean.
e. Operate circuit breaker to ensure smooth operation.
f. Inspect bolted electrical connections for high resistance using one of the following methods:

1) Use low-resistance ohmmeter.

a) Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from those of similar bolted connections by more than 50 percent of lowest value.

2) Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data or NETA ATS Table 100.12.

a) Bolt-torque levels must be in accordance with manufacturer's published data. In absence of manufacturer's published data, use NETA ATS Table 100.12.

g. Inspect operating mechanism, contacts, and chutes in unsealed units.

2. Electrical Tests:

a. Perform resistance measurements through bolted connections with low-resistance ohmmeter. Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from adjacent poles or similar switches by more than 50 percent of lowest value.
b. Perform insulation-resistance tests for one minute on each pole, phase-to-phase and phase-to-ground with circuit breaker closed, and across each open pole. Apply voltage in accordance with manufacturer's published data. In absence of manufacturer's published data, use Table 100.1 from NETA ATS. Investigate values of insulation resistance less than those published in Table 100.1 or as recommended in manufacturer's published data.
c. Perform contact/pole resistance test. Drop values may not exceed high level of manufacturer's published data. If manufacturer's published data are not available, investigate values that deviate from adjacent poles or similar switches by more than 50 percent of lowest value.
d. Perform insulation resistance tests on control wiring with respect to ground. Applied potential must be 500 V(dc) for 300 V rated cable and 1000 V(dc) for 600 V rated cable. Test duration must be one minute. For units with solid state components, follow manufacturer's recommendation. Insulation resistance values may be no less than 2 M Ω.
e. Determine the following by primary current injection:

1) Long-time pickup and delay. Pickup values must be as specified. Trip characteristics may not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.
2) Short-time pickup and delay. Short-time pickup values must be as specified. Trip characteristics may not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.
3) Ground-fault pickup and time delay. Ground-fault pickup values must be as specified. Trip characteristics may not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.
4) Instantaneous pickup. Instantaneous pickup values must be as specified and within manufacturer's published tolerances.

f. Test functionality of trip unit by means of primary current injection. Pickup values and trip characteristics must be as specified and within manufacturer's published tolerances.
g. Perform minimum pickup voltage tests on shunt trip and close coils in accordance with manufacturer's published data. Minimum pickup voltage of shunt trip and close coils must be as indicated by manufacturer.
h. Verify correct operation of auxiliary features such as trip and pickup indicators; zone interlocking; electrical close and trip operation; trip-free, anti-pump function; and trip unit battery condition. Reset trip logs and indicators. Investigate units that do not function as designed.
i. Verify operation of charging mechanism. Investigate units that do not function as designed.

3. Test and adjust controls, remote monitoring, and safeties.

C. Nonconforming Work:

1. Enclosed switches and circuit breakers will be considered defective if they do not pass tests and inspections.
2. Remove and replace defective units and retest.

D. Collect, assemble, and submit test and inspection reports.

1. Test procedures used.
2. Include identification of each enclosed switch and circuit breaker tested and describe test results.
3. List deficiencies detected, remedial action taken, and observations after remedial action.

E. Manufacturer Services:

1. Engage factory-authorized service representative to supervise field tests and inspections.

3.5 ADJUSTING

A. Adjust moving parts and operable components to function smoothly, and lubricate as recommended by manufacturer.

3.6 PROTECTION

A. After installation, protect enclosed switches and circuit breakers from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

3.7 MAINTENANCE

A. Infrared Scanning of Enclosed Switches and Breakers: Two months after Substantial Completion, perform infrared scan of joints and connections. Remove covers so joints and connections are accessible to portable scanner. Take visible light photographs at same locations

and orientations as infrared scans for documentation to ensure follow-on scans match same conditions for valid comparison.

1. Instruments and Equipment: Use infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
2. Follow-up Infrared Scanning: Perform two follow-up infrared scans of enclosed switches and breakers, one at four months and another at 11 months after Substantial Completion.
3. Instrument: Use infrared-scanning device designed to measure temperature or to detect significant deviations from normal values. Provide documentation of device calibration.
4. Report: Prepare certified report that identifies units checked and that describes scanning results. Include notation of deficiencies detected, remedial actions taken, and scanning observations after remedial action.

END OF SECTION 262816

SECTION 265119 - LED INTERIOR LIGHTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes the following types of LED luminaires:

1. Cylinder.
2. Downlight.
3. Highbay, linear.
4. Highbay, nonlinear.
5. Linear industrial.
6. Lowbay.
7. Parking garage.
8. Recessed, linear.
9. Strip light.
10. Surface mount, linear.
11. Surface mount, nonlinear.
12. Suspended, linear.
13. Suspended, nonlinear.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
2. Testing Agency Certified Data: For indicated luminaires, photometric data certified by a qualified independent testing agency. Photometric data for remaining luminaires shall be certified by manufacturer.

B. Shop Drawings: For nonstandard or custom luminaires.

1. Include plans, elevations, sections, and mounting and attachment details.
2. Include details of luminaire assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

C. Sustainable Design Submittals:

1. Comply with all relevant statutory and regulatory requirements that establish Federal building energy efficiency standards and require the purchase, installation, and use of energy efficient products and/or equipment.

D. Samples: For each luminaire and for each color and texture with standard factory-applied finish.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plan(s) and other details, drawn to scale and coordinated with each other, using input from installers of the items involved.

B. Seismic Qualification Data: For luminaires, accessories, and components, from manufacturer.

C. Product Certificates: For each type of luminaire.

D. Product test reports.

E. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1.5 QUALITY ASSURANCE

A. Luminaire Photometric Data Testing Laboratory Qualifications: Luminaire manufacturer's laboratory that is accredited under the NVLAP for Energy Efficient Lighting Products.

B. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by an independent agency, with the experience and capability to conduct the testing indicated, that is an NRTL as defined by OSHA in 29 CFR 1910.7, accredited under the NVLAP for Energy Efficient Lighting Products, and complying with the applicable IES testing standards.

C. Provide luminaires from a single manufacturer for each luminaire type.

D. Each luminaire type shall be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.

1.6 WARRANTY

A. Warranty: Manufacturer and Installer agree to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.

B. Warranty Period: Five year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Luminaires shall withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

B. Seismic Performance: Luminaires and lamps shall be labeled vibration and shock resistant.

1. The term "withstand" means "the luminaire will remain in place without separation of any parts when subjected to the seismic forces specified and the luminaire will be fully operational during and after the seismic event."

C. Ambient Temperature: 5 to 104 deg F.

1. Relative Humidity: Zero to 95 percent.

D. Altitude: Sea level to 5000 feet.

2.2 LUMINAIRE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Factory-Applied Labels: Comply with UL 1598. Include recommended lamps. Locate labels where they will be readily visible to service personnel, but not seen from normal viewing angles when lamps are in place.

1. Label shall include the following lamp characteristics:

a. "USE ONLY" and include specific lamp type.
b. Lamp diameter, shape, size, wattage, and coating.
c. CCT and CRI.

C. Recessed luminaires shall comply with NEMA LE 4.

D. NRTL Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by an NRTL.

E. FM Global Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by FM Global.

F. California Title 24 compliant.

2.3 CYLINDER.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 250 lm.
2. Minimum allowable efficacy of 80 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.

b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. With integral mounting provisions.

G. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.4 DOWNLIGHT.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 250 lm.
2. Minimum allowable efficacy of 80 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.
b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. Universal mounting bracket.
4. Integral junction box with conduit fittings.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Fixed lens.
2. Medium light distribution.
3. Clear glass.
4. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
5. Glass: Annealed crystal glass unless otherwise indicated.
6. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.
4. Recessed luminaires shall comply with NEMA LE 4.

2.5 LINEAR INDUSTRIAL.

A. Lamp:

1. Minimum 5,000 lm.
2. Minimum allowable efficacy of 80 lm/W.
3. CRI of minimum. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.
b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

B. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.

C. Housing and Heat Sink Rating:

1. NEMA 250, Type 4X.
2. IP 66.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. With integral mounting provisions.

G. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.

2.6 LOWBAY.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 5,000 lm.
2. Minimum allowable efficacy of 80 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.
b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.7 RECESSED, LINEAR.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 3,000 lm.
2. Minimum allowable efficacy of 85 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

   a. Bulb shape complying with ANSI C78.79.
   b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. With integral mounting provisions.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.

4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.
4. NEMA LE 4.

2.8 STRIP LIGHT.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 750 lm.
2. Minimum allowable efficacy of 75 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.
b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. With integral mounting provisions.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping of luminaire without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.

3. UL Listing: Listed for damp location.

2.9 SURFACE MOUNT, LINEAR.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 750 lm.
2. Minimum allowable efficacy of 75 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

a. Bulb shape complying with ANSI C78.79.
b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. With integral mounting provisions.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.10 SURFACE MOUNT, NONLINEAR

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 750 lm.
2. Minimum allowable efficacy of 75 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

    a. Bulb shape complying with ANSI C78.79.
    b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. With integral mounting provisions.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.11 SUSPENDED, LINEAR.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 5800 lm.
2. Minimum allowable efficacy of 85 lm/W.
3. CRI of minimum 65. CCT of 2700 K.
4. Rated lamp life of 35,000 hours to L70.

5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

    a. Bulb shape complying with ANSI C78.79.
    b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized powder-coat painted finish.
3. With integral mounting provisions.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.12 SUSPENDED, NONLINEAR.

A. Nominal Operating Voltage: 120 V ac.

B. Lamp:

1. Minimum 3,000 lm.
2. Minimum allowable efficacy of 85 lm/W.
3. CRI of minimum 65. CCT of 2700 K Insert value.
4. Rated lamp life of 35,000 hours to L70.
5. Dimmable from 100 percent to zero percent of maximum light output.
6. Internal driver.
7. User-Replaceable Lamps:

    a. Bulb shape complying with ANSI C78.79.
    b. Lamp base complying with ANSI C81.61 or IEC 60061-1.

8. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

C. Housings:

1. Extruded-aluminum housing and heat sink.
2. Clear or anodized power-coat painted finish.
3. Universal mounting bracket.
4. Integral junction box with conduit fittings.

D. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Components are designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

E. Diffusers and Globes:

1. Clear glass.
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Glass: Annealed crystal glass unless otherwise indicated.
4. Lens Thickness: At least 0.125-inch minimum unless otherwise indicated.

F. Standards:

1. ENERGY STAR certified.
2. RoHS compliant.
3. UL Listing: Listed for damp location.

2.13 MATERIALS

A. Metal Parts:

1. Free of burrs and sharp corners and edges.
2. Sheet metal components shall be steel unless otherwise indicated.
3. Form and support to prevent warping and sagging.

B. Steel:

1. ASTM A36/A36M for carbon structural steel.
2. ASTM A568/A568M for sheet steel.

C. Stainless Steel:

1. 1. Manufacturer's standard grade.
2. 2. Manufacturer's standard type, ASTM A240/240M.

D. Galvanized Steel: ASTM A653/A653M.

E. Aluminum: ASTM B209.

2.14 METAL FINISHES

A. Variations in finishes are unacceptable in the same piece. Variations in finishes of adjoining components are acceptable if they are within the range of approved Samples and if they can be and are assembled or installed to minimize contrast.

2.15 LUMINAIRE SUPPORT

A. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for channel and angle iron supports and nonmetallic channel and angle supports.

B. Single-Stem Hangers: 1/2-inch steel tubing with swivel ball fittings and ceiling canopy. Finish same as luminaire.

C. Wires: ASTM A641/A641M, Class 3, soft temper, zinc-coated steel, 12 gage.

D. Rod Hangers: 3/16-inch minimum diameter, cadmium-plated, threaded steel rod.

E. Hook Hangers: Integrated assembly matched to luminaire, line voltage, and equipment with threaded attachment, cord, and locking-type plug.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1.

B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.

C. Install lamps in each luminaire.

D. Supports:

1. Sized and rated for luminaire weight.
2. Able to maintain luminaire position after cleaning and relamping.
3. Provide support for luminaire without causing deflection of ceiling or wall.
4. Luminaire-mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire weight and a vertical force of 400 percent of luminaire weight.

E. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for wiring connections.

3.2 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.3 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
2. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery power and retransfer to normal.

B. Luminaire will be considered defective if it does not pass operation tests and inspections.

C. Prepare test and inspection reports.

END OF SECTION 265119

SECTION 265213 - EMERGENCY AND EXIT LIGHTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Emergency lighting units.
2. Exit signs.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of emergency lighting unit, exit sign, and emergency lighting support, arranged by designation.

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of luminaire.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1.5 WARRANTY

A. Warranty: Manufacturer and Installer agree to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Two year(s) from date of Substantial Completion.

B. Special Warranty for Emergency Lighting Batteries: Manufacturer's standard form in which manufacturer of battery-powered emergency lighting unit agrees to repair or replace components of rechargeable batteries that fail in materials or workmanship within specified warranty period.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

2.2 GENERAL REQUIREMENTS FOR EMERGENCY LIGHTING

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. NRTL Compliance: Fabricate and label emergency lighting units, exit signs, and batteries to comply with UL 924.

C. Comply with NFPA 70 and NFPA 101.

D. Comply with NEMA LE 4 for recessed luminaires.

E. Comply with UL 1598 for recessed luminaires.

F. External Type: Self-contained, modular, battery-inverter unit, suitable for powering one or more lamps, remote mounted from luminaire.

1. Emergency Connection: Operate one LED lamp continuously. Connect unswitched circuit to battery-inverter unit and switched circuit to luminaire.
2. Operation: Relay automatically turns lamp on when power-supply circuit voltage drops to 80 percent of nominal voltage or below. Lamp automatically disconnects from battery when voltage approaches deep-discharge level. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
3. Nightlight Connection: Operate lamp in a remote fixture continuously.
4. Battery: Sealed, maintenance-free, nickel-cadmium type.
5. Charger: Fully automatic, solid-state, constant-current type.
6. Housing: NEMA 250, Type 1 enclosure listed for installation inside, on top of, or remote from luminaire. Remote assembly shall be located no less than half the distance recommended by the emergency power unit manufacturer, whichever is less.
7. Test Push Button: Push-to-test type, in unit housing, simulates loss of normal power and demonstrates unit operability.
8. LED Indicator Light: Indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
9. Integral Self-Test: Factory-installed electronic device automatically initiates code-required test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing red LED.

2.3 EMERGENCY LIGHTING

A. General Requirements for Emergency Lighting Units: Self-contained units.

B. Emergency Lighting Unit:

1. Emergency Lighting Unit: E1 as indicated on E601.

2. Operating at nominal voltage of 120 V ac.
3. Wall with universal junction box adaptor.
4. UV stable thermoplastic housing, rated for damp locations.
5. Two LED lamp heads.
6. External emergency power unit.

2.4 EXIT SIGNS

A. Internally Lighted Signs:

1. Operating at nominal voltage of 120 V ac.
2. Lamps for AC Operation: LEDs; 50,000 hours minimum rated lamp life.
3. Self-Powered Exit Signs (Battery Type): Internal emergency power unit.

2.5 MATERIALS

A. Metal Parts:

1. Free of burrs and sharp corners and edges.
2. Sheet metal components shall be steel unless otherwise indicated.
3. Form and support to prevent warping and sagging.

B. Doors, Frames, and Other Internal Access:

1. Smooth operating, free of light leakage under operating conditions.
2. Designed to permit relamping without use of tools.
3. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

C. Diffusers and Globes:

1. Clear, UV-stabilized acrylic.
2. Acrylic: 100 percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Lens Thickness: At least 0.125 inch minimum unless otherwise indicated.

D. Housings:

1. Extruded aluminum housing.
2. Clear powder coat finish.

E. Conduit: Flexible metallic conduit, minimum 3/4 inch in diameter.

2.6 METAL FINISHES

A. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1.

B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.

C. Supports:

1. Sized and rated for luminaire weight.
2. Able to maintain luminaire position when testing emergency power unit.
3. Provide support for luminaire and emergency power unit without causing deflection of ceiling or wall.
4. Luminaire-mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire and emergency power unit weight and vertical force of 400 percent of fixture weight.

D. Wall-Mounted Luminaire Support:

1. Attached to structural members in walls.
2. Do not attach fixtures directly to gypsum board.

E. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.2 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery power and retransfer to normal.

B. Luminaire will be considered defective if it does not pass operation tests and inspections.

C. Prepare test and inspection reports.

END OF SECTION 265213

SECTION 270528 - PATHWAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Type OFR and Type CR communications raceways and fittings.
2. Cable supports and positioning devices.

B. Related Requirements:
1. Section 260526 "Grounding and Bonding for Electrical Systems" specifies grounding and bonding conductors and connectors for communications pathways installed by this Section.
2. Section 260529 "Hangers and Supports for Electrical Systems" specifies hangers and supports for communications pathways installed by this Section.
3. Section 260533"Raceways and Boxes for Electrical Systems" specifies the following installed by this Section:

a. Metal conduit and fittings.
b. Nonmetallic conduit and fittings.
c. Metal wireways and auxiliary gutters.
d. Boxes, enclosures, and cabinets.

4. Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling" specifies sleeves and sleeve seals for communications pathways installed by this Section.
5. Section 260553 "Identification for Electrical Systems" specifies labels and warning signs for communications pathways installed by this Section.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

a. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.

1) If listed manufacturer differs from selling manufacture, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
2) Listing criteria identified in approval letter must match specified listing criteria. Approval of only equipment's enclosure is not considered approval of equipment for intended application.

3) Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for similar products are not acceptable.

B. Samples:

1. Type OFR and Type CR Raceways: For each color and texture specified, 12 inch (300 mm) long.

1.3 INFORMATIONAL SUBMITTALS

A. Manufacturers' published instructions submittals.

PART 2 - PRODUCTS

2.1 TYPE OFR AND TYPE CR COMMUNICATIONS RACEWAYS AND FITTINGS

A. Description: This product group covers raceways and fittings for installation of conductive and nonconductive optical-fiber cable, communications cable, power-limited fire-alarm cable, signaling cable, and coaxial cable in accordance with NFPA 70.

B. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
2. Listing Criteria:

a. Optical-Fiber Cable Raceway: UL CCN QAZM; including UL 2024.
b. Communications Cable Raceway: UL CCN QBAA; including UL 2024.

C. UL QAZM - Type OFR-GP General-Purpose Optical-Fiber Raceway

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

a. Texture: Smooth or Ribbed.
b. Splicing: Fusion.

D. UL QAZM - Type OFR-P Plenum Optical-Fiber Raceway:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

a. Meets UL 2024 test requirements for "PLENUM" marking.
b. Texture: Smooth or Ribbed.
c. Splicing: Fusion.

E. UL QAZM - Type OFR-R Riser Optical-Fiber Raceway:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

    a. Meets UL 2024 test requirements for "RISER" marking.
    b. Texture: Smooth or Ribbed.
    c. Splicing: Fusion.

F. UL QBAA - Type CR-GP General-Purpose Communications Cable Raceway:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

    a. Texture: Smooth or Ribbed.
    b. Splicing: Fusion.

G. UL QBAA - Type CR-P Plenum Communications Cable Raceway:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

    a. Meets UL 2024 test requirements for "PLENUM" marking.
    b. Texture: Smooth or Ribbed.
    c. Splicing: Fusion.

H. UL QBAA - Type CR-R Riser Communications Cable Raceway:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Characteristics:

    a. Meets UL 2024 test requirements for "RISER" marking.
    b. Texture: Smooth or Ribbed.
    c. Splicing: Fusion.

2.2 CABLE SUPPORTS AND POSITIONING DEVICES

A. Description: This category covers straps, hooks, and similar types of hardware for installation and use in communications cabling systems in accordance with NFPA 70 and manufacturer's installation instructions

B. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

C. UL DWMU - J-Hook or G-Hook Cable Support:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Listing Criteria: UL CCN DWMU; including UL 2239 or UL 1565.
3. Product Characteristics:

a. Material: Galvanized or Stainless steel.

D. UL DWMU - Conduit or Cable Support Strap:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Listing Criteria: UL CCN DWMU; including UL 2239 or UL 1565.

3. Required Product Options:

E. UL ZODZ - Cable Tie or Management System:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Listing Criteria: UL CCN ZODZ; including UL 62275.

F. UL ZODZ - Cable Clamp, Clip, or Mount Positioning Device:

1. Source Limitations: Obtain products from single manufacturer.
2. Product Listing Criteria: UL CCN ZODZ; including UL 1565.

PART 3 - EXECUTION

3.1 SELECTION OF PATHWAYS FOR COMMUNICATIONS SYSTEMS

A. Unless more stringent requirements are specified in Contract Documents or manufacturers' published instructions, comply with NFPA 70 for selection of duct raceways. Consult Government for resolution of conflicting requirements.

B. Type OFR and Type CR Communications Raceways: Comply with Table 800.154(b) of NFPA 70.

C. Minimum Pathway Size:

1. For Copper and Aluminum Cables: Metric designator 21 (trade size 3/4).
2. For Optical-Fiber Cables: Metric designator 25 (trade size 1).

D. Maximum Pathway Length Between Cable Access Points: 75 ft (23 m).

E. Temperature Limitations:

1. Type PVC, Type HDPE, Type EPEC, Type OFR, and Type CR: Do not install where ambient temperature exceeds 122 deg F (50 deg C). Conductor ratings must be limited to 75 deg C except where installed in a trench outside buildings with concrete encasement, where 90 deg C conductors are permitted.
2. Type RTRC: Do not install where ambient temperature exceeds 230 deg F (110 deg C).

F. Indoor Pathways:

1. Exposed and Subject to Severe Physical Damage: ERMC, or IMC. Locations include the following:

a. Loading docks.
b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
c. Mechanical rooms.
d. Gymnasiums.

2. Exposed and Subject to Physical Damage: ERMC, IMC, or EMT. Locations include the following:

a. Locations less than 2.5 m (8 ft) above finished floor.
b. Stub-ups to above suspended ceilings.

3. Exposed and Not Subject to Physical Damage: ERMC, IMC, EMT, PVC-80, RTRC-AG, LFMC, LFNC, or Cable tray.
4. Concealed above Suspended Ceilings: ERMC, IMC, EMT, PVC-80, PVC-40, RTRC-AG, LFMC, OFR, CR, Cable tray, or Hooks.
5. Concealed in Ceilings and Interior Walls and Partitions: ERMC, IMC, EMT, PVC-80, PVC-40, RTRC-AG, LFMC, LFNC, OFR, or CR.
6. Damp or Wet Locations: ERMC, IMC, RTRC-AG, Corrosion-resistant EMT, LFMC, or LFNC.
7. Innerducts inside Metal Raceway: ENT, RTRC-AG, OFR, or CR.
8. Exposed to Environmental Air: ERMC, IMC, EMT, PVC-80, PVC-40, RTRC-AG, OFR-P, or CR-P.
9. In Vertical Runs: ERMC, IMC, EMT, RTRC-AG, OFR-P, OFR-R, CR-P, or CR-R.
10. Supported by Solid Cable Tray: ENT, RTRC-AG, OFR, or CR.
11. Supported by Open Cable Tray: OFR-P, CR-P.

G. Duct Fittings: Select fittings in accordance with NEMA FB 2.10 guidelines.

1. ERMC and IMC: Provide threaded-type fittings unless otherwise indicated.

H. Cable Supports and Positioning Devices:

1. Size hooks to allow minimum of 25 percent future capacity without exceeding design capacity limits.
2. Support hooks directly from building structure. Do not use ceiling grid support rods or wires.
3. Hook spacing must allow no more than 6 inch (150 mm) of slack. Lowest point of cables must be no closer than 6 inch (150 mm) to ceiling tiles, mechanical ductwork and fittings, luminaires, power conduits, power and telecommunications outlets, and other electrical and communications equipment.
4. Space hooks no more than 5 ft (1.5 m) on center.
5. Provide hook at each change in direction.

I. Boxes and Enclosures:

1. Indoors: UL 50E Type 1, except use Type 4 stainless steel units in institutional and commercial kitchens and damp or wet locations.

3.2 SELECTION OF GROUNDING AND BONDING PRODUCTS

A. Grounding and Bonding Conductors:

1. Communications Busbar Connections:

a. TBC: Not smaller than 1/0 AWG and no smaller than largest TBB.
b. TBB: Not smaller than 2 kcmil per linear ft of conductor length, but not larger than 750 kcmil, unless otherwise indicated on Drawings.
c. BBC: Not smaller than largest TBB to which it is connected unless otherwise indicated on Drawings.
d. TEBC: Not smaller than 2 AWG unless otherwise indicated on Drawings. Provide bolted connectors.
e. UBC: Not smaller than 6 AWG unless otherwise indicated on Drawings. Provide bolted connectors.
f. Bonding Conductors to Structural Steel: Not smaller than 6 AWG unless otherwise indicated on Drawings. Provide bolted clamp connectors.

2. Cable Tray Connections:

a. Cable Tray Equipment Grounding Conductor: 4 AWG.
b. Cable Tray Bonding Jumper: If not supplied by cable manufacturer, provide bonding jumper not smaller than 10 AWG and not longer than 12 inch (300 mm). If jumper is wire, it must be terminated with lug having one hole and standard barrel for one crimp. If jumper is flexible braid, it must be terminated with one- or two-hole ferrule. Attach with bonding screw or connector provided by cable tray manufacturer.

3.3 SELECTION OF COLORS AND IDENTIFICATION MARKINGS

A. Comply with 29 CFR 1910.144 for color identification of hazards, and the following:

1. Fire-protection and fire-alarm equipment, including raceways, must be finished, painted, or suitably marked safety red.
2. Ceiling-mounted hangers, supports, cable trays, and raceways must be finished, painted, or suitably marked safety yellow where less than 7.7 ft (2.3 m) above finished floor.

B. Pipe and Conduit Labeling: Comply with ASME A13.1 and IEEE C2.

C. Color Coding Scheme for Communications Cable and Terminations: Comply with BICSI N1 and TIA-598.

D. Accessible Fittings for Raceways: Identify cover of junction and pull box of the following systems with wiring system legend and system voltage. System legends must be as follows:

1. "COMMUNICATIONS."
2. "FIRE ALARM."
3. "SECURITY."

E. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations of high visibility. Identify by system and circuit designation.

F. Communications Vaults, Manholes, Handholes, and Pull and Junction Boxes: For conductors in vaults, pull and junction boxes, manholes, and handholes, use vinyl wraparound labels, self-adhesive wraparound labels, snap-around labels, snap-around color-coding bands, or self-adhesive vinyl tape to identify phase.

1. Locate identification at changes in direction, at penetrations of walls and floors, at 50 ft (15 m) maximum intervals in straight runs, and at 25 ft (7.6 m) maximum intervals in congested areas.

G. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use self-adhesive labels with conductor or cable designation, origin, and destination.

H. Control-Circuit Conductor Termination Identification: For identification at terminations, provide heat-shrink preprinted tubes or self-adhesive labels with conductor designation.

I. Auxiliary Electrical Systems Conductor Identification: Self-adhesive vinyl tape that is uniform and consistent with system used by manufacturer for factory-installed connections.

J. Equipment and Cabling Identification for Administrative Records and Labeling: Comply with TIA-606 requirements for appropriate network administration.

K. Equipment Identification Labels:

1. Black letters on white field.
2. Indoor Equipment: Self-adhesive label
3. Equipment To Be Labeled:

a. Racks, Frames, and Enclosures: Identify front and rear of each enclosure with self-adhesive labels containing equipment designation.
b. Patch Panels: Label individual rows with self-adhesive labels.
c. Communications cabinets.
d. Access doors and panels for concealed communications items.
e. Emergency system boxes and enclosures.
f. Contactors.
g. Remote-controlled switches, dimmer modules, and control devices.
h. Monitoring and control equipment.
i. Fire-alarm equipment.
j. Security equipment.
k. Life-safety communications equipment.

L. Backbone Cables: Label each cable with a vinyl-wraparound label, snap-around label, or self-adhesive wraparound label indicating the location of the far or other end of the backbone cable. Patch panel or punch down block where cable is terminated should be labeled identically.

M. Horizontal Cables: Label each cable with a vinyl-wraparound label, snap-around label, or self-adhesive wraparound label.

N. Cover Plates: Label individual cover plates with self-adhesive labels. Place label at top of cover plate. Identify cover plate in accordance with TIA-606.

O. Cable Ties: General purpose, for attaching tags, except as listed below:

1. In Spaces Handling Environmental Air: Plenum rated.

3.4 SELECTION OF SIGNS AND HAZARD MARKINGS

A. Comply with 29 CFR 1910.145 for danger, caution, warning, and safety instruction signs.

B. Signs, labels, and tags required for personnel safety must comply with the following standards:

1. Safety Colors: NEMA Z535.1.
2. Facility Safety Signs: NEMA Z535.2.
3. Safety Symbols: NEMA Z535.3.
4. Product Safety Signs and Labels: NEMA Z535.4.
5. Safety Tags and Barricade Tapes for Temporary Hazards: NEMA Z535.5.

C. Electrical Hazard Warnings:

1. Multiple Power Sources Warning Legend: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT/RACK HAS MULTIPLE POWER SOURCES."

D. Operating Instruction Signs: Self-adhesive labels.

E. Emergency Operating Instruction Signs: Self-adhesive labels with white legend on red background with minimum 3/8 inch (10 mm) high letters for emergency instructions at equipment.

3.5 INSTALLATION OF PATHWAYS FOR COMMUNICATIONS SYSTEMS

A. Comply with manufacturers' published instructions, including limitations on distance, bends, and bend radius.

B. Reference Standards for Installation: Unless more stringent installation requirements are specified in Contract Documents or manufacturers' published instructions, comply with the following:

1. Type OFR Optical-Fiber Raceways: Article 800 of NFPA 70 and BICSI N1.
2. Type CR Communications Raceways: Article 800 of NFPA 70 and BICSI N1.
3. Cable Supports and Positioning Devices: Article 800 of NFPA 70 and BICSI N1.
4. Consult Government for resolution of conflicting requirements.

C. Special Installation Techniques:

1. Complete communications raceway installation before starting conductor installation.
2. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies.
3. Provide hangers and supports for pathways, boxes, and enclosures.

4. Firestop pathway penetrations of fire-rated assemblies.
5. Identification:

    a. Provide colors and labels for pathways, boxes, enclosures, and associated communications equipment.

    b. Provide safety warning signs.

D. Interfaces with Other Work:

1. Coordinate installation of new communications pathways with existing conditions.

2. Grounding and Bonding: Bond metallic communications boxes and enclosures to metallic pathways. Coordinate with Section 260526 "Grounding and Bonding for Electrical Systems" for grounding and bonding of communications pathways to communications equipment room fittings.

3.6 PROTECTION

A. Protect coatings and finishes of pathways, boxes, and enclosures from damage and deterioration.

1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 270528

SECTION 271000 - STRUCTURED CABLING

PART 1 - GENERAL

1.1 SECTION REQUIREMENTS

A. Submittals: Product Data, Shop Drawings, system schematic, floor plans with cabling point labeling, and cabling color scheme.

B. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings by an RCDD.
2. Installation Supervision: Installation shall be under the direct supervision of Level 2 Installer, who, shall be present at all times, when Work of this Section is performed at Project site.

C. Comply with NFPA 70, "National Electrical Code."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Coordinate features of materials and equipment so they form an integrated system complying with TIA/EIA-570-A, for crew quarters, and TIA/EIA-568-C.1 for Fire Station and other outdoor structures.

B. Telecommunications Pathways and Spaces: Comply with TIA-569-D.

C. Grounding: Comply with TIA-607-B.

2.2 EQUIPMENT ROOM FITTINGS

A. Equipment Frames: Freestanding, modular-steel units designed for telecommunications terminal support and coordinated with dimensions of units to be supported.

B. Power Strips: Rack-mounted, six 15-A, 120-V ac, NEMA WD 6, Configuration 5-15R receptacles. If power strips come with circuit-breaker fault protection, the toggle switch must be covered as to not allow ‘accidental’ pressing. In general power strips do not require breakers or switches. Power strips used must be mounted horizontally.

C. Distribution Devices. Equipment to support network, including signal amplification, cross connects, network hubs, and service terminations. Comply with TIA/EIA-570-C, Grade 2 service standard.

1. Auxiliary disconnect outlet and distribution device cords for telephone and television service.

2. Cross-connect devices, patch panels, cable termination devices, and accessories shall meet the data transmission speed and bandwidth of the associated cabling.
3. Television: With space for satellite network, CATV, and off-the-air lines.

    a. Place outlet cabling in a star topology.
    b. Provide space for installation of signal amplification and conditioning.
    c. Distribute in-home generated video sources to same outlet as cable television service.
    d. Accommodate the installation and connection of a cable gateway distribution device furnished by access provider.

4. Voice and Data: Ethernet-type data network in a star topology, supporting data transmission rates of at least Cat 6a. Data network hub shall have capacity for outlets indicated on Drawings, plus two spares.

    a. Cross Connect: Modular IDC-type.
    b. Hub: Matched to network speed with modular RJ-45 jacks and 12-V dc power supply.
    c. Fiber-Optic Data Cable Connector Field: Modular, cross-connect panels with duplex cable connectors. Factory-made patch cords, dual-fiber cable. Comply with TIA/EIA-570-C, Grade 2 service standard.

5. Speaker Connections: Cross-connect panel with number of speaker cables connected to distribution device, plus 25 percent.
6. Power Outlets: UL 1449; cabinet-mounted power strip, with six 15-A, 120-V ac, NEMA WD 6, Configuration 15-15R receptacle(s), with surge protection, and LED indicator lights for power and protection status.
7. Incoming Telephone Line Surge Protection: UL 497B; cabinet-mounted, dial-up line surge suppressor for each line.
8. Incoming Television Line Surge Protection: UL 497B; cabinet-mounted, coaxial cable surge suppressor for each cable, 0.3-dB maximum insertion loss at 5 to 1000 MHz.
9. Plywood Backerboard: Plywood Backerboard and total wall together must be rated for 30 min rated. Backboards shall be painted to match the same color as the walls of the room. Use BC grade plywood and cover with intumescent paint. Stamp board in visible area for 30 min rating.

2.3 50/125 MICROMETER, MULTIMODE, OPTICAL FIBER CABLE (OM4)

A. Description: Multimode, 50/125-micrometer, 12-fiber, nonconductive, tight buffer, optical fiber cable.. OM4 cable must be rated for direct bury, where indicated..

B. Standards:

    1. Comply with ICEA S-83-596 for mechanical properties.
    2. Comply with TIA-568-C.3 for performance specifications.
    3. Comply with TIA-492AAAB for detailed specifications.

C. Maximum Attenuation: 3.50 dB/km at 850 nm; 1.5 dB/km at 1300 nm.

D. Minimum Overfilled Modal Bandwidth-length Product: 500 MHz-km at 850 nm; 500 MHz-km at 1300 nm.

E. Jacket:

1. Jacket Color: Preference-Black.
2. Cable cordage jacket, fiber, unit, and group color shall be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches.

F. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:

1. Plenum Rated, Nonconductive: Type OFNP, complying with NFPA 262.
2. Riser Rated, Nonconductive: Type OFNR, complying with UL 1666.

2.4 850 NANOMETER LASER-OPTIMIZED, 50/125 MICROMETER, MULTIMODE OPTICAL FIBER CABLE (OM3)

A. Description: Multimode, 50/125-micrometer, 12-fiber, nonconductive, tight buffer, optical fiber cable.

B. Standards:

1. Comply with ICEA S-83-596 for mechanical properties.
2. Comply with TIA-568-C.3 for performance specifications.
3. Comply with TIA-492AAAC for detailed specifications.

C. Maximum Attenuation: 3.50 dB/km at 850 nm; 1.5 dB/km at 1300 nm.

D. Minimum Overfilled Modal Bandwidth-length Product: 1500 MHz-km at 850 nm; 500 MHz-km at 1300 nm.

E. Minimum Effective Modal Bandwidth-length Product: 2000 MHz-km at 850 nm.

F. Jacket:

1. Jacket Color: Black.
2. Cable cordage jacket, fiber, unit, and group color are to be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

G. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:

1. Plenum Rated, Nonconductive:

a. Type OFNP, complying with NFPA 262.
b. Type OFNP in listed plenum communications raceway.
c. Type OFNP or Type OFNR in metallic conduit.

d. Type OFNP, complying with NFPA 262; Type OFNP in listed plenum communications raceway; or Type OFNP or Type OFNR in metallic conduit.

2. Plenum Rated, Conductive:

a. Type OFCP or Type OFNP, complying with NFPA 262.
b. Type OFCP or Type OFNP in listed plenum communications raceway.
c. Type OFNG, Type OFCP, Type OFNP, Type OFCR, or Type OFNR in metallic conduit installed per NFPA 70, Article 300.22, "Wiring in Ducts, Plenums, and Other Air-Handling Spaces."

2.5 850 NANOMETER LASER-OPTIMIZED, 50/125 MICROMETER, MULTIMODE OPTICAL FIBER CABLE (OM4)

A. Description: Multimode, 50/125-micrometer, 12-fiber, nonconductive tight buffer, optical fiber cable.

B. Standards:

1. Comply with ICEA S-83-596 for mechanical properties.
2. Comply with TIA-568-C.3 for performance specifications.
3. Comply with TIA-492AAAD for detailed specifications.

C. Maximum Attenuation: 3.50 dB/km at 850 nm; 1.5 dB/km at 1300 nm.

D. Minimum Overfilled Modal Bandwidth-length Product: 3500 MHz-km at 850 nm; 500 MHz-km at 1300 nm.

E. Minimum Effective Modal Bandwidth-length Product: 4700 MHz-km at 850 nm.

F. Jacket:

1. Jacket Color: Black.
2. Cable cordage jacket, fiber, unit, and group color are to be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

G. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:

1. Plenum Rated, Nonconductive:

a. Type OFNP, complying with NFPA 262.
b. Type OFNP in listed plenum communications raceway.
c. Type OFNP or Type OFNR in metallic conduit.
d. Type OFNP, complying with NFPA 262; Type OFNP in listed plenum communications raceway; or Type OFN, Type OFNG, Type OFNP, or Type OFNR in metallic conduit.

2. Plenum Rated, Conductive:

a. Type OFCP, complying with NFPA 262.
b. Type OFCP or Type OFNP in listed plenum communications raceway.
c. Type OFCP, Type OFNP, Type OFCR, or Type OFNR in metallic conduit installed per NFPA 70, Article 300.22, "Wiring in Ducts, Plenums, and Other Air-Handling Spaces."

2.6 9/125 MICROMETER SINGLE-MODE, INDOOR-OUTDOOR OPTICAL FIBER CABLE (OS1)

A. Description: Single mode, 9/125-micrometer, 12 fibers, tight buffered, nonconductive optical fiber cable.

B. Maximum Attenuation: 0.5 dB/km at 1310 nm; 0.5 dB/km at 1550 nm.

C. Jacket:

1. Jacket Color: Black.
2. Cable cordage jacket, fiber, unit, and group color are to be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

D. Standards:

1. Comply with TIA-492CAAA for detailed specifications.
2. Comply with TIA-568-C.3 for performance specifications.
3. Comply with ICEA S-104-696 for mechanical properties.

E. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:

1. Plenum Rated, Nonconductive:

a. Type OFNP, complying with NFPA 262.
b. Type OFNP in listed plenum communications raceway.
c. Type OFNP or Type OFNR in metallic conduit.
d. Type OFNP, complying with NFPA 262; Type OFNP in listed plenum communications raceway; or Type OFN, Type OFNG, Type OFNP, or Type OFNR in metallic conduit.

2. Plenum Rated, Conductive:

a. Type OFCP, complying with NFPA 262.
b. Type OFCP or Type OFNP in listed plenum communications raceway.
c. Type OFCP, Type OFNP, Type OFCR, or Type OFNR in metallic conduit installed per NFPA 70, Article 300.22, "Wiring in Ducts, Plenums, and Other Air-Handling Spaces."

2.7 9/125 MICROMETER, SINGLE-MODE, INDOOR-OUTDOOR OPTICAL FIBER CABLE (OS2)

A. Description: Single mode, 9/125-micrometer, 12 fibers, tight buffered, nonconductive optical fiber cable.

B. Maximum Attenuation: 0.5 dB/km at 1310 nm; 0.5 dB/km at 1550 nm.

C. Jacket:

1. Jacket Color: Black.
2. Cable cordage jacket, fiber, unit, and group color are to be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

D. Standards:

1. Comply with TIA-492CAAB for detailed specifications.
2. Comply with TIA-568-C.3 for performance specifications.
3. Comply with ICEA S-104-696 for mechanical properties.

E. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:

1. Plenum Rated, Nonconductive:

a. Type OFNP, complying with NFPA 262.
b. Type OFNP in listed plenum communications raceway.
c. Type OFNP or Type OFNR in metallic conduit.
d. Type OFNP, complying with NFPA 262; Type OFNP in listed plenum communications raceway; or Type OFN, Type OFNG, Type OFNP, or Type OFNR in metallic conduit.

2. Plenum Rated, Conductive:

a. Type OFCP, complying with NFPA 262.
b. Type OFCP or Type OFNP in listed plenum communications raceway.
c. Type OFCP, Type OFNP, Type OFCR, or Type OFNR in metallic conduit installed per NFPA 70, Article 300.22, "Wiring in Ducts, Plenums, and Other Air-Handling Spaces."

2.8 OPTICAL FIBER CABLE HARDWARE

A. Standards:

1. Comply with Fiber Optic Connector Intermateability Standard (FOCIS) specifications of the TIA-604 series.
2. Comply with TIA-568-C.3.

B. Cross-Connects and Patch Panels: Modular panels housing multiple-numbered, duplex cable connectors.

1. Number of Connectors per Field: One for each fiber of cable or cables assigned to field, plus spares and blank positions adequate to suit specified expansion criteria.

C. Patch Cords: Factory-made, single-fiber cables in 36-inch (900-mm) lengths.

D. Connector Type: Type SC complying with TIA-604-3-B, Type ST complying with TIA-604-2-B, Type LC complying with TIA-604-10-B, Type MT-RJ complying with TIA-604-12, or Type MPO complying with TIA-604-5-Dconnectors.

E. Plugs and Plug Assemblies:

1. Male; color-coded modular telecommunications connector designed for termination of a single optical fiber cable.
2. Insertion loss not more than 0.75 dB.

3. Marked to indicate transmission performance.

F. Jacks and Jack Assemblies:

1. Female; quick-connect, simplex and duplex; fixed telecommunications connector designed for termination of a single optical fiber cable.
2. Insertion loss not more than 0.75 dB.

3. Marked to indicate transmission performance.
4. Designed to snap-in to a patch panel or faceplate.

G. Faceplate:

1. Two -port, vertical single-gang faceplates designed to mount to single-gang wall boxes.
2. Eight -port, vertical double-gang faceplates designed to mount to double-gang wall boxes.

3. Plastic Faceplate: High-impact plastic. Coordinate color with Section 262726 "Wiring Devices."
4. Metal Faceplate: Stainless steel, complying with requirements in Section 262726 "Wiring Devices."
5. For use with snap-in jacks accommodating any combination of twisted pair, optical fiber, and coaxial work area cords.

a. Flush mounting jacks, positioning the cord at a 45-degree angle.

2.9 BALANCED TWISTED PAIR CABLE

A. Category 6a: Four-pair, balanced-twisted pair cable, with internal spline, certified to meet transmission characteristics of Category 6a cable at frequencies up to 500MHz, Commscope or equal

2.10 COMMUNICATIONS COAXIAL CABLE

A. Description: Coaxial cable with a 75-ohm characteristic impedance designed for broadband data transmission.

B. RG-11/U: UL Type CMP and CL2P.

1. No. 14 AWG, solid, copper-covered steel conductor.
2. Plenum rated and suitable for outdoor installations in ambient temperatures ranging from minus 40 to plus 85 deg F.
3. Gas-injected, foam-PE insulation.
4. Shielded with 100 percent aluminum tape and 40 percent aluminum braid.
5. Double shielded (double shielding is equivalent to some manufacturer's "quad" shielding, confirm with manufacturer). with 100 percent aluminum foil shield, 60 percent aluminum braided inner shield, and 40 percent aluminum braided outer shield.
6. Jacketed with sunlight-resistant, black PVC or PE.

C. RG-59/U: UL Type CMP and CL2P.

1. No. 20 AWG, solid copper conductor.
2. Plenum rated.
3. Gas-injected, foam-PE insulation.
4. Single shielded with 100 percent aluminum shield and 40 percent aluminum braid.
5. PVC jacket.

2.11 CATV COAXIAL CABLE

A. Description: Coaxial cable with a 75-ohm characteristic impedance designed for CATV transmission.

B. Combination Cables: Designed for home networking; may be used provided the requirements for single-cable types are met.

C. Speaker Cables: 2-conductor cable, No. 14 AWG, UTP, PVC jacketed, UL Type CL3. Use two different jacket colors and a consistent conductor color.

D. Security Device Cables: Multiconductor, No. 18 AWG, UTP, with red PVC jacket, and complying with NFPA 70, Type CL2 and TIA/EIA-570-A-1 requirements.

E. Fire and Carbon Monoxide Warning Device Cables: Multiconductor, No. 18 AWG, twisted pair; with red PVC jacket; and complying with NFPA 70, Type FPL, and TIA/EIA-570-A-1 requirements.

2.12 TWISTED PAIR CABLE HARDWARE

A. Description: Hardware designed to connect, splice, and terminate twisted pair copper communications cable.

B. General Requirements for Twisted Pair Cable Hardware:

1. Comply with the performance requirements of Category 6a.
2. Comply with TIA-568-C.2, IDC type, with modules designed for punch-down caps or tools.
3. Cables shall be terminated with connecting hardware of same category or higher.
4. Pinout configuration shall be 568B.

C. Connecting Blocks: 110-style IDC. Provide blocks for the number of cables terminated on the block, plus 25 percent spare.

D. Patch Panel: Modular panels housing multiple-numbered jack units with IDC-type connectors at each jack for permanent termination of pair groups of installed cables.

1. Number of Jacks per Field: One for each four-pair UTP cable indicated.

E. Plugs and Plug Assemblies: Male, eight-position, color-coded, modular telecommunications connector, designed for termination of a single, four-pair, 100-ohm, unshielded or shielded twisted pair cable.

F. Jacks and Jack Assemblies: Female, eight-position, modular, fixed telecommunications connector, designed for termination of a single, four-pair, 100-ohm, unshielded or shielded twisted pair cable.

1. Preferred type: Keystone.

G. Patch Cords: Factory-made, four-pair cables in 48-inch lengths; terminated with eight-position modular plug at each end.

1. Patch cords shall have bend-relief-compliant boots and color-coded icons to ensure Category 6a performance. Patch cords shall have latch guards to protect against snagging.
2. Patch cords for fiber lines shall have a Jacket Color of Blue.

H. Consolidation Points: NRTL listed as complying with UL 50 and UL 1863. Comply with requirements for cable connecting hardware. When installed in plenums used for environmental air, NRTL listed as complying with UL 2043.

1. Number of Terminals per Field: One for each conductor in assigned cables.
2. Number of Connectors per Field: One for each four-pair UTP cable indicated.

I. Multiuser Telecommunications Outlet Assembly (MUTOA):

1. NRTL listed as complying with UL 50 and UL 1863. Label shall include maximum length of work area cords, based on TIA/EIA-568-C.1. When installed in plenums used for environmental air, NRTL listed as complying with UL 2043.
2. Number of Terminals per Field: One for each conductor in assigned cables.
3. Number of Connectors per Field: One for each four-pair UTP cable indicated.

2.13 COAXIAL CABLE HARDWARE

A. Coaxial-Cable Connectors: Type BNC, 75 ohms.

2.14 TELECOMMUNICATIONS OUTLET/CONNECTORS

A. Modular; each outlet configuration field fabricated from factory-made components. Listed and labeled as complying with TIA/EIA-568-B.2, TIA/EIA-B.3, and UL 1863.

B. Workstation Outlets: Two-port-connector assemblies mounted in single faceplate.

1. Plastic Faceplate: High-impact plastic. Coordinate color with Section 262726 "Wiring Devices."
2. For use with snap-in jacks accommodating any combination of balanced twisted pair work area cords.

    a. Flush mounting jacks, positioning the cord between a 30 and 45-degree angle.

3. Legend: Machine printed, in the field, using adhesive-tape label.

C. MATV User Interface Devices: Flush, female-type outlets, designed to mimic power duplex outlet; for mounting in standard outlet box; with metallic parts of anodized brass, beryllium copper, or phosphor bronze. Cable connector mounting shall be semi-recessed so its protrusion is flush with the plane of device plate.

1. Cable Connector: Female, Type F.
2. Wall Plates: Match materials and finish of power outlets in same space.
3. Attenuation: Less than 0.1 dB.
4. Voltage Standing-Wave Ratio: Less than 1.15 to 1.

D. Wiring Devices: Mount connectors on single or multigang faceplate.

1. Faceplates: High-impact plastic; colors as selected by Government.
2. Outlet shall accept the following components:

    a. Voice, Telephone, Data Jacks, and Security Camera: IDC connector for UTP, modular, RJ-45.
    b. MATV: Type F.
    c. Speaker: Binding post type.

2.15 GROUNDING

A. Comply with requirements in Section 260526 "Grounding and Bonding for Electrical Systems." for grounding conductors and connectors.

B. Comply with TIA-607-B.

C. Comply with Motorola R56 standards.

D. Comply with BICSI standards.

E. Telecommunications Main Bus Bar:

1. Connectors: Mechanical type, cast silicon bronze, solderless compression-type wire terminals, and two-bolt connection to ground bus bar.

2. Ground Bus Bar: For details see E502 for the Crew Quarters Bus Bar and E501 for the First station bus bars.
3. Stand-Off Insulators: Comply with UL 891 for use in switchboards, 600 V. Lexan or PVC, impulse tested at 5000 V.

2.16 LABELING

A. Comply with TIA/EIA-606-A and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

PART 3 - EXECUTION

3.1 WIRING METHODS

A. Install cables in pathways and cable trays except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces and in gypsum board partitions where unenclosed wiring method may be used. Conceal pathways and cables except in unfinished spaces.

1. Install plenum cable in environmental air spaces, including plenum ceilings.

B. Conceal conductors and cables in accessible ceilings, walls, and floors where possible.

C. Wiring within Enclosures:

1. Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's limitations on bending radii.
2. Install lacing bars and distribution spools.
3. Install conductors parallel with or at right angles to sides and back of enclosure.

3.2 INSTALLATION

A. Comply with NECA 1.

B. Comply with BICSI TDMM for all structures.

C. Ground equipment complying with BICSI and Motorola R56.

3.3 INSTALLATION OF CABLES

A. Comply with NECA 1.

B. General Requirements for Cabling:

1. Comply with TIA/EIA-568-C.1.
2. Comply with BICSI ITSIMM and TDMM for cable termination.
3. MUTOA shall not be used as a cross-connect point.

4. Consolidation points may be used only for making a direct connection to telecommunications outlets/connectors.

    a. Do not use consolidation point as a cross-connect point, as a patch connection, or for direct connection to workstation equipment.
    b. Locate consolidation points for UTP at least 49 feet from communications equipment room.

5. Terminate conductors; no cable shall contain unterminated elements. Make terminations only at indicated outlets, terminals, cross connects, and patch panels.
6. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches and not more than 6 inches from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
7. Install lacing bars to restrain cables, to prevent straining connections, and to prevent bending cables to smaller radii than minimums recommended by manufacturer.
8. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in for the type of cable in applicable BICSI ITSIMM and TDMM chapter. Install lacing bars and distribution spools.
9. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
10. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
11. In the communications equipment room, install a 10-foot-long service loop on each end of cable.
12. Pulling Cable: Comply with requirements in BICSI ITSIMM and TDMM for type of cable being pulled. Monitor cable pull tensions.

C. UTP Cable Installation: Comply with TIA-568-C.2.

D. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend cable not in a wireway or pathway a minimum of 8 inches above ceilings by cable supports not more than 60 inches apart.
3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

E. Group connecting hardware for cables into separate logical fields.

F. Separation from EMI Sources:

1. Comply with BICSI TDMM, Motorola R56 and TIA-569-C for separating unshielded copper voice and data communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between Communications Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches.

3.4 GROUNDING

A. Install grounding according to BICSI ITSIMM, TDMM and Motorola R56, "Grounding, Bonding, and Electrical Protection." In the event that grounding requirements differ from one standards to another choose the more restrictive requirement.

B. Comply with Motorola R56.

C. Comply with BICSI standards.

D. Locate grounding bus bar to minimize the length of bonding conductors. Fasten to wall allowing at least 2-inch clearance behind the grounding bus bar. Connect grounding bus bar with a minimum No. 4 AWG grounding electrode conductor from grounding bus bar to suitable electrical building ground.

E. Bond metallic equipment to the grounding bus bar using not smaller than No. 6 AWG equipment grounding conductor.

3.5 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA-606-B.

1. Administration Class: Class 1.
2. Color-code cross-connect fields. Apply colors to voice and data service backboards, connections, covers, and labels.

B. Paint and label colors for equipment identification shall comply with TIA-606-B for Class 2 level of administration.

C. Cable Schedule: Post in prominent location in each equipment room and wiring closet. List incoming and outgoing cables and their designations, origins, and destinations. Protect with rigid frame and clear plastic cover. Furnish an electronic copy of final comprehensive schedules for Project.

D. Cabling Administration Drawings: Show building floor plans with cabling administration-point labeling. Identify labeling convention and show labels for telecommunications closets, backbone pathways and cables, terminal hardware and positions, horizontal cables, work areas and workstation terminal positions, grounding buses and pathways, and equipment grounding conductors. Follow convention of TIA/EIA-606-A. Furnish electronic record of all drawings, in software and format selected by Government.

E. Cable and Wire Identification:

1. Label each cable within 4 inches of each termination and tap, where it is accessible in a cabinet or junction or outlet box, and elsewhere as indicated.
2. Each wire connected to building-mounted devices is not required to be numbered at device if color of wire is consistent with associated wire connected and numbered within panel or cabinet.
3. Exposed Cables and Cables in Cable Trays and Wire Troughs: Label each cable at intervals not exceeding 15 feet.

4. Label each terminal strip and screw terminal in each cabinet, rack, or panel.

    a. Individually number wiring conductors connected to terminal strips, and identify each cable or wiring group being extended from a panel or cabinet to a building-mounted device with name and number of particular device as shown.
    b. Label each unit and field within distribution racks and frames.

5. Identification within Connector Fields in Equipment Rooms and Wiring Closets: Label each connector and each discrete unit of cable-terminating and connecting hardware. Where similar jacks and plugs are used for both voice and data communication cabling, use a different color for jacks and plugs of each service.
6. Uniquely identify and label work area cables extending from the MUTOA to the work area. These cables may not exceed the length stated on the MUTOA label.

F. Labels shall be preprinted or computer-printed type with printing area and font color that contrasts with cable jacket color but still complies with requirements in TIA-606-B.

1. Cables use flexible vinyl or polyester that flexes as cables are bent.

3.6 FIELD QUALITY CONTROL

A. All tests the contractor cannot perform themselves shall be performed by a qualified testing agency. Contractor is responsible for hiring of testing agency, not the Government.

B. Perform the following tests and inspections:

1. Test balanced twisted pair copper cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.
2. Balanced Twisted Pair Performance Tests:

    a. Test for each outlet and MUTOA. Perform the following tests according to TIA-568-C.1 and TIA-568-C.2:

        1) Wire map.
        2) Length (physical vs. electrical, and length requirements).
        3) Insertion loss.
        4) Near-end crosstalk (NEXT) loss.
        5) Power sum near-end crosstalk (PSNEXT) loss.
        6) Equal-level far-end crosstalk (ELFEXT).
        7) Power sum equal-level far-end crosstalk (PSELFEXT).
        8) Return loss.
        9) Propagation delay.
        10) Delay skew.

C. Provide Manufacturer documents for certified warranty for a minimum of 15-years from the date of installation for the structured cabling installation.

D. Document data for each measurement. Data for submittals shall be printed in a summary report that is formatted similar to format suggested by BICSI or that is transferred from the instrument to the computer, saved as text files, and printed and submitted.

E. Prepare test and inspection reports.

3.7 DEMONSTRATION

A. Train Government's maintenance personnel in cable-plant management operations, including changing signal pathways for different workstations, rerouting signals in failed cables, and keeping records of cabling assignments and revisions when extending wiring to establish new workstation outlets.

END OF SECTION 271000

283100 - ADDRESSABLE FIRE ALARM SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

B. Referenced Codes and Standards:

1. International Building Code (IBC) 2021 Edition.
2. International Fire Code (IFC) 2021 Edition.
3. International Mechanical Code (IMC), 2021 Edition.
4. NFPA 13 Standard for the Installation of Sprinkler Systems, 2019 Edition.
5. NFPA 70 National Electrical Code, 2020 Edition
6. NFPA 72 National Fire Alarm and Signaling Code, 2019 Edition.

1.2 SUMMARY

A. Section Includes:

1. Existing fire-alarm system to be modified.
2. Fire alarm cabling and conductors.
3. Fire-alarm notification appliances.

1.3 DEFINITIONS

A. CD: Candela

B. DACT: Digital alarm communicator transmitter.

C. ECS: Emergency Communications System.

D. EMT: Electrical metallic tubing.

E. EVACS: Emergency Voice Alarm Communications System.

F. FACU: Fire Alarm Control Unit.

G. LED: Light-Emitting Diode.

H. LOC: Local Operator’s Console.

I. MNS: Mass Notification System.

J. NICET: National Institute for Certification in Engineering Technologies.

K. NAC: Notification Appliance Circuit.

L. NRTL: Nationally Recognized Testing Laboratory

M. PC: Personal computer.

1.4 VOLTAGE CLASSES:

A. For specified circuits and equipment, voltage classes are defined as follows:

1. Control Voltage: Listed and labeled for use in remote-control, signaling, and power-limited circuits supplied by a Class 2 or Class 3 power supply having rated output not greater than 150 V and 5 A, allowing use of alternate wiring methods complying with NFPA 70, Article 725.
2. Low Voltage: Listed and labeled for use in circuits supplied by a Class 1 or other power supply having rated output not greater than 1000 V, requiring use of wiring methods complying with NFPA 70, Article 300, Part I.

1.5 SEQUENCING AND SCHEDULING

A. Existing Fire-Alarm Equipment: Maintain existing equipment fully operational until new equipment has been tested and accepted. When new equipment is installed, label it "NOT IN SERVICE" until it is accepted. Remove labels from new equipment when put into service, and label existing fire-alarm equipment "NOT IN SERVICE" until removed from building.

B. Equipment Removal: After acceptance of new fire-alarm system, remove existing disconnected fire-alarm equipment and wiring. Existing cabinets shall be removed completely and shall not be used as a splice point or junction box.

1. If existing circuits are to be re-used, replace existing fire alarm panel/cabinet with an approved termination cabinet which includes screw-terminals and means of labeling and indexing each circuit.

C. If a system impairment (degraded operation) is unavoidable, the contractor is responsible for providing Fire Watch activities in accordance with requirements of the IBC. The contractor shall also notify the local authorities prior to such activities with anticipated start and end dates of activities.

1.6 ACTION SUBMITTALS

A. Approved Permit Submittal: Submittals must be approved by authorities having jurisdiction prior to submitting them to the Government.

B. Submittals shall be complete and include all information required in parts C, D and E below. <u>Partial submittals will not be reviewed and automatically stamped “REVISE & RESUBMIT” and returned to the contractor.</u>

C. Submittals provided in digital (.pdf) format will be acceptable.

1. Digital file names shall include project name and revision number and in the following format: [PROJECTNAME]_283100 FIRE ALARM_R[0].pdf

D. Product Data: For each type of product, including furnished options and accessories.

1. Include construction details, material descriptions, dimensions, profiles, and finishes.
2. Include rated capacities, operating characteristics, and electrical characteristics.
3. Model-specific information shall be highlighted for clarity on documents encompassing multiple types of devices.

E. Shop Drawings: For fire-alarm system.

1. Comply with recommendations and requirements in "Documentation" section of NFPA 72 for Shop Drawings (Installation Documentation).
2. Include plans, elevations, sections, and details, including details of attachments to other Work.
3. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and locations. Indicate conductor sizes, indicate termination locations and requirements, and distinguish between factory and field wiring.
4. Include voltage drop calculations for notification-appliance circuits.
5. Include wire routing of all notification-appliance circuits and the locations of all end-of-line devices.
6. Include stand-by battery-size calculations and battery sizes being provided for each power supply.
7. Include system input/output operational matrix specific to the submitted design.
8. Include floor plans to indicate final outlet locations showing address of each addressable device. Show size and route of cable and conduits and point-to-point wiring diagrams.
9. Include system one-line riser diagram identifying cable/conductor types, connections to devices, general arrangement of system equipment, addressable device identifiers and rated light output of notification devices.
10. Plans shall be developed in AutoCAD® or compatible software.
11. Plan title block and all informational notes shall be specific to the project and the contractor performing the work.

    a. Duplication of signed and sealed engineering (Cushing Terrell) plans for the use of shop drawings is prohibited and will be immediately rejected.

F. Re-submittals

1. Submittals returned and requiring revisions or corrections shall be re-submitted <u>in their entirety</u> with all revisions applied and highlighted. Partial submittal documents will be rejected.

1.7 INFORMATIONAL SUBMITTALS

A. Provide certificates (copies of):

1. Valid contractor's license as required by the state project is located in.
2. Valid manufacturer's certification for system designer and installing personnel for equipment supplied.

3. Valid NICET Certification (Fire Alarm Systems Level II minimum) for system designer and installing technicians.

B. Field quality-control reports.

1. Fire-Watch plans and documented activity (if required).

C. Sample Warranty: Submittal must include line item pricing for replacement parts and labor which will be valid for a minimum of 12 months following system acceptance.

1.8 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fire-alarm systems and components to include in emergency, operation, and maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

a. Comply with "Records" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.
b. Provide "Fire-Alarm and Emergency Communications System Record of Completion Documents" in accordance with "Completion Documents" Article in "Documentation" section of "Fundamentals" chapter in NFPA 72.
c. Complete wiring diagrams showing connections between devices and equipment. Each conductor must be numbered at every junction point with indication of origination and termination points.
d. Riser diagram.
e. List of device addresses, descriptions and device type as programmed in the system.
f. Record copy of site-specific software.
g. Provide "Inspection and Testing Form" in accordance with "Inspection, Testing and Maintenance" chapter in NFPA 72, and include the following:

1) Equipment tested.
2) Frequency of testing of installed components.
3) Frequency of inspection of installed components.
4) Requirements and recommendations related to results of maintenance.
5) Manufacturer's user training manuals.

h. Manufacturer's required maintenance related to system warranty requirements.
i. Abbreviated operating instructions for mounting at FACU and each annunciator unit.

B. Software and Firmware Operational Documentation:

1.9 MAINTENANCE MATERIAL SUBMITTALS

A. Extra Stock Material: Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Audible and Visual Notification Appliances: One of each type installed.

1.10 QUALITY ASSURANCE

A. Installer Qualifications:

1. Personnel must be trained and certified by manufacturer for installation of units required for this Project.
2. Installation must be by personnel certified by NICET as fire-alarm Level II (minimum) technician.
3. Obtain certification by NRTL in accordance with NFPA 72.
4. Licensed or certified by authorities having jurisdiction.

B. Designer Qualifications (one of the following):

1. System designer shall be certified by the manufacturer of the product being supplied.
2. System designer shall be NICET certified in Fire Alarm Systems Level III minimum.

1.11 FIELD CONDITIONS

1.12 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace fire-alarm system equipment and components that fail because of defects in materials or workmanship within specified warranty period.

1. Warranty Period: One year from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 EXISTING FIRE-ALARM SYSTEM TO BE MODIFIED

A. Description: Modify existing fire alarm system as indicated on contract drawings.

B. Accessories: Re-use existing notification devices and provide new as required, matching make and model of existing devices.

C. Source Limitations for Fire-Alarm System and Components: Components must be compatible with, and operate as extension of, existing system. Provide system manufacturer's certification that components provided have been tested as, and will operate as, a system.

1. New peripherals shall match make/style of existing devices as closely as possible.

2.2 FIRE-ALARM CONTROL UNIT (FACU)

a. Existing to remain.

2.3 NOTIFICATION APPLIANCE CIRCUIT (NAC) REMOTE POWER SUPPLY

1. Existing to remain.

2.4 SYSTEM SMOKE DETECTORS

1) Existing to remain.

2.5 FIRE-ALARM NOTIFICATION APPLIANCES

A. Acceptable manufacturers: Listed for use with and compatible with FACU.

1. System Sensor
2. Gentex
3. Wheelock by Eaton
4. Matching the manufacture of existing devices.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions for compliance with requirements for ventilation, temperature, humidity, and other conditions affecting performance of the Work.

1. Verify that manufacturer's written instructions for environmental conditions have been permanently established in spaces where equipment and wiring are installed, before installation begins.

B. Examine roughing-in for electrical connections to verify actual locations of connections before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Preinstallation Testing: Perform verification of functionality of installed components of existing system prior to starting work. Document equipment or components not functioning as designed.

B. Interruption of Existing Fire-Alarm Service: Do not interrupt fire-alarm service to facilities occupied by the Government or others unless permitted under the following conditions and then only after arranging to provide temporary guard service in accordance with requirements indicated:

1. Notify Construction Manager and/or the Government no fewer than two days in advance of proposed interruption of fire-alarm service.
2. Do not proceed with interruption of fire-alarm service without Construction Manager's and the Government's written permission.

C. Protection of In-Place Conditions: Protect devices during construction unless devices are placed in service to protect facility during construction.

3.3 INSTALLATION OF EQUIPMENT

A. Comply with NECA 305, NFPA 72, NFPA 101, and requirements of authorities having jurisdiction for installation and testing of fire-alarm equipment. Install electrical wiring to comply with requirements in NFPA 70 including, but not limited to, Article 760, "Fire Alarm Systems."

1. Devices placed in service before other trades have completed cleanup must be replaced.
2. Devices installed, but not yet placed, in service must be protected from construction dust, debris, dirt, moisture, and damage in accordance with manufacturer's written storage instructions.

B. Connecting to Existing Equipment: Verify that existing fire-alarm system is operational before making changes or connections.

1. Connect new equipment to existing control panel in existing part of building.
2. Connect new equipment to existing monitoring equipment at supervising station.
3. Expand, modify, and supplement existing control and monitoring equipment as necessary to extend existing control and monitoring functions to new points. New components must be capable of merging with existing configuration without degrading performance of either system.

C. Audible Alarm-Indicating Devices: Install not less than 6 inch (150 mm) below ceiling. Install bells and horns on flush-mounted back boxes with device-operating mechanism concealed behind grille. Install devices at same height unless otherwise indicated.

D. Visible Alarm-Indicating Devices: Install as shown on plans. Install devices in accordance with NFPA 72 requirements and at same height unless otherwise indicated.

3.4 PATHWAYS

A. Pathways above recessed ceilings and in inaccessible locations may be routed exposed.

1. Exposed pathways located less than 96 inch (2440 mm) above floor must be installed in EMT.

B. Pathways in inaccessible space (above gypsum ceilings and within walls) must be installed in EMT and stubbed to nearest accessible space.

C. Exposed EMT must be painted using red enamel paint.

3.5 CONNECTIONS

3.6 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals.

3.7 FIELD QUALITY CONTROL

A. Field tests must be witnessed by authorities having jurisdiction.

B. Administrant for Tests and Inspections:

1. Engage factory-authorized service representative to administer and perform tests and inspections on components, assemblies, and equipment installations, including connections.

C. Tests and Inspections:

1. Visual Inspection: Conduct visual inspection prior to testing.

    a. Inspection must be based on completed record Drawings and system documentation that is required by "Completion Documents, Preparation" table in "Documentation" section of "Fundamentals" chapter in NFPA 72.
    b. Comply with "Visual Inspection Frequencies" table in "Inspection" section of "Inspection, Testing and Maintenance" chapter in NFPA 72; retain "Initial/Reacceptance" column and list only installed components.

2. System Testing: Comply with "Test Methods" table in "Testing" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.
3. Test audible appliances for public operating mode in accordance with manufacturer's written instructions. Perform test using portable sound-level meter complying with Type 2 requirements in ASA S1.4 Part 1/IEC 61672-1.
4. Test audible appliances for private operating mode in accordance with manufacturer's written instructions.
5. Test visible appliances for public operating mode in accordance with manufacturer's written instructions.
6. Factory-authorized service representative must prepare "Fire Alarm System Record of Completion" in "Documentation" section of "Fundamentals" chapter in NFPA 72 and "Inspection and Testing Form" in "Records" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.

D. Reacceptance Testing: Perform reacceptance testing to verify proper operation of added or replaced devices and appliances.

E. Fire-alarm system will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

G. Annual Test and Inspection: One year after date of Substantial Completion, test fire-alarm system complying with visual and testing inspection requirements in NFPA 72. Use forms developed for initial tests and inspections.

END OF SECTION 283100