# STATEMENT OF WORK

The U.S. Fish and Wildlife Service Project Lead (PL) for this requirement is:

[redacted]

The U.S. Fish and Wildlife Service Contracting Officer Representative (COR) for this requirement is:

[redacted]

**Statement of Work** – This Statement of Work (SOW) describes the general performance of the project and does not attempt to show the exact construction of the work in complete detail. The Contractor is responsible for providing high-quality completed work that maintains the performance intent established by this document.

**Overview –** The U.S. Fish and Wildlife Service (FWS) needs the Contractor to provide repairs to the entire Rattlesnake Hill Road (FWS Route 101) beginning at Havana Street to the large metal swing gate. This road is 0.75 miles of concrete asphalt. The road is 22.7 feet wide. The road is in poor condition and will require a reverse (or inverted) capeseal in place from start to finish. Reverse capeseal is a known technique where slurry is placed on the bottom layer, followed by chipseal and compaction. This project will also require approximately 338 square yards of asphalt patching.

# ROCKY MOUNTAIN ARSENAL NATIONAL WILDLIFE REFUGE

## ROUTE 101: Rattlesnake Hill Rd

From Auto Tour Route West (Route 012CZ)
To Admin Access Rd (Route 300BZ)

| RPI Number | Collect Method | Inspection Date | Surface | Func Class | Tier | Length (mi) |
|---|---|---|---|---|---|---|
| 10059485 | Automated | 9/13/2020 | Asphalt | 2 | 2 | 0.75 |

| Condtion Legend | 95-100 (Exc) | 85-94 (Good) | 61-84 (Fair) | 0-60 (Poor) | Not Rated |
|---|---|---|---|---|---|

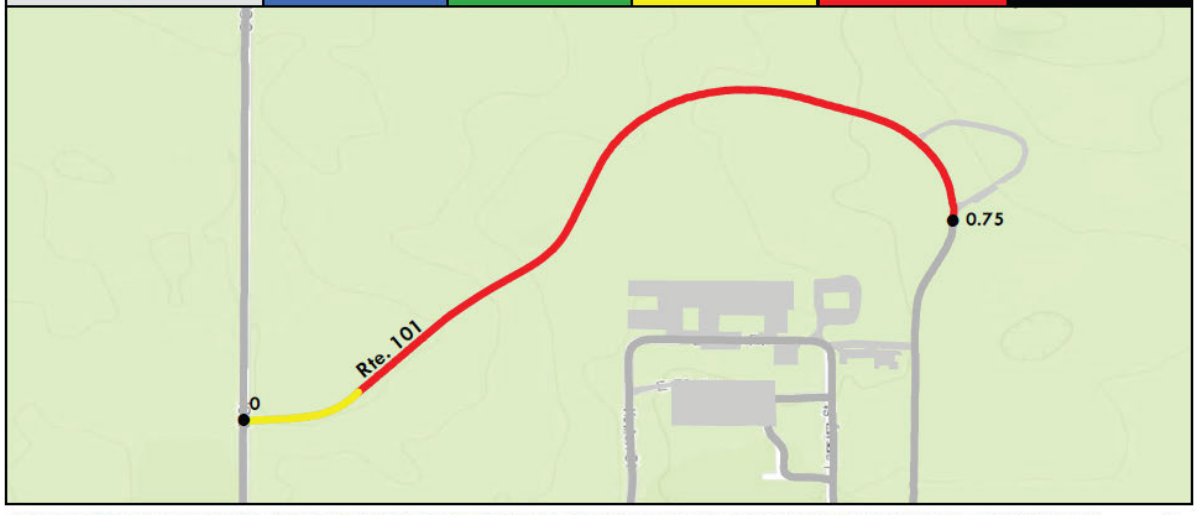


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

*Start Latitude / Longitude:* *39.828779, -104.865651*
*End Latitude / Longitude:* *39.83178, -104.85567*

Miles
0 0.2 0.4

N

**Project Purpose** – This project aims to repair all asphalt surfaces at the refuge's Rattlesnake Hill Road.

**Project Description / Scope of Work**

RT#101, RATTLESNAKE HILL ROAD

Asphalt patching of approximately 338 square yards and reverse (or inverted) capeseal of 0.75 miles of the Rattlesnake Hill Road (FWS Route 101) from Havana Street to the large metal swing gate. This road is 0.75 miles of concrete asphalt. The road is 22.7 feet wide.

For all patching, reference specifications for PATCHING within SECTION 321216 - ASPHALT PAVING attached. For reverse capesealing, reference EXECUTION within SECTION 321216 – ASPHALT PAVING specifically SURFACE PREPARATION, PLACING HOT MIX ASPHALT, and COMPACTION attached.

The road may be closed to all access for the duration of construction work. Contractor is responsible for developing a traffic control plan to ensure contractor and public safety during cracksealing operations.

**Place of Performance and Period of Performance**

Work must not begin until the official Notice to Proceed (NTP) is received from the Contracting Officer.

Performance Start: 30 days from award
Performance End: March 31, 2027

Normal duty hours are Monday through Friday 7:00 a.m. - 4:30 p.m.

The refuge is open for most federal holidays.

Contactor must coordinate any work activities outside of normal duty hours with the Contracting Officer Representative (COR).

**Deliverables and/or Delivery Schedule:**

All surfaces on the refuge's Rattlesnake Hill Road shall be patched and reverse capesealed. This road is 0.75 miles of concrete asphalt. The road is 22.7 feet wide.

**Evaluation and Acceptance**

The contractor will be evaluated as detailed herein. Government acceptance is contingent upon: All of the items listed with the State of Work are completed and are operational following state and federal codes.

**Quality Control/Quality Assurance:**

QC will be maintained according to industry standards and made available to the agency with the contractor's proposal.

**Photographs:**

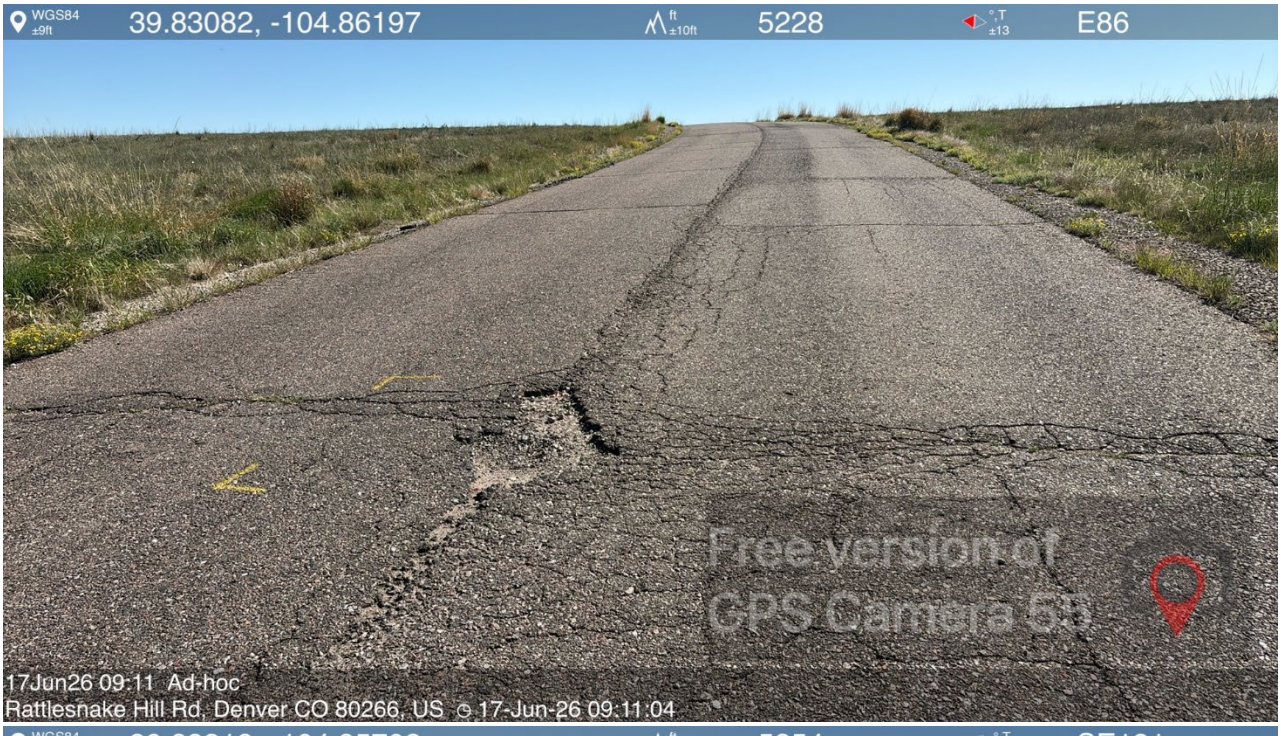
WGS84 ±9ft
39.83082, -104.86197
ft ±10ft
5228
°,T ±13
E86
Free version of
GPS Camera 55
17Jun26 09:11 Ad-hoc
Rattlesnake Hill Rd, Denver CO 80266, US
17-Jun-26 09:11:04

WGS84 ±9ft
39.83318, -104.85702
ft ±10ft
5254
°,T ±13
SE131
Free version of
GPS Camera 55
17Jun26 09:13 Ad-hoc
Rattlesnake Hill Rd, Denver CO 80266, US
17-Jun-26 09:13:08

WGS84 ±8ft
39.83325, -104.85979
ft ±10ft
5234
°,T ±13
E89
Free version of
GPS Camera 55
17Jun26 09:12 Ad-hoc
Rattlesnake Hill Rd, Denver CO 80266, US 17-Jun-26 09:12:07

WGS84 ±9ft
39.83214, -104.85571
ft ±10ft
5255
°,T ±13
S178
Free version of
GPS Camera 55
17Jun26 09:14 Ad-hoc
Rattlesnake Hill Rd, Denver CO 80266, US 17-Jun-26 09:14:02