SCOPE OF WORK

FIRE EXTINGUISHER MAINTENANCE SERVICES
WHITERIVER SERVICE UNIT
WHITERIVER, AZ
March 2026

A. Introduction:

The Whiteriver Service Unit (WRSU) is located on the White Mountain Apache Reservation and serves the members of the community. WRSU consists of the main hospital, Specialty Service Building, Annex Building, Garrett Building, Medicine City, and the Cibecue Health Clinic.

The WRSU is looking for a certified fire extinguisher company to provide routine maintenance, inspection, and repair services for the government owned fire extinguishers located throughout its buildings.

B. Background:

The Whiteriver Service Unit maintains a joint commission accreditation requirement and life safety program to protect visitors, staff, patients, and all personnel who enter the buildings for business and healthcare. One of the components for the life safety program is the proper operation and maintenance of fire extinguishers to protect against fire hazards. The standard for the operation and maintenance for the fire extinguishers is National Fire Protection Association (NFPA) 10.

The Whiteriver Facility maintenance program maintenance and inspects government owned fire extinguishers on a weekly interval. Defective fire extinguishers are removed from service and replaced with a compliant fire extinguisher from the fire extinguisher surplus to maintain continued life safety requirements. Defective fire extinguishers are tagged and marked as defective and placed in a secure cage in the maintenance department for future repair service.

C. Location and Address:

Main Hospital 200 West Hospital Drive Whiteriver, AZ 85941	Special Service Building 315 Apache Circle Drive Whiteriver, AZ 85941
Annex Building 305 Apache Circle Drive Whiteriver, AZ 85941	Garrett Building 400 Apache Circle Drive Whiteriver, AZ 85941
Cibecue Health Clinic West Cromwell Road, 2 W Third St, Cubicle, AZ 85911	Medicine City 200 West Hospital Drive Whiteriver, AZ 85941

Hospital and Clinics are open weekly from Monday through Friday from 8:00 AM to 5:00 PM AZ Time except on Federal Holidays.

D. Scope of Work:

The contractor shall provide all labor, materials, tools, equipment, transportation, and supervision necessary to provide annual certification and maintenance, necessary recharging/refilling, and replacement of government-owned fire extinguishers.

The contractor will be required to coordinate scheduling with facility point of contact to provide routine and non-routine maintenance and repair services for the government owned fire extinguishers onsite.

Government owned fire extinguishers may be taken off property for servicing, testing, repaired, and recharging. Government-owned fire extinguishers are to be promptly returned within a week of maintenance if not the contractor will supply a suitable fire extinguisher in place during the repair of the government owned fire extinguisher.

All routine and non-routine fire extinguisher services provided by the contractor must meet NFPA 10 standards (current version at the time of service) as referenced and required by the joint commission accrediting association.

Contractor shall schedule and perform the below routine services for government owned fire extinguishers:

Annual maintenance, inspection, and repair services of fire extinguishers:
The annual maintenance required of all fire extinguishers shall be performed within twelve (12) months of the previous annual maintenance and in accordance with the manufacturer's specifications and NFPA 10 requirements. The contractor shall supply tags and implement that identify type of service performed on each of the government owned fire extinguishers.

The Contractor will notify the contracting officer representative (COR), facility manager, and/or facility manager representative of the deficiencies found and actions taken to correct the deficiencies found during the course of the annual maintenance in an after-action service report. The report shall indicate in accordance with the latest NFPA 10 standard.

Monthly recharging/refilling/repair of defective fire extinguishers found, reported, as necessary, and required:

The contractor will provide monthly recharging, re-filling, inspections, and repair services for the defective government owned fire extinguisher located in the facility management secure cage at the Garrett Building. When recharging any portable fire extinguisher, the recommendations of the manufacturer shall be followed and all other actions items in accordance with the latest NFPA 10 requirements. The contractor shall supply tags that indicate the type of service performed on each of the government owned fire extinguishers.

The contractor will be required to coordinate scheduling with the facility's point of contacts to provide routine services and access to the government owned fire extinguishers at the Garrett Building.

The Contractor will notify the contracting officer representative (COR), facility manager, and/or facility manager representative of the deficiencies found and actions taken to correct the deficiencies found during the recharging/refilling services in an after-action service report. The report shall indicate in accordance with the latest NFPA 10 standard.

Six-year maintenance and Hydrostatic Testing of portable fire extinguishers found during annual and monthly maintenance:

The contractor will be responsible for exchanging out all fire extinguishers that require a six-year maintenance. The six-year maintenance shall include but is not limited to emptying and assembly, internal inspection of parts, recharging and replacement of fire agent, hydrostatic testing, and all other actions items in accordance with the latest NFPA 10 requirements. The contractor shall supply tags that indicate the type of service performed on each of the government owned fire extinguishers.

Government owned fire extinguishers may be taken off property for servicing. Government-owned fire extinguishers are to be promptly returned within a week of maintenance if not the contractor will supply a suitable fire extinguisher in place during the repair of the government owned fire extinguisher.

The Contractor will notify the contracting officer representative (COR), facility manager, and/or facility manager representative of six-year maintenance fire extinguishers found during the services in an after-action service report. The report shall indicate in accordance with the latest NFPA 10 standard.

Replacement, additional, and disposal of expired fire extinguishers during annual, monthly, and six-year maintenance services:

The contractor shall be responsible for identifying all government fire extinguishers that have reached a 12-year life span or if a fire extinguisher that is beyond repair for continued service. The contractor shall be responsible for replacing such fire extinguishers with a comparable type, size, and capability fire extinguisher.

The expired and removed government fire extinguisher shall be presented to the facility manager representative. The facility representative shall remove the IHS property tag and the fire extinguisher is to be given to the contractor for disposal.

The Contractor will notify the contracting officer representative (COR), facility manager, and/or facility manager representative of replaced and replaced fire extinguishers found during the services in an after-action service report. The report shall indicate in accordance with the latest NFPA 10 standard.

E. Period of Performance:

This will be a base year plus four (4) option years. The period of performance dates will be established at the time of award of the contract by the contracting officer.

Work is to be performed during operational hours from Monday through Friday from 8:00 AM to 5:00 PM AZ Time except on federal holidays. Work performed outside of operational hours will need to be request and approved by the COR prior to work being done.

F. Additional Information

See Appendix B for a list of the government owned fire extinguishers.
Each Fire extinguisher is identified by a Indian Health Service Asset Inventory Tag number.

G. Deliverables

Contractor shall submit a report of annual maintenance and inspection report of fire extinguishers after services has been delivered.

The report shall contain the following:
1.) Date of the service delivered.
2.) List of fire extinguisher inspected.
3.) List of fire extinguishers requiring repair/recharge/refilling.
4.) Report should have the NFPA code referenced.
5.) List of fire extinguishers requiring six-year maintenance and hydrostatic testing.
6.) List of fire extinguishers provided the six-year maintenance and hydrostatic testing service.

Contractor shall submit a report of any monthly recharging/refilling/repair of defective fire extinguishers found, reported, as necessary, and required:

The report shall contain the following:
1.) Date of the service delivered.
2.) List of fire extinguisher repaired, recharged, and refilled.
3.) Report should have the NFPA code referenced.

Contractor shall submit a report of any replacement, additional, and disposal of expired fire extinguishers during annual, monthly, and six-year maintenance services:

The report shall contain the following:
1.) Date of the service delivered.
2.) List of fire extinguisher disposed.
3.) List of make and model number of fire extinguishers replaced
4.) Report should have the NFPA code referenced.

H: Quote Technical Evaluation

Quotes shall be evaluated based on three categories: Qualifications, Capacity, and Past Performance. Contractors shall provide documentation with their quote to support and justify the three categories of evaluation.

Solicitation Evaluation Category	Solicitation Evaluation Factor
Qualifications	Professional qualifications necessary for satisfactory performance of required services, as stated in Section D., Scope of Work of the Statement of Work.
Capacity	Capacity to accomplish the delivery of the services in the scope of work shall be within 10 days of the contract award.
Past Performance	Past performance on at least two or more similar or same scope of contracts with government agencies and private industry in terms of delivery of services similar to the items in the Scope of Work.

H. Whiteriver Hospital Points of Contacts:

Contracting Officer Representative:
Shawn Gant
Facility Manager
Shawn.Gant@ihs.gov
928-221-6700

Facility Management Representative:
Chris Tortice
Chris.Tortice@ihs.gov

I. Invoicing and Receiving:

Contractor will invoice by Invoice Processing Platform at IPP.gov for processing. The COR or Technical Point of contract will review and approve invoices in IPP.gov

Invoice shall include the following services provided in accordance with the scope of work.

1. Invoice Date and Invoice Number
2. Contract Number
3. Charges for services and/or products identified BY CONTRACT LINE ITEM Number
4. Brief description of products and/or services rendered.
5. Charges should follow CONTRACT LINE ITEM Number.
6. Dates of Service or Shipment.

After invoices have been approved in IPP.gov; the Whiteriver Hospital Finance Department below will process the for processing after services are received at the property and supply department:

Questions regarding payment of invoices shall be directed to:
PHX_WRSUUFMSTeam@ihs.gov

APPENDIX A
LOCATION AND PROXIMITY MAP OF MAIN HOSPITAL, SPECIAL SERVICE BUILDING, ANNEX BUILDING, MEDICINE CITY, AND CIBECUE CLINIC

GOVERNMENT SITE LOCATION MAP 1

Whiteriver Hospital, Garret Building, Administration, Garrett Building, Government Housing Site (Medicine City), and Facilities Site.
Latitude: 33.8765056
Longitude: -109.9597917

GOVERNMENT SITE LOCATION MAP 2

Cibecue Health Center Site
Latitude: 34.0513944
Longitude: -110.4851417

GOVERNMENT SITE PROXIMITY MAP

Whiteriver Hospital, Garret Building, Administration, Garrett Building, Government Housing Site (Medicine City), Facilities Site, and Cibecue Health Clinic

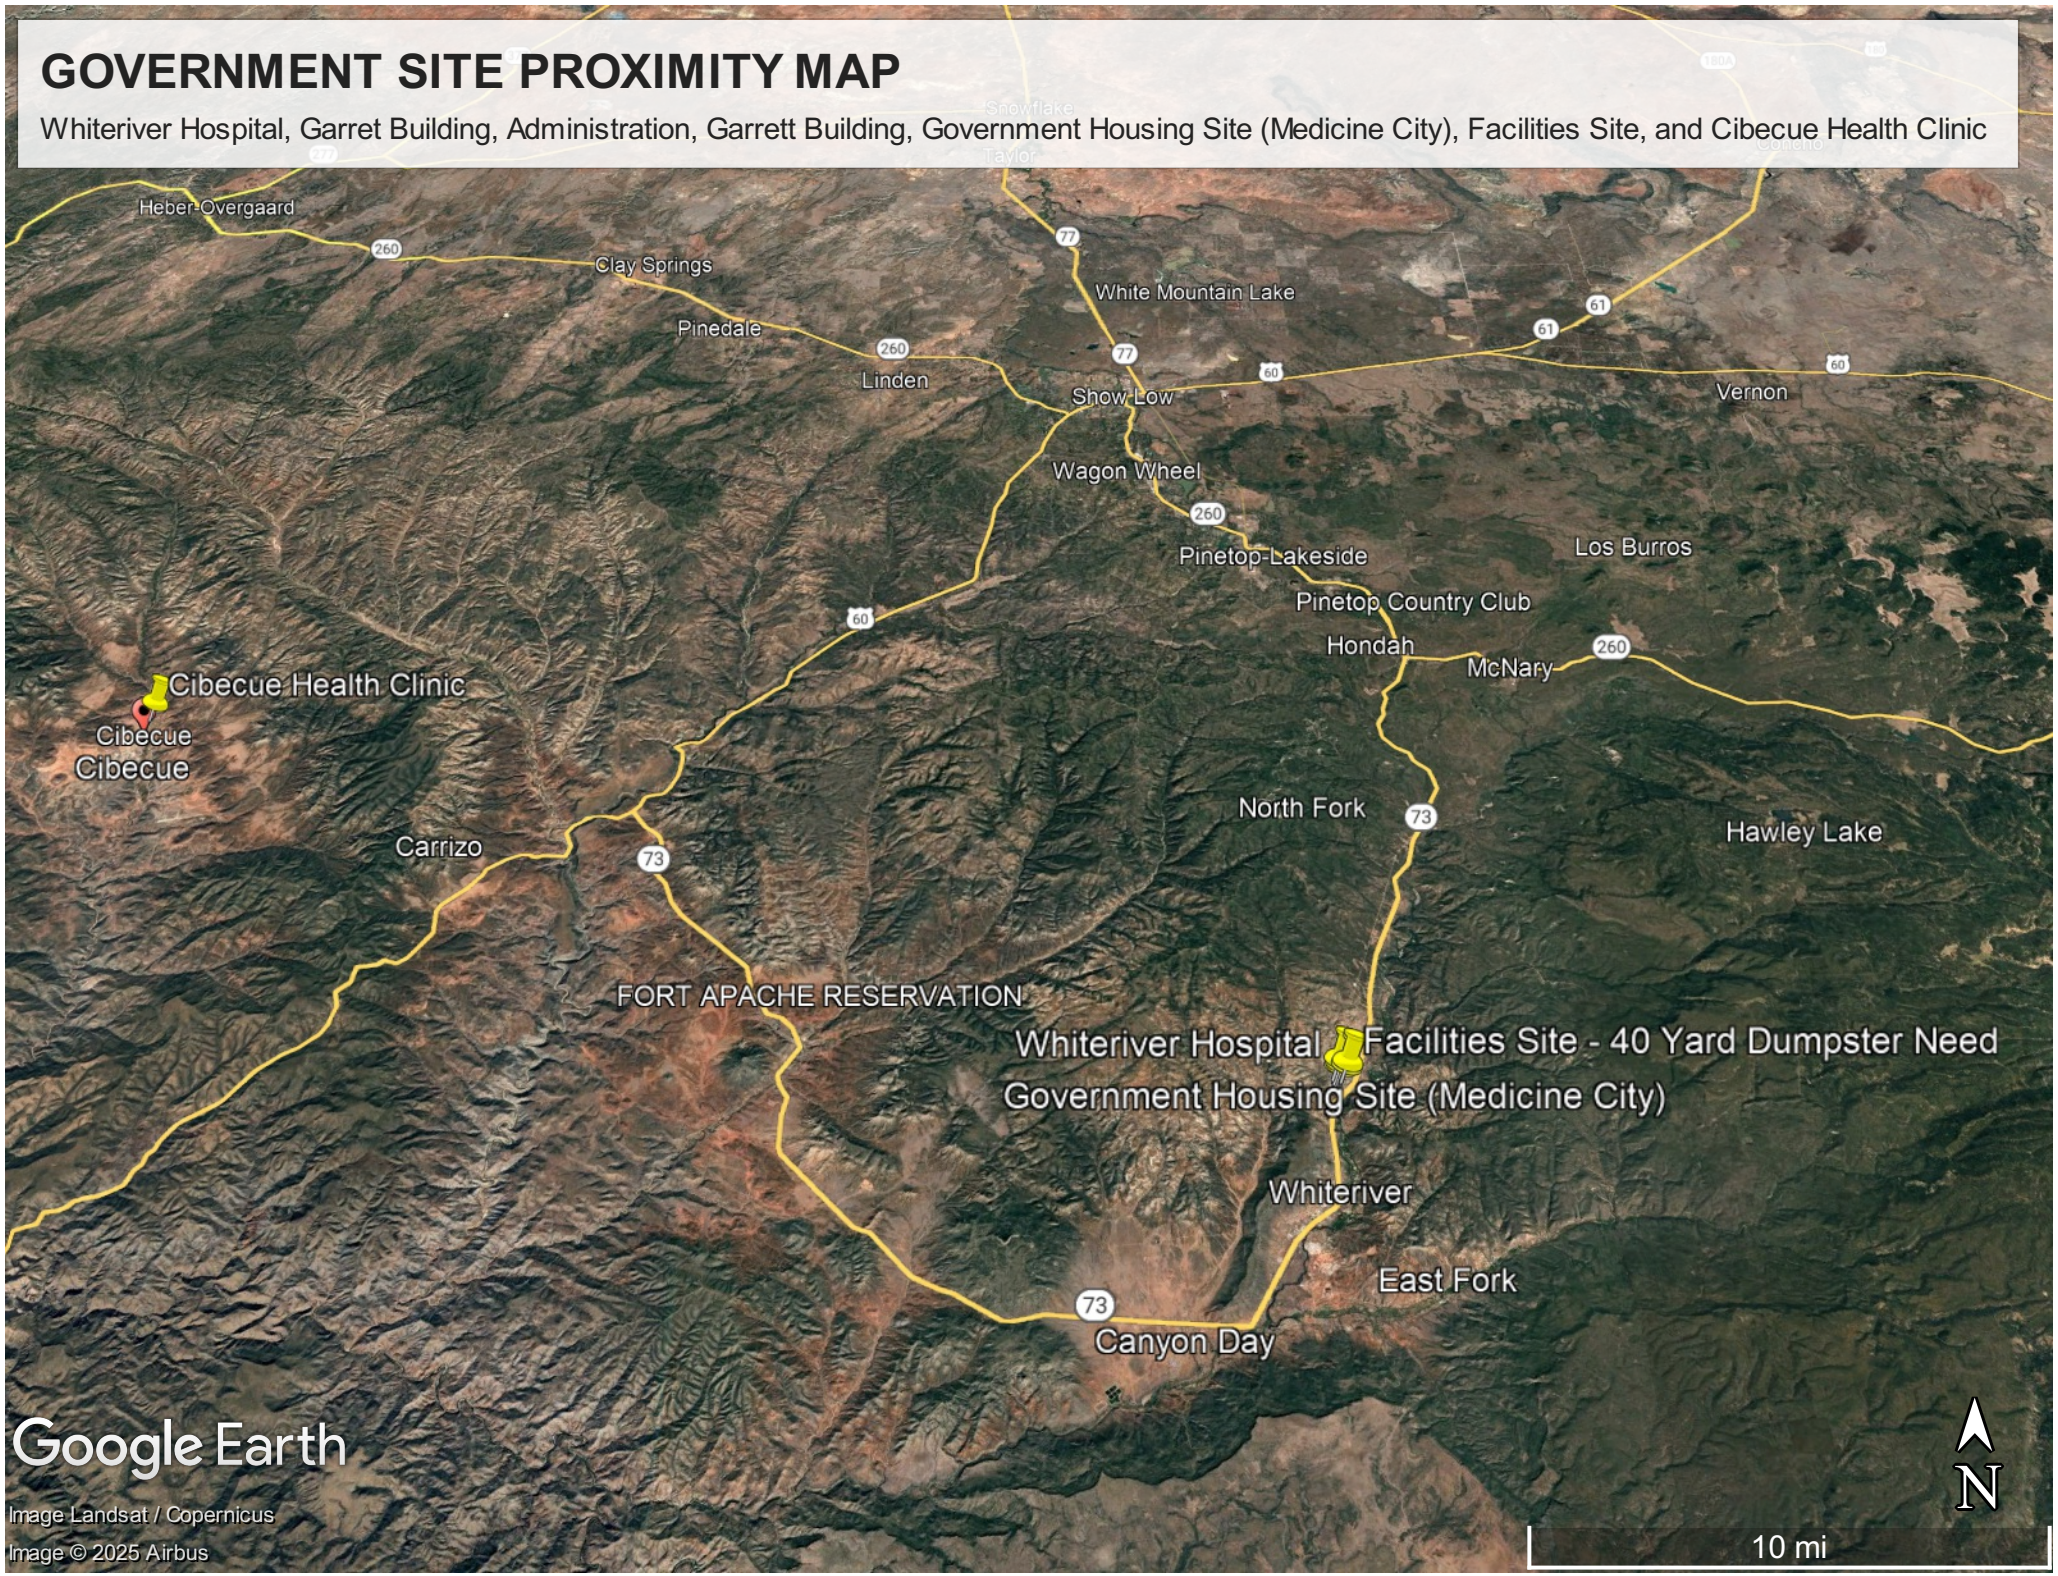

Whiteriver Hospital Proximity Map

200 West Hosptial Driver
Whiteriver, Arizona 85941
Latitude: 33.8770056
Longitude: -109.9621583

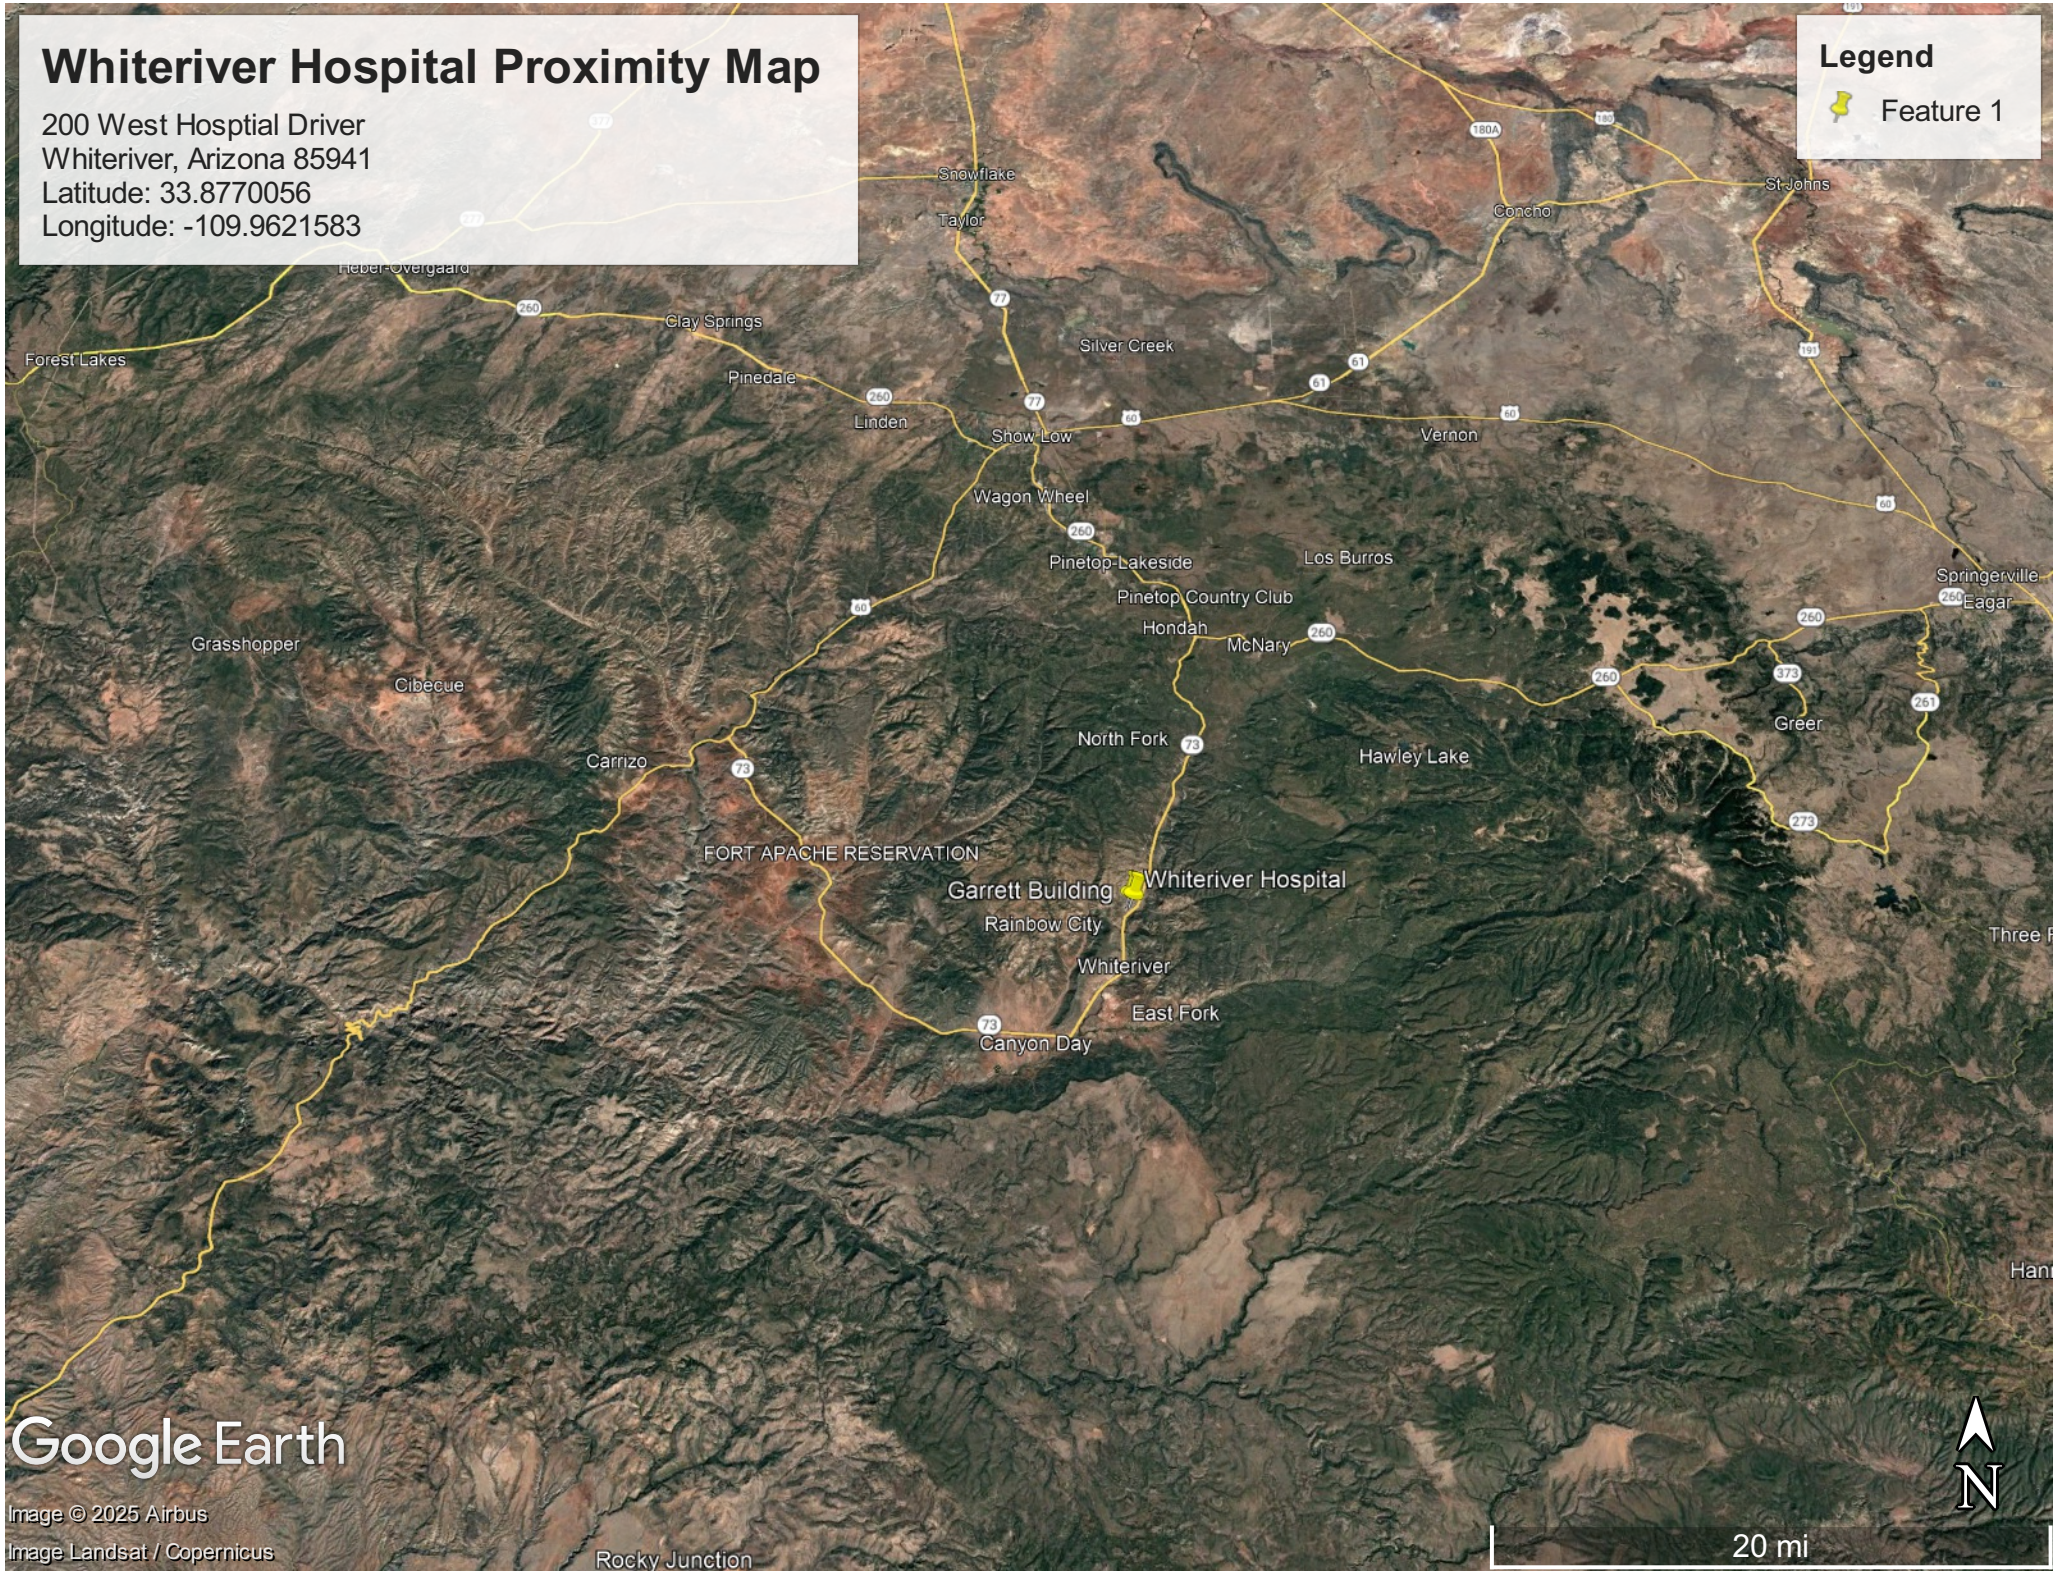

Whiteriver Hospital Location Map
200 West Hosptial Driver
Whiteriver, Arizona 85941
Latitude: 33.8770056
Longitude: -109.9621583
Legend
Feature 1
Garrett Building
Navajo Dr
Whiteriver Hospital
Apache Cir
Kuper Dr
Google Earth
Image © 2025 Airbus
N
500 ft

APPENDIX B
LIST OF GOVERNMENT OWNED FIRE EXITINGUISHERS LOCATED ONSITE.

Facilities Devices

Description starts with Fire Extinguisher AND Support Group in (40WRF-Whiteriver Facilities, 00FM-Facilities Managers, ihsiamintegrationusers, 40WRB-Whiteriver Biomed, Sailpoint IdentityIQ Managers, EEO Portal Access, All Group Managers) .or. Created by = Sgant

204 Facilities Devices

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-22009	Fire Extinguisher K-Type	Badger Fire Protection	WC-100	01-08-2013 10:00:00 PM	
40WR-20250	Fire Extinguisher		WC-100	01-09-2013 05:00:00 AM	
40WR-21818	Fire Extinguisher	General Electric Co	TCP-21/2J	01-09-2013 05:00:00 AM	
40WR-20918	Fire Extinguisher	Kidde Safety	PROS TCM-4	01-09-2013 05:00:00 PM	
40WR-20590	Fire Extinguisher	Kidde Safety	Pro-10TCM-5	01-09-2013 05:00:00 AM	
40WR-22376	Fire Extinguisher Pro 10 TCM-9 15 lbs.	Kidde Safety	Pro-10TCM-5	08-18-2025 11:42:22 AM	
40WR-22375	Fire Extinguisher Pro 10 TCM-9 15 lbs.	Kidde Safety	Pro Series Multipurpose	08-18-2025 11:35:26 AM	
40WR-20325	Fire Extinguisher	Kidde Safety	PRO 5 CDM-3	01-09-2013 05:00:00 AM	
40WR-20773	Fire Extinguisher	Kidde Safety	PRO 10CDM-3 Carb Diox	01-09-2013 05:00:00 AM	
40WR-21744	Fire Extinguisher	Kidde Safety	PRO 10 TCM-9	01-09-2013 05:00:00 AM	
40WR-21743	Fire Extinguisher	Kidde Safety	PRO 10 TCM-9	01-09-2013 05:00:00 AM	
40WR-22377	Fire Extinguisher ABC	Kidde Safety	PRO 10 TCM-5	09-11-2025 12:17:19 PM	
40WR-22374	Fire Extinguisher Pro 10 TCM-9 15 Lbs.	Kidde Safety	PRO 10 TCM-5	08-18-2025 11:39:40 AM	
40WR-21986	Fire Extinguisher	Kidde Safety	PRO 10 TCM-5	01-09-2013 05:00:00 AM	
40WR-20973	Fire Extinguisher	Kidde Safety	PRO 10 CDM-3	01-09-2013 05:00:00 PM	
40WR-20895	Fire Extinguisher	Kidde Safety	PRO PLUS 5MP 2004	01-09-2013 05:00:00 AM	
40UOF-Group Quarters_OEH_FireExt(M)	Fire Extinguisher Monthly PM- Quarters and OEH&E Assest Tag Description Location Sub-Location 40UOF-30084 Fire Extinguisher 4396-29 Quarters 29 Utility Room by Door N. Wall 40UOF-30233 Fire Extinguisher 4395-28 Quarters 28 Utility Room by door N.Wall 40UOF-30331 Fire Extinguisher 4388-30 Quarters 30 Utility Room by door N.Wall 40UOF-30243 Fire Extinguisher 4389-127 Quarters 127 Utility Room by door N.Wall 40UOF-30254 Fire Extinguisher 4390-128 Quarters 128 Utility Room by door N.Wall 40UOF-30332 Fire Extinguisher 4394-33 Quarters 33 Utility Room by door N.Wall 40UOF-30262 Fire Extinguisher 4392-129 Quarters 129 Utility Room by door N.Wall 40UOF-30269 Fire Extinguisher 4391-130 Quarters 130 Utility Room by door N.Wall 40UOF-30343 Fire Extinguisher 4393-131 Quarters 131 Utility Room by door N.Wall 40UOF-30333 Fire Extinguisher 4387-63 OEH Building	Indian Health Service (placeholder)	Preventative Maintenance	04-06-2021 12:27:08 PM	

Asset Tag	Description		Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-21808	Fire Extinguisher		Not Available	PC5ABC+1	01-09-2013 05:00:00 AM	
40WR-21987	Fire Extinguisher		Not Available	PC 5 ABC 41	01-09-2013 05:00:00 AM	
40WR-22378	Fire Extinguisher ABC		Fire Control Service Co Inc	Not Available.	09-11-2025 12:17:19 PM	
40WR-22208	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-22207	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-22206	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-22205	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-22130	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-20912	Fire Extinguisher		Badger Fire Protection	Not Available.	01-09-2013 05:00:00 AM	
40WR-22124	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-22072	Fire Extinguisher		Not Available	Not Available.	07-23-2025 10:02:05 AM	
40WR-21994	Fire Extinguisher		Not Available	Halotron-1	01-09-2013 05:00:00 AM	
40WR-20893	Fire Extinguisher			Halotron 1 5HB-2	01-09-2013 05:00:00 AM	
40WR-21804	Fire Extinguisher		ANSUL, A Johnson Controls Brand	Firemaster SY-1014	01-09-2013 05:00:00 AM	
40WR-20666	Fire Extinguisher			FC-340M-VB 1996		
40WR-21794	Fire Extinguisher		General Electric Co	CP-5LH	01-09-2013 05:00:00 AM	
40WR-20765	Fire Extinguisher		Not Available	Carbon Dioxide	01-09-2013 05:00:00 PM	
40WR-20762	Fire Extinguisher		Not Available	Carbon Dioxide	01-09-2013 05:00:00 AM	
40WR-21805	Fire Extinguisher		Badger Fire Protection	B5M 2006	01-09-2013 05:00:00 AM	
40WR-20655	Fire Extinguisher		Badger Fire Protection	B5M	01-09-2013 05:00:00 AM	
40WR-20593	Fire Extinguisher		Badger Fire Protection	B5M	01-09-2013 05:00:00 AM	
40WR-21815	Fire Extinguisher		Badger Fire Protection	B54-2004	01-09-2013 05:00:00 AM	
40WR-22388	Fire Extinguisher		Amerex Corp	B500 5 lb. ABC		
40WR-22128	Fire Extinguisher			B500	04-21-2021 12:29:03 PM	
40WR-20646	Fire Extinguisher		Badger Fire Protection	B500	01-08-2013 10:00:00 PM	
40WR-22125	Fire Extinguisher			B500	04-21-2021 12:29:03 PM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-22127	Fire Extinguisher		B500	04-21-2021 12:29:03 PM	
40WR-22126	Fire Extinguisher		B500	04-21-2021 12:29:03 PM	
40WR-21093	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20996	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20353	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20965	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20275	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-21068	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20311	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20999	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20280	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20605	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20678	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20620	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20335	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20344	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 AM	
40WR-20630	Fire Extinguisher	Amerex Corp	B456 10 lb. ABC	01-09-2013 05:00:00 PM	
40WR-20948	Fire Extinguisher	Buckeye Fire Equipment	B-456	01-09-2013 05:00:00 AM	
40WR-20939	Fire Extinguisher	Buckeye Fire Equipment	B-456	01-09-2013 05:00:00 AM	
40WR-20777	Fire Extinguisher	Badger Fire Protection	B-20-PK	01-09-2013 05:00:00 AM	
40WR-20594	Fire Extinguisher	Badger Fire Protection	ADY-550	01-09-2013 05:00:00 AM	
40WR-21793	Fire Extinguisher	Badger Fire Protection	ADV-550 2013	01-09-2013 05:00:00 AM	
40WR-20377	Fire Extinguisher	Badger Fire Protection	ADV-550	01-09-2013 05:00:00 AM	
40WR-20364	Fire Extinguisher	Badger Fire Protection	ADV-550	01-09-2013 05:00:00 AM	
40WR-21768	Fire Extinguisher	Badger Fire Protection	ADV-20	01-09-2013 05:00:00 PM	

Asset Tag	Description		Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-20768	Fire Extinguisher		Badger Fire Protection	ADV-20	01-08-2013 10:00:00 PM	
40WR-20240	Fire Extinguisher		Amerex Corp	A500	01-09-2013 05:00:00 AM	
40WR-21810	Fire Extinguisher		Badger Fire Protection	5MB-6H 2007	01-08-2013 10:00:00 PM	
40WR-21988	Fire Extinguisher		Badger Fire Protection	5MB-6H 2006	01-09-2013 05:00:00 AM	
40WR-21795	Fire Extinguisher		Badger Fire Protection	5MB-6H 2005	01-09-2013 05:00:00 AM	
40WR-21076	Fire Extinguisher		Badger Fire Protection	5MB-6H 2005	01-08-2013 10:00:00 PM	
40WR-21798	Fire Extinguisher		Badger Fire Protection	5MB-6H 2005	01-09-2013 05:00:00 AM	
40WR-21812	Fire Extinguisher		Badger Fire Protection	5MB-6H 2005	01-09-2013 05:00:00 AM	
40WR-21811	Fire Extinguisher		Badger Fire Protection	5MB-6H 2005	01-09-2013 05:00:00 AM	
40WR-21806	Fire Extinguisher		Badger Fire Protection	5MB-6H 1999	01-08-2013 10:00:00 PM	
40WR-21792	Fire Extinguisher		Badger Fire Protection	5MB-6H 1999	01-09-2013 05:00:00 AM	
40WR-21807	Fire Extinguisher		Badger Fire Protection	5MB-6H 1999	01-09-2013 05:00:00 AM	
40WR-20879	Fire Extinguisher		Badger Fire Protection	5MB-6H 2004	01-09-2013 05:00:00 AM	
40WR-20882	Fire Extinguisher		Badger Fire Protection	5MB-6H 2004	01-09-2013 05:00:00 AM	
40WR-20943	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21563	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21573	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21609	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20867	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21061	Fire Extinguisher		Badger Fire Protection	5MB-6H	04-21-2021 12:29:03 PM	
40WR-21086	Fire Extinguisher		Badger Fire Protection	5MB-6H	04-21-2021 12:29:03 PM	
40WR-20962	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21550	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21758	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20591	Fire Extinguisher		Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-22144	Fire Extinguisher	Badger Fire Protection	5MB-6H	04-21-2021 12:29:03 PM	
40WR-20592	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20692	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20255	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21079	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20541	Fire Extinguisher	Badger Fire Protection	5MB-6H	04-21-2021 12:29:03 PM	
40WR-21503	Fire Extinguisher	Badger Fire Protection	5MB-6H		
40WR-21557	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-08-2013 10:00:00 PM	
40WR-20946	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20285	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-22123	Fire Extinguisher	Badger Fire Protection	5MB-6H	04-21-2021 12:29:03 PM	
40WR-21543	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21637	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21535	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21600	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21507	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20256	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20889	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21098	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21518	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-20565	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 AM	
40WR-21532	Fire Extinguisher	Badger Fire Protection	5MB-6H	01-09-2013 05:00:00 PM	
40WR-21802	Fire Extinguisher	Kidde Safety	5KS Carbon Dioxide 1977	01-09-2013 05:00:00 AM	
40WR-21796	Fire Extinguisher	Buckeye Fire Equipment	5HISA-40ABC	01-09-2013 05:00:00 PM	
40WR-21797	Fire Extinguisher	Buckeye Fire Equipment	5HISA-40ABC	01-09-2013 05:00:00 AM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-21989	Fire Extinguisher	Buckeye Fire Equipment	5HISA-40 ABC	01-09-2013 05:00:00 AM	
40WR-21809	Fire Extinguisher	Buckeye Fire Equipment	5HISA-40 ABC	01-09-2013 05:00:00 AM	
40WR-20595	Fire Extinguisher	Buckeye Fire Equipment	5HI-SA40-ABC	01-09-2013 05:00:00 PM	
40WR-22034	Fire Extinguisher	Buckeye Fire Equipment	5HI-SA-40 ABC	01-08-2013 10:00:00 PM	
40WR-21803	Fire Extinguisher	Buckeye Fire Equipment	5HI-5A-40ABC	01-09-2013 05:00:00 AM	
40WR-21919	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-21921	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-22035	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-08-2013 10:00:00 PM	
40WR-21922	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-21924	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-21920	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-21923	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-22011	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-08-2013 10:00:00 PM	
40WR-21918	Fire Extinguisher	Buckeye Fire Equipment	5HI SA40 ABC	01-09-2013 05:00:00 AM	
40WR-21985	Fire Extinguisher	Buckeye Fire Equipment	5HI SA-40 ABC		
40WR-20809	Fire Extinguisher	Buckeye Fire Equipment	5HI SA-40	01-09-2013 05:00:00 AM	
40WR-20804	Fire Extinguisher	Buckeye Fire Equipment	5HI SA-40	01-09-2013 05:00:00 AM	
40WR-21063	Fire Extinguisher	Buckeye Fire Equipment	5HI SA-40	01-08-2013 10:00:00 PM	
40WR-20579	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-21993	Fire Extinguisher	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-21992	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 PM	
40WR-20584	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-20596	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-20581	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-20578	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-20582	Fire Extinguisher - Halotron 1	Badger Fire Protection	5HB-2	01-09-2013 05:00:00 AM	
40WR-21799	Fire Extinguisher	Kidde Safety	5CDM-3 Carbon Dioxide 1998	01-09-2013 05:00:00 AM	
40WR-20760	Fire Extinguisher	Badger Fire Protection	5BM-6H	01-09-2013 05:00:00 PM	
40WR-20602	Fire Extinguisher	Buckeye Fire Equipment	5.5HI SA-40	01-09-2013 05:00:00 AM	
40WR-21750	Fire Extinguisher	Buckeye Fire Equipment	5.5 HISA-40STD	01-09-2013 05:00:00 AM	
40WR-20875	Fire Extinguisher	Buckeye Fire Equipment	5.5 HISA-40STD	01-09-2013 05:00:00 AM	
40WR-21800	Fire Extinguisher	Kidde Safety	5 TCM-4	01-09-2013 05:00:00 AM	
40WR-20369	Fire Extinguisher	Kidde Safety	460 HDM	01-09-2013 05:00:00 AM	
40WR-20393	Fire Extinguisher	Buckeye Fire Equipment	4515CD	01-09-2013 05:00:00 PM	
40WR-20614	Fire Extinguisher	Buckeye Fire Equipment	451-5CD	01-09-2013 05:00:00 PM	
40WR-20884	Fire Extinguisher	Kidde Safety	4-A:60-B.C	01-09-2013 05:00:00 AM	
40WR-20862	Fire Extinguisher	Kidde Safety	4-A:60-B.C	01-09-2013 05:00:00 AM	
40WR-20856	Fire Extinguisher	Kidde Safety	4-A:60-B.C	01-09-2013 05:00:00 AM	
40WR-22366	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	06-28-2025 09:14:17 AM	
40WR-22370	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	06-28-2025 09:14:17 AM	
40WR-22371	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	06-28-2025 09:14:17 AM	
40WR-22369	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	06-28-2025 09:14:17 AM	
40WR-22367	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	06-28-2025 09:14:17 AM	
40WR-22373	Fire Extinguisher	Amerex Corp	331 15 lb. CO2	07-13-2025 09:15:09 AM	
40WR-20821	Fire Extinguisher	Badger Fire Protection	250MB-1	01-09-2013 05:00:00 AM	
40WR-21991	Fire Extinguisher	Badger Fire Protection	25 HB-2	01-09-2013 05:00:00 AM	
40WR-21583	Fire Extinguisher - Halotron	Badger Fire Protection	2.5 HB-2	01-09-2013 05:00:00 AM	
40WR-20769	Fire Extinguisher - Halotron 1		2.5 HB-2	01-09-2013 05:00:00 AM	
40WR-20763	Fire Extinguisher	Not Available	15AKR	01-09-2013 05:00:00 AM	
40WR-21751	Fire Extinguisher	Buckeye Fire Equipment	10SHI-SA-ABC	01-09-2013 05:00:00 AM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-21013	Fire Extinguisher	Buckeye Fire Equipment	10S HI	01-09-2013 05:00:00 AM	
40WR-20699	Fire Extinguisher		10NB-8H	01-09-2013 05:00:00 AM	
40WR-20970	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20793	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20580	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20792	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20583	Fire Extinguisher -	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20790	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20980	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20827	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20902	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20766	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20791	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20866	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20577	Fire Extinguisher	Badger Fire Protection	10MB-8H	01-09-2013 05:00:00 AM	
40WR-20618	Fire Extinguisher	Buckeye Fire Equipment	10HI50 Buckeye ABC10	01-09-2013 05:00:00 AM	
40WR-20772	Fire Extinguisher	Buckeye Fire Equipment	10HI-SA80-ABC	01-09-2013 05:00:00 AM	
40WR-20774	Fire Extinguisher	Kidde Safety	10-A:80-BC	01-08-2013 10:00:00 PM	
40WR-20775	Fire Extinguisher	Kidde Safety	10-A:80-BC	01-09-2013 05:00:00 PM	
40WR-20764	Fire Extinguisher	Not Available	10 Carbon Dioxide	01-09-2013 05:00:00 AM	
40UOF-30395	Fire Extinguisher. Kiddie. Grey Tag: 40UOF-30395. Assigned to GSA Truck and for backup for used fire extinguishers.			10-24-2021 12:41:39 PM	
40WR-20844	Fire Extinguisher	Amerex Corp		01-09-2013 05:00:00 AM	
40WR-22262	Fire Extinguisher			03-27-2025 12:57:16 PM	
40WR-22248	Fire Extinguisher			03-27-2025 12:57:16 PM	
40WR-22236	Fire Extinguisher			03-27-2025 12:57:16 PM	

Asset Tag	Description	Asset Manufacturer	Asset Model Name	Installation Date	Location
40WR-20892	Fire Extinguisher	Kidde Safety		01-09-2013 05:00:00 AM	
40WR-20757	Fire Extinguisher	Buckeye Fire Equipment		01-09-2013 05:00:00 PM	
40WR-20297	Fire Extinguisher	Amerex Corp		04-21-2021 12:28:00 PM	
40WR-20906	Fire Extinguisher	Buckeye Fire Equipment		01-09-2013 05:00:00 PM	
40WR-21995	Fire Extinguisher			01-09-2013 05:00:00 AM	
40WR-22299	Fire Extinguisher			03-27-2025 01:00:04 PM	
40WR-20886	Fire Extinguisher	Buckeye Fire Equipment		01-09-2013 05:00:00 PM	
40WR-20907	Fire Extinguisher	Buckeye Fire Equipment		01-09-2013 05:00:00 AM	
40WR-20900	Fire Extinguisher	Kidde Safety		01-09-2013 05:00:00 PM	
40WR-22263	Fire Extinguisher			03-27-2025 12:57:16 PM	
40WR-22283	Fire Extinguisher			03-27-2025 01:00:04 PM	

Response time(ms): 1689, network: 4, server: 890, browser: 795