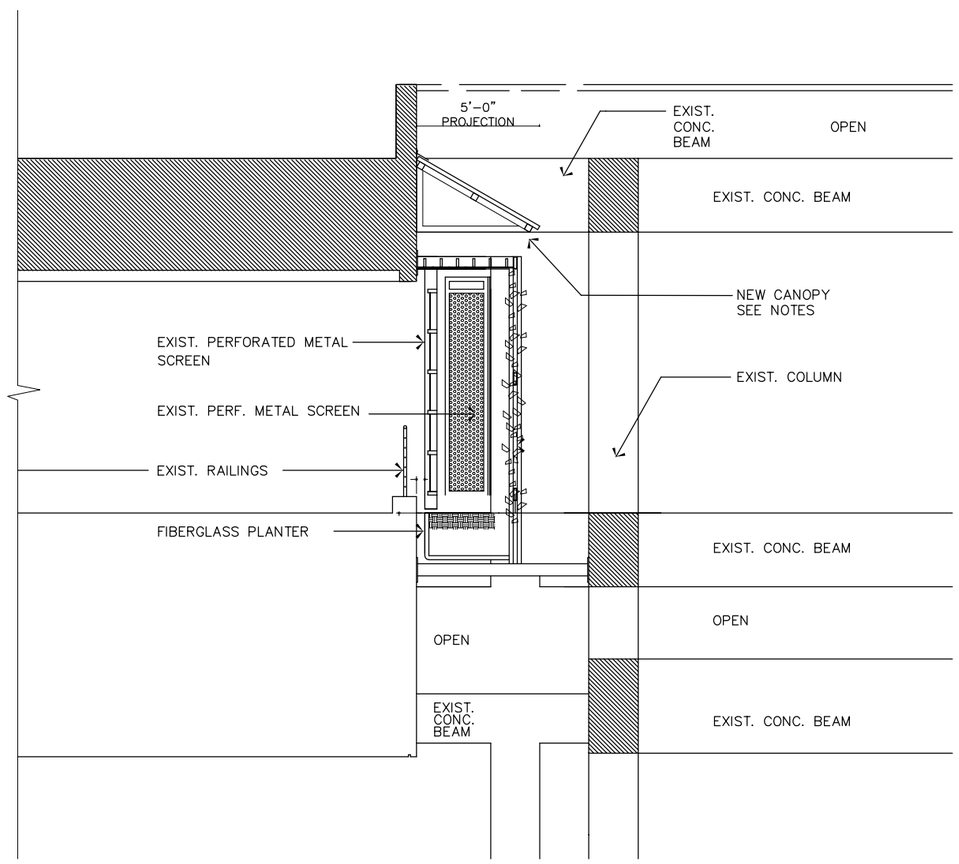


# NEW CANOPY CONCEPTUAL SECTION

Scale: N.T.S.

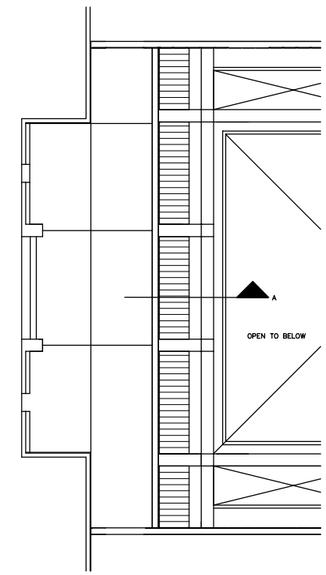


TERRACE FLOOR PLAN

Scale: NTS

CANOPY, TYPE E METAL DECK, GALV. STEEL FRAME

1. ALL GALVANIZED STEEL SHALL BE PRIMED & PAINTED AS PER PROJECT SPECIFICATIONS.
2. DIMENSIONS INDICATED ARE FOR AESTHETIC CONSIDERATIONS ONLY, TO ESTABLISH A DESIGN CONCEPT. CONTRACTOR SHALL DETERMINE THE OPTIMUM SIZES FOR HANDLING, INSTALLATION AND FIELD JOINTING.
3. MECHANICALLY ANCHOR FRAME TO STRUCTURAL MEMBERS TO COMPLY WITH SEISMIC. WIND LOAD, DL/LL REQUIREMENTS.
4. INSULATE DISSIMILAR MATERIALS TO PREVENT GALVANIC ACTION, WHERE REQUIRED.
5. APPLY SEALANTS AS REQUIRED BY MANUFACTURER TO PRESERVE INTEGRITY OF MEMBERS.
6. APPLY ANTI-RUST PAINT/COATING. COLOR TO BE SELECTED BY VA ARCHITECT.
7. SUBMIT MATERIAL SAMPLES AND SHOP DRAWINGS FOR VA PM/VA ARCHITECT'S APPROVAL PRIOR TO FABRICATION.
8. REFER TO SCOPE OF WORK FOR ADDITIONAL REQUIREMENTS.