AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE	OF	PAGES
	1		5

2. AMENDMENT/MODIFICATION NUMBER	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQUISITION NUMBER	5. PROJECT NUMBER *(If applicable)*
0001	06/24/2026		

6. ISSUED BY CODE LFA

BLM FA-NTL INTRAGCY FIRE CTR(FA250)
3833 S. DEVELOPMENT AVE.
BOISE ID 83705

7.ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(Number, street, county, State and ZIP Code)*

CODE FACILITY CODE

(X) 9A. AMENDMENT OF SOLICITATION NUMBER
140L3726R0007

[X] 9B. DATED *(SEE ITEM 11)*
06/12/2026

10A. MODIFICATION OF CONTRACT/ORDER NUMBER

[ ]

10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

[X] The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers [X] is extended. [ ] is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NUMBER AS DESCRIBED IN ITEM 14.

CHECK ONE

[ ] A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: *(Specify authority)* THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NUMBER IN ITEM 10A.

[ ] B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).

[ ] C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:

[ ] D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor [ ] is not [ ] is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (*Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

See continuation page

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF CONTRACTING OFFICER *(Type or print)*	
		Matthew Steele	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		*(Signature of Contracting Officer)*	

Previous edition unusable

STANDARD FORM 30 (REV. 11/2016)
Prescribed by GSA FAR (48 CFR) 53.243

ITEM NO. (A)	SUPPLIES/SERVICES (B)	QUANTITY (C)	UNIT (D)	UNIT PRICE (E)	AMOUNT (F)
	The purpose of this amendment is to: 1. Provide responses to questions received. 2. Provide pictures of subject work area (5 total pictures). 3. Extend the response due date for proposals from June 26, 2026 at 10 AM MT to June 30, 2026 at 2 PM MT. All other terms and conditions not changed by this amendment and stated in the solicitation remain the same. This amendment must be acknowledged in accordance with terms stated within the solicitation.				

Request for Information

United States Department of the Interior		
Solicitation:	140L3726R0007	
Project:	NIFC CMPS RFIMS Infrastructure Demo	
Title:	**Questions and Answers**	

Inquiry number	Question	Government Response
1	Do all onsite personnel need to be US Citizens?	All personnel entering NIFC are required to possess and show Federal or State issued identification.
2	Is SHPO a concern?	If you mean a State Historic Preservation Officer, the area identified in Attachment 2 key note 8 is not within a historic preservation area.
3	Is power available at the site? Is it free of charge?	FAR 52.236-14 (Availability and Use of Utility Services) is incorporated. There are two 120V 15A outdoor outlets within 110 feet, at building 115-NWS that may be used for this RFQ work at no charge to the contractor.
4	What is the SWPP/E&SC process and is there a permit required?	The site location is on federal land, in the State of Idaho, permitting per Idaho Department of Environmental Quality. No permit required for this area of work which is less than one acre. There should be controls in place to contain erosion within the work site.
5	Will the contract be awarded 30 days after proposals are submitted?	Quotes must remain valid a minimum of 60 days as stated on page 4 General Requirements paragraph (g) of this RFQ.

6	Is there a landfill onsite where construction debris can be disposed of? Is there a fee?	All construction debris must be removed offsite by the contractor per Attachment 2 general sheet note 1.
7	Is there a landfill on base to dispose of the hazardous materials? If yes, is there a charge? Are there any disconnect fees for the utilities?	All construction debris must be removed offsite by the contractor per Attachment 2 general sheet note 1. The government will contact Idaho Power for disconnects.
8	If a permit is required, what is the permit process?	No permit is required.
9	Please provide confirmation as to whether metal and machinery can be salvaged or if the installation is retaining any items?	Per attachment 2 general sheet note 1 remove and dispose of all items offsite. This disposal shall be completed via a combination of recycling, salvaging, and landfill. All disposal shall be reported to the COR at the end of the project.
10	Are there ancillary items to remain on the facility site?	The items impacted are identified on Attachment 2, no ancillary items expected beyond what was noted.
11	Is there any restrictions to recycling concrete?	No concrete restrictions are identified.
12	Can we assume there will be water available within 50 feet at no cost to the contractor?	FAR 52.236-14 (Availability and Use of Utility Services) is incorporated. Outdoor wall mounted hose bibb at 115-NWS building is available for contractor use for this RFQ. Distance is approximately 110 ft. away.
13	Can the Government confirm the exact quantity and number of concrete deadman foundations to be removed?	Refer to Attachment 2 of this RFQ for quantities of foundations.
14	Are the concrete foundations reinforced with rebar, post-tension cables, or embedded steel beyond what is shown in Attachment 3?	All concrete foundations have rebar layers throughout at multiple points and elevations, Attachment 3 indicates the reinforcement that is installed.
15	Can the Government provide an estimated total linear footage of underground grounding conductor and conduit to be removed?	There is approximately 300 linear feet of grounding conductor to be removed. Conduit can be estimated from Attachment 2.
16	Will Idaho Power disconnect and remove the primary-side electrical connections, or is this the contractor's responsibility?	Per attachment 2 key note 10, contractor to remove the power feed back to primary transformer FC-23. The primary feed to FC-23 and the transformer FC-23 are to remain, as it feeds adjacent building 115-NWS.
17	Who will own the removed transformer and meter equipment? Is salvage retained by the contractor or returned to the Government?	Per attachment 2 key note 9, only the meter is identified to be returned to the government. The secondary transformer shall be removed from the site by the contractor.
18	Are there any known hazardous materials (PCB-containing transformer oil, lead paint, contaminated soil, etc.) associated with the infrastructure?	The transformer nameplate photo is provided below so that the materials associated with that transformer can be determined. No other hazardous materials are known. It is identified as a dry-type transformer. The area of work was constructed in the year 2022.
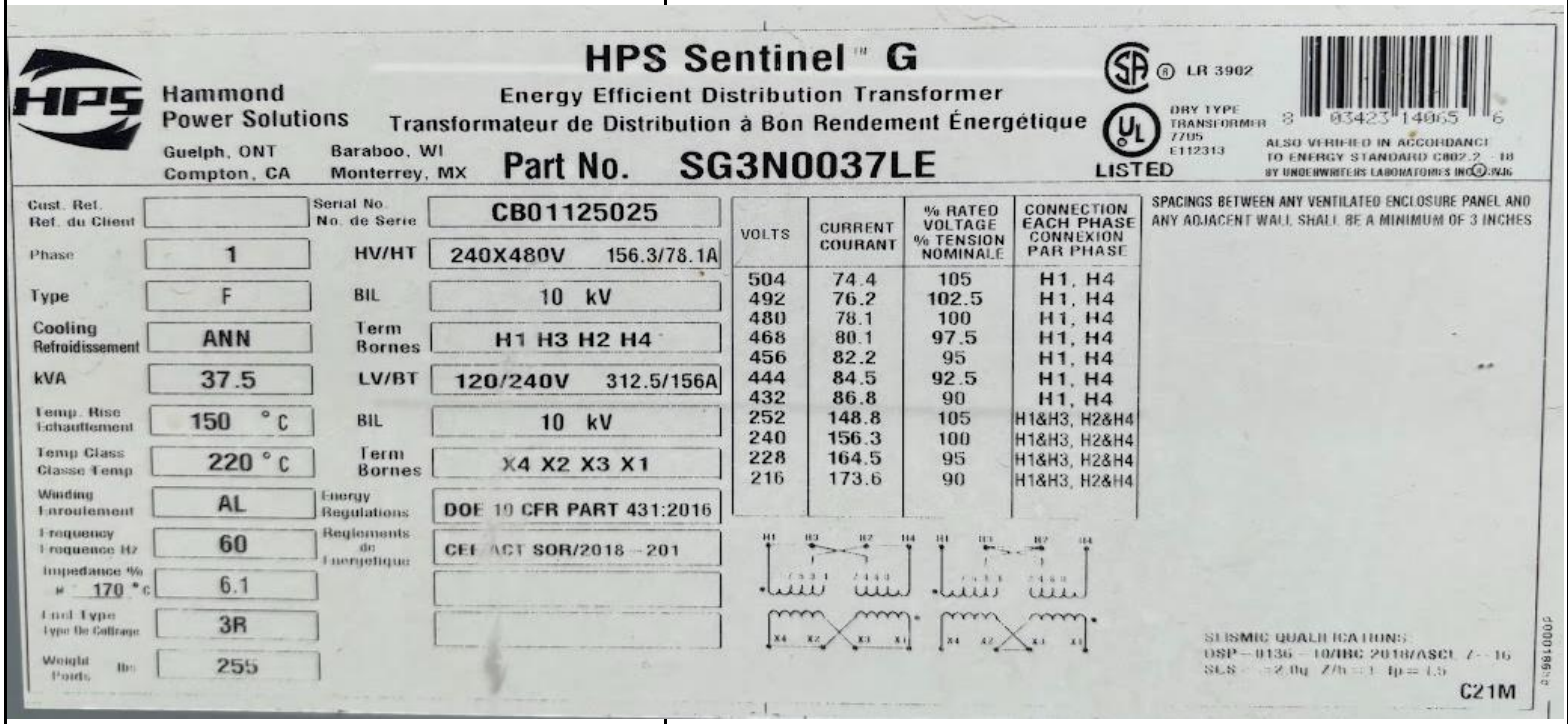
19	Will the Government provide a designated staging area and concrete recycling/disposal location on campus?	The gravel area shown on Attachment 2 between the walking path and the 120-Inflation Tower, for 30 feet from the North of the Area of Work, can be used as a temporary staging area for up to four weeks during active work. The driving lane beyond that area must remain open for movement of campus equipment. Personnel vehicles must park in the General Parking areas identified on Attachment 1.
20	Is a site visit available before bid submission?	Area photos are part of this amendment, see for clarified area of work.
21	Can the Government provide the engineer's estimate or anticipated project magnitude range?	The engineer's estimate can not be provided. The project magnitude range is no longer part of the Federal Acquisition Regulations therefore is not provided.
22	Is the contractor required to remove all underground conduits or only those specifically identified in Attachment 2?	Only those specifically identified in Attachment 2. Note that the conduit identified under key note 6 is to remain.
		See below secondary transformer nameplate, which is a Photo for #18: