Amendment 5

RFQ# 1232SA26Q0361 - Remove Walk-in Cooler located in B1, SB46 (Athens, GA)

Questions and Answers:

1. Would USDA be able to provide:
   - Dimensions of the existing walk-in cooler
     Answer: the rough dimensions are 23'x 21'
   - Manufacturer/model information (if available)
     Answer: Unknown.
   - Photos of the existing unit:
     Answer: see below
   - Confirmation whether associated compressor/condenser equipment is included in the removal scope
     Answer: Yes, we would like them removed with the supply lines capped with enough length to make a future connection.
   - Confirmation whether fire sprinkler disconnects are required
     Answer: Disconnects are not required. Simply leave the fire sprinklers where they are in the space. Undisturbed if possible.
   - Clarification on room location (solicitation references SB46 while the SOW references SB36)
     Answer: The correct room number is B1-SB36.
   - Any available drawings/layout information
     Answer: There are no drawings. The government requires everything removed from the concrete floor to the steel decking and from the East wall to the West wall. The West wall (dividing B1-SB36 and B1-SB35) shall be built with steel studs from the concrete floor to the steel decking, insulated throughout, covered with 5/8 sheet rock on both sides, and fire taped and mudded.

2. The revised Statement of Work references work to be performed in accordance with project requirements, drawings, and applicable codes. We did not see a separate plan sheet, floor plan, sketch, or drawing file included in the solicitation attachments. Could you please confirm whether any plans, drawings, sketches, or room layout documents are available for this requirement?
   a. ANSWER: There are no plans or drawings for this project.
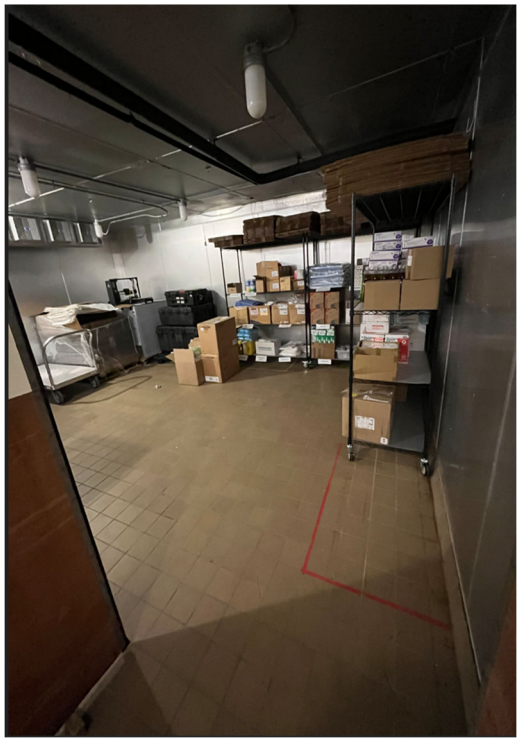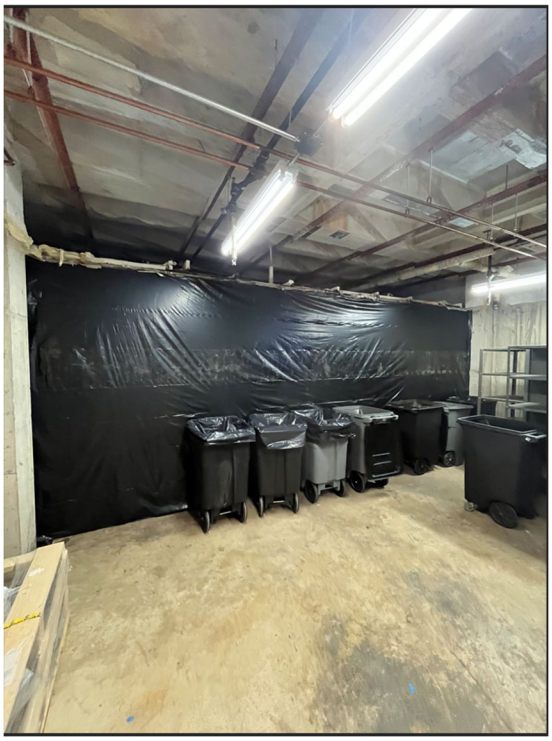
3. Confirm whether the correct room number is B1, SB46 or B1, SB36, since both references appear in the solicitation documents.
    a. ANSWER: The correct room number is B1-SB36