

Document Summary

Detail Type	Detail
Event ID	0000034618
Commodity	PALLETS, WOODEN
Attachment (Exhibit)	Attachment 2B
Group-Class	3990
Bid Specification	3990-01A-01
Revision Level	1
Revision Date	Feb 10, 2020
Agency Name	Multiple

Revision History

Bid Spec	Rev Level	Revision Date	Author	Summary of Changes
3990-01A-01	0	Jan, 2001	Staff	Initial release
3990-01A-01	1	Jan 21, 2020	Lai, Y	ADA compliance, removed non-applicable requirements.

Table of Contents

Document Summary	1
Revision History	1
Table of Contents	2
1.0 SCOPE	3
2.0 APPLICABLE LAWS and INDUSTRY STANDARDS	3
3.0 TECHNICAL REQUIREMENTS	3
3.1 COMMONLY USED PALLET TYPES	3
3.2 COMMONLY USED PALLET SIZE	4
3.3 PALLETS QUALITY	5

1.0 SCOPE

This specification covers wooden pallets intended for use with low lift pallet trucks or forklift trucks.

2.0 APPLICABLE LAWS and INDUSTRY STANDARDS

Not applicable

3.0 TECHNICAL REQUIREMENTS**3.1 COMMONLY USED PALLET TYPES**

The pallets shall be constructed base on the type in Figure 1 and Figure 2.

Figure 1 – Type 2 Wooden Pallet


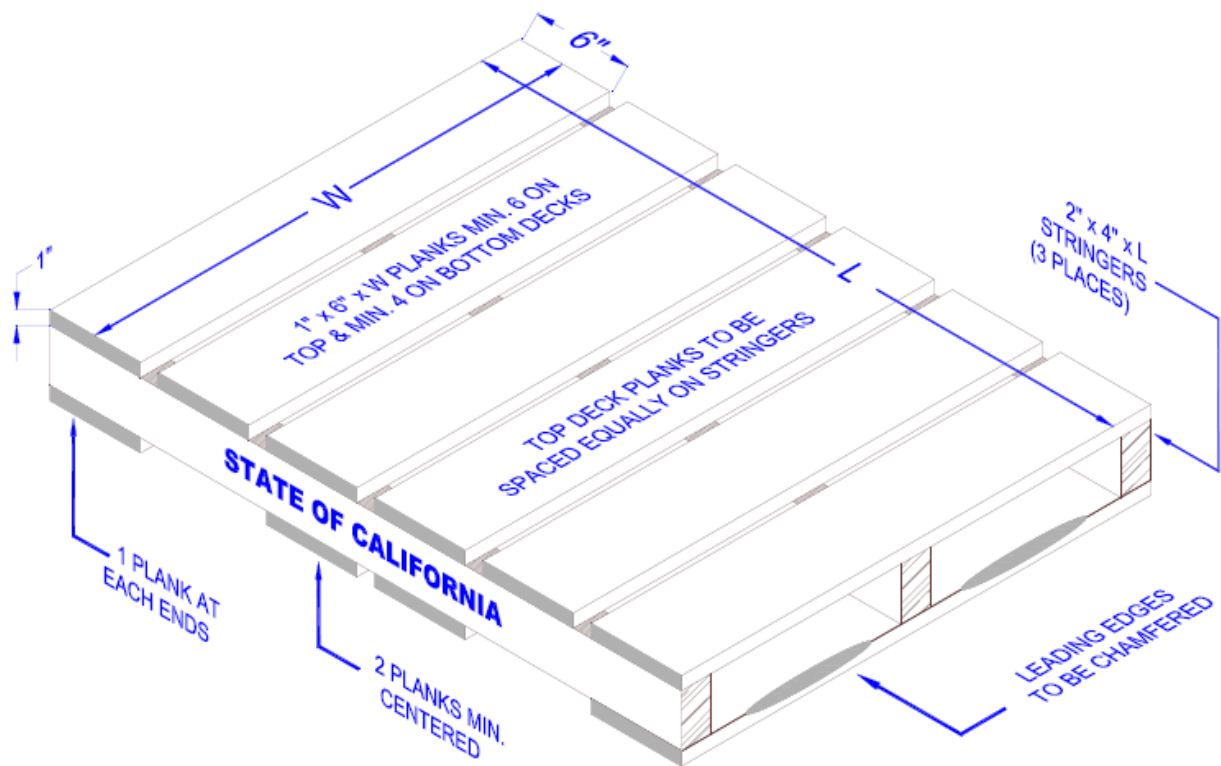


Figure 2 - Type 4 Single Wing Wooden Pallet

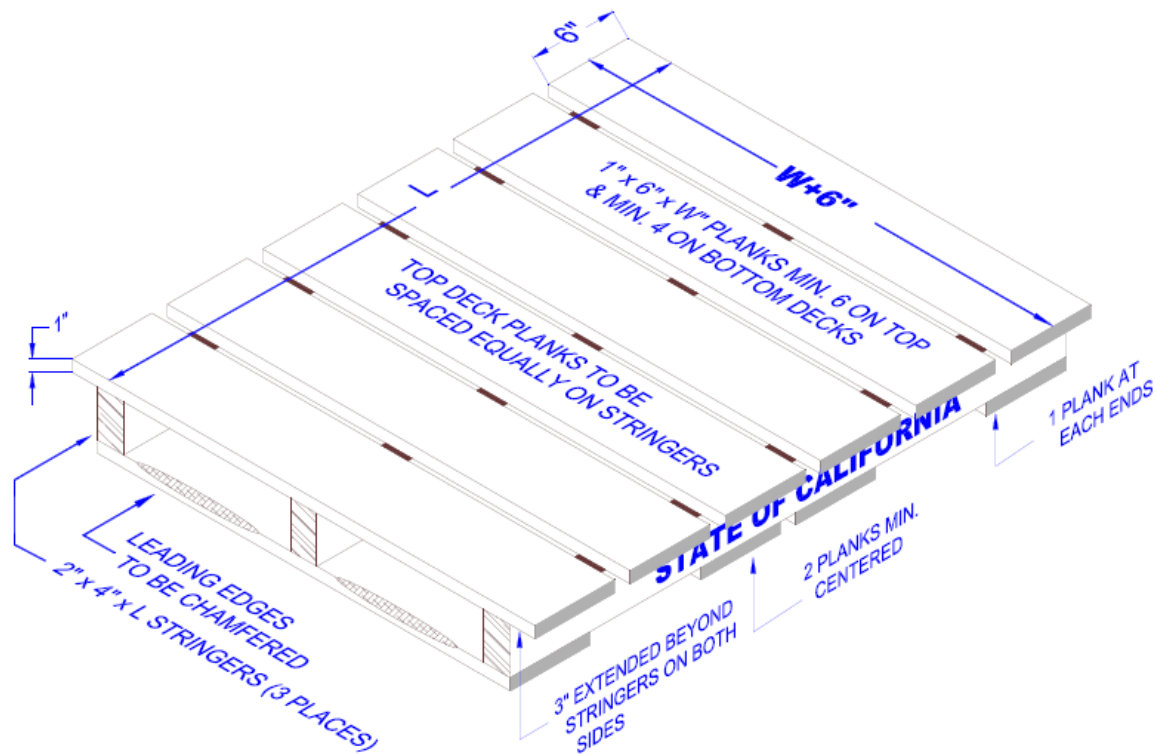

3.2 COMMONLY USED PALLET SIZE

The pallets shall be constructed base on the size in Table 1.

Table 1- Commonly Used Pallet Types & Size

SIZE	TYPE	TOP DECK	BOTTOM DECK
1	2 (Fig. 1)	42\"L x 36\"W Min. Six 1\" x 6\" x 36\" deck-boards, spaced evenly along the pallet width	42\"L x 36\"W Min. Four 1\" x 6\" x 36\" boards. One placed each end of the stingers Two at center of the stingers
2	2 (Fig. 1)	42\"L x 42\"W Min. Six 1\" x 6\" x 42\" deck-boards, spaced evenly along the pallet width	42\"L x 42\"W Min. Four 1\" x 6\" x 42\" boards. One placed each end of the stingers Two at center of the stingers
3	2 (Fig. 1)	44\"L x 44\"W Min. Six 1\" x 6\" x 44\" deck-boards, spaced evenly along the pallet width	44\"L x 44\"W Min. Four 1\" x 6\" x 44\" boards. One placed each end of the stingers Two at center of the stingers(Fig. 1)
4	2 (Fig. 1)	45\"L x 36\"W Min. Six 1\" x 6\" x 36\" deck-boards, spaced evenly along the pallet width	45\"L x 36\"W Min. Four 1\" x 6\" x 36\" boards. One placed each end of the stingers Two at center of the stingers

5	2 (Fig. 1)	46"L x 44"W Min. Six 1" x 6" x 44" deck-boards, spaced evenly along the pallet width	46"L x 44"W Min. Four 1" x 6" x 44" boards. One placed each end of the stingers Two at center of the stringers
6	2 (Fig. 1)	48"L x 48"W Min. Six 1" x 6" x 48" deck-boards, spaced evenly along the pallet width	48"L x 48"W Min. Four 1" x 6" x 48" boards. One placed each end of the stingers Two at center of the stringers
1	4 (Fig. 2)	42"L x 36"W Min. Six 1" x 6" x 36" deck-boards, spaced evenly along the pallet width with 3" wings extending beyond the stringers outboard faces Note: SIZE 1, TYPE 4 - has a single wing applied to top deck.	42"L x 30"W Min. Four 1" x 6" x 36" boards. One placed each end of the stingers, Two at center of the stringers

3.3 PALLETS QUALITY

All pallets shall be of sturdy construction and adequate condition to assure delivery of the goods without damage to the goods or safety hazards.