U.S. Southern Command (USSOUTHCOM)
Southern Vanguard 2026.2 (Peru)
Performance Work Statement (PWS)
Linehaul, MHE and AGWASH Services

As of 4 Aug 2026

Part 1

General Information

1. **GENERAL:** This is a non-personal services contract under which the personnel rendering the services are not subject, either by the contract's terms or by the manner of its administration, to the supervision and control usually prevailing in relationships between the Government and its employees. The United States (U.S.) Government shall not exercise any supervision or control over the Contractor's employees performing the tasks herein. Such contract employees shall be accountable solely to the Contractor who, in turn shall be responsible to the U.S. Government.

1.1 Description of Services/Introduction
The contractor shall provide all personnel, equipment, supplies, facilities, transportation, tools, materials, supervision, and other items and non-personal services necessary to provide Line Haul services, Material Handling Equipment (MHE), and Customs pressure washers services as defined in this PWS except for those items specified as government furnished property (GFP) and government furnished services (GFS). The contractor shall perform to the standards in this contract.

1.2 Background: Line Haul services for U.S. Southern Command (USSOUTHCOM), also referred to herein as "the Government") in support of exercises.

1.3 Objectives: The Contractor provides the U.S. Government with Line Haul Services which include 20' ft flatbed, with prime movers and Material Handling Equipment (MHE), 10K forklift with extended fork services, and two (2) pressure washers throughout the duration of the contract.

1.4 Scope: Contractor shall provide non-personal services for Line Haul transportation, Material Handling Equipment (MHE) support, and Agricultural Washdown (Agwash) operations to include all personnel, primary movers, flatbed trailers, water trucks, commercial high-pressure washing equipment, fuel, and qualified operators. The contractor shall accomplish the safe transport, delivery, and decontamination washdown of supplies, materials, and equipment at the locations and dates specified in Table 1, in strict coordination with the Contracting Officer (KO) and Contracting Officer Representative (COR).

1.5 Period of Performance:

28 August 2026 – 23 September 2026.
Pressure Washer: 18-21 SEP 26
10K Forklift: 28 AUG – 1 SEP 26 and 10 – 23 SEP 26
Cargo Trucks: 28 AUG – 1 SEP 26 and 10 – 23 SEP 26

1.6 General Information: Reserved

1.6.1 Quality Control Plan (QCP): Reserved.

1.6.2 Quality Assurance (QA): Reserved

1.6.3 Recognized Holidays: The Contractor shall be required to perform services on all holidays unless the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings.

September 7, 2026	Thursday	Labor Day

1.6.4 Hours of Operation: The contractor is responsible for conducting business between the hours of 7:00am to 7:00pm Monday through Sunday, except Federal holidays or when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings. The Contractor must, at all times, maintain an adequate workforce for the uninterrupted performance of all tasks defined within this PWS when the Government facility is not closed for the above reasons.

1.6.5 Place of Performance: The work to be performed under this contract will be performed at Comandante FAP Guillermo del Castillo Paredes Airport (TPP), and 5th BDE Training Area in Tarapoto, Peru.

1.6.6 Type of Contract: The Government anticipates the award of a Firm-Fixed Price (FFP) contract.

1.6.7 Access and General Protection Policy and Procedures: Reserved

1.6.7.1 FPCON: In addition to the changes otherwise authorized by the changes of clause of contract, should the U.S Government Force Protection Condition (FPCON) at any individual installation change, the Government may require changes in contractor security matters or process in accordance with DoDI 2000.16. During FPCONs Charlie and Delta, only contract services that have been deemed "mission essential" by the Government will continue. Contract services will resume when the FPCON is reduced to Bravo or lower.

1.6.7.2 Physical Security: N/A.

1.6.7.3 Escorts: The Contractor and all associated sub-contractor employees performing services under this contract shall be escorted at all times by host nation security personnel or by an individual designated by the Contracting Officer Representative (COR) while accessing U.S. and Host Nation facilities, activities or controlled areas. Escorts will announce the presence of any visitors prior to entering any controlled facility or workspace in order to allow personnel to safeguard sensitive or critical information against undue disclosure.

1.6.7.4 Personnel Security Clearance Requirements: Reserved.

1.6.7.5 Background Checks: The Contractor shall ensure contractor employees and subcontractor employees performing services under this contract have passed a security check conducted by the Host Nation Police Department of their residence or the State Police Department of their U.S. residence. Security checks that have been completed as part of a personnel security clearance background investigation, or a previous background check that was a condition of employment, meet this requirement. Documentation of these checks will be made available to the KO or COR within 10 days of request. The Government retains the right to exclude any employee from performance of duties under this contract if a background security check reveals an employee is a security risk. The exclusion of an employee for security reasons will not relieve the Contractor from performance of services required under this contract. If the Government determines additional background checks are required, at a minimum, and upon request from the Government, the Contractor shall provide to the KO or COR, the following information on any contractor or subcontractor employee performing services under this contract:

- Full birth name
- Married name (if applicable)
- SSN or local equivalent (ID card number)
- Date of birth
- Place of birth (city, country)

1.6.7.5.1 Background Check Notification Requirements: If a background check on any employee or subcontractor employee performing services under this contract, whether the check was conducted as a

condition of employment or as part of the contract with the Government, reveals any information from any source (including host country law enforcement) of criminal activity by Contractor employees, subcontractors, or subcontractor employees, the Contractor shall notify the KO and COR of that information within 24 hours. The Contractor shall make notification of:

(1) Traffic violations, other than parking, will be reported to the KO or COR only if the contract is for drivers for the Government.

(2) Any suspicious activity by Contractor employees, subcontractors, or subcontractor employees the Contractor believes may pose a risk to U.S. or host nation national security or imminent risk of deadly bodily harm to any person; and

(3) Any actions taken against Contractor employees, subcontractors, or subcontractor employees pursuant to this requirement.

1.6.7.5.2 Remedies. In addition to other remedies available to the Government, the Contractor's failure to comply with the requirements of this paragraph my result in requiring the Contractor to remove a contractor employee or employees from the performance of the contract.

1.6.7.5.3 Subcontracts. The Contractor shall include the substance of this paragraph and the preceding paragraph in all subcontracts.

1.6.7.6 Uncleared Contractor Common Access Card (CAC) Credentialing and Access Procedures: Reserved.

1.6.7.6.1 Contractor Common Access Card (CAC) Eligible Requirements: Reserved.

1.6.7.6.1.1 Federal Installation/Facility Access: Contractor and all associated sub-contractor employees shall comply with applicable installation, facility and area commander installation/facility access and local security policies and procedures (provided by government representative). The employee performing services under this contract shall also provide all information required for background checks to meet installation access requirements to be accomplished by installation Provost Marshal Office, Director of Emergency Services, Security Office, or the host nation equivalent.

1.6.7.6.2. Contractor Non-CAC Eligible Requirements for DOD Facility and Installation Access: Reserved.

1.6.7.7 Employment Eligibility: The Contractor shall ensure that all Contractor employees and sub-contractor employees performing services under this contract are Peruan nationals. Entry to Military bases by contractor with an out of country Visa will be denied and service will not be performed.

1.6.7.8 Access to Government Information Systems: Reserved.

1.6.7.9 Key Control: Reserved.

1.6.7.10 Lock Combinations: Reserved.

1.6.8 Post Award Conference/Contract Periodic Progress Meetings: The Contractor shall attend the post award conference convened by the contracting activity or contract administration office IAW Federal Acquisition Regulation (FAR) Subpart 42.5. The KO, COR, with other Government personnel, as appropriate, may meet periodically with the Contractor to review the Contractor's performance. At these meetings the KO will apprise the contractor of how the government views the Contractor's performance and the Contractor will apprise the Government of problems, if any, being experienced. Appropriate action

shall be taken to resolve outstanding issues. These meetings shall be at no additional cost to the government.

1.6.9 Contracting Officer Representative (COR): The COR will be identified by separate letter. The COR monitors all technical aspects of the contract and assists in contract administration. The COR is authorized to perform the following functions: ensure the Contractor performs the technical requirements of the contract; perform inspections necessary in connection with contract performance; maintain written and oral communications with the Contractor concerning technical aspects of the contract; issue written interpretations of technical requirements, including Government drawings, designs, specifications; monitor Contractor's performance and notifies both the KO and Contractor of any deficiencies; coordinate availability of government furnished property; and provide site entry of Contractor personnel. A letter of designation issued to the COR, a copy of which is sent to the Contractor, states the responsibilities and limitations of the COR, especially regarding changes in cost or price, estimates, or changes in delivery dates. The COR is not authorized to change any of the terms and conditions of the resulting order.

1.6.10 Key Personnel: The following contractor personnel are considered key personnel by the government: The Contractor shall provide a contract manager who shall be responsible for the performance of the work. The name of this person and an alternate, who shall act for the Contractor when the manager is absent, shall be designated in writing to the Contracting Officer within seven (7) calendar days after contract award. Contract Manager and alternate shall have full authority to act for the contractor on all contract matters relating to daily operation of this contract.

Qualifications for all key personnel are listed below:

The Contract Manager and Alternate Contract Manager shall be able to read, speak, and write English at a minimum level II proficiency IAW https://www.govtilr.org/Skills/ILRscale2.htm.

1.6.11 Special Qualifications or Certifications: Reserved.

1.6.11.1 IA/IT Training Certification Reserved.

1.6.12 Identification of Contractor Employees: Contractor employees shall identify themselves as Contractor personnel and shall avoid representing themselves as Government employees. This identification includes meeting attendance, answering Government telephones, email communications, and working in other situations where Contractor status is not obvious. Contractor personnel identification shall be easily identifiable through the display of badges, name tags, lanyards, etc.

1.6.12.1 Badging of Contractor Employees: If required by the Government, contract personnel and all associated subcontractors' employees accessing U.S. facilities or activities, shall present a valid picture ID provided by the Government while accessing Government owned or contracted facilities and shall adhere to facility security policies and restrictions. If applicable, Government issued access badges will not be worn outside designated facility where visible to the general public. Contractor personnel shall return all U.S. Government issued identification to appropriate U.S. Government authorities not later than 5:00PM on the last day of their contractual duties. While on U.S. Government/Host controlled facilities, Contractors will wear and display access badges so as to be clearly visible. Contractor employees will protect and account for these credentials and immediately notify COR/KO if badges are lost, compromised or unaccounted for. The copying and/or reproduction of access badges by unauthorized personnel is not allowed including the posting of images on publicly viewable/accessible forums, online or social media. The use of access badges/credentials by any other individual not directly supporting the contract is not permitted.

1.6.12.2 Uniform: The Contractor shall provide a standard uniform for all Contractor and subcontractor employees performing services under this contract, and ensure they wear the uniform during appointed duty hours. The uniform may consist of the same type and color shirt and slacks for all workers. Company logo is required.

1.6.13 Contractor Travel: Reserved.

1.6.14 Other Direct Costs (ODC): Reserved.

1.6.15 Data Rights: Reserved.

1.6.16. Non-Disclosure Requirements: Performance under this contract may require the Contractor to access data and information proprietary to a Government agency, another Government Contractor, or of such nature that its dissemination or use other than as specified in this work statement would be adverse to the interests of the Government or others. Neither the Contractor, nor Contractor personnel, shall divulge, nor release data or information developed, or obtained under performance of this work statement, except to authorize Government personnel or upon written approval of the KO. The Contractor shall not use, disclose, or reproduce proprietary data, which bears a restrictive legend, other than as specified in this PWS. All documentation showing individual names or other personal information shall apply and shall be controlled and protected under the provisions of the Privacy Act of 1974, Public Law 93-579, 5 United States Code (U.S.C.) Section 552a.

1.6.16.1 Non-Disclosure Statements: The Contractor shall provide signed non-disclosure agreements to the Government prior to commencement of work under the contract. Disclosure of information by Contractor personnel may result in Contractor personnel removal from performance of duties under this contract.

1.6.16.2 Advertisement and Social Media: The Contractor shall NOT post information to public website or social media locations, personal or professional, that in any way disclose names, locations, hotel data, participants, discussions, pictures, etc. before, during or after the contract period of performance without the express consent of the Government. The use of propaganda violates DOD Commercial Use of Imagery Guidelines stated at (www.dimoc.mil/resourcess/limitations/). The Contractor shall not cite any information (e.g., contract information, pictures, locations, etc.) obtained through this contract on any marketing tools to include its company website.

1.6.16.3 INFORMATION ASSURANCE: At no time will the Contractor or associated sub-contractor employees transmit government documents or information over using methods that do not meet the security requirements specified in the National Institute of Standards and Technology (NIST) Special Publication (SP) 800-171, "Protecting Controlled Unclassified Information in Nonfederal Information Systems and Organizations" such as personal electronic mail accounts, public digital data storage sites (cloud storage), social media platforms or instant messaging. Approved government sites such as U.S. Army Aviation and Missile Research Development and Engineering Center (ARMDEC) Safe Exchange at https://safe.amrdec.army.mil/SAFE/About.aspx, or All Partners Access Network (APAN) at https://community.apan.org/, or other transmission means determined by the government must be used.

1.6.17 Organizational Conflict of Interest (OCI): Contractor and subcontractor personnel performing work under this contract may receive, have access to, or participate in the development of proprietary or source selection information (e.g., cost or pricing information, budget information or analyses, specifications or work statements, etc.) or perform evaluation services which may create a current or subsequent Organizational Conflict of Interests (OCI) as defined in FAR Subpart 9.5. The Contractor shall notify the KO immediately whenever it becomes aware that such access or participation may result in any actual or potential OCI and shall promptly submit a plan to the KO to avoid or mitigate any such OCI. The Contractor's mitigation plan will be determined to be acceptable solely at the discretion of the KO and in

the event the KO unilaterally determines that any such OCI cannot be satisfactorily avoided or mitigated, the KO may affect other remedies as he or she deems necessary, including prohibiting the Contractor from participation in subsequent contracted requirements which may be affected by the OCI.

1.6.18 Phase-in/Phase-Out (PIPO) Period: Reserved.

1.6.19 General Training Requirements:

1.6.19.1 Anti-Terrorism (AT) Level I Training: Reserved.

1.6.19.2 OPSEC Awareness: If the Contractor, or a subcontractor, or employees of either disclose any information that disrupts or harms the Government's operations or activities, then the Government retains the right to exclude any employee from performance of duties under this contract. The exclusion of an employee for security reasons will not relieve the Contractor from performance of services required under this contract. By way of example, personnel shall not sketch or take photos of government facilities or activities, unless related to service to be provided. All government paper products and removable digital storage material that is received, generated, or stored during the contract will be destroyed completely when no longer needed to preclude recognition of information.

1.6.19.3 Information Assurance (IA) Training: Reserved.

1.6.19.4 Information Assurance (IA)/Information Technology (IT) Training: Reserved.

1.6.19.5 Threat Awareness Reporting Program (TARP Training): Reserved.

1.6.19.6 iWATCH Training: Reserved.

1.6.19.7 OPSEC Training: Reserved.

1.6.20 Overseas Training Requirements:

1.6.20.1 Antiterrorism (AT) Awareness Training for Contractor Personnel Traveling: Reserved.

1.6.20.2 SERE Training: Reserved.

1.6.21 Foreign (OCONUS) Requirements: Reserved.

1.6.21.1 Theater and Country Clearance Requirements: Reserved.

1.6.21.2 Vetting: The Contractor company and all associated sub-contractor companies, must have been vetted by the US Embassy in the country which the contract will be performed. For the purposes of this contract, the company is considered vetted if the company is in the country which the contract will be performed unless the company has been previously barred from performing services for the Government. If during a previous vetting process the company was barred from performing service for the Government, then that is grounds for termination of the contract. If the company is located outside of the country which the contract will be performed, the company must be vetted by the US Embassy in the country of performance. Vetting will coordinate through the US Embassy's DOD Security Cooperation Office (SCO) in the country of performance. If during any previous vetting process in other countries, the company is found to be barred from performing services for the Government; this finding is grounds for termination of the contract.

1.6.21.3 Installation Access to DOD Facility or Host Nation Installation: Contractor and all subcontractor employees performing services under this contract shall comply with adjudication standards and procedures using the National Crime Information Center Interstate Identification Index (NCIC-III) (U.S. citizen and residents only), and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility and areas commander installation/facility access and local security policies and procedures (provided by the COR or KO), and status of forces agreements or other diplomatic agreements. The employee performing services under this contract shall provide all information required for background checks to meet installation access requirements to the installation Provost Marshal Office, Director of Emergency Services, Security Office, or host nation equivalent.

1.6.21.4 Host Nation Installation Access with No DOD Facility: Contractor and all associated subcontractor employees shall comply with applicable installation, facility and area commander installation/facility access and local security policies and procedures. The employee performing services under this contract shall also provide all information required for background checks to meet installation access requirements to be accomplished by installation Provost Marshal Office, Director of Emergency Services, Security Office or the host nation equivalent.

1.6.21.5 Deoxyribonucleic Acid (DNA) Samples: Reserved.

1.6.21.6 Medical Travel Requirement: Reserved.

1.6.22 Synchronized Pre-deployment and Operational Tracker (SPOT): Reserved.

1.6.23 Safety: The following provides information pertaining to Safety and Accident Prevention:

1.6.23.1 (OCONUS - Host Nation) Safety Laws and Regulations: The Contractor shall comply with FAR 52.236-13, Accident Prevention (November 1991), the references contained therein *(e.g. U.S. Army Corps of Engineers Safety and Health Requirements Manual (EM 385-1-1)), and applicable Host Nation Safety Laws and Regulations.*

1.6.24 Environmental Compliance: Reserved.

PART 2
DEFINITIONS & ACRONYMS

2. DEFINITIONS AND ACRONYMS:

2.1. Definitions:

2.1.1 Area of Responsibility. The U.S. Southern Command (USSOUTHCOM) area of responsibility (AOR) includes the geographic areas of Antigua and Barbuda, Argentina, Aruba, Barbados, Belize, Bolivia, Brazil, British Virgin Islands, Cayman Islands, Peru, Colombia, Costa Rica, Cuba, Curacao, Dominica, Dominican Republic, Ecuador, El Salvador, Falkland Islands, French Guiana, Grenada, Guadeloupe, Guatemala, Guyana, Haiti, Honduras, Jamaica, Martinique, Mayotte, Montserrat, Nicaragua, Panama, Paraguay, Peru, Saint Barthélemy, Saint Martin, Saint Kitts and Nevis, Saint Lucia, Saint Vincent and the Grenadines, Saint Maarten, Suriname, Trinidad and Tobago, Turks and Caicos Islands, Uruguay, and Venezuela.

2.1.2. Contractor. The total contractor organization or a separate entity of it, such as an affiliate, division, or plant that performs its own purchasing.

2.1.3. Contracting officer (KO). A person with the authority to enter into, administer, and/or terminate contracts and make related determinations and findings.

2.1.4. Contracting Officer's Representative (COR). An individual designated and authorized in writing by the contracting officer to perform specific technical or administrative functions.

2.1.5. Defective Service. A service output that does not meet the standard of performance associated with the Performance Work Statement.

2.1.6. Deliverable. Anything that can be physically delivered but may include non-manufactured things such as meeting minutes or reports.

2.1.7. Foreign National. A foreign national is not a U.S. citizen. Green card holders are also identified as foreign nationals. A foreign national is further categorized as either a third country national or a local national based on the person's citizenship and location of performance of duty.

2.1.8. Key Personnel. Contractor personnel that are evaluated in a source selection process and that may be required to be used in the performance of a contract by the Key Personnel listed in the PWS. When key personnel are used as an evaluation factor in best value procurement, an offer can be rejected if it does not have a firm commitment from the persons that are listed in the proposal.

2.1.9. Local National. Local nationals are foreign nationals who are citizens of the country where the performance of duty will occur.

2.1.10. Performance Work Statement (PWS). A statement of work for performance-based acquisitions that describes the required results in clear, specific, and objective terms with measurable outcomes.

2.1.11. Physical Security. Protection of the perimeter area, government property, and assets that prevent the loss or damage of Government property.

2.1.12. Quality Assurance. The various functions, including inspection, performed by the government to determine whether a Contractor has fulfilled the contract obligations pertaining to quality and quantity.

2.1.13. Quality Assurance Surveillance Plan (QASP). A plan describing how the agency will survey, observe, test, sample, evaluate and document the Contractor's performance in meeting critical performance standards identified in the contract.

2.1.14. Quality Control (QC). Tasks performed by the Contractor to improve the quality of the organization's output.

2.1.15. Shall. An imperative command: has a duty to or is required to. Denotes that a regulation must be followed unless the contracting officer has obtained a deviation.

2.1.16. Subcontractor. Any supplier, distributor, vendor, or firm that furnishes supplies or services to or for a prime contractor or another subcontractor.

2.1.17. Third Country National. Third country nationals are foreign nationals who are not citizens of the country where the performance of duty will occur.

2.1.18. Workday. The number of hours per day the Contractor provides services in accordance with the contract.

2.1.19. Work Week. Monday through Friday, unless specified otherwise.

2.2 Acronyms:

AFFSSIR	Armed Forces Repository of Specimen Samples
ALMS	Army Learning Management System
ANSI	American National Standards Institute
AOR	Area of Responsibility
AR	Army Regulation
ATCTS	Army Training Certification Tracking System
AT	Anti-Terrorism
CAC	Common Access Card
CFR	Code of Federal Regulations
CI	Counter-Intelligence
CHLAR	Peruan Army
CLIN	Contract Line-Item Number
CONUS	Continental United States (excludes Alaska and Hawaii)
COR	Contracting Officer Representative
DD Form 254	Department of Defense Contract Security Requirement List
DNA	Deoxyribonucleic Acid (DNA)
DOD	Department of Defense
DODD	Department of Defense Directive
DODI	Department of Defense Instruction
FACH	Fuerza Aerea de Peru
FAR	Federal Acquisition Regulation
FHP	Force Health Protection
FCG	Foreign Clearance Guide
FN	Foreign National
FY	Fiscal Year
GFE	Government Furnished Equipment
GFP	Government Furnished Property

GFS	Government Furnished Services
IA	Information Assurance
IAW	In Accordance With
IT	Information Technology
JPAS	Joint Personnel Adjudication System
JTR	Joint Travel Regulation
KO	Contracting Officer
LN	Local National
LOA	Letter of Authorization
NCIC-III	National Crime Information Center Interstate Identification Index
NIST	National Institute of Standards and Technology
ODC	Other Direct Costs
OCI	Organizational Conflict of Interest
OCONUS	Outside Continental United States (includes Alaska and Hawaii)
ODC	Other Direct Costs
OSHA	Occupational Safety and Health Administration
OPSEC	Operation Security
PIPO	Phase In/Phase Out
PRS	Performance Requirements Summary
PWS	Performance Work Statement
QA	Quality Assurance
QASP	Quality Assurance Surveillance Plan
QCP	Quality Control Program
RA	Requiring Activity
SCR	Service Contract Reporting
SOP	Standard Operating Procedures
SPOT	Synchronized Predeployment and Operational Tracker
TCN	Third Country National
TE	Technical Exhibit
TSDB	Terrorist Screening Data Base
U.S.C.	United States Code
USSOUTHCOM	United States Southern Command

THIS SECTION INTENTIONALLY LEFT BLANK

PART 3
Government Furnished Equipment (GFE), Government Furnished Property (GFP), and Government Furnished Services (GFS)

3. **GOVERNMENT FURNISHED ITEMS AND SERVICES:**

3.1. Services: Reserved.

3.2. Facilities: Reserved.

3.3 Utilities: Reserved.

3.4 Equipment: Reserved.

3.5 Materials: Reserved.

3.6 Common Access Cards (CAC): Reserved.

PART 4
CONTRACTOR FURNISHED ITEMS AND SERVICES

4. **CONTRACTOR FURNISHED ITEMS AND RESPONSIBILITIES:**

4.1 General: Reserved.

4.2 Facility Security Clearance: Reserved.

4.3. Materials: Reserved

4.4. Equipment: Reserved

PART 5
SPECIFIC TASKS

5. **Specific Tasks:** Contractor shall provide non-personal services for Line Haul transportation, Material Handling Equipment (MHE) support, and Agricultural Washdown (Agwash) operations to include all personnel, primary movers, flatbed trailers, water trucks, commercial high-pressure washing equipment, fuel, and qualified operators. The contractor shall accomplish the safe transport, delivery, and decontamination washdown of supplies, materials, and equipment at the locations and dates specified in Table 1, in strict coordination with the Contracting Officer (KO) and Contracting Officer Representative (COR).

5.1. Basic Services. Contractor shall provide non-personal services to the Government with Line Haul services at the locations and dates specified in **Table 1**. The contractor shall accomplish services in coordination with the Contracting Officer Representative (COR).

5.1.1 Equipment and Personnel Provision. The Contractor shall deliver fully certified, operational transport vehicles, specialized cargo-handling equipment, and qualified personnel to satisfy all logistical movements.

a. STD: The Contractor shall provide 4 x 20-foot flatbed trucks with qualified operators.
AQL: 100% Compliant.

b. STD: The Contractor shall provide 2 x Commercial-grade pressure washers (minimum 90 PSI) with all required attachments, connected directly to a Contractor-provided 2,000-gallon water truck (tanker) and operated by qualified personnel.
AQL: 100% Compliant.

c. STD: All primary movers, flatbed trailers and 10K forklift with extended forks shall be in good mechanical condition and fully operational.
AQL: 100% Compliant.

d. STD: Contractor shall provide fuel, oil, and maintenance for all Material Handling Equipment (MHE).
AQL: 100% Compliant.

5.1.2 **Notification and Scheduling.** The Contractor shall manage driver and equipment schedules dynamically in response to real-time mission reporting and completion timelines

a. STD: The COR will notify the Contractor at least 24 hours prior of usage of projected reporting (start) and completion (stop) times for the required trucks and MHE. The COR will inform the contractor if report and completion times change. Drivers are required for a minimum of 12 hours daily. The drivers with their vehicles will arrive at the designated time and location specified in Technical Exhibit A or as pre-coordinated by the COR. The US Government has the right to vary the reporting (start) and completion (stop) times and shall not incur a penalty for doing so if at least 4 hours advance notice to the company representative is provided.
AQL: 100% Compliant.

5.1.3 **Work Schedule and Standby Readiness**. The Contractor shall maintain continuous standby readiness to adapt to changing aircraft arrival and departure times.

a. STD: The Contractor shall be available to deliver equipment, pallets, and containers as required seven (7) days a week in coordination with the COR or KO, except when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings.
AQL: 100% Compliant.

b. STD: The COR will notify the contractor 4 hours in advance on time of arrival/departure of aircraft. During this time frame, contractors shall be on standby and be prepared to work 24 hours a day during deploy/redeploy.
AQL: 100% Compliant.

c. STD: If aircraft has unforeseen mechanical issues which will alter arrival/departure time, the COR will notify the contractor.
AQL: 100% Compliant.

5.1.4 **Base Access and Credentialing.** The Contractor shall proactively secure all necessary airport and military base credentials to prevent delays in cargo pickup and delivery.

a. STD: The Contractor is required to gain access to Comandante FAP Guillermo del Castillo Paredes Airport (TPP) and Tarapoto 5th BDE Headquarters for base passes for deployment and redeployment before execution to pick-up and drop off all cargo that is required. The Contractor shall contact the COR NLT ten (10) days prior to initial and final movement for detailed information about the procedures and required documentation for gaining access to Comandante FAP Guillermo del Castillo Paredes Airport (TPP).
AQL: 100% Compliant.

5.1.5. **Uninterrupted Line-Haul Service & Contingency Recovery.** The Contractor shall maintain localized contingency resources to guarantee uninterrupted transportation services in the event of equipment breakdowns or driver shortages.

a. STD: In the event of maintenance breakdown, the Contractor shall have back-up vehicles, forklifts, and trailers meant to support this contract on-site within four (4) hours of the breakdown.
AQL: 100% Compliant.
b. STD: In the event of insufficient drivers, the contractor shall have back-up qualified drivers to operate each piece of equipment to support this contract on-site within four (4) hours of the breakdown.
AQL: 100% Compliant.

5.1.6 **In-Transit Status Reports & Incident Notification.** The Contractor shall provide structured progress reporting and immediate accident notifications to ensure cargo visibility and safety.

a. STD: The Contractor shall update the COR every four (4) hours AND at the end of the day in reference to the location and status of the cargo while it is in transit by text message using

WhatsApp and by email. In addition, the Contractor shall immediately report accidents or incidents involving vehicles under this contract, including accidents with injuries, or resulting in the damage or loss of U.S. Government property. **(Deliverable #3)**.
AQL: 100% Compliant.

5.1.7. **Vehicle Standards & MHE Specifications.** The Contractor shall operate modern, mechanically sound vehicles capable of safely lifting and moving heavy cargo loads.

a. STD: The Contractor shall provide all vehicles and equipment required for performance of this contract.
AQL: 100% Compliant.

b. STD: All primary movers, flatbed trailers, and 10k forklift with extended forks shall be in good mechanical condition and fully operational. Vehicles will not be more than ten (10) years old unless approved by the US Government. The forklift must have the ability for the forks to extend into the aircraft capable of downloading equipment weighing approximately 9K lbs.
AQL: 100% Compliant.

5.1.8. **Cargo Security.** The Contractor shall utilize heavy-duty restraint equipment to ensure zero cargo displacement during transit.

a. STD: The Contractor shall provide proper equipment to secure all cargo while in transit.
AQL: 100% Compliant.

5.1.9 **Maintenance Response** The Contractor shall execute rapid vehicle repairs or swap-outs to maintain operational velocity.

a. (a) STD: The Contractor shall repair or replace damaged vehicles with the same type of vehicle within 4 hour notification from the COR. The Contractor shall have the availability of back up vehicles to transport personnel in the event of maintenance breakdown.
AQL: 100% Compliant.

5.1.10. **Pre-Deployment Vehicle Inspections.** The Contractor shall participate in joint inspections to verify that all assets meet Host Nation laws and U.S. safety criteria.

a. STD: Prior to deployment and redeployment, the Contractor and the COR may conduct a joint vehicle inspection to ensure the physical and mechanical condition of the vehicle(s) and equipment satisfies the US Government's needs, safety requirements, and applicable Host Nation transportation laws. Deficiencies shall be reported to the COR in English or translated.
AQL: 100% Compliant.

5.1.11 **Safety Hazards Remediation.** The Contractor shall immediately correct any identified safety hazards to ensure safe personnel and cargo transport.

a. STD: The COR will consider all terms and conditions within this contract, Peru Law, and "US Safety Standards" as a guide for accepting and/or rejecting vehicles. The Contractor shall remedy all vehicle defects the COR deems to be a safety hazard immediately upon notification.

AQL: 100% Compliant.

5.1.12 **Driver Appearance.** The Contractor shall ensure all personnel maintain a clean, professional, and easily identifiable appearance.

a. STD: Drivers shall present a neat appearance. Clothing shall be kept clean and neat (i.e. no debris, dirt, mud, stains, rips, tears, or holes) as practicable considering work conditions.
AQL: 100% Compliant.

5.1.13 **Driver Qualifications and Sobriety.** The Contractor shall strictly enforce safety protocols regarding driver licensure, records, and drug/alcohol screening.

a. (a) STD: Drivers must be fully licensed and insured before operating their assigned vehicle and must have a safe driving record for the last year.
AQL: 100% Compliant.

b. (b) STD: The Contractor shall ensure that drivers are able and capable of safely operating vehicles and are not under the effects of alcohol or drugs at least 24 hours prior to and during the performance of their duties. Any driver suspected of reporting for duty under the effects of alcohol or drugs shall be immediately reported to the COR. Any driver found to be under the influence of drugs or alcohol will be removed from the site and not allowed to return. Contractor shall replace the driver within 24 hours of notification from the COR.
AQL: 100% Compliant.

5.2. **Joint Fleet Inspections & Quality Assurance.** The Contractor shall coordinate with the COR and US Government mechanics to execute thorough joint physical and mechanical vehicle inspections at initial delivery and on a monthly recurring basis to maintain safety and statutory compliance.

5.2.1 Scheduled Recurrent Vehicle Inspections. The Contractor shall submit all vehicles and equipment to physical and mechanical testing to guarantee compliance with Peruvian safety codes and US Government requirements.

a. (a) STD: The COR and a trained US Government vehicle mechanic may conduct a joint vehicle inspection with the Contractor to ensure the physical and mechanical condition of the vehicle and equipment satisfies the US Government's needs, safety needs, and applicable local Government transportation laws during the initial delivery and once a month thereafter.
AQL: 100% Compliant.

5.3. **Insurance & Accident Liability Management.** The Contractor shall secure and maintain comprehensive legal liability and full-coverage insurance policies for all transport assets, taking sole responsibility for damages to property or third parties under Peruvian law and FAR 52.228-8.

5.3.1 Insurance & Liability Coverage. The Contractor shall secure active, fully funded insurance policies and submit verified proof to the KO/COR prior to the initiation of operations.

a. (a) STD: In the event of an accident, the contractor is solely responsible for all damages to its property and/or any damage to a third party. The US Government assumes no liability for damages or injuries. The Contractor shall provide FULL COVERAGE insurance for their vehicles

as may be required by Peruvian laws and as stated in FAR clause 52.228-8, Liability and Insurance - Leased Motor Vehicles.
AQL: 100% Compliant.

5.4 Agricultural Cleaning Operations. The Contractor shall perform rigorous, localized agricultural washdowns and biosecurity cleaning of all redeploying equipment at designated sites within a 25-mile radius of TPP Airport, in coordination with the Agricultural Inspector.

5.4.1 Agricultural Decontamination Site Operations. The Contractor shall manage the biosecurity washdown site, supplying all necessary tools, supervision, and labor to pass customs clearances.

a. (a) STD: The Contractor shall provide all personnel, equipment, supplies, facilities, transportation, tools, materials, supervision, and other items and non-personal services necessary at a disclosed location within a 25-mile radius from Comandante FAP Guillermo del Castillo Paredes Airport (TPP), Peru for Agricultural Cleaning and Customs inspection. The supporting locations are for redeployment. The Contractor shall accomplish all services in coordination with the Agricultural Inspector.
AQL: 100% Compliant.

5.5 Power Washers & Water Supply Operations. The Contractor shall provision and operate dual commercial high-pressure wash systems connected directly to a 2,000-gallon water tanker, delivering final rinse washdowns prior to final cargo and customs inspections.

5.5.1 Final Rinse Decontamination Stations. The Contractor shall deploy water tankers and pressure washers to ensure that all equipment is free of organic residue before customs and boarding.

a. (a) STD: Contractor shall coordinate with the Agricultural Inspector and COR at a minimum 25-mile radius from the (APOE) Comandante FAP Guillermo del Castillo Paredes Airport (TPP) Peru and shall provide two (2) pressure washers, 90 PSI or equivalent with attachments to the water source or provide a water truck with operators for vehicle and or equipment final rinse wash down prior to Cargo Inspection for Re-deployment at APOE.
AQL: 100% Compliant.

5. 6. Service Contract Reporting (SCR): Reserved.

PART 6
APPLICABLE PUBLICATIONS

6. APPLICABLE PUBLICATIONS (CURRENT EDITIONS)

6.1. The Contractor must abide by all applicable regulations, publications, manuals, and local policies and procedures.
6.1.1 DOD Commercial Use of Imagery Guidelines
6.1.2 AR 190-13, The Army Physical Security Program
6.1.3 Army Directive 2014-05, Policy, and Implementation Procedures for CAC Credentialing Access for Uncleared Contractors
6.1.4 DOD 5220.22-M, National Industrial Security Program Operating Manual
6.1.5 Defense Federal Acquisition Regulation Supplement (DFARS)
6.1.6 Joint Travel Regulation (JTR)
6.1.7 AR 735-5, Policies and Procedures for Property Accountability
6.1.8 DODD 8570.01, Information Assurance Training Certification and Workforce Management
6.1.9 DOD 8570.01-M, Information Assurance Workforce Improvement Program
6.1.10 AR 25-2, Information Assurance
6.1.11 DODI 3020.41, Contractor Personnel Authorized to Accompany the U.S. Armed Forces
6.1.12 USSOUTHCOM SC Regulation 40-501, Medical Suitability Screening Regulation
6.1.13 DODI 2000.16 DoD Antiterrorism (AT) Program
6.1.14 Ley N° 27181, Ley General de Transporte y Tránsito Terrestre (General Law of Land Transportation and Transit)
6.1.15 Decreto Supremo N° 016-2009-MTC, Texto Único Ordenado del Reglamento Nacional de Tránsito (National Traffic Regulations / SOAT Requirements)
6.1.16 Decreto Supremo N° 058-2003-MTC, Reglamento Nacional de Vehículos (National Vehicle Regulations for Weight, Dimensions, and Technical Inspections)
6.1.17 Ley N° 29783, Ley de Seguridad y Salud en el Trabajo (National Occupational Safety and Health Law for Equipment and MHE Operators)
6.1.18 Decreto Legislativo N° 1053, Ley General de Aduanas (General Customs Law - Governing APOE Redeployment Protocols at TPP)
6.1.19 R.D. N° 0162-2017-MINAGRI-SENASA, Servicio Nacional de Sanidad Agraria Regulations (National Agricultural Health Service - Governing Decontamination and Phytosanitary Cleanliness Protocols)

PART 7
ATTACHMENT/TECHNICAL EXHIBIT LISTING

7. **Attachment/Technical Exhibit List:**

7.1 Attachments:

7.1.1 Attachment 1 – Performance Requirements Summary

7.1.2 Attachment 2 – Deliverables Schedule

7.2 Technical Exhibits:

7.2.1 Technical Exhibit 1 – Table 1

7.2.2 Technical Exhibit 2 - Estimated Workload Data

ATTACHMENT 1

Performance Requirements Summary

The contractor service requirements are summarized into performance objectives that relate directly to mission essential items. The standard should relate to timeliness, quality, or quantity (metrics) of service required by the Contractor is stated in the PWS verbiage. The performance threshold briefly describes the minimum acceptable levels of service required for each requirement. **These thresholds are critical to mission success**.

Performance Objective	**Standard**	**Performance Threshold** (This is the maximum error rate. It could possibly be "Zero deviation from standard") **Acceptable Quality Levels (AQL's)**	**Method of Surveillance**
PRS#1 - Combating Trafficking in Persons	The United States Government has adopted a policy prohibiting trafficking in persons including the trafficking-related activities of this clause.	100% Compliance	100% Inspection
PRS #1 - PWS Para 5.1.1 Equipment and Personnel Provision	The Contractor shall deliver fully certified, operational transport vehicles, specialized cargo-handling equipment, and qualified personnel. Provide 4x 20-foot flatbeds, 2x pressure washers with 2,000-gal water truck, 10K forklift.	100% Compliant	100% Inspection
PRS #2 - PWS Para 5.1.2 Notification and Scheduling	Drivers with vehicles arrive at the designated time and location specified. The COR will notify at least 24 hours prior of usage.	100% Compliant	Periodic Surveillance
PRS #3 - PWS Para 5.1.3 Work Schedule and Standby Readiness	Available to deliver equipment 7 days a week. Standby and prepared to work 24 hours a day during deploy/redeploy.	100% Compliant	100% Inspection
PRS #4 - PWS Para 5.1.4 Base Access and Credentialing	Contractor proactively secures all necessary airport and military base credentials for Comandante FAP Guillermo del Castillo	100% Compliant	100% Inspection

	Paredes Airport (TPP) and Tarapoto 5th BDE HQ.		
PRS #5 - PWS Para 5.1.5 Uninterrupted Line-Haul Service & Contingency Recovery	In the event of maintenance breakdown or insufficient drivers, the Contractor shall have back-up vehicles and drivers on-site within four (4) hours.	100% Compliant	100% Inspection
PRS #6 - PWS Para 5.1.6 In-Transit Status Reports & Incident Notification	Update COR every four (4) hours AND at the end of the day via WhatsApp and email. Immediately report accidents/incidents.	100% Compliant	100% Inspection
PRS #7 - PWS Para 5.1.7 Vehicle Standards & MHE Specifications	All vehicles, trailers, washers, forklift in good mechanical condition, fully operational, not more than 10 years old.	100% Compliant	100% Inspection
PRS #8 - PWS Para 5.1.8 Cargo Security	Provide proper equipment (heavy-duty restraint) to secure all cargo while in transit.	100% Compliant	100% Inspection
PRS #9 - PWS Para 5.1.9 Maintenance Response	Repair or replace damaged vehicles with same type within 4 hour notification from the COR.	100% Compliant	100% Inspection
PRS #10 - PWS Para 5.1.10 Pre-Deployment Vehicle Inspections	Conduct joint vehicle inspection prior to deployment/redeployment to ensure condition satisfies US Government and Host Nation laws.	100% Compliant	100% Inspection
PRS #11 - PWS Para 5.1.11 Safety Hazards Remediation	Remedy all vehicle defects the COR deems to be a safety hazard immediately upon notification.	100% Compliant	100% Inspection
PRS #12 - PWS Para 5.1.12 Driver Appearance	Drivers present a neat appearance, clothing clean and neat (no debris, dirt, rips, etc.).	100% Compliant	Periodic Surveillance
PRS #13 - PWS Para 5.1.13 Driver Qualifications and Sobriety	Drivers fully licensed, insured, safe driving record. Not under effects of alcohol/drugs 24 hours prior to and during duty.	100% Compliant	100% Inspection
PRS #14 - PWS Para 5.2.1 Scheduled Recurrent Vehicle Inspections	Submit vehicles/equipment to physical and mechanical testing to guarantee compliance with Peruvian safety codes and US	100% Compliant	Periodic Surveillance

	Government requirements once a month.		
PRS #15 - PWS Para 5.3.1 Insurance & Liability Coverage	Provide FULL COVERAGE insurance as required by Peruvian laws and FAR 52.228-8.	100% Compliant	100% Inspection
PRS #16 - PWS Para 5.4.1 Agricultural Decontamination Site Operations	Provide personnel, equipment, etc., within 25-mile radius from TPP for Agricultural Cleaning and Customs inspection.	100% Compliant	100% Inspection
PRS #17 - PWS Para 5.5.1 Final Rinse Decontamination Stations	Provide 2 pressure washers or water truck with operators for final rinse down prior to Cargo Inspection for Redeployment.	100% Compliant	100% Inspection

ATTACHMENT 2

Deliverables Schedule

Deliverable	Frequency	# of Copies	Medium/Format	Submit To
#1 PWS Para 1.6.10 The Contractor shall provide a Contract Manager who shall be responsible for the performance of the work.	One time. The name of the person who shall act for the Contractor when the manager is absent, shall be designated in writing to the KO and COR not later than seven (7) days prior to contract start date.	One (1)	MS word electronic document to the KO and COR.	KO and COR
#2 PWS Para. 1.6.7.5.1 If a background check on any employee or subcontractor employee performing services under this contract, whether the check was conducted as a condition of employment or as part of the contract with the Government, reveals any information from any source (including host country law enforcement) of criminal activity by Contractor employees, subcontractors, or subcontractor employees.	One time / As required. The Contractor shall notify the KO and COR in writing of any information revealing criminal activity by Contractor employees, subcontractors, or subcontractor employees within 24 hours of discovery.	One (1)	MS word electronic document to the KO and COR.	KO and COR
#3 PWS Para. 1.5.3 In-Transit Status Reports	Every four (4) hours and at the end of each day during transit operations.	One (1)	Electronic delivery via text message using WhatsApp and by email.	Contracting Officer's Representative (COR)
#4 PWS Para. 1.5.8 The Contractor shall inspect all vehicles and equipment prior to deployment and redeployment and report deficiencies to the COR.	Prior to deployment and redeployment	One (1)	Electronic delivery via email using Microsoft Office	Contracting Officer's Representative (COR)
#5 PWS Para. 5.3.1 & 6.1.15) DBA Insurance	One time. Submitted NLT ten (5) days prior to the initiation of operations / contract start date.	1	Electronic copy of valid DBA that covers all vehicles and equipment.	KO and COR
#6 PWS Para. 5.2.1, 5.1.10, & 6.1.16 Proof of Vehicle Technical Inspection (RTV)	One time. Submitted NLT ten (5) days prior to the initiation of operations / contract start date.	1	Electronic copy (PDF or image) of valid Technical Vehicular Revision – RTV) certificates for all vehicles.	COR

U.S. Southern Command (USSOUTHCOM)
Southern Vanguard 2026.2 (Peru)
Performance Work Statement (PWS)
Linehaul, MHE and AGWASH Services

As of 4 Aug 2026

Technical Exhibit
Table 1

Location: FAP Guillermo del Castillo Paredes Airport (TPP) Tarapoto

The primary transit route runs between the FAP Guillermo del Castillo Paredes Airport (Tarapoto APOD) and the 5th Infantry Brigade Headquarters (5th BDE HQ) in Tarapoto, Peru. The distance between these two hubs is approximately 5.1 kilometers (km) with an estimated travel time of 15 minutes under normal road and traffic conditions. Due to the tight physical constraints of local infrastructure and security entry control points (ECPs), the Contractor shall ensure all transport and Class VII/MHE vehicles are appropriately sized to navigate the route and the specific coordinates listed below.

Performance Locations and Route Distances

Point of Origin	Point of Destination	Estimated Distance (KM)	Estimated Transit Time	Latitude/Longitude Coordinates	Specific Site Description / Entry Point
FAP Guillermo del Castillo Paredes Airport (TPP) *(Tarapoto APOD)*	5th Infantry Brigade Headquarters *(5th BDE HQ, Tarapoto)*	~5.1 km	~15 minutes	Origin (Airport Gate): 6°30'31.1"S 76°22'25.3"W Destination (5th BDE HQ ECP): 6°29'08.2"S 76°22'10.1"W	Airport: Cargo handling ramp/apron gate. 5th BDE HQ: Main military installation Entry Control Point (ECP) / designated staging yard.
5th Infantry Brigade Headquarters *(5th BDE HQ, Tarapoto)*	FAP Guillermo del Castillo Paredes Airport (TPP) *(Tarapoto APOD)*	~5.1 km	~15 minutes	Origin (5th BDE HQ ECP): 6°29'08.2"S 76°22'10.1"W Destination (Airport Gate): 6°30'31.1"S 76°22'25.3"W	5th BDE HQ: Main military installation ECP / designated staging yard. Airport: Cargo handling ramp/apron gate.

Figure 1.1: Route Map and Visual Layout of Transit Corridor between Tarapoto Airport (APOD) and 5th Infantry Brigade HQ. *(Contractor shall utilize this route as the primary basis of estimate for transport, linehaul, and Class VII movements unless directed otherwise by the Contracting Officer Representative (COR) or Force Protection escorts).*

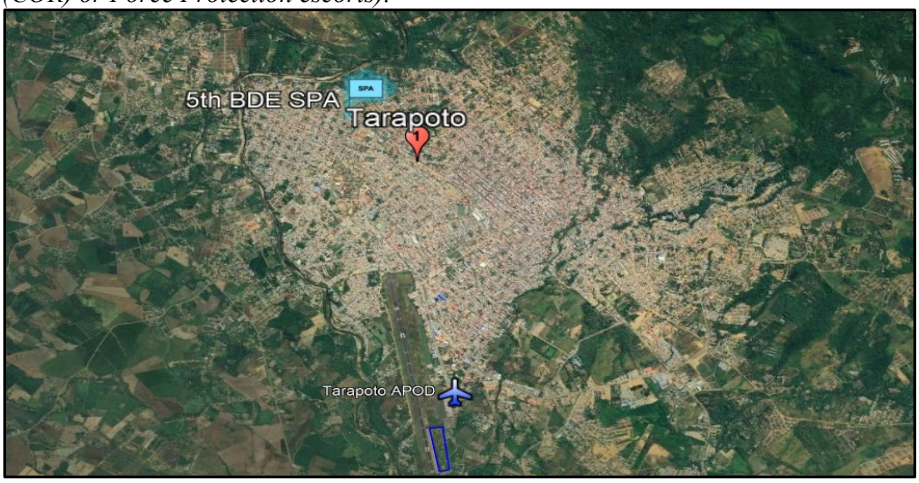

Figure 1.2: 5th BDE HQ Warehouse and Equipment Staging Location. *(This visual highlights the specific warehouse facility and adjacent hardstand yard where the Contractor will execute MHE offload/upload and AGWASH staging operations. The Action Officer or Contracting Officer's Representative (COR) will dictate the precise footprint within this yard upon arrival.)*

Warehouse Site Constraints & AGWASH Coordination:

- MHE Operations: The staging area designated in Figure 1.2 is the authorized zone for all MHE operations (forklifts, linehaul trucks, etc.). The Contractor shall not stage equipment outside the designated warehouse footprint without prior approval from the COR.
- AGWASH Staging: If Agricultural Wash (AGWASH) services are conducted at this location prior to redeployment, the Contractor shall establish the wash rack and containment system within the parameters of this designated warehouse yard, ensuring proper drainage and compliance with host-nation environmental standards.
- Access Control: The warehouse is located within a secure military installation. The Contractor shall coordinate all entry, exit, and delivery times through the COR to ensure host-nation security escorts and gate clearances are synchronized.

Requirements

Deploy

29 AUG – 2 SEP 26 – arrival window

- 1x 10,000-pound capable forklift with extended forks with operators capable of lifting 108-inch x 88-inch 463L pallets.
- 4 x 20-foot flatbed truck with operators to move 8x 463L pallets from airfield 5.1 km to 5th Infantry Brigade Headquarters. 463L pallets are loaded with their 108 inch side. No more than two 463L pallets per truck.
- Peru Barracks area address: 5th BDE HQ, Peru (- 6°28'31.86"S, - 76°22'41.70"W)
- 16-hours day on certain days. COR will let Contractor know once flight is scheduled.
- Request trucks and operators stagged at airfield two hour prior to arrival.
- Arrival date is known 7-21 days from 29 Aug. COR will let Contractor know once flight is scheduled.

Redeploy

20-24 Sep – departure window

- 4 x 20-foot flatbed truck with operators to move 8x 463L pallets from 5th Infantry Brigade Headquarters 5.1 km to the airfield. 463L pallets are loaded with their 108 inch side. No more than two 463L pallets per truck.
- 1x 10,000-pound capable forklift with extended forks with operators capable of lifting 108-inch x 88-inch 463L pallets.
    - 8x hour days
    - Used to clean, move, and pack containers.
    - 16-housr day on certain days. COR will let Contractor know once flight is scheduled.
    - Will be used one day between 20-23 SEP to load the C-130 (exact date known o/a 6 SEP 26).
    - Pallets go through joint inspection o/a 20 SEP then are loaded onto the 4x trucks.
        - Trucks with **full tank of fuel** will move the airfield and stage in secure area the day prior to aircraft arrival.
        - 463L pallets are loaded with their 108 inch side. No more than four 463L pallets per truck.
        - Drivers need to be back in their truck three hours prior to aircraft arrival.

- The Contractor shall provide 2 x Commercial-grade pressure washers (minimum 90 PSI) with all required attachments, connected directly to a Contractor-provided 2,000-gallon water truck (tanker) and operated by qualified personnel prior to Cargo Inspection for Re-deployment from 18-21 SEP.

As of 4 Aug 2026

Technical Exhibit
Table 2

Start date	End Date	# of days	# Flatbed	Start Location	Destination	Note
29-Aug	2-Sep	1	4	Comandante FAP Guillermo del Castillo Paredes Airport (TPP)	5th BDE HQ, Tarapoto, Peru	C-130J Deployment Timeline
20-Sep	23-Sep	1	4	5th BDE HQ, Tarapoto, Peru	Comandante FAP Guillermo del Castillo Paredes Airport (TPP)	C-130J Redeployment Timeline

Start date	End Date	# of days	#Forklift	Start Location	Note
29 AUG 26	2 SEP 26	1	1	Comandante FAP Guillermo del Castillo Paredes Airport (TPP)	C-130J Deployment
28 AUG 26	2 SEP 26	1	1	5TH BDE HQ, Tarapoto, Peru	Download equipment
18 SEP 26	21 SEP 26	1	1	5TH BDE HQ, Tarapoto, Peru	Customs Cleaning
20 SEP 26	23 SEP 26	1	1	5TH BDE HQ, Tarapoto, Peru	3-82ND ABN Equipment loading to line haul
20 SEP 26	23 SEP 26	1	1	Comandante FAP Guillermo del Castillo Paredes Airport (TPP)	3-82ND ABN Equipment loading to C-130J

Start date	End Date	# of days	# Presser washer	Destination	Note
18-Sep	21-Sep	4	2	5th BDE HQ, Tarapoto, Peru	C-130J Deployment Timeline