70CTD025A00000001

PRJ0212403 Fort Benning, GA
Statement of Work vers. 1
June 22, 2026

VOS Adrienne Dowling
Adrienne.M.Dowling@associates.ice.dhs.gov

Table of Contents

SCOPE OF WORK 2
I. Conference Room 106 #1 VTC Solutions: 2
SCOPE OF WORK 3
II. Conference Room 107 #2 VTC Solutions: 3
SCOPE OF WORK 4
III. Conference Room 119 #3 VTC Solutions: 4
SCOPE OF WORK 4
IV. Conference Room 118 #4 VTC Solutions: 4
SCOPE OF WORK 5
V. Conference Room 117 #5 VTC Solutions: 5
SCOPE OF WORK 6
VI. Conference Room 109 #6 VTC Solutions: 6
PERIOD PERFORMANCE 7
SITE LOCATION 7

SCOPE OF WORK

I. Conference Room 106 #1 VTC Solutions:

Quantity	CLIN	Description
3	1026	O-D98: 98-inch 4K Commercial Display
1	1028	O-T75: 75-inch 4K Commercial Interactive Display
1	1015	PKG-C-CORE: AV System Core System for Large Spaces
1	1045	O-PART: Partition Sensor for Divisible Rooms

Conference Room 106 Pictures:

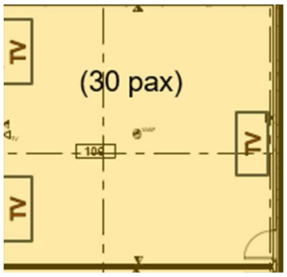

Conference Room 106 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor
- 1 TV will be placed on the east wall; 2 TVs on the west wall
- Whiteboard will be placed south wall in between both TVs

SCOPE OF WORK

II. Conference Room 107 #2 VTC Solutions:

Quantity	CLIN	Description
3	1026	O-D98: 98-inch 4K Commercial Display
1	1028	O-T75: 75-inch 4K Commercial Interactive Display
1	1015	PKG-C-CORE: AV System Core System for Large Spaces

Conference Room 107 Pictures:

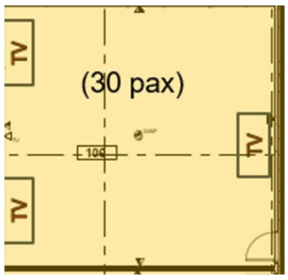

Conference Room 107 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor
- 1 TV will be placed on the east wall; 2 TVs on the west wall
- Whiteboard will be placed south wall in between both TVs

SCOPE OF WORK

III. Conference Room 119 #3 VTC Solutions:

Quantity	CLIN	Description
3	1026	O-D98: 98-inch 4K Commercial Display
1	1028	O-T75: 75-inch 4K Commercial Interactive Display
1	1015	PKG-C-CORE: AV System Core System for Large Spaces
1	1045	O-PART: Partition Sensor for Divisible Rooms

Conference Room 119 Pictures:

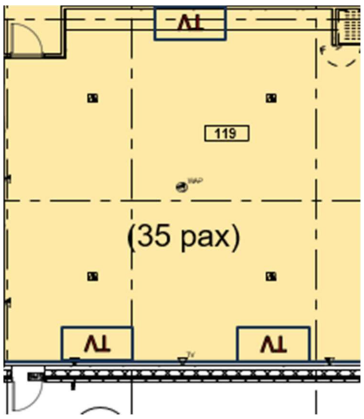

Conference Room 119 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor
- 1 TV will be placed on the north wall; 2 TVs on the south wall
- Whiteboard will be placed south wall in between both TVs

SCOPE OF WORK

IV. Conference Room 118 #4 VTC Solutions:

Quantity	CLIN	Description
3	1026	O-D98: 98-inch 4K Commercial Display
1	1028	O-T75: 75-inch 4K Commercial Interactive Display
1	1015	PKG-C-CORE: AV System Core System for Large Spaces

Conference Room 118 Pictures:

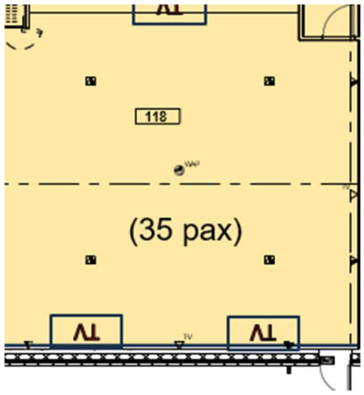

Conference Room 118 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor
- 1 TV will be placed on the north wall; 2 TVs on the south wall
- Whiteboard will be placed south wall in between both TVs

SCOPE OF WORK

V. Conference Room 117 #5 VTC Solutions:

Quantity	CLIN	Description
1	1022	O-D55: 55-inch 4K Commercial Display

Conference Room 117 Pictures:

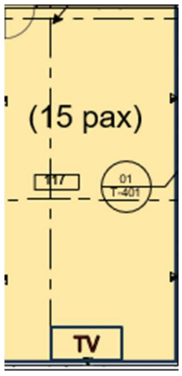

Conference Room 117 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor.
- Tv will be placed on the south wall.

SCOPE OF WORK

VI. Conference Room 109 #6 VTC Solutions:

Quantity	CLIN	Description
1	1022	O-D55: 55-inch 4K Commercial Display

Conference Rm 109 Pictures:

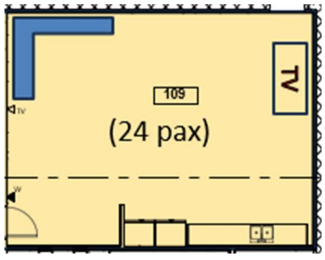

Conference Room 109 Site Specific Details:

- There will be an electrical box with power 6ft above finished floor.
- Tv will be placed on the east wall.

PERIOD PERFORMANCE

The completion for this scope of work will be 120 days from the day of the award.

Commented [IR1]: Update

SITE LOCATION

Address of Site:
Fort Benning, GA

Site Point of Contact Information:
Name & Title:
IT SPEC
Fort Benning, GA
Email: Kurt.Landeweer@ice.dhs.gov
Phone: O. 202-368-8512

Information Technology Project Manager:
Name & Title: Kurt Landeweer@ice.dhs.gov / ITPM, Project Manager
Email: Kurt.Landeweer@ice.dhs.gov Phone: 202-368-8512