Essayons HPU Cooling Pump Procurement

01. General:
    The contractor shall provide two (2) Flowserve 2K3x2V-10RV M3V Pumps.

02. References:
    None

03. GFM:
    None

04. Safety Precautions:
    Prior to commencing work, follow vessel's LOTO policy and procedures.
    Follow all applicable state local and federal requirements including those specified in EM-385-1-1 latest revision

05. Specifications:
    Provide two (2) Flowserve 2K3x2V-10RV M3V Pumps with the following operating characteristics:

    Capacity: 135 GPM
    Total Head – Feet: 69
    Speed – RPM: 1750
    Specific Gravity: 1.0
    Impeller Diameter: 8.38in
    Impeller Material: 316 Stainless Steel

    460 V / 3 / 60 Hz, 5HP, TEFC-W22, SD, PE Motor.

DRAFT

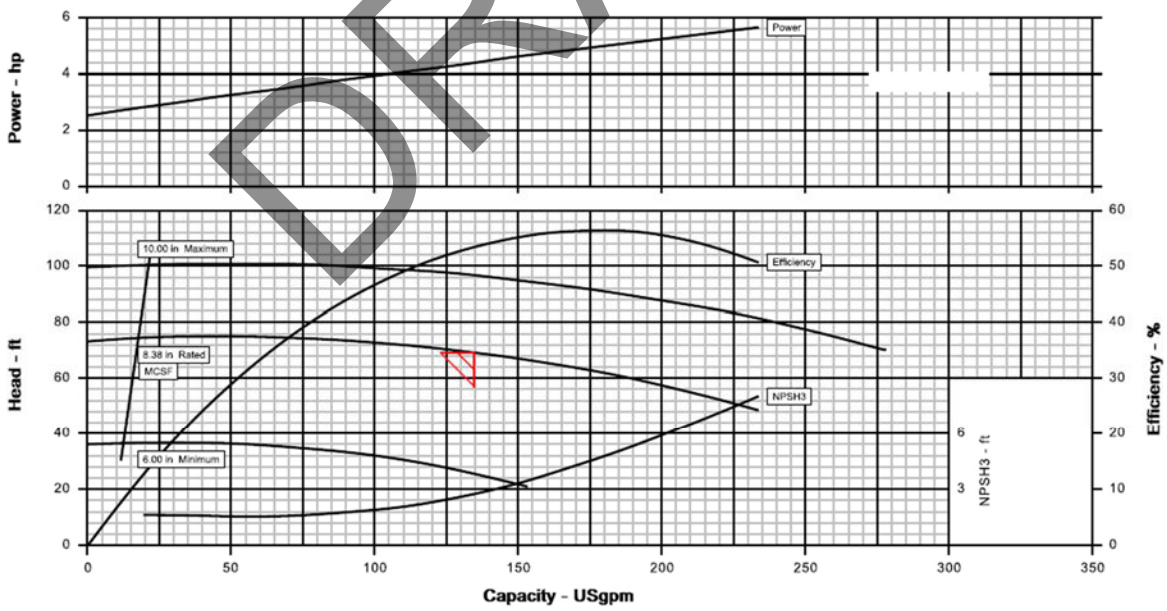

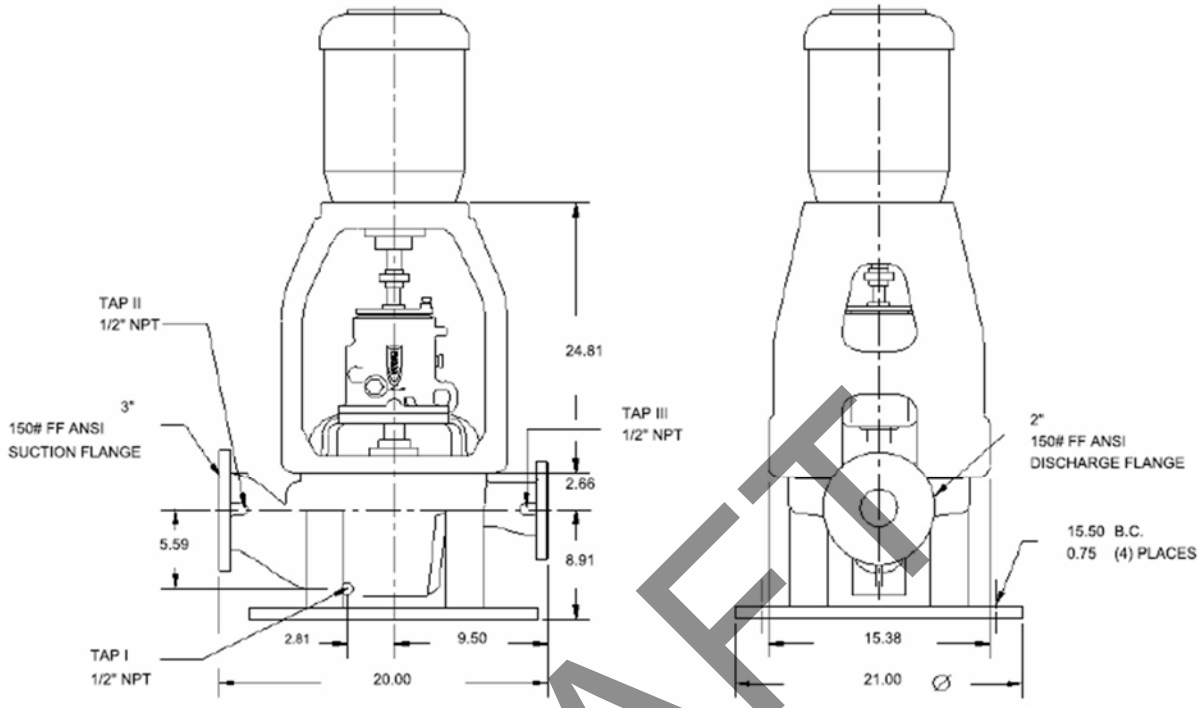

DRAFT

06. Delivery Information:
Availability 0730-1500 Pacific Time, Monday – Thursday

US Moorings
8010 NW St Helens Rd,
Portland OR 97210.

07. Testing
None.

08. Inspection / Documentation
Final inspection upon delivery at US Moorings.

09. Point of Contact (POC):
Delivery POC – [redacted]
Contracting Officer (KO) – Ian Lutjens – Ian.K.Lutjens@usace.army.mil

10. Invoice Submittal:
Upon satisfactory completion of delivery, please submit an electronic PDF invoice to USACE Millington (the USACE Finance Center) via email address: cefc-g2invoices@usace.army.mil;
The following shall be CC'd on the invoice submittal emails:
[redacted] and Ian.K.Lutjens@usace.army.mil